



(11) **EP 2 362 374 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
24.06.2015 Bulletin 2015/26

(51) Int Cl.:
G09G 3/36^(2006.01)

(21) Application number: **10191779.7**

(22) Date of filing: **18.11.2010**

(54) **LCD display visual enhancement driving circuit and method**

Antriebsschaltung mit visueller Verbesserung für LCD-Anzeige und Verfahren

Circuit de commande d'amélioration visuelle d'affichage LCD et procédé

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **23.02.2010 US 660315**

(43) Date of publication of application:
31.08.2011 Bulletin 2011/35

(73) Proprietor: **AU Optronics Corporation
Hsin-Chu (TW)**

(72) Inventors:
• **Chen, Yung-Chih
Hsin-Chu (TW)**

- **Yang, Yu-Chung
Hsin-Chu (TW)**
- **Lin, Kun-Yueh
Hsin-Chu (TW)**
- **Liu, Chun-Hsin
Hsin-Chu (TW)**

(74) Representative: **Lang, Christian et al
LangPatent
Anwaltskanzlei
Rosenheimer Strasse 139
81671 München (DE)**

(56) References cited:
**US-A1- 2008 055 292 US-A1- 2009 027 325
US-A1- 2009 027 581 US-A1- 2010 007 594**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 362 374 B1

DescriptionBackground of the Invention

[0001] The present invention relates generally to a liquid crystal display (LCD) display and, more particularly, to a method for driving the pixels in an LCD display.

Background of the Invention

[0002] A typical liquid crystal display (LCD) panel has a plurality of pixels arranged in a two-dimensional array, driven by a data driver and a gate driver. As shown in Figure 1, the LCD pixels 10 in a LCD panel 1 are arranged in rows and columns in a display area 100. A data driver 200 is used to provide a signal indicative of data to each of the columns and a gate driver is used to provide a gate line signal to each of the rows. In a color LCD panel, an image is generally presented in three colors: red (R), green (G) and blue (B). Each of the pixels 10 is typically divided into three color sub-pixels: red sub-pixel 20R, green sub-pixel 20G and blue sub-pixel 20B, as shown in Figure 2. A data line 221 is used to provide the data signal to the R sub-pixel in a column, a data line 222 is used to provide the data signal to the G sub-pixel in the same pixel column, and a data line 223 is used to provide the data signal to the B sub-pixel in the same pixel column. The data line 224 is used to provide the data signal to the R sub-pixel in the next pixel column. A gate line 231 is used to provide the gate line signal to all sub-pixels in a row and a gate line 232 is used to provide the gate line signal to all sub-pixels in the next row. In a transmissive LCD panel, each of the color sub-pixels may be further divided into a transmissive area and a reflective area.

[0003] A typical LCD panel is fabricated with two substrates. As shown in Figure 3, the LCD panel has an upper substrate 12 and a lower substrate 18 and a liquid crystal layer disposed between the substrates. On the upper substrate 12, a transparent, electrically conducting layer 14 is provided as a common electrode. In each of the color sub-pixels 20, an electrically conducting layer is disposed on the lower substrate 18 as a pixel electrode. The LCD panel also comprises an electronic component layer 17 for controlling the voltage between the common electrode and the pixel electrode. The common electrode is usually connected to a common ground or a common voltage source COM.

[0004] Conventional liquid crystal display panels having a basic structure as presented by Fig. 1 are described by US 2008/0055292 A1, US 2009/0027325 A1, US 2009/0027581 A1 and US 2010/0007594 A1. Each pixel includes sub-pixels including capacitors, which are controlled by a switching element so as to be connected to the same data line during a charging period. The pixel further includes an additional switch configured to control partial discharge of the capacitors of one of the sub-pixels.

[0005] It is the object of the present application to provide a liquid crystal display panel having improved display properties by adjusting the voltage level difference between the sub-pixel areas.

Summary of the Invention

[0006] The above-mentioned object is solved by the liquid crystal display panel according to claim 1 and the method of operating a liquid crystal display panel according to claim 8. Advantageous improvements of the invention are subject matter of respective dependent claims.

[0007] A pixel in a liquid crystal display panel, according to various embodiments of the present invention, comprises a first sub-pixel area having a first sub-pixel electrode (32) and a second sub-pixel area having a second sub-pixel electrode (34). Each sub-pixel electrode is associated with a capacitor. When a gate-line signal and a data voltage is provided to the pixel, the voltage level on the first sub-pixel electrode is substantially equal to or slightly higher than the voltage level on the second sub-pixel electrode and the capacitor associated with each sub-pixel electrode is charged. When the gate-line signal has entirely passed on partially passed, a circuit element causes the capacitor associated with the second sub-pixel electrode to transfer its charge to another capacitor, resulting in a reduction of the voltage level on the second sub-pixel electrode. As such, the alignment of the liquid crystal molecules in the first sub-pixel area is slightly different from the alignment of the liquid crystal molecules in the second sub-pixel area, resulting in a slight brightness difference between the first and the second sub-pixel areas. This brightness difference may reduce the color shift of the liquid crystal display panel.

[0008] Thus, the first aspect of the present invention is a liquid crystal display panel, comprising:

- a plurality of pixels arranged in a plurality of rows and columns;
- a plurality of data lines, each for providing data signals to the pixels in a column, and
- a plurality of gate-lines, each for providing gate-line signals to the pixels in a row, wherein each of some or all of the pixels comprises:

a first sub-pixel area comprising a first sub-pixel electrode (32) electrically connected to a first capacitor (ClcA, CstA), the first sub-pixel electrode arranged to receive the data signal from one of the data lines via a first switching element (132); and

a second sub-pixel area comprises a second sub-pixel electrode (34) electrically connected to a second capacitor (ClcB) and a first capacitor end of a third capacitor (CstB), the second sub-pixel electrode arranged to receive said data signal from said one of the data lines via a second switching element (134), wherein a second capacitor end of the third capacitor (CstB) is connectable to said one of the data lines via a third switching element (136), wherein each of the first, second and third switching elements comprises a control end arranged to receive a first gate-line signal for charging the first capacitor (ClcA, CstA) and the second capacitor (ClcB), and wherein the second capacitor end of the third capacitor (CstB) is connected to a circuit element (Cx, 138, R, 139) such that when the first gate-line signal has at least partially passed, part of electrical charge on the second capacitor (ClcB) is transferred to the third capacitor (CstB).

[0009] In one embodiment of the present invention (Figure 8), one end of the first and second capacitors is connected to a common voltage (COM), and the circuit element comprises a fourth switching element (138) having a control end arranged to receive a second gate-line signal for connecting the second end of the third capacitor (CstB) to the common voltage after the first gate-line signal has passed.

[0010] In another embodiment of the present invention (Figure 5), one end of the first and second capacitors is connected to a common voltage (COM), and the second end of the third capacitor (CstB) is also connected to the common voltage via a fourth capacitor (Cx).

[0011] In yet another embodiment of the present invention (Figure 11), the second capacitor (ClcB) is connected to a fifth capacitor (CstB) in parallel.

[0012] In a different embodiment of the present invention (Figure 9), one end of the first and second capacitors is connected to a common voltage (COM), and the circuit element comprises a resistor (R) connected to the common voltage.

[0013] In another embodiment of the present invention (Figure 10), the circuit element comprises a TFT with a diode connection.

[0014] In still another embodiment of the present invention (Figure 12b), one end of the first and second capacitors is connected to a common voltage (COM), and the circuit element comprises a sixth capacitor (Cs) connected to the common voltage via a fourth switching element (138) having a control end arranged to receive a second gate-line signal for connecting the second end of the third capacitor (CstB) to the common voltage via the sixth capacitor (Cs) after the first gate-line signal has partially passed.

[0015] In yet another embodiment of the present invention (Figure 12a), one end of the first and second capacitors is connected to a common voltage (COM), the second end of the third capacitor (CstB) is connected to the third switching element (136) via a sixth capacitor (Cs) and the circuit element comprises a fourth switching element (138) having a control end arranged to receive a second gate-line signal for connecting the second end of the third capacitor (CstB) to the common voltage after the first gate-line signal has partially passed.

[0016] The second aspect of the present invention is a method for operating a liquid crystal display panel, the display panel comprising:

a plurality of pixels arranged in a plurality of rows and columns;
a plurality of data lines, each for providing data signals to the pixels in a column, and
a plurality of gate-lines, each for providing gate-line signals to the pixels in a row, wherein each of some or all of the pixels comprises:

a first sub-pixel area comprising a first sub-pixel electrode (32) electrically connected to a first capacitor (ClcA, CstA), the first sub-pixel electrode arranged to receive the data signal from one of the data lines via a first switching element (132); and

a second sub-pixel area comprises a second sub-pixel electrode (34) electrically connected to a second capacitor (ClcB), the second sub-pixel electrode arranged to receive the data signal from said one of the data lines via a second switching element (134).

[0017] The method comprises the steps of:

connecting a first end of a third capacitor (CstB) to the second sub-pixel electrode (34) and a second end of the third capacitor to said one of the data lines via a third switching element, wherein each of the first, second and third switching elements comprises a control end arranged to receive a first gate line signal for switching;
charging the first capacitor (ClcA, CstA) to a first voltage level (Va) through the first switching element and charging the second capacitor (ClcB) to a second voltage level (Vb) through the second switching element in response to

the first gate-line signal; and

operatively connecting the second end of the third capacitor to a circuit element so as to transfer part of electrical charge on the second capacitor to the third capacitor when the first gate-line signal has at least partially passed.

[0018] In one embodiment of the present invention (Figure 8), one end of the first and second capacitors is connected to a common voltage (COM), and the circuit element comprises a fourth switching element (138) having a control end arranged to receive a second gate-line signal for connecting the second end of the third capacitor (CstB) to the common voltage after the first gate-line signal has passed.

[0019] In another embodiment of the present invention (Figure 5), the method further comprises:

connecting a fourth capacitor (Cx) between the second end of the third capacitor (CstB) and the common voltage (COM).

[0020] In yet another embodiment of the present invention (Figure 11), the method further comprises:

connecting a fifth capacitor (CstB) to the second capacitor (ClcB) in parallel.

[0021] In a different embodiment of the present invention (Figure 9), one end of the first and second capacitors is connected to a common voltage (COM), and the circuit element comprises a resistor (R) connected to the common voltage.

[0022] In another embodiment of the present invention (Figure 12b), one end of the first and second capacitors is connected to a common voltage (COM), and the circuit element comprises a sixth capacitor (Cs) connected to the common voltage via a fourth switching element (138) having a control end arranged to receive a second gate-line signal for connecting the second end of the third capacitor (CstB) to the common voltage via the sixth capacitor (Cs) after the first gate-line signal has partially passed.

[0023] In yet another embodiment of the present invention (Figure 12a), one end of the first and second capacitors is connected to a common voltage (COM), the second end of the third capacitor (CstB) is connected to the third switching element (136) via a sixth capacitor (Cs) and the circuit element comprises a fourth switching element (138) having a control end arranged to receive a second gate-line signal for connecting the second end of the third capacitor (CstB) to the common voltage after the first gate-line signal has partially passed.

[0024] The present invention will become apparent upon reading the description taken in conjunction with Figures 4 to 13.

Brief Description of the Drawings

[0025]

Figure 1 shows a typical LCD panel.

Figure 2 shows three color sub-pixels in a pixel in a typical LCD panel.

Figure 3 shows a cross sectional view of a pixel or color sub-pixel in a typical LCD panel.

Figure 4 shows the sub-pixel electrodes in a pixel or color sub-pixel in an LCD panel, according to one embodiment of the present invention.

Figure 5 shows an equivalent circuit of the pixel or color sub-pixel, according to one embodiment of the present invention.

Figure 6 is a timing chart showing various signals and voltages in the pixel as shown in Figure 5.

Figure 7a shows an equivalent circuit of the pixel or color sub-pixel of Figure 5, when the gate-line signal is on.

Figure 7b shows an equivalent circuit of the pixel or color sub-pixel of Figure 5, when the next gate-line signal is on.

Figure 8 shows an equivalent circuit of the pixel or color sub-pixel, according to another embodiment of the present invention.

Figure 9 shows an equivalent circuit of the pixel or color sub-pixel, according to yet another embodiment of the present invention.

Figure 10 shows an equivalent circuit of the pixel or color sub-pixel, according to still another embodiment of the present invention.

Figure 11 shows an equivalent circuit of the pixel or color sub-pixel, according to a different embodiment of the present invention.

Figures 12a and 12b show an equivalent circuit of the pixel or color sub-pixel, according to another different embodiment of the present invention.

Figure 13 is a timing chart showing various signals and voltages in the pixel as shown in Figures 12a and 12b.

Detailed Description of the Invention

[0026] In various embodiments of the present invention, a pixel or color sub-pixel of a liquid crystal display (LCD) panel comprises two areas, each area comprising an area electrode, together with a common electrode, for controlling the alignment of the liquid crystal layer in the respective area. For simplicity, the term sub-pixel will be used to represent a pixel or a color sub-pixel. As shown in Figure 4, the sub-pixel 20₁ includes a first sub-pixel electrode 32₁ to define a first sub-pixel area and a second sub-pixel electrode 34₁ to define a second sub-pixel area. The sub-pixel 20₂ includes a first sub-pixel electrode 32₂ to define a first sub-pixel area and a second sub-pixel electrode 34₂ to define a second sub-pixel area. The sub-pixel 20₃ and other sub-pixels may have similar first and second sub-pixel electrodes. The sub-pixels in a column share a data line, and the sub-pixels in a row share a gate line. As shown in Figure 4, the sub-pixels 20₁, 20₂, 20₃, ... share a data line D1, and the sub-pixels in the next column (not shown) share a different data line D2. The sub-pixel 20₁ and other sub-pixels on the same row share a gate line G1; the sub-pixel 20₂ and other sub-pixels on the same row share a gate line G2; and the sub-pixel 20₃ and other sub-pixels on the same row share a gate line G3.

[0027] The first sub-pixel electrode 32₁ of the sub-pixel 20₁ is connected to the data line D1 through a first switching element 132₁ and the second sub-pixel electrode 34₁ is connected to the data line D1 through a second switching element 134₁. The control end of the first and second switching elements 132₁ and 134₁ is connected to the gate line G1. The first sub-pixel electrode 32₂ of the sub-pixel 20₂ is connected to the data line D1 through a first switching element 132₂ and the second sub-pixel electrode 34₂ is connected to the data line D1 through a second switching element 134₂. The control end of the first and second switching elements 132₂ and 134₂ is connected to the gate line G2.

[0028] The first sub-pixel electrode 32₁ and the common electrode (COM, see Figure 3) form a capacitor ClcA and the second sub-pixel electrode 34₁ and the common electrode form a capacitor ClcB, as shown in Figure 5. Furthermore, the first sub-pixel electrode 32₁ is connected to a storage capacitor CstA and the second sub-pixel electrode 34₁ is connected to a storage capacitor CstB. Likewise, the first sub-pixel electrode 32₂ and the common electrode form a capacitor ClcA and the second sub-pixel electrode 34₂ and the common electrode form a capacitor ClcB. The first sub-pixel electrode 32₂ is connected to a storage capacitor CstA and the second sub-pixel electrode 34₂ is connected to a storage capacitor CstB. The charge storage capacitor CstB is also connected to the data line D1 via a third switching element 136₁. The control end of the third switching element 136₁ is also connected to the gate line G1.

[0029] When the gate-line signal on G1 is provided to the sub-pixel 20₁, the voltage level Va on the first sub-pixel electrode, the voltage level Vb on the second sub-pixel electrode and the voltage level Vx are substantially the same. The capacitors ClcA, CstB in the first sub-pixel area are charged according to the voltage level Va relative to COM. The capacitor ClcB in the second sub-pixel is charged according to the voltage level Vb relative to COM. Because the voltage level Vb on one end of the storage capacitor CstB and the voltage level Vx on the other end are substantially the same, the storage capacitor CstB is not charged.

[0030] When the gate line signal is completely passed, a circuit element in the pixel causes the voltage potential on the storage capacitor CstB to increase. As such, the charge in the capacitor ClcB is partly transferred to the storage capacitor CstB and the voltage level Vb is reduced accordingly. In the embodiment as shown in Figure 5, the second charge-storage capacitor CstB is connected to COM separately via a capacitor Cx and via a fourth switching element 138₁ which has a control end connected to a second gate-line G2 for discharging purposes, due to the change in the voltage level Vx between the second charge-storage capacitor CstB and capacitor Cx.

[0031] Figure 6 is a timing chart showing the voltage level Va, the voltage level Vb and the voltage level Vx, in relation to the gate-line signals in G1 and G2. As shown in Figure 6, the voltage level Vb is reduced when the gate-line signal G2 is provided to the pixel. The amount of voltage reduction in Vb is determined by the charge amount transferred to the storage capacitor CstB. When the gate-line signal G1 is provided to the sub-pixel 20₁, all the first, second and third switching elements are in a conducting state. The equivalent circuit in this situation is illustrated in Figure 7a. After the charging of the capacitors in the sub-pixel 20₁ is substantially completed, the voltage levels Va, Vb and Vx is substantially equal to Vdata or the data signal on D1. There is substantially no charge in the charge-storage capacitor CstB because the voltage differential between its two capacitor ends is substantially zero. The charge in the capacitor ClcB is equal to qB, and we have:

$$Va = Vb = Vx = Vdata \quad (1)$$

$$qB = Vb * ClcB = Vdata * ClcB \quad (2)$$

[0032] When the gate-line signal G2 is provided to the sub-pixel 20₁ and the gate-line signal G1 has passed, the first, second and third switching elements are in a non-conducting state and the fourth switching element is in a conducting

state. The equivalent circuit in this situation is illustrated in Figure 7b. While the voltage level V_a is substantially unchanged, the voltage level V_b is reduced. As the voltage level V_x has changed from V_{data} to COM, some of the charge q_B in $ClcB$ is transferred to $CstB$. When the charge transfer is completed, we have

$$V_a = V_{data} \quad (3)$$

$$\begin{aligned} V_b &= q_B / (ClcB + CstB) \\ &= V_{data} * ClcB / (ClcB + CstB) \\ &< V_{data} \\ &< V_a \end{aligned} \quad (4)$$

Thus, the voltage level in the sub-pixel electrode in the first sub-pixel area is higher than the voltage level in the sub-pixel electrode in the second sub-pixel area. As such, the brightness of the second sub-pixel area is generally lower than the brightness of the first sub-pixel area,

[0033] Figure 8 shows another embodiment of the present invention, wherein the capacitor C_x is omitted. With the embodiment as shown in Figure 8, the voltage levels V_a and V_b are substantially the same as those shown in Figure 6. The voltage level V_x may rise more rapidly as compared to that shown in Figure 6.

[0034] Figure 9 shows yet another embodiment of the present invention, which is a variation from the embodiment as shown in Figure 8. Instead of using the circuit element 138₁ for controlling the charge transfer from $ClcB$ to $CstB$, a resistor R is used. In the embodiment as shown in Figure 9, when the gate-line signal $G1$ is on, we have

$$V_a = V_b = V_{data} > V_x = V_{com} + V_r \quad (5)$$

and there is a current through the resistor R . When the gate-line signal $G1$ has passed, the current through R is diminishing or $V_r=0$. Finally the voltage level at point x is equal to COM, regardless of the gate-line signal $G2$. We then have

$$\begin{aligned} V_b &= q_B / (ClcB + CstB) \\ &= [V_{data} * ClcB + (V_{data} - V_x) * CstB] / (ClcB + CstB) \\ &= V_{data} - [V_x * CstB / (ClcB + CstB)] \end{aligned} \quad (6)$$

[0035] Figure 10 shows yet another embodiment of the present invention, which is a variation of the embodiment as shown in Figure 5. Instead of using the circuit element 138₁ for controlling the charge transfer from $ClcB$ to $CstB$, a circuit element 139₁ is used. In the embodiment as shown in Figure 10, when the gate-line signal $G1$ is on, we have

$$V_a = V_b = V_{data} > V_x \quad (7)$$

and there is a current through the circuit element 139₁. When the gate-line signal $G1$ has passed, the current through the circuit element 139₁ is diminishing. Finally the voltage level at point x is equal to COM, regardless of the gate-line signal $G2$. We then have

$$\begin{aligned} V_b &= q_B / (ClcB + CstB) \\ &= [V_{data} * ClcB + (V_{data} - V_x) * CstB] / (ClcB + CstB) \\ &= V_{data} - [V_x * CstB / (ClcB + CstB)] \end{aligned} \quad (8)$$

Thus, in the embodiments as shown in Figures 9 and 10, when the gate-line signal $G1$ has passed, while V_a is still substantially equal to V_{data} , V_b is smaller than V_{data} due to the fact that the resistor R (Figure 9) or the TFT with a diode connection 139 (Figure 10) causes the capacitor associated with the second sub-pixel electrode to transfer its

charge to another capacitor, resulting in a reduction of the voltage level on the second sub-pixel electrode. As such, the alignment of the liquid crystal molecules in the first sub-pixel area is slightly different from the alignment of the liquid crystal molecules in the second sub-pixel area, resulting in a slight brightness difference between the first and the second sub-pixel areas. This brightness difference may reduce the color shift of the liquid crystal display panel.

[0036] It should be noted that, in the embodiment as shown in Figure 10, the capacitor Cx is optional.

[0037] Figure 11 shows a variation of the embodiment as shown in Figures 5 and 8. As shown in Figure 11, the first sub-pixel area has a first sub-pixel electrode connected to a first storage capacitor CstA and the second sub-pixel area has a second sub-pixel electrode connected to a second storage capacitor CstB. Additionally, the second sub-pixel electrode is connected to a circuit element 138₁ through a capacitor Cx. When the gate-line signal G1 is on, we have

$$V_a = V_b = V_x = V_{data}, \quad (9)$$

and the charge on the capacitor ClcB and CstB is

$$q_B = V_b * (ClcB + CstB) = V_{data} * (ClcB + CstB) \quad (10)$$

[0038] When the gate-line signal G2 is provided to the sub-pixel 20₁ and the gate-line signal G1 has passed, we have

$$V_a = V_{data} \quad (11)$$

$$\begin{aligned} V_b &= q_B / (ClcB + CstB + C_x) \\ &= V_{data} * (ClcB + CstB) / (ClcB + CstB + C_x) \\ &< V_{data} \\ &< V_a \end{aligned} \quad (12)$$

[0039] It should be noted that, in the embodiments as shown in Figures 5, 8-11, the gate-line signals G1 and G2 can be non-overlapping, as shown in Figure 6. In a display panel where pre-charging of pixels is carried out, the gate-line signal G_{m+1} partially occurs before the gate-line G_m has passed in order to pre-charge the pixels in the (m+1)th row. This requires the gate-line signals in adjacent gate-lines to be partially over-lapped, as shown in Figure 13. The embodiments as shown in Figure 9 and 10 can be used when the gate-lines signals have an over-lapped period. But in the embodiments wherein the next gate-line signal is used to control the charge transfer, as shown in Figures 5, 8 and 11, a capacitor Cx is used to separate point x from the switching element 136₁ when the gate-lines signals have an overlapped period.

[0040] Figure 12 shows one of the different embodiments that can be used pre-charging purposes. As shown in Figure 12, the switching element 136₁ is connected to the circuit element 138₁ through a capacitor Cx. The timing chart illustrating various voltage levels is shown in Figure 13.

[0041] In summary, in a liquid crystal display panel according to various embodiments of the present invention, each pixel has a first sub-pixel area comprising a first sub-pixel electrode electrically connected to a first capacitor (ClcA, CstA), the first sub-pixel electrode (where V_a is) arranged to receive the data signal (G1) from one of the data lines via a first switching element (132); and a second sub-pixel area comprises a second sub-pixel electrode (where V_b is) electrically connected to a second capacitor and a first end of a third capacitor. In the embodiments as shown in Figures 5, 8, 9, 10, 12a and 12b, the second capacitor is ClcB and the third capacitor is CstB. In the embodiment as shown in Figure 11, the second capacitor includes ClcB and CstB and the third capacitor is Cx. The second sub-pixel electrode arranged to receive said data signal from the same data line via a second switching element (134), wherein a second end of the third capacitor is connected to the same data line via a third switching element (136), wherein each of the first, second and third switching elements comprises a control end (gate terminal) arranged to receive a gate-line signal (G1) for charging the first capacitor and the second capacitor, and wherein the second end of the third capacitor is connected to a circuit element (138, R, 139) such that when the gate-line signal has at least partially passed, the circuit element causes part of electrical charge on the second capacitor to transfer to the third capacitor. The circuit element may have a a fourth switching element (138) arranged to receive a second gate-line signal (G2) for connecting the

second end of the third capacitor to the common voltage after the first gate-line signal has passed.

[0042] In a different aspect, the present invention provide a method to achieve a voltage difference between the first sub-pixel electrode and the second sub-pixel electrode in some time periods during the operation of the liquid crystal display panel. The method includes the steps of connecting a first end of a third capacitor to the second sub-pixel electrode and a second end of the third capacitor to said one of the data lines via a third switching element, wherein each of the first, second and third switching elements comprises a control end arranged to receive a first gate line signal for switching; charging the first capacitor to a first voltage level through the first switching element and charging the second capacitor to a second voltage level through the second switching element in response to the first gate-line signal; and operatively connecting the second end of the third capacitor to a circuit element for transferring part of electrical charge on the second capacitor to the third capacitor when the first gate-line signal has at least partially passed so as to reduce the second voltage level.

[0043] Although the present invention has been described with respect to one or more embodiments thereof, it will be understood by those skilled in the art that the foregoing and various other changes, omissions and deviations in the form and detail thereof may be made without departing from the scope of this invention.

Claims

1. A liquid crystal display panel, comprising:

a plurality of pixels arranged in a plurality of rows and columns;
a plurality of data lines (D1, D2), each for providing data signals to the pixels in a column, and
a plurality of gate-lines (G1, G2, G3), each for providing gate-line signals to the pixels in a row, wherein each of some or all of the pixels comprises:

a first sub-pixel area comprising a first sub-pixel electrode (32₁) associated to a first capacitor (C1cA, CstA), the first sub-pixel electrode (32₁) arranged to receive the data signal from one of the data lines (D1) via a first switching element (132₁); and

a second sub-pixel area comprising a second sub-pixel electrode (34₁) associated to a second capacitor (C1cB), the second sub-pixel electrode (34₁) being arranged to receive said data signal from said one of the data lines (D1) via a second switching element (134₁), wherein each of the first and second switching elements (132₁, 134₁) comprises a control end arranged to receive a first gate-line signal for charging the first capacitor (C1cA, CstA) and the second capacitor (C1cB), **characterised in that:**

the second sub-pixel electrode (34₁) is connected to a first end of a third capacitor (CstB), and a second end of the third capacitor (CstB) is connectable to said one of the data lines (D1) via a third switching element (136₁), and the third switching element (136₁) comprises a control end also arranged to receive the first gate-line signal, and the second end of the third capacitor (CstB) is connected to a circuit element arranged to cause part of the electrical charge on the second capacitor to transfer to the third capacitor (CstB) when the first gate-line signal has at least partially passed.

2. A liquid crystal display panel according to claim 1, wherein one end of the first and second capacitors (C1cA, CstA, C1cB) is connected to a common voltage (COM), and the circuit element comprises a fourth switching element (138₁) having a control end arranged to receive a second gate-line signal for connecting the second end of the third capacitor (CstB) to the common voltage (COM) after the first gate-line signal has passed.

3. A liquid crystal display panel according to claim 2, wherein the second end of the third capacitor (CstB) is also connected to the common voltage (COM) via a fourth capacitor (Cx).

4. A liquid crystal display panel according to claim 1, wherein one end of the first and second capacitors (C1cA, CstA, C1cB) is connected to a common voltage (COM) and the circuit element comprises a resistor (R) connected to the common voltage (COM).

5. A liquid crystal display panel according to claim 1, wherein one end of the first and second capacitors (C1cA, CstA, C1cB) is connected to a common voltage (COM) and the circuit element (139₁) comprises a transistor with a diode connection, one end of the circuit element (139₁) connected to the common voltage (COM).

6. A liquid crystal display panel according to claim 1, wherein one end of the first and second capacitors (C1cA, CstA, C1cB) is connected to a common voltage (COM), and the circuit element comprises a fourth capacitor (Cs) connectable to the common voltage (COM) via a fourth switching element (138₁), the fourth switching element (138₁) comprising

a control end arranged to receive a second gate-line signal for connecting the second end of the third capacitor (CstB) to the common voltage (COM) via the fourth capacitor (Cs) after the first gate-line signal has partially passed.

7. A liquid crystal display panel according to claim 1, wherein one end of the first and second capacitors (ClcA, CstA, ClcB) is connected to a common voltage (COM), the second end of the third capacitor (CstB) is connected to the third switching element (136₁) via a fourth capacitor (Cs) and the circuit element comprises a fourth switching element (138₁) having a control end arranged to receive a second gate-line signal for connecting the second end of the third capacitor (CstB) to the common voltage (COM) after the first gate-line signal has partially passed.

8. A method of operating a liquid crystal display panel according to one of the preceding claims, said method comprising:

in response to the first gate-line signal, causing the third switching element (136₁) to conduct;
in response to the first gate-line signal,
charging the first capacitor (ClcA, CstA) through the first switching element (132₁) such that the voltage (Va) at the first sub-pixel electrode (32₁) reaches a first voltage level, and charging the second capacitor (ClcB) through the second switching element (134₁) such that the voltage (Vb) at the second sub-pixel electrode (34₁) reaches said first voltage level; and
the circuit element causing the second end of the third capacitor (CstB) be pulled towards the common voltage so as to cause part of then electrical charge on the second capacitor to transfer to the third capacitor (CstB) when the first gate-line signal has at least partially passed, so as to reduce the voltage level (Vb) at the second sub-pixel electrode (34₁).

Patentansprüche

1. Flüssigkristallanzeigenpaneel, welches umfasst:

eine Vielzahl von Bildpunkten, die in einer Vielzahl von Zeilen und Spalten angeordnet sind,
eine Vielzahl von Datenleitungen (D1, D2), die jede dazu dienen, Datensignale an die Bildpunkte einer Spalte zu übermitteln, und
eine Vielzahl von Gateleitungen (G1, G2, G3), die jede dazu dienen, Gateleitungssignale an die Bildpunkte einer Zeile zu übermitteln, wobei einige oder alle der Bildpunkte umfassen:

einen ersten Unterbildpunktbereich, der eine erste Unterbildpunktelektrode (32₁) umfasst, die mit einem ersten Kondensator (ClcA, CstA) verbunden ist, wobei die erste Unterbildpunktelektrode (32₁) konfiguriert ist, das Datensignal von einer der Datenleitungen (D1) mittels eines ersten Schaltelements (132₁) zu empfangen; und

einen zweiten Unterbildpunktbereich, der eine zweite Unterbildpunktelektrode (34₁) umfasst, die mit einem zweiten Kondensator (ClcB) verbunden ist, wobei die zweite Unterbildpunktelektrode (34₁) angeordnet ist, besagtes Datensignal von der einen der Datenleitungen (D1) mittels eines zweiten Schaltelements (134₁) zu empfangen, wobei jedes der ersten und zweiten Schaltelemente (132₁, 134₁) ein Steuerungsende umfasst, welches angeordnet ist, ein erstes Gateleitungssignal zum Aufladen des ersten Kondensators (ClcA, CstA) und des zweiten Kondensators (ClcB) zu empfangen,

dadurch gekennzeichnet, dass

die zweite Unterbildpunktelektrode (34₁) mit einem ersten Ende eines dritten Kondensators (CstB) verbunden ist und ein zweites Ende des dritten Kondensators (CstB) mittels eines dritten Schaltelements (136₁) mit der einen der Datenleitungen (D1) verbindbar ist und das dritte Schaltelement (136₁) ein Steuerungsende umfasst, welches ebenfalls angeordnet ist, das erste Gateleitungssignal zu empfangen, und das zweite Ende des dritten Kondensators (CstB) mit einem Schaltkreiselement verbunden ist, welches angeordnet ist, zu veranlassen, dass Teile der elektrischen Ladung von dem zweiten Kondensator auf den dritten Kondensator (CstB) übertragen werden, wenn das erste Gateleitungssignal zumindest teilweise vorbeigelaufen ist.

2. Flüssigkristallanzeigenpaneel gemäß Anspruch 1, wobei ein Ende des ersten und zweiten Kondensators (ClcA, CstA, ClcB) mit einer gemeinsamen Spannung (COM) verbunden ist und das Schaltkreiselement ein viertes Schaltelement (138₁) umfasst, welches ein Steuerungsende aufweist, das angeordnet ist, ein zweites Gateleitungssignal zu empfangen, um das zweite Ende des dritten Kondensators (CstB) mit der gemeinsamen Spannung (COM) zu verbinden, nachdem das erste Gateleitungssignal vorübergefahren ist.

3. Flüssigkristallanzeigenpaneel gemäß Anspruch 2, wobei das zweite Ende des dritten Kondensators (CstB) ebenfalls über einen vierten Kondensator (Cx) mit der gemeinsamen Spannung (COM) verbunden ist.
4. Flüssigkristallanzeigenpaneel gemäß Anspruch 1, wobei ein Ende des ersten und zweiten Kondensators (ClcA, CstA, ClcB) mit einer gemeinsamen Spannung (COM) verbunden sind und das Schaltkreiselement einen Widerstand (R) umfasst, der mit der gemeinsamen Spannung (COM) verbunden ist.
5. Flüssigkristallanzeigenpaneel gemäß Anspruch 1, wobei ein Ende des ersten und zweiten Kondensators (ClcA, CstA, ClcB) mit einer gemeinsamen Spannung (COM) verbunden sind und das Schaltkreiselement (139₁) einen Transistor mit einer Diodenverbindung umfasst, wobei ein Ende des Schaltkreiselements (139₁) mit der gemeinsamen Spannung (COM) verbunden ist.
6. Flüssigkristallanzeigenpaneel gemäß Anspruch 1, wobei ein Ende des ersten und zweiten Kondensators (ClcA, CstA, ClcB) mit einer gemeinsamen Spannung (COM) verbunden sind und das Schaltkreiselement (139₁) einen vierten Kondensator (Cs) umfasst, der über ein viertes Schaltelement (138₁) mit der gemeinsamen Spannung (COM) verbindbar ist, wobei das vierte Schaltelement (138₁) ein Steuerungsende umfasst, welches konfiguriert ist, ein zweites Gateleitungssignal zu empfangen, um das zweite Ende des dritten Kondensators (CstB) über den vierten Kondensator (Cs) mit der gemeinsamen Spannung (COM) zu verbinden, nachdem das erste Gateleitungssignal teilweise vorbeigelaufen ist.
7. Flüssigkristallanzeigenpaneel gemäß Anspruch 1, wobei ein Ende des ersten und zweiten Kondensators (ClcA, CstA, ClcB) mit einer gemeinsamen Spannung (COM) verbunden sind, das zweite Ende des dritten Kondensators (CstB) über den vierten Kondensator (Cs) mit dem dritten Schaltelement (136₁) verbunden ist und das Schaltkreiselement ein viertes Schaltelement (138₁) umfasst, welches ein Steuerungsende aufweist, das angeordnet ist, ein zweites Gateleitungssignal zu empfangen, um das zweite Ende des dritten Kondensators (CstB) mit der gemeinsamen Spannung (COM) zu verbinden, nachdem das erste Gateleitungssignal teilweise vorübergefahren ist.
8. Verfahren für den Betrieb eines Flüssigkristallanzeigenpaneels gemäß einem der vorangegangenen Ansprüche, wobei besagtes Verfahren die folgenden Schritte umfasst:

Veranlassen, dass das dritte Schaltelement (136₁) als Antwort auf das erste Gateleitungssignal leitet, Laden des ersten Kondensators (ClcA, CstA) durch das erste Schaltelement (132₁) als Antwort auf das erste Gateleitungssignal, sodass die Spannung (Va) an der ersten Unterbildpunktelektrode (32₁) ein erstes Spannungsniveau erreicht, und

Laden des zweiten Kondensators (ClcB) durch das zweite Schaltelement (134₁), sodass die Spannung (Vb) an der zweiten Unterbildpunktelektrode (34₁) besagtes erstes Spannungsniveau erreicht, und

Veranlassen durch das Schaltkreiselement, dass das zweite Ende des dritten Kondensators (CstB) in Richtung der gemeinsamen Spannung (COM) gezogen wird, sodass veranlasst wird, dass Teile der elektrischen Ladung von dem zweiten Kondensator auf den dritten Kondensator (CstB) transferiert werden, wenn das erste Gateleitungssignal zumindest teilweise vorübergefahren ist, damit das Spannungsniveau (Vb) an der zweiten Unterbildpunktelektrode (34₁) verringert wird.

Revendications

1. Afficheur à cristaux liquides comprenant:

une pluralité de pixels arrangés dans une pluralité de rangées et de colonnes ;
 une pluralité de lignes de données (D1, D2), chacune pour fournir des signaux de données aux pixels dans une colonne et
 une pluralité de lignes de grille (G1, G2, G3), chacune pour fournir des signaux de lignes de grilles aux pixels dans une rangée, chacun de quelques ou de tous les pixels comprenant :

une première zone sous-pixel comprenant une première électrode sous-pixel (32₁) associée à un premier condensateur (ClcA, CstA), la première électrode sous-pixel (32₁) étant arrangée pour recevoir le signal de données de l'une des lignes de données (D1) par l'intermédiaire d'un premier élément de commutation (132₁) et
 une seconde zone sous-pixel comprenant une seconde électrode sous-pixel (34₁) associée à un second

condensateur (ClcB), la seconde électrode sous-pixel (34_1) étant arrangée pour recevoir ledit signal de données de ladite ligne de données parmi les lignes de données (D1) par l'intermédiaire d'un second élément de commutation (134_1), chacun des premier et second éléments de commutation (132_1 , 134_1) comprenant une extrémité de commande arrangée pour recevoir un premier signal de ligne de grilles pour charger le premier condensateur (ClcA, CstA) et le second condensateur (ClcB),

caractérisé en ce que la seconde électrode sous-pixel (34_1) est reliée à une première extrémité d'un troisième condensateur (CstB) et une seconde extrémité du troisième condensateur (CstB) peut être reliée à ladite ligne de données parmi les lignes de données (D1) par l'intermédiaire d'un troisième élément de commutation (136_1) et le troisième élément de commutation (136_1) comprend une extrémité de commande qui est aussi arrangée pour recevoir le premier signal de ligne de grille et la seconde extrémité du troisième condensateur (CstB) est reliée à un élément de circuit arrangé pour causer le transfert d'une partie de la charge électrique sur le second condensateur au troisième condensateur (CstB) lorsque le premier signal de ligne de grille est au moins partiellement passé.

2. Afficheur à cristaux liquides selon la revendication 1 dans lequel une extrémité du premier et du second condensateur (ClcA, CstA, ClcB) est reliée à une tension commune (COM) et l'élément de circuit comprend un quatrième élément de commutation (138_1) qui a une extrémité de commande arrangée pour recevoir un second signal de ligne de grille pour relier la seconde extrémité du troisième condensateur (CstB) à la tension commune (COM) après que le premier signal de ligne de grille soit passé.

3. Afficheur à cristaux liquides selon la revendication 2 dans lequel la seconde extrémité du troisième condensateur (CstB) est aussi reliée à la tension commune (COM) par l'intermédiaire d'un quatrième condensateur (Cx).

4. Afficheur à cristaux liquides selon la revendication 1 dans lequel une extrémité du premier et du second condensateur (ClcA, CstA, ClcB) est reliée à une tension commune (COM) et l'élément de circuit comprend une résistance (R) reliée à la tension commune (COM).

5. Afficheur à cristaux liquides selon la revendication 1 dans lequel une extrémité du premier et du second condensateur (ClcA, CstA, ClcB) est reliée à une tension commune (COM) et l'élément de circuit (139_1) comprend un transistor avec une connexion de diode, une extrémité de l'élément de circuit (139_1) étant reliée à la tension commune (COM).

6. Afficheur à cristaux liquides selon la revendication 1 dans lequel une extrémité du premier et du second condensateur (ClcA, CstA, ClcB) est reliée à une tension commune (COM) et l'élément de circuit (139_1) comprend un quatrième condensateur (Cs) qui peut être relié à la tension commune (COM) par un quatrième élément de commutation (138_1), le quatrième élément de commutation (138_1) comprenant une extrémité de commande arrangée pour recevoir un second signal de ligne de grille pour relier la seconde extrémité du troisième condensateur (CstB) à la tension commune (COM) par l'intermédiaire du quatrième condensateur (Cs) après que le premier signal de ligne de grille soit partiellement passé.

7. Afficheur à cristaux liquides selon la revendication 1 dans lequel une extrémité du premier et du second condensateur (ClcA, CstA, ClcB) est reliée à une tension commune (COM), la seconde extrémité du troisième condensateur (CstB) est reliée au troisième élément de commutation (136_1) par l'intermédiaire d'un quatrième condensateur (Cs) et l'élément de circuit comprend un quatrième élément de commutation (138_1) qui a une extrémité de commande arrangée pour recevoir un second signal de ligne de grille pour relier la seconde extrémité du troisième condensateur (CstB) à la tension commune (COM) après que le premier signal de ligne de grille soit partiellement passé.

8. Procédé pour faire fonctionner un afficheur à cristaux liquides selon l'une quelconque des revendications précédentes, ledit procédé comprenant :

en réponse au premier signal de ligne de grille le fait de faire en sorte que le troisième élément de commutation (136_1) soit conducteur ;

en réponse au premier signal de ligne de grille la charge du premier condensateur (ClcA, CstA) par le premier élément de commutation (132_1) de telle manière que la tension (V_a) à la première électrode sous-pixel (32_1) atteigne un premier niveau de tension et la charge du second condensateur (ClcB) par le second élément de commutation (134_1) de telle manière que la tension (V_b) à la seconde électrode sous-pixel (34_1) atteigne ledit premier niveau de tension et

l'élément de circuit faisant en sorte que la seconde extrémité du troisième condensateur (CstB) soit tirée vers la tension commune de manière à causer le transfert d'une partie de la charge électrique sur le second con-

EP 2 362 374 B1

densateur au troisième condensateur (CstB) lorsque le premier signal de ligne de grille est au moins partiellement passé de manière à réduire le niveau de tension (Vb) à la seconde électrode sous-pixel (34₁).

5

10

15

20

25

30

35

40

45

50

55

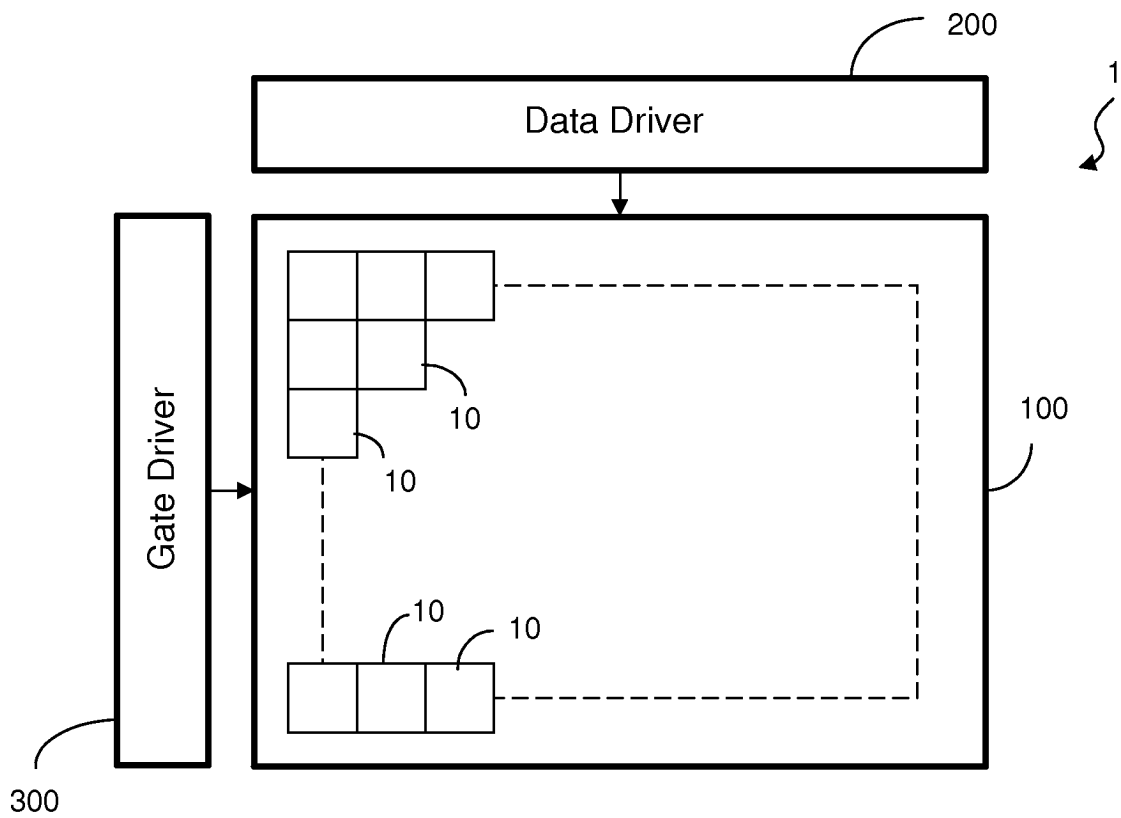
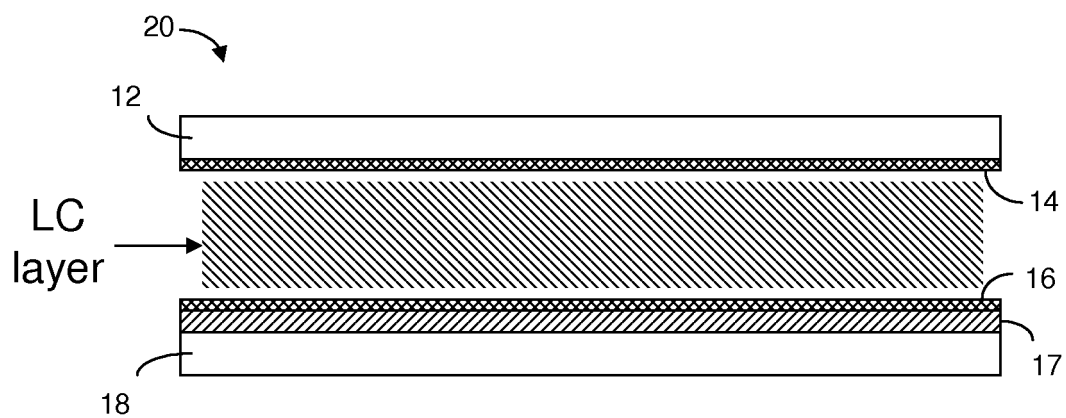
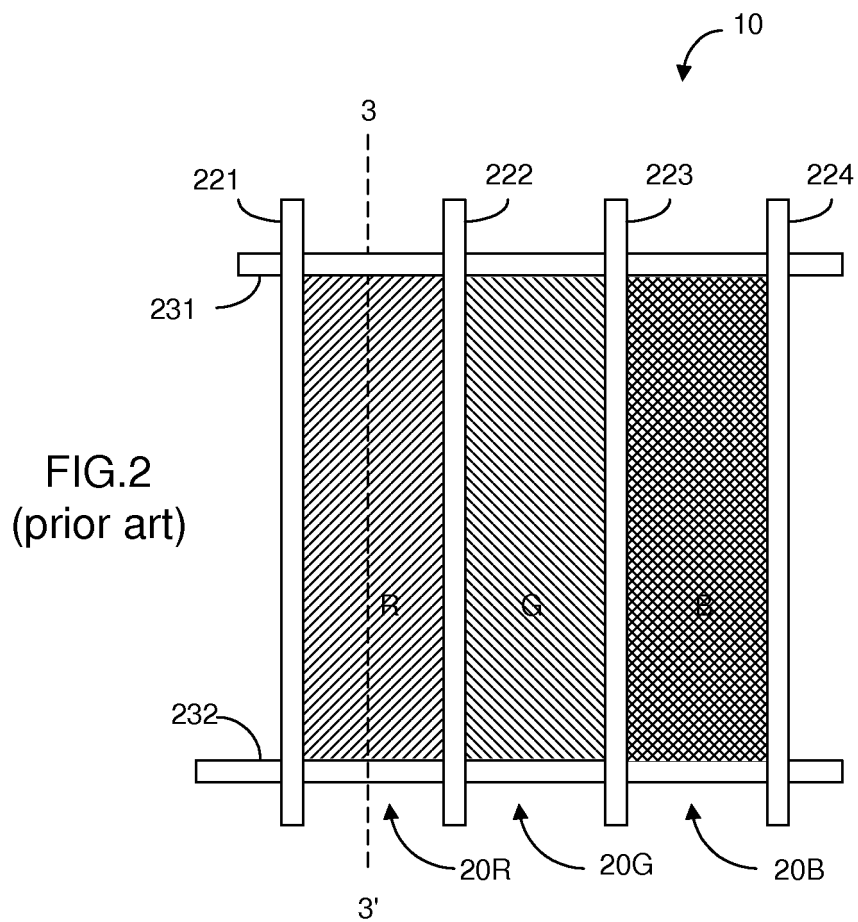


FIG. 1 (prior art)



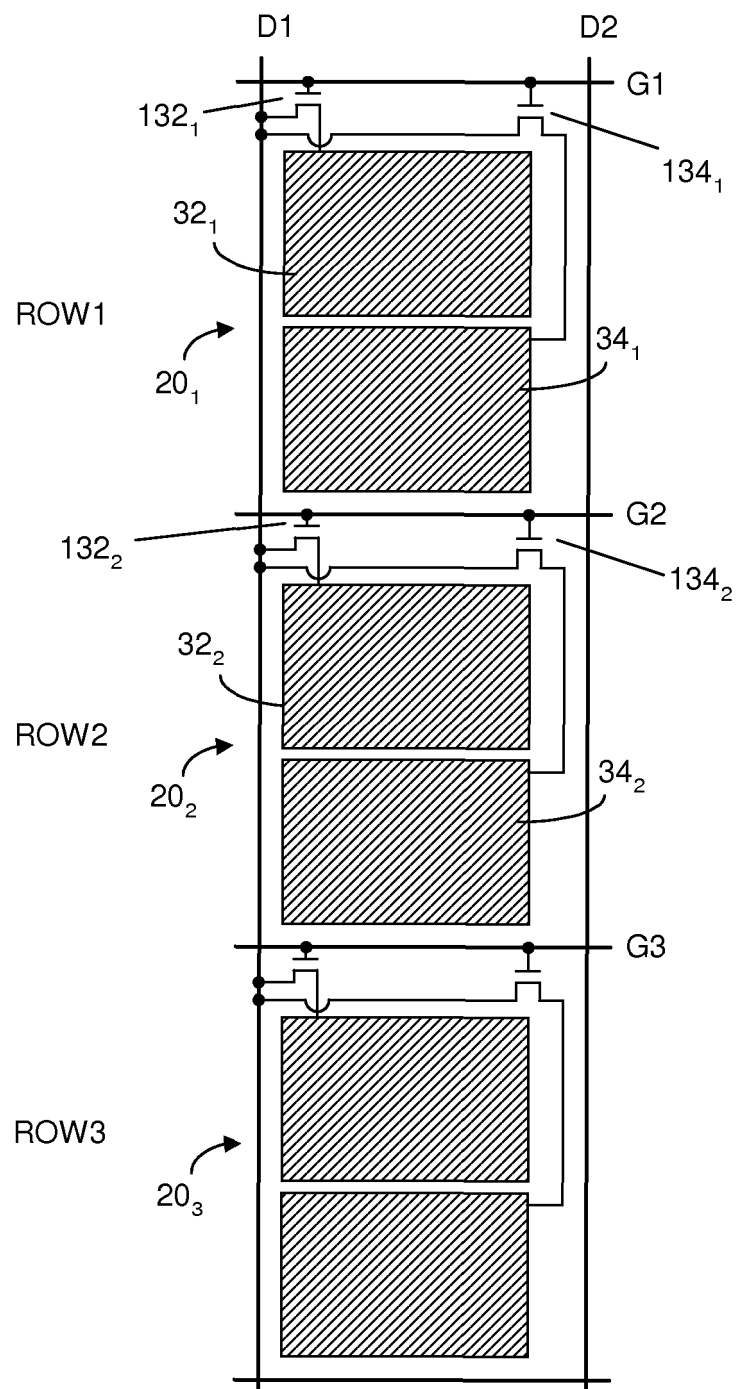


FIG.4

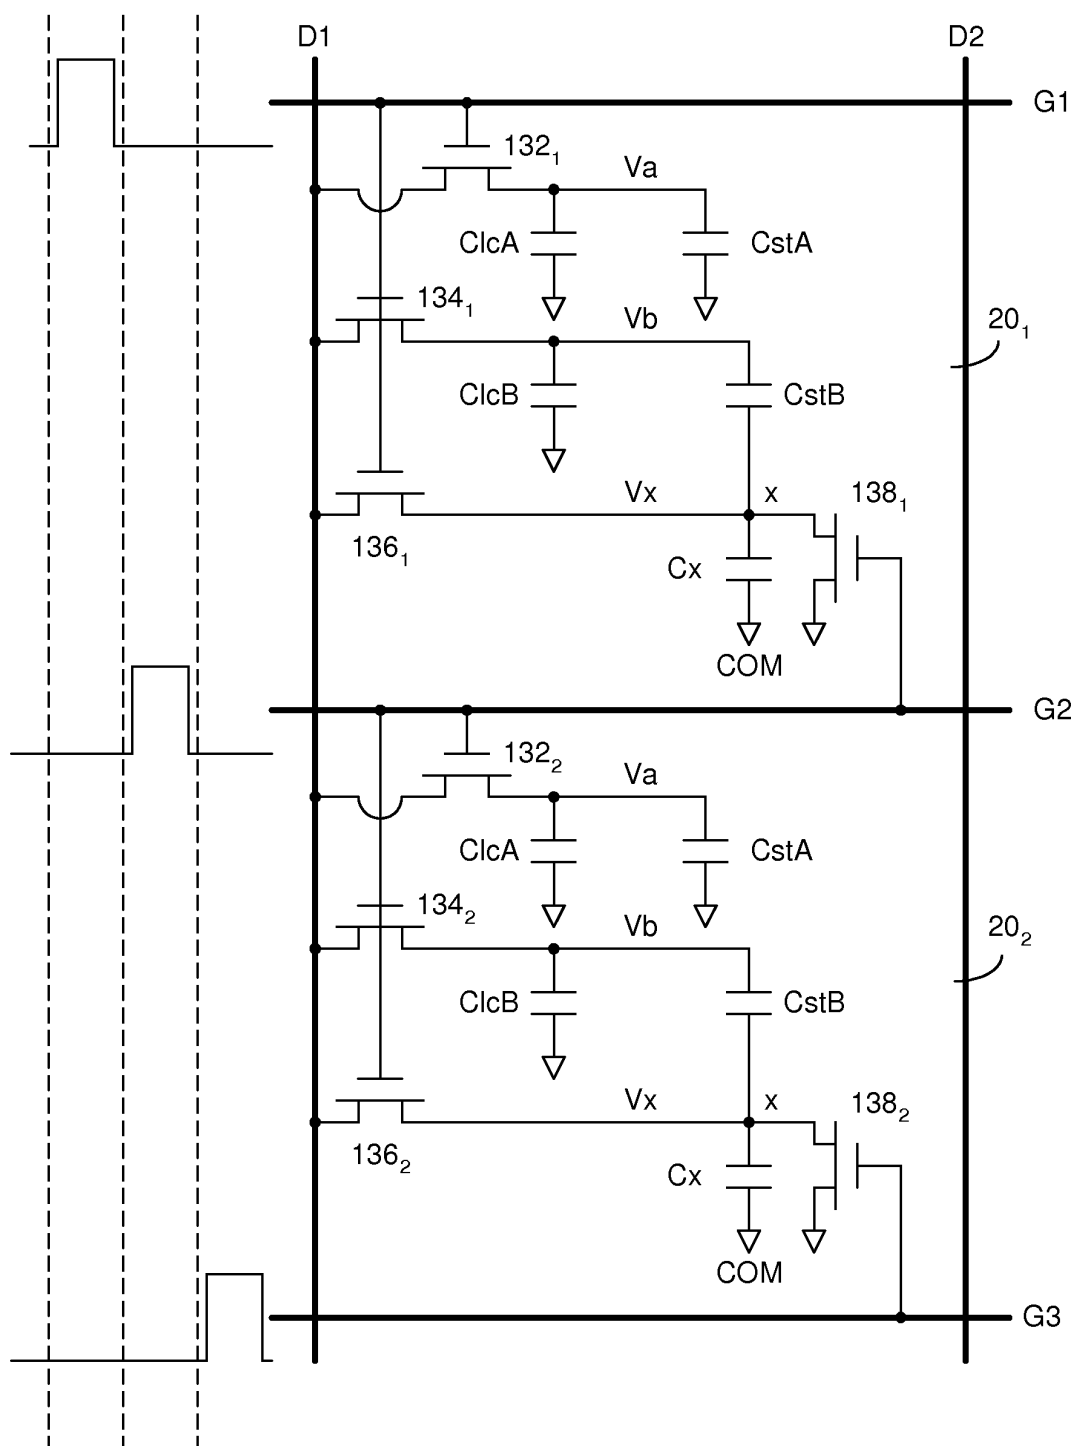


FIG. 5

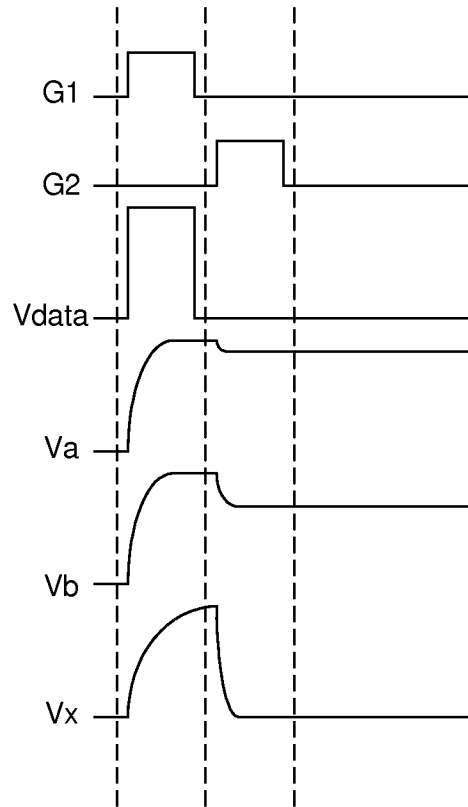


FIG. 6

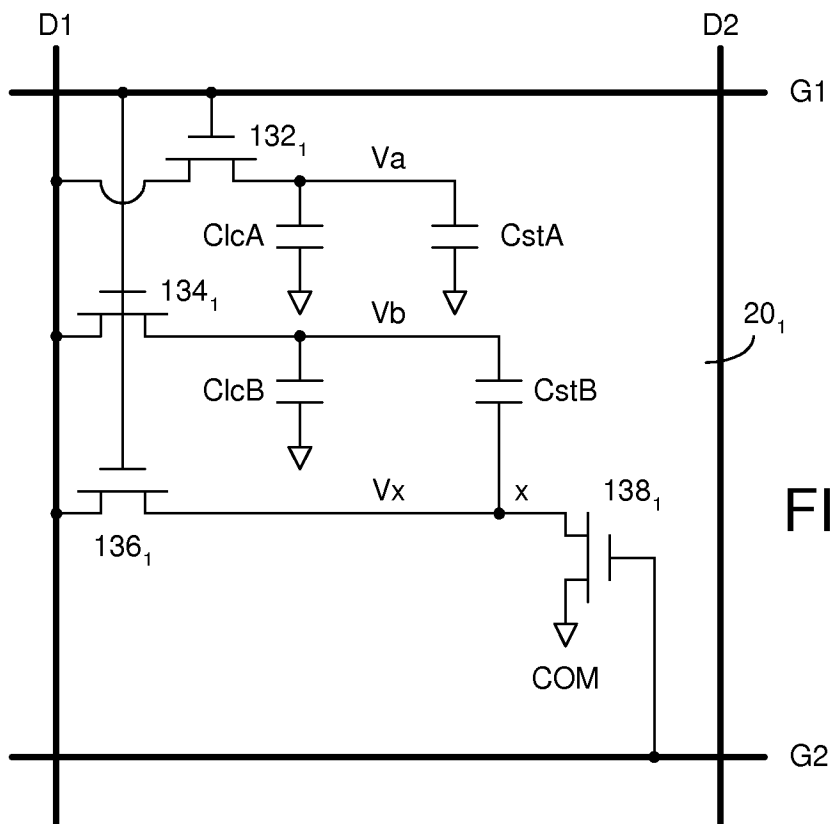


FIG. 8

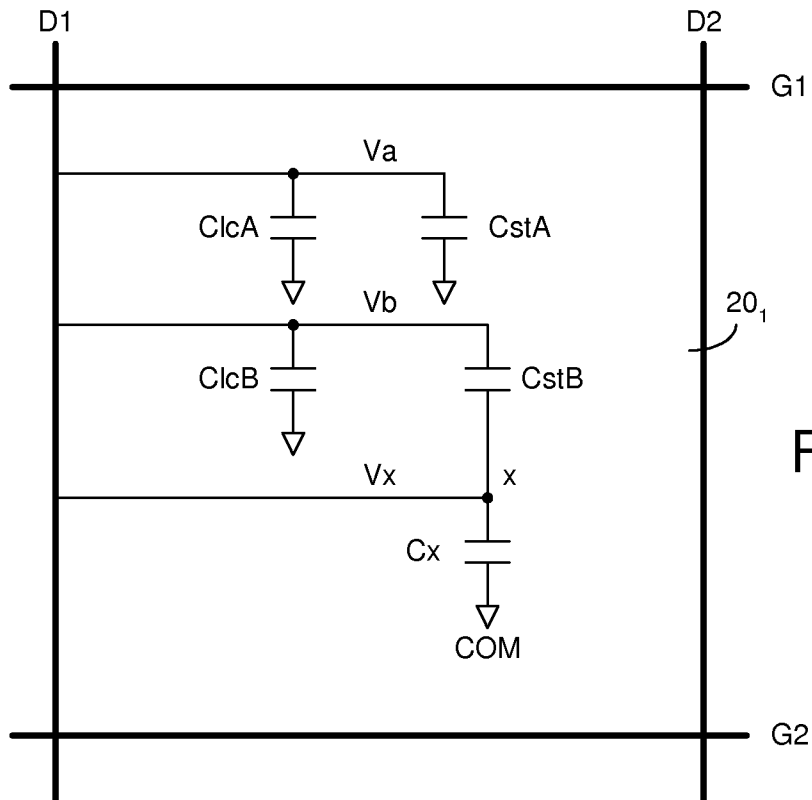


FIG. 7a

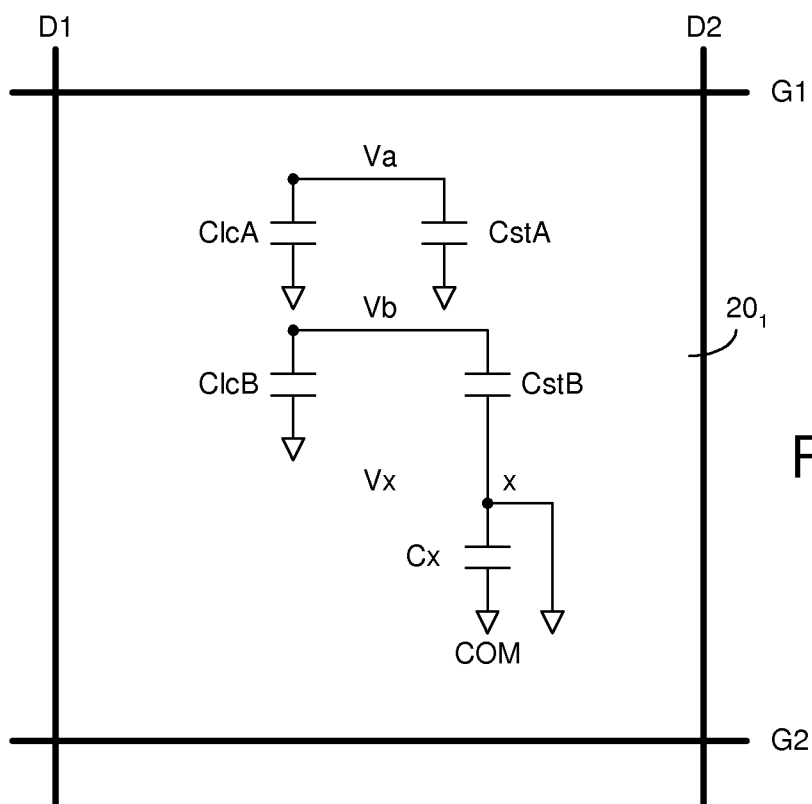


FIG. 7b

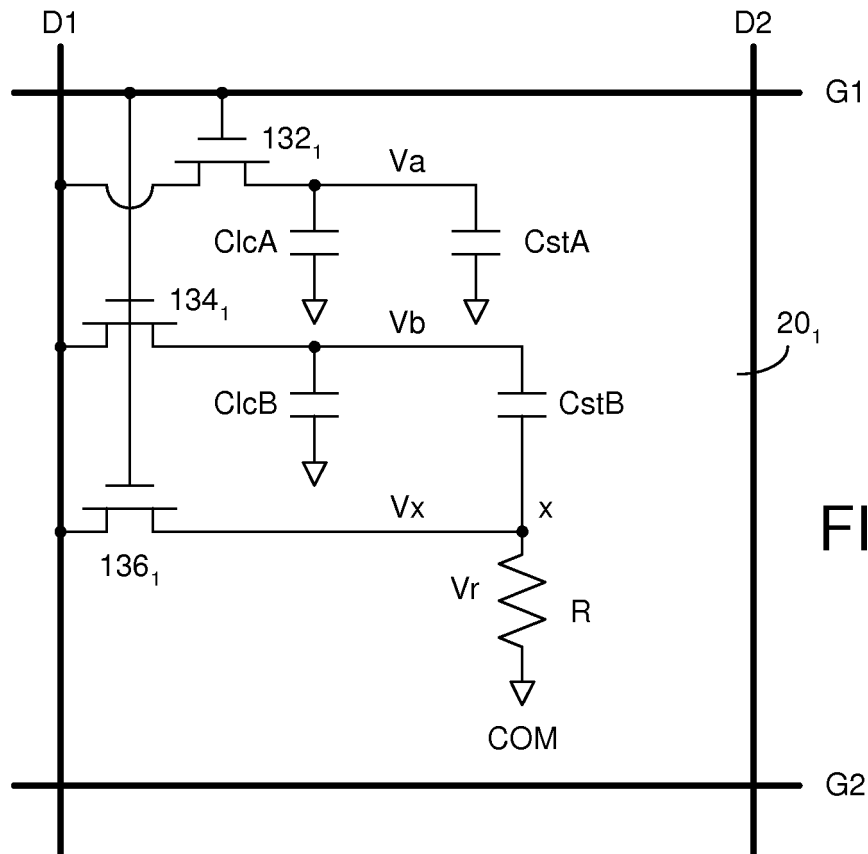


FIG. 9

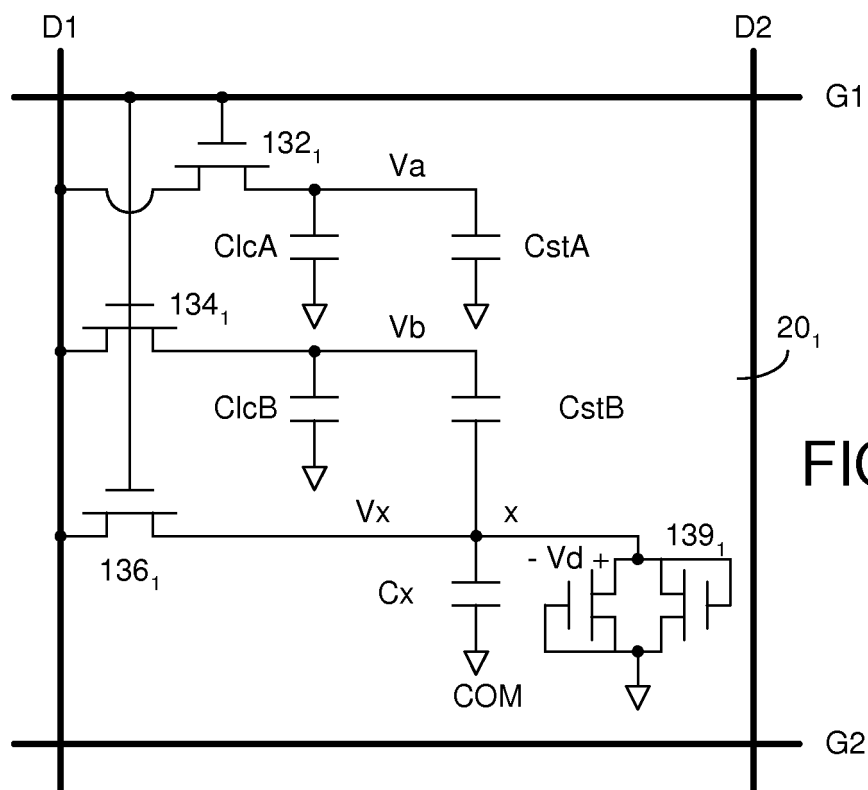


FIG. 10

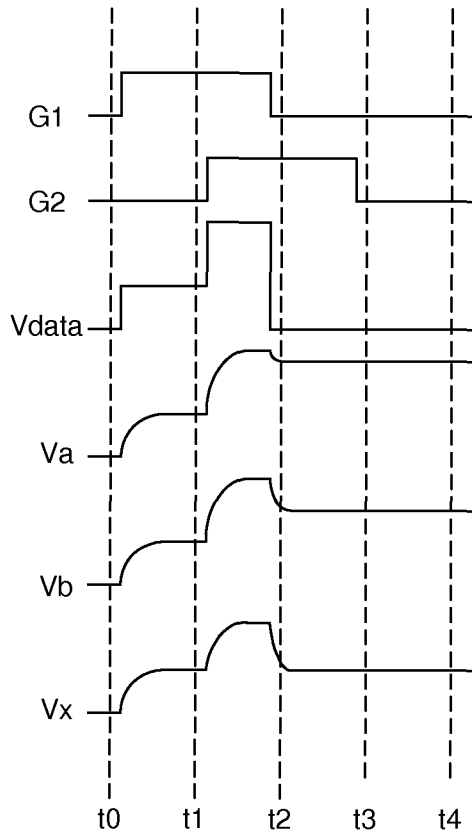


FIG. 13

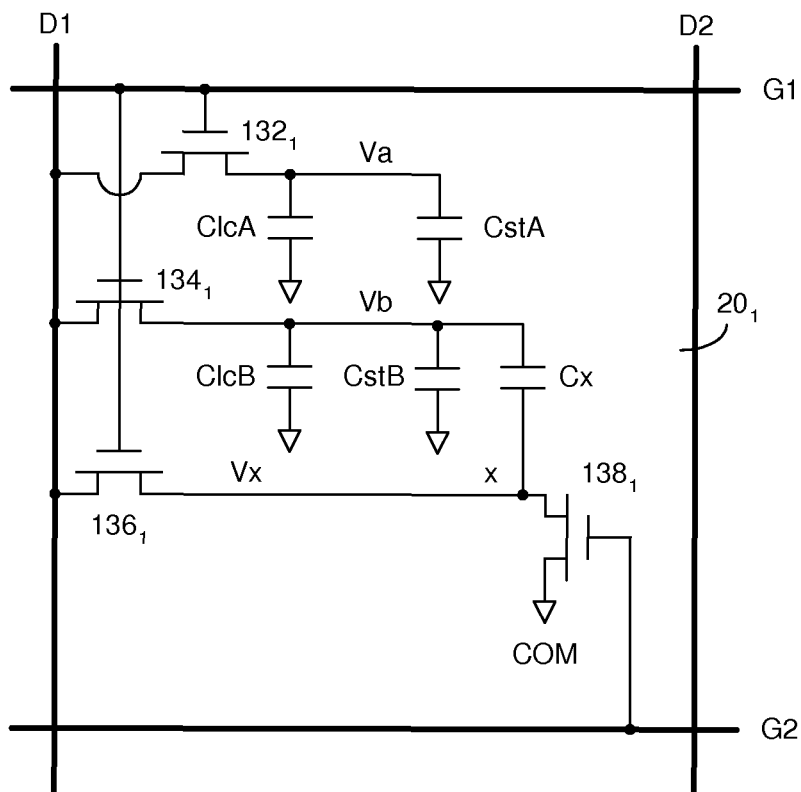


FIG. 11

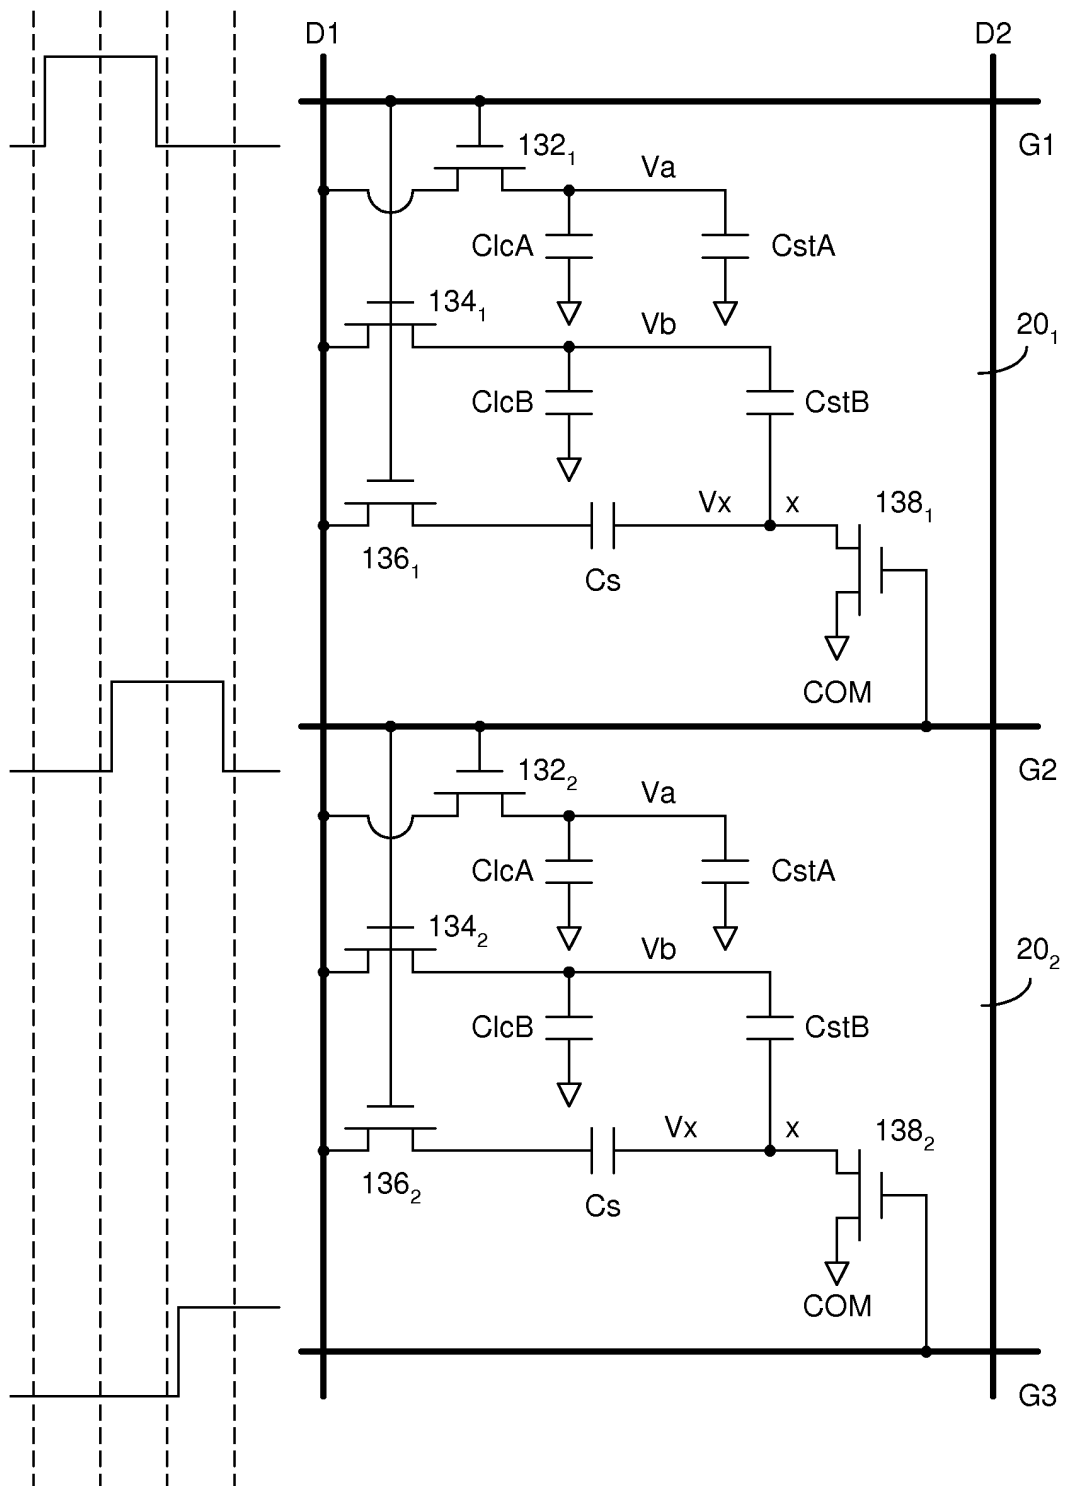


FIG. 12a

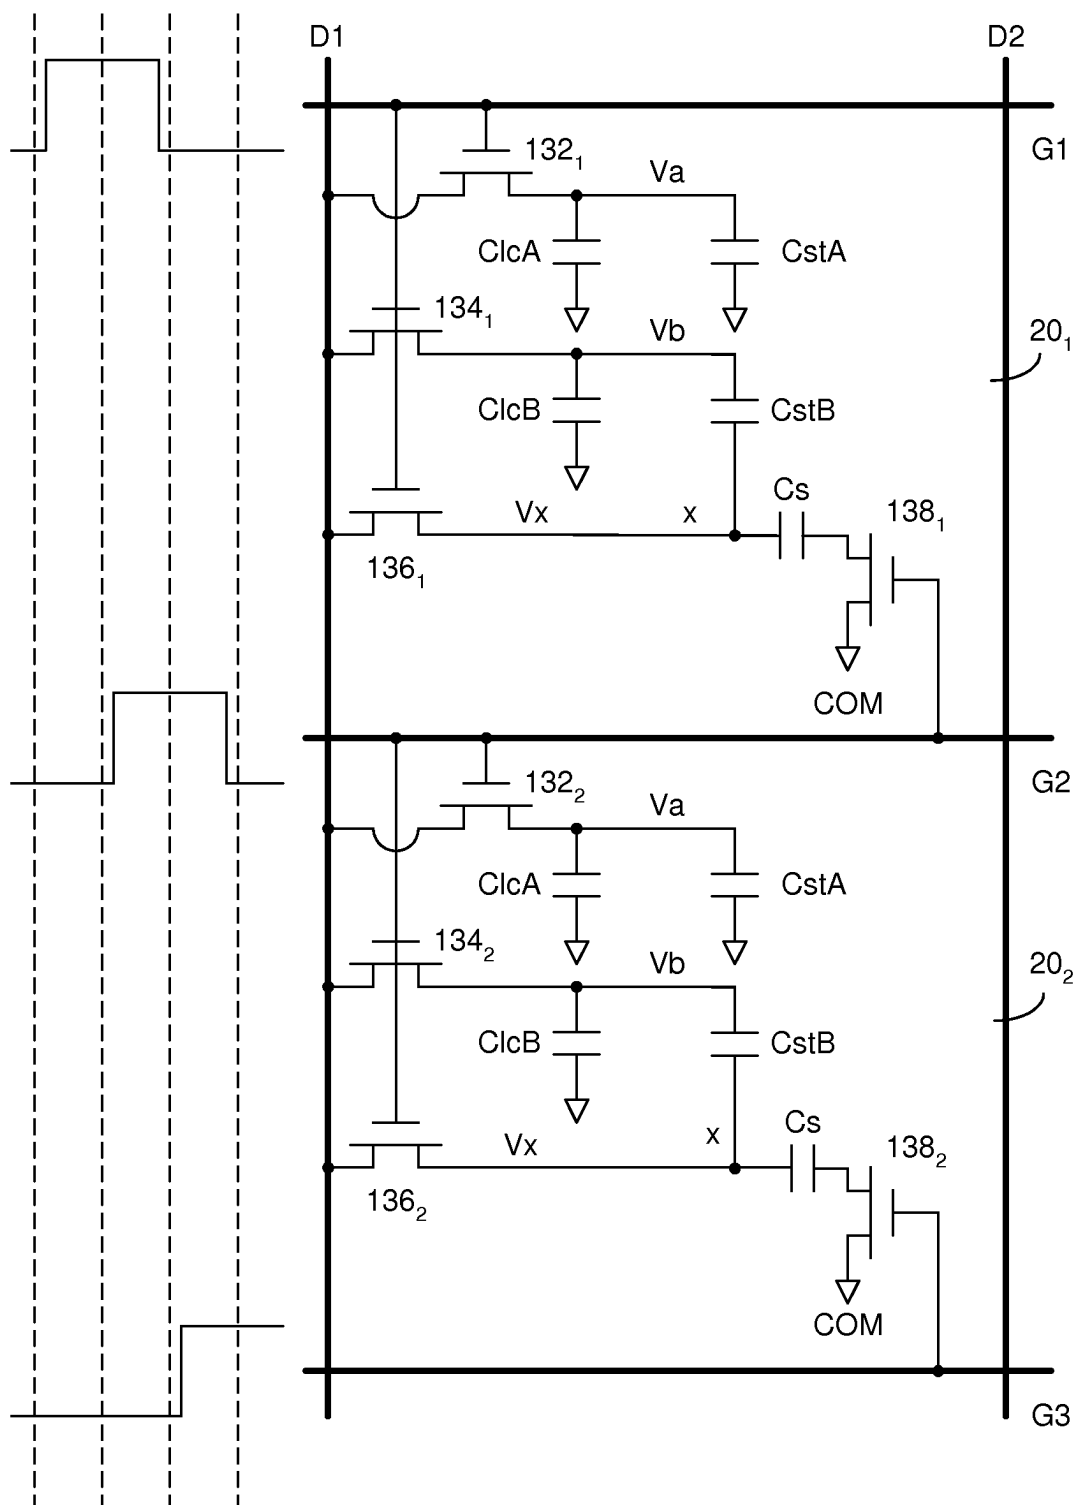


FIG. 12b

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20080055292 A1 [0004]
- US 20090027325 A1 [0004]
- US 20090027581 A1 [0004]
- US 20100007594 A1 [0004]

专利名称(译)	LCD显示器视觉增强驱动电路和方法		
公开(公告)号	EP2362374B1	公开(公告)日	2015-06-24
申请号	EP2010191779	申请日	2010-11-18
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电股份有限公司		
当前申请(专利权)人(译)	友达光电股份有限公司		
[标]发明人	CHEN YUNG CHIH YANG YU CHUNG LIN KUN YUEH LIU CHUN HSIN		
发明人	CHEN, YUNG-CHIH YANG, YU-CHUNG LIN, KUN-YUEH LIU, CHUN-HSIN		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3648 G09G2300/0443 G09G2300/0447 G09G2300/0814 G09G2300/0852 G09G2300/0876 G09G2310/0251 G09G2320/0242 G09G2320/028		
代理机构(译)	LANG , CHRISTIAN		
优先权	12/660315 2010-02-23 US		
其他公开文献	EP2362374A2 EP2362374A3		
外部链接	Espacenet		

摘要(译)

液晶显示面板中的像素包括具有第一子像素电极的第一子像素区域和具有第二子像素电极的第二子像素区域。每个子像素电极与电容器相关联。当向像素提供栅极线信号和数据电压时，第一子像素电极上的电压电平基本上等于或略高于第二子像素电极上的电压电平和与每个相关联的电容器。子像素电极充电。当栅极线信号完全通过部分通过时，电路元件使与第二子像素电极相关的电容器将其电荷转移到另一电容器，导致第二子像素电极上的电压电平降低。

