

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 072 927 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

27.04.2005 Bulletin 2005/17

(51) Int Cl.⁷: **G02F 1/1335**, G03F 7/00

(21) Application number: **00115660.3**

(22) Date of filing: **20.07.2000**

(54) **Colour filter for a liquid crystal panel and process for producing it**

Farbfilter für eine Flüssigkristallanzeige und dazugehöriges Herstellungsverfahren

Filtre coloré pour afficheur à cristaux liquides et son procédé de fabrication

(84) Designated Contracting States:
DE FR GB IT NL

(30) Priority: **29.07.1999 JP 21561999**

(43) Date of publication of application:
31.01.2001 Bulletin 2001/05

(73) Proprietor: **CANON KABUSHIKI KAISHA**
Tokyo (JP)

(72) Inventor: **Kashiwazaki, Akio**
Ohta-ku, Tokyo (JP)

(74) Representative: **Weser, Wolfgang, Dr. Dipl.-Phys.**
Weser & Kollegen,
Patentanwälte,
Radeckestrasse 43
81245 München (DE)

(56) References cited:
EP-A- 0 665 449 **EP-A- 0 756 932**
EP-A- 0 842 994 **US-A- 5 837 045**

- **PATENT ABSTRACTS OF JAPAN** vol. 1999, no. 08, 30 June 1999 (1999-06-30) & JP 11 080633 A (DAINIPPON INK &CHEM INC), 26 March 1999 (1999-03-26)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 072 927 B1

Description**BACKGROUND OF THE INVENTION**5 **Field of the Invention**

[0001] The present invention relates to a color filter having a light-transmitting colored part, a process for producing the color filter, and a liquid crystal panel employing the color filter.

10 **Related Background Art**

[0002] With recent development of personal computers, especially of portable personal computers, demand for liquid crystal displays, in particular for liquid crystal color displays, has been increasing. For further popularization of liquid crystal color displays, is required the cost reduction thereof, especially that of color filters having a substantial weight in the cost. Although various methods have been proposed to meet the above needs with maintaining the properties necessary for color filters, there are still unsolved problems at present. For example, many proposals have been made for color filter manufacturing to use an ink-jet system having a potential of effective cost reduction. When the ink-jet system is used for color filter production, however, it is often difficult to satisfy both the stable ejection performance of the ink and the product reliability such as water resistance and light fastness of the color filter at a high standard. In order to produce a light-transmitting colored part by the ink-jet method, a composition containing a coloring material such as a dye or a pigment in a mostly water aqueous solvent is used as the ink. When a dye is used as a coloring material, ejection stability of the ink in the ink-jet system is satisfactory to a certain extent, but the product reliability of the color filter thus produced is generally inferior to those produced by using a pigment coloring material. On the other hand, when a pigment is used as a coloring material, the product reliability of the color filter is satisfactory to a certain extent, but the ejection stability of the ink in the ink-jet system is generally inferior to those using a dye coloring material. Further, there is a problem that pigment-type water-based inks are sometimes inferior in storage stability in long period of time.

[0003] On such a background, studies have been made of ink-jet systems using water-based pigment inks which can satisfy both the ink-jet ejection stability and the long storage stability. This is explained in detail below.

[0004] It is most preferable to use a pigment as the coloring material when the product reliability of the color filter is considered. When a pigment which is conventionally used for the color filters is used as a coloring material in an ink-jet water-based ink, it is necessary to disperse the pigment in the medium in a stable condition. In general, the pigment is dispersed in an aqueous medium by adding a dispersant to form a homogeneous dispersion system. However, there is a problem that sometimes the dispersion state is not satisfactory even if a dispersant is used, and thus the ink containing a dispersed pigment is inferior in the long time storage stability.

[0005] Meanwhile, when an ink is used in an ink-jet system, the ink should be ejected from the tip of a minute nozzle (orifice) of the ink-jet recording head as a stable droplet. Thus, it is necessary that solidification of the ink would not occur by drying at the orifice. When an ink containing a dispersant as described above is used in the ink-jet system, the dispersant component such as a resin may stick to the orifice without re-dissolution to cause clogging at the orifice or fault in ejection. There is also a problem with the water-based pigment ink containing a dispersant that it is so viscous that ejection may become unstable when the continuous ejection and high speed image formation is carried out for a long time, due to the high resistance in the passage to the nozzle tip.

[0006] Japanese Laid-Open Patent Application No. 11-80633 discloses to produce a color filter by using an ink containing fine colored particles of a pigment covered with a film-forming resin having carboxyl groups, the particles being dispersed in an aqueous medium.

[0007] EP-A 0 756 932 discloses a method for manufacturing a color filter where the occurrence of color mixture and colorless portions are prevented while improving ink-arrival precision in applying ink onto a substrate. Coloring inks may be realized by pigment inks.

[0008] EP-A 0 842 994 discloses a water-based pigment ink comprising a coloring material composed of self-dispersing carbon black obtained by bonding at least one hydrophilic group directly or through another atomic group to the surface of carbon black and an aqueous medium composed of water and a water-soluble organic solvent.

SUMMARY OF THE INVENTION

[0009] The inventors of the present invention, however, have found out that the pixels formed by an ink-jet system using an ink containing a pigment 19 covered with a thermo-crosslinking resin as shown in Japanese Laid-Open Patent Application No. 11-80633 do not have sufficient pixel transparency, which is one of the important properties for color filters. The reason why the pixels do not have enough transparency is believed that the pigment is localized in the pixel

and such localization causes random reflection. The mechanism for the localization will be explained with Figs. 1A, 1B and 1C. That is, when a base plate 1 is subjected to at least one of heat treatment and light irradiation after the attachment of the ink (Fig. 1A), cross-linking between the resins covering the pigment 19 and evaporation of the aqueous medium will occur (Fig. 1B). Thus, pigment particles tend to draw together and localize in the pixels (Fig. 1C) to cause random reflection at the regions of the pigment localization to reduce transparency. Based on such a finding, the inventors of the present invention have decided to develop a pigment ink which has properties highly suitable for an ink-jet system, can provide pixels of high transparency, and can provide color filters of required properties.

[0010] It is an object of the present invention to provide a color filter, and a production method thereof which utilizes a water-based pigment ink excellent in both long storage stability and ejection stability in an ink-jet system, which ink-jet system can effectively reduce the production cost.

[0011] Another object of the present invention is to provide a liquid crystal panel containing a color filter of high quality, product reliability and a low production cost, which color filter has light-transmitting colored parts formed by an ink-jet system by using a water-based pigment ink. directly or through a linker group to a surface

[0012] These objects are solved by a process according to claim 1, a color filter according to claim 12 and a liquid crystal panel according to claim 20. Preferred embodiments are subject of the dependent claims.

[0013] According to the present invention, a color filter of high quality can be produced at a low cost by advantageously using an ink-jet system with a pigment-type coloring material having excellent stability in long storage as well as the stable ejection properties when used in an ink-jet system. Obtainable is a color filter having a light-transmitting colored part of high transparency, and the filter also has highly reliable properties of such as water resistance and lightfastness.

[0014] Figs. 2A, 2B and 2C schematically illustrate the formation process of the colored part of the color filter of the invention. An ink is applied to a base plate 1 in a condition that a self-dispersing pigment 20 is uniformly dispersed in the ink (Fig. 2A). At least either of heat treatment and light irradiation causes cross-linking of the binder component in the ink and evaporation of the medium of the agent (Fig. 2B). As a result, the self-dispersing pigment 20 distributes uniformly between the cross-linked binder component (Fig. 2C), and the resultant film has a smooth surface, to provide good transparency.

[0015] There have been already known self-dispersing pigments formed by bonding a hydrophilic group directly or through a linker group to the surface of the pigment, or inks using such pigments, as disclosed in, for example, USP No. 5,837,045. However, nothing has been disclosed about the properties of the pixels formed by an ink-jet system using such an ink in the color filter production, and it has not been even suggested whether such an ink can form pixels having properties sufficient enough to be used in a color filter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016]

Figs. 1A, 1B, and 1C illustrate a production process of pixels of a color filter of a prior art by using an ink containing pigment particles covered with a film-forming resin.

Figs. 2A, 2B and 2C illustrate a formation process of a colored part of a color filter by using an ink used in the present invention.

Figs. 3A, 3B, 3C and 3D illustrate a production process of a color filter according to the method of the present invention.

Figs. 4A, 4B, 4C, 4D and 4E illustrate another production process of a color filter according to the method of the present invention.

Fig. 5 illustrates an example of a liquid crystal panel using a color filter obtained by the method of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0017] The present invention is described in detail referring to the drawings.

[0018] Figs. 3A to 3D illustrate a process for producing a color filter of the present invention.

[0019] Base plate 1 is usually made of glass. However, any other material may be used, so long as characteristics such as transparency (light transmittancy) and mechanical strength usually required for the liquid crystal color filter are satisfied. For example, a transparent acrylic resin can be used as the base plate. First, as shown in Fig. 3A, the black matrix is provided on the base plate 1. The black matrix can be provided by using known method and materials. This black matrix is to form a light-shielding part 8, and is preferably prepared by photolithography to pattern a layer of a black pigment resist to make openings 2a corresponding to the light transmitting part 7 of any shape. The resist layer is formed by using a resin composition containing a black pigment (black pigment resist). Preferably, the thickness of the resist layer is 0.5 μm or more. Such a thickness gives sufficient optical density for reliable light shielding effect.

It also prevents the ink applied to an opening by the ink-jet system from overflowing from the opening and flowing into next opening, thus effectively prevents mixing of inks of different colors. The upper limit of the resist layer thickness is not limited specifically so long as it is practical, but preferably about 5 μm , for example.

[0020] Then, the ink 4 is applied to the opening 2a by an ink-jet system as shown in Fig. 3B. The ink-jet system may be of a bubble jet type employing an electrothermal transducer as an energy-generating element, or of a piezo jet type employing a piezo element. In this case, the area and pattern to be colored can be determined optionally. As the ink 4 (water-based pigment ink), it is used an ink comprised at least of water, an aqueous organic solvent and a coloring material, where the coloring material contains a self-dispersing type pigment having at least one kind of hydrophilic group bonded to its surface directly or through other linker group.

[0021] As a raw material to prepare such a self-dispersing pigment, any inorganic, organic pigments can be used so long as they are suitable for a color filter. Organic pigments include azo pigments such as azo lakes, insoluble azo pigments, condensed azo pigments, and chelate azo pigments; polycyclic pigments such as phthalocyanine pigments, perylene pigments, perynone pigments, anthraquinone pigments, quinacridone pigments, dioxazine pigments, thioindigo pigments, isoindolinone pigments, and quinophthalone pigments. Inorganic pigments include oxides such as titanium oxide, red iron oxide, chromium oxide, black iron oxide; cadmium yellow; chrome vermilion, prussian blue, ultramarine, and yellow iron oxide. In view of color tone, organic pigments are preferably used.


[0022] The self-dispersing pigments used as a coloring material in the present invention preferably has an ionicity, and those having hydrophilic groups bonded to the surface thereof. The hydrophilic group bonded to the surface of the anionically charged pigment is $-\text{COOM}$, wherein M is hydrogen, alkali metal, ammonium or organic ammonium.



[0023] When "M" in the above-described hydrophilic groups represents an alkali metal, examples of the alkali metal include lithium, sodium and potassium, and examples of the organic ammonium include mono-, di- and trimethylammonium, mono-, di- and triethylammonium, and mono-, di- and trimethylammonium.

[0024] An anionically charged pigment having $-\text{COONa}$ on the surface can be prepared, for example, by oxidizing a pigment with sodium hypochlorite. Of course, the present invention is not limited to it.


[0025] With cationically charged pigments, the hydrophilic group bonded to the surface of the pigment directly or through a linker group is preferably a quaternary ammonium group, more preferably, one of following quaternary ammonium groups:

$-\text{NH}_3^+$, $-\text{NR}_3^+$, (R is as defined above)

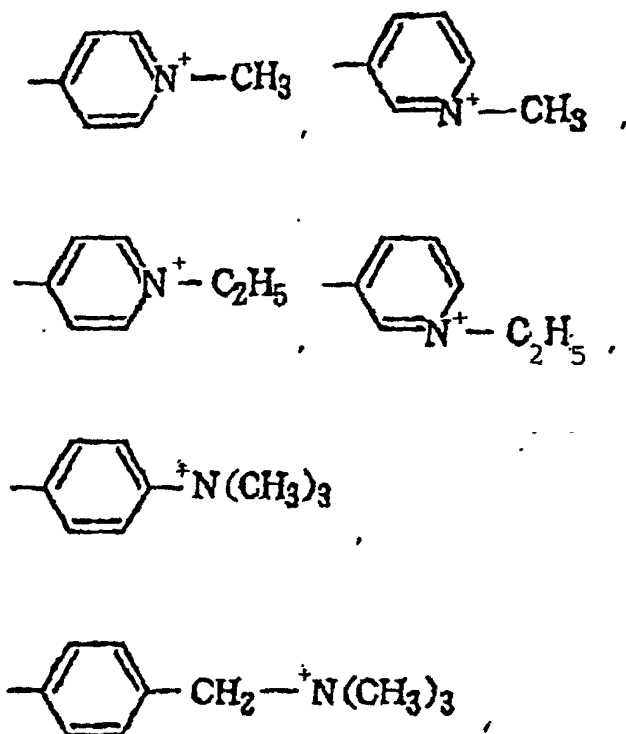



[0026] One method for producing cationically charged self-dispersing pigments having hydrophilic groups as mentioned above bonded to the surface thereof is to bond N-ethylpyridyl group of the following structure:



to the surface of a pigment by treating the pigment with 3-amino-N-ethylpyridinium bromide. Of course, the present invention is not limited to this method.

[0027] In the present invention, it is also preferable to bond a hydrophilic group as mentioned above through a linker group to the surface of a pigment. Examples of such groups include alkylene groups of 1 to 12 carbons, a phenylene group unsubstituted or substituted with $\text{C}_1 - \text{C}_5$ alkyl, or a naphthyl unsubstituted or substituted with $\text{C}_1 - \text{C}_5$ alkyl. Specific examples of the hydrophilic group bonded through a linker group to the surface of a pigment include $-\text{C}_2\text{H}_4\text{COOM}$, $-\text{ph-SO}_3\text{M}$ and $-\text{C}_5\text{H}_{10}\text{NH}_3^+$ where ph is phenyl, and M is as defined above) in addition to the hydrophilic groups already mentioned above, but not limited thereto.

[0028] More than one kind of hydrophilic groups can be bonded to the same surface of a pigment particle, so long as the groups are of the same polarity.

[0029] The self-dispersing pigment used for the water-based pigment ink in the present invention is cationically or anionically charged due to the hydrophilic groups bonded to the surface thereof. Since the self-dispersibility is due to the ionic repulsion, and the hydrophilic group also increases hydrophilicity, the pigment is stably dispersed in an aqueous medium and the particle size of the pigment and viscosity do not increase during long storage of the water-based ink containing such a pigment. Further, since the self-dispersing pigment itself shows high dispersibility in an aqueous medium of the ink, good ejection properties can be obtained when such an ink is used in an ink-jet system, and the use of a conventional dispersant can be omitted or the amount of the dispersant can be reduced effectively.

[0030] In the present invention, the ink may contain plural species of the self-dispersing pigments to control the color tone. The amount of the self-dispersing pigment to be added in an pigment ink according to the present invention is preferably within a range of from 0.1 to 20 % by weight, more preferably from 1 to 15 % by weight, based on the total weight of the ink. In addition to the self-dispersing pigment, dyes may be added to control the color tone of the ink. Such dyes are not limited specifically, so long as they are suitable for an ink-jet system and for formation of the light-transmitting colored part of a color filter.

[0031] Further, the ink may contain a water-soluble or water-dispersible compound, preferably a water-soluble or water-dispersible resin component, as a binder component. As a binder components, natural resins, acrylic resins, polyester resins, polyurethane resins, polyvinyl resins, amino resins, epoxy resins, polyether resins etc. can be used. The binder component may be contained at a concentration of 0.1 - 20%, preferably 0.2 - 15% of the total weight of the ink.

[0032] Use of a curable resin composition as the binder component can give a light-transmitting colored part having improved water resistance and light fastness. Such curable resin components are preferably those curable by either of heat treatment and light irradiation treatment, including acrylic resins and melamine resins having carboxyl groups

and hydroxy groups, but not limited thereto.

[0033] The aqueous medium of the water-based pigment coloring materials in the present invention is mainly composed of water and a water-soluble organic solvent. It is preferable to use an aqueous organic solvent which can prevent the drying of the ink when it is used in an ink-jet system or during the storage thereof. It is also preferable to use deionized water not the common water containing various ions.

[0034] Specific examples of the water-soluble organic solvent used in the present invention include alkyl alcohols having 1 to 5 carbon atoms, such as methyl alcohol, ethyl alcohol, n-propyl alcohol, isopropyl alcohol, n-butyl alcohol, sec-butyl alcohol, tert-butyl alcohol, isobutyl alcohol and n-pentanol; amides such as dimethylformamide and dimethylacetamide; ketones and ketone alcohols such as acetone and diacetone alcohol; ethers such as tetrahydrofuran and dioxane; oxyethylene or oxypropylene copolymers such as diethylene glycol, triethylene glycol, tetraethylene glycol, dipropylene glycol, tripropylene glycol, polyethylene glycol and polypropylene glycol; polyalkylene glycols such as polyethylene glycol and polypropylene glycol; alkylene glycols the alkylene moiety of which has 2 to 6 carbon atoms, such as ethylene glycol, propylene glycol, trimethylene glycol and triethylene glycol; 1,2,6-hexanetriol; glycerol; lower alkyl ethers such as ethylene glycol monomethyl (or monoethyl) ether, diethylene glycol monomethyl (or monoethyl) ether and triethylene glycol monomethyl (or monoethyl) ether; lower dialkyl ethers of polyhydric alcohols, such as triethylene glycol dimethyl (or diethyl) ether and tetraethylene glycol dimethyl (or diethyl) ether; alkanolamines such as monoethanolamine, diethanolamine and triethanolamine; sulfolane; N-methyl-2-pyrrolidone; 2-pyrrolidone; and 1,3-dimethyl-2-imidazolidinone. The water-soluble organic solvents mentioned above may be used alone or in combination thereof.

[0035] In the present invention, the content of the water-soluble organic solvent as mentioned above is suitably within a range of from 10 to 70 % by weight based on the total weight of the ink.

[0036] In addition to the above mentioned components, the water-based pigment ink may contain other additives such as surfactants, anti-foaming agents, preservatives, and anti-mold agents, to have desired physical properties as an ink.

[0037] When a color filter is produced without providing an ink-receiving layer, it is preferable that the ink is repelled at a matrix portion to prevent mixing of the inks applied to respective openings bordered by the matrix. For this purpose, the ink preferably has a high surface tension. In detail, the surface tension of the ink as a whole is preferably 50 mN/m(dyne/cm) or more. The dispersibility of a self-dispersing pigment is hardly affected by the components of the medium so long as it is an aqueous medium, so that the pigment can show excellent dispersibility in a medium of high surface tension. One of the ways to increase the surface tension of the ink is to increase the ratio of the hydrophilic monomer component in the curable resin. Thus, it is preferable that the hydrophilic monomer is contained in the curable resin at a concentration of 50% or more, more preferably 70% or more, further preferably 80% or more, in general. As the hydrophilic monomer component, there are those having carboxyl group such as acrylic acid, methacrylic acid, propionic acid, those having hydroxy group such as hydroxymethyl methacrylate, hydroxyethyl methacrylate, hydroxymethyl acrylate and hydroxyethyl acrylate, and those having amide or derivatives thereof such as acrylamide, methacrylamide, N-methylolacrylamide, and N-methylolmethacrylamide.

[0038] The ink applied to the opening 2a by an ink-jet system is then made into a film by a proper treatment such as drying to form a light-transmitting colored part on the base plate 1. When a resin composition curable by heat and/or light is contained in the ink as a binder component, the light-transmitting colored part can be formed by applying at least either of heating treatment and light irradiation to cure the ink and make a film thereof.

[0039] Then, if necessary, a protection layer is formed on the plate as shown in Fig. 3D. The protection layer 5 can be formed by applying a resin material, which is curable by light irradiation or heat treatment or both. As a protection layer, an inorganic film formed by vapor-depositing or sputtering can be also used. Any materials can be used to form the protection layer, so long as the formed protection layer has sufficient transparency as required for the color filter and can withstand the later processes such as an ITO formation process and an oriented film formation process.

[0040] According to the present invention, an ink-receiving layer is formed on a base plate, to which an ink containing a self-dispersing pigment is applied to form a color filter. One example of this method is explained referring to Figs. 4A to 4E. Fig. 4A shows a light-transmitting base plate 1 on which a pattern of black matrix has been formed. The black matrix can be formed in the same manner as explained above. Reference numeral 7 denotes the light-transmitting opening.

[0041] Then an ink-receiving layer 16 is formed by forming a layer containing a curable resin composition on the base plate 1 (Fig. 4B). The ink-receiving layer 16 may be made from conventional materials.

[0042] The ink-receiving layer 16 may contain additives such as surfactants, dye-fixing agents (waterproofing agents), antifoaming agents, antioxidants, fluorescent whitening agents, UV absorbing agents, dispersants, viscosity-controlling agents, pH-controlling agents, anti-mold agents, and plasticizers. The additives may be selected arbitrarily from known compounds to meet the purpose.

[0043] The ink-receiving layer 16 can be formed by any of coating methods such as spin coating, roll coating, bar coating, spray coating, dip coating and the like. The layer may be prebaked, if necessary.

[0044] Next, the aforementioned ink is applied on a prescribed part of the protection layer by an ink-jet system to

color the pixel forming areas (Fig. 4C). Curing can be carried out by any method suitable for curing the resin component used in the ink-receiving layer. For example, heating or light-irradiation or both is carried out to form the light-transmitting colored part 18 of respective colors.

[0045] After that, if necessary, the protective layer 5 may be formed on the cured ink-receiving layer as described above (Fig. 4E).

[0046] Alternatively, the black matrix may be cured before the application of the ink to the ink-receiving layer 16 (Fig. 4C) to reduce the ink-absorbency of the black matrix.

[0047] Fig. 5 shows a schematic sectional view illustrating an embodiment of a display part of a liquid crystal display element in which the color filter according to the above embodiment of the present invention has been incorporated. This embodiment is a TFT (thin film transistor) color liquid crystal element.

[0048] The TFT liquid crystal element is constructed by sticking together a base plate 1 bearing the color filter 9 and a base plate 14 having TFT (not shown) with a sealing compound (not shown) and enclosing a liquid crystal layer 12 in the gap of about 2 to 5 μm wide between the plates. The TFT and transparent pixel electrodes 13 are provided on the inner surface of one of the base plates in a matrix pattern, and the light-transmitting colored parts 3 of the color filter 9 are disposed on the inner surface of the other base plate at positions corresponding to the pixel electrodes 13. A transparent counter (or common) electrode 10 is formed all over to cover the color filter 9. Further, orientation film 11 is formed on the inner surfaces of both bases. Liquid crystal molecules can be aligned in a fixed direction by rubbing treatment of the orientation film. Polarizing plates 15 are bonded to the outer surfaces of both glass base plates. As the light source of the back light 17, a combination of a fluorescent lamp and a scattering light plate (both not shown) are used. The liquid crystal compound in the enclosed liquid crystal layer 12 functions as a shutter for changing the transmittance of light from the back light, thereby making a display.

[0049] In the liquid crystal display element according to the present invention, any liquid crystal compounds such as a TN liquid crystal and ferroelectric liquid crystal (FLC) may be suitably used.

[0050] The respective components may take various constitutions, not limited to the illustrated constitution of Fig. 5. For example, the common electrode may be formed in a stripe pattern, or both of black matrix 2 and color filter components 9 may be formed on the TFT base.

Example 1

[0051] A glass base plate was coated with a black pigment resist (trade name: CK-S171B, a product of FUJI HANTO KK) comprised of an acrylic resin, multifunctional acrylic monomer and carbon black. The plate was then subjected to light exposure, development, and heat treatment to form a black matrix of 1.0 μm thick thereon. The black matrix had openings of 200 $\mu\text{m} \times 80 \mu\text{m}$. Then, to an opening bordered by the matrix, about 200 μl (10 droplets) of one of the inks of red, green and blue colors was applied by an ink-jet method with an ejection frequency of 500 Hz.


[0052] The composition of the inks are as follows.

Self-dispersing organic pigment 1	5 wt%
Binder component (acrylic acid - methyl methacrylate copolymer of copolymer ratio 30:70)	3 wt%
Diethylene glycol	20 wt%
Isopropyl alcohol	5 wt%
Pure water	67 wt%

- Preparation of Self-dispersing Organic Pigments -

[0053] The pigments were prepared as follows:

First, blue pigment was prepared. To a solution of 5.5 g of hydrochloric acid dissolved in 6 g of water, 1.8 g of 4-aminobenzoic acid was added and maintained at a temperature of 10°C or lower, to which a solution prepared by dissolving 2 g of sodium nitrite into 10 g of water was added and stirred. Then 20 g of C.I. Pigment Blue 15:6 was added and stirred to obtain a slurry. The slurry was filtered and the pigment particles were fully washed with water and then dried. The pigment particles were then dispersed in water and desalted by using a reverse osmosis membrane. The resultant pigment dispersant was concentrated to a pigment concentration of 10% to obtain a dispersion of an anionic self-dispersing blue pigment having carboxyl groups bonded to the pigment surface via phenyl groups, as represented by the following formula.



Red and green self-dispersing pigments were also prepared in the same manner as above, using C.I. Pigment Red 254 and C.I. Pigment Green 7 respectively. The surface tension of thus obtained inks were 42 mN/m(dyne/cm).

[0054] By using these inks, openings in the black matrix on the base plate were colored, followed by heat treatment of 240°C, for 30 min of the base plate to cure the ink. Then, a two-part type thermosetting resin material (Trade name: Optomer SS6688, a product of JSR) was applied onto the entire base plate surface by spin coating, and the base plate was subjected to heat treatment of 230°C for 60 min to cure the resin. A color filter was thus obtained.

[0055] The prepared color filter was observed under an optical microscope, where problems such as color bleeding and uneven coloring were not observed. Using this color filter, serial processes of ITO (electrode) formation, orientation film formation, enclosure of liquid crystal material were carried out to manufacture a color liquid crystal element (liquid crystal panel) as shown in Figs. 3A to 3D. The resulting liquid crystal element was excellent in properties.

[0056] By using the liquid crystal element of this example, continuous running operations of 1000 hours in a temperature range between -20°C and 60°C were carried out, resulting in no disorder. Further, when a running operation of total 1000 hours was carried out under sunshine, no change was observed in transmittance and color tone.

Example 2

[0057] A glass base plate was coated with a black pigment resist (trade name: CK-S171B, a product of Fuji Hanto KK) comprised of an acrylic resin, multifunctional acrylic monomer and carbon black. The plate was then subjected to light exposure, development, and heat treatment to form a black matrix of 1.0 μm thick thereon. The black matrix bordered openings of 200 μm × 80 μm. Then, about 200 pl (10 droplets) of one of the inks of red, green and blue colors was applied by an ink-jet method to one opening with an ejection frequency of 3 KHz.

[0058] The composition of the inks are as follows:

Self-dispersing organic pigment 1	5 wt%
Binder component (acrylic acid - methyl methacrylate copolymer of copolymer ratio 80:20)	3 wt%
Diethylene glycol	20 wt%
Pure water	72 wt%

[0059] The surface tension of thus obtained inks were 53 mN/m(dyne/cm).


[0060] By using these inks, openings in the black matrix on the base plate were colored, followed by heat treatment of 240°C, 30 min of the base plate to cure the ink. Then, a two-part type thermosetting resin material (Trade name: Optomer SS6688, a product of JSR) was applied onto the entire base plate surface by spin coating, and the base plate was subjected to heat treatment of 230°C for 60 min to cure the resin. A color filter was thus obtained.

[0061] The prepared color filter was observed under an optical microscope, where problems such as color bleeding and uneven coloring were not observed. using this color filter, serial processes of ITO (electrode) formation, orientation film formation, enclosure of liquid crystal material were carried out to manufacture a color liquid crystal element (liquid crystal panel) as shown in Figs. 3A to 3D. The resulting liquid crystal element was excellent in properties.


[0062] By using the liquid crystal element of this example, continuous running operations of 1000 hours in a temperature range between -20°C and 60°C were carried out, resulting in no disorder. Further, when a running operation of total 1000 hours was carried out under sunshine, no change was observed in transmittance and color tone.

[0063] It will be also possible to make a color filter and a liquid crystal panel using it as reliable as in Examples 1 and 2 by using following self-dispersing pigments having any one of following hydrophilic groups bonded to the pigment surface:

-COONa,



or



[0064] As described above, the color filters produced according to the method of the present invention have a light-transmitting colored part of high transparency free from color bleeding or uneven coloring. The filter also has highly reliable properties of such as water resistance, in addition to the necessary properties such as heat resistance, solvent resistance and resolution with a low production cost.

Claims

1. A process of producing a color filter comprising a step of arranging a light-transmitting colored part on a surface of a base plate (1) by applying an ink (4) onto the base plate by an ink-jet system, wherein the ink comprises water, an aqueous organic solvent and a coloring material,
characterized in that
the coloring material contains a self-dispersing pigment having a hydrophilic -COOM group bonded directly or through a linker group to a surface of the pigment, wherein M represents hydrogen, alkali metal, ammonium or organic ammonium.
2. The process according to claim 1, wherein the linker group is selected from the group consisting of an alkyl group of 1 to 12 carbons, a substituted or unsubstituted phenyl group, and a substituted or unsubstituted naphthyl group.
3. The process according to claims 1 or 2, wherein the step of arranging a light-transmitting colored part further comprises the substeps of: (i) selectively providing a light-shielding part (2) on the base plate, and (ii) applying the ink to an opening (2A) surrounded by the light-shielding parts.
4. The process according to claim 3, further comprising a step of curing the ink applied to the opening by at least one of heat treatment and light irradiation to form a hardened film of the ink in the opening, wherein the ink contains a resin curable by at least one of heat treatment and light irradiation.
5. The process according to claim 3 or 4, wherein the light-shielding part constitutes a black matrix.
6. The process according to any one of claims 3 to 5, wherein the light-shielding part contains a resist containing a black pigment.
7. The process according to any one of claims 3 to 6, wherein the light-shielding part has a thickness of 0.5 μm or more.
8. The process according to any one of claims 3 to 7, further comprising a step of providing a resin layer (5) over the light transmitting colored part and the lightshielding part.
9. The process according to claim 8, wherein the resin layer over the light-shielding part is formed by curing the resin layer by at least one of heat treatment and light irradiation.
10. The process according to any one of claims 1 to 9, wherein the ink contains a water-soluble or water-dispersible compound, or a water-soluble or water-dispersible resin component.
11. The process according to claim 10, wherein the water-soluble or water-dispersible compound or the water-soluble or water-dispersible resin component is contained at 0.1 to 20 wt% based on the total weight of the ink.
12. A color filter comprising a self-dispersing pigment at a light-transmitting colored part thereof,
characterized in that

the light-transmitting colored part contains a self-dispersing pigment having a hydrophilic -COOM group bonded directly or through a linker group onto on the surface of the pigment, wherein M represents hydrogen, alkali metal, ammonium or organic ammonium.

13. The color filter according to claim 12, wherein the linker group is selected from the group consisting of an alkyl group of 1 to 12 carbons, a substituted or unsubstituted phenyl group, and a substituted or unsubstituted naphthyl group.
14. The color filter according to claims 12 or 13, wherein the colored part is present in plurality and in order.
15. The color filter according to claim 14, a light-shielding part (2) is present between the colored parts.
16. The color filter according to claim 15, wherein the light-shielding part constitutes a black matrix.
17. The color filter according to claim 15 or 16, wherein the light-shielding part contains a resist containing a black pigment.
18. The color filter according to any one of claims 15 to 17, wherein the light-shielding part has a thickness of 0.5 μm or more.
19. The color filter according to any one of claims 15 to 18, wherein the light-shielding part and the colored parts are covered with a resin layer (5).
20. A liquid crystal panel comprising a first base plate having a pixel electrode, a second base plate having a common electrode, a liquid crystal composition layer enclosed between the first and second base plates, and a color filter having a light-transmitting colored part arranged corresponding to the pixel electrode, wherein the color filter is a color filter according to any one of claims 12 to 19.

Patentansprüche

1. Verfahren zur Herstellung eines Farbfilters, umfassend einen Schritt zum Anordnen eines lichtdurchlässigen farbigen Teils auf einer Fläche einer Grundplatte (1) durch Aufbringen einer Tinte (4) auf die Grundplatte mittels eines Tintenstrahlsystems, wobei die Tinte Wasser, ein wässriges organisches Lösungsmittel und ein Färbematerial aufweist,
dadurch gekennzeichnet, dass
das Färbematerial ein selbst-dispergierendes Pigment enthält, das eine hydrophile -COOM-Gruppe hat, die direkt oder über eine Verbindungsgruppe an die Oberfläche des Pigments gebunden ist, wobei M Wasserstoff, ein Alkalimetall, Ammonium oder organisches Ammonium repräsentiert.
2. Verfahren nach Anspruch 1,
wobei die Verbindungsgruppe ausgewählt ist aus der Gruppe, bestehend aus einer Alkylgruppe mit 1 bis 12 Kohlenstoffatomen, einer substituierten oder unsubstituierten Phenylgruppe und einer substituierten oder unsubstituierten Naphthylgruppe.
3. Verfahren nach Anspruch 1 oder 2, .
wobei der Schritt zum Anordnen des lichtdurchlässigen farbigen Teils weiter die folgenden Teilschritte aufweist:
(i) selektives Vorsehen eines Lichtabschirmteils (2) auf der Grundplatte und (ii) Aufbringen der Tinte auf eine Öffnung (2A), die von lichtabschirmenden Teilen umgeben ist.
4. Verfahren nach Anspruch 3,
welches weiter aufweist einen Schritt zum Härten der auf die Öffnung aufgetragenen Tinte mittels Wärmebehandlung und/oder Lichtbestrahlung zur Bildung einer gehärteten Tintenschicht in der Öffnung, wobei die Tinte ein Harz enthält, welches durch die Wärmebehandlung und/oder Lichtbestrahlung gehärtet werden kann.
5. Verfahren nach Anspruch 3 oder 4,
wobei der lichtabschirmende Teil eine schwarze Matrix bildet.

6. Verfahren nach einem der Ansprüche 3 bis 5,
wobei der lichtabschirmende Teil ein Harz enthält, welches ein schwarzes Pigment enthält.
- 5 7. Verfahren nach einem der Ansprüche 3 bis 6,
wobei der lichtabschirmende Teil eine Dicke von 0,5 µm oder mehr hat.
8. Verfahren nach einem der Ansprüche 3 bis 7,
welches weiter einen Schritt zum Ausbilden einer Harzschicht (5) über dem lichtdurchlässigen farbigen Teil und
der lichtabschirmenden Schicht aufweist.
- 10 9. Verfahren nach Anspruch 8,
wobei die Harzschicht über dem lichtabschirmenden Teil durch Härten der Harzschicht mittels Wärmebehandlung
und/oder Lichtbestrahlung gebildet wird.
- 15 10. Verfahren nach einem der Ansprüche 1 bis 9,
wobei die Tinte eine wasserlösliche oder in Wasser dispergierbare Verbindung und eine wasserlösliche oder in
Wasser dispergierbare Harzkomponente enthält.
- 20 11. Verfahren nach Anspruch 10,
wobei die wasserlösliche oder in Wasser dispergierbare Verbindung oder die wasserlösliche oder in Wasser di-
spergierbare Harzkomponente in einem Bereich zwischen 0,1 und 20 Gew.-%, bezogen auf das Gesamtgewicht
der Tinte, enthalten ist.
- 25 12. Farbfilter, welches ein selbst-dispergierendes Pigment in einem lichtdurchlässigen farbigen Teil aufweist,
dadurch gekennzeichnet, dass
der lichtdurchlässige farbige Teil ein selbst-dispergierendes Pigment aufweist, welches eine hydrophile
-COOM-Gruppe direkt oder über eine Verbindungsgruppe an die Oberfläche des Pigments gebunden hat, wobei
M Wasserstoff, ein Alkalimetall, Ammonium oder organisches Ammonium repräsentiert.
- 30 13. Farbfilter nach Anspruch 12,
wobei die Verbindungsgruppe ausgewählt ist aus der Gruppe, bestehend aus einer Alkylgruppe mit 1 bis 12 Koh-
lenstoffatomen, einer substituierten oder unsubstituierten Phenylgruppe und einer substituierten oder unsubstitu-
ierten Naphthylgruppe.
- 35 14. Farbfilter nach Anspruch 12 oder 13,
wobei der farbige Teil mehrfach und geordnet vorliegt.
15. Farbfilter nach Anspruch 14,
wobei ein lichtabschirmender Teil (2) zwischen den farbigen Teilen vorliegt.
- 40 16. Farbfilter nach Anspruch 15,
wobei der lichtabschirmende Teil eine schwarze Matrix bildet.
17. Farbfilter nach Anspruch 15 oder 16,
wobei der lichtabschirmende Teil ein Harz enthält, welches ein schwarzes Pigment enthält.
- 45 18. Farbfilter nach einem der Ansprüche 15 bis 17,
wobei der lichtabschirmende Teil eine Dicke von 0,5 µm oder mehr hat.
- 50 19. Farbfilter nach einem der Ansprüche 15 bis 18,
wobei der lichtabschirmende Teil und die farbigen Teile mit einer Harzschicht (5) bedeckt sind.
- 55 20. Flüssigkristallpaneel, umfassend eine erste Grundplatte, die eine Pixel-Elektrode hat, eine zweite Grundplatte, die
eine gemeinsame Elektrode hat, und eine dazwischen eingeschlossene Flüssigkristallzusammensetzungsschicht
sowie ein Farbfilter, das einen entsprechend der Pixel-Elektrode arrangierten lichtdurchlässigen farbigen
Teil hat, wobei das Farbfilter ein Farbfilter nach einem der Ansprüche 12 bis 19 ist.

Revendications

1. Processus de production d'un filtre de couleur, comprenant une étape d'agencement d'une partie colorée de transmission de la lumière sur une surface d'une plaque de base (1) par application d'une encre (4) sur la plaque de base par un système à jet d'encre, dans lequel l'encre comprend de l'eau, un solvant organique aqueux et un matériau colorant,
caractérisé en ce que
 le matériau colorant contient un pigment à auto-dispersion ayant un groupe -COOM hydrophile lié directement ou par l'intermédiaire d'un groupe de liaison à une surface du pigment, M représentant l'hydrogène, un métal alcalin, de l'ammonium ou de l'ammonium organique.
2. Processus selon la revendication 1, dans lequel le groupe de liaison est sélectionné parmi le groupe consistant en un groupe alkyle ayant 1 à 12 atomes de carbone, un groupe phényle substitué ou non substitué, et un groupe naphthyle substitué ou non substitué.
3. Processus selon la revendication 1 ou 2, dans lequel l'étape d'agencement d'une partie colorée de transmission de la lumière comprend en outre les étapes secondaires : (i) de fourniture de manière sélective d'une partie (2) de protection contre la lumière sur la plaque de base, et (ii) d'application de l'encre à une ouverture (2a) entourée par les parties de protection contre la lumière.
4. Processus selon la revendication 3, comprenant en outre une étape de durcissement de l'encre appliquée à l'ouverture par au moins l'un d'un traitement thermique et d'une irradiation de lumière pour former un film durci de l'encre dans l'ouverture, dans lequel l'encre contient une résine durcissable par au moins l'un d'un traitement thermique et d'une irradiation de lumière.
5. Processus selon la revendication 3 ou 4, dans lequel la partie de protection contre la lumière constitue une matrice noire.
6. Processus selon l'une quelconque des revendications 3 à 5, dans lequel la partie de protection contre la lumière contient un résist contenant un pigment noir.
7. Processus selon l'une quelconque des revendications 3 à 6, dans lequel la partie de protection contre la lumière a une épaisseur de 0,5 μm ou davantage.
8. Processus selon l'une quelconque des revendications 3 à 7, comprenant en outre une étape de fourniture d'une couche (5) de résine au-dessus de la partie colorée de transmission de la lumière et la partie de protection contre la lumière.
9. Processus selon la revendication 8, dans lequel la couche de résine au-dessus de la partie de protection contre la lumière est formée par durcissement de la couche de résine par au moins l'un d'un traitement thermique et d'une irradiation de lumière.
10. Processus selon l'une quelconque des revendications 1 à 9, dans lequel l'encre contient un composé soluble dans l'eau ou dispersible dans l'eau, ou un composant de résine soluble dans l'eau ou dispersible dans l'eau.
11. Processus selon la revendication 10, dans lequel le composé soluble dans l'eau ou dispersible dans l'eau ou le composant de résine soluble dans l'eau ou dispersible dans l'eau est contenu à raison de 0,1 à 20 % en poids du poids total de l'encre.
12. Filtre de couleur comprenant un pigment à auto-dispersion au niveau d'une partie colorée de transmission de la lumière de celui-ci,
caractérisé en ce que
 la partie colorée de transmission de la lumière contient un pigment à auto-dispersion ayant un groupe -COOM hydrophile lié directement ou par l'intermédiaire d'un groupe de liaison à la surface du pigment, dans lequel M représente un atome d'hydrogène, un métal alcalin, de l'ammonium ou de l'ammonium organique.
13. Filtre de couleur selon la revendication 12, dans lequel le groupe de liaison est sélectionné parmi le groupe consistant en un groupe alkyle ayant 1 à 12 atomes de carbone, un groupe phényle substitué ou non substitué, et un

groupe naphtyle substitué ou non substitué.

14. Filtre de couleur selon la revendication 12 ou 13, dans lequel la partie colorée est présente en pluralité et en ordre.

5 **15.** Filtre de couleur selon la revendication 14, dans lequel une partie (2) de protection contre la lumière est présente entre les parties colorées.

16. Filtre de couleur selon la revendication 15, dans lequel la partie de protection contre la lumière constitue une matrice noire.

10 **17.** Filtre de couleur selon la revendication 15 ou 16, dans lequel la partie de protection contre la lumière contient un résist contenant un pigment noir.

18. Filtre de couleur selon l'une quelconque des revendications 15 à 17, dans lequel la partie de protection contre la lumière a une épaisseur de 0,5 μm ou davantage.

15 **19.** Filtre de couleur selon l'une quelconque des revendications 15 à 18, dans lequel la partie de protection contre la lumière et les parties colorées sont recouvertes par une couche (5) de résine.

20 **20.** Panneau à cristal liquide comprenant une première plaque de base comportant une électrode de pixels, une deuxième plaque de base comportant une électrode commune, une couche de composition à cristal liquide enfermée entre les première et deuxième plaques de base, et un filtre de couleur comportant une partie colorée de transmission de la lumière agencée de manière à correspondre à l'électrode de pixels, dans lequel le filtre de couleur est un filtre de couleur selon l'une quelconque des revendications 12 à 19.

25

30

35

40

45

50

55

PRIOR ART

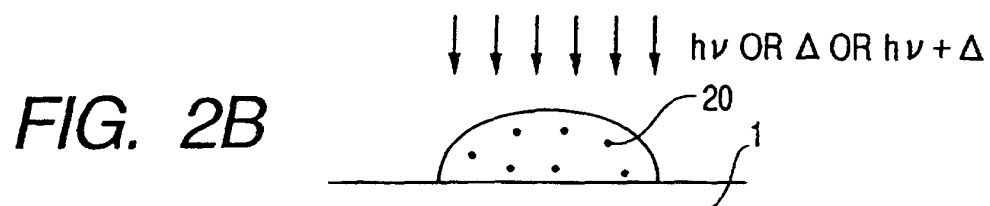
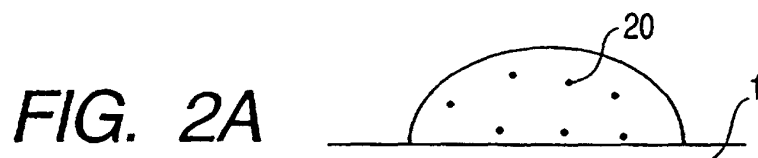
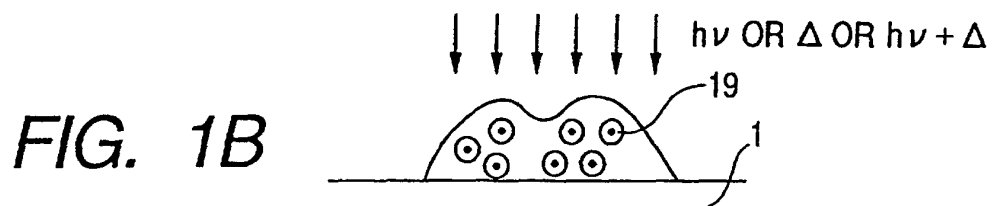
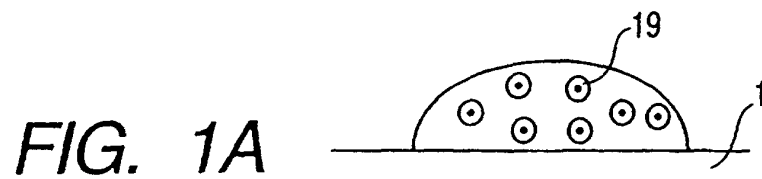


FIG. 3A

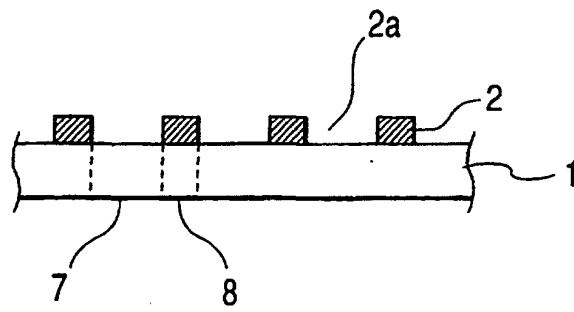


FIG. 3B

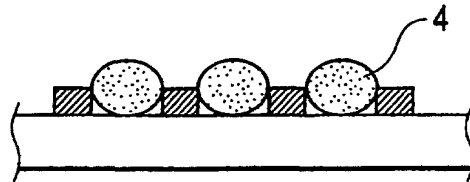


FIG. 3C

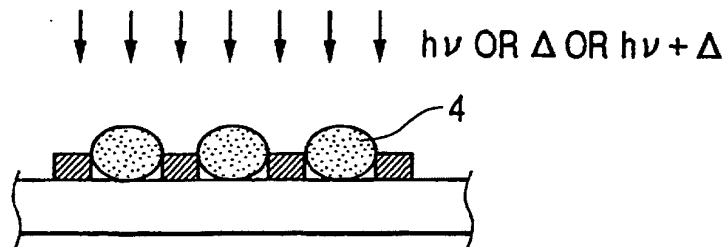
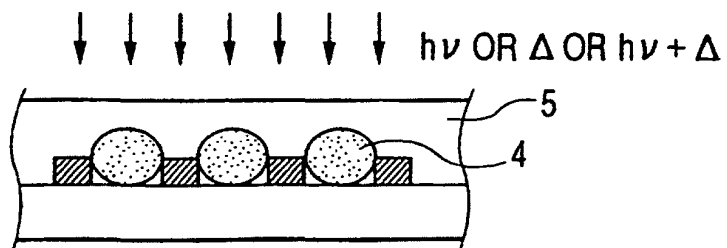


FIG. 3D








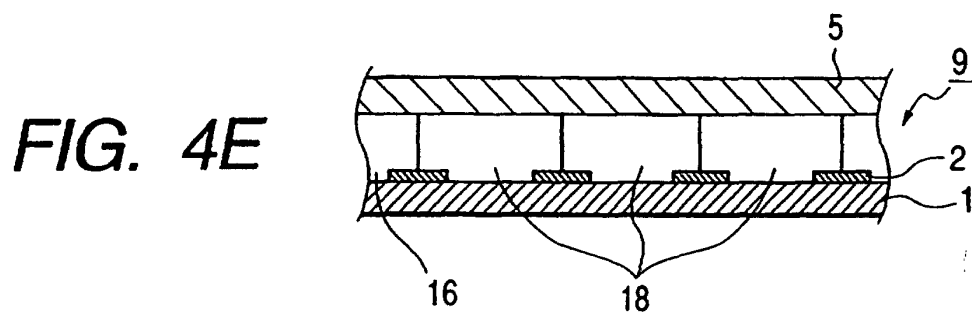


FIG. 5

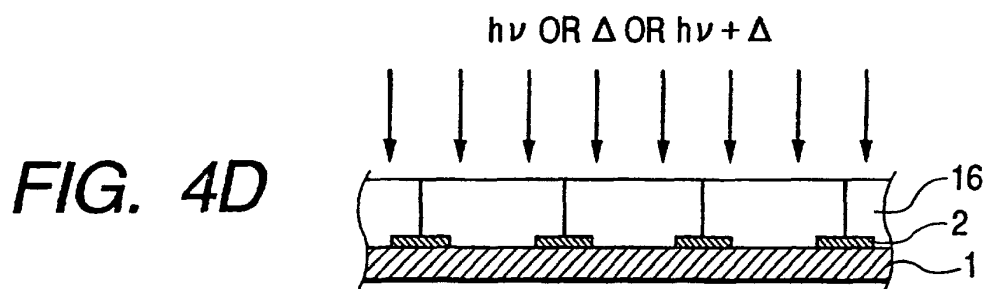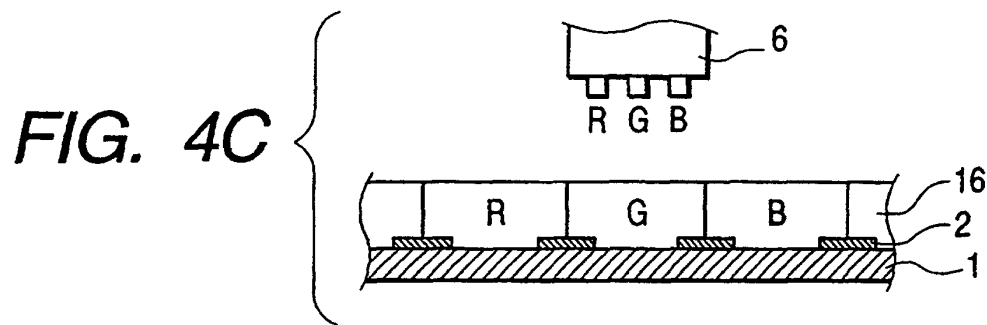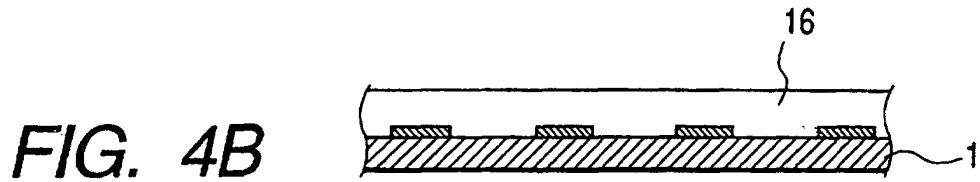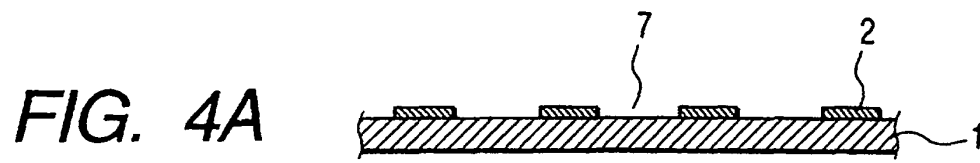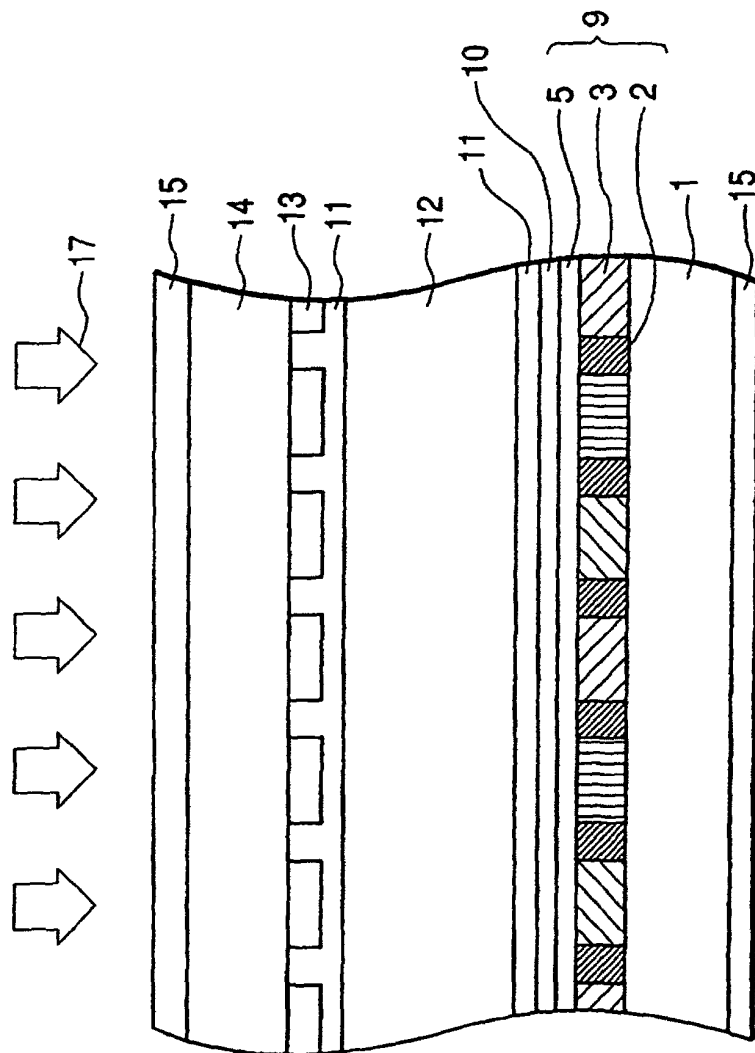

专利名称(译)	用于液晶面板的滤色器及其制造方法		
公开(公告)号	EP1072927B1	公开(公告)日	2005-04-27
申请号	EP2000115660	申请日	2000-07-20
[标]申请(专利权)人(译)	佳能株式会社		
申请(专利权)人(译)	佳能株式会社		
当前申请(专利权)人(译)	佳能株式会社		
[标]发明人	KASHIWAZAKI AKIO		
发明人	KASHIWAZAKI, AKIO		
IPC分类号	G02F1/1335 G02B5/20 G03F7/00		
CPC分类号	G02B5/201 G03F7/0007		
优先权	1999215619 1999-07-29 JP		
其他公开文献	EP1072927A3 EP1072927A2		
外部链接	Espacenet		

摘要(译)

一种滤色器的制造方法，包括通过喷墨系统将油墨施加到基板上而在基板的表面上设置透光的着色部分的步骤，其中油墨包括水，水性有机溶剂和着色材料，并且所述着色材料包含具有至少一种直接或通过连接基团键合到其表面的亲水基团的自分散颜料（20），通过所述方法获得的滤色器，和包含滤色器的液晶面板。

