



(11) **EP 2 851 744 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.01.2018 Bulletin 2018/01

(51) Int Cl.:
G02F 1/1345 ^(2006.01) **G02F 1/1339** ^(2006.01)
G09G 3/20 ^(2006.01) **G09G 3/36** ^(2006.01)
G11C 19/00 ^(2006.01) **G11C 19/28** ^(2006.01)

(21) Application number: **13790794.5**

(86) International application number:
PCT/JP2013/063022

(22) Date of filing: **09.05.2013**

(87) International publication number:
WO 2013/172243 (21.11.2013 Gazette 2013/47)

(54) **LIQUID CRYSTAL DISPLAY**
FLÜSSIGKRISTALLANZEIGE
DISPOSITIF D’AFFICHAGE À CRISTAUX LIQUIDES

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(74) Representative: **Müller-Boré & Partner**
Patentanwälte PartG mbB
Friedenheimer Brücke 21
80639 München (DE)

(30) Priority: **16.05.2012 JP 2012112771**

(56) References cited:
EP-A1- 2 840 566 **WO-A1-2009/104306**
WO-A1-2011/036911 **WO-A1-2011/104945**
JP-A- 2006 091 813 **JP-A- 2006 276 287**
JP-A- 2008 139 604 **US-A1- 2006 066 604**
US-A1- 2008 284 963

(43) Date of publication of application:
25.03.2015 Bulletin 2015/13

(73) Proprietor: **Sharp Kabushiki Kaisha**
Osaka-shi, Osaka 545-8522 (JP)

(72) Inventor: **MORI Takahiro**
Osaka-shi, Osaka 545-8522 (JP)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 851 744 B1

Description

TECHNICAL FIELD

5 **[0001]** The present invention relates to a liquid crystal display. More particularly, the present invention relates to a liquid crystal display preferred for a liquid crystal display including a shift register.

BACKGROUND ART

10 **[0002]** An active matrix liquid crystal display typically displays an image by selecting pixels arranged in a matrix on a row-by-row basis and writing a voltage in accordance with display data in the selected pixels. In order to select pixels on a row-by-row basis, a shift register for sequentially shifting an output signal (scanning signal) based on a clock signal is provided in a gate bus line drive circuit (hereinafter referred to as a gate driver).

15 **[0003]** The gate driver may be formed simultaneously with a thin film transistor (TFT) in a pixel by using a manufacturing process for forming the TFT in the pixel. For example, when a TFT in a pixel is formed using amorphous silicon, in order to reduce manufacturing costs, preferably the shift register included in the gate driver is also formed using amorphous silicon. In this way, recently, the gate driver has been monolithically formed on an array substrate in some cases.

20 **[0004]** In addition, a one drop filling method (ODF method) has been developed in recent years as a method for filling the interior of a liquid crystal panel of a liquid crystal display with a liquid crystal material. The one drop filling method makes it possible to perform a process of bonding two substrates together and a process of filling the interior of the two substrates with the liquid crystal material simultaneously.

[0005] Examples of techniques for monolithic formation of the gate driver include the following.

25 **[0006]** A display device is disclosed. In the display device, a display panel includes a first substrate including a plurality of gate lines and a plurality of data lines, a second substrate facing the first substrate, and a sealing material for bonding the first substrate and the second substrate. A gate driving unit includes a wiring section for receiving a plurality of signals from outside and a circuit section for outputting a driving signal in response to the plurality of signals. The wiring section includes an aperture for transmitting light incident through a back of the first substrate for hardening the sealing material (for example, see Patent Literature 1). Patent Literature 1 describes an improvement in bonding force between the first substrate and the second substrate by the sealing material.

30 **[0007]** A drive unit including a circuit section and a wiring section is disclosed. The circuit section includes a plurality of cascade-connected stages and outputs a driving signal based on a plurality of control signals. The wiring section includes first and second signal wiring for receiving a plurality of control signal inputs from outside, first connection wiring for connecting the first signal wiring to the plurality of stages, and second connection wiring for connecting the second signal wiring to the plurality of stages. The first signal wiring, the first connection wiring, and the second connection wiring are arranged in a layer different from a layer of the second signal wiring (for example, see Patent Literature 2).

35 **[0008]** A display substrate including gate wiring, a drive circuit section, a signal wiring section, a connection wiring section, and a contact section is disclosed. The gate wiring is formed in a display region and intersects source wiring. The drive circuit section is formed in a peripheral region surrounding the display region and outputs a gate signal to the gate wiring. The signal wiring section is formed adjacent to the drive circuit section, extends in an extending direction of the source wiring, and conveys a driving signal. The connection wiring section includes an end overlapping the signal wiring section and the other end connected to the drive circuit section electrically. The contact section is formed on the signal wiring section and electrically connects the one end of the connection wiring section to the signal wiring section (for example, see Patent Literature 3).

40 **[0009]** A drive circuit including a plurality of drive stages and a dummy stage is disclosed. The plurality of drive stages are cascade-connected to each other by an output terminal of each stage being connected to a control terminal of a previous stage. The plurality of drive stages output switching element driving signals to a plurality of driving signal lines each connected to a switching element formed on each pixel arranged in a matrix. In the dummy stage, a dummy output terminal is connected to each of a control terminal of a last stage among the plurality of drive stages and its own dummy control terminal (for example, see Patent Literature 4).

50 **[0010]** A liquid crystal display device is disclosed. In the liquid crystal display device, conventional first auxiliary capacitive trunk wiring is formed to have a narrow width, and new second auxiliary capacitive trunk wiring is further provided and arranged in a position that is the closest to the outer edge portion of a substrate (for example, see Patent Literature 5). The fifth embodiment and Fig. 13 of Patent Literature 5 describe a structure in which a slit aperture is provided in a second auxiliary capacitive trunk wiring 440 and wiring 420a for DC voltage VSS with the largest width among driving signal supply trunk wiring 420.

55 **[0011]** A TFT is disclosed including a first capacitor formed of a first capacitive electrode and a second capacitive electrode, a second capacitor formed of a third capacitive electrode and a fourth capacitive electrode, first lead-out wiring, second lead-out wiring connected to a gate electrode, third lead-out wiring, fourth lead-out wiring, a first wire,

and a second wire (for example, see Patent Literature 6).

[0012] A shift register including multistage-connected unit circuits is disclosed. Each of the unit circuits is provided between a clock terminal and an output terminal, and includes an output transistor for switching whether to pass a clock signal depending on gate potential, and one or more control transistors with one conducting terminal connected to a gate of the output terminal. The unit circuit is configured so that the gate potential of the output transistor is higher than high-level potential of the clock signal in a period in which the output transistor is turned on and the clock signal is high-level. The control transistors include a transistor with a channel length longer than a channel length of the output transistor (for example, see Patent Literature 7).

[0013] A shift register including a plurality of cascade-connected shift register stages on a substrate is disclosed. Each of the shift register stages includes a first transistor including a capacitive electrode facing at least one of two sources/drain electrodes on an opposite side of a gate electrode in a film thickness direction. Either one of the capacitive electrode and one of the source/drain electrodes facing the capacitive electrode is electrically connected to a control electrode of an output transistor of the shift register stage (for example, see Patent Literature 8).

[0014] Examples of techniques for one drop filling method include the following.

[0015] A liquid crystal display panel is disclosed. The liquid crystal display panel includes a TFT substrate, a color filter (CF) substrate arranged to face the TFT substrate, a sealing material sandwiched between the TFT substrate and the CF substrate and formed in a peripheral portion of the two substrates, and a liquid crystal layer arranged between the TFT substrate and the CF substrate. The CF substrate has a light shielding layer in the peripheral portion in which the sealing material is provided. The light shielding layer has a gap in a region overlapping wiring of the TFT substrate (for example, see Patent Literature 9).

[0016] A liquid crystal display panel is disclosed. The liquid crystal display panel includes an active matrix substrate and an opposed substrate arranged opposite to each other, and a liquid crystal layer provided between the two substrates, wherein a display region and a non-display region in the periphery thereof are defined. In the non-display region, a frame-shaped seal portion including a light-hardening material is provided between both substrates and has a linear portion with a narrow width and a wide portion wider than the linear portion, pattern formation of light shielding display wiring is performed on the active matrix substrate, a black matrix formed along an inner periphery end of the seal portion and having a cutout at a position corresponding to the wide portion is provided on the opposed substrate (for example, see Patent Literature 10).

[0017] A method of manufacturing a liquid crystal optical element is disclosed. The method includes a seal formation process of forming a closed-circular ultraviolet-hardening seal on a first transparent substrate, a liquid crystal dropping process of dropping a liquid crystal in a region surrounded by the seal, and a main seal hardening process of performing main hardening of the seal after bonding a second transparent substrate to the first transparent substrate via the seal with a predetermined gap. A provisional seal hardening process is performed between the seal formation process and the liquid crystal dropping process in which a seal inner region is irradiated with the ultraviolet light through a mask having a light shielding portion to perform provisional hardening of a partial region of the seal (for example, see Patent Literature 11).

CITATION LIST

- Patent Literature

[0018]

Patent Literature 1: JP 2006-39524 A
 Patent Literature 2: JP 2006-79041 A
 Patent Literature 3: JP 2008-26865 A
 Patent Literature 4: JP 2005-522734 T
 Patent Literature 5: WO 2011/067963
 Patent Literature 6: WO 2009/150862
 Patent Literature 7: WO 2010/137197
 Patent Literature 8: WO 2011/135873
 Patent Literature 9: WO 2006/098475
 Patent Literature 10: JP 2007-65037 A
 Patent Literature 11: JP 2009-210965 A

[0019] EP 2 840 566, which is only to be considered as comprised in the prior art under Art. 54(3) EPC, describes a display device including: a first substrate; a second substrate; and a seal, wherein the first substrate includes a shift register monolithically formed on an insulating substrate, and a plurality of bus lines, the shift register includes a plurality

of cascade-connected unit circuits, the plurality of unit circuits each include a clock terminal, an output, an output transistor having one of a source and a drain connected to the clock terminal and the other of the source and the drain connected to the output terminal, and a bootstrap capacitor having a first terminal connected to a gate of the output transistor and a second terminal connected to the output terminal, the output capacitor includes a first electrode, an insulating layer on the first electrode,; and a second electrode on the insulating layer, the first electrode is provided with at least one of a first cutout and a first opening, and the second electrode is provided with at least one of a second cutout and a second opening facing the at least one of the first cutout and the first opening.

[0020] WO 2011/036911 describes a liquid crystal display device equipped with a monolithic gate driver, in which a reduction in size is achieved by reducing the panel frame area more than existing devices. A third metal is formed as a metal film in an area outside a display area from among the areas on an array substrate, in addition to a source metal for forming a wiring pattern that comprises the source electrode of a thin film transistor that is disposed on a pixel circuit or a gate driver, and a gate metal for forming a wiring pattern that comprises the gate electrode of the thin film transistor. The third metal is electrically connected to the source metal or the gate metal via a contact.

[0021] US 2006/066604 describes a display device and a method of manufacturing the display device. The display device includes a display panel having a display area, a sealant area enclosing the display area, a first peripheral area positioned outside the sealant area and a second peripheral area disposed between the display area and the sealant area. A gate driver is formed in the display area and the binding member is formed in the sealant area. The reflective member is formed in at least one of the first peripheral area and the second peripheral area to guide the light to the binding member and cure the binding member.

[0022] US 2008/284963 describes a liquid crystal panel, comprising: a TFT substrate; a CF substrate; and a liquid crystal sandwiched between said TFT substrate and said CF substrate, said TFT substrate and said CF substrate are adhered by the seal material therebetween, wherein: the metal wiring disposed on said TFT substrate partially superposes said seal material, said seal material has a region adjacent to a pixel region; an outer region; and a middle region, for the metal wiring in a portion where the metal wiring corresponds the adjacent region of said seal material, the width of the wiring is decreased, for the metal wiring in a portion where the metal wiring corresponds the middle region of said seal material, the width of the wiring is increased, for the metal wiring in a portion where the metal wiring corresponds the outer region of said seal material, the width of the wiring is decreased.

SUMMARY OF THE INVENTION

- Technical Problem

[0023] With reference to Fig. 19, a liquid crystal display according to Comparative Embodiment 1 will be described. The liquid crystal display according to Comparative Embodiment 1 includes an array substrate, an opposed substrate, a seal for bonding both substrates together, and a shift register monolithically formed on the array substrate. The shift register includes an output transistor Tr11 connected to a gate bus line, a bootstrap capacitor CB11 connected to the output transistor Tr11, transistors Tr12 to Tr14, and a wiring group 178 including wirings 174 to 176.

[0024] The liquid crystal display according to Comparative Embodiment 1 is produced by a one drop filling method. The seal includes a hardened material of a light-hardening (for example, ultraviolet-hardening) and thermo-hardening sealing material. The sealing material is hardened to some extent by light irradiation (provisional hardening), and is fully hardened by subsequent heat treatment (main hardening). The array substrate includes a strip region (hereinafter referred to as a seal-coating region) 163 sandwiched between thick dashed lines, and the seal is formed in a strip on the seal-coating region 163. One end of the seal-coating region 163 is set between the wiring group 178 and an end 110a of the array substrate, and the other end is set between the bootstrap capacitor CB11 and the output transistor Tr11.

[0025] Here, it is desired that the seal is formed with a width as thin as possible from the following reasons.

[0026] The first reason is that an area of the output transistor Tr11 and the bootstrap capacitor CB11 increases resulting from higher resolution of a screen and/or a larger screen. As a result, a width of a region 164 in which the bootstrap capacitor CB11 and the output transistor Tr11 are arranged tends to become wider. Since the higher resolution and/or the larger screen involve a higher capability to apply predetermined voltage to a gate of a pixel transistor in a display region, that is, a higher application capability, the area of the output transistor Tr11 and the bootstrap capacitor CB11 increases.

[0027] The second reason is that a width of a picture-frame region in which a gate driver, a source driver, and the like are arranged tends to be narrower as part of pursuit of mobility of an electronic apparatus using a liquid crystal display. As a result, the width of the seal-coating region 163 tends to be narrower.

[0028] However, a narrower seal width leads to a smaller adhesion area between the array substrate and the seal, and a smaller adhesion area between the opposed substrate and the seal. Accordingly, peel strength of a panel against physical force applied to the liquid crystal display from outside becomes weaker. As a result, quality problems may occur, such as liquid crystal leakage.

[0029] If the sealing material is also coated on the output transistor Tr11 and the bootstrap capacitor CB11, light irradiation of the sealing material on the output transistor Tr11 and the bootstrap capacitor CB11 may be insufficient, and provisional hardening of the sealing material may not be fully performed. This is because the output transistor Tr11 and the bootstrap capacitor CB11 contain a light shielding electrode and function as light shielding members, and these members shield light. In this case, when a portion of the sealing material that has not undergone provisional hardening comes into contact with a liquid crystal material, a sealing material component may dissolve in the liquid crystal material, resulting in occurrence of quality problems, such as display failure. Therefore, in Comparative Embodiment 1, it is necessary to set the seal-coating region 163 in a region other than the output transistor Tr11 and the bootstrap capacitor CB11.

[0030] The technique described in Patent Literature 11 needs a mask having a light shielding portion in the provisional seal hardening process between the seal formation process and the liquid crystal dropping process, leading to higher unit prices of the liquid crystal display itself. In addition, the provisional seal hardening process needs to be performed before bonding first and second transparent substrates together, leading to longer time from the provisional hardening process until bonding of the both substrates together. Accordingly, there is a possibility of foreign particles, such as dust, mixing in a liquid crystal layer, causing display quality problems, such as a display bright defect.

[0031] In view of the above state of the art, it is an object of the present invention to provide a liquid crystal display that can reduce occurrence of quality problems, and can improve adhesive strength between substrates.

- Solution to Problem

[0032] The invention is set forth in claim 1. The present inventor made various investigations concerning a liquid crystal display that can reduce occurrence of quality problems and can improve adhesive strength between substrates, consequently has noted layout of elements and wiring contained in a shift register. Then, the present inventor found that, in the shift register arranged between a first end of an array substrate and a display region, by arranging an output transistor and a bootstrap capacitor in a region between the first end and members other than the output transistor and the bootstrap capacitor (in more detail, wiring or transistors other than the output transistor (second transistor)), it is possible to arrange the wiring and/or the second transistor on a display region side of the output transistor and the bootstrap capacitor. In addition, the present inventor found that it is possible to perform provisional hardening and main hardening of a sealing material in the region in which the wiring and/or the second transistor are arranged, whereas it is possible to perform main hardening of the sealing material in a region in which the output transistor and/or the bootstrap capacitor are arranged. Consequently, the present inventor found that it is possible to control a sealing material component dissolving in a liquid crystal layer, to set a coating region of the sealing material wider, and to control occurrence of liquid crystal leakage, and perceived that the above problems can be clearly solved. These findings have now led to completion of the present invention.

[0033] An aspect of the present invention is a liquid crystal display (hereinafter referred to as "display according to the present invention") including a first substrate, a second substrate facing the first substrate, and a seal provided in a region between the first substrate and the second substrate, wherein the first substrate includes an insulating substrate, a shift register monolithically formed on the insulating substrate, a plurality of bus lines, a first end, and a display region. The shift register includes a plurality of multistage-connected unit circuits and wiring connected to the plurality of unit circuits, and is arranged in a region between the first end and the display region. At least one of the plurality of unit circuits include a clock terminal into which a clock signal is input, an output terminal connected to a corresponding bus line and outputs an output signal, a first transistor (output transistor) with one of a source and a drain being connected to the clock terminal and the other of the source and the drain being connected to the output terminal, a second transistor, and a capacitor (bootstrap capacitor) with a first terminal connected to a gate of the first transistor and a second terminal connected to the output terminal. The first transistor and the capacitor are arranged in a region between the first end and one of the wiring and the second transistor. The wiring and the second transistor are arranged in a region between the display region and one of the first transistor and the capacitor.

[0034] The configuration of the display according to the present invention is not particularly limited by other components as long as the display is formed of these components as essential. Here, the shift register may include the plurality of pieces of wiring, and the at least one unit circuit may include the plurality of second transistors. In these cases, uses of the plurality of pieces of wiring usually differ from each other, and uses of the plurality of second transistors usually differ from each other.

[0035] Preferred embodiments in the display according to the present invention will be described below. The following preferred embodiments may be suitably combined with each other, and an embodiment that combines two or more of the following preferred embodiments with each other is also one of the preferred embodiments.

(A) Preferably, the first substrate includes a first region in which the wiring and/or the second transistor are arranged, and a second region in which the first transistor and/or the capacitor are arranged, the seal includes a first portion

adjacent to the liquid crystal layer and a second portion adjacent to the first portion, and the first portion is arranged on the first region, and the second portion is arranged on the second region.

(B) The wiring and the second transistor may be arranged in a region between the display region and one of the first transistor and the capacitor.

In the embodiment (B), the wiring may be arranged in a region between the second transistor and the display region.

In the embodiment (B), the second transistor may be arranged in a region between the wiring and the display region.

(C) The first transistor and the capacitor may be arranged in a region between the wiring and the second transistor.

In the embodiment (C), the second transistor may be arranged in a region between the first end and one of the first transistor and the capacitor.

In the embodiment (C), the wiring may be arranged in a region between the first end and one of the first transistor and the capacitor. In this case, it is possible to protect the first and second transistors from static electricity that intrudes from outside by the wiring.

(D) One of the wiring and the second transistor may be arranged in a region between the display region and one of the first transistor and the capacitor, while the other of the wiring and the second transistor may be arranged in a region between the first transistor and the capacitor.

(E) Preferably, the seal includes a hardened article of a light-hardening and thermo-hardening material.

(F) Preferably, the second substrate includes a light shielding member that faces the shift register.

While the use of the wiring is not particularly limited, the following embodiment (G) is preferable.

(G) A pulse signal is transmitted through the wiring.

While the use of the bus line is not particularly limited, the following embodiment (H) is preferable. Each of the plurality of bus lines is connected in common to one row or one column of pixel circuits.

(H) Preferably, the first substrate includes a plurality of pixel circuits provided in the display region, each of the plurality of pixel circuits includes a pixel transistor and a pixel electrode connected to the pixel transistor, and each of the plurality of bus lines is connected to the plurality of corresponding pixel transistor gates.

- Advantageous Effects of Invention

[0036] The present invention can achieve a liquid crystal display capable of reducing occurrence of quality problems and improving adhesive strength between substrates.

BRIEF DESCRIPTION OF DRAWINGS

[0037]

Fig. 1 is a schematic plan view of a liquid crystal panel included in a liquid crystal display according to Embodiment 1.

Fig. 2 is a schematic cross-sectional view taken along the line A-B of Fig. 1.

Fig. 3 is a schematic plan view of the liquid crystal panel included in the liquid crystal display according to Embodiment 1.

Fig. 4 is a block diagram illustrating a configuration of the liquid crystal display according to Embodiment 1.

Fig. 5 is a block diagram illustrating a configuration of a shift register according to Embodiment 1.

Fig. 6 is a circuit diagram of a unit circuit included in the shift register according to Embodiment 1.

Fig. 7 illustrates a timing chart of the shift register according to Embodiment 1.

Fig. 8 illustrates a timing chart of the shift register according to Embodiment 1.

Fig. 9 is a schematic plan view illustrating a configuration in a picture-frame region of the liquid crystal display according to Embodiment 1.

Fig. 10 is a schematic plan view illustrating the configuration in the picture-frame region of the liquid crystal display according to Embodiment 1.

Fig. 11 is a schematic cross-sectional view taken along the line C-D of Fig. 9.

Fig. 12 is a schematic cross-sectional view taken along the line E-F of Fig. 9.

Fig. 13 is a diagram illustrating a manufacturing process of the liquid crystal display according to Embodiment 1.

Fig. 14 is a schematic plan view illustrating the configuration in the picture-frame region of the liquid crystal display according to Embodiment 1.

Fig. 15 is a schematic plan view illustrating the configuration in the picture-frame region of the liquid crystal display according to Embodiment 2.

Fig. 16 is a schematic plan view illustrating the configuration in the picture-frame region of the liquid crystal display according to Embodiment 3.

Fig. 17 is a schematic plan view illustrating the configuration in the picture-frame region of the liquid crystal display according to Embodiment 4.

Fig. 18 is a schematic plan view illustrating the configuration in the picture-frame region of the liquid crystal display according to Embodiment 5.

Fig. 19 is a schematic plan view illustrating the configuration in the picture-frame region of the liquid crystal display according to Comparative Embodiment 1.

DESCRIPTION OF EMBODIMENTS

[0038] The present invention will be mentioned in more detail referring to the drawings in the following embodiments, but is not limited to these embodiments.

Embodiment 1

[0039] With reference to Figs. 1 to 14, a liquid crystal display according to Embodiment 1 will be described. First, with reference to Figs. 1 to 3, an entire structure of the liquid crystal display according to the present embodiment will be described.

[0040] The liquid crystal display according to the present embodiment is an active matrix drive and transmissive liquid crystal display. The liquid crystal display according to the present embodiment includes a liquid crystal panel 1, a backlight (not illustrated) arranged behind the liquid crystal panel 1, a control section (not illustrated) for driving and controlling the liquid crystal panel 1 and the backlight, and a flexible substrate (not illustrated) for connecting the liquid crystal panel 1 to the control section.

[0041] The liquid crystal panel 1 includes a display section 2 for displaying an image. A plurality of pixels 3 are arranged in a matrix in the display section 2. Each of the pixels 3 may include sub pixels of a plurality of colors (for example, three colors of red, green, and blue). In contrast, the liquid crystal display according to the present embodiment may be a monochrome liquid crystal display. In this case, it is not necessary to divide each pixel 3 into the plurality of sub pixels.

[0042] The liquid crystal panel 1 includes an array substrate (active matrix substrate) 10 corresponding to the above-described first substrate, an opposed substrate 50 corresponding to the above-described second substrate and facing the array substrate 10, a liquid crystal layer (display medium) 61 and a seal 62 provided between the substrates 10 and 50, an alignment film (not illustrated) provided on a surface on a liquid crystal layer 61 side of the array substrate 10, an alignment film (not illustrated) provided on a surface on a liquid crystal layer 61 side of the opposed substrate 50, and a source driver 5 mounted on the array substrate 10. In addition, the liquid crystal panel 1, the array substrate 10, and the opposed substrate 50 include a region (display region) 7 corresponding to the display section 2, and a region (picture-frame region) 8 around the display region 7. The source driver 5 is a drive circuit for source bus lines described later.

[0043] The seal 62 is formed in the picture-frame region 8 to surround the display region 7. In addition, the seal 62 bonds the substrates 10 and 50 together, and seals the liquid crystal layer 61 between the substrates 10 and 50.

[0044] The array substrate 10 is provided on a back side of the liquid crystal display, and the opposed substrate 50 is provided on an observer side. The array substrate 10 is irradiated with light from the backlight. An image displayed on the liquid crystal panel 1 is observed from an opposed substrate 50 side. A polarizing plate (not illustrated) is affixed on a surface of each of the substrates 10 and 50 on an opposite side of the liquid crystal layer 61. These polarizing plates are usually disposed in a cross-Nicol state with each other. The source driver 5 is mounted by a chip on glass (COG) technique in a region of the array substrate 10 that does not face the opposed substrate 50, that is, in a region protruded from the opposed substrate 50 (hereinafter referred to as an overhang region).

[0045] The array substrate 10 includes gate drivers 6a and 6b monolithically formed on the right and left of the display region 7, terminals 26, 27, 28, 29, and 30 formed in the overhang region, source bus lines (data signal lines) 12 provided to travel vertically through the display region 7, gate bus lines (scanning signal lines) 13 and common bus lines 17 provided to travel horizontally through the display region 7, lead-out wiring 18 and 19 each formed in the picture-frame region 8, wiring (hereinafter referred to as common trunk wiring) 16 formed in the picture-frame region 8 to surround the display region 7, and input wiring 25 formed in the picture-frame region 8. The gate bus lines 13 include the gate bus lines 13 connected to output terminals of the left gate driver 6a, and the gate bus lines 13 connected to output terminals of the right gate driver 6b. These two types of gate bus lines 13 are arranged alternately. The gate bus lines 13 correspond to the bus line in the above-described embodiment (D). The flexible substrate is mounted in a region (region surrounded by a thick alternate long and two short dashes line in Fig. 3) in which the terminals 26, 28, and 30 are provided. Each of the source bus lines 12 is connected to an output section of the source driver 5 via the corresponding lead-out wiring 18 and the terminal 27. Various signals and supply voltages are input into an input section of the source driver 5 from the control section via the flexible substrate, the terminal 28, the input wiring 25, and the terminal 29. A common signal is input into the common trunk wiring 16 from the control section via the flexible substrate and the terminal 30. Here, the common signal is a signal applied in common to all the pixels. The common bus lines 17 are connected to the common trunk wiring 16 in the picture-frame region 8. The common signal is applied to the common bus lines 17 from the common

trunk wiring 16.

[0046] The gate drivers 6a and 6b are supplied with various signals and supply voltages from the control section via the flexible substrate, the terminal 26, and the lead-out wiring 19. Details will be described later. All the gate drivers called gate monolithic, gate driverless, gate driver incorporated in panel, gate in panel, gate-on array, and the like can be included in the gate drivers 6a and 6b. Instead of two gate drivers 6a and 6b, only one gate driver that performs a function similar to a function of the two gate drivers 6a and 6b may be provided.

[0047] The opposed substrate 50 includes a transparent (translucent) insulating substrate 51, a black matrix (BM) 52 that functions as a light shielding member, and a plurality of columnar spacers (not illustrated). The BM 52 is formed to shield light in the picture-frame region 8 and a region facing bus lines. The BM 52 is formed in a frame shape and covers the gate drivers 6a and 6b. In Fig. 2, illustration of the BM 52 is omitted in the display region 7. In the display region 7, color filters of a plurality of colors may be provided. Each of the color filters is formed to cover a region defined by the BM 52, that is, an aperture of the BM 52. In addition, the opposed substrate 50 may have a transparent (light-transmissive) overcoat film that covers all the color filters. The columnar spacers are arranged in a light shielding region on the BM 52. In addition, particle-shaped spacers (not illustrated) may be mixed in the seal 62. These spacers are members for maintaining a constant distance between the array substrate 10 and the opposed substrate 50. The distance (cell gap) between both substrates is set to be about 4.0 μm .

[0048] Examples of materials of the color filter include an acrylic resin obtained by mixing pigments. Examples of materials of the BM 52 include chromium and an acrylic resin obtained by mixing black pigments. Preferably, the BM 52 is formed of an acrylic resin having a thickness of about 1.0 μm and obtained by mixing black pigments. The overcoat film is formed of a transparent insulating material. Specifically, a light-transmissive hardening resin, such as an acrylic resin and an epoxy resin, is used. The overcoat film is preferably formed of an acrylic resin, and has a thickness of preferably about 2.0 μm . The overcoat film has a function of protecting the color filter physically or chemically.

[0049] A liquid crystal mode of the liquid crystal display of the present embodiment is not particularly limited. For a liquid crystal mode using a vertical electric field such as a twisted nematic (TN) mode and a vertical alignment (VA) mode, the opposed substrate 50 has a common electrode to which the common signal is applied, the array substrate 10 has a common transfer electrode 14 connected to the common trunk wiring 16, and both electrodes are connected to each other via a conducting member. The common electrode is formed of a transparent conductive material (light-transmissive conductive material), such as an indium tin oxide (ITO), a tin oxide (SnO_2), and an indium zinc oxide (IZO). Preferably ITO is used. Examples of conducting members include a hardening resin in which conductive microparticles are mixed, silver, and carbon paste. Conductive microparticles may be mixed in a sealing material, and the microparticles may be used as a conductive member. Examples of conductive microparticles include microparticles made of resin with a metal, such as gold, being coated.

[0050] Next, with reference to Figs. 4 to 8, a circuit configuration and operation of the liquid crystal display of the present embodiment will be described.

[0051] As illustrated in Fig. 4, the liquid crystal display according to the present embodiment includes a pixel array 71, a display control circuit 72 provided in the control section, the source driver 5, and the gate drivers 6a and 6b.

[0052] The pixel array 71 includes n gate bus lines $G1$ to Gn corresponding to the gate bus lines 13, m source bus lines $S1$ to Sm corresponding to the source bus lines 12, and $(m \times n)$ pixel circuits Pij each formed in the pixel 3. n and m are each an integer greater than or equal to two, i is an integer from one to n inclusive, and j is an integer from one to m inclusive. The gate bus lines $G1$ to Gn are arranged parallel to each other, whereas the source bus lines $S1$ to Sm are arranged parallel to each other to be orthogonal to the gate bus lines $G1$ to Gn . Each of the pixel circuits Pij is arranged near an intersection of the gate bus line Gi and the source bus line Sj . In this way, $(m \times n)$ pixel circuits Pij are two-dimensionally arranged with m pieces in a row direction and n pieces in a column direction. The gate bus line Gi is connected in common to the pixel circuits Pij arranged in the i th row, whereas the source bus line Sj is connected in common to the pixel circuits Pij arranged in the j th column. Each of the pixel circuits Pij is provided with a pixel TFT 4 as a switching element and a pixel electrode 9. A gate of the TFT 4 is connected to the gate bus line Gi . Among a drain and source of the TFT 4, one is connected to the source bus line Sj , and the other is connected to the pixel electrode 9.

[0053] Control signals, such as a horizontal synchronization signal HSYNC and a vertical synchronizing signal VSYNC, and an image signal DAT are supplied from outside the liquid crystal display of the present embodiment. Based on these signals, the display control circuit 72 outputs clock signals CK1, CK2, and a start pulse SP1 to the gate driver 6a. The display control circuit 72 outputs clock signals CK3, CK4, and a start pulse SP2 to the gate driver 6b. The display control circuit 72 outputs a control signal SC and a digital video signal DV to the source driver 5.

[0054] The gate driver 6a includes a shift register 73a. The shift register 73a includes a plurality of multistage-connected unit circuits SR1, SR3, ..., SR $n-1$. The unit circuits SR1, SR3, ..., SR $n-1$ are connected to the odd-numbered gate bus lines $G1$, $G3$, ..., $Gn-1$, respectively.

[0055] The gate driver 6b includes a shift register 73b. The shift register 73b includes a plurality of multistage-connected unit circuits SR2, SR4, ..., SR n . The unit circuits SR2, SR4, ..., SR n are connected to the even-numbered gate bus lines $G2$, $G4$, ..., Gn , respectively.

[0056] The shift registers 73a and 73b control output signals SROUT1 to SROUTn to high-level (indicating a selected state) sequentially one-by-one. The output signals SROUT1 to SROUTn are provided to the gate bus lines G1 to Gn, respectively. This causes the gate bus lines G1 to Gn to be sequentially selected one-by-one, and the pixel circuits Pij in one row are collectively selected. That is, the pixel TFTs 4 of the pixel circuits Pij in one row are turned on.

[0057] Based on the control signal SC and the digital video signal DV, the source driver 5 applies voltages according to the digital video signal DV to the source bus lines S1 to Sm. This causes the voltages according to the digital video signal DV to be written in the pixel circuits Pij in the selected one row. Thus, the liquid crystal display of the present embodiment displays an image.

[0058] As illustrated in Fig. 5, each of the unit circuits SR1 to SRn includes input terminals INa, INb, clock terminals CKA, CKB, a power terminal VSS, and an output terminal OUT.

[0059] The shift register 73a is supplied with the start pulse SP1, an end pulse EP1, the two-phase clock signals CK1, CK2, and a low-level potential VSS (a symbol identical to a symbol of the power terminal is assigned for convenience). The start pulse SP1 is input into the input terminal INa of the first-stage unit circuit SR1 in the shift register 73a. The end pulse EP1 is input into the input terminal INb of the final-stage unit circuit SRn-1 in the shift register 73a. The clock signal CK1 is input into the clock terminals CKA of odd-numbered-stage unit circuits in the shift register 73a and the clock terminals CKB of even-numbered-stage unit circuits in the shift register 73a. The clock signal CK2 is input into the clock terminals CKA of even-numbered-stage unit circuits in the shift register 73a and the clock terminals CKB of odd-numbered-stage unit circuits in the shift register 73a. The low-level potential VSS is input into the power terminals VSS of all the unit circuits in the shift register 73a. The output signals SROUT1, SROUT3, ..., SROUTn-1 are output from the output terminals OUT of the unit circuits SR1, SR3, ..., SRn-1, respectively. The output signals SROUT1, SROUT3, ..., SROUTn-1 are output to the gate bus lines G1, G3, ..., Gn-1, respectively. In addition, each output signal is input into the input terminal INa of the second-back-stage (first-back stage in the shift register 73a) unit circuit, and into the input terminal INb of the fourth-previous-stage (second-previous stage in the shift register 73a) unit circuit.

[0060] The shift register 73b is supplied with the start pulse SP2, an end pulse EP2, the two-phase clock signals CK3, CK4, and the low-level potential VSS. The start pulse SP2 is input into the input terminal INa of the first-stage unit circuit SR2 in the shift register 73b. The end pulse EP2 is input into the input terminal INb of the final-stage unit circuit SRn in the shift register 73b. The clock signal CK3 is input into the clock terminals CKA of odd-numbered-stage unit circuits in the shift register 73b and the clock terminals CKB of even-numbered-stage unit circuits in the shift register 73b. The clock signal CK4 is input into the clock terminals CKA of even-numbered-stage unit circuits in the shift register 73b and the clock terminals CKB of odd-numbered-stage unit circuits in the shift register 73b. The low-level potential VSS is input into the power terminals VSS of all the unit circuits in the shift register 73b. The output signals SROUT2, SROUT4, ..., SROUTn are output from the output terminals OUT of the unit circuits SR2, SR4, ..., SRn, respectively. The output signals SROUT2, SROUT4, ..., SROUTn are output to the gate bus lines G2, G4, ..., Gn, respectively. In addition, each output signal is input into the input terminal INa of the second-back-stage (first-back stage in the shift register 73b) unit circuit, and into the input terminal INb of the fourth-previous-stage (second-previous stage in the shift register 73b) unit circuit.

[0061] Although it is preferable that the low-level potential VSS is negative potential from a viewpoint of securely turning off an n-channel TFT, the low-level potential VSS may be positive potential when used for a p-channel TFT as the pixel TFT 4.

[0062] As illustrated in Fig. 6, each unit circuit includes n-channel-TFT transistors Tr1 to Tr4, and a capacitor (hereinafter referred to as a bootstrap capacitor) CB1. Hereinafter, the transistor Tr1 is referred to as an output transistor Tr1.

[0063] A drain of the output transistor Tr1 is connected to the clock terminal CKA, and a source is connected to the output terminal OUT. A drain and gate of the transistor Tr2 are connected to the input terminal INa, and a source is connected to a gate of the output transistor Tr1. The bootstrap capacitor CB1 is provided between the gate and source of the output transistor Tr1. One terminal of the bootstrap capacitor CB1 is connected to the gate of the output transistor Tr1, and the other terminal is connected to the output terminal OUT. A drain of the transistor Tr3 is connected to the output terminal OUT, a gate is connected to the clock terminal CKB, and a source is connected to the power terminal VSS. A drain of the transistor Tr4 is connected to the gate of the output transistor Tr1, a gate is connected to the input terminal INb, and a source is connected to the power terminal VSS.

[0064] The output transistor Tr1 is provided between the clock terminal CKA and the output terminal OUT, and functions as a transistor (transmission gate) for switching whether to allow a clock signal to pass depending on gate potential. The gate of the output transistor Tr1 is capacitively coupled with a conducting terminal (source) on the output terminal OUT side. As a result, as will be described later, in a period when the output transistor Tr1 is on and the clock signal CK1 or CK3 that is input into the clock terminal CKA (hereinafter referred to as a clock signal CKA) is high-level, the gate potential of the output transistor Tr1 becomes higher than the high-level potential of the clock signal CKA. Hereinafter, a node to which the gate of the output transistor Tr1 is connected is referred to as netA.

[0065] Figs. 7 and 8 each illustrate a timing chart of the shift registers 73a and 73b. Fig. 7 illustrates input and output signals and voltage changes at the node netA of an odd-numbered-stage unit circuit in each shift register.

[0066] As illustrated in Fig. 7, in the odd-numbered-stage unit circuit in each shift register, the clock signal CK1 or CK3 is input via the clock terminal CKA, and the clock signal CK2 or CK4 is input via the clock terminal CKB. A period when potential of each of the clock signals CK1 to CK4 is high-level is substantially identical to 1/2 period. The clock signal CK2 is a signal obtained by delaying the clock signal CK1 by 1/2 period. The clock signal CK3 is a signal obtained by delaying the clock signal CK1 by 1/4 period. The clock signal CK4 is a signal obtained by delaying the clock signal CK2 by 1/4 period.

[0067] The start pulses SP1 and SP2 become high-level before a shifting operation starts for a period identical to a period of high-level potential of the clock signals CK2 and CK4, respectively. The end pulses EP1 and EP2 (not illustrated in Figs. 7 and 8) become high-level after the shifting operation ends for a period identical to a period of high-level potential of the clock signals CK2 and CK4, respectively.

[0068] With reference to Fig. 7, an operation of the odd-numbered-stage unit circuit in each shift register will be described. First, when a signal (start pulses SP1, SP2, or an output signal of a second-previous-stage unit circuit (previous stage in each shift register), hereinafter referred to as an input signal INa) input into the input terminal INa changes from low-level to high-level, potential at the node netA also changes to high-level via the diode-connected transistor Tr2, and the output transistor Tr1 is turned on.

[0069] Next, when the input signal INa changes to low-level, the transistor Tr2 is turned off, and the node netA enters a floating state, but the output transistor Tr1 maintains on-state.

[0070] Next, when the clock signal CKA (clock signal CK1 or CK3) changes from low-level to high-level, the bootstrap capacitor CB1 is charged, and a bootstrap effect raises the potential at the node netA to about twice an amplitude V_{ck} (= (high-level potential VGH) - (low-level potential VGL)) of the clock signal CKA. Since the gate potential of the output transistor Tr1 is sufficiently high, resistance between the source and drain of the output transistor Tr1 becomes smaller, and the clock signal CKA passes through the output transistor Tr1 without a voltage drop.

[0071] While the clock signal CKA is high-level, the potential at the node netA is about twice V_{ck} , and the output signal SROUT is high-level.

[0072] Next, when the clock signal CKA changes to low-level, the potential at the node netA becomes high-level. At the same time, since the clock signal CK2 or CK4 input into the clock terminal CKB (hereinafter referred to as a clock signal CKB) changes to high-level, the transistor Tr3 is turned on, and low-level potential VSS is applied to the output terminal OUT. Consequently, the output signal SROUT becomes low-level.

[0073] Next, when a signal (end pulses EP1, EP2, or an output signal of a fourth-back-stage unit circuit (second-back stage in each shift register), hereinafter referred to as an input signal INb) input into the input terminal INb changes from low-level to high-level, the transistor Tr4 is turned on. When the transistor Tr4 is turned on, the low-level potential VSS is applied to the node netA, the potential at the node netA changes to low-level, and the output transistor Tr1 is turned off.

[0074] Next, when the input signal INb changes to low-level, the transistor Tr4 is turned off. At this time, the node netA enters a floating state, but the output transistor Tr1 maintains off-state. Until the input signal INa becomes high-level next time, ideally, the output transistor Tr1 maintains off-state, and the output signal SROUT maintains low-level.

[0075] Then, the transistor Tr3 is turned on when the clock signal CKB becomes high-level. Accordingly, every time the clock signal CKB becomes high-level, the low-level potential VSS is applied to the output terminal OUT. In this way, the transistor Tr3 has a function to repeatedly set the output terminal OUT to the low-level potential VSS and to stabilize the output signal SROUT.

[0076] The even-numbered-stage unit circuit also operates in the same manner as in the odd-numbered-stage unit circuit.

[0077] Consequently, as illustrated in Fig. 8, gate pulses are sequentially output to the gate bus lines G1, G2, G3, ...

[0078] Next, with reference to Figs. 9 to 14, a configuration in the picture-frame region of the liquid crystal display according to the present embodiment will be described.

[0079] As illustrated in Fig. 9, a wiring group 78 extending in a direction orthogonal to the above-described gate bus lines 13 is provided in each gate driver. The wiring group 78 includes wiring 74 that is set at the low-level potential VSS, wiring 75 for transmitting the clock signal CK1 or CK3, and wiring 76 for transmitting the clock signal CK2 or CK4. A slit aperture is formed in each piece of the wiring.

[0080] The output transistor Tr1 and the bootstrap capacitor CB1 are arranged adjacent to each other. The transistors Tr2 to Tr4 are arranged adjacent to each other. A region (hereinafter referred to as a control element region) 77 in which the transistors Tr2 to Tr4 are arranged is located between the wiring group 78 and the output transistor Tr1. The output transistor Tr1 and the bootstrap capacitor CB1 are arranged on an end 10a side (on an opposite side of the display region 7) of the control element region 77 and the wiring group 78.

[0081] As illustrated in Fig. 10, the array substrate 10 includes a strip region (hereinafter referred to as a seal-coating region) 63 sandwiched between thick dashed lines. The seal 62 is formed in a strip on the seal-coating region 63 so that the seal 62 does not protrude from the seal-coating region 63. One end of the seal-coating region 63 is set in a region between the bootstrap capacitor CB1 and the end 10a of the array substrate 10, whereas the other end is set in a region between the wiring 74 and the display region 7. The seal-coating region 63 includes a region 65 in which the

transistors Tr2 to Tr4 and the wiring 74 to 76 (wiring group 78) are arranged, and a region 64 in which the output transistor Tr1 and the bootstrap capacitor CB1 are arranged. The region 65 corresponds to the above-described first region, and the region 64 corresponds to the above-described second region. In this way, in the present embodiment, different from Comparative Embodiment 1, the output transistor Tr1 and the bootstrap capacitor CB1 are arranged in the seal-coating region 63.

[0082] The seal 62 is arranged to cover at least part or all of the output transistor Tr1 and a partial region or entire region of the control element region 77. As long as the seal 62 does not protrude from the seal-coating region 63, it is not particularly limited whether the seal 62 covers regions other than these regions. For example, the seal 62 may be arranged to cover part or all of the output transistor Tr1, the entire region of the control element region 77, and part or all of the wiring 76. The seal 62 may be arranged to cover part or all of the bootstrap capacitor CB1, all of the output transistor Tr1, the entire region of the control element region 77, all of the wiring 76, and part or all of the wiring 75. The seal 62 may be arranged to cover part or all of the bootstrap capacitor CB1, all of the output transistor Tr1, the entire region of the control element region 77, all of the wiring 76, all of the wiring 75, and part or all of the wiring 74. In this way, the seal 62 includes a first portion that is adjacent to the liquid crystal layer 61 and a second portion that is adjacent to the first portion. The first portion is arranged on the region 65, whereas the second portion is arranged on the region 64.

[0083] Each of the transistors Tr1 to Tr4 is a bottom gate thin film transistor, and particularly the output transistor Tr1 is large and has a comblike source/drain structure. This enables each transistor to secure a large channel width, for example, on the order of ten μm to hundred μm .

[0084] As illustrated in Fig. 11, the array substrate 10 includes a transparent (translucent) insulating substrate 11. The output transistor Tr1 includes a gate electrode 41 on the insulating substrate 11, a gate insulator 42 on the gate electrode 41, an i layer (semiconductor active layer) 43 on the gate insulator 42, an n+ layer 44 on the i layer 43, and a source electrode 45 and drain electrode 46 that are each provided on the n+ layer 44. The source electrode 45 and the drain electrode 46 each include a plurality of comblike portions. The source electrode 45 and the drain electrode 46 are arranged face to face so that the comblike portions mesh each other.

[0085] As illustrated in Fig. 12, the bootstrap capacitor CB1 includes a first electrode 31 on the insulating substrate 11, the gate insulator 42 that is provided on the first electrode 31 and shared by the output transistor Tr1, and a second electrode 32 on the gate insulator 42.

[0086] In order for the array substrate 10 and the opposed substrate 50 to be light-transmissive, as a material for the insulating substrates 11 and 51, inorganic substances, such as glass, silica glass, and silicon nitride, organic polymer compounds (resin), such as an acrylic resin, are mainly used. Preferably, silica glass with a thickness of about 0.7 mm is used.

[0087] The gate electrode 41 and the first electrode 31 are each formed of a common conductive film containing a material, such as molybdenum (Mo), titanium (Ti), aluminum (Al), copper (Cu), and an alloy of these metals. The gate electrode 41 and the first electrode 31 may be formed of a multilayer film of these conductive films. Preferably, Al is used. The gate insulator 42 is formed of a transparent (translucent) insulating layer containing an inorganic insulating material, such as silicon nitride and silicon oxide. The gate insulator 42 may be formed using a multilayer film of these insulating layers. The i layer (semiconductor active layer) 43 is formed of amorphous silicon, and the n+ layer 44 is formed of amorphous silicon containing impurities (for example, phosphorus). The source electrode 45, the drain electrode 46, and the second electrode 32 are each formed of a common conductive film containing a material, such as Mo, Ti, Al, Cu, and an alloy of these metals. The source electrode 45, the drain electrode 46, and the second electrode 32 may be each formed of a multilayer film of these conductive films.

[0088] A transparent (translucent) insulating layer 47 that functions as a passivation film is formed on the source electrode 45, the drain electrode 46, and the second electrode 32. The insulating layer 47 is formed of an inorganic insulating layer, such as a silicon nitride film and a silicon oxide film. The insulating layer 47 may be formed using a multilayer film of these inorganic insulating layers. A transparent (translucent) insulating layer 48 that functions as a planarization film is formed on the insulating layer 47. The insulating layer 48 is formed of an organic insulating layer. Examples of materials of the organic insulating layer include a photosensitive resin, such as a photosensitive acrylic resin.

[0089] Each of the transistors Tr2 to Tr4 differs from the output transistor Tr1 only in a planar structure, and has a cross-sectional structure similar to the structure of the output transistor Tr1. In each diagram, a shaded member, and the gate electrode 41 and the first electrode 31 are formed of a common conductive film, while a member with dot patterns, the source electrode 45, the drain electrode 46, and the second electrode 32 are formed of a common conductive film. In each diagram, a white-coated rectangular region arranged in a region in which the shaded member and the member with dot patterns overlap each other represents a contact hole for connecting both members to each other.

[0090] The pixel TFT 4 is a bottom gate thin film transistor in the same manner as in the output transistors Tr1 to Tr4, and is formed together with the output transistors Tr1 to Tr4 through a common process.

[0091] In the display region 7, the above-described pixel electrode 9 is formed on the insulating layer 48. The pixel electrode 9 is electrically connected to the drain electrode (not illustrated) of the pixel TFT 4 through a contact hole (not illustrated) that passes through the insulating layers 47 and 48. The pixel electrode 9 is formed of a transparent conductive

material (light-transmissive conductive material), such as ITO, SnO₂, and IZO.

[0092] Next, a method for manufacturing the liquid crystal display of the present embodiment will be described. The liquid crystal display of the present embodiment can be manufactured by a general method. More particularly, first, a substrate (hereinafter referred to as an array mother glass) before being divided into a plurality of array substrates 10, and a substrate (referred to as a CF mother glass) before being divided into a plurality of opposed substrates 50 are each produced by a usual method.

[0093] After the array mother glass and the CF mother glass are produced, steps S11 to S19 are performed as illustrated in Fig. 13.

[0094] First, in step S11 (substrate cleaning process), the array mother glass and the CF mother glass are cleaned.

[0095] A degassing process may be performed between step S11 and step S12. In the degassing process, the array mother glass and the CF mother glass are heated to remove unnecessary substances, such as an organic solvent and gas from these mother glasses.

[0096] Next, in step S12 (alignment film formation process), an alignment film is formed on each of the array mother glass and the CF mother glass. Examples of materials for the alignment film include an organic material such as polyimide and an inorganic material such as a silicon oxide.

[0097] Next, in step S13 (rubbing process), rubbing treatment is applied to each alignment film. Step S13 may be omitted depending on an alignment state of liquid crystal molecules in the liquid crystal layer 61. Instead of the rubbing treatment, alignment treatment other than the rubbing treatment may be applied, for example, optical alignment treatment.

[0098] Next, in step S14 (seal-coating process), a material (hereinafter referred to as a sealing material) for a seal before hardening is coated on one of the array mother glass and the CF mother glass by a method such as a screen printing method and a dispenser writing method. The sealing material is pasty and is coated in a closed ring. This sealing material is a hardening (for example, ultraviolet-hardening) and thermo-hardening material (hereinafter referred to as light/heat combined use sealing material), and generally includes an acrylic resin and/or an epoxy resin. Specific examples of light/heat combined use sealing materials include the Photolec S series (made by SEKISUI CHEMICAL CO., LTD.) that uses an epoxy acrylic resin as a main component. The sealing material is preferably coated by a dispenser writing method.

[0099] Next, in step S15 (liquid crystal material dropping and bonding process), a liquid crystal material is dropped on a mother glass on which the sealing material is coated, a mother glass on which the sealing material is not coated, or both of the mother glasses, then both mother glasses are bonded together. Bonding of both mother glasses is performed under environments with pressures lower than atmospheric pressures (for example, under vacuum). Both mother glasses are placed under atmospheric pressures after bonding. The liquid crystal material is preferably dropped on the CF mother glass.

[0100] Next, in step S16 (provisional seal hardening process), the sealing material is irradiated with light from an array mother glass side to harden (provisional hardening) the sealing material to some extent. At this time, since the light is shielded by the output transistor Tr1 and the bootstrap capacitor CB1, the sealing material on the output transistor Tr1 and the bootstrap capacitor CB1 is irradiated with insufficient light, and the sealing material hardly undergoes provisional hardening. However, since the region 65 in which the transistors Tr2 to Tr4 and the wiring 74 to 76 are arranged includes many translucent regions, the sealing material can fully undergo provisional hardening on the region 65. In addition, a sealing material portion (portion corresponding to the above-described first portion) that has undergone provisional hardening is arranged closer to the display region 7, and a sealing material portion (portion corresponding to the above-described second portion) that has not undergone provisional hardening is arranged closer to the end 10a of the array substrate 10. This can prevent the sealing material portion that has not undergone provisional hardening from touching the liquid crystal layer, and thus can prevent a sealing material component from dissolving and diffusing into the liquid crystal layer. The sealing material is irradiated with light from the array substrate 10 side because the BM 52 is formed on the opposed substrate 50. Types of light used for irradiation is not limited, and may include, for example, light including ultraviolet light. Preferably, ultraviolet light is used.

[0101] Next, in step S17 (main seal hardening process), the bonded mother glasses are heated. The heating further hardens the sealing material (main hardening). All of the sealing material hardens in this process. Accordingly, on the region 64 in which the output transistor Tr1 and the bootstrap capacitor CB1 are arranged, the sealing material hardly undergoes provisional hardening in step S16, and undergoes main hardening in step S17. On the other hand, on the region 65 in which the transistors Tr2 to Tr4 and the wiring 74 to 76 are arranged, the sealing material undergoes provisional hardening in step S16, and undergoes main hardening in step S17.

[0102] In this way, in the present embodiment, the sealing material portion (portion corresponding to the above-described first portion) that undergoes provisional hardening and main hardening is arranged closer to the display region 7, while the sealing material portion (portion corresponding to the above-described second portion) that does not undergo provisional hardening and undergoes main hardening is arranged closer to the end 10a of the array substrate 10.

[0103] While the technique described in Patent Literature 11 needs to perform provisional hardening of the sealing material before bonding substrates together, the present embodiment performs provisional hardening of the sealing

material after bonding mother glasses together. This can prevent foreign substances, such as dust, from mixing in the liquid crystal layer. Furthermore, the present embodiment does not need a mask for provisional hardening. This can reduce manufacturing costs.

[0104] While conditions for light irradiation and heat treatment in steps S16 and S17 can be suitably set in accordance with characteristics of the sealing material, when the Photolec S series is used, for example, ultraviolet irradiation of around 10J is performed, and heat treatment at 120°C is performed for 60 minutes.

[0105] Next, in step S18 (breaking process), the bonded mother glasses are broken along panel breaking lines into a plurality of liquid crystal cells.

[0106] Next, in step S19 (inspection process), inspections such as a lighting inspection of the liquid crystal cell are performed to check quality conditions of the liquid crystal cell.

[0107] Subsequently, after the polarizing plate and phase plate (optional) are affixed on each of both surfaces of the liquid crystal cell, the source driver 5 is mounted and the liquid crystal panel 1 is completed. Then, the flexible substrate is connected to the liquid crystal panel 1, the control section and the backlight unit are attached, and these components are accommodated in an enclosure, thereby completing the liquid crystal display of Embodiment 1.

[0108] In the present embodiment, the output transistor Tr1 and the bootstrap capacitor CB1 are arranged in a region between the end 10a of the array substrate 10 and the control element region 77. Accordingly, each of the transistors in the control element region 77 and the wiring group 78 can be arranged on a display region 7 side of the output transistor Tr1 and the bootstrap capacitor CB1. In addition, it is possible to perform provisional hardening and main hardening of the sealing material on the region 65 in which the transistors Tr2 to Tr4 and the wiring 74 to 76 are arranged. On the other hand, it is possible to perform main hardening of the sealing material on the region 64 in which the output transistor Tr1 and the bootstrap capacitor CB1 are arranged. Consequently, it is possible to control the sealing material component from dissolving in the liquid crystal layer by the time of completion of the main seal hardening process. In addition, it is possible to define the seal-coating region 63 to be wider. Furthermore, it is possible to control occurrence of liquid crystal leakage. Therefore, it is possible to reduce occurrence of quality problems and to improve adhesive strength between substrates.

[0109] Although a size of each element and a thickness of each piece of wiring are not particularly limited and can be suitably configured, for example, values illustrated in Fig. 14 can be applied. A thickness of the wiring 74 and a thickness of the wiring 75 are substantially identical to a thickness of the wiring 76. Spacing of the wiring 74 and the wiring 75 can be set to 30 μm. A pitch of the output transistor is substantially equal to a pitch of the unit circuit or the gate bus line. Furthermore, a width of wiring that connects between elements or between an element and wiring can be set to, for example, 10 μm.

[0110] In the case illustrated in Fig. 14, a proportion of an area in which light is shielded in a region A including the transistors Tr2 to Tr4, the wiring 76, and the wiring 75 is roughly estimated to be about 25% ($= (105 \times 70 + 50 \times 70 + 30 \times 60 + 20 \times 20 \times 6 \times \text{six contacts} + 30 \times 200 \times \text{four linear parts of wiring}) / (800 \times 200) = 39050 / 160000$). On the other hand, a proportion of an area in which light is shielded in a region B including the output transistor Tr1 and the bootstrap capacitor CB1 is roughly estimated to be about 80% ($= (80 \times 190 + 200 \times 160) / (300 \times 200) = 47200 / 600$). In this way, the proportion of the area in which light is shielded in the region A is preferably 50% or smaller, and the proportion of the area in which light is shielded in the region B is preferably larger than 50%.

Embodiment 2

[0111] Although a liquid crystal display according to Embodiment 2 has different layout of an element and wiring in a shift register, the liquid crystal display according to Embodiment 2 is substantially identical to a liquid crystal display of Embodiment 1 except for a difference.

[0112] In Embodiment 1, a wiring group 78 is arranged in a region between transistors Tr2 to Tr4 (control element region 77) and a display region 7. On the other hand, in the present embodiment, as illustrated in Fig. 15, the transistors Tr2 to Tr4 (control element region 77) are arranged in a region between the wiring group 78 and the display region 7. Embodiments 1 and 2 have a common feature in that the wiring group 78 and the transistors Tr2 to Tr4 (control element region 77) are arranged in a region between the display region 7 and an output transistor Tr1.

[0113] An array substrate 10 includes a strip region (hereinafter referred to as a seal-coating region) 63 sandwiched between thick dashed lines, and a seal 62 is formed in a strip on the seal-coating region 63 not to protrude from the seal-coating region 63. One end of the seal-coating region 63 is set in a region between a bootstrap capacitor CB1 and an end 10a of the array substrate 10, whereas the other end is set in a region between the transistors Tr2 to Tr4 (control element region 77) and the display region 7. The seal-coating region 63 includes a region 64 in which the output transistor Tr1 and the bootstrap capacitor CB1 are arranged, and a region 66 in which the transistors Tr2 to Tr4 (control element region 77) and wiring 74 to 76 (wiring group 78) are arranged. The region 66 corresponds to the above-described first region, and the region 64 corresponds to the above-described second region. In this way, in the present embodiment, different from Comparative Embodiment 1, the output transistor Tr1 and the bootstrap capacitor CB1 are arranged in

the seal-coating region 63.

[0114] The seal 62 is arranged to cover at least part or all of the output transistor Tr1 and part or all of the wiring group 78. As long as the seal 62 does not protrude from the seal-coating region 63, it is not particularly limited whether the seal 62 covers regions other than these regions. For example, the seal 62 may be arranged to cover all of the output transistor Tr1, all of the wiring group 78, and a partial region or entire region of the control element region 77. The seal 62 may be arranged to cover part or all of the bootstrap capacitor CB1, all of the output transistor Tr1, all of the wiring group 78, and a partial region or entire region of the control element region 77. In this way, the seal 62 includes a first portion that is adjacent to a liquid crystal layer 61 and a second portion that is adjacent to the first portion. The first portion is arranged on the region 66, and the second portion is arranged on the region 64.

[0115] In the present embodiment, in the same manner as in Embodiment 1, the output transistor Tr1 and the bootstrap capacitor CB1 are arranged in a region between the end 10a of the array substrate 10 and the control element region 77. Therefore, also in the present embodiment, it is possible to reduce occurrence of quality problems and to improve adhesive strength between substrates.

[0116] In each of Embodiments 1 and 2, arrangement places of the output transistor Tr1 and the bootstrap capacitor CB1 may be transposed.

Embodiment 3

[0117] A liquid crystal display according to Embodiment 3 is substantially identical to a liquid crystal display of Embodiment 1 except for a layout of an element and wiring in a shift register being different.

[0118] In the present embodiment, as illustrated in Fig. 16, transistors Tr2 to Tr4 (control element region 77) are arranged in a region between an end 10a of an array substrate 10 and a bootstrap capacitor CB1.

[0119] The array substrate 10 includes a strip region (hereinafter referred to as a seal-coating region) 63 sandwiched between thick dashed lines, and a seal 62 is formed in a strip on the seal-coating region 63 not to protrude from the seal-coating region 63. One end of the seal-coating region 63 is set in a region between the control element region 77 and the end 10a of the array substrate 10, whereas the other end is set in a region between wiring 74 and a display region 7. The seal-coating region 63 includes a region 64 in which an output transistor Tr1 and the bootstrap capacitor CB1 are arranged, a region 67 in which the transistors Tr2 to Tr4 are arranged, and a region 68 in which wiring 74 to 76 (wiring group 78) are arranged. The region 68 corresponds to the above-described first region, and the region 64 corresponds to the above-described second region. In this way, in the present embodiment, different from Comparative Embodiment 1, the output transistor Tr1 and the bootstrap capacitor CB1 are arranged in the seal-coating region 63.

[0120] The seal 62 is arranged to cover at least part or all of the output transistor Tr1 and part or all of the wiring 76. As long as the seal 62 does not protrude from the seal-coating region 63, it is not particularly limited whether the seal 62 covers regions other than these regions. For example, the seal 62 may be arranged to cover part or all of the bootstrap capacitor CB1, all of the output transistor Tr1, and all of the wiring 76. The seal 62 may be arranged to cover a partial region or entire region of the control element region 77, all of the bootstrap capacitor CB1, all of the output transistor Tr1, all of the wiring 76, and part or all of wiring 75. The seal 62 may be arranged to cover a partial region or entire region of the control element region 77, all of the bootstrap capacitor CB1, all of the output transistor Tr1, all of the wiring 76, all of the wiring 75, and part or all of the wiring 74. In this way, the seal 62 includes a first portion that is adjacent to a liquid crystal layer 61 and a second portion that is adjacent to the first portion. The first portion is arranged on the region 68, and the second portion is arranged on the region 64.

[0121] In the present embodiment, the output transistor Tr1 and the bootstrap capacitor CB1 are arranged in a region between the end 10a of the array substrate 10 and the wiring 76. Accordingly, the wiring group 78 can be arranged on a display region 7 side of the output transistor Tr1 and the bootstrap capacitor CB1. In addition, it is possible to perform provisional hardening and main hardening of a sealing material on the region 68 in which the wiring 74 to 76 are arranged. On the other hand, it is possible to perform main hardening of the sealing material on the region 64 in which the output transistor Tr1 and the bootstrap capacitor CB1 are arranged. Consequently, it is possible to control the sealing material component from dissolving in the liquid crystal layer by the time of completion of the main seal hardening process. In addition, it is possible to define the seal-coating region 63 to be wider. Furthermore, it is possible to control occurrence of liquid crystal leakage. Therefore, in the same manner as in Embodiment 1, it is possible to reduce occurrence of quality problems and to improve adhesive strength between substrates.

[0122] However, the present embodiment differs from Embodiment 1 in that the sealing material portion that undergoes provisional hardening and main hardening is separately arranged.

Embodiment 4

[0123] A liquid crystal display according to Embodiment 4 is substantially identical to a liquid crystal display of Embodiment 3 except for a layout of an element and wiring in a shift register being different.

[0124] In Embodiment 3, transistors Tr2 to Tr4 (control element region 77) are arranged in a region between an end 10a of an array substrate 10 and a bootstrap capacitor CB1. On the other hand, in the present embodiment, as illustrated in Fig. 17, a wiring group 78 is arranged in a region between the end 10a of the array substrate 10 and an output transistor Tr1. Embodiments 3 and 4 have a common feature in that the output transistor Tr1 and the bootstrap capacitor CB1 are

arranged in a region between the wiring group 78 and the transistors Tr2 to Tr4 (control element region 77).
[0125] The array substrate 10 includes a strip region (hereinafter referred to as a seal-coating region) 63 sandwiched between thick dashed lines, and a seal 62 is formed in a strip on the seal-coating region 63 not to protrude from the seal-coating region 63. One end of the seal-coating region 63 is set between wiring 74 and the end 10a, whereas the other end is set in a region between the transistors Tr2 to Tr4 (control element region 77) and a display region 7. The seal-coating region 63 includes a region 64 in which the output transistor Tr1 and the bootstrap capacitor CB1 are arranged, a region 67 in which the transistors Tr2 to Tr4 are arranged, and a region 68 in which wiring 74 to 76 (wiring group 78) are arranged. The region 67 corresponds to the above-described first region, and the region 64 corresponds to the above-described second region. In this way, in the present embodiment, different from Comparative Embodiment 1, the output transistor Tr1 and the bootstrap capacitor CB1 are arranged in the seal-coating region 63.

[0126] The seal 62 is arranged to cover at least part or all of the bootstrap capacitor CB1, and a partial region or entire region of the control element region 77. As long as the seal 62 does not protrude from the seal-coating region 63, it is not particularly limited whether the seal 62 covers regions other than these regions. For example, the seal 62 may be arranged to cover part or all of the output transistor Tr1, all of the bootstrap capacitor CB1, and a partial region or entire region of the control element region 77. The seal 62 may be arranged to cover part or all of the wiring 76, all of the output transistor Tr1, all of the bootstrap capacitor CB1, and a partial region or entire region of the control element region 77. The seal 62 may be arranged to cover part or all of the wiring 75, all of the wiring 76, all of the output transistor Tr1, all of the bootstrap capacitor CB1, and a partial region or entire region of the control element region 77. The seal 62 may be arranged to cover part or all of the wiring 74, all of the wiring 75, all of the wiring 76, all of the output transistor Tr1, all of the bootstrap capacitor CB1, and a partial region or entire region of the control element region 77. In this way, the seal 62 includes a first portion that is adjacent to a liquid crystal layer 61 and a second portion that is adjacent to the first portion. The first portion is arranged on the region 67, and the second portion is arranged on the region 64.

[0127] In the present embodiment, in the same manner as in Embodiment 1, the output transistor Tr1 and the bootstrap capacitor CB1 are arranged in a region between the end 10a of the array substrate 10 and the control element region 77. Therefore, also in the present embodiment, it is possible to reduce occurrence of quality problems and to improve adhesive strength between substrates.

[0128] The wiring group 78 is arranged in a region between the end 10a of the array substrate 10 and the output transistor Tr1. Accordingly, it is possible to protect the transistors Tr1 to Tr4 from static electricity that intrudes from outside by the wiring group 78.

[0129] In each of Embodiments 3 and 4, arrangement places of the output transistor Tr1 and the bootstrap capacitor CB1 may be transposed.

Embodiment 5

[0130] A liquid crystal display according to Embodiment 5 is substantially identical to a liquid crystal display of Embodiment 1 except for a layout of an element and wiring in a shift register being different.

[0131] In the present embodiment, as illustrated in Fig. 18, transistors Tr2 to Tr4 (control element region 77) are arranged in a region between a display region 7 and a bootstrap capacitor CB1, and a wiring group 78 is arranged in a region between an output transistor Tr1 and the bootstrap capacitor CB1.

[0132] An array substrate 10 includes a strip region (hereinafter referred to as a seal-coating region) 63 sandwiched between thick dashed lines, and a seal 62 is formed in a strip on the seal-coating region 63 not to protrude from the seal-coating region 63. One end of the seal-coating region 63 is set in a region between the output transistor Tr1 and an end 10a of the array substrate 10, whereas the other end is set in a region between the transistors Tr2 to Tr4 (control element region 77) and the display region 7. The seal-coating region 63 includes a region 69 in which the output transistor Tr1 is arranged, a region 70 in which the bootstrap capacitor CB1 is arranged, a region 67 in which the transistors Tr2 to Tr4 are arranged, and a region 79 in which wiring 74 to 76 (wiring group 78) are arranged. The regions 67 and 79 correspond to the above-described first region, and the regions 69 and 70 correspond to the above-described second region. In this way, in the present embodiment, different from Comparative Embodiment 1, the output transistor Tr1 and the bootstrap capacitor CB1 are arranged in the seal-coating region 63.

[0133] The seal 62 is (1) arranged to cover at least part or all of the output transistor Tr1 and part or all of the wiring 74, or (2) arranged to cover at least part or all of the bootstrap capacitor CB1 and a partial region or entire region of the control element region 77. In addition, the seal 62 includes a first portion that is adjacent to a liquid crystal layer 61 and a second portion that is adjacent to the first portion. In each of the cases (1) and (2), as long as the seal 62 does not protrude from the seal-coating region 63 and the first portion is not arranged on the bootstrap capacitor CB1, it is not

particularly limited whether the seal 62 covers regions other than these regions.

[0134] In the case of (1), for example, the seal 62 may be arranged to cover all of the output transistor Tr1 and all of the wiring group 78. The seal 62 may be arranged to cover part or all of the output transistor Tr1, all of the wiring group 78, all of the bootstrap capacitor CB1, and a partial region or entire region of the control element region 77.

[0135] In the case of (2), for example, the seal 62 may be arranged to cover all of the bootstrap capacitor CB1 and the entire region of the control element region 77. The seal 62 may be arranged to cover part or all of the wiring group 78, all of the bootstrap capacitor CB1, and a partial region or entire region of the control element region 77. The seal 62 may be arranged to cover part or all of the output transistor Tr1, all of the wiring group 78, all of the bootstrap capacitor CB1, and a partial region or entire region of the control element region 77.

[0136] In the present embodiment, the output transistor Tr1 is arranged in a region between the end 10a of the array substrate 10 and the wiring group 78, and the bootstrap capacitor CB1 is arranged in a region between the end 10a of the array substrate 10 and the control element region 77. Accordingly, the wiring group 78 can be arranged on a display region 7 side of the output transistor Tr1, and the control element region 77 can be arranged on a display region 7 side of the bootstrap capacitor CB1. In addition, it is possible to perform provisional hardening and main hardening of a sealing material on the region 67 in which the transistors Tr2 to Tr4 are arranged, and on the region 79 in which the wiring group 78 is arranged. On the other hand, it is possible to perform main hardening of the sealing material on the region 69 in which the output transistor Tr1 is arranged, and on the region 70 in which the bootstrap capacitor CB1 is arranged. Consequently, it is possible to control the sealing material component from dissolving in the liquid crystal layer by the time of completion of the main seal hardening process. In addition, it is possible to define the seal-coating region 63 to be wider. Furthermore, it is possible to control occurrence of liquid crystal leakage. Therefore, in the same manner as in Embodiment 1, it is possible to reduce occurrence of quality problems and to improve adhesive strength between substrates.

[0137] However, the present embodiment differs from Embodiment 1 in that the sealing material portion that undergoes provisional hardening and main hardening is separately arranged.

[0138] In Embodiment 5, arrangement places of the output transistor Tr1 and the bootstrap capacitor CB1 may be transposed, and arrangement places of the control element region 77 and the wiring group 78 may be transposed.

[0139] Various variations of Embodiments 1 to 5 will be described below. A semiconductor material of each TFT is not particularly limited, but can be suitably selected. Examples of semiconductor materials include a group 14 element semiconductor, such as silicon, and an oxide semiconductor. Furthermore, crystallinity of a semiconductor material of each TFT is not particularly limited, but may be a single crystal, a polycrystal, an amorphous, or a microcrystal, and may include two or more types of these crystal structures. However, when an output transistor contains amorphous silicon, from a viewpoint of enlarging its driving capability, a channel width of the output transistor and a size of a bootstrap capacitor become particularly large. Therefore, the output transistor containing amorphous silicon can remarkably perform an effect of reducing occurrence of quality problems and an effect of improving adhesive strength of the seal. The oxide semiconductor preferably contains oxygen (O), and at least one element selected from the group consisting of indium (In), gallium (Ga), zinc (Zn), aluminum (Al), and silicon (Si). More preferably, the oxide semiconductor contains In, Ga, Zn, and O.

[0140] A type of each TFT is not particularly limited to a bottom gate type, but can be suitably selected.

[0141] Furthermore, a TFT other than a gate driver TFT may further be arranged in the picture-frame region.

[0142] In addition, the number and arrangement place of the unit circuit that satisfies the above-described layout are not particularly limited, but can be suitably configured. That is, at least one unit circuit may include either one of the above-described layouts, and part or all of the unit circuits may include either one of the above-described layouts. However, from a viewpoint of performing the above-described effect particularly effectively, all the unit circuits preferably include either one of the above-described layouts.

[0143] Furthermore, a type of an element and wiring of each gate driver is not particularly limited, but can be suitably determined, except for an output transistor and a bootstrap capacitor.

[0144] Embodiments 1 to 5 may be combined with each other. For example, unit circuits of different layouts may be formed in a common shift register, and a plurality of shift registers may include unit circuits of layouts different from each other.

REFERENCE SIGNS LIST

[0145]

1	liquid crystal panel
2	display section
3	pixel
4	pixel TFT

5	drive circuit for source bus lines (source driver)
6a, 6b	circuit for gate bus lines (gate driver)
7	display region
8	picture-frame region
5 9	pixel electrode
10	array substrate
10a	end
11	insulating substrate
12, S1 to Sm	source bus lines
10 13, G1 to Gn	gate bus lines
14	common transfer electrode
16	common trunk wiring
17	common bus line
18, 19	lead-out wiring
15 25	input wiring
26, 27, 28, 29, 30	terminal
31	first electrode
32	second electrode
41	gate electrode
20 42	gate insulator
43	i layer (semiconductor active layer)
44	n+ layer
45	source electrode
46	drain electrode
25 47, 48	insulating layer
50	opposed substrate
51	insulating substrate
52	black matrix (BM)
61	liquid crystal layer
30 62	seal
63	seal-coating region
64 to 69, 70, 79	region
71	pixel array
72	display control circuit
35 73a, 73b	shift register
74 to 76	wiring
77	control element region
78	wiring group
Pij	pixel circuit
40 SR1 to SRn	unit circuit
INa, INb	input terminal
CKA, CKB	clock terminal
VSS	power terminal
OUT	output terminal
45 Tr1 to Tr4	transistor
CB1	bootstrap capacitor

Claims

- 50 1. A liquid crystal display comprising:
- 55 a first substrate (10),
a second substrate (50) facing said first substrate (10), and
a seal (62) provided between said first substrate (10) and said second substrate (50),
wherein said first substrate (10) includes an insulating substrate (51), a shift register (73a, 73b) monolithically
formed on said insulating substrate (51), a plurality of bus lines (12, 13), a first end side (10a) of said first
substrate (10),

and a display region (7),

said shift register (73a, 73b) includes a plurality of multistage-connected unit circuits (SR1, ..., SRn) and wiring (74 to 76) connected to said plurality of unit circuits (SR1, ..., SRn), the shift register (73a, 73b) being arranged in a region between said first end side (10a) and said display region (7),

at least one of said plurality of unit circuits (SR1, ..., SRn) includes:

a clock terminal (CKA, CKB) into which a clock signal is input,

an output terminal (OUT) connected to a corresponding bus line (13),

the output terminal (OUT) outputting an output signal (SROUT),

a first transistor (Tr1) with one of a source and a drain being connected to said clock terminal (CKA, CKB) and the other of said source and said drain being connected to said output terminal (OUT),

a second transistor (Tr2, Tr3, Tr4), and

a capacitor (CB1) with a first terminal being connected to a gate of said first transistor (Tr1) and a second terminal being connected to said output terminal (OUT), and

said first transistor (Tr1) and said capacitor (CB1) are arranged in a region between said first end side (10a) and one of said wiring (74 to 76) and said second transistor (Tr2, Tr3, Tr4),

characterized in that

said wiring (74 to 76) and said second transistor (Tr2, Tr3, Tr4) are arranged in a region (65) between said display region (7) and one of said first transistor (Tr1) and said capacitor (CB1).

2. The liquid crystal display according to claim 1, wherein said first substrate (10) includes a first region (65) in which said wiring (74 to 76) and/or said second transistor (Tr2, Tr3, Tr4) are arranged, and a second region (64) in which said first transistor (Tr1) and/or said capacitor (CB1) are arranged,
- said seal (62) includes a first portion adjacent to said liquid crystal layer and a second portion adjacent to said first portion,
- said first portion is arranged on said first region (65), and
- said second portion is arranged on said second region (64).
3. The liquid crystal display according to claim 1, wherein said wiring (74 to 76) is arranged in a region between said second transistor (Tr2, Tr3, Tr4) and said display region (7).
4. The liquid crystal display according to claim 1, wherein said second transistor (Tr2, Tr3, Tr4) is arranged in a region between said wiring (74 to 76) and said display region (7).
5. The liquid crystal display according to claim 1 or 2, wherein said wiring (74 to 76) is arranged in a region between said first transistor (Tr1) and said capacitor (CB1).
6. The liquid crystal display according to any one of claims 1 to 5, wherein said seal (62) includes a hardened article of a light-hardening and thermo-hardening material.
7. The liquid crystal display according to any one of claims 1 to 6, wherein said second substrate (50) includes a light shielding member that faces said shift register (73a, 73b).
8. The liquid crystal display according to any one of claims 1 to 7, wherein a pulse signal is transmitted through said wiring (74 to 76).
9. The liquid crystal display according to any one of claims 1 to 8, wherein said first substrate (10) includes a plurality of pixel circuits provided in said display region (7), each of said plurality of pixel circuits includes a pixel transistor and a pixel electrode connected to said pixel transistor, and each of said plurality of bus lines (13) is connected to a plurality of corresponding pixel transistor gates.

Patentansprüche

1. Flüssigkristallanzeige, umfassend:

5 ein erstes Substrat (10),
 ein zweites Substrat (50), das dem ersten Substrat (10) zugewandt ist, und
 eine Dichtung (62), die zwischen dem ersten Substrat (10) und dem zweiten Substrat (50) bereitgestellt ist,
 wobei das erste Substrat (10) ein isolierendes Substrat (51), ein Schieberegister (73a, 73b), das monolithisch
 10 auf dem isolierenden Substrat (51) gebildet ist, eine Mehrzahl von Busleitungen (12, 13), eine erste Endseite
 (10a) des ersten Substrats (10) und einen Anzeigebereich (7) enthält,
 wobei das Schieberegister (73a, 73b) eine Mehrzahl von mehrstufig verbundenen Einheit-Schaltungen (SR1, ..., SRn) und Verdrahtung (74 bis 76) enthält, die mit der Mehrzahl von Einheit-Schaltungen (SR1, ..., SRn) verbunden ist, wobei das Schieberegister (73a, 73b) in einem Bereich zwischen der ersten Endseite (10a) und dem Anzeigebereich (7) angeordnet ist,
 15 wobei zumindest eine der Mehrzahl von Einheit-Schaltungen (SR1, ..., SRn) enthält:

einen Taktanschluss (CKA, CKB), in den ein Taktsignal eingegeben wird,
 einen Ausgangsanschluss (OUT), der mit einer entsprechenden Busleitung (13) verbunden ist,
 wobei der Ausgangsanschluss (OUT) ein Ausgangssignal (SROUT) ausgibt,
 20 einen ersten Transistor (Tr1), wobei einer von Source und Drain mit dem Taktanschluss (CKA, CKB) verbunden ist und der andere von Source und Drain mit dem Ausgangsanschluss (OUT) verbunden ist,
 einen zweiten Transistor (Tr2, Tr3, Tr4), und
 einen Kondensator (CB1), von dem ein erster Anschluss mit einem Gate des ersten Transistors (Tr1) verbunden ist und ein zweiter Anschluss mit dem Ausgangsanschluss (OUT) verbunden ist, und
 25 wobei der erste Transistor (Tr1) und der Kondensator (CB1) in einem Bereich zwischen der ersten Endseite (10a) und einem der Verdrahtung (74 bis 76) und dem zweiten Transistor (Tr2, Tr3, Tr4) angeordnet ist,
dadurch gekennzeichnet, dass
 die Verdrahtung (74 bis 76) und der zweite Transistor (Tr2, Tr3, Tr4) in einem Bereich (65) zwischen dem Anzeigebereich (7) und einem des ersten Transistors (Tr1) und des Kondensators (CB1) angeordnet sind.

- 30 2. Flüssigkristallanzeige nach Anspruch 1,
 wobei das erste Substrat (10) einen ersten Bereich (65), in dem die Verdrahtung (74 bis 76) und/oder der zweite Transistor (Tr2, Tr3, Tr4) angeordnet sind, und einen zweiten Bereich (64) enthält, in dem der erste Transistor (Tr1) und/oder der Kondensator (CB1) angeordnet sind,
 35 die Dichtung (62) einen ersten Abschnitt angrenzend an bzw. benachbart zu der Flüssigkristallschicht und einen zweiten Abschnitt angrenzend an bzw. benachbart zu dem ersten Abschnitt enthält,
 der erste Abschnitt auf dem ersten Bereich (65) angeordnet ist, und
 der zweite Abschnitt auf dem zweiten Bereich (64) angeordnet ist.
- 40 3. Flüssigkristallanzeige nach Anspruch 1, wobei die Verdrahtung (74 bis 76) in einem Bereich zwischen dem zweiten Transistor (Tr2, Tr3, Tr4) und dem Anzeigebereich (7) angeordnet ist.
4. Flüssigkristallanzeige nach Anspruch 1, wobei der zweite Transistor (Tr2, Tr3, Tr4) in einem Bereich zwischen der Verdrahtung (74 bis 76) und dem Anzeigebereich (7) angeordnet ist.
- 45 5. Flüssigkristallanzeige nach Anspruch 1 oder 2, wobei die Verdrahtung (74 bis 76) in einem Bereich zwischen dem ersten Transistor (Tr1) und dem Kondensator (CB1) angeordnet ist.
- 50 6. Flüssigkristallanzeige nach einem der Ansprüche 1 bis 5, wobei die Dichtung (62) einen gehärteten Artikel aus einem lichthärtenden und thermohärtenden Material enthält.
7. Flüssigkristallanzeige nach einem der Ansprüche 1 bis 6, wobei das zweite Substrat (50) ein Licht abschirmendes Glied enthält, das dem Schieberegister (73a, 73b) zugewandt ist.
- 55 8. Flüssigkristallanzeige nach einem der Ansprüche 1 bis 7, wobei ein Pulssignal durch die Verdrahtung (74 bis 76) übertragen wird.
9. Flüssigkristallanzeige nach einem der Ansprüche 1 bis 8,

wobei das erste Substrat (10) eine Mehrzahl von Pixelschaltungen enthält, die in dem Anzeigebereich (7) bereitgestellt sind,
 jede der Mehrzahl von Pixelschaltungen einen Pixeltransistor und eine Pixelelektrode enthält, die mit dem Pixel-Transistor verbunden ist, und
 jede der Mehrzahl von Busleitungen (13) mit einer Mehrzahl entsprechender Pixeltransistor-Gates verbunden ist.

Revendications

1. Affichage à cristaux liquides comprenant :

un premier substrat (10),
 un second substrat (50) tourné vers ledit premier substrat (10), et
 un joint (62) prévu entre ledit premier substrat (10) et ledit second substrat (10),
 dans lequel ledit premier substrat (10) inclut un substrat isolant (51), un registre à décalage (73a, 73b) formé de manière monolithique sur ledit substrat isolant (51), une pluralité de lignes de bus (12, 13), un premier côté d'extrémité (10a) dudit premier substrat (10) et une région d'affichage (7),
 ledit registre à décalage (73a, 73b) inclut une pluralité de circuits unitaires connectés à étage multiple (SR1, ..., SRn) et du câblage (74 à 76) connecté à ladite pluralité de circuits unitaires (SR1, ..., SRn), le registre à décalage (73a, 73b) étant agencé dans une région entre ledit premier côté d'extrémité (10a) et ladite région d'affichage (7), au moins un de ladite pluralité de circuits unitaires (SR1, ..., SRn) inclut :

une borne d'horloge (CKA, CKB) dans laquelle un signal d'horloge est entré,
 une borne de sortie (OUT) connectée à une ligne de bus correspondante (13),
 la borne de sortie (OUT) émettant un signal de sortie (SROUT),
 un premier transistor (Tr1) avec un élément parmi une source et un drain qui est connecté à ladite borne d'horloge (CKA, CKB) et l'autre de ladite source et dudit drain qui est connecté à ladite borne de sortie (OUT),
 un second transistor (Tr2, Tr3, Tr4), et
 un condensateur (CB1) avec une première borne qui est connectée à une porte dudit premier transistor (Tr1) et une seconde borne qui est connectée à ladite borne de sortie (OUT), et
 ledit premier transistor (Tr1) et ledit condensateur (CB1) sont agencés dans une région entre ledit premier côté d'extrémité (10a) et un élément parmi ledit câblage (74 à 76) et ledit second transistor (Tr2, Tr3, Tr4),
caractérisé en ce que
 ledit câblage (74 à 76) et ledit second transistor (Tr2, Tr3, Tr4) sont agencés dans une région (65) entre ladite région d'affichage (7) et un dudit premier transistor (Tr1) et dudit condensateur (CB1).

2. Affichage à cristaux liquides selon la revendication 1,
 dans lequel ledit premier substrat (10) inclut une première région (65) dans laquelle ledit câblage (74 à 76) et/ou ledit second transistor (Tr2, Tr3, Tr4) sont agencés, et une seconde région (64) dans laquelle ledit premier transistor (Tr1) et/ou ledit condensateur (CB1) sont agencés,
 ledit joint (62) inclut une première portion adjacente à ladite couche de cristaux liquides et une seconde portion adjacente à ladite première portion, ladite première portion est agencée sur ladite première région (65), et ladite seconde portion est agencée sur ladite seconde région (64).

3. Affichage à cristaux liquides selon la revendication 1,
 dans lequel ledit câblage (74 à 76) est agencé dans une région entre ledit second transistor (Tr2, Tr3, Tr4) et ladite région d'affichage (7).

4. Affichage à cristaux liquides selon la revendication 1,
 dans lequel ledit second transistor (Tr2, Tr3, Tr4) est agencé dans une région entre ledit câblage (74 à 76) et ladite région d'affichage (7).

5. Affichage à cristaux liquides selon la revendication 1 ou 2,
 dans lequel ledit câblage (74 à 76) est agencé dans une région entre ledit premier transistor (Tr1) et ledit condensateur (CB1).

6. Affichage à cristaux liquides selon l'une quelconque des revendications 1 à 5,
 dans lequel ledit joint (62) inclut un article durci de matériau à durcissement à la lumière et thermodurcissement.

7. Affichage à cristaux liquides selon l'une quelconque des revendications 1 à 6, dans lequel ledit second substrat (50) inclut un élément de protection lumineuse qui est tourné vers ledit registre à décalage (73a, 73b).

5 8. Affichage à cristaux liquides selon l'une quelconque des revendications 1 à 7, dans lequel un signal d'impulsion est transmis à travers ledit câblage (74 à 76).

10 9. Affichage à cristaux liquides selon l'une quelconque des revendications 1 à 8, dans lequel ledit premier substrat (10) inclut une pluralité de circuits de pixel prévus dans ladite région d'affichage (7), chacun de ladite pluralité de circuits de pixel inclut un transistor de pixel et une électrode de pixel connectée audit transistor de pixel, et chacune de ladite pluralité de lignes de bus (13) est connectée à une pluralité de portes de transistor de pixel correspondantes.

15

20

25

30

35

40

45

50

55

Fig. 1

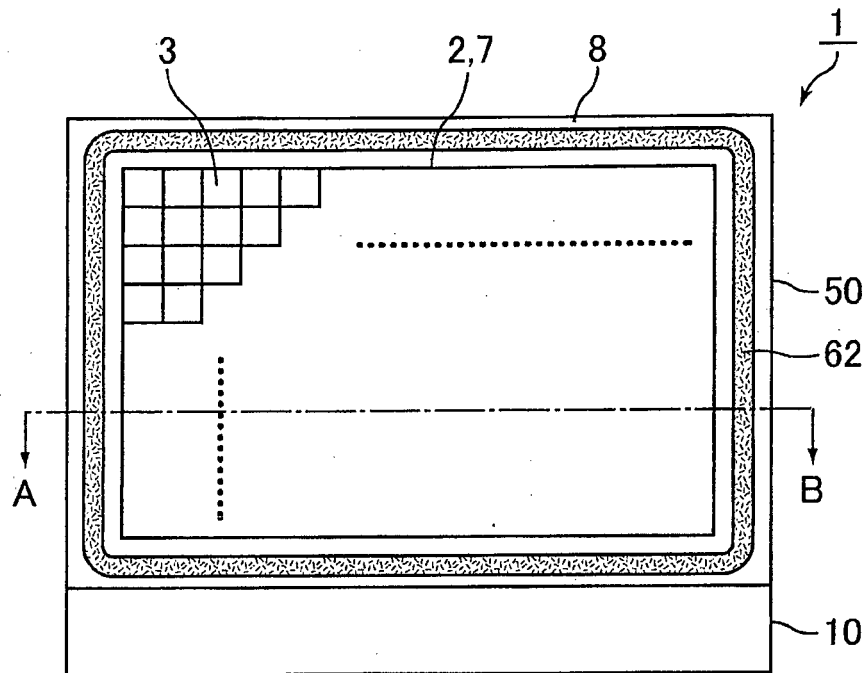


Fig. 2

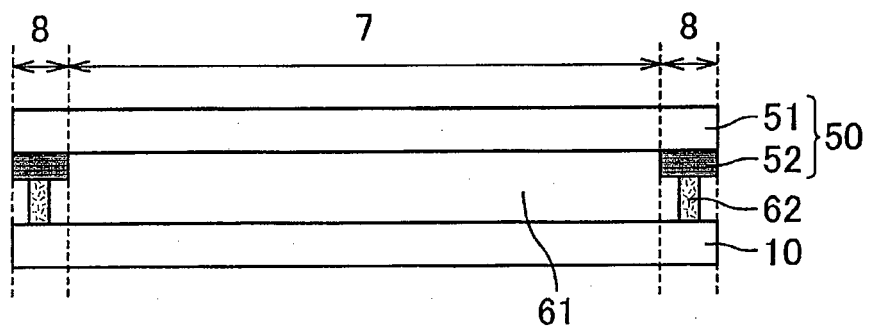


Fig. 3

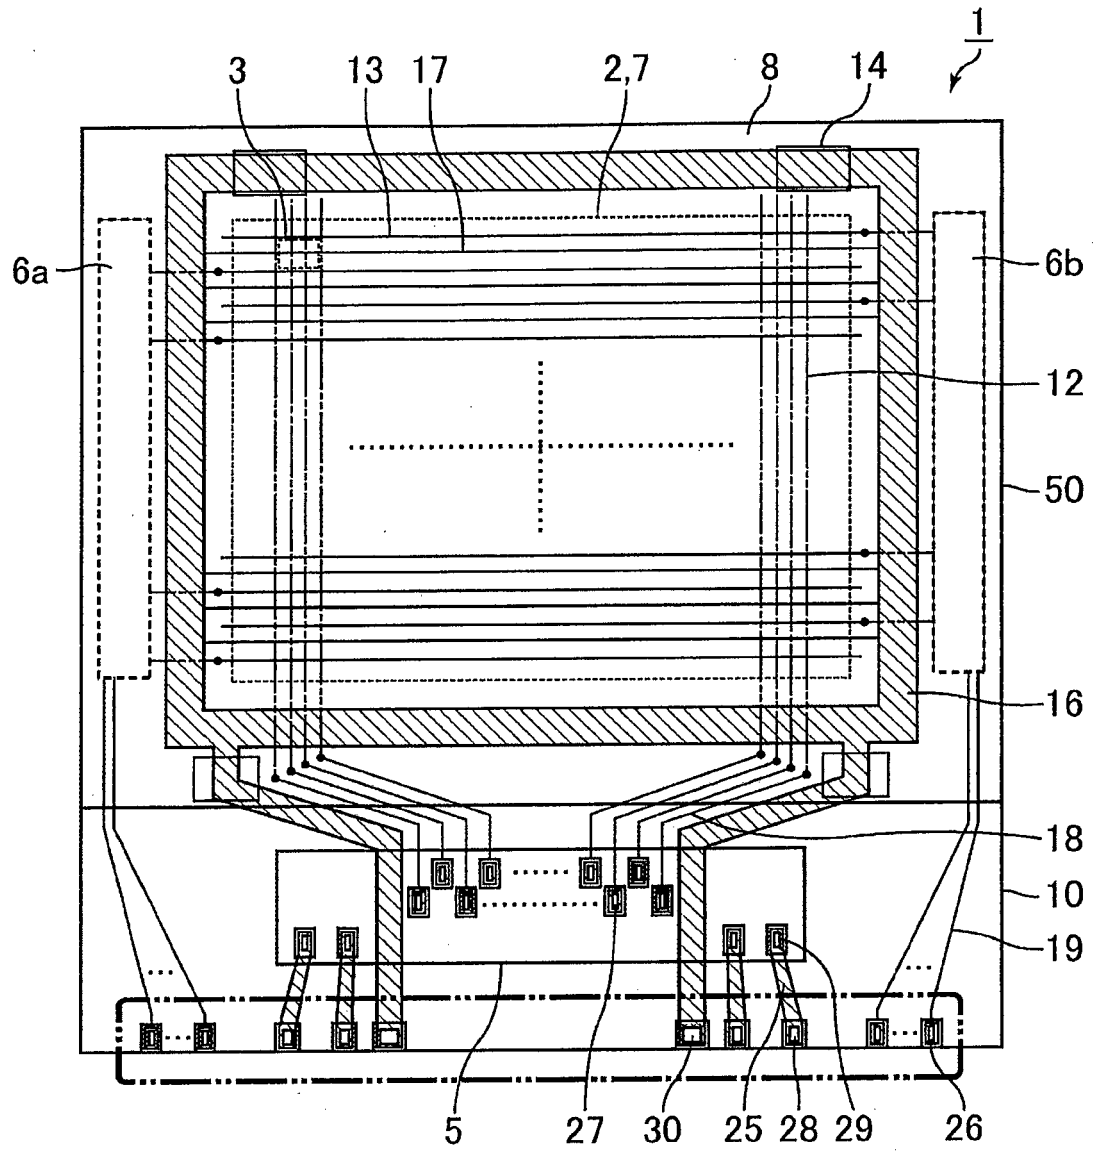


Fig. 4

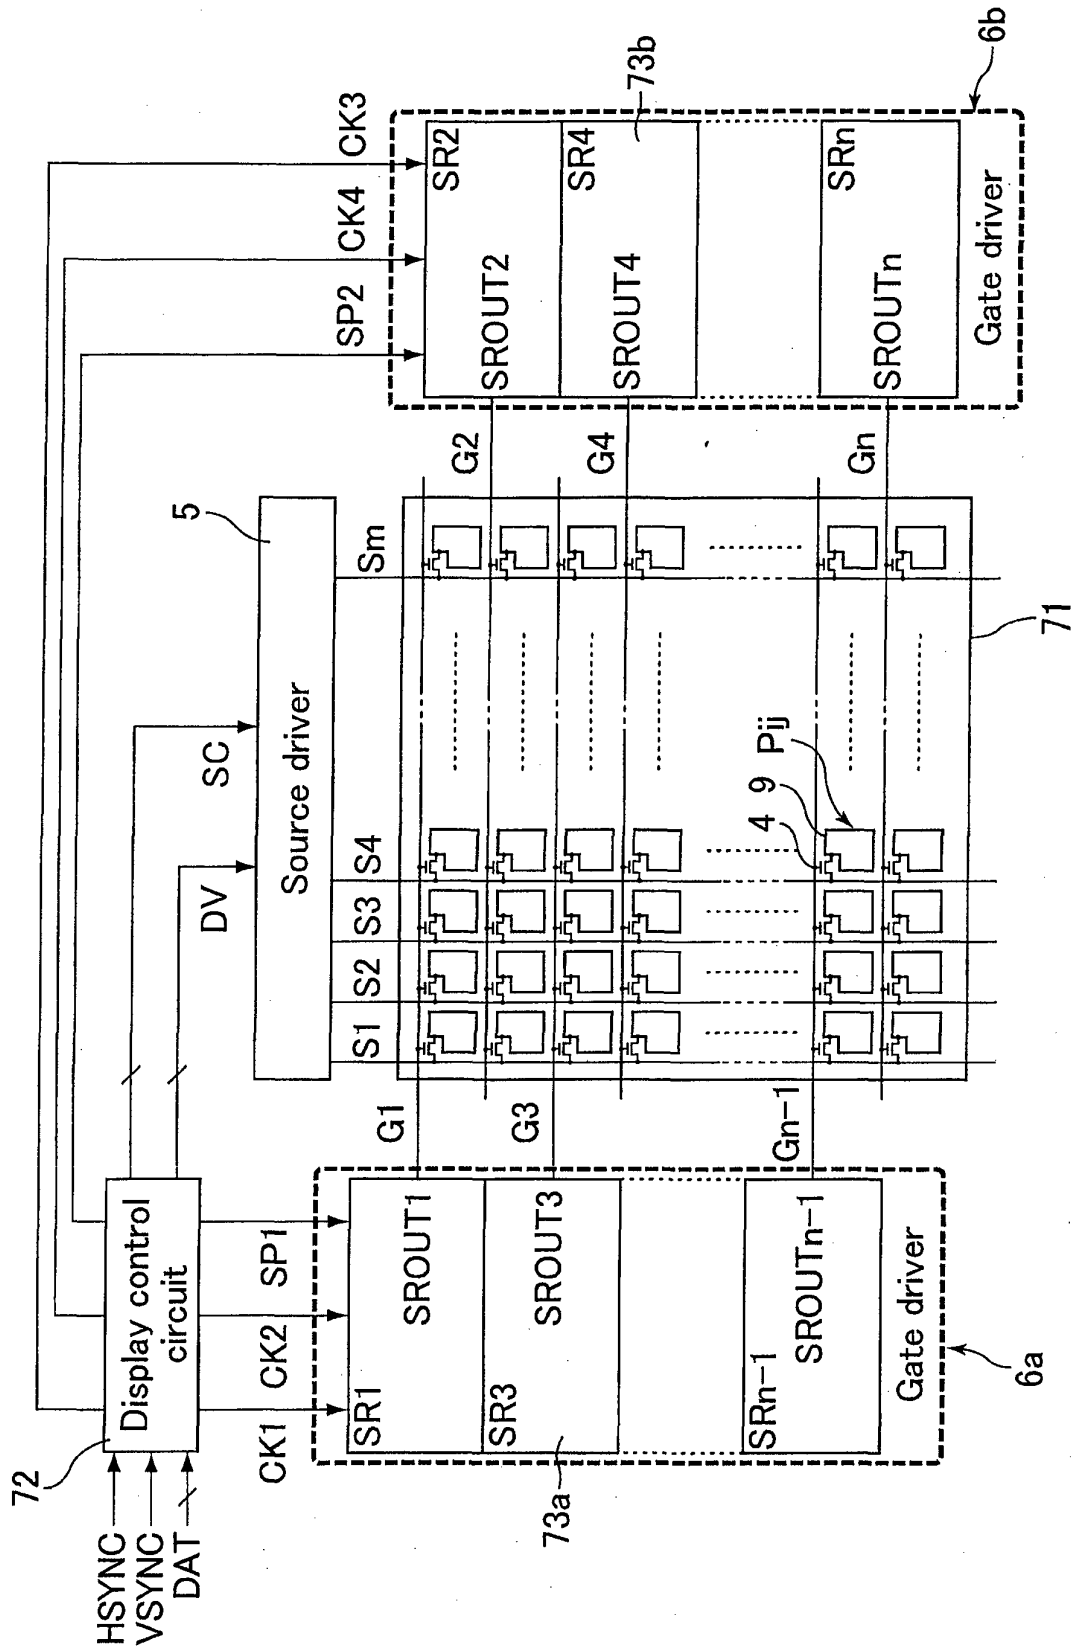


Fig. 5

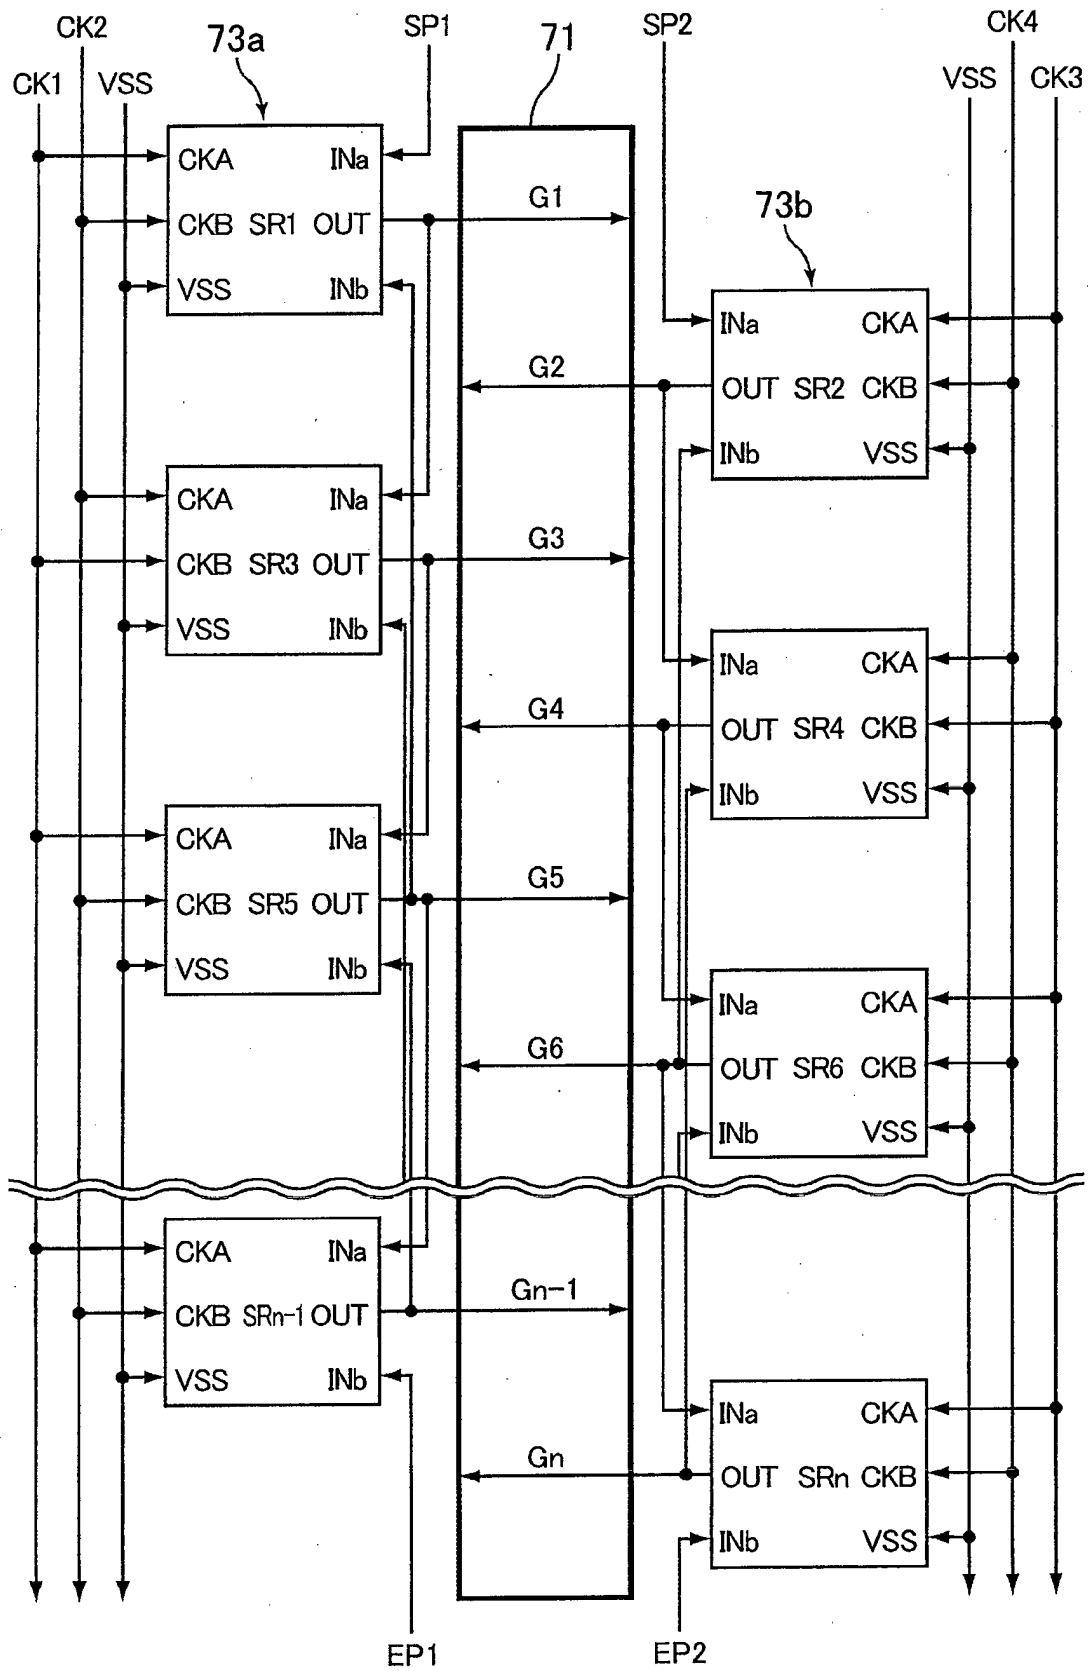


Fig. 6

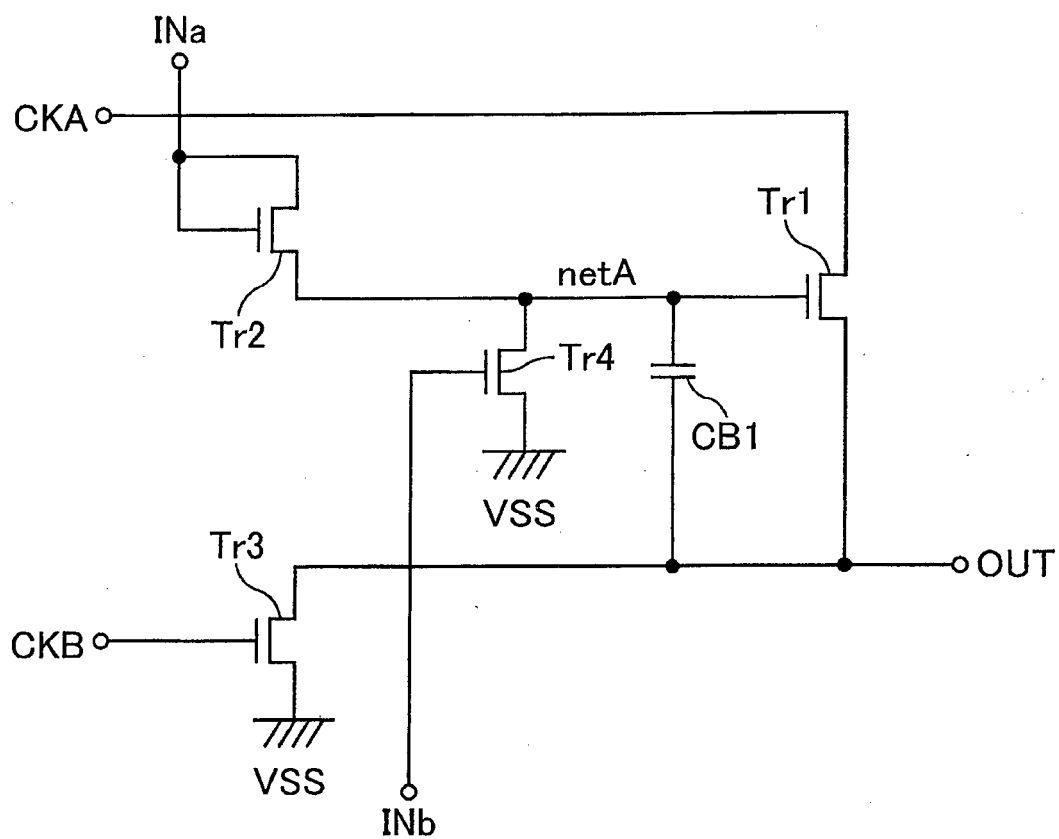


Fig. 7

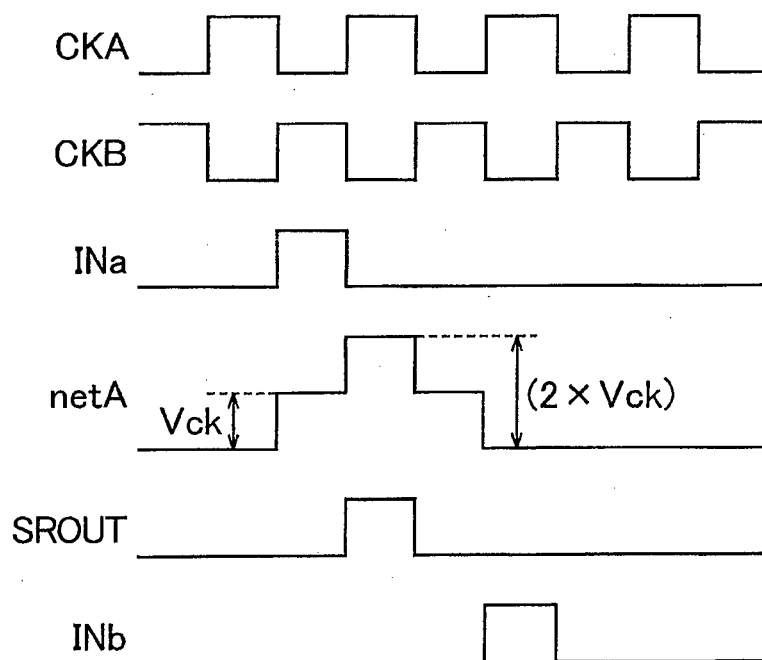


Fig. 8

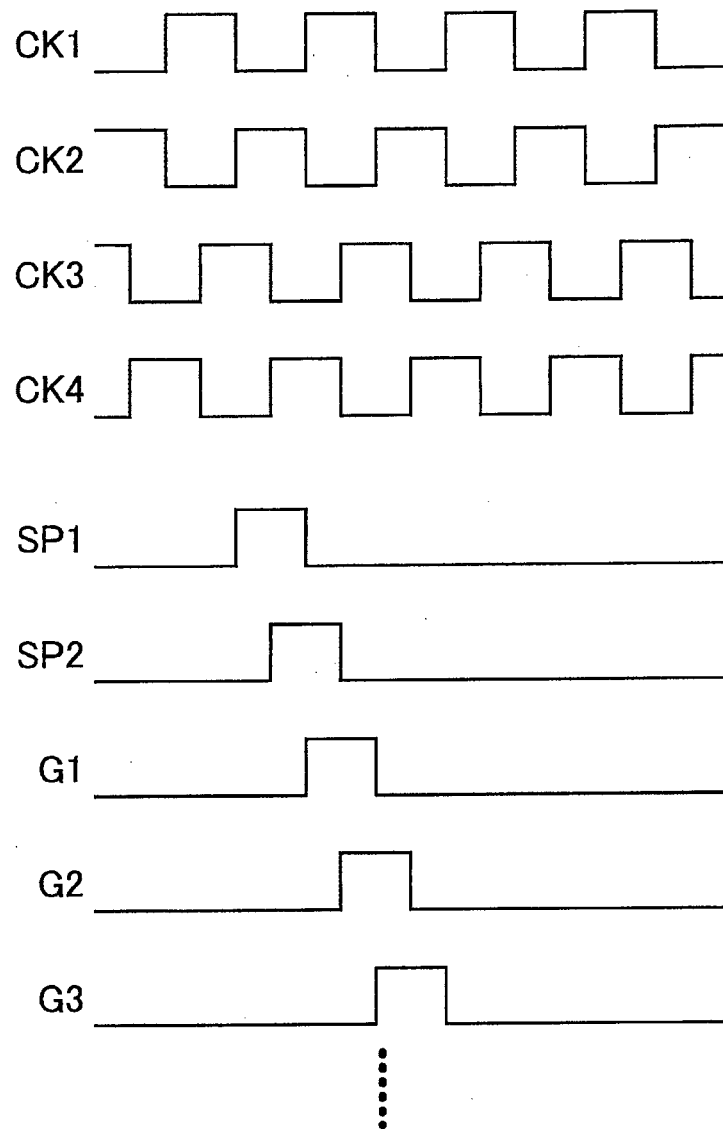


Fig. 9

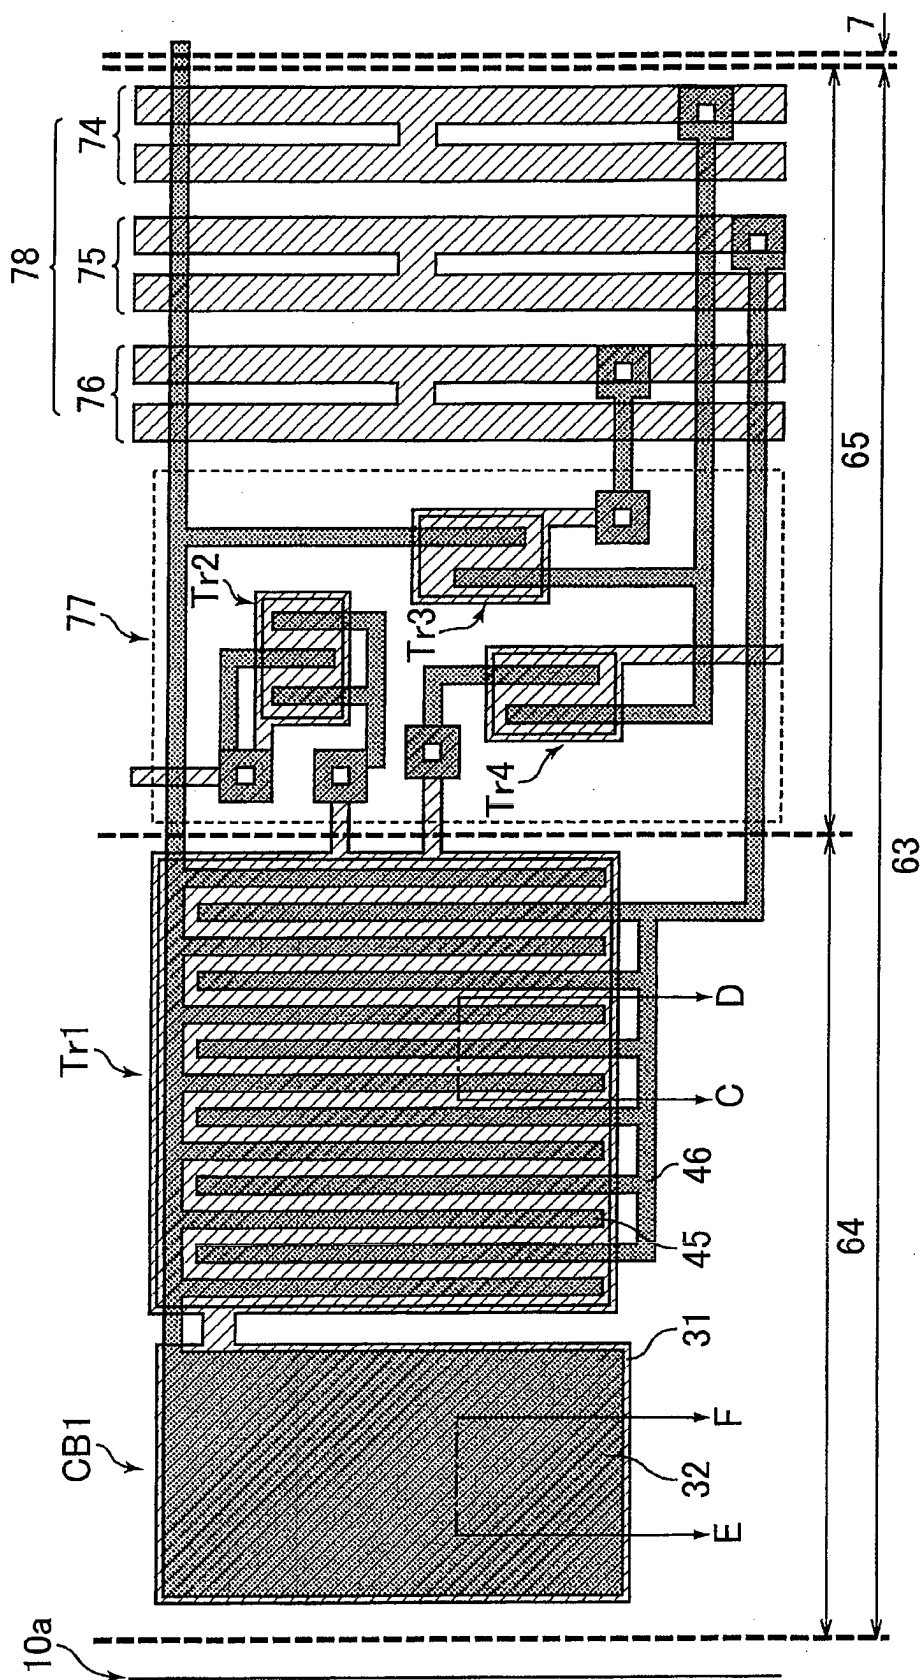


Fig. 10

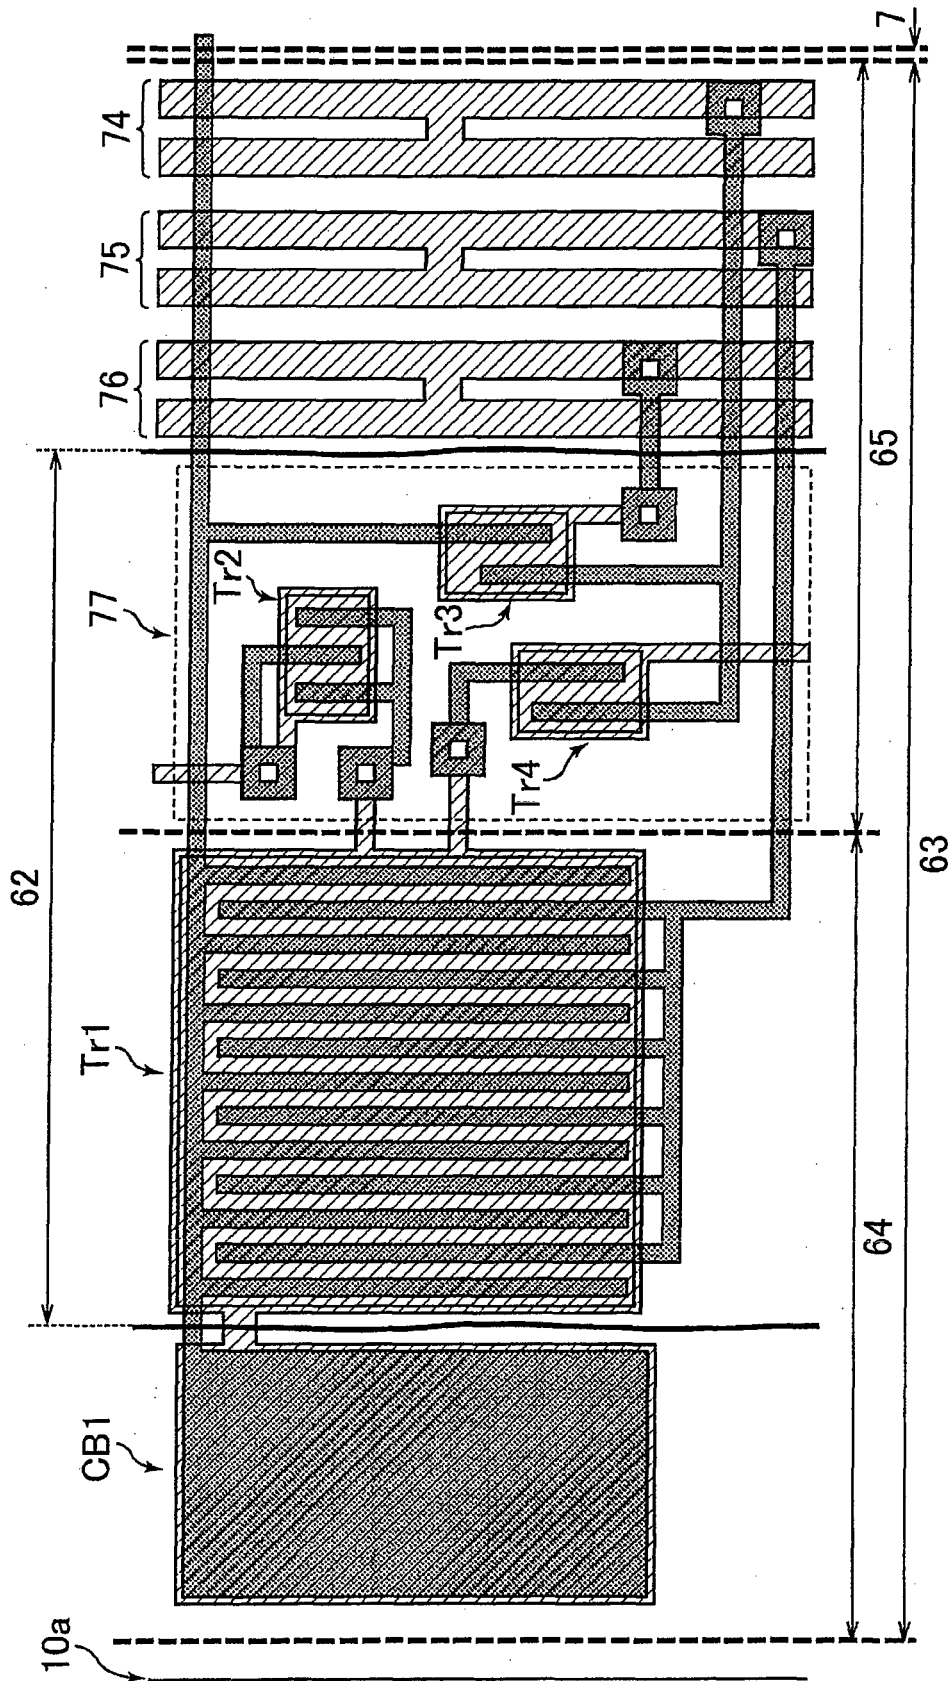


Fig. 11

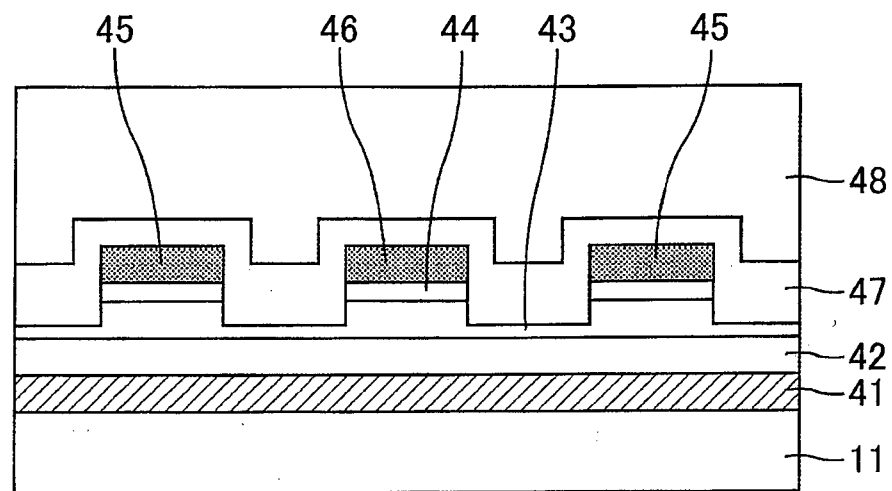


Fig. 12

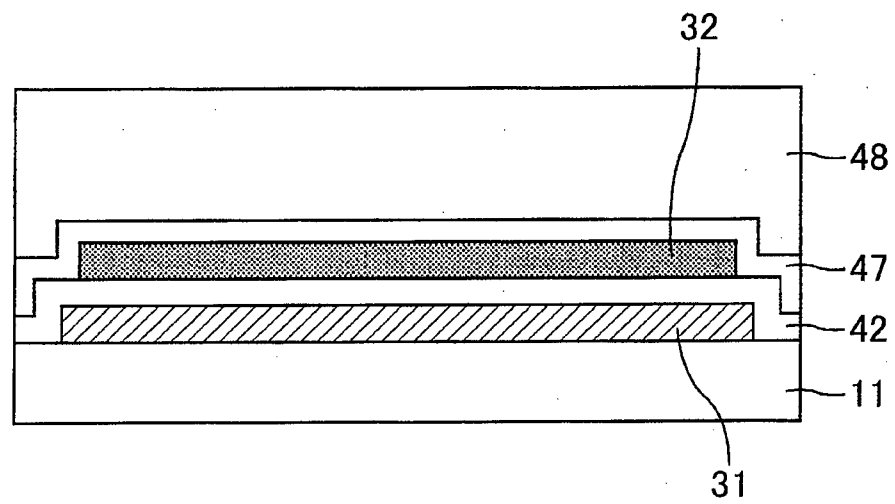


Fig. 13

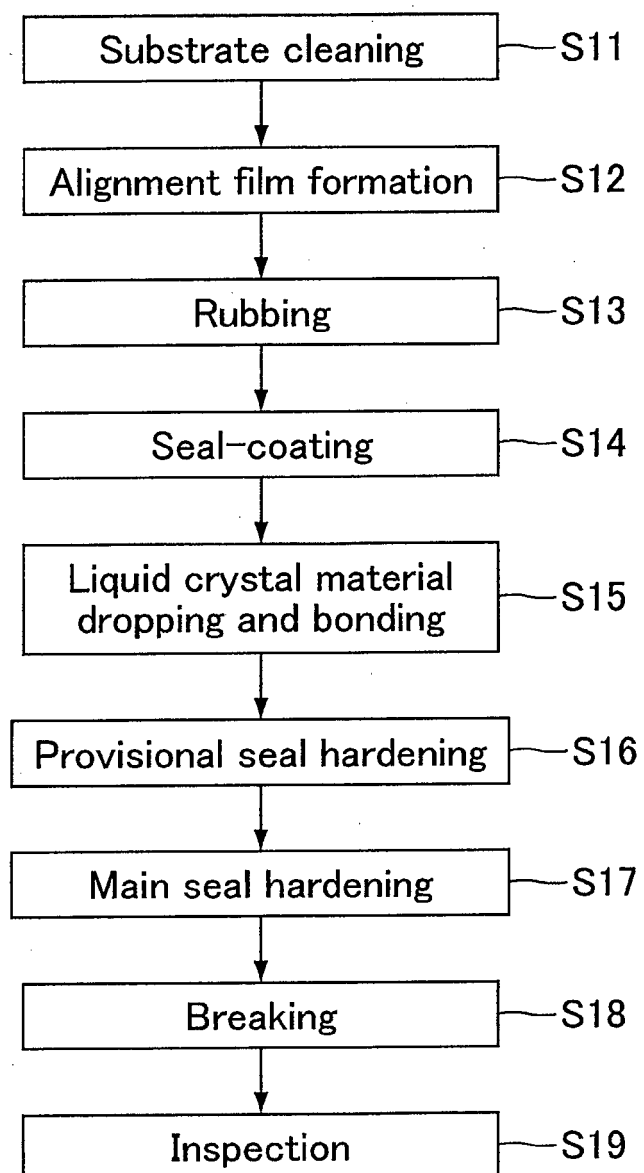


Fig. 14

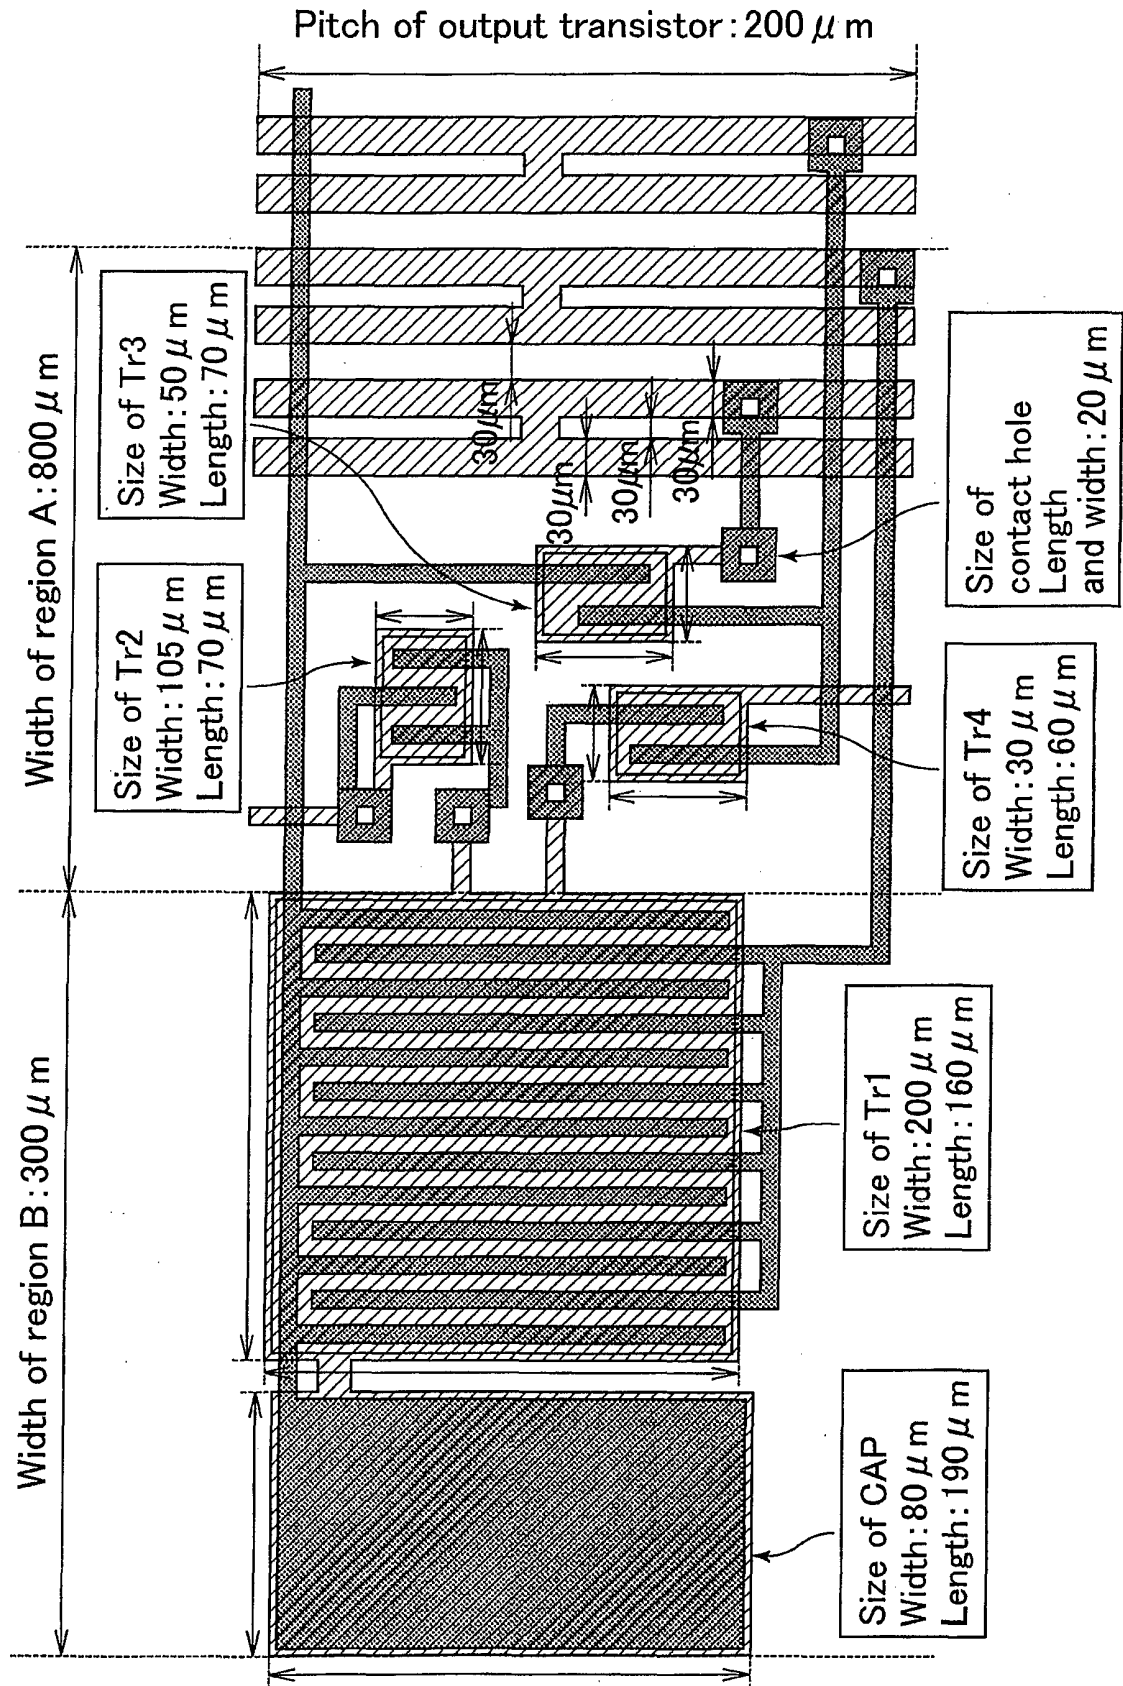


Fig. 15

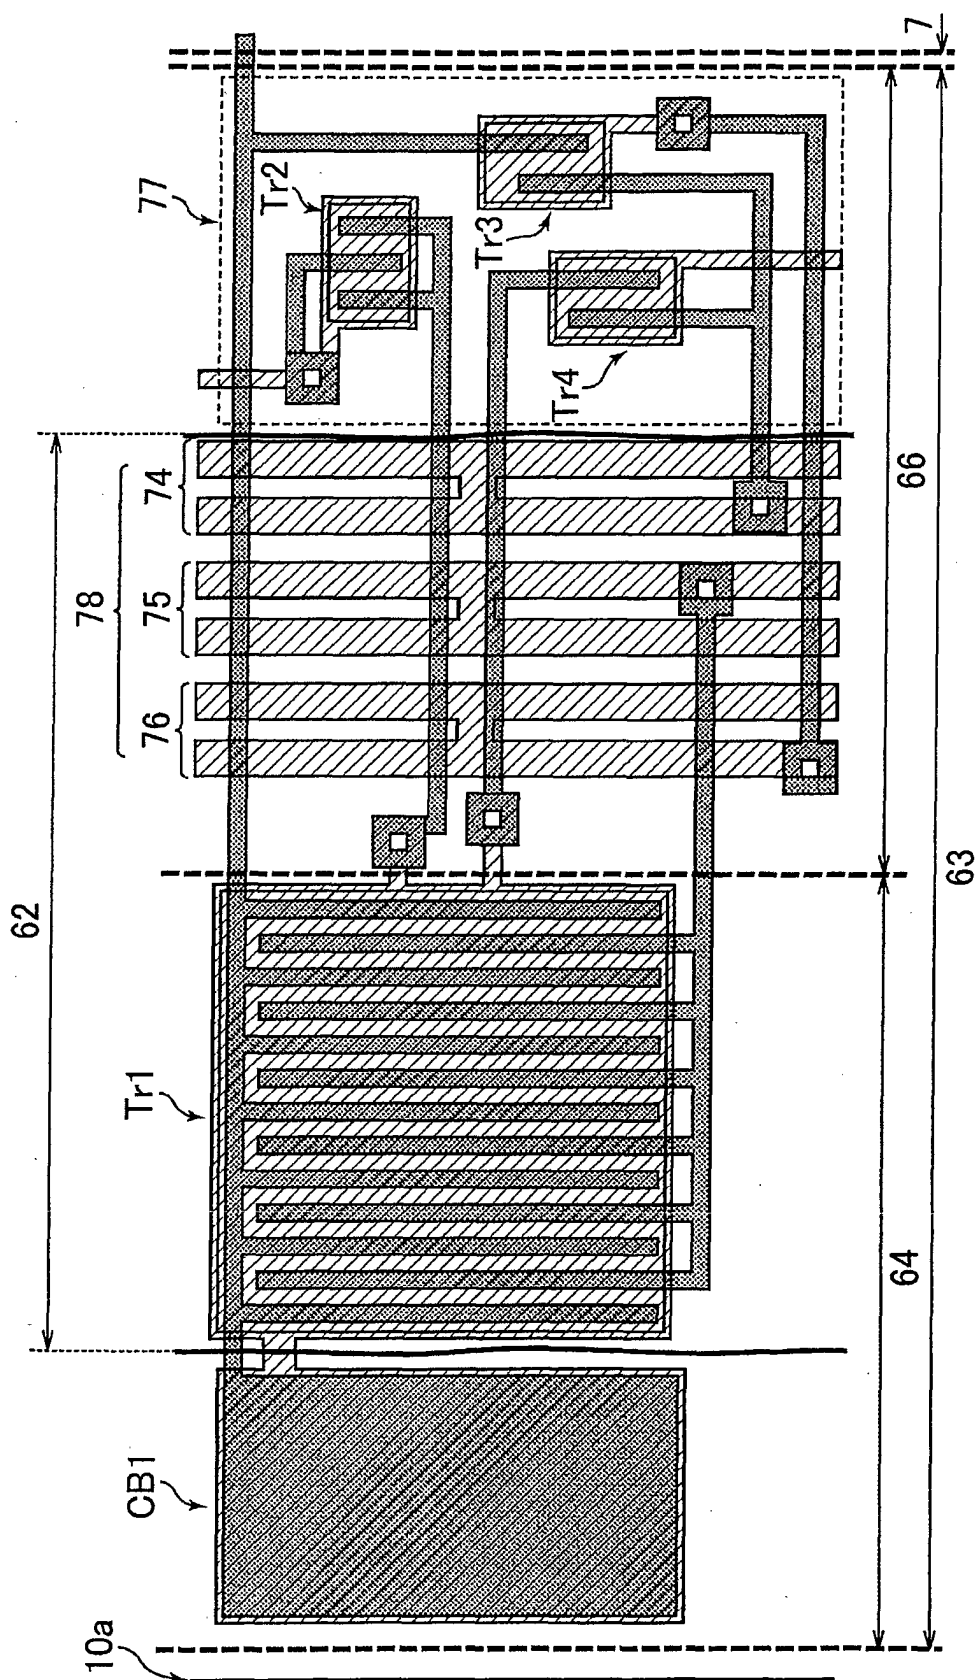


Fig. 16

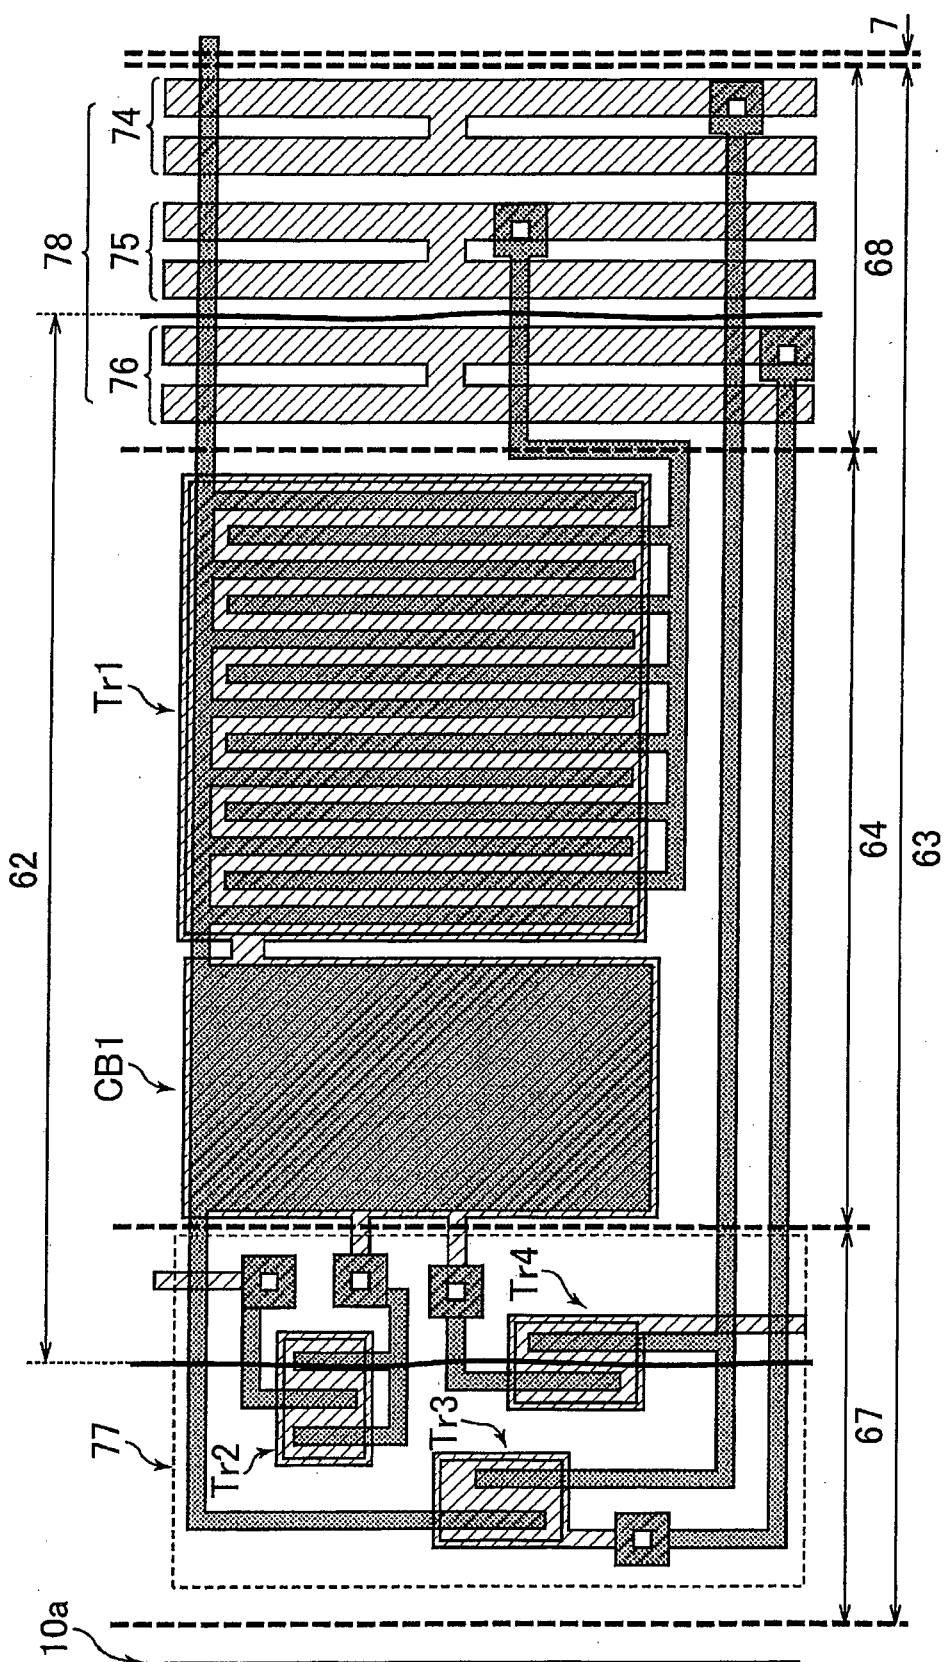


Fig. 17

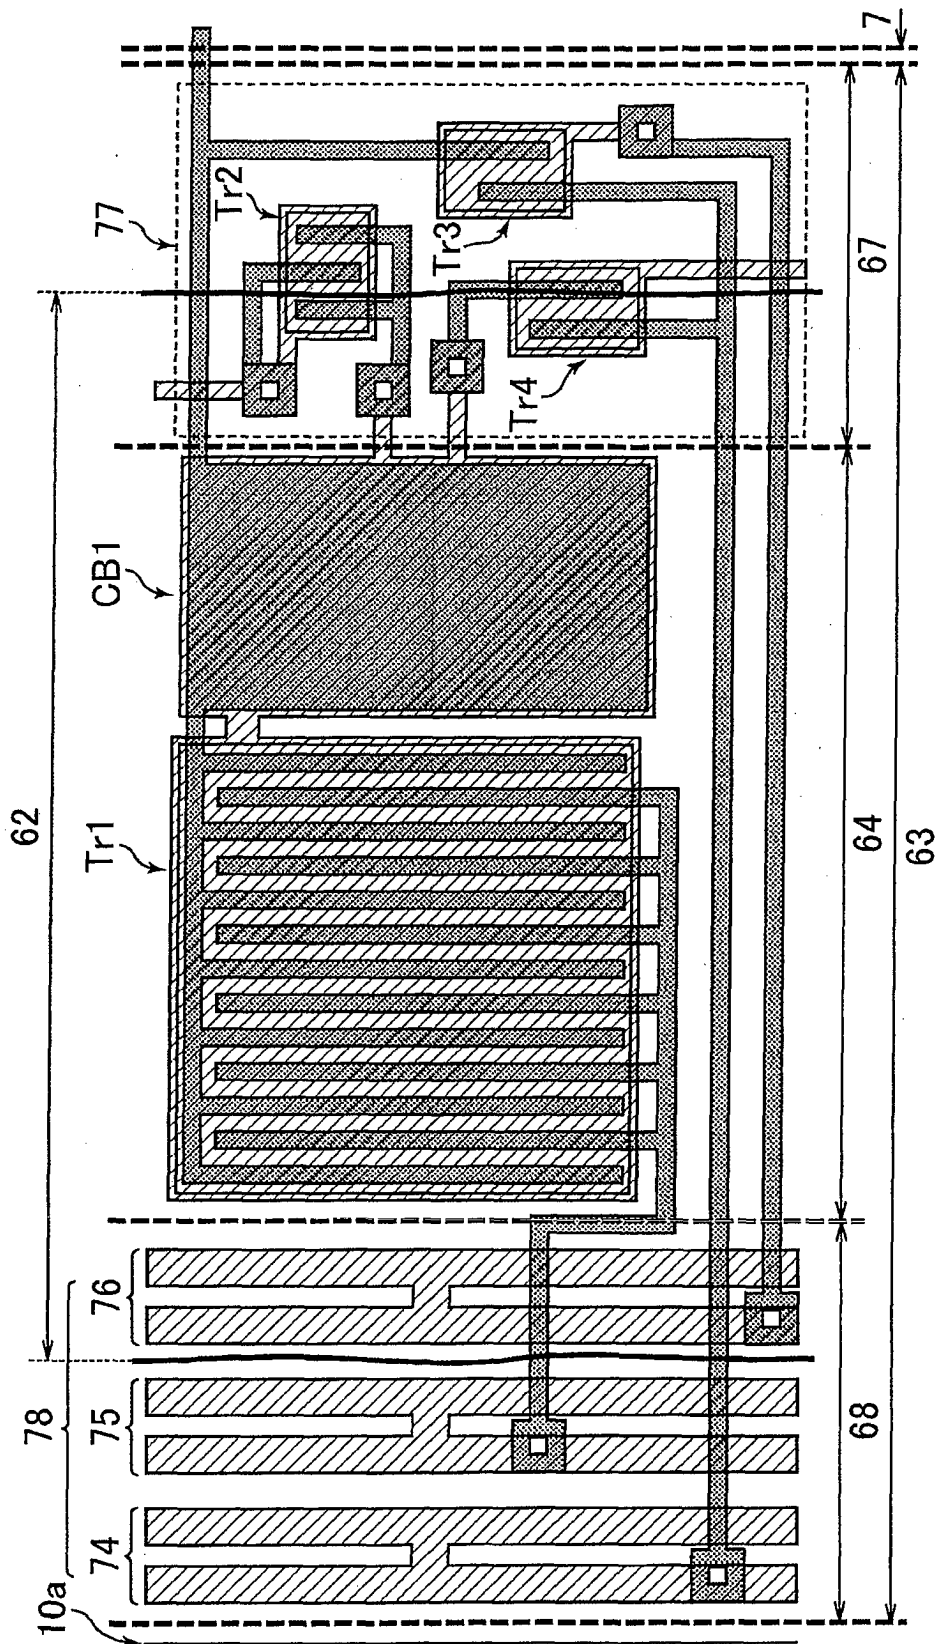


Fig. 18


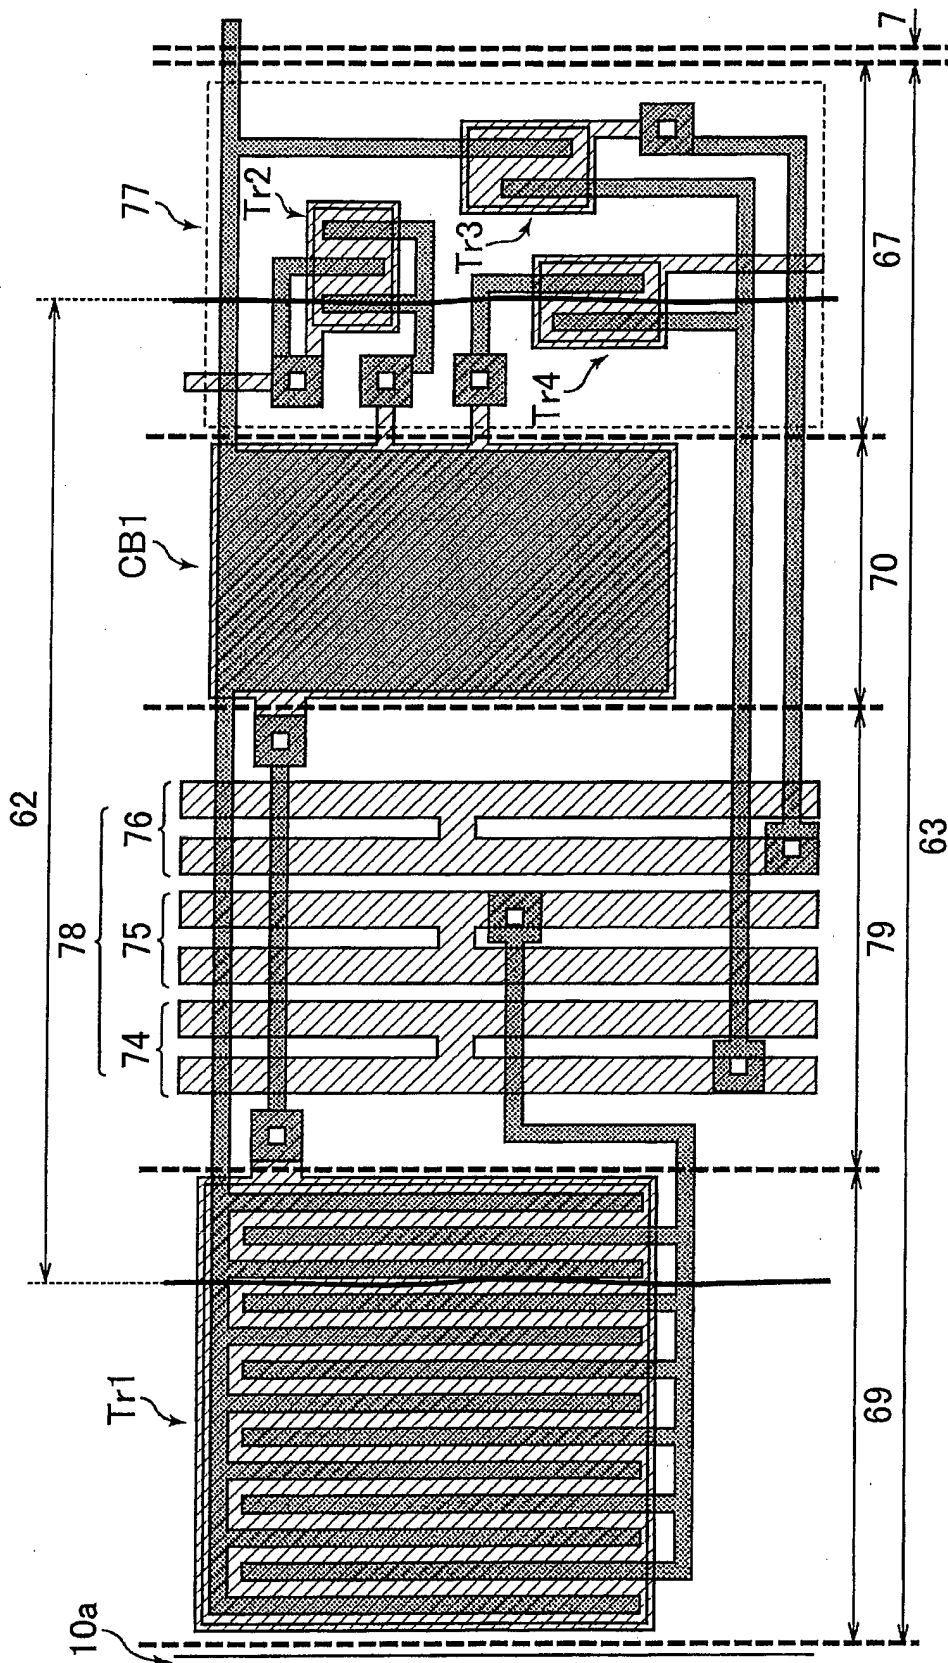


Fig. 19

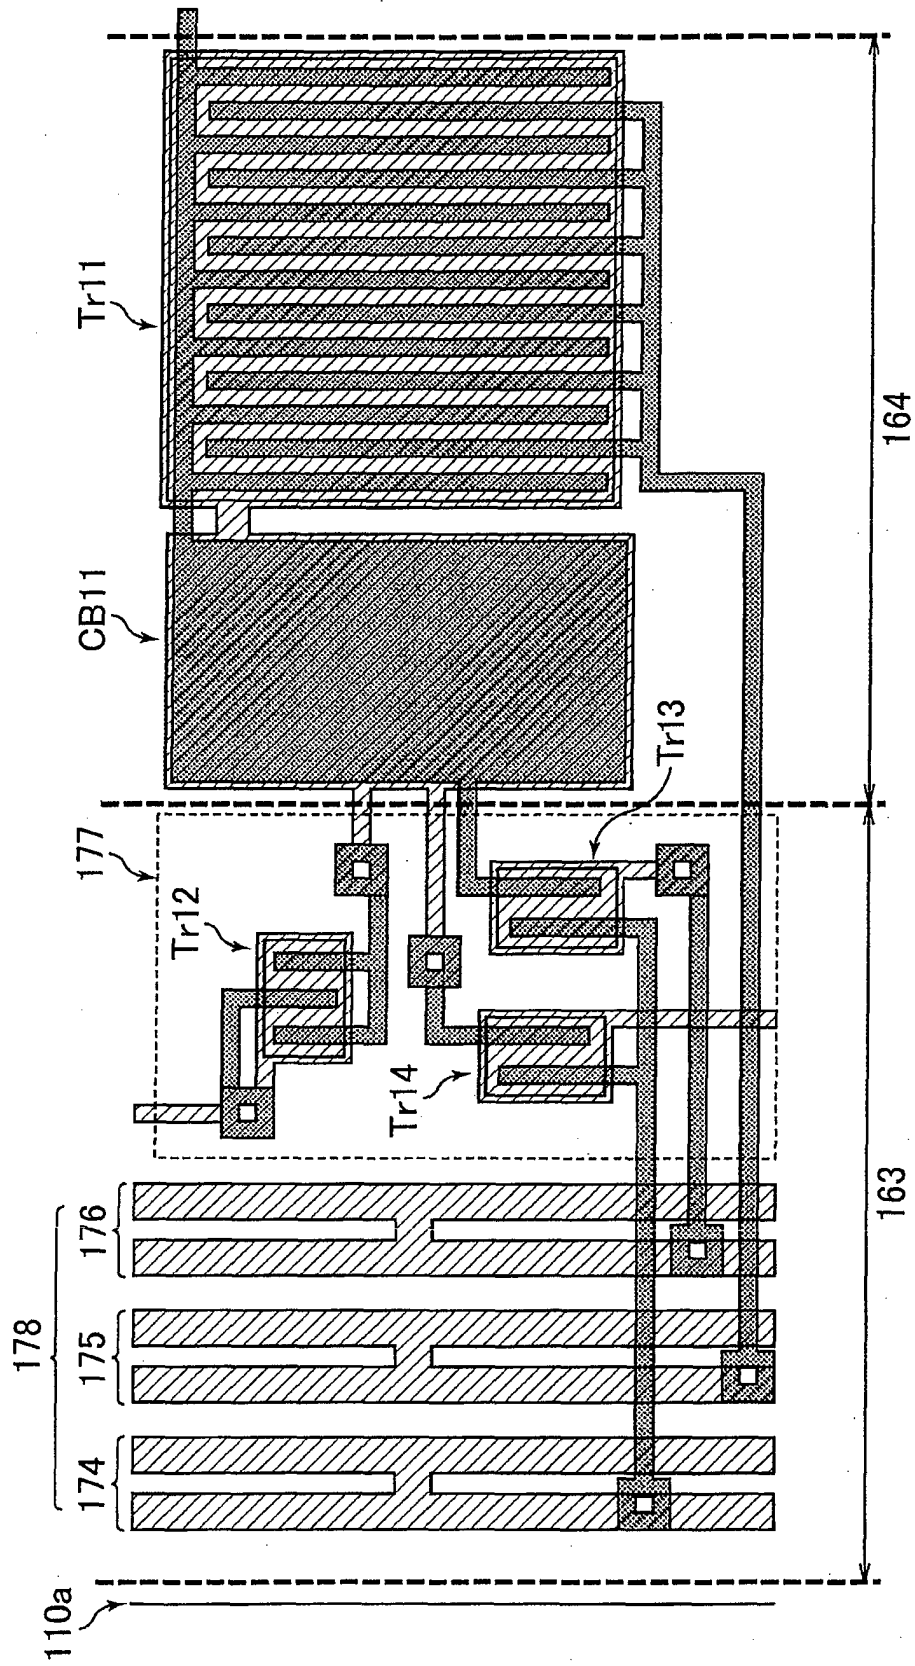

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2006039524 A [0018]
- JP 2006079041 A [0018]
- JP 2008026865 A [0018]
- JP 2005522734 T [0018]
- WO 2011067963 A [0018]
- WO 2009150862 A [0018]
- WO 2010137197 A [0018]
- WO 2011135873 A [0018]
- WO 2006098475 A [0018]
- JP 2007065037 A [0018]
- JP 2009210965 A [0018]
- EP 2840566 A [0019]
- WO 2011036911 A [0020]
- US 2006066604 A [0021]
- US 2008284963 A [0022]

专利名称(译)	液晶显示器		
公开(公告)号	EP2851744B1	公开(公告)日	2018-01-03
申请号	EP2013790794	申请日	2013-05-09
[标]申请(专利权)人(译)	夏普株式会社		
申请(专利权)人(译)	夏普株式会社		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	MORI TAKAHIRO		
发明人	MORI TAKAHIRO		
IPC分类号	G02F1/1345 G02F1/1339 G09G3/20 G09G3/36 G11C19/00 G11C19/28		
CPC分类号	G09G3/3677 G09G2300/0408 G09G2310/0286 G11C19/28 G11C19/287 G02F1/1339 G02F1/1345 G02F1/133345 G02F1/133512 G02F1/136213 G02F1/1368		
优先权	2012112771 2012-05-16 JP		
其他公开文献	EP2851744A4 EP2851744A1		
外部链接	Espacenet		

摘要(译)

本发明提供一种液晶显示器，其能够减少质量问题的发生并提高基板之间的粘合强度。本发明是一种液晶显示器，包括第一基板，第二基板和密封件。第一基板包括单片地形成在绝缘基板上的移位寄存器，多条总线，第一端和显示区域。移位寄存器包括多个多级连接的单元电路和连接到多个单元电路的布线，并且布置在第一端和显示区域之间的区域中。至少一个单元电路包括时钟端子，输出端子，输出晶体管，第二晶体管和自举电容器。输出晶体管和自举电容器布置在第一端与布线和第二晶体管之一之间的区域中。

Fig. 1

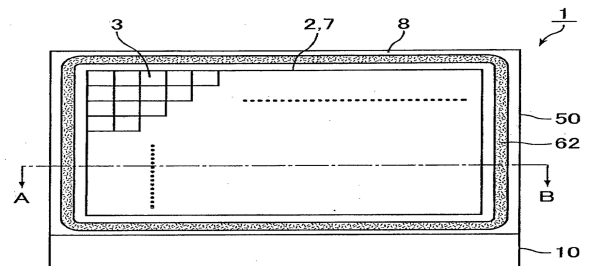


Fig. 2

