

(19)



(11)

EP 2 843 653 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
21.03.2018 Bulletin 2018/12

(51) Int Cl.:
G09G 3/36 ^(2006.01) **G02F 1/1362** ^(2006.01)
G02F 1/1335 ^(2006.01) **G02F 1/1343** ^(2006.01)

(21) Application number: **14178915.6**

(22) Date of filing: **29.07.2014**

(54) Liquid crystal display with common voltage compensation

Flüssigkristallanzeige mit Kompensation von Schwankungen der gemeinsamen Spannung

Affichage à cristaux liquides avec compensation des variations de la tension commune

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **28.08.2013 KR 20130102528**

(43) Date of publication of application:
04.03.2015 Bulletin 2015/10

(73) Proprietor: **LG Display Co., Ltd.
Seoul 150-721 (KR)**

(72) Inventors:
• **Sung, Changyong**
413-200 Paju-si, Gyeonggi-do (KR)
• **Yoon, Hyunmyoung**
718-833 Chilgok-gun, Gyeongsangbuk-do (KR)

• **Park, Sunwoo**
427-734 Gwacheon-si, Gyeonggi-do (KR)
• **Park, Jonghee**
131-752 Seoul (KR)

(74) Representative: **Viering, Jentschura & Partner
mbB**
Patent- und Rechtsanwälte
Am Brauhaus 8
01099 Dresden (DE)

(56) References cited:
US-A- 5 841 410 **US-A1- 2001 007 413**
US-A1- 2002 063 703 **US-A1- 2006 244 704**
US-A1- 2007 002 005 **US-A1- 2007 024 565**
US-A1- 2007 279 355 **US-A1- 2012 162 184**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This application claims the benefit of Korean Patent Application No. 10-2013-0102528 filed on August 28, 2013.

BACKGROUND

Field

[0002] This document relates to a liquid crystal display.

Related Art

[0003] As the information technology is developed, the market for display devices used as connection mediums between users and information is growing. Accordingly, the use of flat panel displays (FPDs) such as a liquid crystal display (LCD), an organic light emitting diode (OLED) display, and a plasma display panel (PDP) is increasing. The liquid crystal displays have been widely used because they can implement a high resolution and can achieve both the small-sized screen and the large-sized screen.

[0004] The liquid crystal display comprises a transistor substrate, on which thin film transistors, storage capacitors, pixel electrodes, etc. are formed, a color filter substrate on which color filters, black matrixes, etc. are formed, and a liquid crystal layer positioned between the transistor substrate and the color filter substrate. The liquid crystal display adjusts an arrangement direction of the liquid crystal layer by an electric field generated between the pixel electrodes and common electrodes on the transistor substrate or color filter substrate, thereby displaying an image using light coming from a backlight unit.

[0005] In the liquid crystal display, the difference between a data voltage supplied from a data driver and a common voltage serving as a reference potential is applied as a voltage for driving the liquid crystals. The common voltage varies with the position of the liquid crystal panel due to the electrical resistance of a wire, capacitor, etc. formed on the liquid crystal panel. For this reason, the common voltage becomes one of the voltages having the biggest effect on picture quality across the liquid crystal panel.

[0006] To prevent variations in common voltage, a compensation structure was conventionally suggested, which comprises a common voltage generator for generating a common voltage and a compensation circuit and receives a feedback common voltage from common voltage lines on two sides of the liquid crystal panel and compensates the common voltage supplied to the entire liquid crystal panel based on the feedback common voltage. In the conventional compensation structure, however, these variations are compensated for on the two sides of the liquid crystal panel, which makes it difficult to compensate for signal distortions caused by line re-

sistance and coupling and brings about picture quality problems such as horizontal crosstalk that should be overcome.

[0007] US 2006/244704 describes a liquid crystal display device including a liquid crystal panel having a first common voltage supply line and a second common voltage supply line spaced apart, a first common voltage compensator and a second common voltage compensator, coupled to the first common voltage supply line and the second common voltage supply line, respectively, and a common voltage generator coupled to the first common voltage compensator and the second common voltage compensator, wherein the common voltage generator generates a first common voltage and a second common voltage, and wherein the first common voltage compensator generates a first compensated common voltage, based on the first common voltage, which compensates a first ripple voltage generated at the first common voltage supply line, and wherein the second common voltage compensator generates, based on the second common voltage, a second compensated common voltage which compensates a second ripple voltage generated at the second common voltage supply line.

[0008] US 2007/002005 describes a liquid crystal display device (LCD), including a liquid crystal panel having a plurality of gate lines, a plurality of data lines, and a plurality of common voltage supply lines, the liquid crystal panel being divided into a plurality of blocks, a plurality of gate driver integrated circuits (ICs) connected to the plurality of gate lines, a plurality of data driver ICs connected to the plurality of data lines, and a plurality of common voltage compensators to supply compensated common voltages to the common voltage supply lines of the corresponding blocks.

[0009] US 5 841 410 describes a liquid crystal display having a liquid crystal layer, first and second electrodes, and a third electrode. The liquid crystal layer is inserted between the first and second electrodes to define liquid crystal cells. The third electrode is capacitively coupled with one of the first and second electrodes. A correction voltage for correcting distortion of a waveform for driving one of the first and second electrodes is applied to the third electrode, to keep an effective voltage applied to the liquid crystal cells unchanged and improve the display quality of the liquid crystal display.

[0010] Further examples of prior art display devices are described in US 2002/063703, US 2001/007413, US 2007/024565, US 2012/162184 and US 2007/279355.

SUMMARY

[0011] The present invention has been made in an effort to provide a liquid crystal display comprising the features of claim 1.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The accompanying drawings, which are includ-

ed to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

FIG. 1 is a block diagram of a liquid crystal display;
 FIG. 2 is a view for explaining the concept of compensation by a common voltage compensator;
 FIG. 3 is a first illustration showing a pattern of common voltage lines for common voltage compensation;
 FIG. 4 is a second illustration showing a pattern of common voltage lines for common voltage compensation;
 FIG. 5 is a third illustration showing a pattern of common voltage lines for common voltage compensation;
 FIG. 6 is a fourth illustration showing a pattern of common voltage lines for common voltage compensation;
 FIG. 7 is a circuit configuration diagram illustrating the common voltage compensator according to Figures 1 and 2;
 FIG. 8 illustrates the application of common voltage compensators to a large-area liquid crystal display;
 FIG. 9 is a view for explaining another concept of compensation by a common voltage compensator;
 FIGS. 10 to 13 are illustrations showing a variety of patterns of common voltage lines for common voltage compensation;
 FIG. 14 is a circuit configuration diagram illustrating the common voltage compensator according to Figure 9; and
 FIG. 15 is a waveform diagram illustrating feedback common voltages and a compensated common voltage.

DETAILED DESCRIPTION

[0013] Reference will now be made in detail to the accompanying drawings.

[0014] **FIG. 1** is a block diagram of a liquid crystal display. **FIG. 2** is a view for explaining the concept of compensation by a common voltage compensator.

[0015] As shown in **FIG. 1**, the liquid crystal display comprises a timing controller TCN, a liquid crystal panel PNL, a gate driver GDRV, a data driver SDRV, a backlight unit BLU, a common voltage generator VCOMG, and a common voltage compensator VCOMC.

[0016] The timing controller TCN receives a vertical synchronization signal Vsync, a horizontal synchronization signal Hsync, a data enable signal DE, a clock signal CLK, and a data signal DATA from an external source. The timing controller TCN controls the data driver SDRV and the gate driver GDRV by using timing signals such as the vertical synchronization signal Vsync, horizontal synchronization signal Hsync, data enable signal DE,

and clock signal CLK, received from the external source. The timing controller TCN may determine a frame period by counting the data enable signal DE of one horizontal period, and thus the vertical sync signal Vsync and the horizontal sync signal Hsync received from the external source may be omitted. Control signals generated by the timing controller TCN comprise a gate timing control signal GDC for controlling the operation timing of the gate driver GDRV and a data timing control signal DDC for controlling the operation timing of the data driver SDRV.

[0017] The liquid crystal panel PNL comprises a liquid crystal layer located between a thin film transistor substrate (hereinafter, abbreviated as 'TFT substrate') and a color filter substrate and subpixels SP arranged in a matrix. Data lines DL, gate lines GL, TFTs, storage capacitors, etc are formed on the TFT substrate, and a black matrix, color filters, etc are formed on the color filter substrate. A subpixel SP is defined by a data line DL1 and a gate line GL1 which cross each other. The subpixel SP comprises a TFT driven by a gate signal supplied through the gate line GL1, a storage capacitor Cst for storing a data signal supplied through the data line DL1 as a data voltage, and a liquid crystal cell Clc driven by the data voltage stored in the storage capacitor Cst. The liquid crystal cell Clc is driven by the data voltage supplied to a pixel electrode 1 and a common voltage vcom supplied to a common electrode 2. The common electrode 2 is formed on the color filter substrate in a vertical field driving mode such as a Twisted Nematic (TN) mode and a Vertical Alignment (VA) mode. The common electrode 2 and the pixel electrode 1 are formed on the TFT substrate in a horizontal field driving mode such as an In Plane Switching (IPS) mode and a Fringe Field Switching (FFS) mode. The common electrode receives the common voltage vcom from common voltage lines. A polarizer is attached to the TFT substrate and color filter substrate of the liquid crystal panel PNL, and an alignment layer for setting a pre-tilt angle of liquid crystal is formed thereon. A liquid crystal mode of the liquid crystal panel PNL can be formed by any liquid crystal mode as well as the above-mentioned TN mode, VA mode, IPS mode, and FFS mode.

[0018] In response to the gate timing control signal GDC supplied from the timing controller TCN, the gate driver GDRV sequentially generates gate signals while shifting the levels of the signals with a swing width of a gate driving voltage with which the TFTs of the subpixels SP included in the liquid crystal panel PNL can operate. The gate driver GDRV supplies the generated gate signals through the gate lines GL to the subpixels SP included in the liquid crystal panel PNL. The gate driver GDRV may be mounted in the form of IC (integrated circuit) on the liquid crystal panel PNL or a flexible circuit board, or formed in the form of GIP (gate in panel) on the liquid crystal panel PNL.

[0019] In response to the data timing control signal DDC supplied from the timing controller TCN, the data driver SDRV samples the data signal DATA supplied

from the timing controller TCN and latches the same to convert it into data of a parallel data system. The data driver SDRV converts the digital data signal DATA into an analog signal according to a gamma reference voltage. The data driver SDRV supplies the converted data signal DATA to the subpixels SP of the liquid crystal panel PNL through the data lines DL. The data driver SDRV may be formed in the form of IC on the liquid crystal panel PNL or a flexible circuit board.

[0020] The backlight unit BLU provides light to the liquid crystal panel PNL. The backlight unit BLU comprises a light source for emitting light, a light guide plate for guiding light to the liquid crystal panel PNL, and an optical sheet for focusing and diffusing light.

[0021] The common voltage generator VCOMG converts external input power into DC power to generate and output the common voltage vcom. The common voltage vcom output from the common voltage generator VCOMG is supplied to the common voltage lines formed on the liquid crystal panel PNL.

[0022] The common voltage compensator VCOMC compensates the common voltage vcom supplied to the liquid crystal panel PNL. The common voltage compensator VCOMC compensates the common voltage vcom considering that the amount of ripple depends on the position in the liquid crystal panel PNL. To this end, the common voltage compensator VCOMC receives a feedback common voltage from the common voltage lines formed on the liquid crystal panel PNL, and outputs a compensated common voltage vcomc based on the feedback common voltage vcomFB.

[0023] As shown in **FIG. 2**, the common voltage compensator VCOMC receives a feedback common voltage from the common voltage lines formed on both the left and right sides of the liquid crystal panel. The common voltage compensator VCOMC outputs first to fourth compensated common voltages vcomc1 to vcomc4 based on first to fourth feedback common voltages vcomFB1 to vcomFB4. The first to fourth compensated common voltages vcomc1 to vcomc4 output from the common voltage compensator VCOMC are re-supplied to the common voltage lines formed on both the left and right sides of the liquid crystal panel PNL.

[0024] Specifically, a display area AA is divided into a first display area AA1 and a second display area AA2 with respect to the center AAC of the liquid crystal panel PNL. A first common voltage compensator VCOMC1 receives a first feedback common voltage vcomFB1 from the left side of the first display area AA1, and supplies a first compensated common voltage vcomc1 to the left side of the first display area AA1. A second common voltage compensator VCOMC2 receives a second feedback common voltage vcomFB2 from the left side of the second display area AA2, and supplies a second compensated common voltage vcomc2 to the left side of the second display area AA2. A third common voltage compensator VCOMC3 receives a third feedback common voltage vcomFB3 from the right side of the first display area

AA1, and supplies a third compensated common voltage vcomc3 to the right side of the first display area AA1. A fourth common voltage compensator VCOMC4 receives a fourth feedback common voltage vcomFB4 from the right side of the second display area AA2, and supplies a fourth compensated common voltage vcomc4 to the right side of the second display area AA2.

[0025] By dividing the display area AA into the first display area AA1 and the second display area AA2 with respect to the center AAC of the liquid crystal panel PNL and compensating the common voltage vcom fully considering that the amount of ripple depends on the position in the liquid crystal panel PNL, thereby enabling more uniform and accurate compensation of the common voltage vcom.

[0026] A pattern of the common voltage lines is formed as follows in order to compensate the common voltage fully considering that the amount of ripple depends on the size of the liquid crystal panel PNL.

[0027] **FIG. 3** is a first illustration showing a pattern of common voltage lines for common voltage compensation.

[0028] As shown in **FIGS. 2 and 3**, a display area AA where an image is displayed and a non-display area NA where no image is displayed are defined on the liquid crystal panel PNL. Common voltage lines VCOML and VCOMR are formed on the left and right sides of the display area AA. The illustrated pattern of the common voltage lines VCOML and VCOMR is available in a small-sized liquid crystal display panel PNL.

[0029] The left common voltage line VCOML is formed in the non-display area NA on the left side of the display area AA. The right common voltage line VCOMR is formed in the non-display area NA on the right side of the display area AA. The common voltage lines electrically connected to the left common voltage line VCOML and the right common voltage line VCOMR are formed in the display area AA. The common voltage lines VCOM are formed for every gate line.

[0030] The left common voltage line VCOML and the right common voltage line VCOMR are formed in the y-axis direction, corresponding to the length of the display area AA. The left common voltage line VCOML and the right common voltage line VCOMR are wider than the common voltage lines VCOM formed in the display area AA. The left common voltage line VCOML and the right common voltage line VCOMR are of equal line width in all areas, and have a rectangular shape. The left common voltage line VCOML and the right common voltage line VCOMR help to minimize a voltage drop or signal distortion caused by line resistance when transferring a common voltage to the common voltage lines VCOM formed in the display area AA.

[0031] The first common voltage compensator VCOMC1 receives a first feedback common voltage vcomFB1 from the left common voltage line VCOML formed in the non-display area NA on the left side of the first display area AA1, and supplies a first compensated

common voltage vcomc1 to the left common voltage line VCOML formed in the non-display area NA on the left side of the first display area AA1. The second common voltage compensator VCOMC2 receives a second feedback common voltage vcomFB2 from the left common voltage line VCOML formed in the non-display area NA on the left side of the second display area AA2, and supplies a second compensated common voltage vcomc2 to the left common voltage line VCOML formed in the non-display area NA on the left side of the second display area AA2.

[0032] The third common voltage compensator VCOMC3 receives a third feedback common voltage vcomFB3 from the right common voltage line VCOMR formed in the non-display area NA on the right side of the first display area AA1, and supplies a third compensated common voltage vcomc3 to the right common voltage line VCOMR formed in the non-display area NA on the right side of the first display area AA1. The fourth common voltage compensator VCOMC4 receives a fourth feedback common voltage vcomFB4 from the right common voltage line VCOMR formed in the non-display area NA on the right side of the second display area AA2, and supplies a fourth compensated common voltage vcomc4 to the right common voltage line VCOMR formed in the non-display area NA on the right side of the second display area AA2.

[0033] FIG. 4 is a second illustration showing a pattern of common voltage lines for common voltage compensation.

[0034] As shown in FIGS. 2 and 4, a display area AA where an image is displayed and a non-display area NA where no image is displayed are defined on the liquid crystal panel PNL. Common voltage lines VCOML and VCOMR are formed on the left and right sides of the display area AA. The illustrated pattern of the common voltage lines VCOML and VCOMR is available in a small-to-medium sized liquid crystal display panel PNL.

[0035] The left common voltage line VCOML is formed in the non-display area NA on the left side of the display area AA. The right common voltage line VCOMR is formed in the non-display area NA on the right side of the display area AA. The common voltage lines electrically connected to the left common voltage line VCOML and the right common voltage line VCOMR are formed in the display area AA. The common voltage lines VCOM are formed for every gate line.

[0036] The left common voltage line VCOML and the right common voltage line VCOMR are formed in the y-axis direction, corresponding to the length of the display area AA. The left common voltage line VCOML and the right common voltage line VCOMR are wider than the common voltage lines VCOM formed in the display area AA. The left common voltage line VCOML and the right common voltage line VCOMR have a rectangular shape. The left common voltage line VCOML and the right common voltage line VCOMR formed in the non-display area NA are wider on the left and right sides of the first display

area AA1 than on the left and right sides of the second display area AA2. The left common voltage line VCOML and the right common voltage line VCOMR help to minimize a voltage drop or signal distortion caused by line resistance when transferring a common voltage to the common voltage lines VCOM formed in the display area AA. The reason why the linewidth of the left common voltage line VCOML and the right common voltage line VCOMR varies is because the line resistance in the upper area corresponding to the first display area AA1 is greater than the line resistance in the lower area corresponding to the second area AA2. In other words, the line resistance increases towards the upper area, which is far from the input terminal, because the common voltage is input through the lower area and transferred to the upper area, which is taken into account.

[0037] The first common voltage compensator VCOMC1 receives a first feedback common voltage vcomFB1 from the left common voltage line VCOML formed in the non-display area NA on the left side of the first display area AA1, and supplies a first compensated common voltage vcomc1 to the left common voltage line VCOML formed in the non-display area NA on the left side of the first display area AA1. The second common voltage compensator VCOMC2 receives a second feedback common voltage vcomFB2 from the left common voltage line VCOML formed in the non-display area NA on the left side of the second display area AA2, and supplies a second compensated common voltage vcomc2 to the left common voltage line VCOML formed in the non-display area NA on the left side of the second display area AA2.

[0038] The third common voltage compensator VCOMC3 receives a third feedback common voltage vcomFB3 from the right common voltage line VCOMR formed in the non-display area NA on the right side of the first display area AA1, and supplies a third compensated common voltage vcomc3 to the right common voltage line VCOMR formed in the non-display area NA on the right side of the first display area AA1. The fourth common voltage compensator VCOMC4 receives a fourth feedback common voltage vcomFB4 from the right common voltage line VCOMR formed in the non-display area NA on the right side of the second display area AA2, and supplies a fourth compensated common voltage vcomc4 to the right common voltage line VCOMR formed in the non-display area NA on the right side of the second display area AA2.

[0039] FIG. 5 is a third illustration showing a pattern of common voltage lines for common voltage compensation according to an embodiment of the invention.

[0040] As shown in FIGS. 2 and 5, a display area AA where an image is displayed and a non-display area NA where no image is displayed are defined on the liquid crystal panel PNL. Common voltage lines VCOMU, VCOML, and VCOMR are formed on the left and right sides of the display area AA. The illustrated pattern of the common voltage lines VCOML and VCOMR is avail-

able in a medium-to-large sized liquid crystal display panel PNL.

[0041] A unilateral common voltage line VCOMU is formed in the non-display area NA on one side (upper side) of the display area AA. The left common voltage line VCOML is formed in the non-display area NA on the left side of the display area AA. The right common voltage line VCOMR is formed in the non-display area NA on the right side of the display area AA. The unilateral common voltage line VCOMU, the left common voltage line VCOML, and the right common voltage line VCOMR are electrically connected. The common voltage lines electrically connected to the left common voltage line VCOML and the right common voltage line VCOMR are formed in the display area AA. The common voltage lines VCOM are formed for every gate line.

[0042] The unilateral common voltage line VCOMU is formed in the x-axis direction, corresponding to the length (or width) of the display area AA. The left common voltage line VCOML and the right common voltage line VCOMR are formed in the y-axis direction, corresponding to the length of the display area AA. The unilateral common voltage line VCOMU, the left common voltage line VCOML, and the right common voltage line VCOMR are wider than the common voltage lines VCOM formed in the display area AA. The unilateral common voltage line VCOMU, the left common voltage line VCOML, and the right common voltage line VCOMR have a rectangular shape. By the way, the left common voltage line VCOML and the right common voltage line VCOMR formed in the non-display area NA are wider on the left and right sides of the first display area AA1 than on the left and right sides of the second display area AA2. The left common voltage line VCOML and the right common voltage line VCOMR help to minimize a voltage drop or signal distortion caused by line resistance when transferring a common voltage to the common voltage lines VCOM formed in the display area AA. The reason why the line width of the left common voltage line VCOML and the right common voltage line VCOMR varies is because the line resistance in the upper area corresponding to the first display area AA1 is greater than the line resistance in the lower area corresponding to the second area AA2. In other words, the line resistance increases towards the upper area, which is far from the input terminal, because the common voltage is input through the lower area and transferred to the upper area, which is taken into account.

[0043] The first common voltage compensator VCOMC1 receives a first feedback common voltage vcomFB1 from the unilateral common voltage line VCOMU formed in the non-display area NA on the upper side of the first display area AA1, and supplies a first compensated common voltage vcomc1 to the unilateral common voltage line VCOMU formed in the non-display area NA on the upper side of the first display area AA1. The second common voltage compensator VCOMC2 receives a second feedback common voltage vcomFB2 from the left common voltage line VCOML formed in the

non-display area NA on the left side of the second display area AA2, and supplies a second compensated common voltage vcomc2 to the left common voltage line VCOML formed in the non-display area NA on the left side of the second display area AA2.

[0044] The third common voltage compensator VCOMC3 receives a third feedback common voltage vcomFB3 from the unilateral common voltage line VCOMU formed in the non-display area NA on the upper side of the first display area AA1, and supplies a third compensated common voltage vcomc3 to the unilateral common voltage line VCOMU formed in the non-display area NA on the upper side of the first display area AA1. The fourth common voltage compensator VCOMC4 receives a fourth feedback common voltage vcomFB4 from the right common voltage line VCOMR formed in the non-display area NA on the right side of the second display area AA2, and supplies a fourth compensated common voltage vcomc4 to the right common voltage line VCOMR formed in the non-display area NA on the right side of the second display area AA2.

[0045] FIG. 6 is a fourth illustration showing a pattern of common voltage lines for common voltage compensation according to an embodiment of the invention.

[0046] As shown in FIGS. 2 and 6, a display area AA where an image is displayed and a non-display area NA where no image is displayed are defined on the liquid crystal panel PNL. Common voltage lines VCOMU, VCOML, and VCOMR and dummy common voltage lines VCOMLF and VCOMRF are formed on the left and right sides of the display area AA. The illustrated pattern of the common voltage lines VCOML and VCOMR is available in a large sized liquid crystal display panel PNL.

[0047] A unilateral common voltage line VCOMU is formed in the non-display area NA on one side (upper side) of the display area AA. The left common voltage line VCOML is formed in the non-display area NA on the left side of the display area AA. The left dummy common voltage line VCOMLF is formed in the non-display area NA on the left side of the display area AA, and connected to the left common voltage line VCOML. The right common voltage line VCOMR is formed in the non-display area NA on the right side of the display area AA. The right dummy common voltage line VCOMRF is formed in the non-display area NA on the right side of the display area AA, and connected to the right common voltage line VCOMR. The unilateral common voltage line VCOMU, the left common voltage line VCOML, and the right common voltage line VCOMR are electrically connected. The common voltage lines electrically connected to the left common voltage line VCOML and the right common voltage line VCOMR are formed in the display area AA. The common voltage lines VCOM are formed for every gate line.

[0048] The unilateral common voltage line VCOMU is formed in the x-axis direction, corresponding to the length (or width) of the display area AA. The left common voltage line VCOML and the right common voltage line VCOMR

are formed in the y-axis direction, corresponding to the length of the display area AA. The left dummy common voltage line VCOMLF and the right dummy common voltage line VCOMRF are formed in the y-axis direction, partially corresponding to the length of the display area AA. The unilateral common voltage line VCOMU, the left common voltage line VCOML, the right common voltage line VCOMR, the left dummy common voltage line VCOMLF, and the right dummy common voltage line VCOMRF are wider than the common voltage lines VCOM formed in the display area AA.

[0049] The unilateral common voltage line VCOMU, the left common voltage line VCOML, the right common voltage line VCOMR, the left dummy common voltage line VCOMLF, and the right dummy common voltage line VCOMRF have rectangular shapes. By the way, the left common voltage line VCOML and the right common voltage line VCOMR formed in the non-display area NA are wider on the left and right sides of the first display area AA1 than on the left and right sides of the second display area AA2.

[0050] The left common voltage line VCOML and the right common voltage line VCOMR help to minimize a voltage drop or signal distortion caused by line resistance when transferring a common voltage to the common voltage lines VCOM formed in the display area AA. The reason why the line width of the left common voltage line VCOML and the right common voltage line VCOMR varies is because the line resistance in the upper area corresponding to the first display area AA1 is greater than the line resistance in the lower area corresponding to the second area AA2. In other words, the line resistance increases towards the upper area, which is far from the input terminal, because the common voltage is input through the lower area and transferred to the upper area, which is taken into account. Also, the left dummy common voltage line VCOMLF and the right dummy common voltage line VCOMRF each are physically separated from compensated common voltage supply parts so that the common voltage fed back from the left and right common voltage lines VCOML and VCOMR at the center AAC of the liquid crystal panel PNL acts as a representative voltage. To this end, the left dummy common voltage line VCOMLF and the right dummy common voltage line VCOMRF are physically isolated from the left and right common voltage lines VCOML and VCOMR in the non-display area NA on the left and right sides of the second display area AA2.

[0051] The first common voltage compensator VCOMC1 receives a first feedback common voltage vcomFB1 from the unilateral common voltage line VCOMU formed in the non-display area NA on the upper side of the first display area AA1, and supplies a first compensated common voltage vcomc1 to the unilateral common voltage line VCOMU formed in the non-display area NA on the upper side of the first display area AA1. The second common voltage compensator VCOMC2 receives a second feedback common voltage vcomFB2

from the left common voltage line VCOML formed in the non-display area NA on the left side of the second display area AA2, and supplies a second compensated common voltage vcomc2 to the left common voltage line VCOML formed in the non-display area NA on the left side of the second display area AA2.

[0052] The third common voltage compensator VCOMC3 receives a third feedback common voltage vcomFB3 from the unilateral common voltage line VCOMU formed in the non-display area NA on the upper side of the first display area AA1, and supplies a third compensated common voltage vcomc3 to the unilateral common voltage line VCOMU formed in the non-display area NA on the upper side of the first display area AA1. The fourth common voltage compensator VCOMC4 receives a fourth feedback common voltage vcomFB4 from the right common voltage line VCOMR formed in the non-display area NA on the right side of the second display area AA2, and supplies a fourth compensated common voltage vcomc4 to the right common voltage line VCOMR formed in the non-display area NA on the right side of the second display area AA2.

[0053] FIG. 7 is a circuit configuration diagram illustrating the common voltage compensator according to

Figures 1 and 2.

[0054] As shown in FIG. 7, the first to fourth common voltage compensators VCOMC1 to VCOMC4 comprise resistors and OP amplifiers. The first common voltage compensator VCOMC1 comprises an 11th resistor R11, a 12th resistor R12, and a first OP amplifier OP1. The second common voltage compensator VCOMC2 comprises a 21th resistor R21, a 22th resistor R22, and a second OP amplifier OP2. The third common voltage compensator VCOMC3 comprises a 31th resistor R31, a 32th resistor R32, and a third OP amplifier OP3. The fourth common voltage compensator VCOMC4 comprises a 41th resistor R41, a 42th resistor R42, and a fourth OP amplifier OP4.

[0055] The relation of connection between the 11th and 12th resistors R11 and R12 and first OP amplifier OP1 included in the first common voltage compensator VCOMC1 is as follows. One end of the 11th resistor R11 is connected to a common voltage line from which a feedback common voltage is received, and the other end is connected to an inverting terminal (-) of the first OP amplifier OP1. One end of the 12th resistor R12 is connected to the inverting terminal (-) of the first OP amplifier OP1, and the other end is connected to an output terminal of the first OP amplifier OP1 through which a compensated common voltage is output.

[0056] The relation of connection between the 21th and 22th resistors R21 and R22 and second OP amplifier OP2 included in the second common voltage compensator VCOMC2 is as follows. One end of the 21th resistor R21 is connected to a common voltage line from which a feedback common voltage is received, and the other end is connected to an inverting terminal (-) of the second OP amplifier OP2. One end of the 22th resistor R22 is

connected to the inverting terminal (-) of the second OP amplifier OP2, and the other end is connected to an output terminal of the second OP amplifier OP2 through which a compensated common voltage is output.

[0057] The relation of connection between the 31th and 32th resistors R31 and R32 and third OP amplifier OP3 included in the third common voltage compensator VCOMC3 is as follows. One end of the 31th resistor R31 is connected to a common voltage line from which a feedback common voltage is received, and the other end is connected to an inverting terminal (-) of the third OP amplifier OP3. One end of the 32th resistor R32 is connected to the inverting terminal (-) of the third OP amplifier OP3, and the other end is connected to an output terminal of the third OP amplifier OP3 through which a compensated common voltage is output.

[0058] The relation of connection between the 41th and 42th resistors R41 and R42 and fourth OP amplifier OP4 included in the fourth common voltage compensator VCOMC4 is as follows. One end of the 41th resistor R41 is connected to a common voltage line from which a feedback common voltage is received, and the other end is connected to an inverting terminal (-) of the fourth OP amplifier OP4. One end of the 42th resistor R42 is connected to the inverting terminal (-) of the fourth OP amplifier OP4, and the other end is connected to an output terminal of the fourth OP amplifier OP4 through which a compensated common voltage is output.

[0059] The first to fourth common voltage compensators VCOMC1 to VCOMC4 output compensated common voltages by applying the same compensation value or different compensation values depending on the resistance ratio between resistors (e.g., R11 and R12). That is, compensated common voltages vcomc1 to vcomc4 may be the same or differ depending on the resistance values of the resistors of the first to fourth common voltage compensators VCOMC1 to VCOMC4. Normally, the first common voltage compensator VCOMC1 and the third common voltage compensator VCOMC3 may output compensated common voltages vcomc1 and vcomc3 by applying the same compensation value. However, the compensated common voltages vcomc1 to vcomc4 output from the first to fourth common voltage compensators VCOMC1 to VCOMC4 may differ from each other since the ratio of the line resistances of the left and right common voltage lines cannot be 1:1. Accordingly, the resistance values of the resistors comprising the first to fourth common voltage compensators VCOMC1 to VCOMC4 are determined by a liquid crystal panel measurement process in the design and engineering phases, before shipment. Meanwhile, a common voltage output from the common voltage generator may be supplied to non-inverting terminals (+) of the first to fourth OP amplifiers OP1 to OP4.

[0060] The preceding description is based on the premise that all of the first to fourth common voltage compensators VCOMC1 to VCOMC4 are used. For a liquid crystal panel, however, the amount of ripple in the com-

mon voltage across the liquid crystal panel may be small or large depending on deviations occurring during manufacture. In this case, design margin can be achieved during the engineering phase by installing a dummy resistor RL at output terminals of the first and second common voltage compensators VCOMC1 and VCOMC2 and a dummy resistor RR at output terminals of the third and fourth common voltage compensators VCOMC3 and VCOMC4. For example, if the resistance value of the first dummy resistor RL is low (below MΩ), the compensated common voltages vcomc1 and vcomc2 output from the output terminals of the first and second common voltage compensators VCOMC1 and VCOMC2 are similar in the amount of compensation. On the contrary, if the resistance value of the first dummy resistor RL is high (above MΩ), the compensated common voltages vcomc1 and vcomc2 output from the output terminals of the first and second common voltage compensators VCOMC1 and VCOMC2 differ in the amount of compensation. The same applies to the third and fourth common voltage compensators VCOMC3 and VCOMC4, so a detailed description thereof will be omitted.

[0061] FIG. 8 illustrates the application of common voltage compensators to a large-area liquid crystal display according to an embodiment of the invention.

[0062] As shown in FIG. 8, the large-area liquid crystal display comprises a liquid crystal panel PNL, gate printed circuit boards (hereinafter, abbreviated as 'gate PCB') GFPCB, source printed circuit boards (hereinafter, abbreviated as 'source PCB') SFPCB, first and second printed circuit boards (hereinafter, abbreviated as 'first and second PCBs') PCB1 and PCB2, gate drivers GDRV, data drivers SDRV, and common voltage compensators VCOMC1 to VCOMC4.

[0063] One side of the gate PCB GFPCB is attached to a non-display area NA on the left and right sides of the liquid crystal panel PNL. The gate PCB GFPCB consists of a flexible circuit board. The gate driver GDRV is mounted on the gate PCB GFPCB. One side of the source PCB SFPCB is attached to the non-display area NA on the bottom of the liquid crystal panel PNL. The source PCB SFPCB consists of a flexible circuit board. The data driver SDRV is mounted on the source PCB SFPCB. The other side of the source PCB SFPCB is attached to the first and second PCBs PCB1 and PCB2. The common voltage compensators VCOMC1 to VCOMC4 are mounted on the first and second PCBs PCB1 and PCB2. A timing controller or a power supply part may be mounted on the first and second PCBs PCB1 and PCB2.

[0064] As shown in FIG. 6, a unilateral common voltage line VCOMU, a left common voltage line VCOML, a right common voltage line VCOMR, a left dummy common voltage line VCOMLF, and a right dummy common voltage line VCOMRF are formed in the non-display area NA of the liquid crystal panel PNL.

[0065] The first common voltage compensator VCOMC1 receives a feedback common voltage through a first common voltage feedback line VCOMFB1L, and

supplies a compensated common voltage through a first common voltage compensation line VCOMC1L. The first common voltage feedback line VCOMFB1L and the first common voltage compensation line VCOMC1L are wired to pass through the source PCBs SFPCB, the gate PCBs GFPCB, and the non-display area NA on the left side of the liquid crystal panel PNL. Likewise, the third common voltage feedback line VCOMFB3L and third common voltage compensation line VCOMC3L of the third common voltage compensator VCOMC3 are wired to pass through the source PCBs SFPCB, the gate PCBs GFPCB, and the non-display area NA on the right side of the liquid crystal panel PNL.

[0066] The second common voltage compensator VCOMC2 receives a feedback common voltage through a second common voltage feedback line VCOMFB2L, and supplies a compensated common voltage through a second common voltage compensation line VCOMC2L. The second common voltage feedback line VCOMFB2L and the second common voltage compensation line VCOMC2L are wired to pass through the source PCB SFPCB, the gate PCB GFPCB, and the non-display area NA on the left side of the liquid crystal panel PNL. Likewise, the fourth common voltage feedback line VCOMFB4L and fourth common voltage compensation line VCOMC4L of the fourth common voltage compensator VCOMC4 are wired to pass through the source PCB SFPCB, the gate PCB GFPCB, and the non-display area NA on the right side of the liquid crystal panel PNL.

[0067] Routing the common voltage feedback lines and the common voltage compensation lines according to the above-described structure can minimize the problem of overlap with the lines formed in the non-display area NA on the left and right sides of the liquid crystal panel PNL, thereby preventing signal distortions caused by coupling.

[0068] FIG. 9 is a view for explaining another concept of compensation by a common voltage compensator. FIGS. 10 to 13 are illustrations showing a variety of patterns of common voltage lines for common voltage compensation, wherein Figures 12 and 13 illustrate embodiments of the invention.

[0069] As shown in FIG. 9, the common voltage compensator VCOMC receives a feedback common voltage from the common voltage lines formed on both the left and right sides of the liquid crystal panel. The common voltage compensator VCOMC outputs left and right compensated common voltages vcomcL and vcomcR based on first to fourth feedback common voltages vcomFB1 to vcomFB4. The left and right compensated common voltages vcomcL and vcomcR output from the common voltage compensator VCOMC are re-supplied to the common voltage lines formed on both the left and right sides of the liquid crystal panel PNL.

[0070] Specifically, a display area AA is divided into a first display area AA1 and a second display area AA2 with respect to the center AAC of the liquid crystal panel PNL. A first common voltage compensator VCOMC1 re-

ceives first and second feedback common voltages vcomFB1 and vcomFB2 from the left side of the first and second display areas AA1 and AA2, and supplies a left compensated common voltage vcomcL to the left side of the first and second display areas AA1 and AA2.

[0071] A second common voltage compensator VCOMC2 receives third and fourth feedback common voltages vcomFB3 and vcomFB4 from the left side of the first and second display areas AA1 and AA2, and supplies a right compensated common voltage vcomcR to the left side of the first and second display areas AA1 and AA2.

[0072] By dividing the display area AA into the first display area AA1 and the second display area AA2 with respect to the center AAC of the liquid crystal panel PNL and compensating the common voltage vcom fully considering that the amount of ripple depends on the position in the liquid crystal panel PNL, thereby enabling more uniform and accurate compensation of the common voltage vcom.

[0073] The pattern of common voltage lines is formed as shown in FIGS. 1 to 3, in order to compensate the common voltage vcom fully considering that the amount of ripple depends on the size of the liquid crystal panel PNL.

[0074] FIG. 14 is a circuit configuration diagram illustrating the common voltage compensator according to Figure 9. FIG. 15 a waveform diagram illustrating feedback common voltages and a compensated common voltage.

[0075] As shown in FIGS. 9 to 14, the first and second common voltage compensators VCOMC1 and VCOMC2 comprise resistors and OP amplifiers. The first common voltage compensator VCOMC1 comprises an 11th resistor R11, a 12th resistor R12, a 13th resistor R13, and a first OP amplifier OP1. The second common voltage compensator VCOMC2 comprises a 21th resistor R21, a 22th resistor R22, a 23th resistor R23, and a second OP amplifier OP2.

[0076] The relation of connection between the 11th, 12th, and 13th resistors R11, R12, and R13 and first OP amplifier OP1 included in the first common voltage compensator VCOMC1 is as follows. One end of the 11th resistor R11 is connected to a common voltage line from which a feedback common voltage is received, and the other end is connected to an inverting terminal (-) of the first OP amplifier OP1. One end of the 12th resistor R12 is connected to the inverting terminal (-) of the first OP amplifier OP1, and the other end is connected to an output terminal of the first OP amplifier OP1 through which a compensated common voltage is output. One end of the 13th resistor R13 is connected to a common voltage line from which a feedback common voltage is received, and the other end is connected to one end of the 11th resistor R11. The first common voltage compensator VCOMC1 outputs a left compensated common voltage vcomcL based on the sum of the first and second feedback common voltages vcomFB1 and vcomFB2.

[0077] The relation of connection between the 21th,

22th, and 23th resistors R21, R22, and R23 and second OP amplifier OP2 included in the second common voltage compensator VCOMC2 is as follows. One end of the 21th resistor R21 is connected to a common voltage line from which a feedback common voltage is received, and the other end is connected to an inverting terminal (-) of the second OP amplifier OP2. One end of the 22th resistor R22 is connected to the inverting terminal (-) of the second OP amplifier OP2, and the other end is connected to an output terminal of the second OP amplifier OP2 through which a compensated common voltage is output. One end of the 23th resistor R23 is connected to a common voltage line from which a feedback common voltage is received, and the other end is connected to one end of the 21th resistor R21. The second common voltage compensator VCOMC2 outputs a right compensated common voltage vcomcR based on the sum of the third and fourth feedback common voltages vcomFB3 and vcomFB4.

[0078] For instance, when the first and second common voltages vcomFB1 and vcomFB2 are supplied, the first common voltage compensator VCOMC1 inversely compensates the first and second feedback common voltages vcomFB1 and vcomFB2 to output the left common voltage vcomL. Likewise, the second common voltage compensator VCOMC2 has the compensation characteristic shown in FIG. 15. Meanwhile, the common voltage output from the common voltage generator may be supplied to the non-inverting terminals (+) of the first and second OP amplifiers OP1 and OP2.

[0079] As explained above, the present invention employs a structure which is capable of dividing a common voltage line path VCOM PATH within a liquid crystal panel into two, receiving a feedback common voltage from the left and right sides of a display area by using COF (chip on film) and LOG (line on glass), and transferring a compensated common voltage, in order to figure out and compensate for the amount of ripple in the common voltage of the liquid crystal panel. Also, the present invention employs different compensation structures for different areas in which different feedback common voltages are received from the left and right sides of the display area and different compensated common voltages are supplied.

[0080] As seen from above, the present invention provides a liquid crystal display which minimizes signal distortions caused by line resistance and coupling (which brings about picture quality problems such as horizontal crosstalk) by enabling optimal compensation design suited to the characteristics of ripple in the common voltage within the liquid crystal panel.

Claims

1. A liquid crystal display comprising:

a liquid crystal panel (PNL) comprising a display

area (AA) and a non-display area (NA), the display area (AA) being defined into a first display area (AA1) and a second display area (AA2) with respect to a center line (AAC) of the liquid crystal panel (PNL), wherein the liquid crystal panel (PNL) comprises a matrix of subpixels (SP) defined by data lines (DL) and gate lines (GL) crossing each other and is configured to receive a common voltage through the second display area (AA2);

left and right common voltage lines (VCOML, VCOMR) located in the non-display area (NA) on the left and right sides of the display area (AA), the left common voltage line (VCOML) and the right common voltage line (VCOMR) being connected to common voltage lines (VCOM) formed in parallel, for every gate line, in the display area (AA), wherein the center line (AAC) is defined parallel to the common voltage lines (VCOM) formed in the display area (AA) and perpendicular to the left and right common voltage lines (VCOML, VCOMR);

a unilateral common voltage line (VCOMU) located in the non-display area (NA) on one side of the first display area (AA1) and connected between the left and right common voltage lines (VCOML, VCOMR); and

a common voltage compensator (VCOMC) configured to receive feedback common voltages (vcomFB) from the left and right common voltage lines (VCOML, VCOMR) and to output compensated common voltages (vcomc) based on the feedback common voltages (vcomFB), **characterized in that** the left and right common voltage lines (VCOML, VCOMR) formed in the non-display area (NA) on the left and right sides of the first display area (AA1) are wider than the left and right common voltage lines (VCOML, VCOMR) formed in the non-display area (NA) on the left and right sides of the second display area (AA2),

wherein the common voltage compensator (VCOMC) is configured to supply different compensated common voltages (vcomc) to the first display area (AA1) and the second display area (AA2) and wherein the common voltage compensator (VCOMC) comprises first to fourth common voltage compensators (VCOMC1, VCOMC2, VCOMC3, VCOMC4),

the first common voltage compensator (VCOMC1) is configured to receive a first feedback common voltage (vcomFB1) from the unilateral common voltage line (VCOMU) formed in the non-display area (NA) on the left side of the first display area (AA1) and to supply a first compensated common voltage (vcomc1) to the unilateral common voltage line (VCOMU) formed in the non-display area (NA) on the left

side of the first display area (AA1),
 the second common voltage compensator (VCOMC2) is configured to receive a second feedback common voltage (vcomFB2) from the left common voltage line (VCOML) formed in the non-display area (NA) on the left side of the second display area (AA2) and to supply a second compensated common voltage (vcomc2) to the left common voltage line (VCOML) formed in the non-display area (NA) on the left side of the second display area (AA2),
 the third common voltage compensator (VCOMC3) is configured to receive a third feedback common voltage (vcomFB3) from the unilateral common voltage line (VCOMU) formed in the non-display area (NA) on the right side of the first display area (AA1) and to supply a third compensated common voltage (vcomc3) to the unilateral common voltage line (VCOMU) formed in the non-display area (NA) on the right side of the first display area (AA1), and
 the fourth common voltage compensator (VCOMC4) is configured to receive a fourth feedback common voltage (vcomFB4) from the right common voltage line (VCOMR) formed in the non-display area (NA) on the right side of the second display area (AA2) and to supply a fourth compensated common voltage (vcomc4) to the right common voltage line (VCOMR) formed in the non-display area (NA) on the right side of the second display area (AA2).

2. The liquid crystal display of claim 1, wherein:

the left and right common voltage lines (VCOML, VCOMR) formed in the non-display area (NA) on the left and right sides of the second display area (AA2) comprise dummy common voltage lines (VCOMLF and VCOMRF) which are physically separated from the left and right common voltage lines (VCOML, VCOMR) in the non-display area (NA) on the left and right sides of the second display area (AA2),
 the second common voltage compensator (VCOMC2) is configured to receive the second feedback common voltage (vcomFB2) from the left dummy common voltage line (VCOMLF) formed in the non-display area (NA) on the left side of the second display area (AA2), and
 the fourth common voltage compensator (VCOMC4) is configured to receive the fourth feedback common voltage (vcomFB4) from the right dummy common voltage line (VCOMRF) formed in the non-display area (NA) on the right side of the second display area (AA2).

3. The liquid crystal display of claim 1, wherein the common voltage compensator (VCOMC) comprises:

a first resistor (RL) for electrically connecting an output terminal of the first common voltage compensator (VCOMC1) and an output terminal of the second common voltage compensator (VCOMC2); and
 a second resistor (RR) for electrically connecting an output terminal of the third common voltage compensator (VCOMC3) and an output terminal of the fourth common voltage compensator (VCOMC4).

4. The liquid crystal display of claim 3, wherein the first to fourth common voltage compensators (VCOMC1, VCOMC2, VCOMC3, VCOMC4) are configured to receive feedback common voltages through common voltage feedback lines (VCOMFB1L, VCOMFB2L, VCOMFB3L, VCOMFB4L), and to supply compensated common voltages through common voltage compensation lines (VCOMC1L, VCOMC2L, VCOMC3L, VCOMC4L), and the first and third common voltage feedback lines (VCOMFB1L, VCOMFB3L) and the first and third common voltage compensation lines (VCOMC1L, VCOMC3L) are wired to pass through source printed circuit boards (SFPCB) each having a data driver (SDRV) mounted thereon, gate printed circuit boards (GFPCB) each having a gate driver (GDRV) mounted thereon, and the non-display area (NA) on the left and right sides of the liquid crystal panel (PNL).

Patentansprüche

1. Eine Flüssigkristallanzeige aufweisend:

ein Flüssigkristallpanel (PNL), welches einen Anzeigebereich (AA) und einen Nicht-Anzeigebereich (NA) aufweist, wobei der Anzeigebereich (AA) definiert ist in einen ersten Anzeigebereich (AA1) und einen zweiten Anzeigebereich (AA2) in Bezug auf eine Mittellinie (AAC) des Flüssigkristallpanels (PNL), wobei das Flüssigkristallpanel (PNL) eine Matrix von Subpixeln (SP) aufweist, die definiert ist durch sich kreuzende Datenleitungen (DL) und Gate-Leitungen (GL) und die konfiguriert ist zum Empfangen einer Gemeinsame-Spannung durch den zweiten Anzeigebereich (AA2);
 eine linke und eine rechte Gemeinsame-Spannung-Leitung (VCOML, VCOMR), die in dem Nicht-Anzeigebereich (NA) auf der linken bzw. rechten Seite des Anzeigebereichs (AA) angeordnet sind, wobei die linke Gemeinsame-Spannung-Leitung (VCOML) und die rechte Gemeinsame-Spannung-Leitung (VCOMR) mit Gemeinsame-Spannung-Leitungen (VCOM) verbunden sind, welche, für jede Gate-Leitung, parallel in dem Anzeigebereich (AA) gebildet sind,

wobei die Mittellinie (AAC) parallel zu den Gemeinsame-Spannung-Leitungen (VCOM), welche in dem Anzeigebereich (AA) gebildet sind, und senkrecht zu der linken und rechten Gemeinsame-Spannung-Leitung (VCOML, VCOMR) definiert ist;
 eine unilaterale Gemeinsame-Spannung-Leitung (VCOMU), welche in dem Nicht-Anzeigebereich (NA) auf einer Seite des ersten Anzeigebereichs (AA1) angeordnet ist und zwischen die linke und rechte Gemeinsame-Spannung-Leitung (VCOML, VCOMR) geschaltet ist; und einen Gemeinsame-Spannung-Kompensator (VCOMC), der konfiguriert ist zum Empfangen von Rückmelde-Gemeinsame-Spannungen (vcomFB) von der linken und rechten Gemeinsame-Spannung-Leitungen (VCOML, VCOMR) und zum Ausgeben von Kompensierte-Gemeinsame-Spannungen (vcomc) basierend auf den Rückmelde-Gemeinsame-Spannungen (vcomFB),

dadurch gekennzeichnet, dass

die linke und die rechte Gemeinsame-Spannung-Leitung (VCOML, VCOMR), die in dem Nicht-Anzeigebereich (NA) auf der linken bzw. rechten Seite des ersten Anzeigebereichs (AA1) gebildet sind, breiter sind als die linke und die rechte Gemeinsame-Spannung-Leitung (VCOML, VCOMR), die in dem Nicht-Anzeigebereich (NA) auf der linken bzw. rechten Seite des zweiten Anzeigebereichs (AA2) gebildet sind,

wobei der Gemeinsame-Spannung-Kompensator (VCOMC) konfiguriert ist zum Bereitstellen von verschiedenen Kompensierte-Gemeinsame-Spannungen (vcomc) an den ersten Anzeigebereich (AA1) und den zweiten Anzeigebereich (AA2) und wobei der Gemeinsame-Spannung-Kompensator (VCOMC) einen ersten bis vierten Gemeinsame-Spannung-Kompensator (VCOMC1, VCOMC2, VCOMC3, VCOMC4) aufweist,

wobei der erste Gemeinsame-Spannung-Kompensator (VCOMC1) konfiguriert ist zum Empfangen einer ersten Rückmelde-Gemeinsame-Spannung (vcomFB1) von der unilateralen Gemeinsame-Spannung-Leitung (VCOMU), die in dem Nicht-Anzeigebereich (NA) auf der linken Seite des ersten Anzeigebereichs (AA1) gebildet ist, und zum Bereitstellen einer ersten Kompensierte-Gemeinsame-Spannung (vcomc1) an die unilaterale Gemeinsame-Spannung-Leitung (VCOMU), die in dem Nicht-Anzeigebereich (NA) auf der linken Seite des ersten Anzeigebereichs (AA1) gebildet ist,

wobei der zweite Gemeinsame-Spannung-Kompensator (VCOMC2) konfiguriert ist zum Empfangen einer zweiten Rückmelde-Gemeinsame-Spannung (vcomFB2) von der linken Gemeinsame-Spannung-Leitung (VCOML), die in dem Nicht-Anzeigebereich (NA) auf der linken Seite des zweiten Anzeigebereichs (AA2) gebildet ist, und zum Bereitstellen einer zweiten Kompensierte-Gemeinsame-Spannung (vcomc2) an die linke Gemeinsame-Spannung-Leitung (VCOML), die in dem Nicht-Anzeigebereich (NA) auf der linken Seite des zweiten Anzeigebereichs (AA2) gebildet ist,

same-Spannung (vcomFB2) von der linken Gemeinsame-Spannung-Leitung (VCOML), die in dem Nicht-Anzeigebereich (NA) auf der linken Seite des zweiten Anzeigebereichs (AA2) gebildet ist, und zum Bereitstellen einer zweiten Kompensierte-Gemeinsame-Spannung (vcomc2) an die linke Gemeinsame-Spannung-Leitung (VCOML), die in dem Nicht-Anzeigebereich (NA) auf der linken Seite des zweiten Anzeigebereichs (AA2) gebildet ist, wobei der dritte Gemeinsame-Spannung-Kompensator (VCOMC3) konfiguriert ist zum Empfangen einer dritten Rückmelde-Gemeinsame-Spannung (vcomFB3) von der unilateralen Gemeinsame-Spannung-Leitung (VCOMU), die in dem Nicht-Anzeigebereich (NA) auf der rechten Seite des ersten Anzeigebereichs (AA1) gebildet ist, und zum Bereitstellen einer dritten Kompensierte-Gemeinsame-Spannung (vcomc3) an die unilaterale Gemeinsame-Spannung-Leitung (VCOMU), die in dem Nicht-Anzeigebereich (NA) auf der rechten Seite des ersten Anzeigebereichs (AA1) gebildet ist, und wobei der vierte Gemeinsame-Spannung-Kompensator (VCOMC4) konfiguriert ist zum Empfangen einer vierten Rückmelde-Gemeinsame-Spannung (vcomFB4) von der rechten Gemeinsame-Spannung-Leitung (VCOMR), die in dem Nicht-Anzeigebereich (NA) auf der rechten Seite des zweiten Anzeigebereichs (AA2) gebildet ist, und zum Bereitstellen einer vierten Kompensierte-Gemeinsame-Spannung (vcomc4) an die rechte Gemeinsame-Spannung-Leitung (VCOMR), die in dem Nicht-Anzeigebereich (NA) auf der rechten Seite des zweiten Anzeigebereichs (AA2) gebildet ist.

2. Die Flüssigkristallanzeige gemäß Anspruch 1, wobei:

die linke und die rechte Gemeinsame-Spannung-Leitung (VCOML, VCOMR), die in dem Nichtanzeigebereich (NA) auf der linken bzw. rechten Seite des zweiten Anzeigebereichs (AA2) gebildet sind, Gemeinsame-Spannung-Dummy-Leitungen (VCOMLF und VCOMRF) aufweisen, die physisch von der linken bzw. rechten Gemeinsame-Spannung-Leitung (VCOML, VCOMR) in dem Nicht-Anzeigebereich (NA) auf der linken bzw. rechten Seite des zweiten Anzeigebereichs (AA2) separiert sind, der zweite Gemeinsame-Spannung-Kompensator (VCOMC2) konfiguriert ist zum Empfangen der zweiten Rückmelde-Gemeinsame-Spannung (vcomFB2) von der linken Gemeinsame-Spannung-Dummy-Leitung (VCOMLF), die in dem Nicht-Anzeigebereich (NA) auf der linken Seite des zweiten Anzeigebereichs (AA2) gebildet ist, und zum Bereitstellen einer zweiten Kompensierte-Gemeinsame-Spannung (vcomc2) an die linke Gemeinsame-Spannung-Dummy-Leitung (VCOMLF), die in dem Nicht-Anzeigebereich (NA) auf der linken Seite des zweiten Anzeigebereichs (AA2) gebildet ist.

- gebildet ist, und
 der vierte Gemeinsame-Spannung-Kompensator (VCOMC4) konfiguriert ist zum Empfangen der vierten Rückmelde-Gemeinsame-Spannung (vcomFB4) von der rechten Gemeinsame-Spannung-Dummy-Leitung (VCOMRF), die in dem Nichtanzeigebereich (NA) auf der rechten Seite des zweiten Anzeigebereichs (AA2) gebildet ist.
3. Die Flüssigkristallanzeige gemäß Anspruch 1, wobei der Gemeinsame-Spannung-Kompensator (VCOMC) aufweist:
- einen ersten Widerstand (RL), um einen Ausgangsanschluss des ersten Gemeinsame-Spannung-Kompensators (VCOMC1) elektrisch mit einem Ausgangsanschluss des zweiten Gemeinsame-Spannung-Kompensators (VCOMC2) zu verbinden; und
 einen zweiten Widerstand (RR), um einen Ausgangsanschluss des dritten Gemeinsame-Spannung-Kompensators (VCOMC3) elektrisch mit einem Ausgangsanschluss des vierten Gemeinsame-Spannung-Kompensators (VCOMC4) zu verbinden.
4. Die Flüssigkristallanzeige gemäß Anspruch 3, wobei der erste bis vierte Gemeinsame-Spannung-Kompensator (VCOMC1, VCOMC2, VCOMC3, VCOMC4) konfiguriert sind zum Empfangen von Rückmelde-Gemeinsame-Spannungen durch Gemeinsame-Spannung-Rückmeldeleitungen (VCOMFB1L, VCOMFB2L, VCOMFB3L, VCOMFB4L), und zum Bereitstellen von Kompensierte-Gemeinsame-Spannungen durch Gemeinsame-Spannung-Kompensationsleitungen (VCOMC1L, VCOMC2L, VCOMC3L, VCOMC4L), und
 wobei die erste und die dritte Gemeinsame-Spannung-Rückmeldeleitung (VCOMFB1L, VCOMFB3L) und die erste und die dritte Gemeinsame-Spannung-Kompensationsleitung (VCOMC1L, VCOMC3L) so verlegt sind, dass sie durch Source-Leiterplatten (SFPCB), von denen jede einen darauf montierten Datentreiber (SDRV) hat, Gate-Leiterplatten (GFP-CB), von denen jede einen darauf montierten Gate-Treiber (GDRV) hat, und den Nicht-Anzeigebereich (NA) auf der linken bzw. rechten Seite des Flüssigkristallpanels (PNL) verlaufen.

Revendications

1. Écran d'affichage à cristaux liquides comprenant :
- un panneau à cristaux liquides (PNL) comprenant une zone d'affichage (AA) et une zone de

non-affichage (NA), la zone d'affichage (AA) étant définie en une première zone d'affichage (AA1) et une seconde zone d'affichage (AA2) par rapport à une ligne centrale (AAC) du panneau à cristaux liquides (PNL), dans lequel le panneau à cristaux liquides (PNL) comprend une matrice de sous-pixels (SP) définie par des lignes de données (DL) et des lignes de grille (GL) se croisant mutuellement, et est configuré de manière à recevoir une tension commune à travers la seconde zone d'affichage (AA2) ;
 des lignes de tension commune gauche et droite (VCOML, VCOMR) situées dans la zone de non-affichage (NA) sur les côtés gauche et droit de la zone d'affichage (AA), la ligne de tension commune gauche (VCOML) et la ligne de tension commune droite (VCOMR) étant connectées à des lignes de tension commune (VCOM) formées en parallèle, pour chaque ligne de grille, dans la zone d'affichage (AA), dans lequel la ligne centrale (AAC) est définie parallèlement aux lignes de tension commune (VCOM) formées dans la zone d'affichage (AA) et perpendiculairement aux lignes de tension commune gauche et droite (VCOML, VCOMR) ;
 une ligne de tension commune unilatérale (VCOMU) située dans la zone de non-affichage (NA) sur un côté de la première zone d'affichage (AA1) et connectée entre les lignes de tension commune gauche et droite (VCOML, VCOMR) ;
 et
 un compensateur de tension commune (VCOMC) configuré de manière à recevoir des tensions communes de rétroaction (vcomFB) en provenance des lignes de tension commune gauche et droite (VCOML, VCOMR) et à fournir en sortie des tensions communes compensées (vcomc) sur la base des tensions communes de rétroaction (vcomFB) ;
caractérisé en ce que
 les lignes de tension commune gauche et droite (VCOML, VCOMR) formées dans la zone de non-affichage (NA) sur les côtés gauche et droit de la première zone d'affichage (AA1) sont plus larges que les lignes de tension commune gauche et droite (VCOML, VCOMR) formées dans la zone de non-affichage (NA) sur les côtés gauche et droit de la seconde zone d'affichage (AA2) ;
 dans lequel le compensateur de tension commune (VCOMC) est configuré de manière à fournir des tensions communes compensées distinctes (vcomc) à la première zone d'affichage (AA1) et à la seconde zone d'affichage (AA2), et dans lequel le compensateur de tension commune (VCOMC) comprend des premier à quatrième compensateurs de tension commune (VCOMC1, VCOMC2, VCOMC3, VCOMC4) ;

- le premier compensateur de tension commune (VCOMC1) est configuré de manière à recevoir une première tension commune de rétroaction (vcomFB1) en provenance de la ligne de tension commune unilatérale (VCOMU) formée dans la zone de non-affichage (NA) sur le côté gauche de la première zone d'affichage (AA1), et à fournir une première tension commune compensée (vcomc1) à la ligne de tension commune unilatérale (VCOMU) formée dans la zone de non-affichage (NA) sur le côté gauche de la première zone d'affichage (AA1) ;
- le deuxième compensateur de tension commune (VCOMC2) est configuré de manière à recevoir une deuxième tension commune de rétroaction (vcomFB2) en provenance de la ligne de tension commune gauche (VCOML) formée dans la zone de non-affichage (NA) sur le côté gauche de la seconde zone d'affichage (AA2), et à fournir une deuxième tension commune compensée (vcomc2) à la ligne de tension commune gauche (VCOML) formée dans la zone de non-affichage (NA) sur le côté gauche de la seconde zone d'affichage (AA2) ;
- le troisième compensateur de tension commune (VCOMC3) est configuré de manière à recevoir une troisième tension commune de rétroaction (vcomFB3) en provenance de la ligne de tension commune unilatérale (VCOMU) formée dans la zone de non-affichage (NA) sur le côté droit de la première zone d'affichage (AA1), et à fournir une troisième tension commune compensée (vcomc3) à la ligne de tension commune unilatérale (VCOMU) formée dans la zone de non-affichage (NA) sur le côté droit de la première zone d'affichage (AA1) ; et
- le quatrième compensateur de tension commune (VCOMC4) est configuré de manière à recevoir une quatrième tension commune de rétroaction (vcomFB4) en provenance de la ligne de tension commune droite (VCOMR) formée dans la zone de non-affichage (NA) sur le côté droit de la seconde zone d'affichage (AA2), et à fournir une quatrième tension commune compensée (vcomc4) à la ligne de tension commune droite (VCOMR) formée dans la zone de non-affichage (NA) sur le côté droit de la seconde zone d'affichage (AA2).
2. Écran d'affichage à cristaux liquides selon la revendication 1, dans lequel :
- les lignes de tension commune gauche et droite (VCOML, VCOMR) formées dans la zone de non-affichage (NA) sur les côtés gauche et droit de la seconde zone d'affichage (AA2) comprennent des lignes de tension commune fictives (VCOMLF et VCOMRF) qui sont physiquement séparées des lignes de tension commune gauche et droite (VCOML, VCOMR) dans la zone de non-affichage (NA) sur les côtés gauche et droit de la seconde zone d'affichage (AA2) ;
- le deuxième compensateur de tension commune (VCOMC2) est configuré de manière à recevoir la deuxième tension commune de rétroaction (vcomFB2) en provenance de la ligne de tension commune fictive gauche (VCOMLF) formée dans la zone de non-affichage (NA) sur le côté gauche de la seconde zone d'affichage (AA2) ; et
- le quatrième compensateur de tension commune (VCOMC4) est configuré de manière à recevoir la quatrième tension commune de rétroaction (vcomFB4) en provenance de la ligne de tension commune fictive droite (VCOMRF) formée dans la zone de non-affichage (NA) sur le côté droit de la seconde zone d'affichage (AA2).
3. Écran d'affichage à cristaux liquides selon la revendication 1, dans lequel le compensateur de tension commune (VCOMC) comprend :
- une première résistance (RL) destinée à connecter électriquement une borne de sortie du premier compensateur de tension commune (VCOMC1) et une borne de sortie du deuxième compensateur de tension commune (VCOMC2) ; et
- une seconde résistance (RR) destinée à connecter électriquement une borne de sortie du troisième compensateur de tension commune (VCOMC3) et une borne de sortie du quatrième compensateur de tension commune (VCOMC4).
4. Écran d'affichage à cristaux liquides selon la revendication 3, dans lequel les premier à quatrième compensateurs de tension commune (VCOMC1, VCOMC2, VCOMC3, VCOMC4) sont configurés de manière à recevoir des tensions communes de rétroaction à travers des lignes de rétroaction de tension commune (VCOMFB1 L, VCOMFB2L, VCOMFB3L, VCOMFB4L), et à fournir des tensions communes compensées à travers des lignes de compensation de tension commune (VCOMC1L, VCOMC2L, VCOMC3L, VCOMC4L) ; et
- les première et troisième lignes de rétroaction de tension commune (VCOMFB1L, VCOMFB3L) et les première et troisième lignes de compensation de tension commune (VCOMC1 L, VCOMC3L) sont câblées afin de transiter par des cartes de circuits imprimés de source (SFPCB) présentant chacune un pilote de données (SDRV) monté sur celles-ci, des cartes de circuits imprimés de grille (GFPCB) présentant chacune un pilote de grille (GDRV) monté sur celles-ci, et la zone de non-affichage (NA) sur

les côtés gauche et droit du panneau à cristaux liquides (PNL).

5

10

15

20

25

30

35

40

45

50

55

Fig. 1

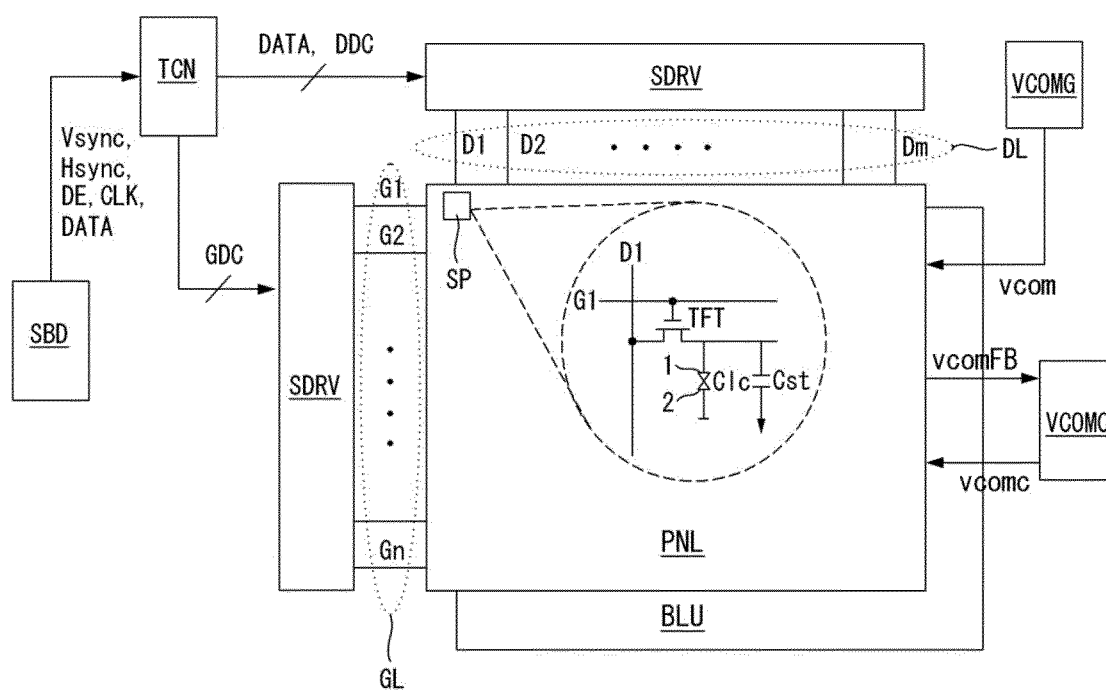


Fig. 2

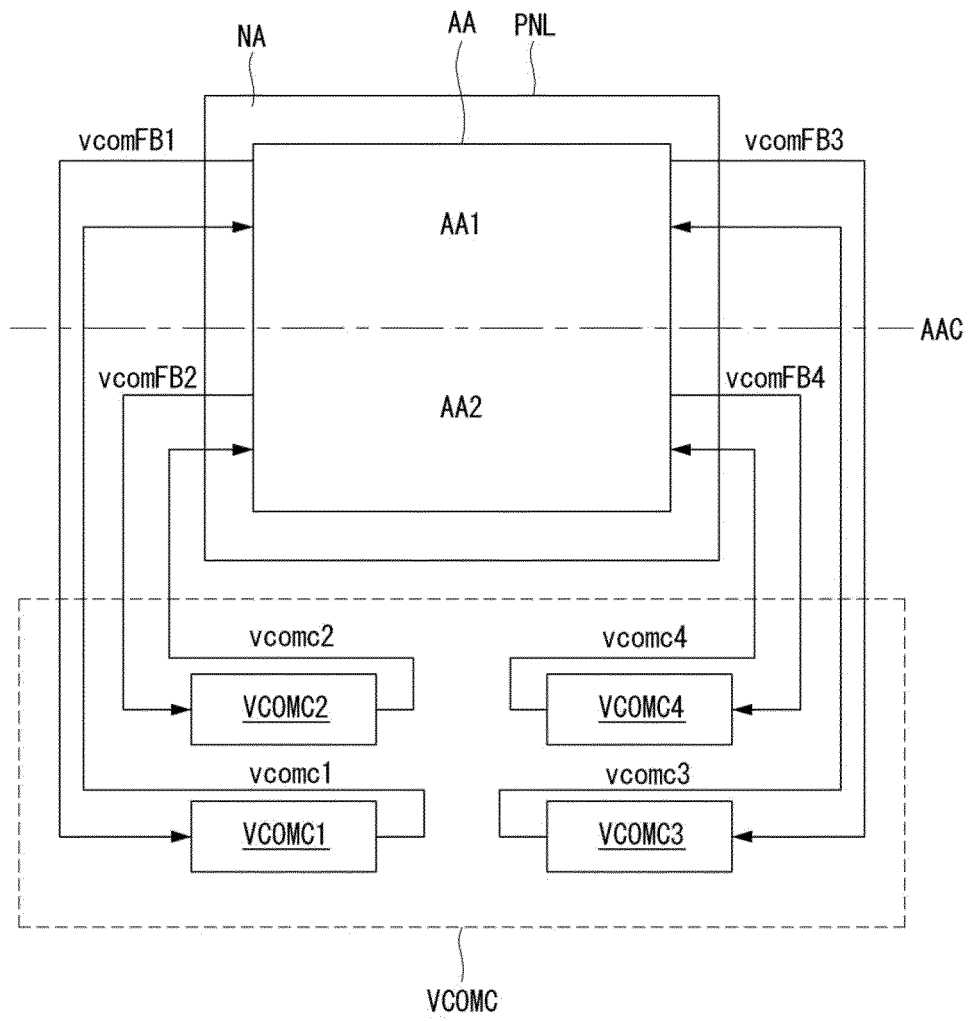


Fig. 3

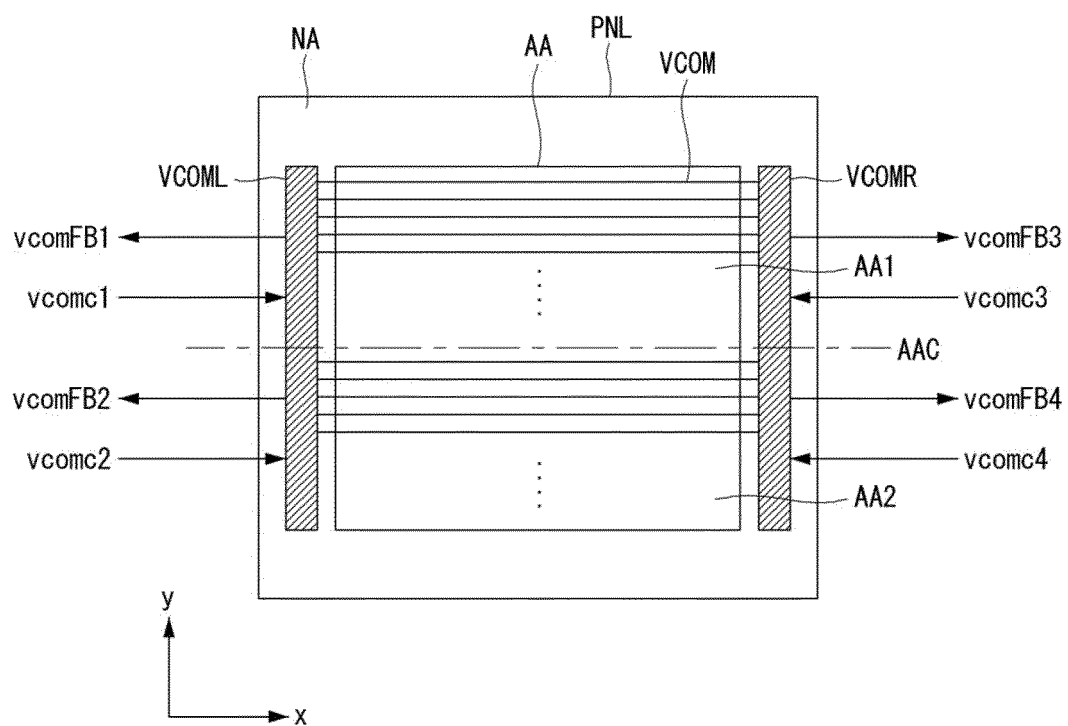


Fig. 4

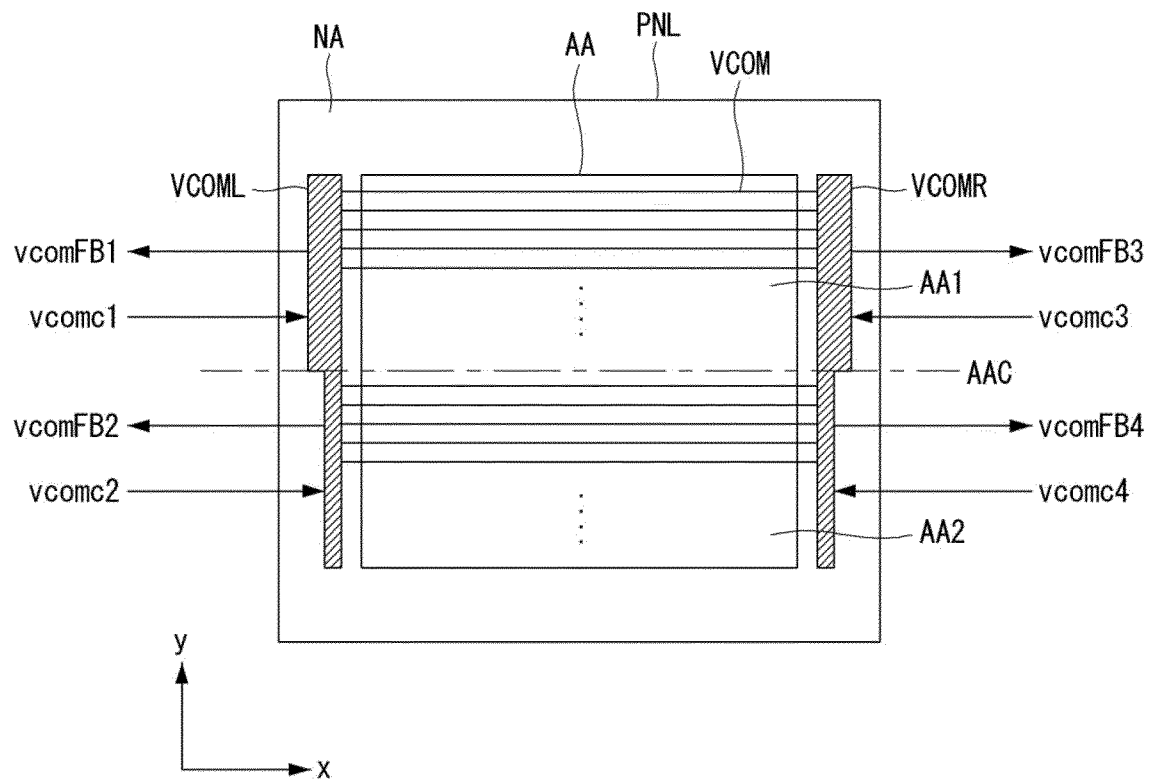


Fig. 5

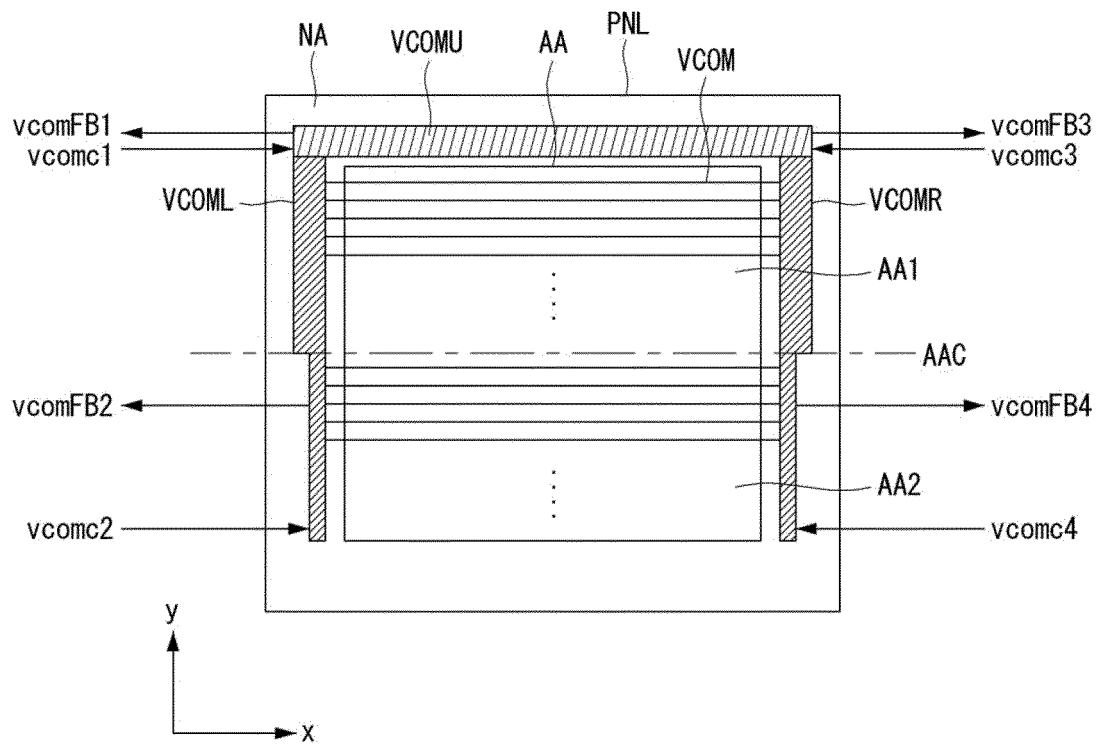


Fig. 6

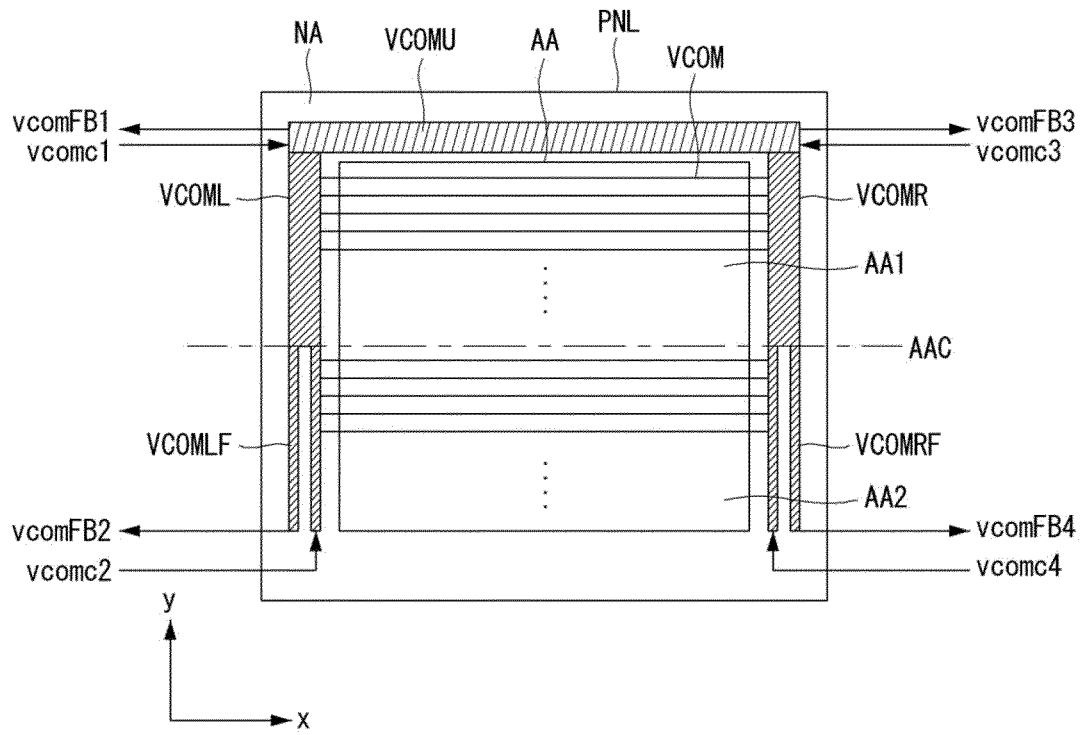


Fig. 7

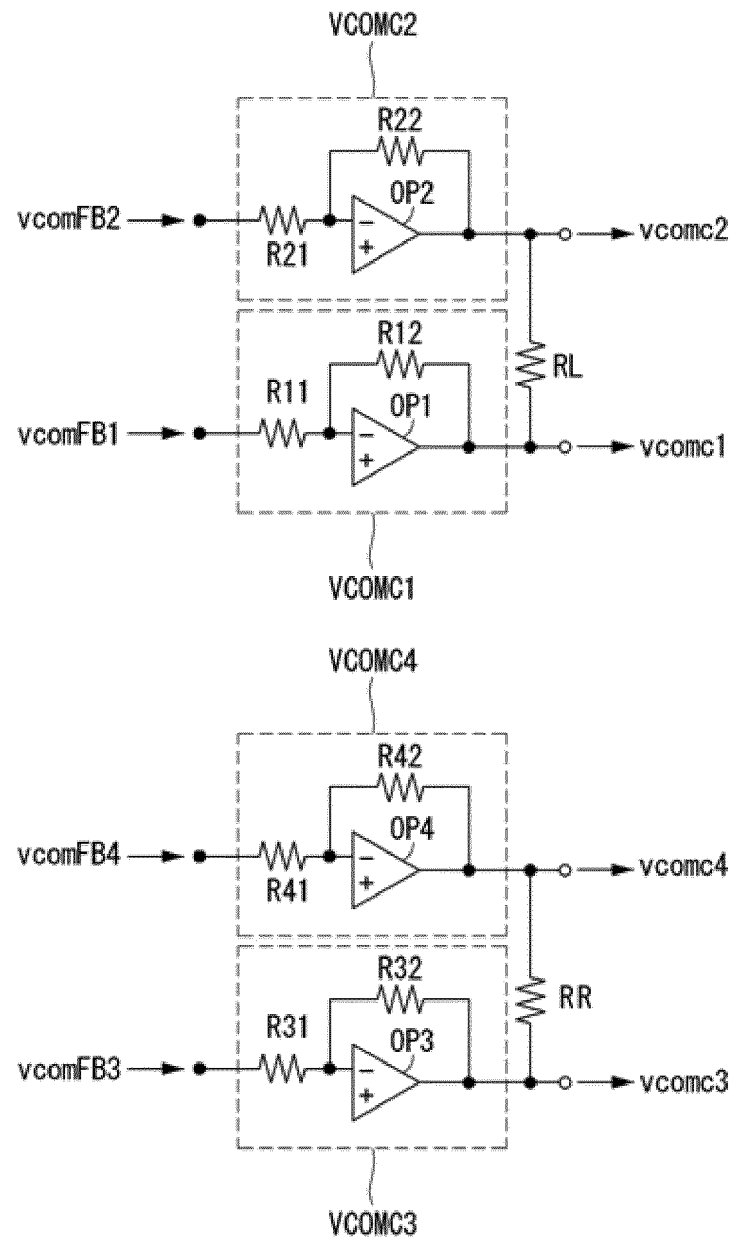


Fig. 8

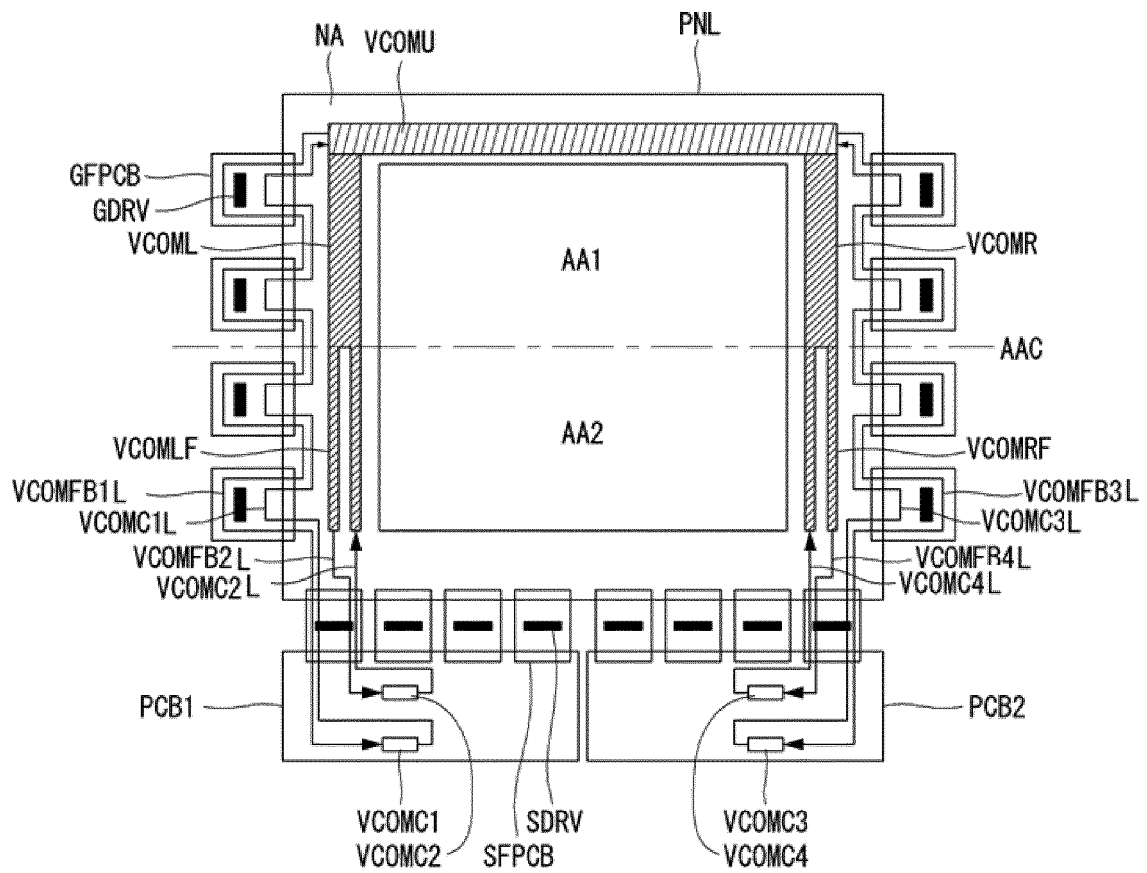


Fig. 9

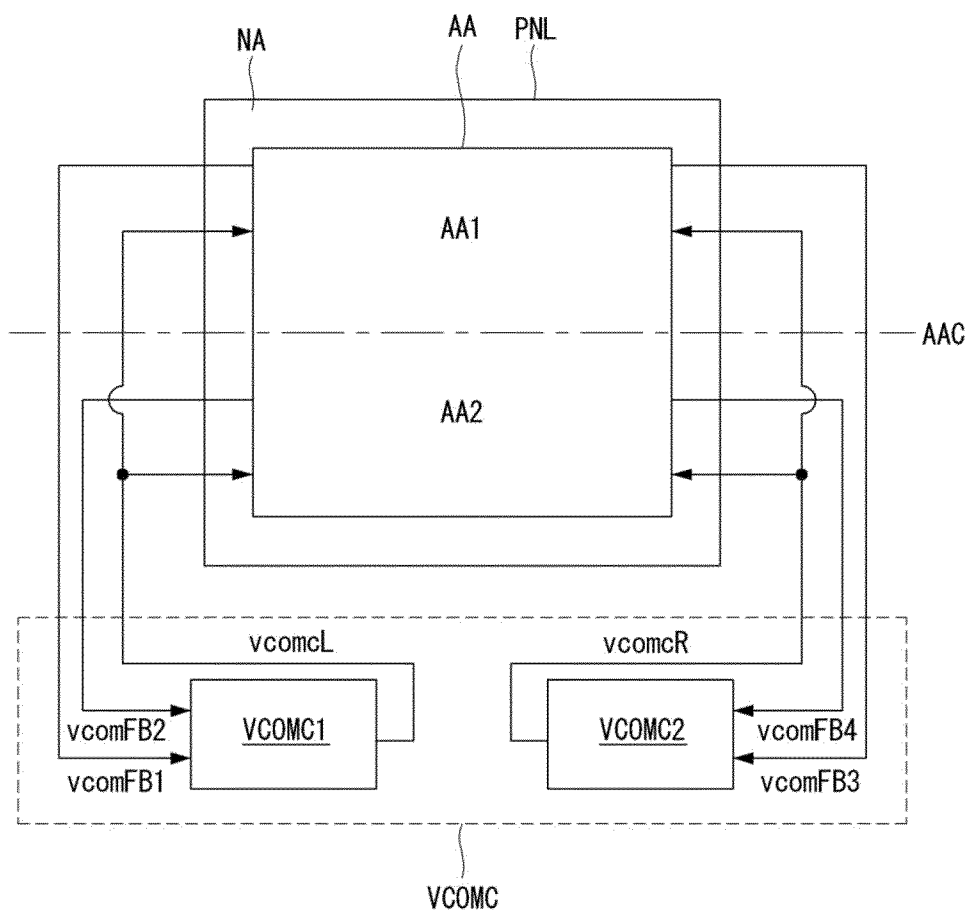


Fig. 10

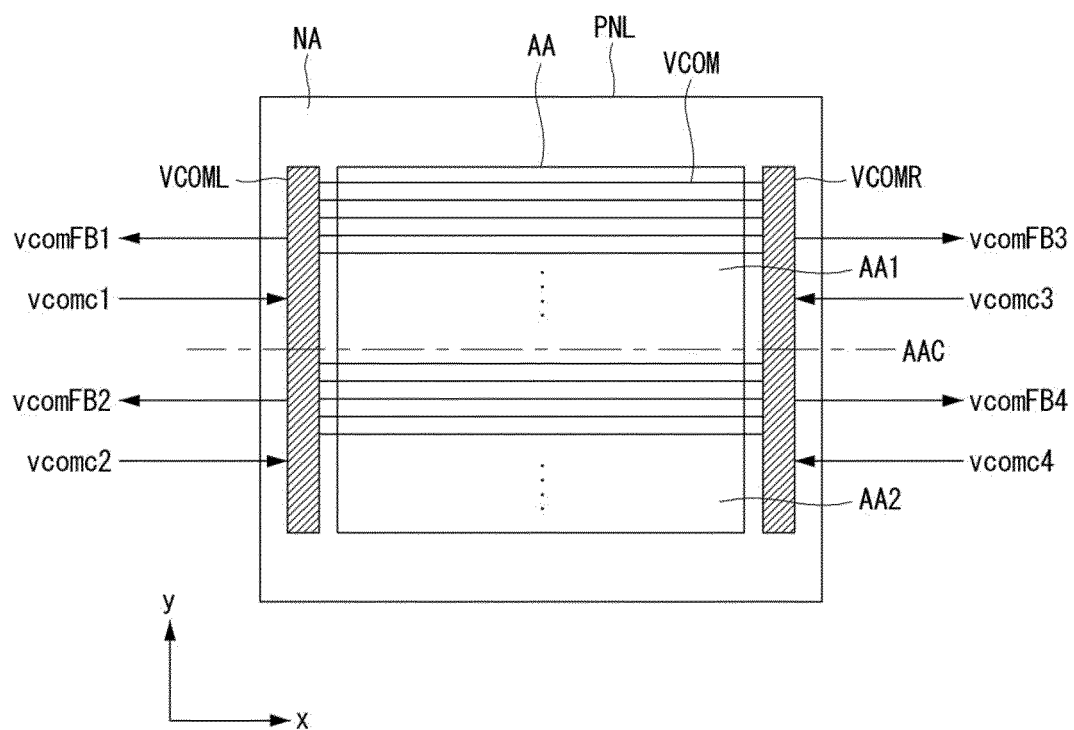


Fig. 11

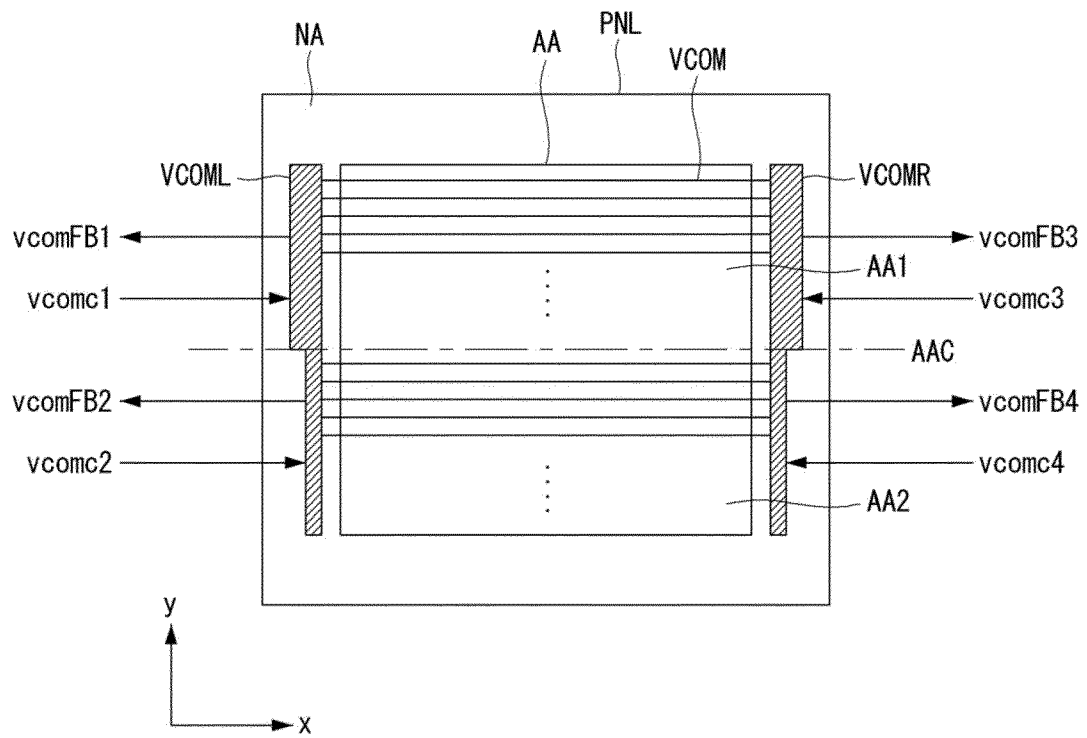


Fig. 12

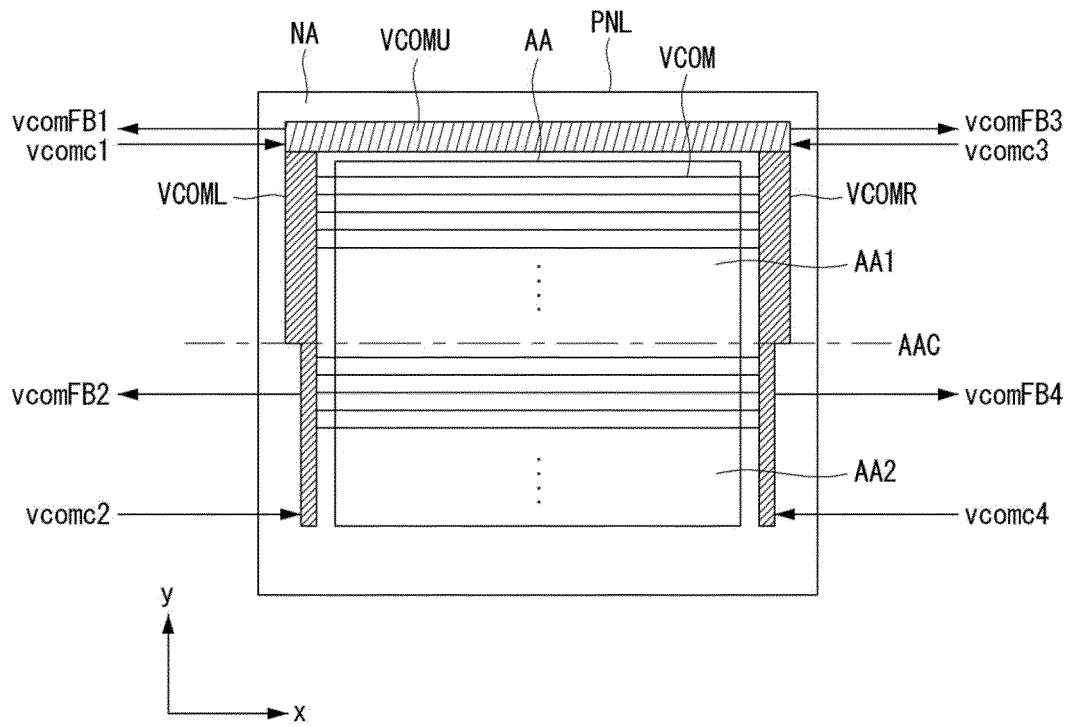


Fig. 13

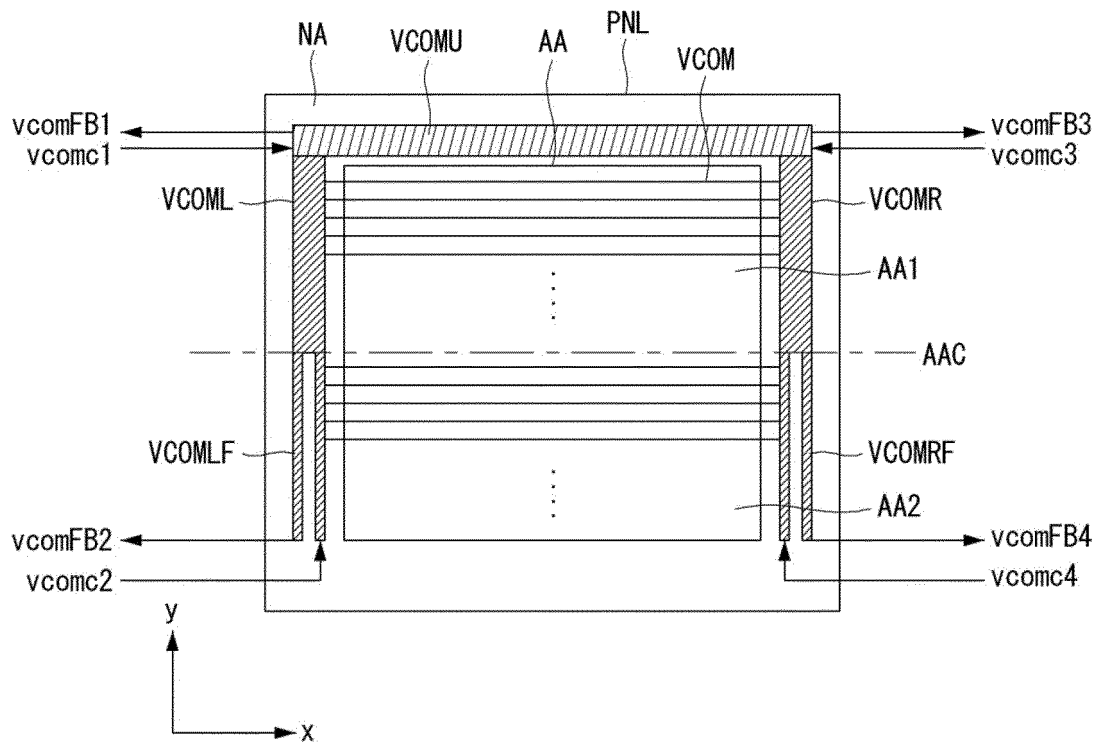


Fig. 14


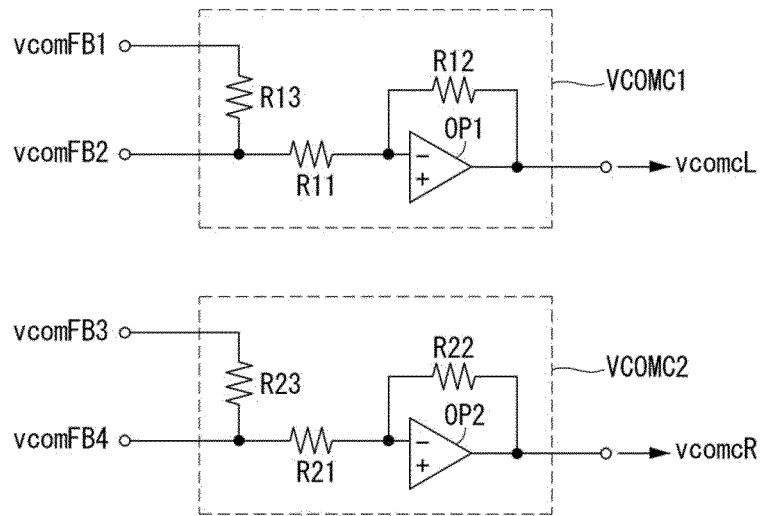


Fig. 15

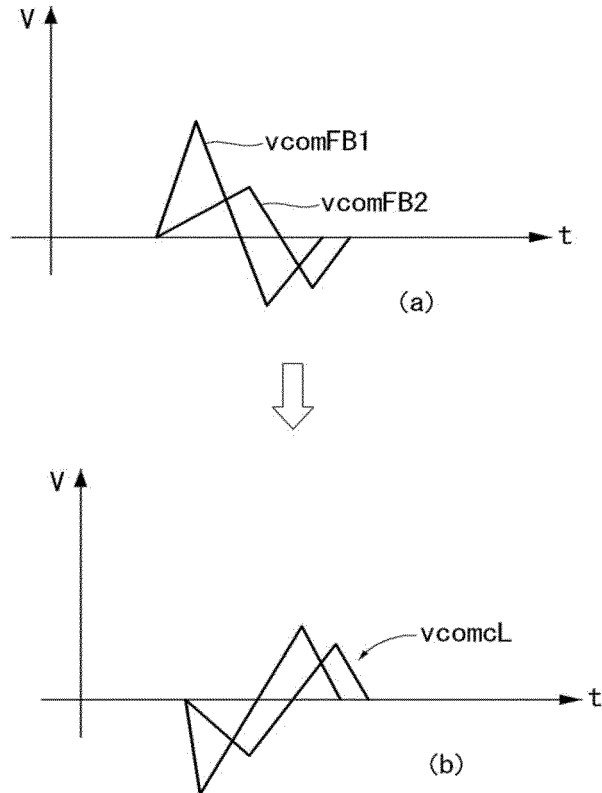

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020130102528 [0001]
- US 2006244704 A [0007]
- US 2007002005 A [0008]
- US 5841410 A [0009]
- US 2002063703 A [0010]
- US 2001007413 A [0010]
- US 2007024565 A [0010]
- US 2012162184 A [0010]
- US 2007279355 A [0010]

Fig. 1

[illegible]