

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
17 May 2001 (17.05.2001)

PCT

(10) International Publication Number
WO 01/35384 A1

- (51) International Patent Classification⁷: G09G 3/36 (74) Agent: SCHNECK, Thomas; Law Offices of Thomas Schneck, P.O. Box 2-E, San Jose, CA 95109-0005 (US).
- (21) International Application Number: PCT/US00/25714 (81) Designated States (*national*): CA, CN, JP, KR, NO, SG.
- (22) International Filing Date:
19 September 2000 (19.09.2000) (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (25) Filing Language: English
- (26) Publication Language: English Published:
— With international search report.
- (30) Priority Data:
09/436,064 8 November 1999 (08.11.1999) US For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.
- (71) Applicant: ATMEL CORPORATION [US/US]; 2325 Orchard Parkway, San Jose, CA 95131 (US).
- (72) Inventors: PATHAK, Saroj; 12998 Robleda Road, Los Altos Hills, CA 94022 (US). PAYNE, James, E.; 214 Crows Nest Drive, Boulder Creek, CA 95005 (US).

(54) Title: DRIVE CIRCUIT FOR LIQUID CRYSTAL DISPLAY CELL

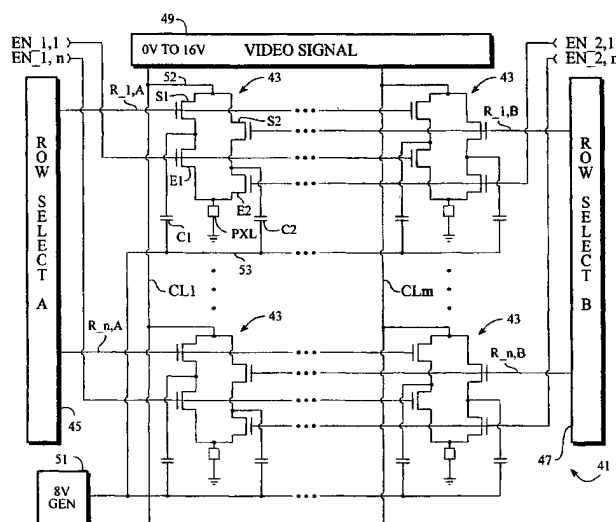

(57) Abstract: A driver circuit for use in an array (41) of picture elements (43) in a liquid crystal display is capable of displaying one set of image data while receiving a second set of image data. A first select switch transistor (S1) responsive to a first select signal (R_{1,A}) controls the coupling of a first image to a first storage capacitor (C1). A second select switch transistor (S2) responsive to a second select signal (R_{1,B}) controls the coupling of a second image to a second storage capacitor (C2). The first storage capacitor (C1) may be selectively coupled to an output node (PXL) by means of a first enable switch transistor (E1) responsive to a first enable signal (EN_{1,1}). The second storage capacitor (C2) may be selectively coupled to the same output node (PXL) by means of a second enable switch transistor (E2) responsive to a second enable signal (EN_{2,1}). By proper manipulation of the switch transistors, one storage capacitor may be coupled to the output node while the other storage capacitor is isolated from the output node and receiving new image data.

-1-

Description

DRIVE CIRCUIT FOR LIQUID CRYSTAL DISPLAY CELL

5 FIELD OF THE INVENTION

The invention relates to video displays, and more particularly, to a circuit structure for a picture element for use in a liquid crystal display.

10 BACKGROUND ART

With reference to Fig. 1, a typical liquid crystal display consists of an array 11 of picture element 13, or pixels. Each picture element consists of a select transistor 15 for coupling a column line 17 to a storage capacitor 19. A liquid crystal 21 is placed in parallel to storage capacitor 19.

As is known in the art, the voltage potential applied to liquid crystal 21 will determine its reflectivity. In effect, the voltage potential range translates into a gray scale at liquid crystal 21. Thus by proper application of specific voltage potentials to all picture elements 13 in array 11, an image may be generated.

Row select box 25 actuates all picture elements 13 within a specific row, which is defined by a row line 27 couple to all select transistors 15 within the row. Video Signal box 23 applies a desired voltage potentials on a column lines 17. The desired voltage potentials are typically within a predetermined voltage range. The actuation of select transistor 15 transfers a column line's 17 voltage potential to a respective parallel combination of storage capacitor 19 and liquid crystal 21. Once the desired voltage has been transferred, select transistor 15 is deactivated. The combined

-2-

capacitance of storage capacitor 19 and liquid crystal 21 sustain the desired voltage potential until the next image is loaded.

Several variations to the basic architecture of Fig. 1 have been previously proposed. With reference to Fig. 2, another liquid crystal architecture, more fully disclosed in U.S. Pat. No. 4,870 to Shields, attempts to improve the average RMS voltage potential applied to each liquid crystal 21. All elements in Fig. 2 similar to those of Fig. 1 are identified with similar reference characters and are explained above.

Each picture element 13 in Fig. 2 is capable of displaying its current contents while simultaneously receiving a new data image. This is done by means of an additional switch, load transistor 29, which is inserted between storage capacitor 19 and liquid crystal 21. In operation, select transistor 15 and load transistor 29 function as a bucket brigade transferring charge first from column line 17 to storage capacitor 19, and then from storage capacitor 19 to liquid crystal 21. In other words, select transistor 15 first transfers a voltage potential from column line 17 to storage capacitor 19 during a first phase of operation. During this phase of operation, load transistor 29 is maintained turned off and thereby isolates storage capacitor 19 from liquid crystal 21. Once new data has been loaded unto storage capacitor 19 and is ready to be displayed, a second phase of operation begins with select transistor 15 being turned off. At this time, load transistor 29 is turned on and couples storage capacitor 19 to liquid crystal 21. The charge across storage capacitor 19 redistributes itself across the parallel combination of storage capacitor 19 and liquid crystal 21. When the distributing charge has established a new voltage potential across liquid crystal 21, the second phase of operation ends with load transistor 29 being turned off.

-3-

While load transistor 29 is turned off and liquid crystal 21 is holding its current voltage potential, select transistor 15 may be actuated and new data transferred from column line 17 to storage capacitor 19.

5 Shields explains that in order to improve the average RMS voltage value applied to array 11, one needs to control the reference voltage V_{tp} applied to liquid crystals 21 and to update all picture elements 13 in array 11 simultaneously. Reference voltage V_{tp} is
10 coupled to the reference plate of all liquid crystals 21. By shifting reference voltage V_{tp} from one voltage power rail to another, as appropriate, one can increase the average voltage magnitude applied across array 11.

 To this end, load transistors 29 are all
15 controlled by a common synchronization signal 31. While load transistors 29 are turned off and liquid crystals 21 are holding their current voltage potential, storage capacitors 19 receive new data. Once the entire array 11 has received new data, synchronization line 31 is
20 actuated and all load transistors 29 of all picture elements 13 in array 11 are turned on in unison. Thus, the entire array 11 of liquid crystals 21 is updated simultaneously.

 With reference to Fig. 3 another array
25 architecture, similar to that of Fig. 2, is shown. All elements in Fig. 3 similar to those of Fig. 2 are identified by similar reference characters and are explained above. The architecture of Fig. 3 is more fully disclosed in U.S. Pat. No. 5,666,130 to Williams et
30 al., and is assigned to the same assignee as that of Fig. 2. The structure of Fig. 3 updates an entire array 11 of pixels 13 simultaneously, in a manner similar to that of Fig. 2.

 Unlike the structure of Fig. 2, however, the
35 structure of Fig. 3 cannot display one image while storing another. Williams et al. explain that

-4-

traditionally one has to optimize a pixel's drive circuitry to the specific type of screen, i.e. liquid crystal, being used. Williams et al. state that it would be advantageous to be able to optimize a pixel's drive circuitry separately from the type of liquid crystal used so that one driver circuit could be used with multiple types of screens.

To accomplish this, the structure of Williams et al. allow for an array 11 of picture elements 13 to receive and store an image in their respective storage capacitor 19 while maintaining the storage capacitor 19 isolated from the liquid crystal itself. In this manner, the driver circuitry of each picture element 13 may be optimize for storing an image element, i.e. voltage potential, at a respective storage capacitor 19 with no concern as to the type of liquid crystal 21 used. Once an image has been stored onto the array's storage capacitors 19, the storage capacitors 19 may be coupled to any screen type and their content, i.e. image voltage, is transferred onto the screen's liquid crystals 21. To assure that the optimized drive circuitry functions similarly on different types of liquid crystals, Williams et al. demonstrate that the liquid crystals 21 and storage capacitors 19 should be in a known reference ground condition before a new image is loaded. Thus, a current image must first be erased, i.e. array 11 is grounded, before a new image can be received.

The picture elements 13 shown in Fig. 3 are similar to those of Fig. 2 with the addition of a grounding transistor 31 between load transistor 29 and liquid crystal 21. Grounding transistor 31 is responsive to a reinitiate signal, ReInit, which grounds storage capacitor 19 and liquid crystal 21 in preparation for receiving a new image.

After storage capacitor 19 and liquid crystal 21 are grounded, grounding transistor 15 is deactivated

-5-

and picture element 13 is then ready to receive new voltage data. Row select box 25 activates a row of picture elements 13 by actuating a row's select transistors 15. Select transistors 15 then transfer new voltage information from the video signal box 23 and column lines 17 to storage capacitors 19. Once new data has been placed on storage capacitors 19, load transistors 29 couple storage capacitors 19 to liquid crystals 21. Grounding transistors 31 are maintained in off state during this time. After liquid crystals 21 have displayed the image for a predetermined period, grounding transistors 31 are turned on while load transistors 29 are maintained actuated. This reinitiates storage capacitors 19 and liquid crystals 21 back to a known grounding state in preparation for loading of the next image.

Williams et al. state that their array can be made more robust by incorporating a high level of redundancy into the drive circuitry of array 11. With reference to Fig. 4, Williams et al. therefore couple two drive circuits in parallel per liquid crystal 21. All elements in Fig. 4 similar to those of Fig. 3 are given similar reference characters and are explained above. Williams et al.'s drive circuitry includes two select transistors 15a and 15b simultaneously responsive to a common row line 27, two load transistors 29a and 29b simultaneously responsive to a common load line 33, and two grounding transistors 31a and 31b responsive to the same ReInit line 35. Each select transistor 15a and 15b, however, charges its own respective storage capacitor 19a and 19b. Williams et al. thus show two storage capacitors 19a and 19b per picture element 13, with both storage capacitors 19a and 19b working in unison. If one half of the drive circuitry, identified by elements 15a, 19a, 29a and 31a, should fail, the redundant driver

-6-

circuitry, i.e. 15b, 19b, 29b and 31b, would permit the picture element 13 to continue to function.

It is an object of the present invention to provide a picture element for use in a liquid crystal display capable of displaying one image while receiving another and having minimal degradation in the transferring of voltage potentials to the liquid crystal display.

It is a further object of the present invention to provide liquid crystal display with a more versatile structure.

It is yet another object of the present invention to provide a liquid crystal array that supports both row-by-row updating of image information in the array and simultaneous updating of all rows in the array in unison.

SUMMARY OF THE INVENTION

The above objects have been met in a pixel cell structure with independent controls. A pixel cell, for use in a liquid crystal display, has the characteristic of being able to display its current contents while it is simultaneously being overwritten with a new set, or multiple sets, of data. To accomplish this, each pixel has independent access to multiple storage capacitors. While a pixel cell is displaying the contents of a first storage capacitor, the contents of a second storage capacitor can be altered. The pixel cell then switches from its first storage capacitor to its second storage capacitor. While it then displays the contents of the second storage capacitor, the contents of the first storage capacitor may be altered, and so on.

Structurally, the pixels are arranged into an array of rows and columns. In the case of a pixel with two storage capacitors, each column may be defined by one or two bitlines, depending on the embodiment being

-7-

implemented. Each row is defined by a first and second wordline pair and a first and second enable-line pair. Each of the first and second wordlines in each wordline pair is independently controlled and selectively
5 transfers the contents of a bitline to one of the first and second storage capacitors within a respective pixel cell. Similarly, each of the first and second enable-lines selectively transfers the contents of a
10 respective one of the first and second storage capacitors to the pixel cell's output reflective panel, i.e. to a respective liquid crystal.

The first and second storage capacitors of each pixel cell have their lower plate coupled to a common predetermined voltage. The top plate of each of
15 the first and second storage capacitors is coupled to a respective word-select pass device and to an enable-select pass device. The word-select pass device is responsive to a respective wordline within a wordline pair and selectively transfers the contents of a bitline
20 to its corresponding storage capacitor. The enable-select pass device is responsive to a respective enable-line within an enable-line pair and selectively transfers the contents of its corresponding storage capacitor to the pixel cell's output reflective panel. Since the
25 individual wordlines and enable-lines within each pair are independent, the liquid crystals are coupled to one of the storage capacitors in a respective pixel at all times.

Because of this diversity in control, the
30 functionality of the present invention can be extended without altering its basic circuit structure. In a first preferred embodiment, the pixel cell of the present invention can display one set of data from a first storage capacitor while its second storage capacitor
35 receives a second set of data. In a second preferred embodiment, proper manipulation of the individual

-8-

wordlines and enable-lines allow the individual pixels to isolate a liquid crystal from a pixel cell's two storage capacitors. Thus, once a first set of data is transferred to the liquid crystal, both storage capacitors in a pixel cell may be disconnected from the liquid crystal. This permits the two storage capacitors to receive a second and third set of data while the first set of data is still being displayed. In effect, the array of pixel cells can display a current image while buffering the next two images. In this way, the speed at which the contents of each pixel may be changed is increased. It is thus possible to start writing the next image without affecting the current image being displayed.

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 is prior art view of the structure of a typical pixel element in a typical liquid crystal array.

Fig. 2 is a prior art view of an alternate liquid crystal array that allows a current image to be displayed while a subsequent image is being loaded.

Fig. 3 is a prior art view of still another liquid crystal array for separately optimizing a pixel element's drive circuitry from the pixel element's liquid crystal display.

Fig. 4 is an additional embodiment of the structure of Fig. 3 incorporating redundancy into the liquid crystal array.

Fig. 5 is a pixel element and liquid crystal array in accord with a first embodiment of the present invention.

Fig. 6 is a second embodiment of a crystal array in accord with the present invention.

Fig. 7 is a crystal array in accord with a third embodiment of the present invention.

-9-

BEST MODE FOR CARRYING OUT THE INVENTION

With reference to Fig. 5, a liquid crystal display in accord with the present invention includes an array 41 of picture cells 43, a first row selector 45, a second row selector 47, a reference voltage generator 51 and preferably a single video signal generator 49.

Picture cells 43 are arranged into n rows and m columns. First row selector 45 may independently control any of the n rows by means of a first set of row select lines ranging from R_{1,A} to R_{n,A}. Similarly, second row selector 47 may independently control the same n rows by means of a second set of row select lines ranging from R_{1,B} to R_{n,B}.

Video signal generator 49 outputs m video signals on m column lines ranging from CL₁ to CL_m. The video signals preferably are within a voltage range of 0V through V_{max}, of preferably 16V. Each column of picture cells 43 is selected by means of a corresponding column line, i.e. CL₁. All picture cells 43 within a selected column have an input node 52 coupled to a corresponding, common column line, i.e. CL₁. The video signal on a column line CL₁, however, is not accepted by all picture cells 43 within the same column. Rather, only the picture cells 43 that are activated by a row select line from one of the first 45 or second 47 row selector will latch in the video signal data on their respective column line, CL₁-CL_m.

Each row within array 41 may be selected by any one of a plurality of independent row selectors 45 and 47. Preferably no two row selectors 45, 47 may select the same row at the same time. Any row, however, may be selected by multiple row selectors 45, 47 in succession. For example, in a first embodiment first row selector 45 may select the first row in array 41 by actuating row select line R_{1,A} and thereby load image information from video signal generator 49 onto the first row of picture

-10-

cells 43. During this time, no other selector, i.e. second row selector 47, may access the first row. Once first row selector 45 has relinquished use of the first row, another row selector, i.e. second row selector 47, may gain control of the first row by actuating its appropriate row select line, i.e. R₁,B.

Each picture cell 43 includes a liquid crystal PXL and accompanying drive circuitry. The drive circuitry selectively transfers a stored video signal from a storage means C1 and C2 onto liquid crystal PXL. The stored video signal is read from a corresponding column line CL1-CL_m. In the preferred embodiment, a picture cell 43 may store multiple video signals while simultaneously displaying another. To accomplish this, each drive circuit within a picture cell 43 includes multiple voltage storage devices. In the best mode implementation, the multiple voltage storage devices are implemented as a first storage capacitor C1 and a second storage capacitor C2. This allows picture cell 43 to display the contents of one storage capacitor, i.e. C1, while storing new image information in another storage capacitor, i.e. C2. It is to be understood that it is likewise possible to store additional image information by incorporating additional storage capacitors.

The input node 52 of each picture cell 43 may be selectively coupled to one of storage capacitors C1 and C2 by means of a corresponding select transistor S1 and S2, respectively. Each of select transistors S1 and S2 is controlled by a corresponding row select line R₁,A and R₁,B controlled by a corresponding row selector 45 and 47. Similarly, a picture cell's storage capacitors C1 and C2 may be selectively coupled to its liquid crystal PXL by means of a corresponding enable transistor E1 and E2, respectively. Each enable transistor E1 and E2 is controlled by an independent enable signal EN₁,1 and EN₂,1. Enable signal EN₁,1 controls the coupling

-11-

of all the first storage capacitors C1 within row of a picture cells 43 to each cell's respective liquid crystal PXL. Similarly, enable signal EN_{1,2} controls the coupling of all the second storage capacitors C2 within a row of picture cells 43 to each cell's respective liquid crystal PXL. Thus, each row is responsive to a set of enable signals EN_{1,1}/EN_{2,1} that independently control separate enable transistors within each picture cell 43.

In the preferred embodiment of Fig. 5, array 41 is responsive to n sets of such enable signal pairs ranging from EN_{1,1}/EN_{2,1} to EN_{1,n}/EN_{2,n}. In this preferred embodiment, however, all first enable transistors E1 within array 41 are controlled by a common first enable signal and all second enable transistors E2 are controlled by a second common enable signal. In this manner, the contents of the first C1 and second C2 storage capacitors within each cell 43 of array 41 may be transferred to their respective liquid crystal PXL in unison.

Additionally, in this presently preferred embodiment only one row selector 45 or 47 may control array 41 at any given time. For example, first row selector 45 may gain sole control of array 41 and instigate sequential loading of a first image from video signal generator 49 onto the whole of array 41 one row at a time. After first row selector 45 finishes loading the first image, it then relinquishes control of array 41 to another row selector, i.e. 47. Once second row selector 47 gains control of array 41, it can begin transferring a second image onto all the rows of array 41. While second row selector 47 has control of array 41, the first enable transistor S1 of each picture cell 43 within array 41 will be in an active state and coupling first storage capacitor C1 to liquid crystal PXL while second enable transistor 52 is in an inactive state.

-12-

As is known in the art, a voltage potential applied to liquid crystal PXL modifies its reflectivity. By appropriate application of voltage potentials to an array's liquid crystals PXL, an image may be formed. In the present embodiment, video signal generator 49 supplies the appropriate voltage potentials along column lines CL1-CLm to a desired storage capacitor C1 or C2. Since the video signals in the preferred embodiment may vary between 0V and a Vmax of 16V, this may result in a high voltage stress across storage capacitors C1 and C2 if their lower plate is tied to ground. Therefore, the presently preferred embodiment ties the lower plate of storage capacitors C1 and C2 to reference voltage generator 51, which supplies a voltage potential intermediate 0V and Vmax. Reference voltage generator 51 preferably supplies a voltage potential half-way between both extreme voltage swings of video signal generator 49. Presently, this means that reference voltage generator 51 supplies Vmax/2, or 8V, to the lower plate of all storage capacitors within array 41. Consequently, although select transistors S1 and S2 may transfer as little as 0V or as much as 16V onto the top plate of storage capacitors C1 and C2, the voltage drop across storage capacitors C1 and C2 remains within an 8V voltage swing. As a result, storage capacitors C1 and C2 may be made smaller and faster than otherwise required.

With reference to Fig. 6, a second embodiment of the present invention is shown. All elements in Fig. 6 similar to those of Fig. 5 are given similar reference characters and are explained above. In Fig. 6, all picture cells 43 in array 41 share a common enable signal ENBL which selectively couples one of storage capacitors C1 and C2 to liquid crystal PXL. To accomplish this, the enable transistors E and E_B within each picture cell 43 respond oppositely to the logic state of enable signal ENBL. First enable transistor E is an NMOS transistor

-13-

and responds to a logic high on signal ENBL by coupling first storage capacitor C1 to liquid crystal PXL, and responds to a logic low on signal ENBL by isolating C1 from PXL. Conversely, the second enable transistor E_B
5 is a PMOS transistors and responds to a logic high on ENBL by isolating C2 from PXL, and responds to a logic low on ENBL by coupling second storage capacitor C2 to PXL. Thus, liquid crystal PXL is constantly coupled to one of either C1 and C2, as determined by enable signal
10 ENBL.

The embodiment of Fig. 6 is a specialized variation of that of Fig. 5. In the second embodiment of Fig. 6, only one of row selectors 45 and 47 may control array 41 at a time. For example, if first row selector
15 45 has access to array 41, then second row selector 47 must wait until first row selector 45 finishes loading a new image onto all of array 41, one row at a time. As explained above, first row selector 45 accesses the first storage capacitor C1 of a row of picture cells 43 by
20 actuating the first select transistor S1 within a row of picture cells simultaneously. While first row selector 45 is loading image data into array 41, enable signal ENBL is preferably at a logic low and isolating the first storage capacitor C1 of all picture cells from their
25 respective liquid crystal PXL. A low on enable signal ENBL also has the effect of coupling each cell's second storage capacitor C2 to their respective liquid crystal PXL. Thus, each picture cell 43 displays the contents of its second storage capacitor C2 while it receives new
30 image data onto its first storage capacitor C1.

Once first row selector 45 has finished loading the new image into array 41 and the new image is ready to be displayed, enable signal ENBL is switched from a logic low to a logic high. This activates first enable switch
35 E and deactivates second enable switch E_B. The newly loaded image information on first storage capacitors C1

-14-

is thereby coupled to its respective liquid crystals PXL for display. Concurrently, second storage capacitor C2 is disconnected from the liquid crystal PXL. At this point, second storage capacitor C2 is ready to receive
5 new data and second row selector 47 may take control of array 41.

With reference to Fig. 7, a third embodiment of the present invention is shown. All elements in Fig. 7 similar to those of Fig. 5 are given similar reference
10 characters and are explained above. The embodiment of Fig. 7 shows multiple video signal generators 49A/49B and preferably includes one signal generator 49A/49B for each row selector 45 and 47, respectively. Each signal
15 generator 49A and 49B has its own set of column lines CL1,A-CLm,A and CL1,B-CLm,B, respectively, by which each has independent access to any column of picture cells 43 within array 41. Thus, each picture cell 43 includes a
separate input node 52A/52B per column line CL1,A/CL1,B, respectively. A separate set of enable signals
20 EN_1,1/EN_2,1 independently controls the enable transistors E1 and E2 of each row of picture cells 43 in a manner similar to that of the first embodiment of the first embodiment of Fig. 5.

In Fig. 7, multiple row selectors 45 and 47
25 have access to array 41 simultaneously, as was also the case in the first embodiment of Fig. 5. Unlike the structure of Fig. 5, however, the structure of Fig. 7 permits multiple row selectors 45 and 47 to access the
same row of picture cells 43 at the same time while
30 maintaining independent addressing of their respective storage capacitors C1 and C2. For example assuming that liquid crystal PXL has enough capacitance of its own to maintain its current image data and that it is desired to
write to both of storage capacitors C1 and C2, then both
35 enable signals EN_1,1 and EN_2,1 would be set to a logic low. This would cause both enable transistors E1 and E2

-15-

to deactivate and isolate both C1 and C2 from their respective liquid crystal PXL. It is to be understood that if a picture cell 43 included a third storage capacitor, then liquid crystal PXL could be maintained coupled to the third storage capacitor while the first C1 and second C2 storage capacitors received new data. While C1 is isolated from liquid crystal PXL, first row selector 45 may activate row line R₁,A and thereby activate first select transistor S1. This couples first column line CL1,A from first video signal generator 49A to first storage capacitor C1. Similarly, While C2 is isolated from liquid crystal PXL, second row selector 47 may activate row line R₁,B and thereby activate second select transistor S2. This couples second column line CL1,B from second video signal generator 49B to second storage capacitor C2. Since both storage capacitors C1 and C2 are coupled to separate column lines CL1,A and CL1,B, respectively, they can both receive new data simultaneously.

Claims

1. A drive circuit for use with a liquid crystal display, said driver circuit being coupled to said liquid crystal display at a region defining a picture element, said picture element having a pixel capacitance, said drive circuit comprising:

a plurality of select switching means, each of said select switching means being independently responsive to a unique select signal, each select switching means having a first input node and a first output node, each of said switching means being effective for selectively coupling its first input node to its first output node in response to its unique select signal;

a plurality of enable switching means, each of said enable switching means forming a one-to-one pair with a unique one of said select switching means, each enable switching means having a second input node and a second output node, each of said enable switching means being effective for selectively coupling its second input node to its second output node in response to an enable signal, the first output node and the second input node within each of said one-to-one pairs being joined together at a coupling point;

a unique voltage storage means associated with each of said one-to-one pairs, each of said unique voltage storage means being connected between said coupling point within its associated one-to-one pair and a reference voltage input;

all of said second output nodes being in electrical communication of said region.

-17-

2. The drive circuit of claim 1 wherein each of said enable switching means is independently responsive to a unique enable signal.

5 3. The drive circuit of claim 1 wherein said plurality of said enable switching means is comprised of a first enable switching means and a second enable switching means, said first enabler switching means being an NMOS transistors and said second enable switching means being
10 a PMOS transistor, said enable signal being coupled to control both of said NMOS and PMOS transistors.

15 4. The drive circuit of claim 3 wherein all of said first input nodes are coupled together for receiving a video signal.

20 5. The driver circuit of Claim 3 wherein the input node of at least two of said select switching means are coupled to different input video signals.

25 6. The drive circuit of claim 1 wherein all of said first input nodes are coupled together for receiving a video signal.

30 7. The driver circuit of Claim 1 wherein the input node of at least two of said select switching means are coupled to different input video signals.

35 8. The drive circuit of claim 1 wherein all of said second output nodes are coupled solely to each other and to said region.

-18-

9. The drive circuit of claim 1 wherein said video signal may vary within a predetermined voltage range, said reference voltage input having a value substantially
5 in the middle of said predetermined voltage range.

10. The drive circuit of claim 1 wherein said region is maintained coupled to at least one of said unique voltage storage means at all times by means of one of said enable
10 switching means.

11. The drive circuit of claim 1 wherein only one of said enable switching means may be actuated at any given time.
15

12. The drive circuit of claim 1 wherein said voltage storage means are capacitors.
20

13. The drive circuit of claim 1 wherein said select switching means and enable switching means are transistors.
25

14. The drive circuit of claim 13 wherein said transistors are one of BJT transistors, MOS transistors and JFET transistors.
30

15. The drive circuit of claim 1 wherein all of said enable switching means may be opened at the same time.
35

16. The drive circuit of claim 1 wherein only one of said select switching means is closed at a time.

-19-

17. The driver circuit of claim 1 wherein only one of said one-to-one pairs may have its select switching means and enable switching means closed at any given time.

5

18. A drive circuit for use with a liquid crystal display, said driver circuit being coupled to said liquid crystal display at a region defining a picture element, said picture element having a pixel capacitance, said drive circuit comprising:

10

a first select switching means responsive to a first select signal, said first select switching means having a first input node and a first output node, said first switching means being effective for selectively coupling said first input node to said first output node in response to said first select signal;

15

a second select switching means responsive to a second select signal, said second select switching means having a second input node and a second output node, said second switching means being effective for selectively coupling said second input node to said second output node in response to said second select signal;

20

a first enable switching means, said first enable switching means having a third input node and third output node and being responsive to a digital enable input signal selectively alternating between a first logic state and a second logic state, said first enable switching means being effective for coupling said third input node to said third output node in response to said enable signal being at said first logic state;

25

30

a second enable switching means, said second enable switching means having a fourth input node and fourth output node and being responsive to said enable input signal, said second enable switching means being effective for coupling said fourth input node to said

35

-20-

fourth output node in response to said enable signal being at said second logic state;

a first voltage storage means and a second voltage storage means;

5 said first input node being coupled to said second input node for receiving a video signal;

 said first output node being coupled to said third input node, said first voltage storage means being coupled between said first output node and a reference
10 voltage node;

 said second output node being coupled to said fourth input node, said second voltage storage means being coupled between said second output node and said reference voltage node;

15 said third output node and said fourth output node being coupled to said region.

20 19. The drive circuit of claim 18 wherein said third and fourth output nodes are coupled solely to each other and to said region.

25 20. The drive circuit of claim 18 wherein said video signal may vary within a predetermined voltage range, said reference voltage node having a value substantially in the middle of said predetermined voltage range.

30 21. The drive circuit of claim 18 wherein said first and second voltage storage means are capacitors.

35 22. The drive circuit of claim 18 wherein said first enable switching means is an NMOS transistor and said second enable switching means is a PMOS transistor.

-21-

23. The drive circuit of claim 18 wherein only one of said first and second select switching means is closed at a time.

5

24. The drive circuit of claim 18 wherein said first select switching means and said first enable switching means may not be in a closed state at the same time.

10 25. A liquid crystal display comprising:

an array of rows and columns of pixel drive circuits, said drive circuits being effective for coupling a first video signal to a first storage means in response to first select signal and coupling a second video signal to a second storage means in response to a second select signal, each of said drive circuits further having an output node coupled to predetermined regions of said liquid crystal display, each of said regions defining a picture element;

20 a first row decoder for generating said first select signals;

a second row decoder for generating said second select signals;

25 an enable control input for selectively coupling one of said first and second storage means from at least one of said drive circuits to its respective output node.

30

26. The liquid crystal display of claim 25 wherein each of said drive circuits has an input node coupled to a column line and said first select signal is effective for loading said first video signal from said column line to said first storage means within respective drive circuits of a first row, said second select signal further being

35

-22-

effective for loading said second video signal from said column line to said second storage means within respective drive circuits of a second row.

5

27. The liquid crystal display of claim 25 wherein each of said first select signals controls a first select switching means within said driver circuits, said first select switching means being effective for coupling a first column line to said first storage means, each of
10 said second select signals further controlling a second select switching means within said driver circuits, said second select switching means being effective for coupling a second column line to said second storage
15 means.

28. The liquid crystal display of claim 25 wherein said first row decoder is further effective for selecting a first row of said drive circuits while said second row
20 decoder simultaneously selects a second row of said drive circuits.

29. The liquid crystal display of claim 25 wherein said first row decoder and said second row decoder are
25 effective for selecting the same row of said drive circuits simultaneously.

30. The liquid crystal display of claim 25 wherein each
30 of said picture elements has a pixel capacitance.

31. The liquid crystal display of claim 25 further having a plurality of said enable control inputs, each of said enable control inputs being effective for
35 independently controlling a respective one of said rows of drive circuits.

-23-

32. The liquid crystal display of claim 25 wherein each of said driver circuits further includes a first switching means for selectively coupling its first storage means to its output node, and has a second
5 switching means for selectively coupling its second storage means to its output node.

33. The liquid crystal display of claim 32 wherein said first switching means is an NMOS device and said second
10 switching means is a PMOS device.

34. The liquid crystal display of claim 32 wherein said first and second switching means are responsive to
15 separate enable control inputs.

1/9

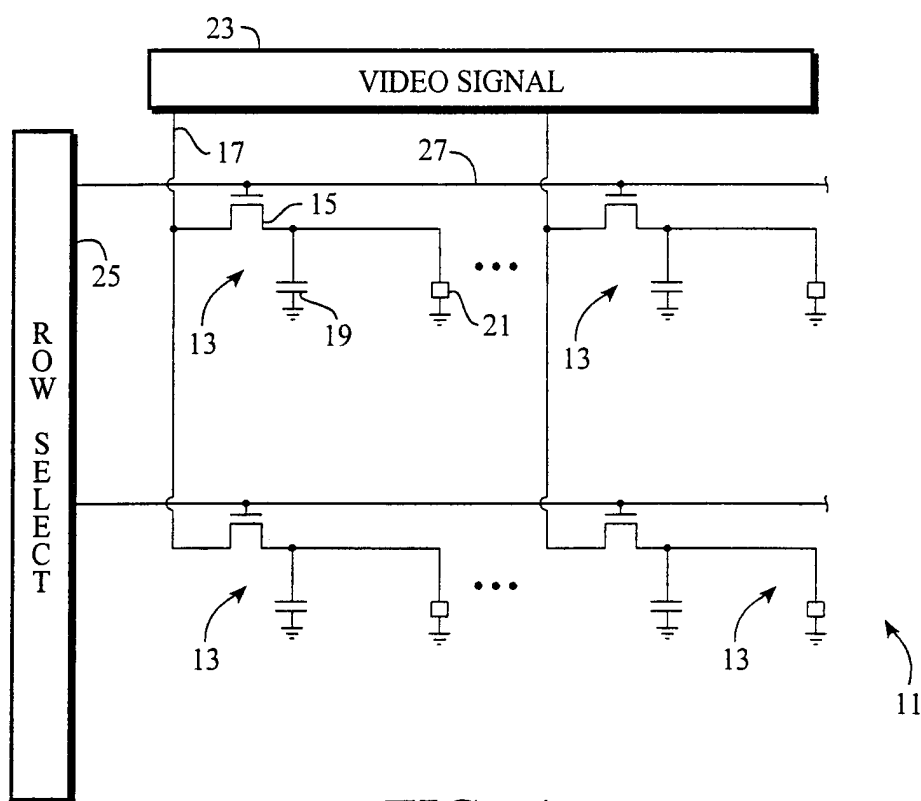


FIG. 1 (Prior Art)

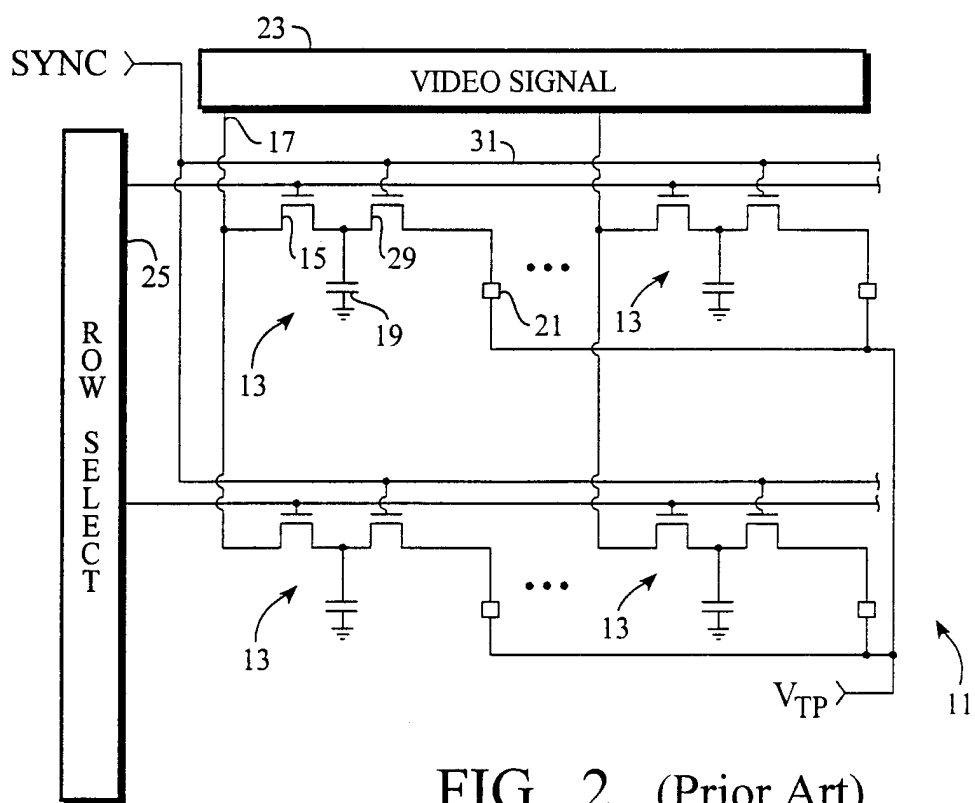


FIG. 2 (Prior Art)

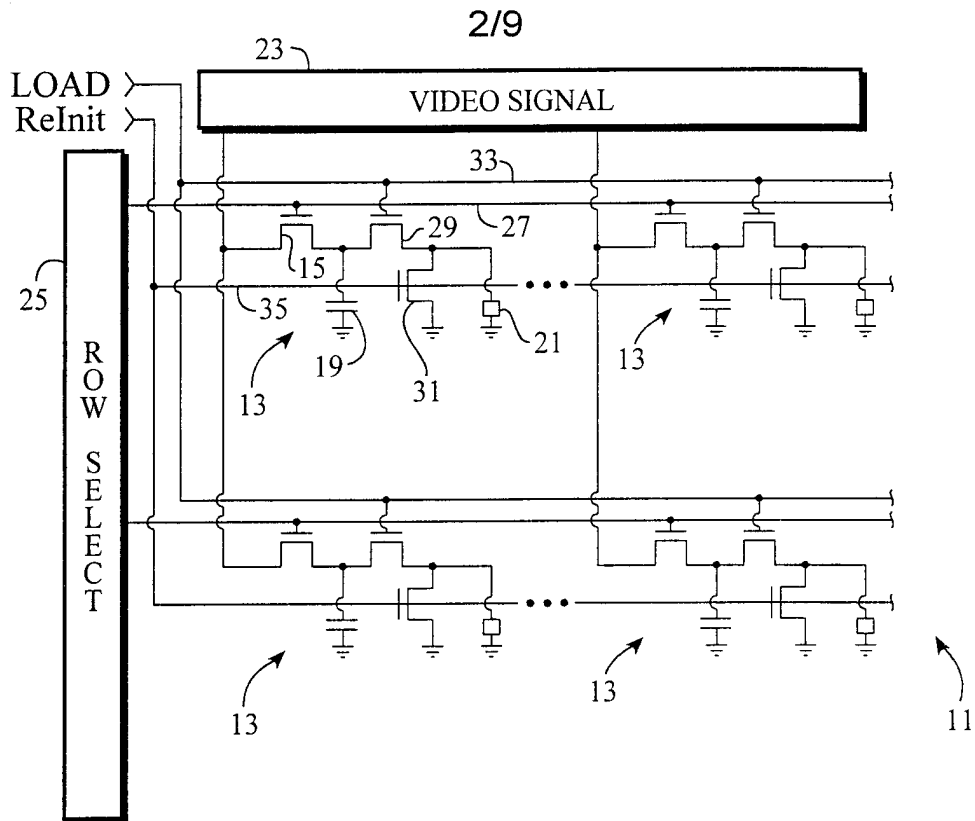


FIG. 3 (Prior Art)

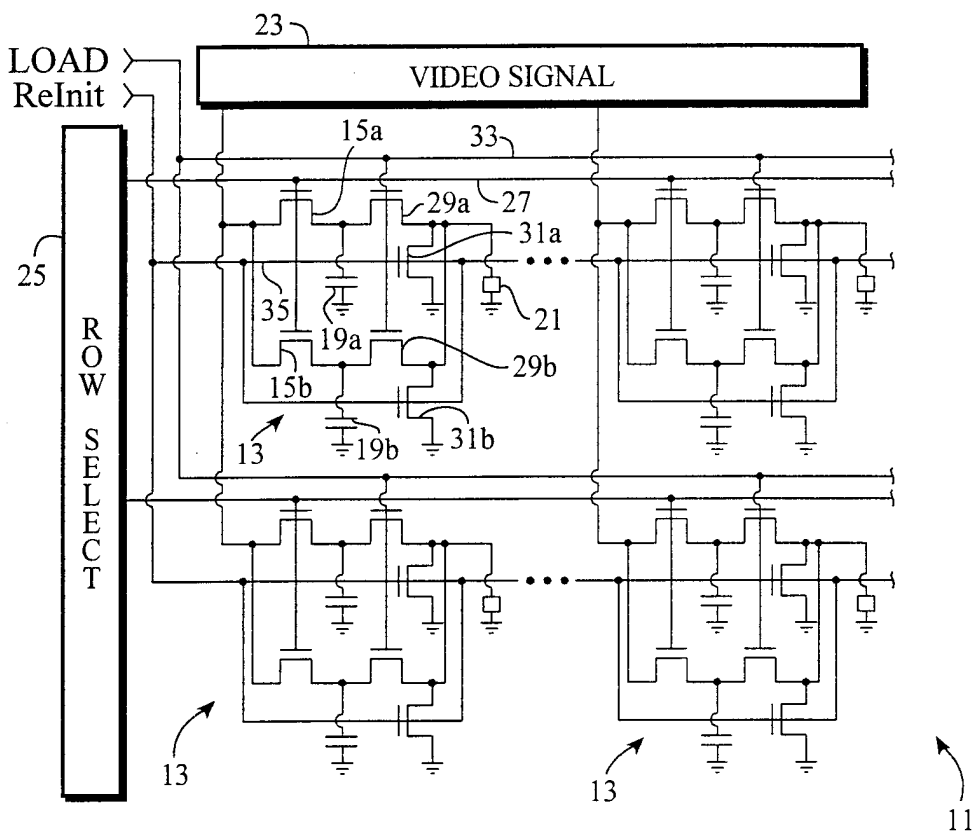


FIG. 4 (Prior Art)

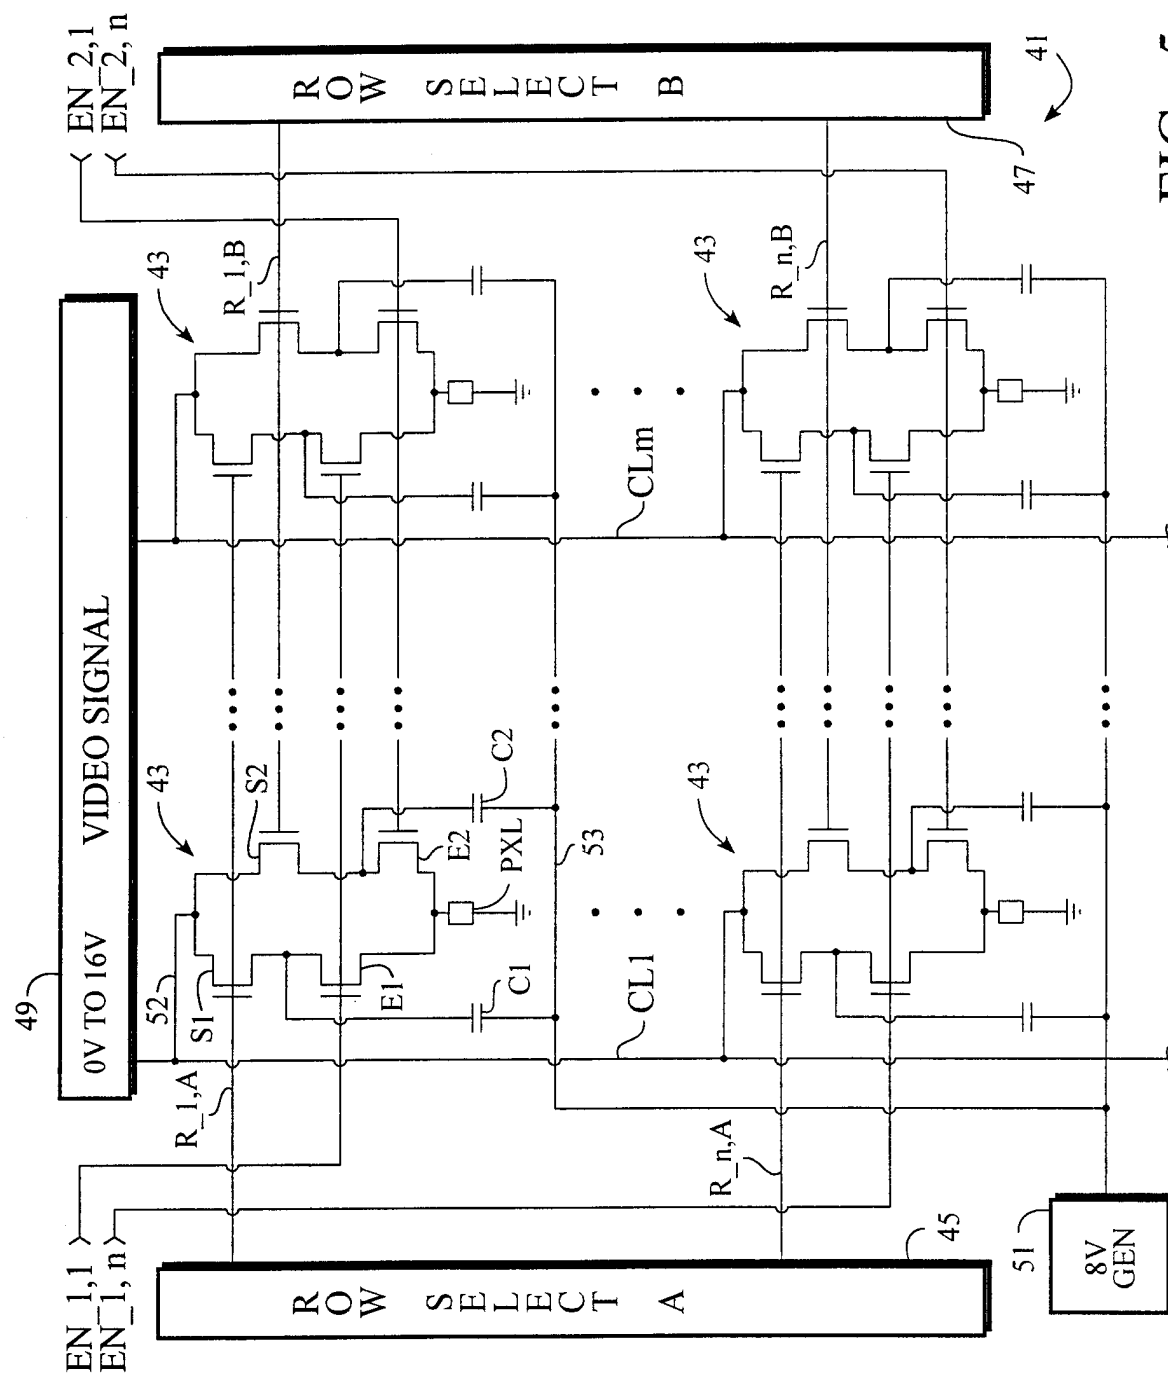


FIG. 5

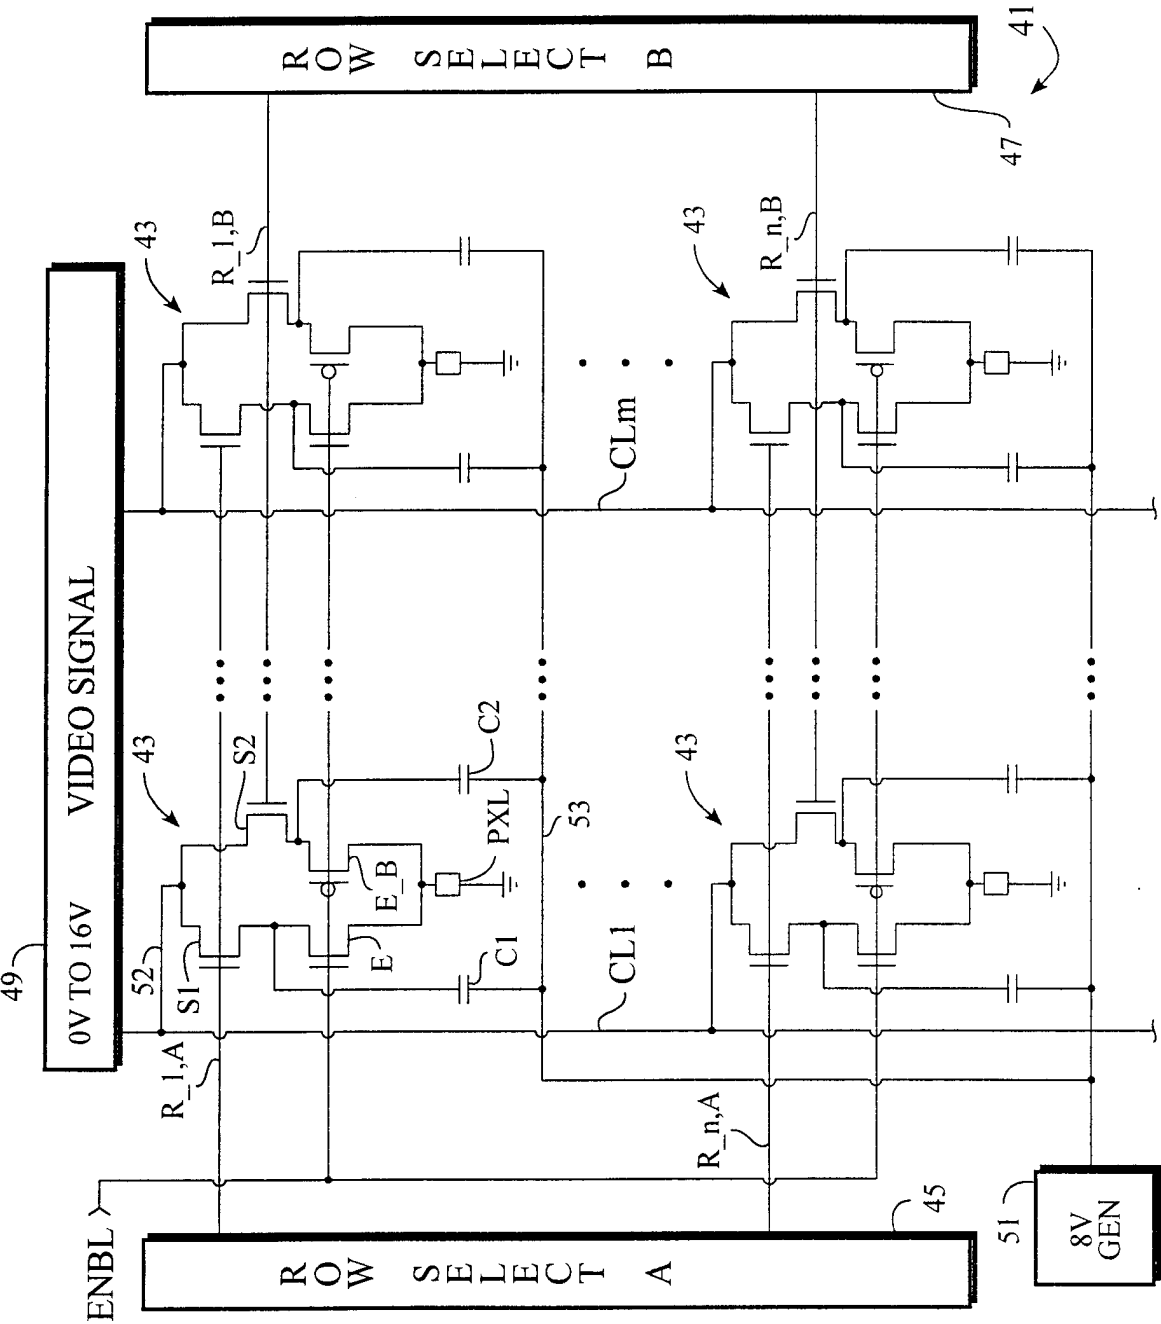


FIG. 6

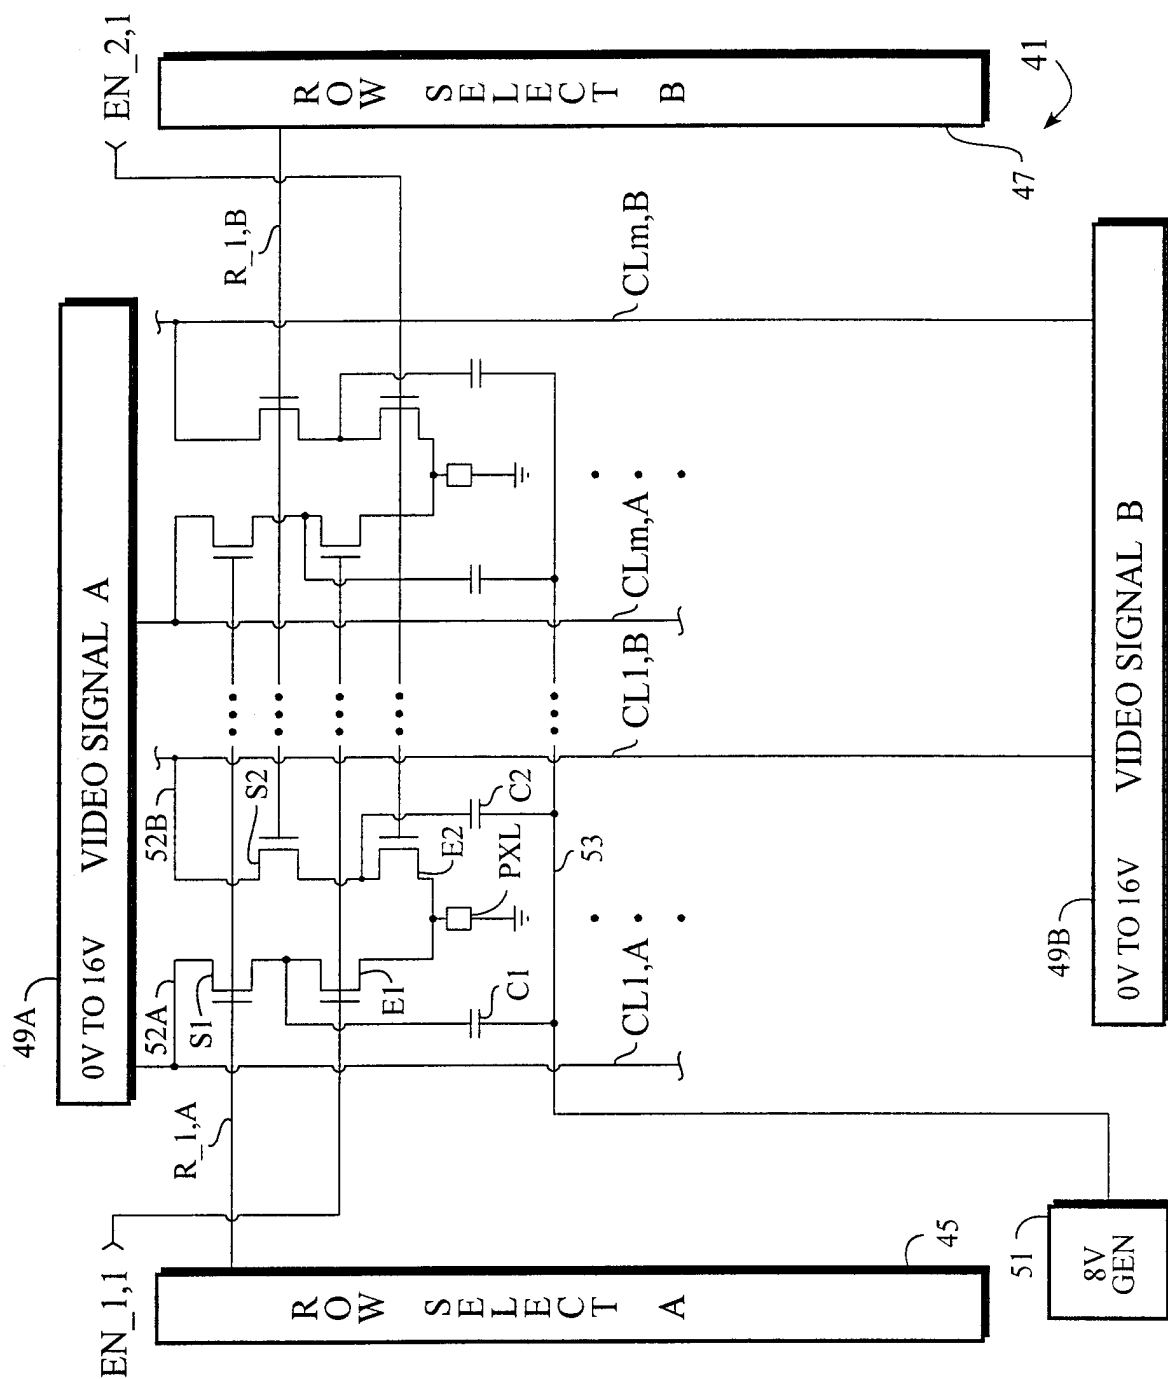


FIG. 7

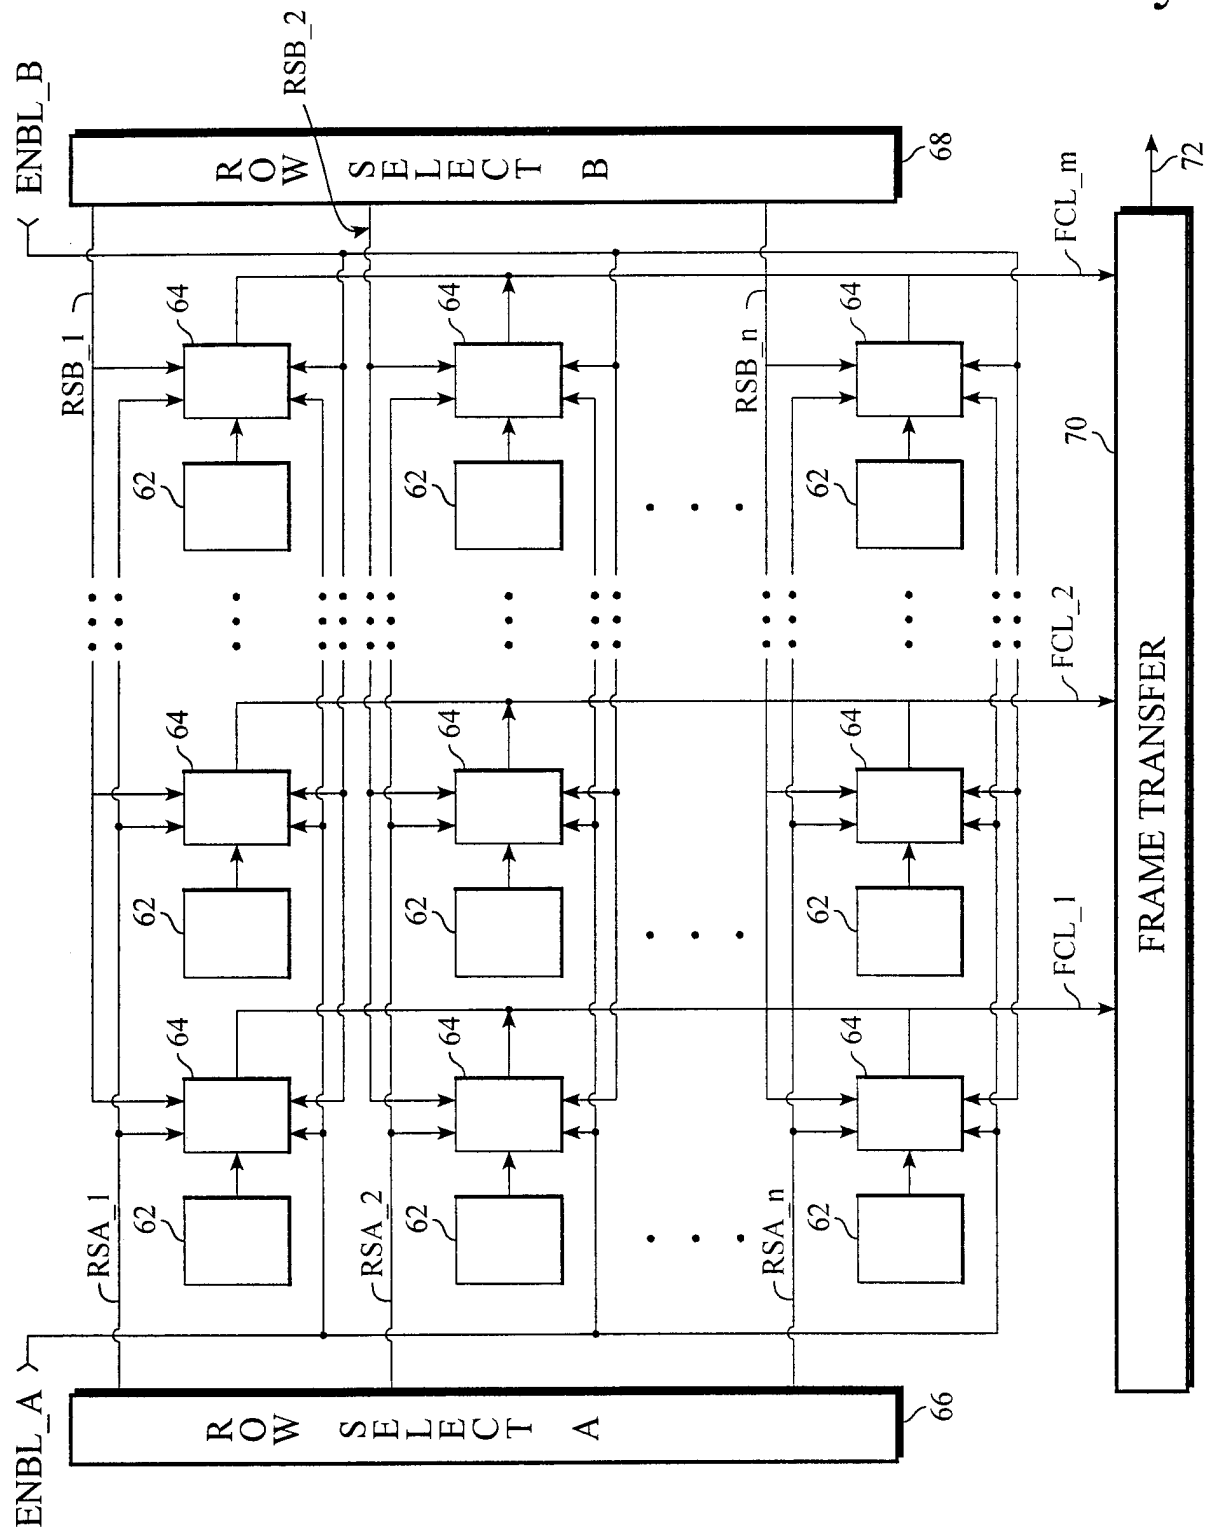


Fig. 8

7/9

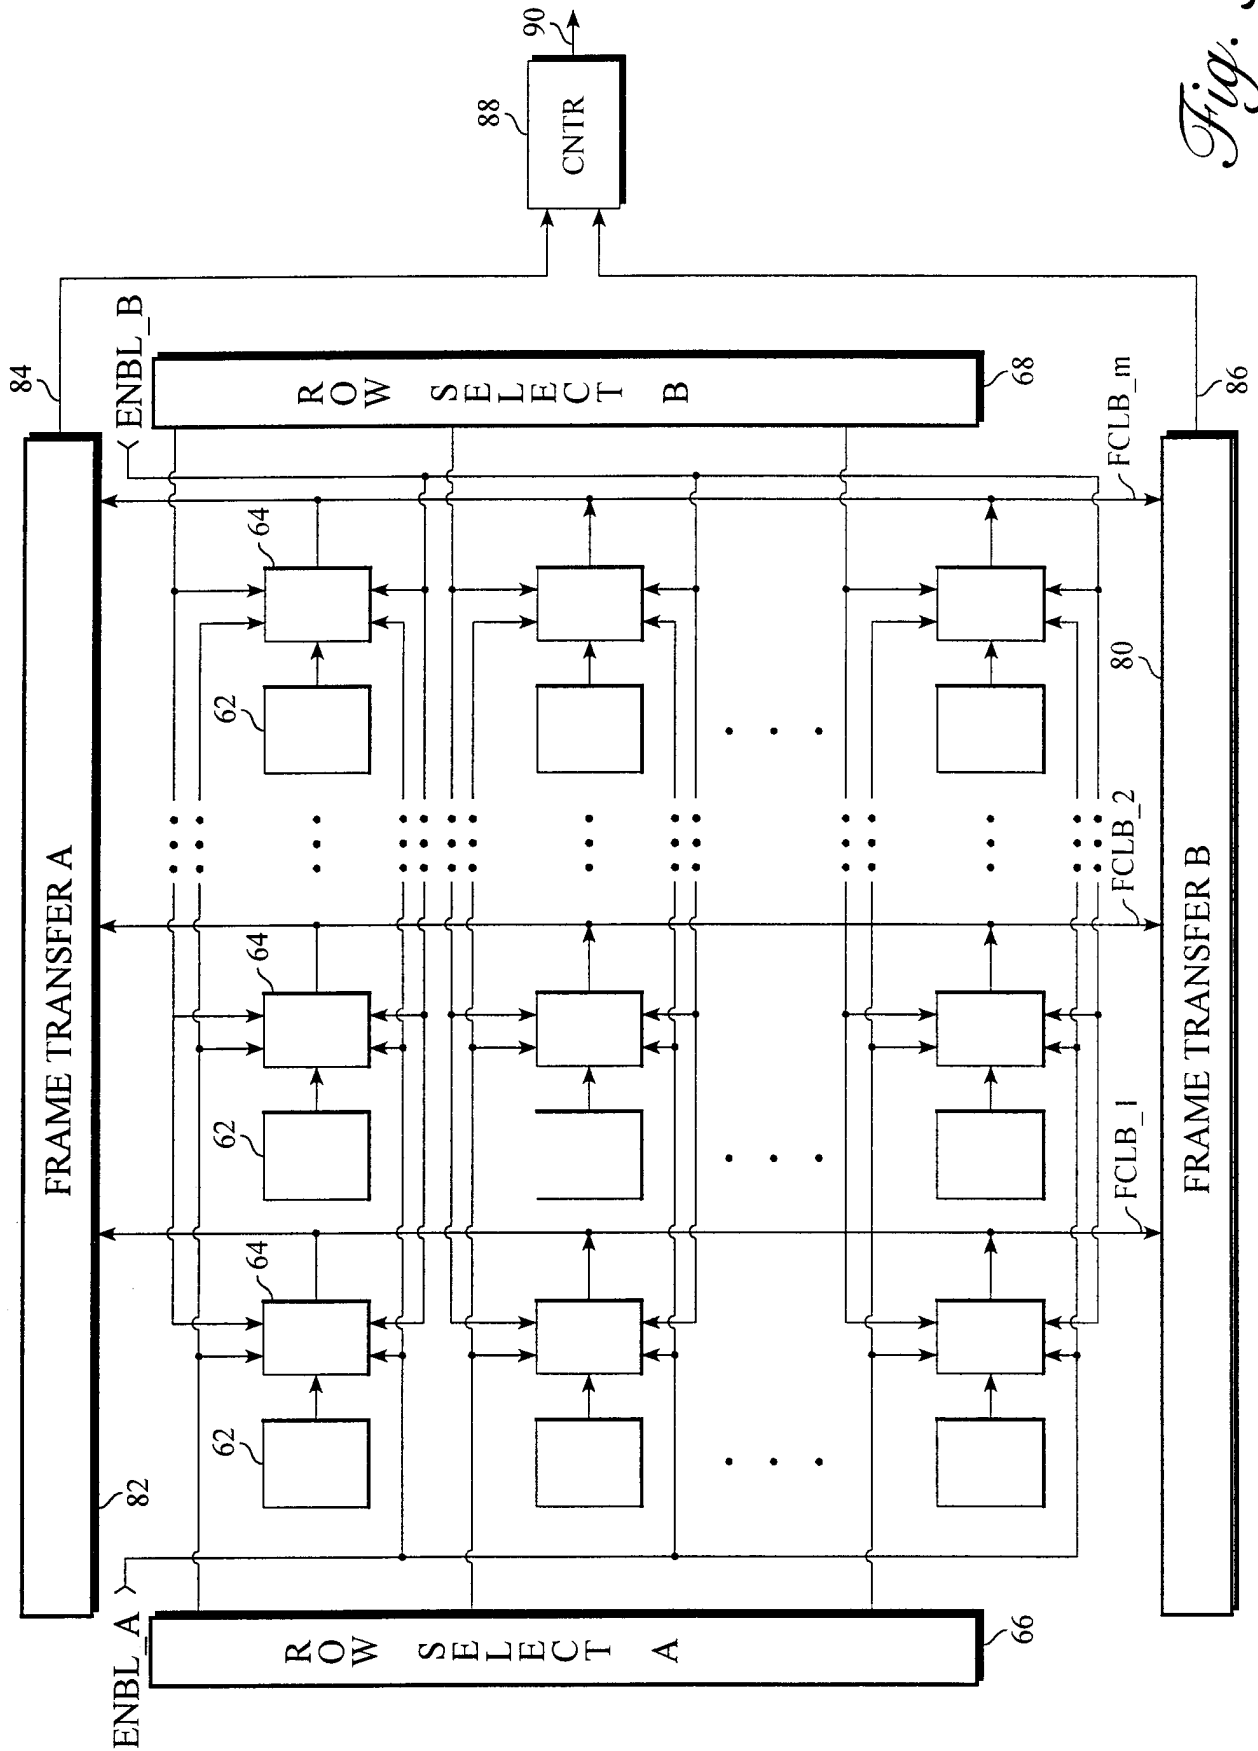


Fig. 9

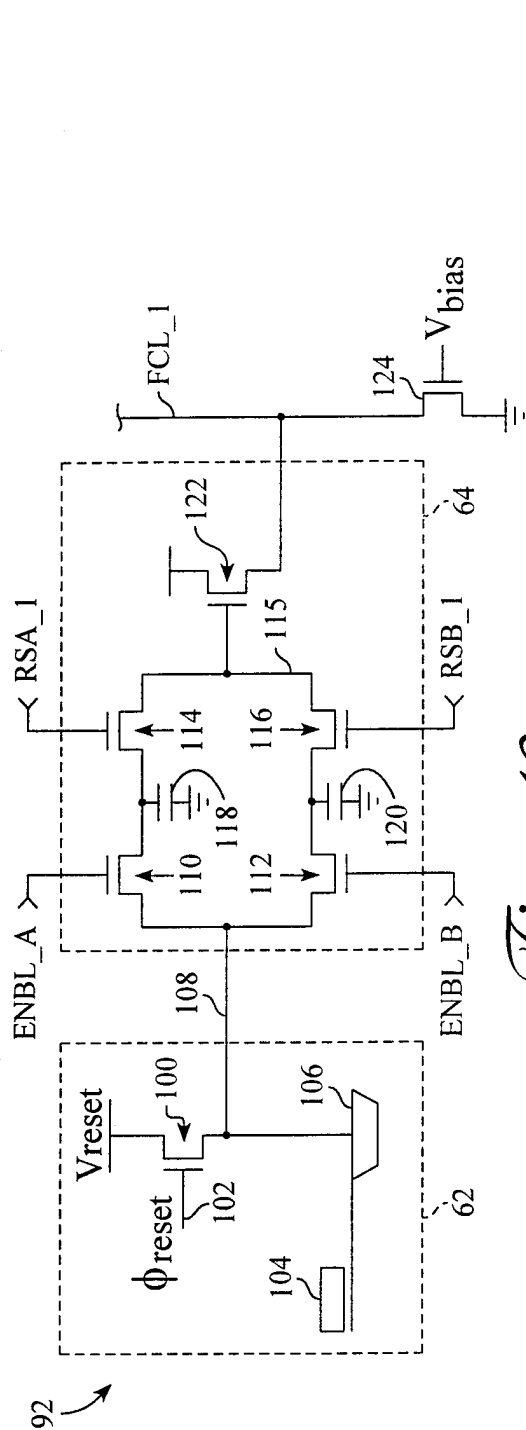


Fig. 10

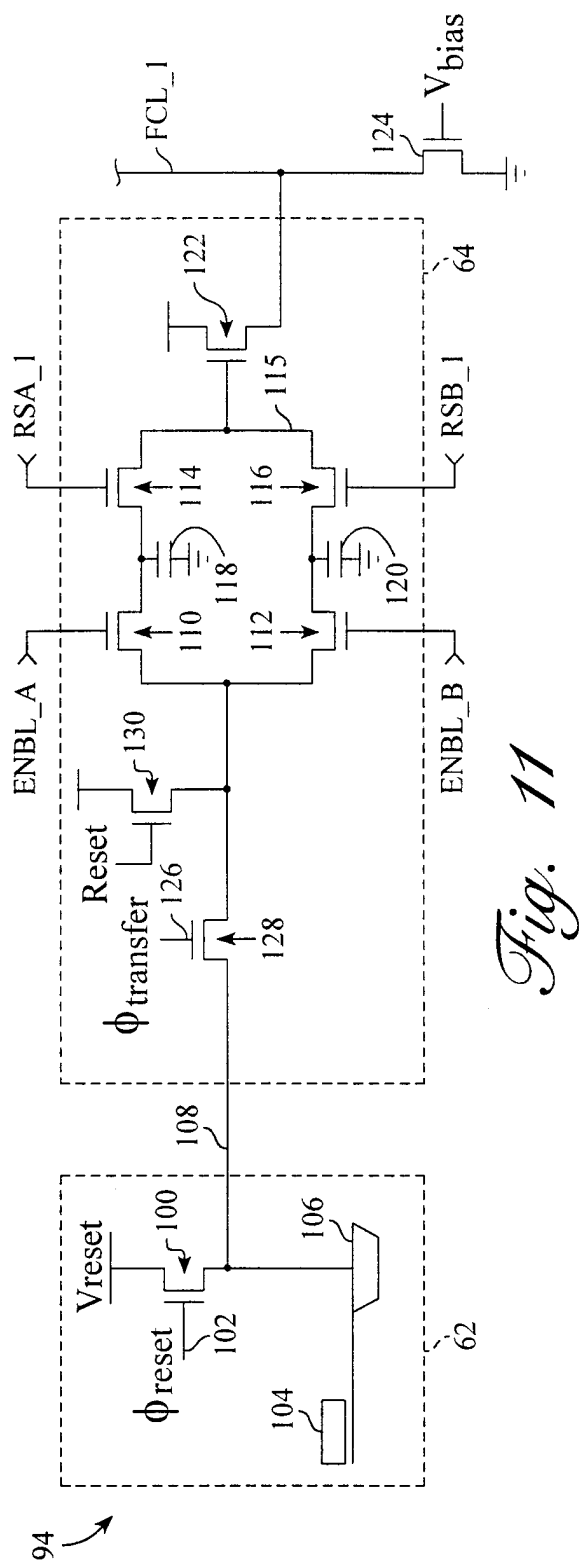


Fig.

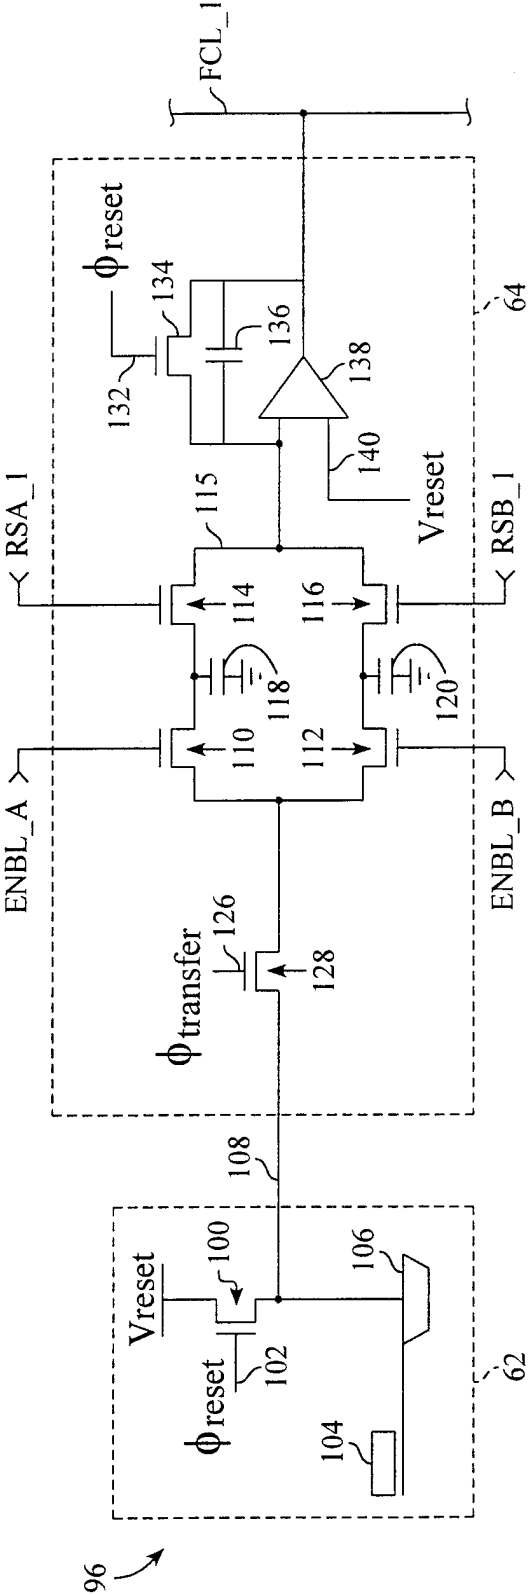


Fig. 12

INTERNATIONAL SEARCH REPORT

International Application No:
PCT/US 00/25714

A. CLASSIFICATION OF SUBJECT MATTER
G09G3/36

According to International Patent Classification (IPC) or to both national classification and IPC⁷

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G09G, G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5686932 A (TOMITA) 11 November 1997, column 2, line 65 - column 4, line 30, claims 1,5, figs. 1,5.	1, 18, 21, 25
A	US 5504601 A (WATANABE et al.) 02 April 1996, claim 1, fig. 1-9.	1, 3, 18, 21, 25
A	EP 0617398 A1 (NEC CORPORATION) 28 September 1994, claim 1.	1, 18, 21, 25
A	US 5903250 A (LEE et al.)	1, 18, 25

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search
06 December 2000

Date of mailing of the international search report
20 February 2001 (20.02.01)

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer
MIHATSEK

INTERNATIONAL SEARCH REPORT

International Application No.

- 2 -

PCT/US 00/25714

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	11 May 1999, claims 1-9, fig. 1. --	1, 18, 25
	WO 99/52012 A (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 14 October 1999, claims 1-2, fig. 1. --	
A	US 5767926 A (KIM et al.) 16 June 1998, claims 1, figs. 1, 3. ----	1, 18, 25

INTERNATIONAL SEARCH REPORT

ANHANG		ANNEX		ANNEXE	
Zum internationalen Recherchenbericht über die internationale Patentanmeldung Nr.		To the International Search Report to the international Patent Application No.		Au rapport de recherche international relatif à la demande de brevet international n°	
In diesem Anhang sind die Mitglieder der Patentfamilien der im obengenannten internationalen Recherchenbericht angeführten Patentdokumente angegeben. Diese Angaben dienen nur zur Unterrichtung und erfolgen ohne Gewähr.		This annex lists the patent family members relating to the patent documents cited in the above-mentioned search report. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.		La présente annexe indique les membres de la famille de brevets relatifs aux documents de brevets cités dans le rapport de recherche international visée ci-dessus. Les renseignements fournis sont donnés à titre indicatif et n'engagent pas la responsabilité de l' Office.	
Im Recherchenbericht angeführte Patentdokumente Patent document cited in search report Document de brevet cité dans le rapport de recherche		Datum der Veröffentlichung Publication date Date de publication		Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	
				Datum der Veröffentlichung Publication date Date de publication	
US A 5686932	11-11-1997	DE C0	69225105	20-05-1998	
		DE T2	69225105	07-01-1999	
		EP A2	535954	07-04-1993	
		EP A3	535954	09-02-1994	
		EP B1	535954	15-04-1998	
		KR B1	144450	15-07-1998	
		JP A2	5216442	27-08-1993	
		JP A2	5210121	20-08-1993	
US A 5504601	02-04-1996	WO A1	9402880	03-02-1994	
		EP A1	603420	29-06-1994	
		EP A4	603420	21-12-1994	
		KR B1	159123	15-01-1999	
		US A	5691793	25-11-1997	
		JP A2	6082811	25-03-1994	
EP A1 617398	28-09-1994	DE C0	69414742	07-01-1999	
EP B1 617398	25-11-1998	DE T2	69414742	01-07-1999	
		JP A2	6273720	30-09-1994	
		JP B2	2626451	02-07-1997	
		KR B1	123033	17-11-1997	
		US A	5526012	11-06-1996	
US A 5903250	11-05-1999	none			
WO A1 9952012	14-10-1999	EP A1	986773	22-03-2000	
		GB A0	9807184	03-06-1998	
US A 5767926	16-06-1998	US A	5517342	14-05-1996	
US A 5767926	16-06-1998	US A	5995175	30-11-1999	
		DE A1	4407043	08-09-1994	
		FR A1	2702286	09-09-1994	
		FR B1	2702286	30-01-1998	
		GB A0	9404205	20-04-1994	
		GB A1	2275809	07-09-1994	
		GB A0	9703868	16-04-1997	
		GB A1	2308218	18-06-1997	
		GB B2	2275809	20-08-1997	
		GB B2	2308218	20-08-1997	
		JP A2	6301059	28-10-1994	
		KR B1	9616796	21-12-1996	

专利名称(译)	用于液晶显示单元的驱动电路		
公开(公告)号	EP1234299A1	公开(公告)日	2002-08-28
申请号	EP2000963636	申请日	2000-09-19
[标]申请(专利权)人(译)	爱特梅尔公司		
申请(专利权)人(译)	Atmel公司		
当前申请(专利权)人(译)	Atmel公司		
[标]发明人	PATHAK SAROJ PAYNE JAMES E		
发明人	PATHAK, SAROJ PAYNE, JAMES, E.		
IPC分类号	G02F1/133 G09G3/20 G09G3/36		
CPC分类号	G09G3/3659 G09G2300/0814 G09G2300/0842 G09G2300/0852		
优先权	09/436064 1999-11-08 US		
外部链接	Espacenet		

摘要(译)

用于液晶显示器中的图像元素 (43) 的阵列 (41) 的驱动电路能够在接收第二组图像数据的同时显示一组图像数据。响应于第一选择信号 (R 1 , A) 的第一选择开关晶体管 (S1) 控制第一图像与第一存储电容器 (C1) 的耦合。响应于第二选择信号 (R 1 , B) 的第二选择开关晶体管 (S2) 控制第二图像与第二存储电容器 (C2) 的耦合。第一存储电容器 (C1) 可以通过响应于第一使能信号 (EN1,1) 的第一使能开关晶体管 (E1) 选择性地耦合到输出节点 (PXL) 。第二存储电容器 (C2) 可以响应于第二使能信号 (EN 2.1) 通过第二使能开关晶体管 (E2) 选择性地耦合到同一输出节点 (PXL) 。通过适当地操纵开关晶体管，一个存储电容器可以耦合到输出节点，而另一个存储电容器与输出节点隔离并接收新的图像数据。