



(11) **EP 1 884 821 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
15.04.2009 Bulletin 2009/16

(51) Int Cl.:
G02F 1/1335 ^(2006.01) **G02F 1/1362** ^(2006.01)
H01L 51/00 ^(2006.01)

(21) Application number: **07252400.2**

(22) Date of filing: **13.06.2007**

(54) **Liquid crystal display device**
Flüssigkristallanzeigevorrichtung
Dispositif d'affichage à cristaux liquides

(84) Designated Contracting States:
DE FR GB

(30) Priority: **28.07.2006 JP 2006206683**

(43) Date of publication of application:
06.02.2008 Bulletin 2008/06

(73) Proprietor: **Future Vision Inc.**
Tokyo 107-0052 (JP)

(72) Inventors:
• **Abe, Makoto**
Tokyo 107-0052 (JP)

• **Tanaka, Tsutomu**
Tokyo 107-0052 (JP)
• **Tsumura, Makoto**
Tokyo 107-0052 (JP)

(74) Representative: **Calderbank, Thomas Roger et al**
Mewburn Ellis LLP
33 Gutter Lane
London
EC2V 8AS (GB)

(56) References cited:
EP-A- 1 801 640 **KR-A- 20050 003 257**
US-A- 5 724 107 **US-A- 5 920 082**
US-A1- 2005 022 374

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a liquid crystal display device. In particular, the invention relates to a liquid crystal display device using an active matrix type liquid crystal display panel.

[0002] A liquid crystal display device comprises a liquid crystal display panel, a driving circuit, and peripheral devices such as backlight. A liquid crystal display panel of a typical liquid crystal display device of active matrix longitudinal electric field type (the so-called TN type) is prepared by sealing a liquid crystal between a first panel, which is made up by a first substrate (active matrix substrate or thin-film transistor substrate; TFT substrate) and a second panel made up by a second substrate (counter substrate or color filter substrate).

[0003] A new technique to provide a high-performance liquid crystal display panel at low cost is proposed in the Patent Document 1, for instance. In this technique, photolithographic process in the manufacture of the liquid crystal display panel is reduced by preparing various types of lines arranged on inner surface of the first substrate, and various types of electrodes and the pixel electrodes or semiconductor layers are prepared by ink jet method. To prepare the lines and the like by ink jet method, an insulating thin film (insulator film) is coated on inner surface of the substrate, and a pattern enclosed by bank-like members (also called "banks") designed to follow the shapes of lines and electrodes is fabricated on the insulator film. In a region enclosed by the banks, a solution (conductive ink) with conductive particles dispersed in a solvent is coated by ink jet method, and then, baking is performed.

[0004] Fig. 27 is a schematical drawing to explain an example of a structure formed on inner surface of a first substrate by ink jet method. Fig. 28 is a flow chart to explain a process for forming the lines and the like by using the banks. In Fig. 27 and Fig. 28, photoresist is coated on inner surface of a first substrate SUB1, for which glass is used as a suitable material. The exposure to light is performed via a mask, which has patterns of the gate lines and the gate electrodes, and patterns of the capacity line. Then, these are developed, and the patterns of the gate lines, the gate electrodes and the capacity lines are removed, and the banks (gate banks) G-BNKs are prepared (bank patterning). Processing is performed in such manner that all portions inside the pattern of the gate banks G-BNKs have lyophilic property, and the other portions have liquid repellent property (lyophilic and liquid repellent processing).

[0005] A conductive solution (metal ink; e.g. an Ag ink with silver particles dispersed in it) is discharged and coated via ink jet (IJ) nozzle to the gate banks G-BNK. Then, by baking, the gate lines (not shown), the gate electrodes GT, and the capacity lines CT are obtained (by IJ discharge of gate lines/electrodes). Next, there is a process to obtain specific resistance of the line to a predetermined value by additional heating (metal baking

(= bank additional heating)). It is desirable that the temperature of the additional heating to obtain specific resistance of the lines to a predetermined value is as high as possible.

5 On the contrary, the banks for forming the gate lines and the gate electrodes in lower layer of the pixel electrode (gate bank G-BNK) and the banks for forming the source/drain electrodes (source/drain banks SD-BNKs) are colored during additional heating when the lines are baked. To avoid the coloring of the banks, it is desirable to decrease the baking temperature of the lines to a value as low as possible.

10 [Patent Document 1] JP-A-2005-12181, which corresponds to US-A-2005-022374, discloses a liquid crystal display device as specified in the preamble of claim 1.

15 **[0006]** For the purpose of obtaining specific resistance of the lines to a predetermined value and of avoiding the coloring of the banks, it has been practiced hitherto to perform 2-step baking, i.e. low temperature baking in the normal atmosphere and high temperature baking in N₂. As a result, processing time is longer and this leads to the decrease of the throughput. The coloring of the banks, which are in lower layer of the pixel electrode (display area), means the decrease of transmissivity or color deviation and the deterioration of the display quality. Also, high temperature baking equipment to use at high temperature such as 300°C is expensive. Further, the use of N₂ means the increase of the running cost. Also, the resin material to suppress the coloring caused by the baking to the minimum is limited, and this impedes the reduction of the manufacturing cost.

20 **[0007]** The present invention seeks to provide a liquid crystal display device, by which it is possible to eliminate or reduce the decrease of transmissivity and color deviation and to manufacture a liquid crystal display device with high brightness and good display quality produced at low cost.

25 **[0008]** The liquid crystal display device of the present invention comprises a first substrate with thin-film transistor arranged for each of a plurality of pixels in matrix arrangement, a second substrate where color filters with a plurality of colors formed to match the pixels and a light shielding film and a counter electrode are arranged, and a liquid crystal display panel prepared by attaching said first substrate and said second substrate and by sealing a liquid crystal between said substrates.

30 **[0009]** The liquid crystal display device of the present invention comprises a gate line where a gate electrode of the thin-film transistor is arranged on the first substrate and used to apply a scan signal, a gate insulator film deposited to cover the gate line, a semiconductor layer formed in island-like shape on the gate insulator film and for making up an active layer of the thin-film transistor, a source electrode and a drain electrode formed on said gate insulator film and individually connected to said semiconductor layer, a data line for forming said source electrode on a part thereof and for supplying the display signal, and a pixel electrode connected to said drain elec-

trode, wherein:

said gate lines and the gate electrodes, said source electrodes and said drain electrodes, and said pixel electrodes are prepared by coating a conductive solution by ink jet method in a region enclosed by the bank-like members of the insulator film and by baking. The bank-like members of the insulator film are arranged only within a region of the light shielding film on the second substrate.

[0010] Also, according to the present invention, width of the light shielding film formed on the second substrate and width of the capacity line arranged on the first substrate are determined by taking into consideration on the positioning tolerance on both sides in width direction of the light shielding film and the capacity lines. As a result, the decrease of the contrast caused by the positioning deviation of the first substrate and the second substrate is reduced.

[0011] According to the present invention, the number of processes required for the preparation of the liquid crystal display panel can be extensively reduced, and transmissivity is improved. As a result, it is possible to provide a liquid crystal display device with high display quality at low cost.

IN THE DRAWINGS

[0012]

Fig. 1 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 1 of a liquid crystal display device of the present invention;

Fig. 2 is a schematical drawing to show cross-section of one pixel of a liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 1 (b) and by sealing a liquid crystal between the two substrates;

Fig. 3 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Embodiment 1 according to the present invention;

Fig. 4 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 2 of the liquid crystal display device of the present invention;

Fig. 5 is a schematical drawing to show cross-section of one pixel of a liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 4 (b) and by sealing a liquid crystal between the two substrates;

Fig. 6 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Embodiment 2 of the invention;

Fig. 7 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 3 of the liquid crystal display device according to the present invention;

Fig. 8 is a schematical drawing to show cross-section of one pixel of a liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 7 (b) and by sealing a liquid crystal between the two substrates;

Fig. 9 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Embodiment 3 of the invention;

Fig. 10 represents drawings to explain preparation of a separate pattern in Embodiment 3 of the present invention;

Fig. 11 is a drawing to explain another structure example of SPP portion of the separate pattern shown in Fig. 10;

Fig. 12 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 4 of the liquid crystal display device of the present invention;

Fig. 13 is a schematical drawing to show cross-section of one pixel of a liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 12 (b) and by sealing a liquid crystal between the two substrates;

Fig. 14 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Embodiment 4 of the invention;

Fig. 15 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 5 of the liquid crystal display device of the present invention;

Fig. 16 is a schematical drawing to show cross-section of one pixel of a liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 15 (b) and by sealing a liquid crystal between the two substrates;

Fig. 17 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Embodiment 5 of the invention;

Fig. 18 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 6 of the liquid crystal display device of the present invention;

Fig. 19 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Embodiment 6 of the invention;

Fig. 20 represents drawings to explain a process of etching of silicon film S and n⁺silicon film nS for explaining features of Embodiment 6 of the present invention;

Fig. 21 represents drawings to explain etching proc-

ess of a protective film and a gate insulator film to cover source bank and channel portion subsequent to Fig. 20 to explain the features of Example 6 of the present invention;

Fig. 22 represents drawings to explain detailed cross-section of a connection electrode portion shown in each of Fig. 4, Fig. 15, Fig. 16, etc.

Fig. 23 represents drawings to explain a general design example of a light shielding film;

Fig. 24 represents drawings to explain a design example of a capacity line and a light shielding film formed on the gate bank of the present invention;

Fig. 25 represents drawings to explain another design example of a capacity line and a light shielding film as shown in Fig. 24;

Fig. 26 represents drawings to explain still another design example of a capacity line and a light shielding film formed on the gate bank of the present invention;

Fig. 27 is a cross-sectional view schematically illustrating an example of a structure formed on inner surface of the first substrate by using ink jet method; and

Fig. 28 is a flow chart to explain a process for forming lines and the like using banks.

[0013] Detailed description will be given below on the best aspect of the present invention referring to the attached drawings. Bank-like members are walls provided on each side of a groove to make up a groove to hold a conductive solution for preparing lines, electrodes, etc. In the following, description will be given by referring such bank-like members as "banks" (BNKs).

[0014] Fig. 1 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel, which makes up Embodiment 1 of the liquid crystal display device of the present invention. Fig. 1 (a) is a plan view, and Fig. 1 (b) is a cross-sectional view along the line A-A' in Fig. 1 (a). There are provided a plurality of gate lines GL and a plurality of source lines SL to cross the gate lines, and the gate lines and the source lines are formed on a first substrate SUB1, for which glass is used as a suitable material. One pixel is arranged within a region (pixel region) enclosed by two gate lines GL and two source lines SL. The source line SL is also called "data line" because it has a function to supply display data to the thin-film transistor. In the thin-film transistor, source electrode and drain electrode change places with each other during operation, and the term "drain line" may be used. However, description will be given below as the source line SL.

[0015] One pixel is made up by a thin-film transistor TFT and a pixel electrode PX. In the present example, a capacity line CL is arranged in a direction parallel to the gate line by traversing the central portion in the display area. The thin-film transistor TFT is disposed near the intersection of the gate line GL and the source line SL. The thin-film transistor TFT comprises a gate electrode

GT extending from the data line, a semiconductor film SI, a source electrode SD1, and a drain electrode SD2. In the semiconductor film SI, n⁺silicon contact layer is laminated on upper layer of silicon, and a channel is formed by removing the central portion of the contact layer. A protective film PF is formed on the channel.

[0016] In Fig. 1 (b), which is a cross-sectional view along the line A-A' in Fig. 1 (a), there are provided a gate bank G-BNK, which is a bank for the gate line GL, the gate electrode GT and the capacity line CL on the first substrate SUB1. The gate banks G-BNKs are arranged in the region of the thin-film transistor TFT and only on the portion where the capacity line CL and the gate line GL are formed. To the drain electrode SD2 of the thin-film transistor TFT, the pixel electrode PX comprising transparent conductive film using ITO as a suitable material is connected.

[0017] To prepare the gate electrode GT of the thin-film transistor TFT, a conductive ink using silver (Ag) solution as a suitable material is coated in a groove formed by the gate bank G-BNK provided in the thin-film transistor region by ink jet method. Then, it is baked. The capacity line CL is prepared by the gate bank G-BNK prepared in the pixel region. The gate line GL is prepared by the gate bank G-BNK formed outside of the pixel region. The gate insulator film GI is formed on it. The source electrode SD1 and the drain electrode SD2 are prepared by source-drain bank (hereinafter, may be referred simply as "source bank") SD-BNK provided on the gate insulator film GI. As described later, upper portions of these gate banks G-BNKs are concealed by the light shielding film (black matrix) arranged on the second substrate.

[0018] Fig. 2 is a schematical drawing to show a cross-section of one pixel of a liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 1 (b) and by sealing a liquid crystal between the two substrate. To facilitate the explanation, the counter electrode on the second substrate is not shown in Fig. 2. On the uppermost surface of the first substrate SUB1, a first orientation film ORI1 is formed, and a second orientation film ORI2 is provided on the uppermost surface of the second substrate SUB2. On a lower layer of the second orientation film ORI2, which is formed on the uppermost surface of the second substrate SUB2, a counter electrode (not shown) is arranged by allover deposition. On the lower layer of the counter electrode, a color filter CF and a light shielding film BM are formed. The light shielding film BM is provided at such position that SD bank SD-BNK region (i.e. the region of the thin-film transistor TFT) and the gate line GL are concealed, and at a position to conceal the gate bank G-BNK where the capacity line CL is formed.

[0019] In this example, the capacity line CL is arranged within the region where pixel electrode is formed, and pixel display area AR is separated above the capacity line CL and at a portion where the gate bank G-BNK to form the capacity line CL is concealed. Light shutter effect

of the liquid crystal LC becomes effective in the display area AR.

[0020] Fig. 3 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate in Embodiment 1 of the present invention. Now, description will be given on this process by referring to Fig. 1 and Figs. 3 (a), (b) in this order. First, inner surface of the first substrate SUB1, for which glass plate is used as a suitable material, is rinsed by initial rinsing. Then, a photosensitive resin film for the gate bank is coated. By the patterning on the gate line, the gate electrode and the capacity line, the gate bank G-BNK is formed. Liquid repellent processing is performed to give liquid repellent property to the surface and outer side of the gate bank G-BNK, and lyophilic processing is carried out to give lyophilic property to inner side of the gate-bank G-BNK.

[0021] On inner side (groove) of the gate bank G-BNK, a conductive ink, for which silver solution is used as a suitable material, is coated via ink jet nozzle. After baking, the gate line GL, the gate electrode GT, and the capacity line CT are prepared. Silicon nitride SiN is deposited by vacuum evaporation over inner surface of the first substrate SUB1, including the gate banks G-BNKs on both sides, the gate line GL, the gate electrode GT, and the capacity line CT on both sides of these, and the gate insulator film GI is formed. On the gate insulator film GI, amorphous silicon semiconductor film (a-Si)S and n⁺silicon semiconductor film (n⁺Si)nS are deposited by vacuum evaporation sequentially. The amorphous silicon semiconductor film S and n⁺silicon semiconductor film nS are formed in island-like shape by photolithographic process. Compared with the semiconductor film S, the n⁺silicon semiconductor film nS is extremely thin, and this is to be a contact layer for the source/drain electrode as described later.

[0022] The n⁺silicon semiconductor film nS is separated to the source electrode side and the drain electrode side. A channel is formed between the separated portions. To cover the amorphous silicon semiconductor film exposed to the channel portion, the protective film PF is buried. On the gate insulator film GI, a source/drain bank SD-BNK is formed. The source/drain bank SD-BNK is prepared in a manner similar to the preparation of the gate bank G-BNK. Also, the source/drain bank SD-BNK is formed at a position where it is concealed by the light shielding film on inner surface of the second substrate disposed above the thin-film transistor TFT. A conductive ink is coated by ink jet method on the source/drain bank SD/BNK. By baking this, the source electrode SD1 and the drain electrode SD2 are prepared. The drain electrode SD2 has a structure with a graded step similar to the lower layer structure.

[0023] Next, a pixel bank P-BNK is formed to enclose the pixel region on the source line SL including the upper layer of the thin-film transistor TFT and on the gate line GL between adjacent pixels. Upper surface of this pixel bank P-BNK is processed by liquid repellent processing,

and the surfaces of the drain electrode SD2 including wall surface on both sides and the surface of the gate insulator film GI are processed by lyophilic processing. Between the pixel banks P-BNK, a solution containing conductive particles, for which ITO is used as a suitable material, is coated by ink jet method. After baking, this is prepared as the pixel electrode PX. Fig. 3 (h) shows a pattern of light shielding film (black matrix) formed on inner surface of the second substrate SUB2.

[0024] According to Embodiment 1, the pixel region AR does not have a bank layer in the lower layer. Thus, even when coloring of bank occurs due to the baking to maintain specific resistance of the lines to a predetermined value, no influence is exerted on light transmissivity of the pixel region AR, and a liquid crystal display device with high brightness and good color reproducibility can be obtained.

[Embodiment 2]

[0025] Fig. 4 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 2 of the present invention. Fig. 4 (a) is a plan view, and Fig. 4 (b) is a cross-sectional view along the line A-A' in Fig. 4 (a). Fig. 5 is a schematical drawing to show cross-section of one pixel of the liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 4 (b) and by sealing a liquid crystal between the two substrates. To facilitate the explanation, a counter electrode on the second substrate is not shown in Fig. 5. Fig. 6 represents plan views to sequentially explain a process for manufacturing the first substrate in Embodiment 2.

[0026] In Fig. 4, there are provided a plurality of gate lines GL formed on the first substrate SUB1, for which glass is used as a suitable material, and a plurality of source lines SL crossing the gate lines, and one pixel is provided in a region (pixel region) enclosed by two gate lines GL and two source lines SL. In the thin-film transistor, the source electrode and the drain electrode change places with each other during operation, and this may be called "drain line". However, description will be given here as the source line SL. One pixel is made up by the thin-film transistor TFT and the pixel electrode PX.

[0027] In this Embodiment, too, a capacity line CL is arranged in a direction parallel to the gate line by traversing approximately the central portion in the region where the source electrode is formed. The thin-film transistor TFT is arranged near the intersection of the gate line GL and the source line SL. The thin-film transistor TFT comprises a gate electrode GT extending from the gate line, a semiconductor film SI, a source electrode SD1, and a drain electrode SD2. To prepare the semiconductor film SI, a contact layer of n⁺silicon is laminated on upper layer of silicon, and a channel is formed by removing the central portion of this contact layer. A protective film PF is filled in the channel.

[0028] In Fig. 4 (b), there are provided the gate line GL, the gate electrode GT, and the gate bank G-BNK, which is a bank to form the capacity line CL, on the first substrate SUB1. The gate-banks G-BNKs are arranged only within the region of the thin-film transistor TFT - in the portion where the capacity line CL is formed, and on the portion where the gate line GL is formed. On the drain electrode SD2 of the thin-film transistor TFT, a pixel electrode PX made of a transparent conductive film, for which ITO is used as a suitable material, is connected via a connection electrode JED.

[0029] To prepare the gate electrode GT of the thin-film transistor TFT, a conductive ink, for which silver (Ag) solution is used as a suitable material, is coated by ink jet method in a groove prepared by the gate bank G-BNK in the region where the thin-film transistor is formed. After baking the gate electrode GT is formed. The capacity line CL is formed by the gate bank G-BNK arranged in the pixel region. The gate line GL is prepared by the gate bank G-BNK outside of the pixel region. The gate insulator film GI is prepared on it. The source electrode SD1 and the drain electrode SD2 are formed by SD bank SD-BNK provided on the gate insulator film GI. As described later, the portion of the gate-banks G-BNKs are at such positions that these are concealed by the light shielding film (black matrix) on the second substrate.

[0030] Fig. 5 is a schematical drawing to show a cross-section of one pixel of the liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 4 (b) and by sealing a liquid crystal between the two substrates. Here, too, similarly to the cases shown in Fig. 1, to facilitate the explanation, the counter electrode on the second substrate is not shown in Fig. 5. A first orientation film ORI1 is formed on the uppermost surface of the first substrate SUB1, and a second orientation film ORI2 is prepared on the uppermost surface of the second substrate SUB2. On the lower layer of the second orientation film ORI2 prepared on the uppermost surface of the second substrate SUB2, a counter electrode (not shown) is formed by all over deposition. On the lower layer of this counter electrode, a color filter CF and a light shielding film BM are arranged. The light shielding film BM is provided at a position to conceal SD bank SD-BNK, which is to be the region of the thin-film transistor TFT, and the gate line GL, and also at a position to conceal the gate bank G-BNK where the capacity line CL is formed.

[0031] In this Embodiment, too, the capacity line CL is arranged in the region of the pixel electrode. A display area AR of pixel is separated at a portion to conceal the gate bank G-BNK where the capacity line CL is formed on upper layer of the capacity line CL. Light shutter effect of the liquid crystal LC becomes effective in the display area AR. In this Embodiment, the bank to form the pixel electrode PX is not provided, and the pixel electrode PX is formed by using the SD bank SD-BNK. Thus, a process to prepare the bank for pixel electrode is not needed. The connection electrode JED to connect the pixel electrode

PX to the drain electrode SD2 is coated by dropping an ink using ink jet method.

[0032] Fig. 6 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Embodiment 2 of the present invention. Now, description will be given on this process by sequentially referring to Fig. 5 and Figs. 6 (a), (b) in this order. First, initial rinsing is performed on inner surface of the first substrate SUB1, for which glass plate is used as a suitable material. Then, a photosensitive resin film for the gate bank is coated. By carrying out the patterning to form the gate line, the gate electrode and the capacity line, the gate bank G-BNK is prepared. Liquid repellent processing is performed on the surface and on outer side of the gate bank G-BNK, and lyophilic processing is performed on inner side of the gate bank G-BNK.

[0033] On inner side (groove) of the gate bank G-BNK, a conductive ink, for which silver solution is used as a suitable material, is coated via ink jet nozzle. After baking, the gate line GL, the gate electrode GT, and the capacity line CL are prepared. Silicon nitride SiN is deposited by vacuum evaporation on inner surface of the first substrate SUB1 including the gate line GL, the gate electrode GL, the capacity line CT, and the gate banks G-BNKs on both sides of these, and the gate insulator film GI is formed. On the gate insulator film GI, amorphous silicon semiconductor film (a-Si)S, and n⁺silicon semiconductor film (n⁺Si) nS are deposited one after another by vacuum evaporation. The amorphous silicon semiconductor film S and the n⁺silicon semiconductor film nS are formed in island-like shape by photolithographic process. The n⁺silicon semiconductor film nS is extremely thin compared with the amorphous silicon semiconductor film S, and it is turned to a contact layer for the source /drain electrode.

[0034] The n⁺silicon semiconductor film nS is separated to the source electrode side and to the drain electrode side. A channel is formed between the separated portions. The protective film PF is buried to cover the amorphous silicon semiconductor film S exposed to the channel. On the gate insulator layer, a source/drain bank SD-BNK is arranged. This source/drain bank SD-BNK is prepared in a manner similar to the gate bank G-BNK. Also, the source/drain bank SD-BNK is formed at a position where it is concealed by a light shielding film on inner surface of the second substrate arranged above the thin-film transistor TFT. A conductive ink is coated on the source/drain bank SD-BNK by ink jet method. After baking, the source electrode SD1 and the drain electrode SD2 are prepared. The drain electrode SD2 has a graded step to follow the lower structure.

[0035] Next, using the source/drain bank SD-BNK on the drain electrode SD2 side and the bank G-BNK for the gate line, a solution of transparent conductive particles, for which ITO is used as a suitable material, is coated on the display area by ink jet method. After baking, a pixel electrode PX is formed. The same conductive ink as used on the pixel electrode PX is dropped and coated between

the pixel electrode PX and the drain electrode SD2. After baking, a connection electrode JED is prepared. Fig. 6 (h) shows a pattern of the light shielding film (black matrix) BM to be formed on inner surface of the second substrate SUB2.

[0036] According to Embodiment 2, in addition to the effects described in Embodiment 1, there is no need to have the bank for forming the pixel electrode PX. As a result, it is possible to obtain a liquid crystal display device with high brightness and with good color reproducibility.

[Embodiment 3]

[0037] Fig. 7 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 3 for the liquid crystal display device of the present invention. Fig. 7 (a) is a plan view, and Fig. 7 (b) is a cross-sectional view along the line A-A' in Fig. 7 (a). Fig. 8 is a schematical view showing a cross-section of one pixel of the liquid crystal display panel prepared by attaching a second substrate, i.e. a counter electrode, to the first substrate shown in Fig. 7 (b) and by sealing a liquid crystal between the two substrates. To facilitate the explanation, the counter electrode on the second substrate is not shown in Fig. 8. Fig. 9 represents plan views of one pixel for sequentially explaining a process for manufacturing the first substrate of Embodiment 3.

[0038] In Fig. 7, there are provided a plurality of gate lines formed on the first substrate SUB1, for which glass is used as a suitable material, and a plurality of source lines SL to cross the gate lines. One pixel is formed in a region (pixel region) enclosed by two gate lines and two source lines. Regarding the source electrode and the drain electrode, description will be given here as the source line SL. One pixel is made up by the thin-film transistor TFT and the pixel electrode PX.

[0039] In this Embodiment, too, a capacity line CL is arranged in a direction parallel to the gate by traversing approximately the central portion in the region where the source electrode is formed. The thin-film transistor TFT is arranged near the intersection of the gate line GL and the source line SL. The thin-film transistor TFT comprises a gate electrode GT extending from the gate line, a semiconductor film SI, a source electrode SD1, and a drain electrode SD2. To prepare the semiconductor film SI, a contact layer of n⁺silicon is laminated on upper layer of silicon, and a channel is formed by removing the central portion of this contact layer. A protective film PF is filled in the channel.

[0040] In Fig. 7 (b), there are provided the gate line GL, the gate electrode GT, and the gate bank G-BNK, which is a bank to form the capacity line CL, on the first substrate SUB1. The gate-banks G-BNKs are arranged only within the region of the thin-film transistor TFT, in the portion where the capacity line CL is formed, and on the portion where the gate line GL is formed. On the drain electrode SD2 of the thin-film transistor TFT, a pixel elec-

trode PX made of a transparent conductive film, for which ITO is used as a suitable material, is connected via a separation pattern SPP.

[0041] To prepare the gate electrode GT of the thin-film transistor TFT, a conductive ink, for which silver (Ag) solution is used as a suitable material, is coated by ink jet method in a groove prepared by the gate bank G-BNK in the region where the thin-film transistor is formed. The capacity line CL is formed by the gate bank G-BNK arranged in the pixel region. The gate line GL is prepared by the gate bank G-BNK outside of the pixel region. The gate insulator film GI is prepared on it. The source electrode SD1 and the drain electrode SD2 are formed by SD bank SD-BNK provided on the gate insulator film GI. As described later, upper portions of the gate-banks G-BNKs are at such positions that these are concealed by the light shielding film (black matrix) on the second substrate.

[0042] Fig. 8 is a schematical drawing to show a cross-section of one pixel of the liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 7 (b) and by sealing a liquid crystal between the two substrates. Here, too, similarly to the cases shown in Fig. 1 and Fig. 4, to facilitate the explanation, the counter electrode on the second substrate is not shown in Fig. 8. A first orientation film ORI1 is formed on the uppermost surface of the first substrate SUB1, and a second orientation film ORI2 is prepared on the uppermost surface of the second substrate SUB2. On the lower layer of the second orientation film ORI2 prepared on the uppermost surface of the second substrate SUB2, a counter electrode (not shown) is formed by allover deposition. On the lower layer of this counter electrode, a color filter CF and a light shielding film BM are arranged. The light shielding film BM is provided at a position to conceal SD bank SD-BNK, which is to be the region of the thin-film transistor TFT, and the gate line GL, and also at a position to conceal the gate bank G-BNK where the capacity line CL is formed.

[0043] In this Embodiment, too, the capacity line CL is arranged in the region of the pixel electrode. A display area AR of pixel is separated at a portion to conceal the gate bank G-BNK where the capacity line CL is formed on upper layer of the capacity line CL. Light shutter effect of the liquid crystal LC becomes effective in the display area AR. In this Embodiment, the bank to form the pixel electrode PX is not provided, and the pixel electrode PX is formed by using SD bank SD-BNK. Thus, a process to prepare the bank for pixel electrode is not needed. The pixel electrode PX is connected to the drain electrode SD via a separation pattern SPP. The separation pattern SPP will be described in connection with Fig. 10.

[0044] Fig. 9 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Embodiment 3 of the present invention. Now, description will be given on this process by sequentially referring to Fig. 8 and Fig. 9 (a), (b) in this order. First,

initial rinsing is performed on inner surface of the first substrate SUB1. for which glass plate is used as a suitable material. Then, a photosensitive resin film for the gate bank is coated. By carrying out the patterning to form the gate line, the gate electrode and the capacity line, the gate bank G-BNK is prepared. Liquid repellent processing is performed on the surface and on outer side of the gate bank G-BNK, and lyophilic processing is performed on inner side of the gate bank G-BNK.

[0045] On inner side (groove) of the gate bank G-BNK, a conductive ink, for which silver solution is used as a suitable material, is coated via ink jet nozzle. After baking, the gate line GL, the gate electrode GT, and the capacity line CL are prepared. Silicon nitride SiN is deposited by vacuum evaporation on inner surface of the first substrate SUB1 including the gate line GL, the gate electrode GL, the capacity line CT, and the gate banks G-BNKs on both sides of these, and the gate insulator film GI is formed. On the gate insulator film GI, amorphous silicon semiconductor film (a-Si)S, and n⁺silicon semiconductor film (n⁺Si) nS are deposited one after another by vacuum evaporation. The amorphous silicon semiconductor film S and the n⁺silicon semiconductor film nS are formed in island-like shape by photolithographic process. The n⁺silicon semiconductor film nS is extremely thin compared with the amorphous silicon semiconductor film S, and it is turned to a contact layer for the source/drain electrode.

[0046] The n⁺silicon semiconductor film nS is separated to the source electrode side and to the drain electrode side. A channel is formed between the separated portions. The protective film PF is buried to cover the amorphous silicon semiconductor film S exposed to the channel. On the gate insulator layer, a source/drain bank SD-BNK is arranged. The source/drain bank has the groove pattern for forming the separation pattern SPP in the side of the pixel electrode. This source/drain bank SD-BNK is prepared in a manner similar to the gate bank G-BNK. Also, the source/drain bank SD-BNK is formed at a position where it is concealed by a light shielding film on inner surface of the second substrate arranged above the thin-film transistor TFT.

[0047] A conductive ink is coated on the source/drain bank SD-BNK by ink jet method. After baking, the source electrode SD1 and the drain electrode SD2 are prepared. The drain electrode SD2 has a graded step to follow the lower structure. But, the coating amount of the conductive ink is limited on the drain electrode SD2. It is so arranged that the amount of the ink to become the film when it is baked by overlapping with the conductive ink for the pixel electrode coated subsequently will be equal to the thickness of the source electrode SD1.

[0048] Next, using the source/drain bank SD-BNK on the drain electrode SD2 side and the bank G-BNK for the gate line, a solution of transparent conductive particles, for which ITO is used as a suitable material, is coated on the display area by ink jet method. After baking, a pixel electrode PX is formed. In this case, the conductive ink

solution for the pixel electrode PX flows to upper layer of the drain electrode SD2 in the groove pattern for forming the separation pattern SPP, and it is connected to the drain electrode SD2 in 2-layer structure or in a mixed structure. Fig. 9 (h) shows the pattern of the light shielding film (black matrix) BM to be formed on inner surface of the second substrate SUB2.

[0049] Fig. 10 is given to explain the formation of the separation pattern in Embodiment 3 of the present invention. As shown in Fig. 10 (a), the source/drain bank SD-BNK on the drain electrode SD2 is provided with a narrow groove to form the separation pattern SPP in Embodiment 3. A conductive ink for the source drain is coated on the source-drain bank SD-BNK. In this case, as shown in Fig. 10 (b), the coated conductive ink flows to the narrow groove to form the separation pattern SPP and is coated almost over the entire narrow groove. The coated film is thinner than the source electrode SD1.

[0050] Then, as shown in Fig. 10 (c), the conductive ink for the pixel electrode is coated on the pixel region. The conductive ink flows into the narrow groove to form the separation pattern SPP, and it is superimposed on the ink for the source electrode SD1 or it is mixed with the ink for the source electrode SD1, and it is turned to an ink film similar to the ink film for the source electrode SD1. By baking this, a structure is obtained where the pixel electrode and the drain electrode SD2 are connected with each other as shown in Fig. 7 (b).

[0051] Fig. 11 is a drawing to explain another structure example of the separation pattern SPP shown in Fig. 10. In Fig. 11, a connection electrode JED similar to that of Embodiment 2 is formed by ink jet method on the separation pattern SPP shown in Fig. 10 (c). As a result, the reliability is improved in the electrical connection on the separation pattern SPP.

[0052] According to Embodiment 3, in addition to the effects obtained in Embodiment 1, there is no need to have the bank for forming the pixel electrode PX, similar to Embodiment 2. And it is possible to obtain a liquid crystal display device with high brightness and with good color reproducibility. [Embodiment 4]

[0053] Fig. 12 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 4 of the present invention. Fig. 12 (a) is a plan view, and Fig. 12 (b) is a cross-sectional view along the line A-A' in Fig. 12 (a). Fig. 13 is a schematical drawing to show cross-section of one pixel of the liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 12 (b) and by sealing a liquid crystal between the two substrates. To facilitate the explanation, a counter electrode on the second substrate is not shown in Fig. 13. Fig. 14 represents plan views to sequentially explain a process for manufacturing the first substrate in Example 4.

[0054] The structure of Embodiment 4 is approximately the same as that of Embodiment 3. The pixel electrode PX and the drain electrode SD2 are connected with each

other by the separation pattern SPP. It is different from Embodiment 3 in that, as shown in the cross-sectional views of Fig. 12 and Fig. 13 and as shown in Fig. 14 (e), the source bank SD-BNK is prepared before the etching of the protective film PF, and the etching for the protective film PF is performed using the source bank SD-BNK as a mask.

[0055] Similarly to Embodiment 3, according to Embodiment 4, there is no need to have the bank for forming the pixel electrode PX. As a result, it is possible to obtain a liquid crystal display device with high brightness and with good color reproducibility.

[0056] Fig. 15 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 5 of the present invention. Fig. 15 (a) is a plan view, and Fig. 15 (b) is a cross-sectional view along the line A-A' in Fig. 15 (a). Fig. 16 is a schematical drawing to show cross-section of one pixel of the liquid crystal display panel prepared by attaching a second substrate, i.e. a counter substrate, to the first substrate shown in Fig. 15 (b) and by sealing a liquid crystal between the two substrates. To facilitate the explanation, a counter electrode on the second substrate is not shown in Fig. 16. Fig. 17 represents plan views to sequentially explain a process for manufacturing the first substrate in Embodiment 5.

[0057] Embodiment 5 is characterized in that the pixel electrode PX is directly formed on inner surface of the first substrate SUB1. Also, in Embodiment 5, the drain electrode SD2 and the pixel electrode PX of the thin-film transistor are connected via a first connection electrode JED1. Also, a second connection electrode JED2 is used to connect between the pixel electrode separated by the capacity line CL. The first connection electrode JED1 and the second connection electrode JED2 are also formed by dropping and coating the ink by the ink jet method.

[0058] As shown in Fig. 15, Fig. 16, and Fig. 17, the gate banks G-BNKs for forming the gate line GL, the gate electrode GT, and the capacity line CL are formed on inner surface of the first substrate SUB1. All of the gate banks are arranged at the positions where these are concealed by the light shielding film BM on the second substrate SUB2. Using the gate banks G-BNKs, the ink is coated on the gate electrode GT, the capacity line CL, and the gate line GL by ink jet method, and then, baking is performed.

[0059] Next, using the gate banks G-BNKs, the conductive ink is coated on the display area AR for the pixel to form the pixel electrode by ink jet method. After baking, the pixel electrode PX is prepared. Then, silicon nitride SiN is deposited by vacuum evaporation, and the gate insulator film GI is prepared. Patterning is performed to leave the portion for forming the thin-film transistor TFT to cover the gate electrode GT and the upper layer to cover the capacity line CL, and the pixel electrode PX in the display area is exposed. Silicon film and n⁺silicon film are formed, and the islands of the silicon film and the n⁺silicon film are formed by photolithographic process

and by etching. By fabricating the n⁺silicon film, a channel is prepared, and a protective film is filled to cover the channel.

[0060] The islands of the silicon film and the n⁺silicon film are formed to cover the gate insulator film GI, and the source bank SD-BNK is formed on the source line SL, the source electrode SD1 and the drain electrode SD2 in the region of the thin-film transistor. With a region enclosed by the source bank SD-BNK, a conductive ink is coated by ink jet method. After baking, the source line SL, the source electrode SD1 and the drain electrode SD2 are formed.

[0061] As shown in Fig. 15, Fig. 16 and Fig. 17 (g), the conductive ink is coated to cross over the drain electrode SD2 and the pixel electrode PX, and a connection electrode JED1 to electrically connect these two is prepared. Also, by coating the conductive ink on the capacity line CL by ink jet method, a connection electrode JED2 to electrically connect between the pixel electrodes separated by the capacity line CL is prepared. When the connection electrode JED2 is formed, it is desirable to coat the ink sequentially so that a plurality of ink drops are superimposed one upon another along the capacity line CL as shown in Fig. 17 (g). As the conductive ink for preparing the connection electrode JED1 and JED2, it is desirable to use a solution with transparent conductive particles such as ITO similar to the one used for forming the pixel electrode PX.

[0062] According to Embodiment 5, neither the gate insulator film on lower layer of the pixel electrode PX nor the resin layer for forming the bank is used. As a result, transmissivity is improved. Also, no coloring occurs due to the baking of the lines and the electrodes prepared by ink jet method. Thus, it is possible to provide a liquid crystal display device with high brightness and with good color reproducibility. Further, by simplifying the process, the liquid crystal display device can be produced at relatively low cost.

[Embodiment 6]

[0063] Fig. 18 represents drawings to explain one pixel of a first substrate (a thin-film transistor substrate) of a liquid crystal display panel of Embodiment 6 for the liquid crystal display device of the present invention. Fig. 18 (a) is a plan view, and Fig. 18 (b) is a cross-sectional view along the line A-A' in Fig. 18 (a). Fig. 19 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Example 6.

[0064] In Fig. 18, there are provided a plurality of gate lines GL formed on the first substrate SUB1, for which glass is used as a suitable material, and a plurality of source lines SL to cross the gate lines, and one pixel is provided in a region (pixel region) enclosed by two gate lines GL and two source lines SL. Regarding the source electrode and the drain electrode, description will be given here on the source line SL. One pixel is made up by the thin-film transistor TFT and the pixel electrode PX.

[0065] In this Embodiment, too, a capacity line CL is arranged in a direction parallel to the gate by traversing approximately the central portion in the region where the source electrode is formed. The thin-film transistor TFT is arranged near the intersection of the gate line GL and the source line SL. The thin-film transistor TFT comprises a gate electrode GT extending from the gate line, a semiconductor film SI, a source electrode SD1, and a drain electrode SD2. To prepare the semiconductor film SI, a contact layer of n⁺silicon is laminated on upper layer of silicon, and a channel is formed by removing the central portion of this contact layer. A protective film PF is filled in the channel.

[0066] In Fig. 18 (b), there are provided the gate line GL, the gate electrode GT, and the gate bank G-BNK, which is a bank to form the capacity line CL, on the first substrate SUB1. The gate-banks G-BNKs are arranged only within the region of the thin-film transistor TFT, in the portion where the capacity line CL is formed, and on the portion where the gate line GL is formed. To the drain electrode SD2 of the thin-film transistor TFT, the pixel electrode PX made of a transparent conductive film, for which ITO is used as a suitable material, is connected via the separation pattern SPP.

[0067] To prepare the gate electrode GT of the thin-film transistor TFT, a conductive ink, for which silver (Ag) solution is used as a suitable material, is coated by ink jet method in a groove prepared by the gate bank G-BNK in the region where the thin-film transistor is formed. The capacity line CL is formed by the gate bank G-BNK arranged in the pixel region. The gate line GL is prepared by the gate bank G-BNK outside of the pixel region. The gate insulator film GI is prepared on it. As shown in Fig. 19 (c) as given later, the source electrode SD1 and the drain electrode SD2 are formed by SD bank SD-BNK provided on the gate insulator film GI. As described later, upper portions of the gate-banks G-BNKs are at such positions that these are concealed by the light shielding film (black matrix) on the second substrate.

[0068] In the positional relation with the second substrate SUB2, similarly to Fig. 8 as given to explain Embodiment 3, the light shielding film BM of the second substrate SUB2 is arranged at a position where SD banks to be the regions of the thin film transistor TFT and the gate line GL are concealed, and also at a position where the gate-bank G-BNK to form the capacity line CL is concealed.

[0069] In this Embodiment, too, the capacity line CL is arranged in the region of the pixel electrode. A display area AR of pixel is separated at a portion to conceal the gate bank G-BNK where the capacity line CL is formed on upper layer of the capacity line CL. Light shutter effect of the liquid crystal LC becomes effective in the display area AR. In this Embodiment, the bank to form the pixel electrode PX is not provided, and the pixel electrode PX is formed by using the SD bank SD-BNK. Thus, a process to prepare the bank for pixel electrode is not needed. The pixel electrode PX is connected to the drain electrode

SD2 via the separation pattern SPP. The separation pattern is the same as the one explained in Fig. 10.

[0070] This Embodiment is characterized in that etching process for the silicon film S and the n⁺silicon film nS is performed together under half-exposure to light. Also, the source bank SD-BNK is processed by half-exposure to light. The protective film to cover the channel and the gate insulator film are processed together. As a result, the number of processes is extensively reduced. Fig. 19 represents plan views of one pixel to sequentially explain a process for manufacturing the first substrate of Embodiment 6 of the present invention, and Fig. 20 and Fig. 21 each represents drawings to explain the features of Embodiment 6 of the present invention. Fig. 20 represents drawings to explain the etching process of the silicon film S and the n⁺silicon film nS, and Fig. 21 represents drawings to explain the etching process for the protective film and the gate insulator film to cover the source bank and the channel subsequent to the process of Fig. 20.

[0071] Fig. 20 (a) represents the process, and Fig. 20 (b) shows cross-sections of the thin-film transistor on the first substrate to match each of the processes shown in Fig. 20 (a). First, on the gate insulator film GI of silicon nitride (SiN) deposited on the first substrate SUB1, silicon (amorphous silicon: a-Si) film S and n⁺silicon film nS are deposited. Then, photoresist is coated on the silicon film S and the n⁺silicon film nS. On the photoresist, island-like silicon semiconductor film is processed by full exposure to light using a half-exposure mask, and the channel is processed by half-exposure to light. By developing, the photoresist RG as desired is left.

[0072] Using the photoresist RG as a mask, etching is performed on the silicon film and the n⁺silicon film nS. Using the photoresist RG with patterning by half-exposure to light as an etching mask, etching is performed. As a result, the island-like semiconductor film, which is to become an active layer of the thin-film transistor, is left, and the n⁺silicon film nS on upper layer of the channel is removed. By removing the photoresist RG off, an island-like semiconductor layer with the channel exposed is provided.

[0073] Fig. 21 (a) shows the process, and Fig. 21 (b) represents cross-sectional views of the thin-film transistor (TFT) on the first substrate to match each of the processes shown in Fig. 21 (a). Fig. 21 (c) represents cross-sectional views each showing an opening of the gate insulator film such as gate terminal. After the process shown in Fig. 20, a protective layer PF is formed to cover the gate insulator film including the island-like semiconductor film. A photoresist RG to serve also as the source bank is coated on the protective film PF.

[0074] The photoresist RG is processed by half-exposure to light. In this half-exposure, an exposure mask is used so that the opening of the gate insulator film such as gate terminal to remove the portion up to the gate insulator film is processed by full-exposure, that the portion to be the source-bank SD-BNK and a portion of the channel CH are processed by non-exposure to light, and

that a portion to leave the gate insulator film GI is processed by half-exposure to light. In this case, a negative type photoresist is used, in which the exposed portion is developed, dissolved and removed.

[0075] After the half-exposure to light, the photoresist RG is developed. By etching, a protective film PF is left on the portion to be the source bank SD-BNK and the portion of the channel CH in the thin film transistor region (TFT region). On the opening of the gate insulator film, not only the protective film PF but also the gate insulator film GI of the lower layer is removed. By baking this, the source bank SD-BNK is prepared. Also, the same insulator layer as the source bank SD-BNK remains on the protective film PF of the channel CH.

[0076] Then, lyophilic processing is performed on the portion of the source bank SD-BNK to form the source electrode, the source line, the drain electrode and the pixel electrode, and liquid repellent processing is performed on the other portions. The lines and the electrodes are prepared by coating of ink jet and by baking.

[0077] According to Embodiment 6, in addition to the effects provided by Embodiment 3, a liquid crystal display device with high brightness and with good color reproducibility can be obtained at a lower cost.

[0078] Fig. 22 represents drawings each to explain detailed cross-section of the connection electrode as shown in Fig. 14, Fig. 15, Fig. 16, etc. respectively. In Fig. 14, Fig. 15, Fig. 16, etc., the connection electrode JED is given as shown in Fig. 22 (a). Specifically, the pixel electrode PX and the drain electrode SD2 are electrically connected by the connection electrode JED, which comprises a conductive film coated by ink jet method. In Fig. 22 (a), the connection electrode JED is shown as if it crosses over the graded step of the gate insulator film GI and the source bank SD-BNK from the pixel electrode PX. It appears that this crossing-over is difficult to achieve and sufficient connection is not attained. In fact, however, the connecting portion of the connection electrode JED is big enough to absorb the graded step, and malfunction such as insufficient connection on the graded step does not occur.

[0079] In the above, general description has been given on the arrangement on the first substrate side. However, if the positioning with the second substrate is deviated, the bank may be forced out from the region of the light shielding film and this may give influence on numerical aperture or on contrast. In the following, description will be given on the arrangement to suppress the influence on display quality due to the deviation of positioning between the bank and the light shielding film. Here, description will be given by taking an example on the capacity line CL and the light shielding film BM.

[0080] Fig. 23 represents a drawing to explain a general design example of the light shielding film. As shown in Fig. 23 (a), it is supposed that a capacity line CL with a width WL is arranged on the first substrate SUB1, and that a light shielding film BM with a width WB and a color filter CF are provided on the second substrate SUB2.

The width WB of the light shielding film BM is set to a value wider than the capacity line CL in an extent "d" on both sides respectively to give a positioning tolerance. That is, "Width WB of the Light Shielding Film BM $\equiv$ [Width WL of Capacity line CL + Tolerance $d \times 2$]" . If the positioning deviation is $2d$ at the maximum, as shown in Fig. 23 (b), the capacity line CL is not deviated from the light shielding film BM and is not forced out to the display area.

[0081] Fig. 24 represents a drawing to explain a design example of the capacity line and the light shielding film formed by the gate bank in the present invention. As shown in Fig. 24 (a), on the first substrate SUB1 a capacity line CL with a width WL is formed by a pair of gate banks G-BNKs. On the second substrate SUB2, a light shielding film BM with a width WB and a color filter CF are arranged. The width WB of the light shielding film BM is arranged to be wider than the capacity line CL in an extent "d" on both sides respectively as the positioning tolerance. The width D of the gate bank G-BNK is set to approximately the same value as the positioning tolerance d.

[0082] Specifically, "Width WB of the Light Shielding Film BM $\equiv$ [Width WL of Capacity Line CL + Tolerance $d (+ D) \times 2$]" . If the positioning deviation is $2d (\equiv 2D)$ at the maximum, even when one of the gate banks G-BNKs on both sides of the capacity line CL may be deviated from the light shielding film BM and may be forced out to the display area, numerical aperture is not decreased because the gate banks G-BNKs are translucent.

[0083] Fig. 25 represents drawings to explain another design example of the capacity line and the light shielding film shown in Fig. 24. This design example is the same as the design example shown in Fig. 24 except that the gate banks G-BNKs are designed as light absorptive (light shielding) or low light shielding type. In this example, the gate bank G-BNK has light shielding property. As a result, numerical aperture is slightly decreased while the contrast is increased.

[0084] Fig. 26 represents drawings still another design example of the capacity line and the light shielding film formed by the gate banks in the present invention. In this design example, as shown in Fig. 26 (a), a capacity line CL with a width WL is formed by a pair of gate banks G-BNKs on the first substrate SUB1. On the second substrate SUB2, a light shielding film BM with a width WB and a color filter CF are formed. The width WB of the light shielding film BM is designed to be wider than the capacity line CL by the sum up of a value "d" and of a value "D" the width of the gate bank G-BNK on both sides respectively as the positioning tolerance. The width D of the gate bank G-BNK is set to a value approximately equal to the positioning tolerance "d".

[0085] Specifically, "Width WB of Light Shielding Film BM $\equiv$ [Width WL of Capacity Line CL + Tolerance $d \times 2 + \text{Width D of Gate Bank G-BNK} \times 2$] (where $d = D$)". If the position deviation is $2d (= 2D)$ at the maximum, as shown in Fig. 26 (b), even when one of the gate banks

G-BNKs on both sides of the capacity line is deviated from the light shielding film BM and may be forced out to the display area, numerical aperture is not decreased because the gate banks G-BNK are translucent.

[0086] The light-absorbent (light shielding) or low light shielding gate banks G-BNKs as explained in connection with Fig. 25 can be applied to the design examples in the above Embodiments and in the design examples of the light shielding film. The connection electrode as described above may be made of the same conductive material as that of the pixel electrode or may be made of the same material as the source/drain material or may be made of other conductive material. The protective film provided on upper layer of the thin-film transistor is not limited to silicon nitride, and it may be an organic insulator film or may be used simultaneously with the bank.

Claims

1. A liquid crystal display device, comprising a first substrate (SUB1) with thin-film transistor (TFT) arranged for each of a plurality of pixels in matrix arrangement, a second substrate (SUB2) where color filters (CF) with a plurality of colors formed to match the pixels and a light shielding film (BM) and a counter electrode are arranged, and a liquid crystal display panel prepared by attaching said first substrate (SUB1) and said second substrate (SUB2) and by sealing a liquid crystal (LC) between said substrates, wherein there are provided on said first substrate:

a gate line (GL) where a gate electrode (GT) of said thin-film transistor (TFT) is arranged on a part thereof and a scan signal is applied;
 a gate insulator film (GI) formed to cover said gate line (GL);
 a semiconductor layer (SI) formed in island-like shape on said gate insulator film (GI) and constituting an active layer of said thin-film transistor (TFT);
 a source electrode (SD1) and a drain electrode (SD2) provided on said gate insulator film (GI) and connected to said semiconductor layer (SI);
 a data line for (SL) preparing said source electrode (SD1) on a part thereof and for supplying a display signal; and
 a pixel electrode (PX) connected to said drain electrode (SD2);
 said gate line (GL) and said gate electrode (GI), said source electrode (SD1) and said drain electrode (SD2) are formed by baking a conductive solution coated on a region enclosed by bank-like members (G-BNK, SD-BNK) of insulator film by ink jet method;

characterized in that

said pixel electrode (PX) is also formed by baking a

conductive solution coated on a region enclosed by bank-like members of insulator film (P-BNK) by ink jet method ; and

said bank-like members of the insulator film are arranged only in the region of said light shielding film (BM) on said second substrate.

2. A liquid crystal display device according to claim 1, wherein:

said pixel electrode is formed in a region enclosed by the bank-like members arranged on upper layer of said source electrode and said drain electrode in each region of adjacent light shielding film;
 said pixel electrode and said drain electrode are separated by the bank-like members arranged on said gate insulator film; and
 said drain electrode and said pixel electrode are connected via a contact hole.

3. A liquid crystal display device according to claim 1, wherein:

said pixel electrode is arranged on the same layer as said source electrode and said drain electrode, and is separated from said source electrode and said drain electrode by the bank-like members arranged on said gate insulator film; and
 said pixel electrode and said drain electrode are connected by a conductive connection electrode crossing over said two electrodes and prepared by ink jet coating.

4. A liquid crystal display device according to claim 1, wherein:

said pixel electrode is prepared on the same layer as said source electrode and said drain electrode; and
 said pixel electrode and said drain electrode have linear separation patterns to connect the two electrodes.

5. A liquid crystal display device according to claim 3, wherein said connection is made by a conductive connection electrode crossing over said pixel electrode and said drain electrode and prepared by ink jet coating on said linear separation pattern.

6. A liquid crystal display device according to claim 1, wherein:

said pixel electrode is on the same layer as said source electrode and said drain electrode and has a protective film on lower layer of the bank-like member on the source electrode side and

on lower layer of the bank-like member of a channel of said semiconductor layer; and said pixel electrode and said drain electrode have linear separation patterns to connect these two electrodes.

7. A liquid crystal display device according to claim 6, wherein said connection is made by a connection electrode crossing over said pixel electrode and said drain electrode and prepared by ink jet coating and baking on said linear separation pattern.

8. A liquid crystal display device according to claim 1, wherein:

there is provided a capacity line on the same layer as said gate line in a region where said pixel electrode is arranged;
said pixel electrode is separated to a first pixel electrode and a second pixel electrode by a bank-like member to form said capacity line and by a gate insulator film arranged on said bank-like member;
said first pixel electrode and said drain electrode arranged on upper layer of said gate insulator film are connected by a first connection electrode prepared by ink jet coating and by baking to cross over said two electrodes; and
said second pixel electrode and said first pixel electrode are connected by a second connection electrode prepared by ink jet coating and by baking to cross over between the two pixel electrodes.

9. A liquid crystal display device according to claim 8, wherein said capacity line is arranged in a direction parallel to said gate line.

10. A liquid crystal display device according to claim 8, wherein, when it is supposed that width of the light shielding film formed on said second substrate is WB, that width of said capacity line arranged on said first substrate is WL, and that positioning tolerance on both sides in width direction of said light shielding film and said capacity line is "d" respectively, the following relation exists: $WB \cong WL + 2d$.

11. A liquid crystal display device according to claim 8, wherein, when it is supposed that width of the light shielding film formed on said second substrate is WB, that width of said capacity line arranged on said first substrate is WL, that positioning tolerance on both sides in width direction of said light shielding film and said capacity line is "d" respectively, and that width of said bank-like member to form said capacity line is D, the following relation exists: $WB \cong WL + 2D$ (where $D \cong d$).

12. A liquid crystal display device according to claim 11, wherein said bank-like member to form said capacity line has light transmissivity equal to that of said light shielding film.

13. A liquid crystal display device according to claim 8, wherein when it is supposed that width of the light shielding film formed on said second substrate is WB, that width of said capacity line arranged on said first substrate is WL, that positioning tolerance on both sides in width direction of said light shielding film and said capacity line is "d" respectively, and that width of said bank-like member to form said capacity line is D, the following relation exists: $WB \cong WL + 2D + 2d$.

Patentansprüche

1. Flüssigkristallanzeigevorrichtung, umfassend ein erstes Substrat (SUB1) mit einem Dünnschichttransistor (TFT), der für jedes einer Vielzahl an Pixeln in einer Matrixanordnung angeordnet ist, ein zweites Substrat (SUB2), worin Farbfilter (CF) mit einer Vielzahl an Farben, die zur Übereinstimmung mit den Pixeln und einem Lichtabschirmfilm (BM) ausgebildet sind, und eine Gegenelektrode angeordnet sind, sowie ein Flüssigkristallanzeigefeld, das durch Anbringen des ersten Substrats (SUB1) und des zweiten Substrats (SUB2) und durch Abdichten eines Flüssigkristalls (LC) zwischen den Substraten hergestellt wird, worin auf dem ersten Substrat Folgendes bereitgestellt ist:

eine Gate-Leitung (GL), in der eine Gate-Elektrode (GT) des Dünnschichttransistors (TFT) auf einem Teil derselben angeordnet ist und ein Scansignal angelegt wird;
einen Gate-Isolationsfilm (GI), der zur Abdeckung der Gate-Leitung ausgebildet ist;
eine Halbleiterschicht (SI), die inselförmig auf dem Gate-Isolationsfilm (GI) ausgebildet ist und eine aktive Schicht des Dünnschichttransistors (TFT) bildet,
eine Source-Elektrode (SD1) und eine Drain-Elektrode (SD2), die auf dem Gate-Isolationsfilm (GI) bereitgestellt sind und mit der Halbleiterschicht (SI) verbunden sind;
eine Daten-Leitung (S2) zur Herstellung der Source-Elektrode (SD1) auf einem Teil derselben und zur Einspeisung eines Anzeigesignals; und
eine Pixelelektrode (PX), die mit der Drainelektrode (SD2) verbunden ist;
wobei die Gate-Leitung (GL) und die Gate-Elektrode (GT), die Source-Elektrode (SD1) und die Drainelektrode (SD2) ausgebildet werden, indem eine leitfähige Lösung gebrannt wird, die

auf einen Bereich aufgebracht wird, der durch bankförmige Elemente (G-BNK, SD-BNK) des Isolationsfilms mittels eines Tintenstrahldruckverfahrens eingeschlossen ist;

dadurch gekennzeichnet, dass die Pixelelektrode (PX) auch durch Brennen einer leitfähigen Lösung ausgebildet wird, die auf einen Bereich aufgebracht wird, der durch bankförmige Elemente des Isolationsfilms (P-BNK) mittels eines Tintenstrahldruckverfahrens eingeschlossen ist; und

dass die bankförmigen Elemente des Isolationsfilms nur im Bereich des Lichtabschirmfilms (BM) auf dem zweiten Substrat angeordnet sind.

2. Flüssigkristallanzeigevorrichtung nach Anspruch 1, worin:

die Pixelelektrode in einem Bereich ausgebildet ist, der durch bankförmige Elemente eingeschlossen ist, die auf einer oberen Schicht der Source-Elektrode und der Drainelektrode in jedem Bereich des benachbarten Lichtabschirmfilms angeordnet sind;

die Pixelelektrode und die Drainelektrode durch auf dem Gate-Isolationsfilm angeordnete bankförmige Elemente voneinander getrennt sind; und

die Drainelektrode und die Pixelelektrode durch ein Kontaktloch miteinander verbunden sind.

3. Flüssigkristallanzeigevorrichtung nach Anspruch 1, worin:

die Pixelelektrode auf derselben Schicht wie die Source-Elektrode und die Drainelektrode angeordnet ist und von der Source-Elektrode und der Drainelektrode durch die auf dem Gate-Isolationsfilm angeordneten bankförmigen Elemente getrennt ist; und

die Pixelelektrode und die Drainelektrode durch eine leitfähige Verbindungselektrode verbunden sind, welche sich über die zwei Elektroden erstreckt und durch Tintenstrahldruckbeschichtung hergestellt wird.

4. Flüssigkristallanzeigevorrichtung nach Anspruch 1, worin:

die Pixelelektrode auf derselben Schicht wie die Source-Elektrode und die Drainelektrode hergestellt wird; und

die Pixelelektrode und die Drainelektrode lineare Trennstrukturen aufweisen, um die zwei Elektroden miteinander zu verbinden.

5. Flüssigkristallanzeigevorrichtung nach Anspruch 3, worin die Verbindung durch eine leitfähige Verbin-

dungselektrode hergestellt wird, die sich über die Pixelelektrode und die Drainelektrode erstreckt und mittels Tintenstrahldruckbeschichtung auf der linearen Trennstruktur hergestellt wird.

6. Flüssigkristallanzeigevorrichtung nach Anspruch 1, worin:

die Pixelelektrode auf derselben Schicht wie die Source-Elektrode und die Drainelektrode vorliegt und einen Schutzfilm auf der unteren Schicht des bankförmigen Elements auf der Source-Elektrodenseite und auf der unteren Schicht des bankförmigen Elements eines Kanals der Halbleiterschicht aufweist; und die Pixelelektrode und die Drainelektrode lineare Trennstrukturen aufweisen, um diese zwei Elektroden miteinander zu verbinden.

7. Flüssigkristallanzeigevorrichtung nach Anspruch 6, worin die Verbindung durch eine Verbindungselektrode hergestellt wird, die sich über die Pixelelektrode und die Drainelektrode erstreckt und durch Tintenstrahldruckbeschichtung und Brennen auf der linearen Trennstruktur hergestellt wird.

8. Flüssigkristallanzeigevorrichtung nach Anspruch 1, worin:

eine Kapazitätsleitung auf derselben Schicht wie die Gate-Leitung in einem Bereich bereitgestellt ist, auf dem die Pixelelektrode angeordnet ist;

die Pixelelektrode zur Bildung der Kapazitätsleitung durch ein bankförmiges Element und durch einen auf dem bankförmigen Element angeordneten Gate-Isolationsfilm in eine erste Pixelelektrode und eine zweite Pixelelektrode getrennt wird;

wobei die auf der oberen Schicht des Gate-Isolationsfilms angeordnete erste Pixelelektrode und die Drainelektrode durch eine erste Verbindungselektrode, die durch Tintenstrahldruckbeschichtung und Brennen hergestellt wird, miteinander verbunden sind, um sich über die zwei Elektroden zu erstrecken; und

die zweite Pixelelektrode und die erste Pixelelektrode durch eine zweite Verbindungselektrode, die durch Tintenstrahldruckbeschichtung und Brennen hergestellt wird, miteinander verbunden sind, um sich über die zwei Elektroden zu erstrecken.

9. Flüssigkristallanzeigevorrichtung nach Anspruch 8, worin die Kapazitätsleitung in einer Richtung parallel zur Gate-Leitung angeordnet ist.

10. Flüssigkristallanzeigevorrichtung nach Anspruch 8,

worin, angenommen, dass die Breite des auf dem zweiten Substrat ausgebildeten Lichtabschirmfilms WB ist, dass die Breite der auf dem ersten Substrat angeordneten Kapazitätsleitung WL ist, und dass die Positionierungstoleranz auf beiden Seiten in Breitenrichtung des Lichtabschirmfilms und der Kapazitätsleitung jeweils "d" ist, sich folgendes Verhältnis ergibt: $WB \approx WL + 2d$.

11. Flüssigkristallanzeigevorrichtung nach Anspruch 8, worin, angenommen, dass die Breite des auf dem zweiten Substrat ausgebildeten Lichtabschirmfilms WB ist, dass die Breite der auf dem ersten Substrat angeordneten Kapazitätsleitung WL ist, dass die Positionierungstoleranz auf beiden Seiten in Breitenrichtung des Lichtabschirmfilms und der Kapazitätsleitung jeweils "d" ist und dass die Breite des bankförmigen Elements zur Ausbildung der Kapazitätsleitung D ist, sich folgendes Verhältnis ergibt: $WB \approx WL + 2D$ (worin $D \approx d$ ist).
12. Flüssigkristallanzeigevorrichtung nach Anspruch 11, worin das bankförmige Element zur Ausbildung der Kapazitätsleitung eine Lichtdurchlässigkeit aufweist, die jener des Lichtabschirmfilms entspricht.
13. Flüssigkristallanzeigevorrichtung nach Anspruch 8, worin, angenommen, dass die Breite des auf dem zweiten Substrat ausgebildeten Lichtabschirmfilms WB ist, dass die Breite der auf dem ersten Substrat ausgebildeten Kapazitätsleitung WL ist, dass die Positionierungstoleranz auf beiden Seiten in Breitenrichtung des Lichtabschirmfilms und der Kapazitätsleitung jeweils "d" ist und dass die Breite des bankförmigen Elements zur Ausbildung der Kapazitätsleitung D ist, sich folgendes Verhältnis ergibt: $WB \approx WL + 2D + 2d$.

Revendications

1. Dispositif d'affichage à cristaux liquides, comprenant un premier substrat (SUB1) avec un transistor de film mince (TFT) agencé pour chacun d'une pluralité de pixels en un agencement de matrice, un deuxième substrat (SUB2), où des filtres couleur (CF), avec une pluralité de couleurs formées pour correspondre aux pixels et un film de protection contre la lumière (BM) et une contre-électrode sont agencés, et un panneau d'affichage à cristaux liquides préparé en assemblant ledit premier substrat (SUB1) et ledit deuxième substrat (SUB2) et en rendant étanche un cristal liquide (LC) entre lesdits substrats, dans lequel sont prévus sur ledit premier substrat:

une ligne de grille (GL), où une électrode de grille (GT) dudit transistor de film mince (TFT) est agencée sur une partie de celle-ci et un signal

de balayage est appliqué;
un film isolateur de grille (GI) formé pour couvrir ladite ligne de grille (GL);
une couche semi-conductrice (SL) réalisée en forme d'îlots sur ledit film isolateur de grille (GI) et constituant une couche active dudit transistor de film mince (TFT);
une électrode de source (SD1) et une électrode de drain (SD2) prévues sur ledit film isolateur de grille (GI) et reliées à ladite couche semi-conductrice (SL);
une ligne de données pour (S2) préparant ladite électrode de source (501) sur une partie de celle-ci et pour fournir un signal d'affichage; et
une électrode de pixels (PX) reliée à ladite électrode de drain (SD2);
ladite ligne de grille (GL) et ladite électrode de grille (GI), ladite électrode de source (SD1) et ladite électrode de drain (SD2) sont formées par la cuisson d'une solution conductrice appliquée sur une région renfermée par des éléments semblables à un banc (G-BNK, SD-BNK) du film isolateur par un procédé de jet d'encre;

caractérisé en ce que

ladite électrode de pixels (PX) est également formée par la cuisson d'une solution conductrice appliquée à une région renfermée par des éléments semblables à un banc du film isolateur (P-BNK) par un procédé de jet d'encre; et
lesdits éléments semblables à un banc du film isolateur sont agencés seulement dans la région dudit film de protection contre la lumière (BM) sur ledit deuxième substrat.

2. Dispositif d'affichage à cristaux liquide selon la revendication 1, dans lequel:

ladite électrode de pixels est formée dans une région renfermée par les éléments semblables à un banc agencés sur la couche supérieure de ladite électrode de source et ladite électrode de drain dans chaque région du film de protection adjacent contre la lumière;
ladite électrode de pixels et ladite électrode de drain sont séparées par les éléments semblables à un banc sur ledit film isolateur de grille; et
ladite électrode de drain et ladite électrode de pixels sont reliés par un trou de contact.

3. Dispositif d'affichage à cristaux liquides selon la revendication 1, dans lequel:

ladite électrode de pixels est agencée sur la même couche que ladite électrode de source et ladite électrode de drain, et est séparée de ladite électrode de source et de ladite électrode de drain par des éléments semblables à un banc agencés sur le film isolateur de grille; et

- ladite électrode de pixels et ladite électrode de drain sont reliées par une électrode de connexion conductrice croisant lesdites deux électrodes et préparée par un revêtement à jet d'encre.
- 5
4. Dispositif d'affichage à cristaux liquides selon la revendication 1, dans lequel:
- ladite électrode de pixel est préparée sur la même couche que ladite électrode de source et ladite électrode de drain; et
- ladite électrode de pixel et ladite électrode de drain ont des motifs de séparation linéaires pour relier les deux électrodes.
- 10
5. Dispositif d'affichage à cristaux liquides selon la revendication 3, où ladite connexion est faite par une électrode de connexion conductrice croisant ladite électrode de pixels et ladite électrode de drain et préparée par un revêtement à jet d'encre sur ledit motif de séparation linéaire.
- 20
6. Dispositif d'affichage à cristaux liquides selon la revendication 1, dans lequel
- ladite électrode de pixel se trouve sur la même couche que ladite électrode de source et ladite électrode de drain et présente un film de protection sur la couche inférieure de l'élément semblable à un banc du côté de l'électrode de source et sur la couche inférieure de l'élément semblable à un banc d'un canal de ladite couche semi-conductrice; et
- ladite électrode de pixels et ladite électrode de drain ont des motifs de séparation linéaire pour relier ces deux électrodes.
- 25
7. Dispositif d'affichage à cristaux liquides selon la revendication 6, où ladite connexion est faite par une électrode de connexion passant sur ladite électrode de pixels et ladite électrode de drain et préparée par un revêtement à jet d'encre et par une cuisson sur ledit motif de séparation linéaire.
- 30
8. Dispositif d'affichage à cristaux liquides selon la revendication 7, dans lequel:
- il est réalisé une ligne de capacité sur la même couche que ladite ligne de grille dans une région dans laquelle ladite électrode de pixel est agencée;
- ladite électrode de pixel est séparée en une première électrode de pixel et une deuxième électrode de pixel par un élément semblable à un banc pour former ladite ligne de capacité et par un film isolateur de grille agencé sur ledit élément semblable à un banc;
- 35
- ladite première électrode de pixels et ladite électrode de drain agencées sur la couche supérieure dudit film isolateur de grille sont reliées par
- 40
- une première électrode de connexion préparée par un revêtement à jet d'encre et par la cuisson pour croiser lesdites deux électrodes; et
- ladite deuxième électrode de pixel et ladite première électrode de pixel sont reliées par une deuxième électrode de connexion préparée par un revêtement à jet d'encre et par la cuisson pour croiser entre les deux électrodes de pixels.
- 45
9. Dispositif d'affichage à cristaux liquides selon la revendication 8, où ladite ligne de capacité est agencée dans une direction parallèle à ladite ligne de grille.
- 50
10. Dispositif d'affichage à cristaux liquides selon la revendication 8, dans lequel, lorsqu'on suppose que la largeur du film de protection contre la lumière formé sur ledit deuxième substrat est WB, ladite largeur de ladite ligne de capacité agencée sur ledit premier substrat est WL, et que la tolérance de positionnement sur les deux côtés dans le sens de la largeur dudit film de protection contre la lumière et de ladite ligne de capacité est "d" respectivement, la relation suivante existe: $WB \cong WL + 2d$.
- 55
11. Dispositif d'affichage à cristaux liquides selon la revendication 8, dans lequel, lorsqu'on suppose que la largeur du film de protection contre la lumière formé sur ledit deuxième substrat est WB, que la largeur de ladite ligne de capacité agencée sur ledit premier substrat est WL, que la tolérance de positionnement sur les deux côtés dans le sens de la largeur dudit film de protection contre la lumière et de ladite ligne de capacité est "d" respectivement, et que la largeur dudit élément semblable à un banc pour former ladite ligne de capacité est D, la relation suivante existe: $WB \cong WL + 2D$ (où $D \cong d$).
12. Dispositif d'affichage à cristaux liquides selon la revendication 11, où ledit élément semblable à un banc pour former ladite ligne de capacité possède une transmissivité de la lumière égale à celle dudit film de protection contre la lumière.
13. Dispositif d'affichage à cristaux liquides selon la revendication 8, dans lequel, lorsqu'on suppose que la largeur du film de protection contre la lumière formée sur ledit deuxième substrat est WB, que la largeur de ladite ligne de capacité agencée sur ledit premier substrat est WL, que la tolérance de positionnement sur les deux côtés dans le sens de la largeur dudit film de protection contre la lumière et de ladite ligne de capacité est "d" respectivement, et que la largeur dudit élément semblable à un banc pour former ladite ligne de capacité est D, la relation suivante existe: $WB \cong WL + 2D + 2d$.

FIG.1 (a)

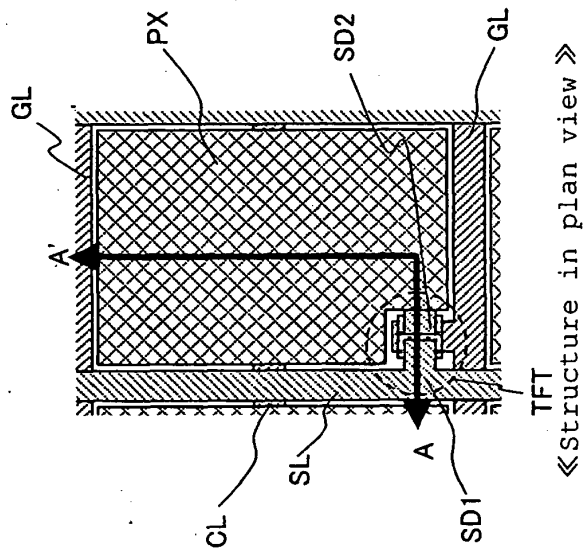


FIG.1 (b)

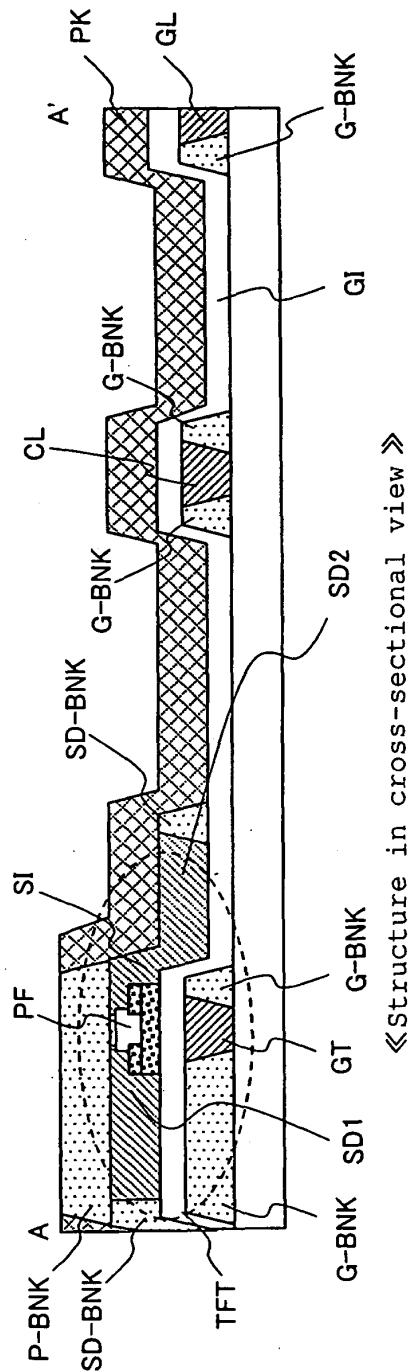
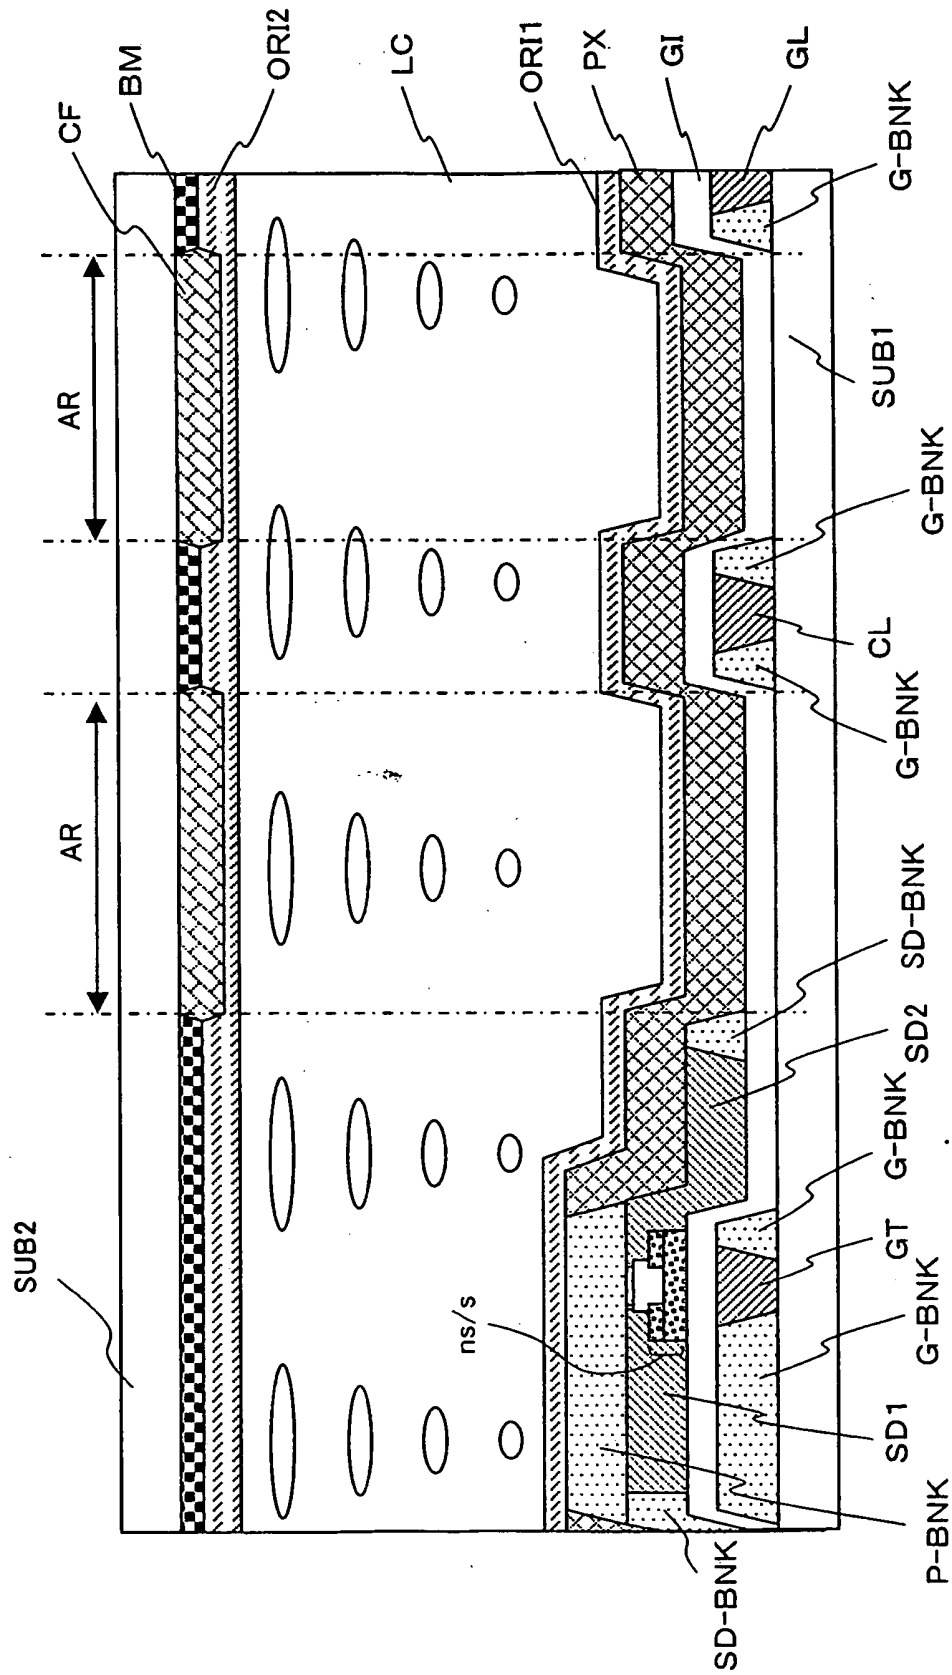


FIG.2





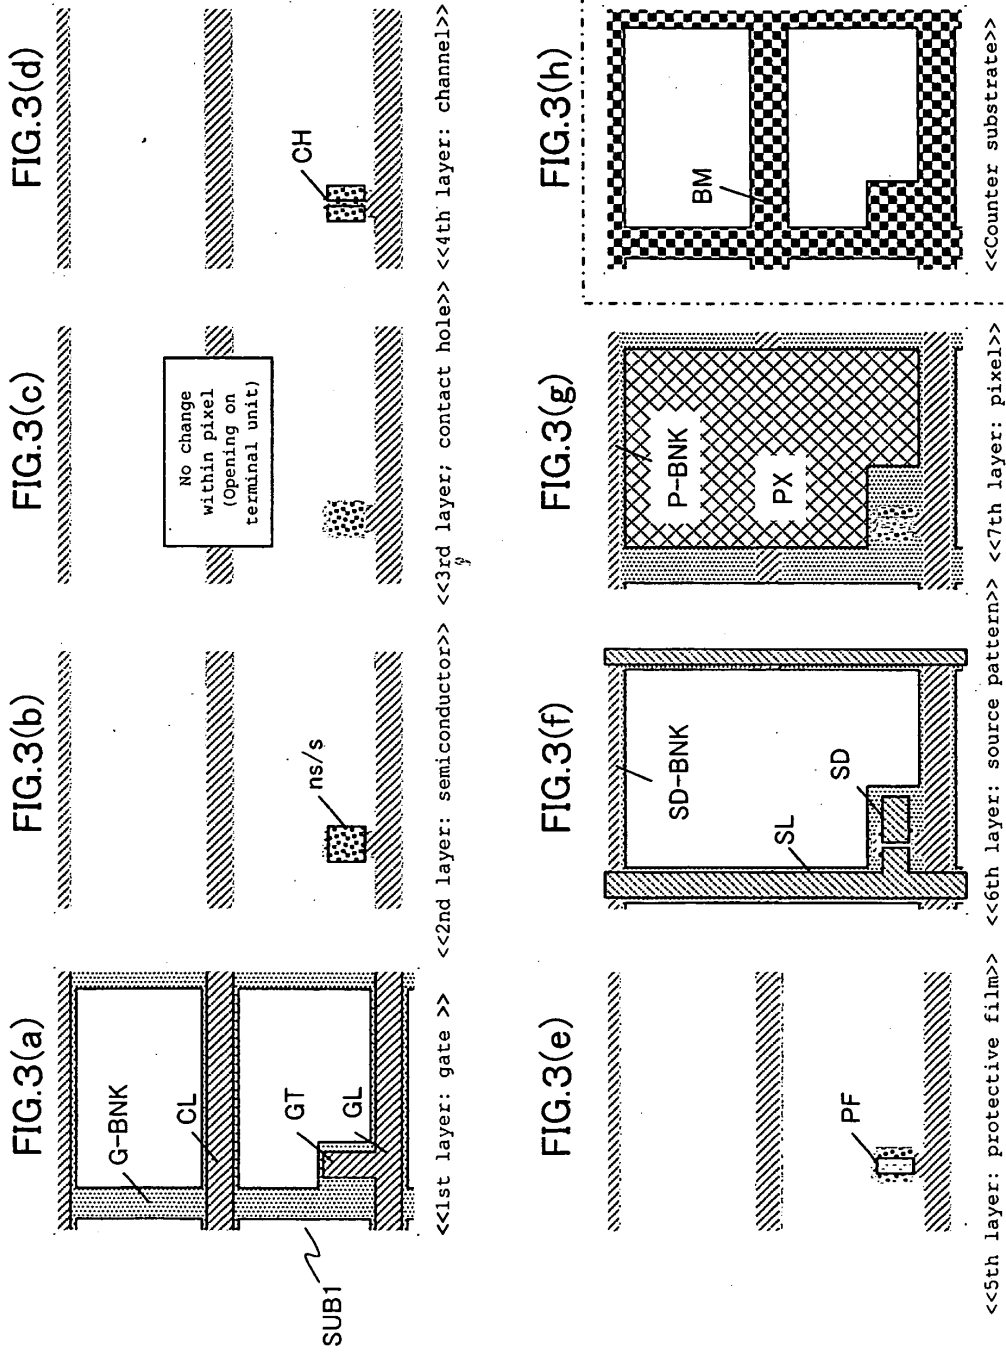


FIG.4(a)

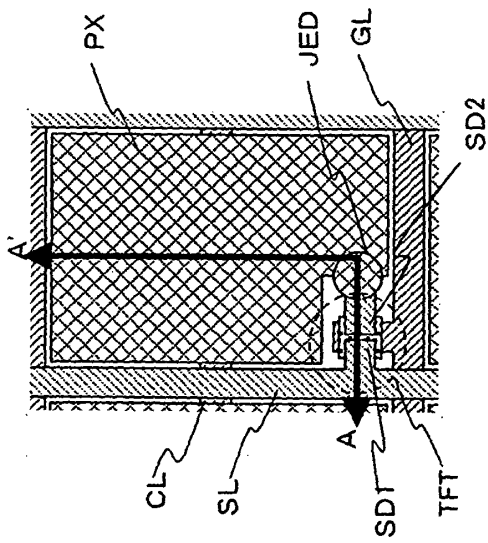


«Structure in plan view»


FIG.4(b)

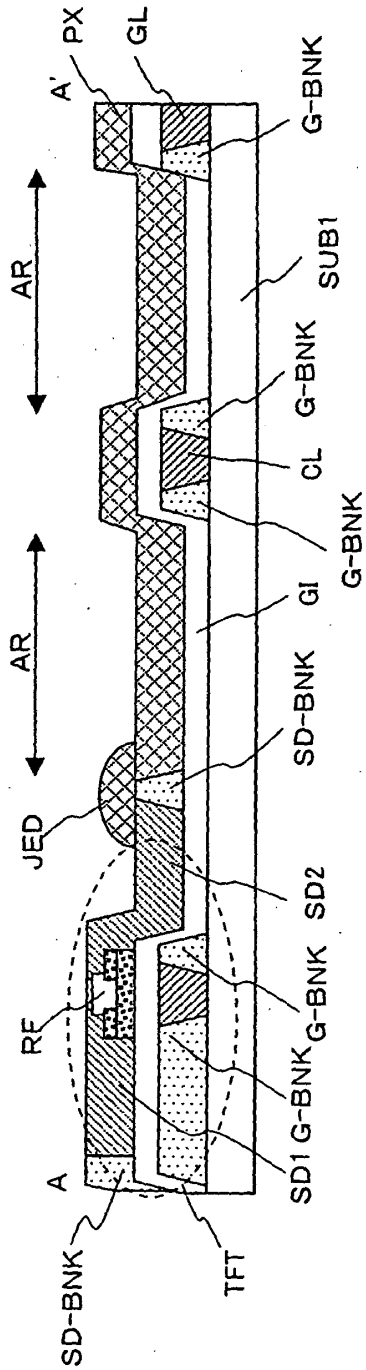

«Structure in cross-sectional view»

FIG.5

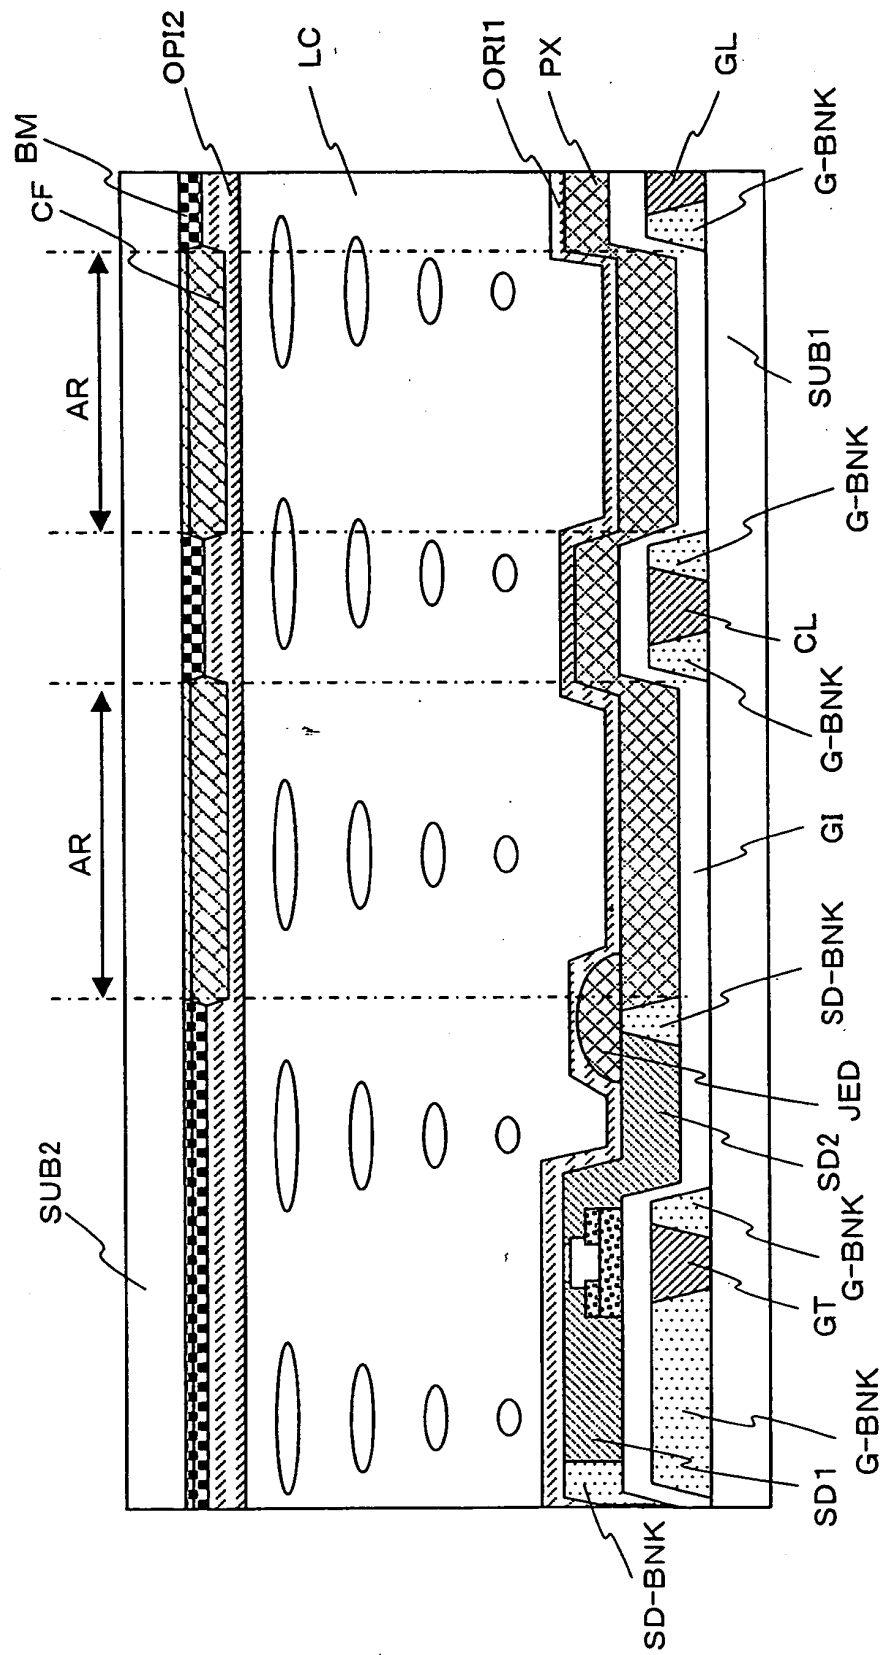

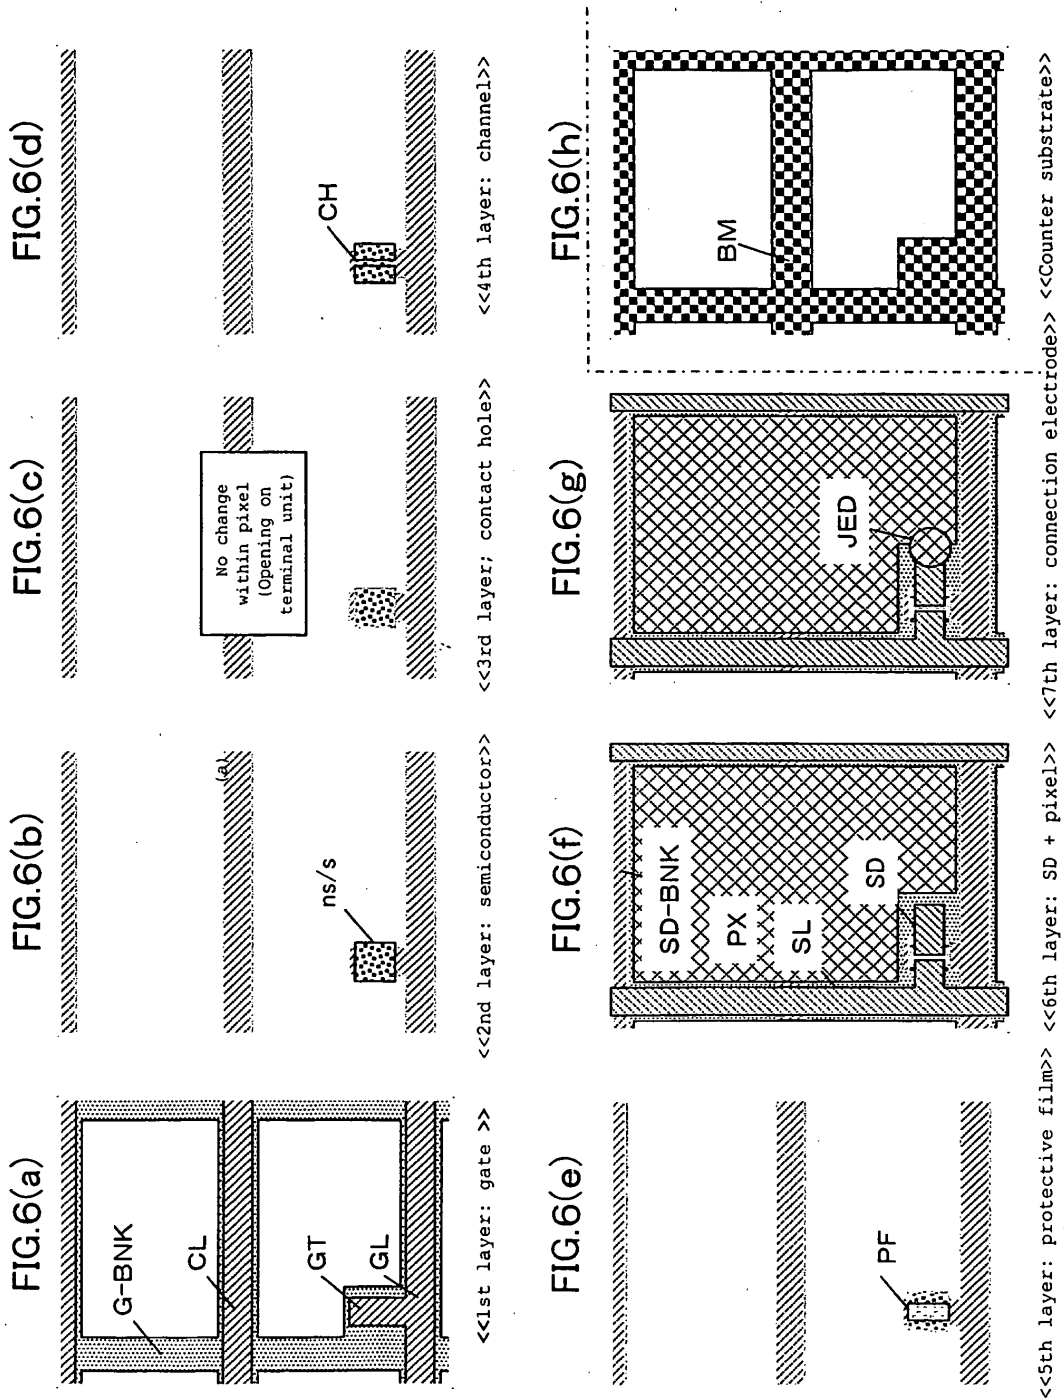

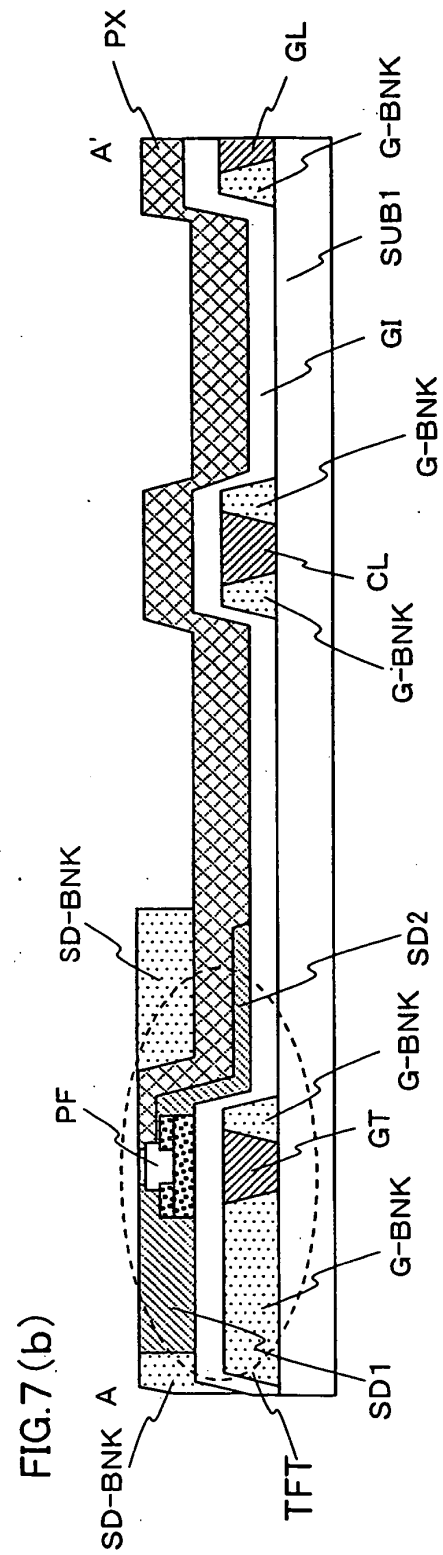
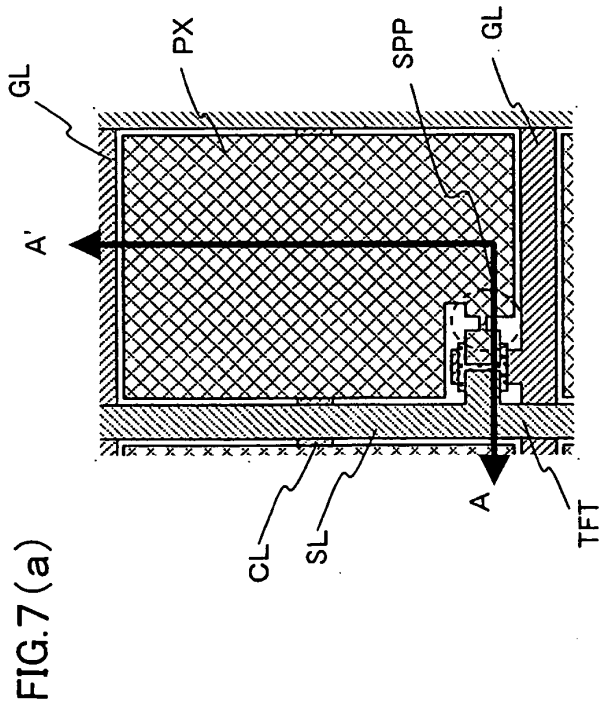
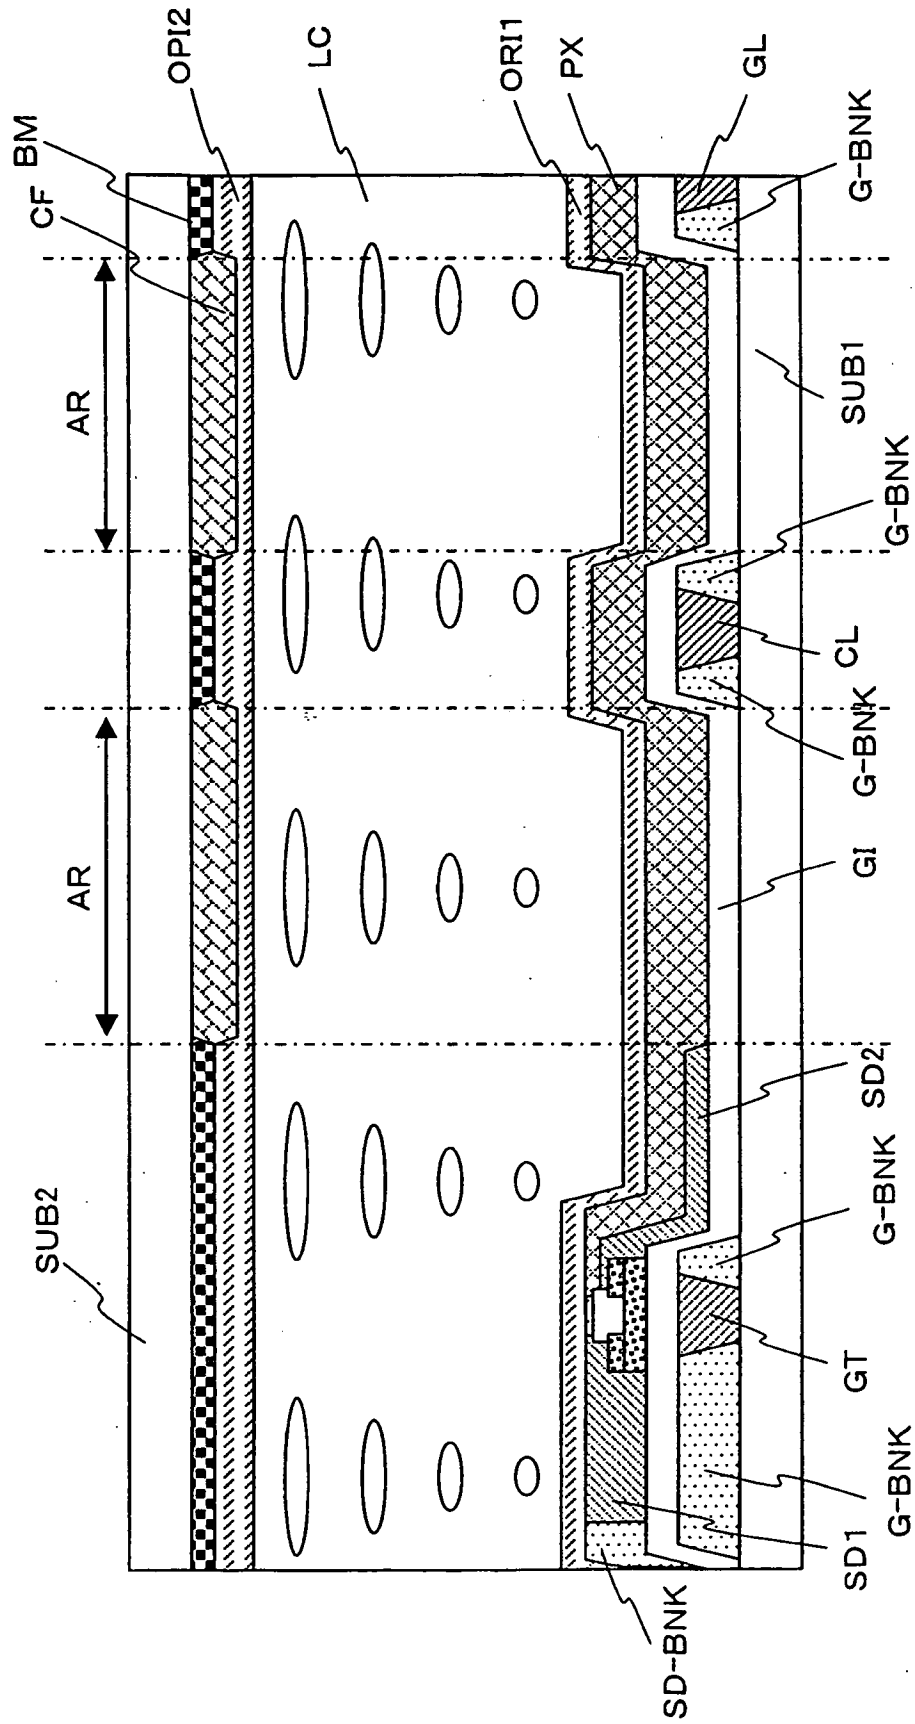
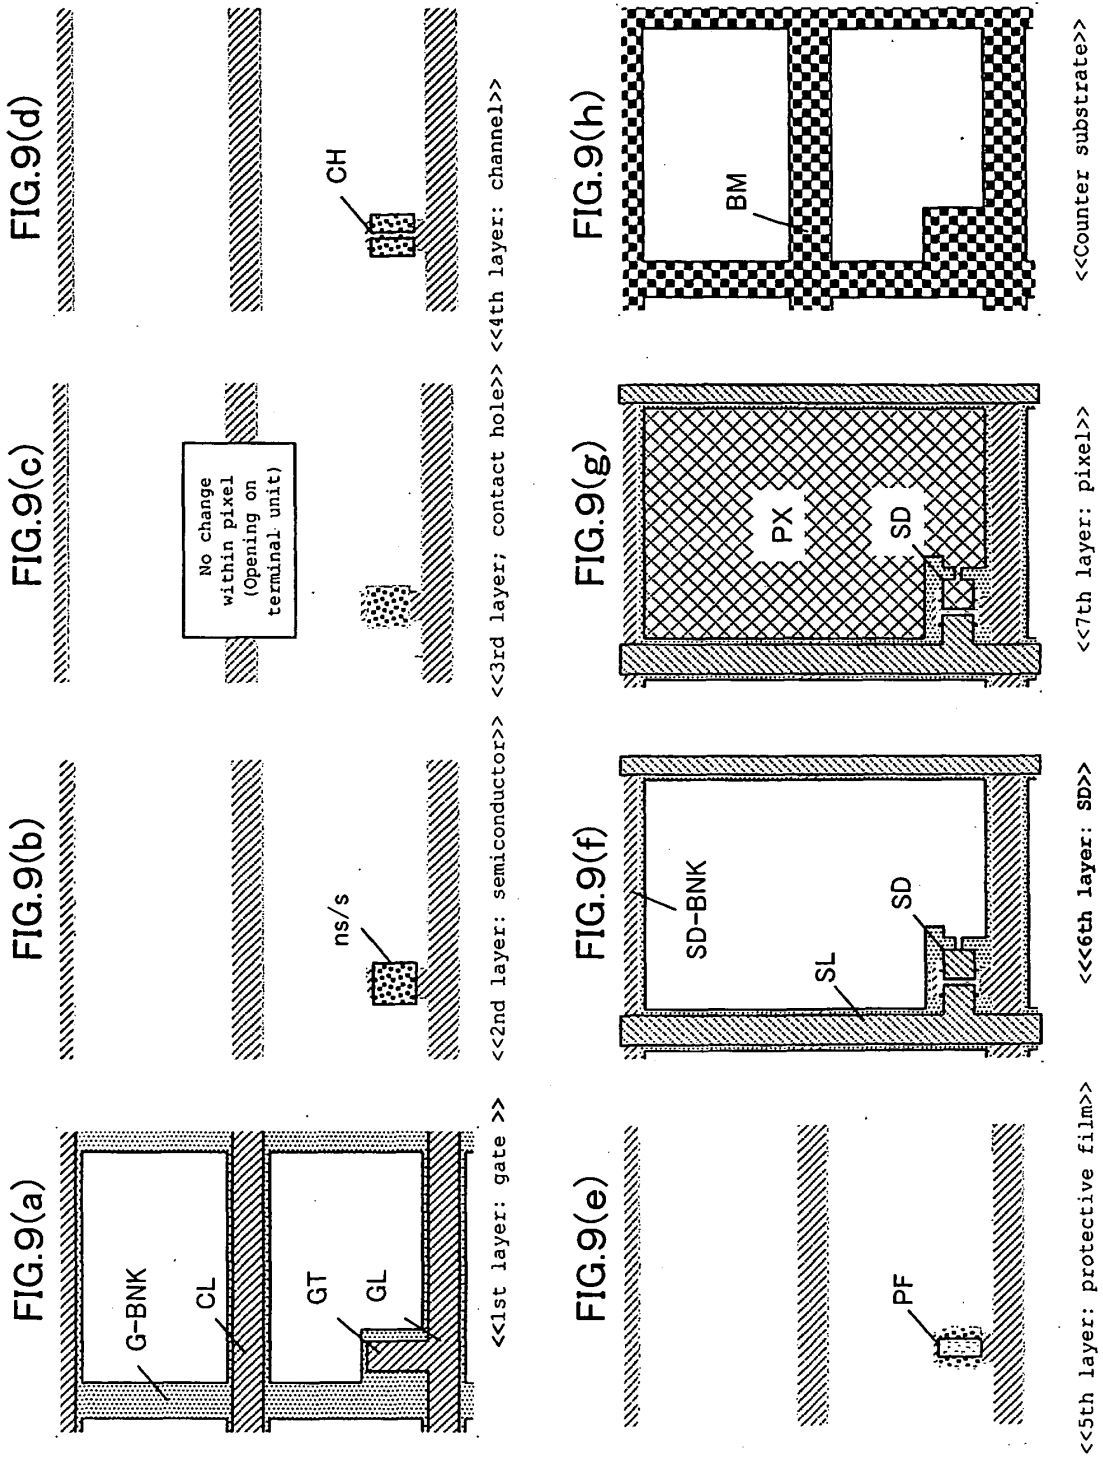


FIG.8





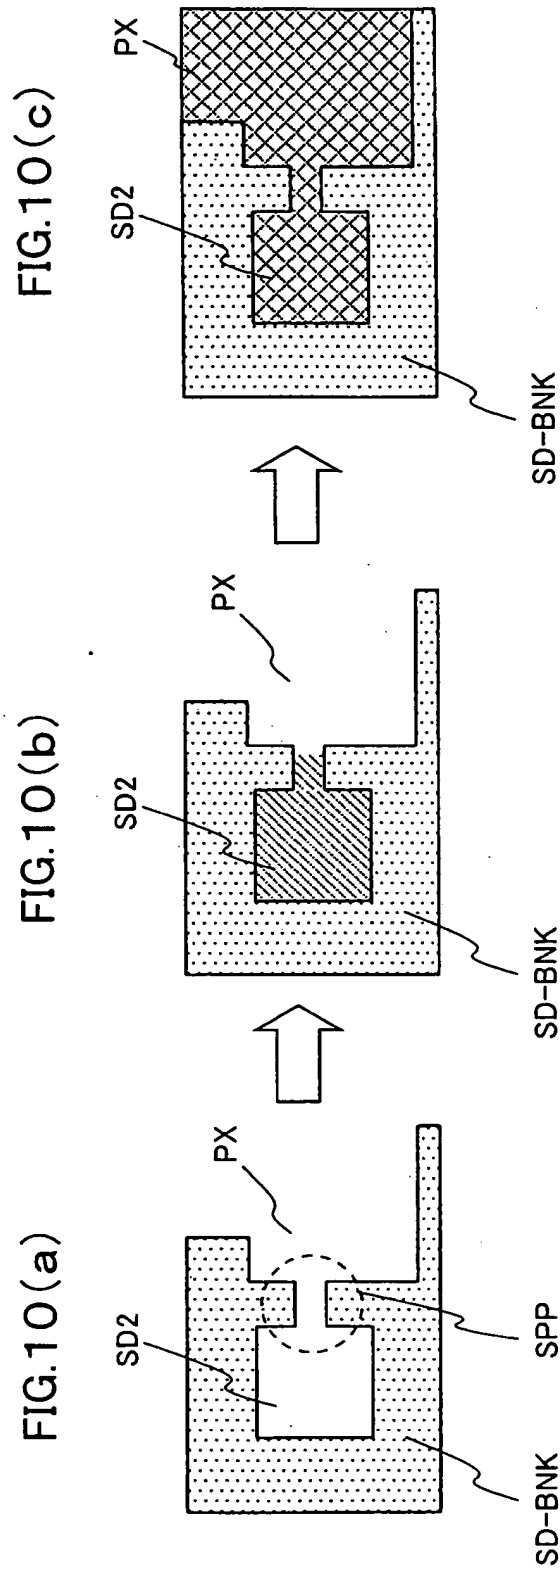


FIG.11

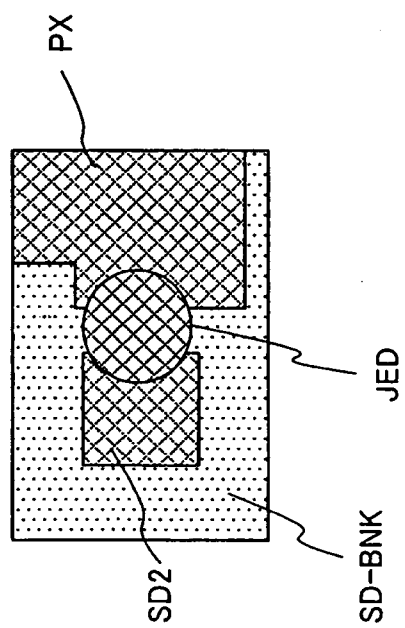


FIG.12 (a)

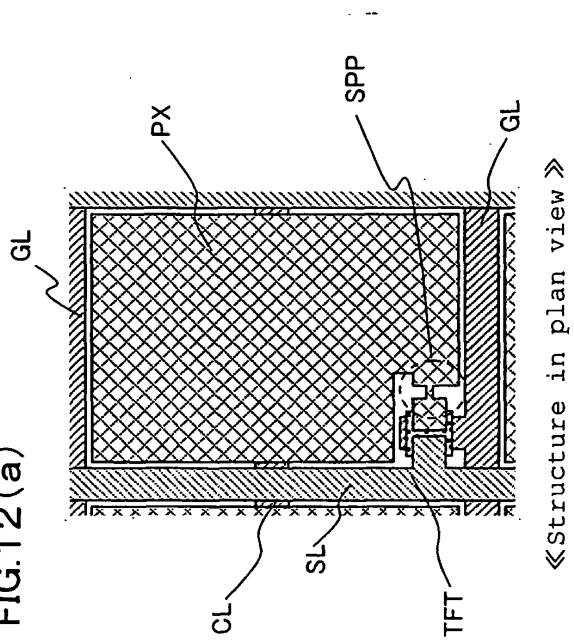


FIG.12 (b)

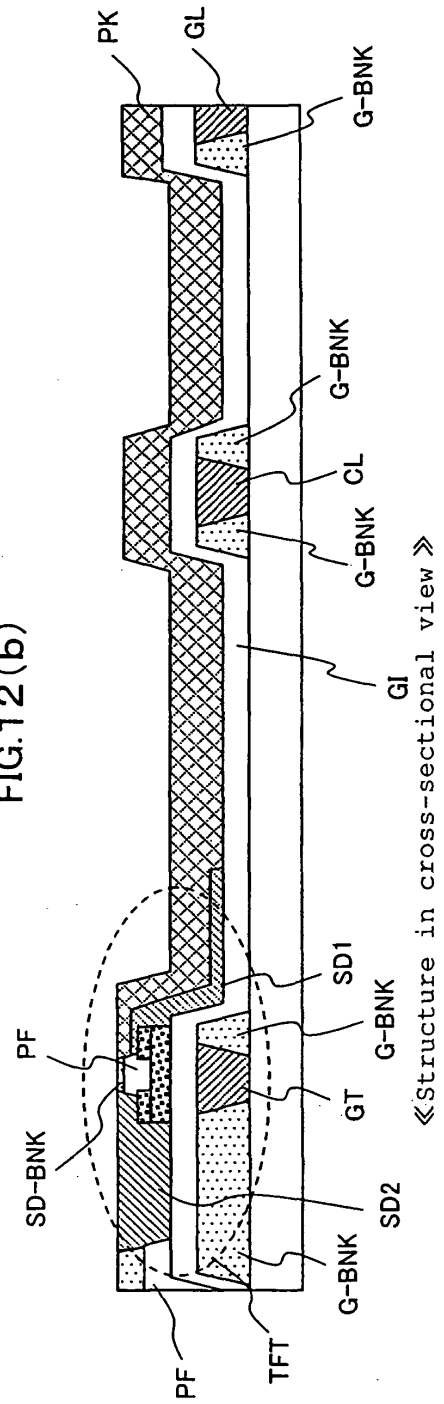
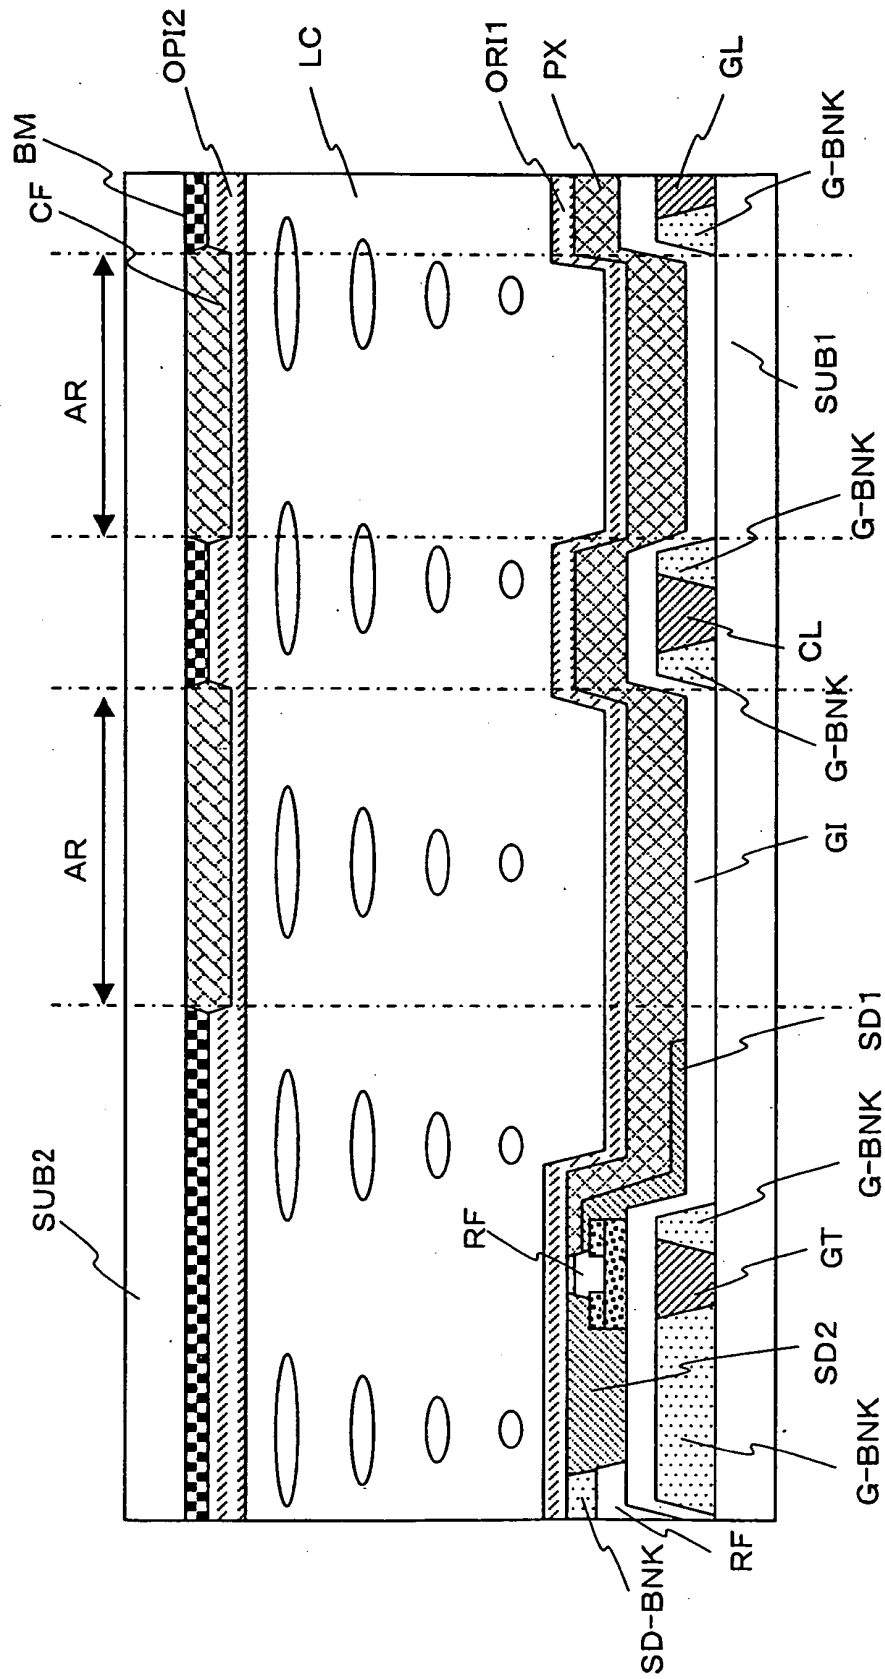


FIG.13



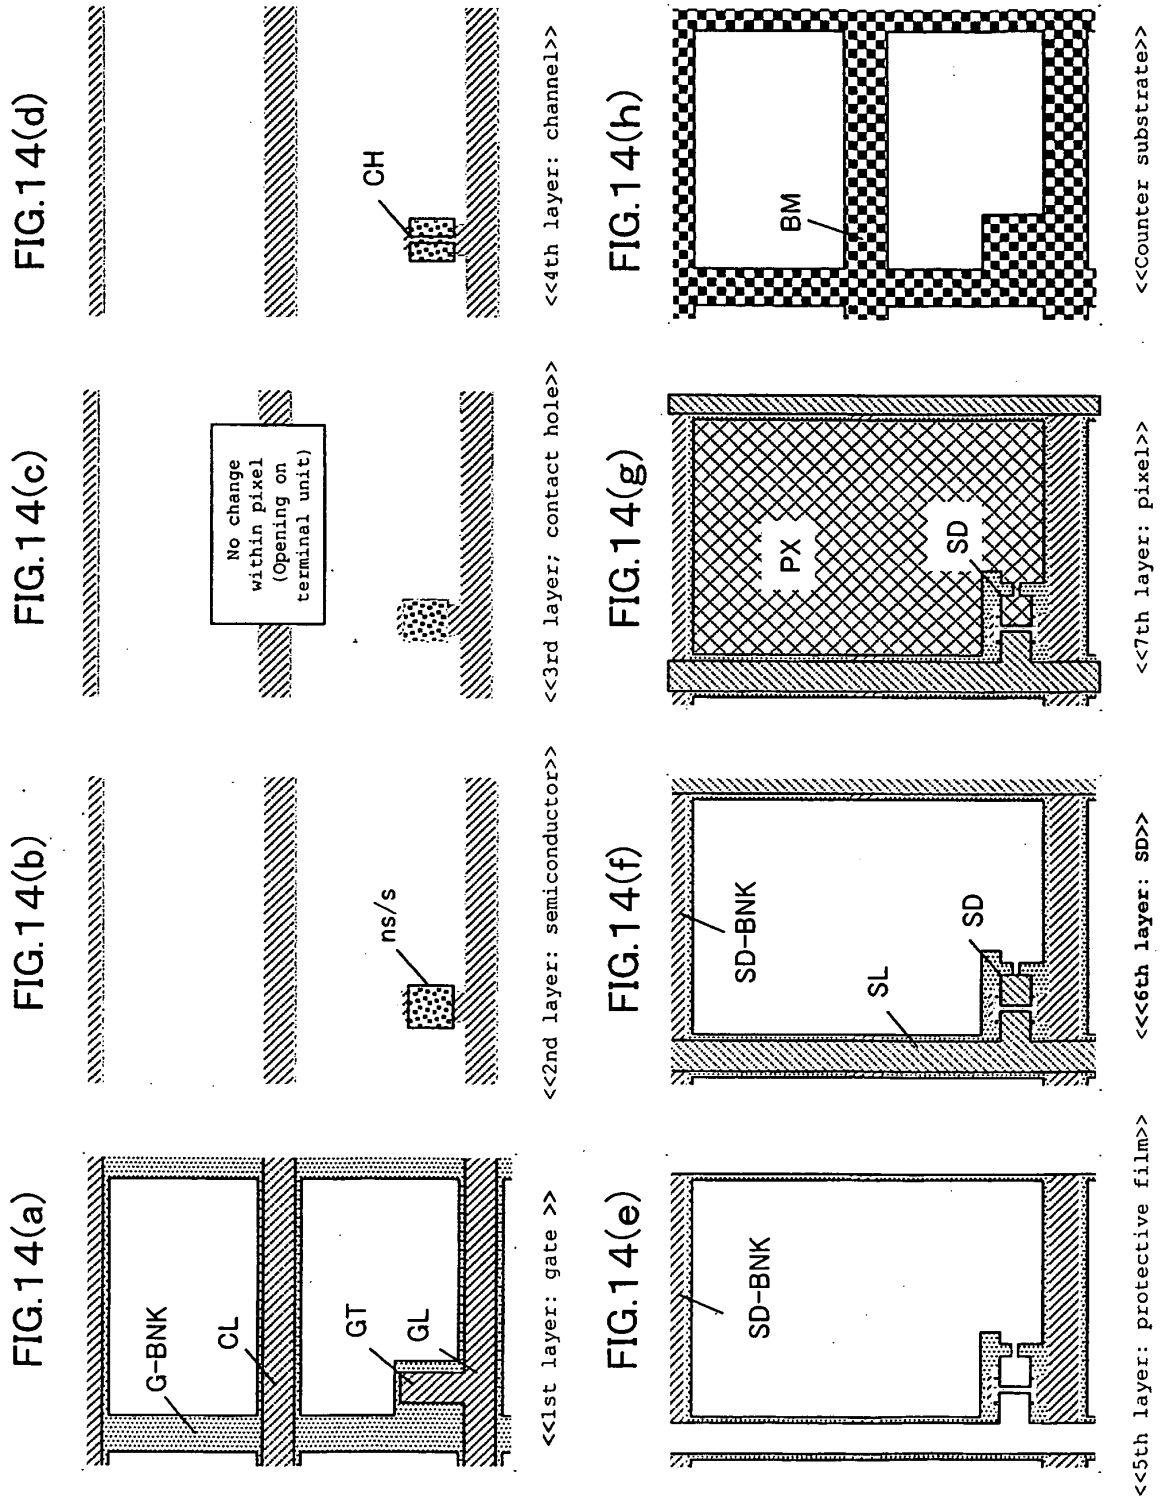


FIG.15(a)

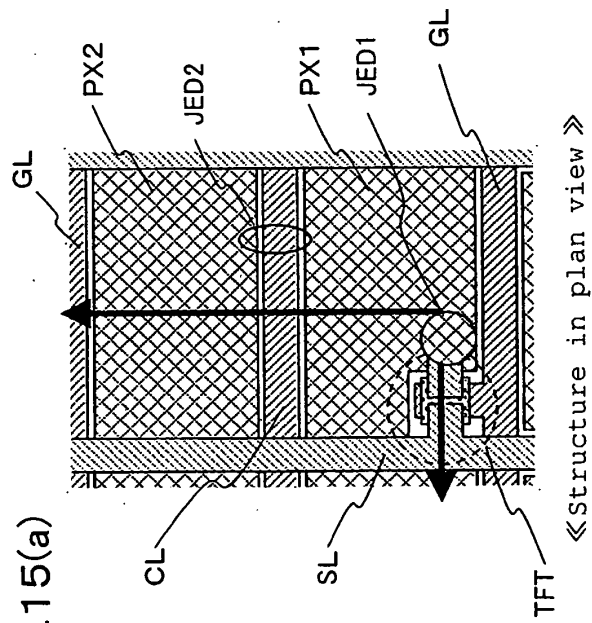


FIG.15(b)

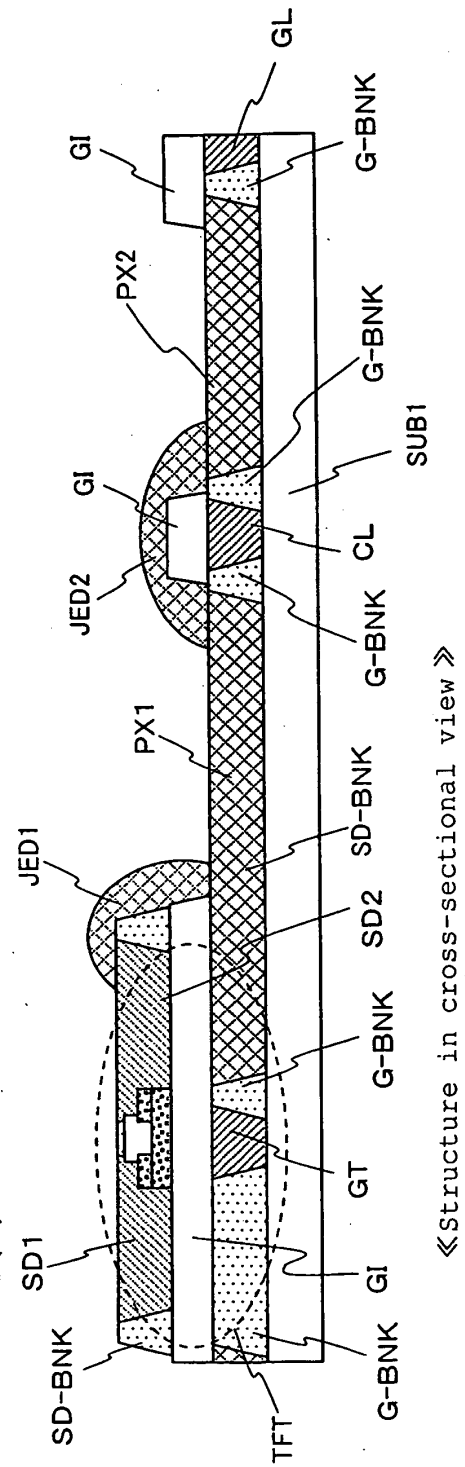
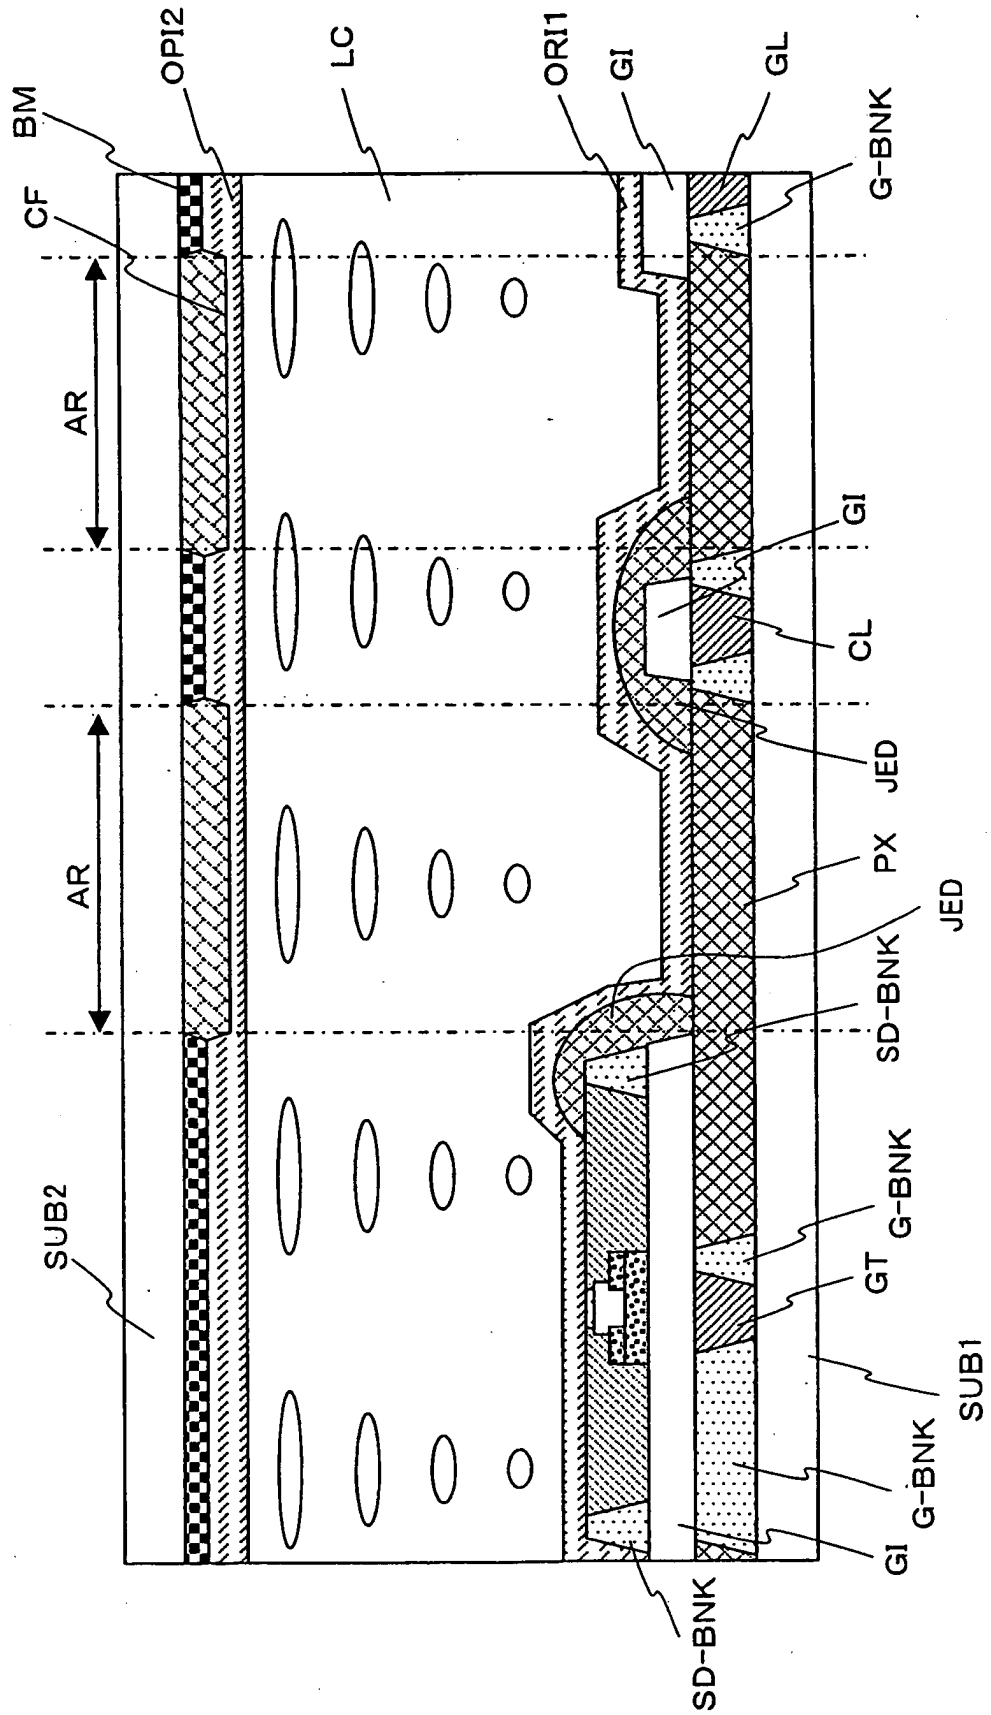


FIG.16





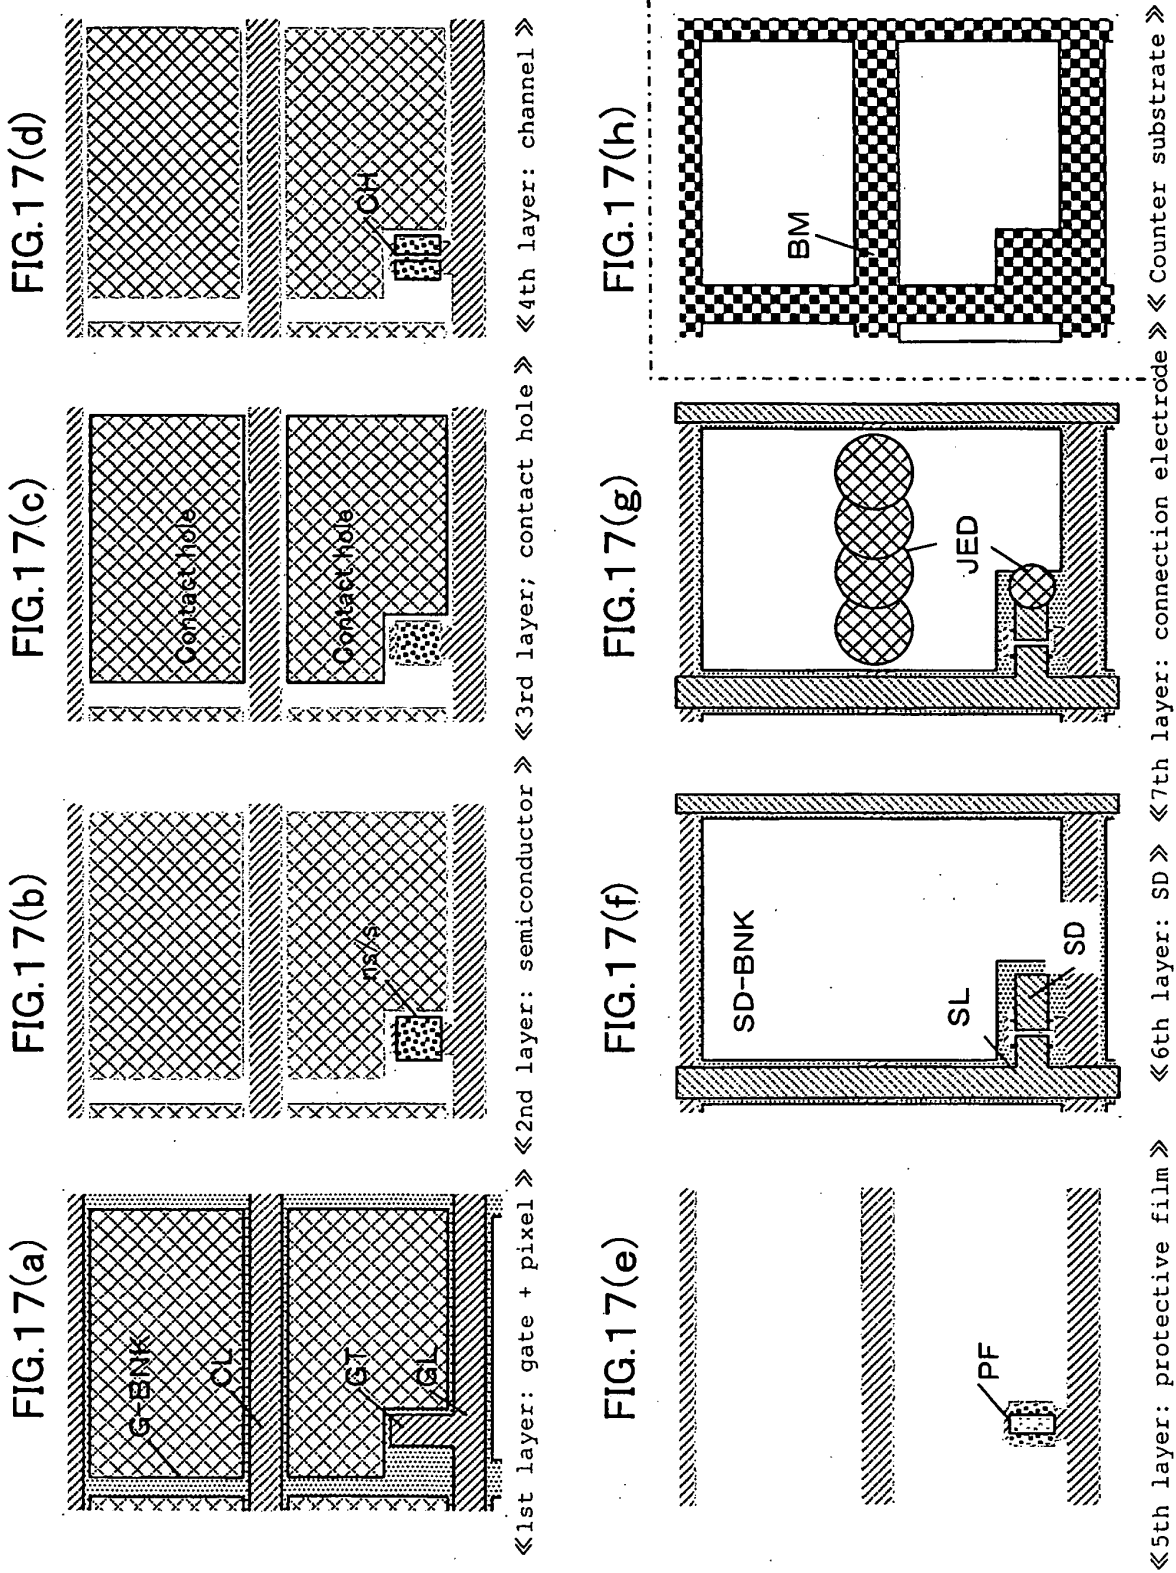


FIG.18(a)

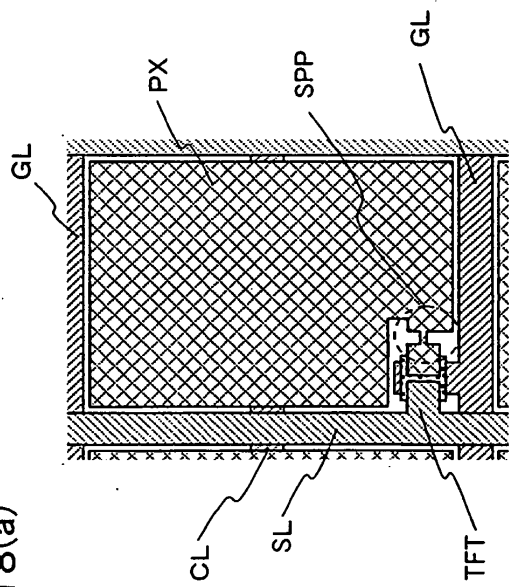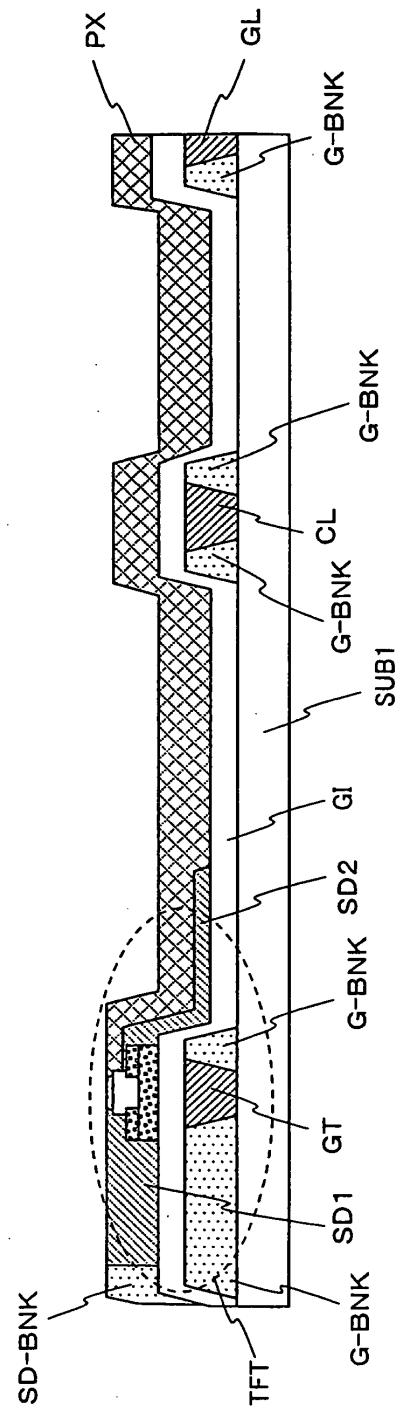

«Structure in plan view»

FIG.18(b)



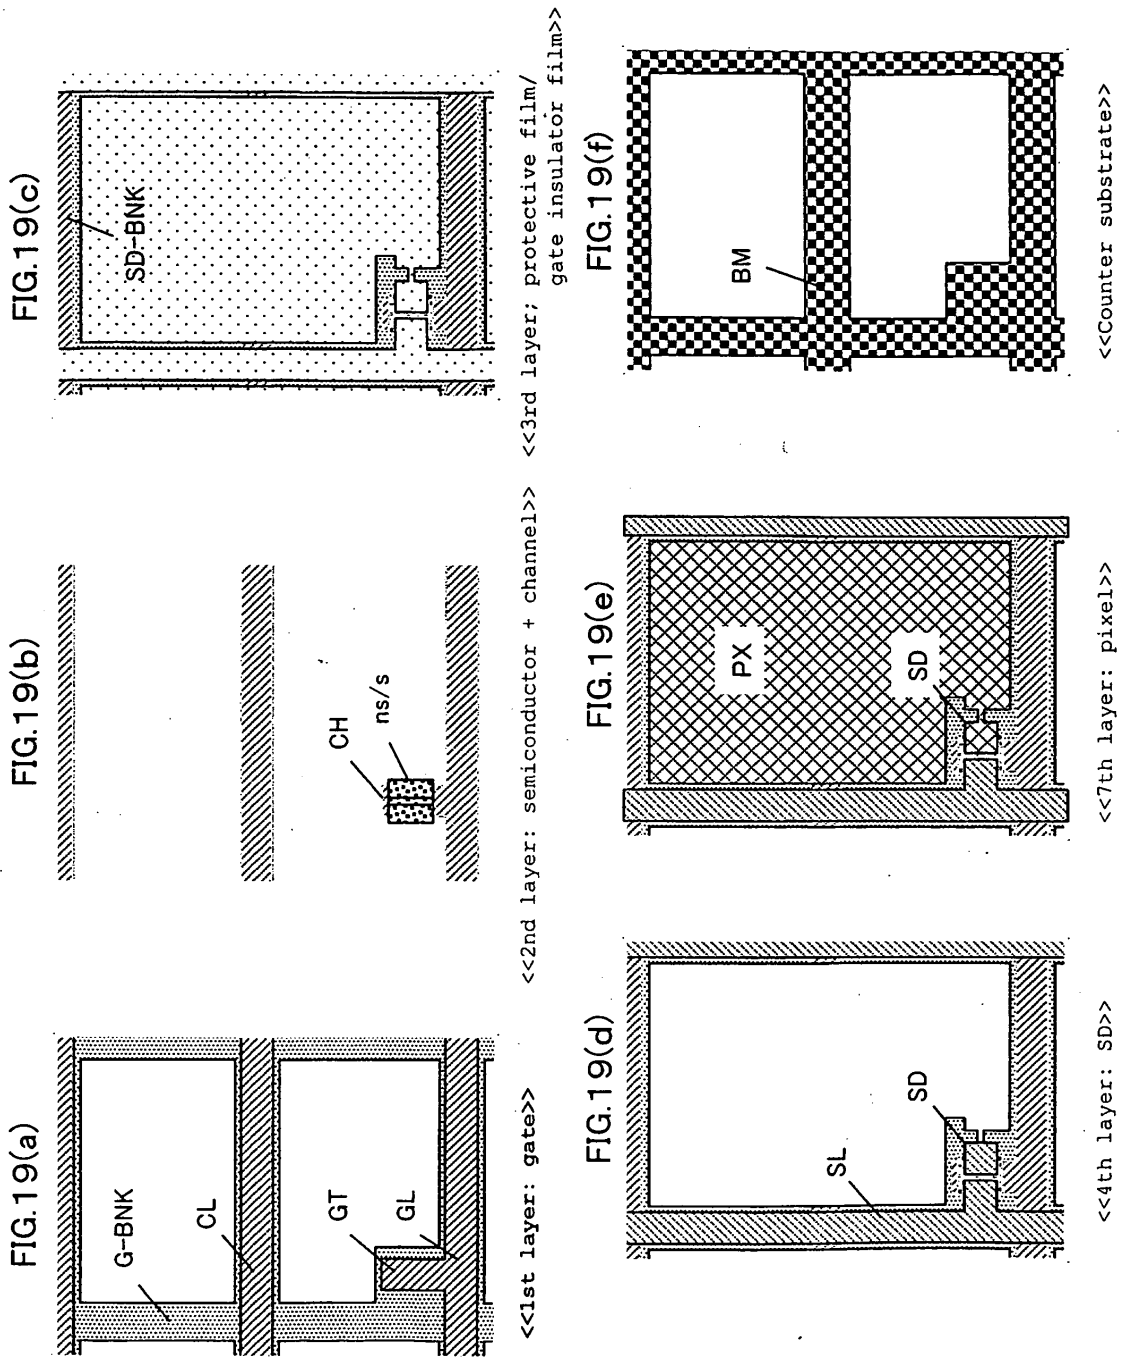


FIG.20(a)

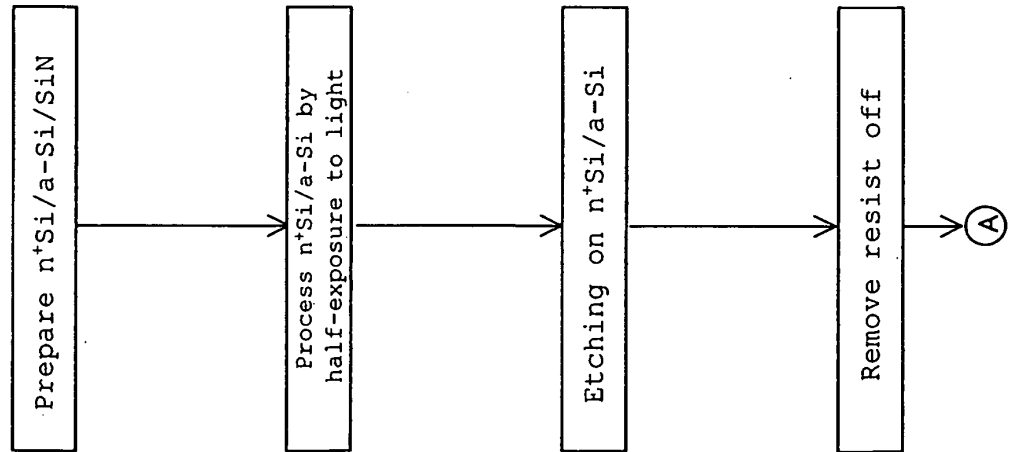


FIG.20(b)

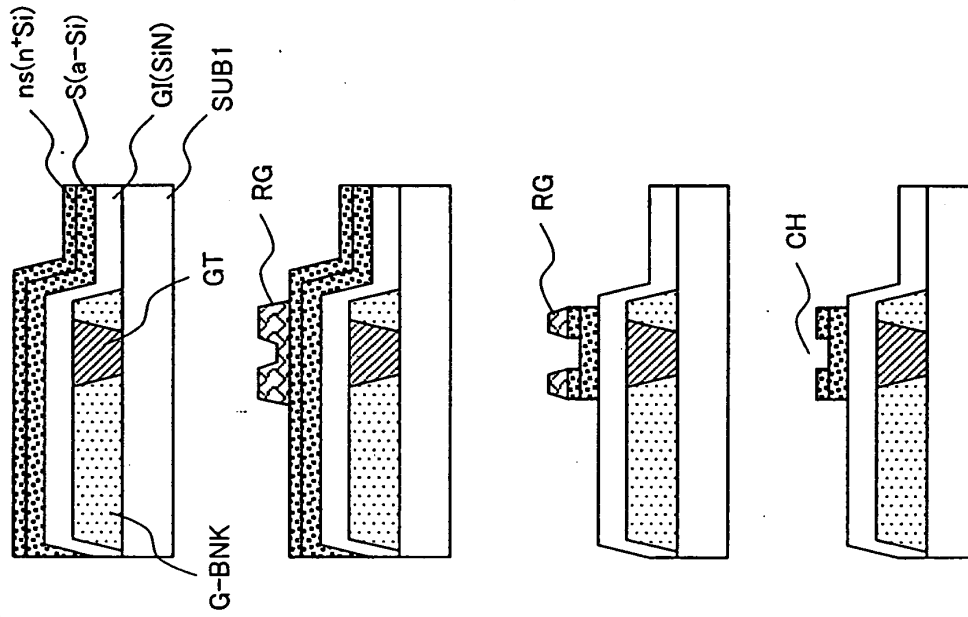


FIG.21(a)

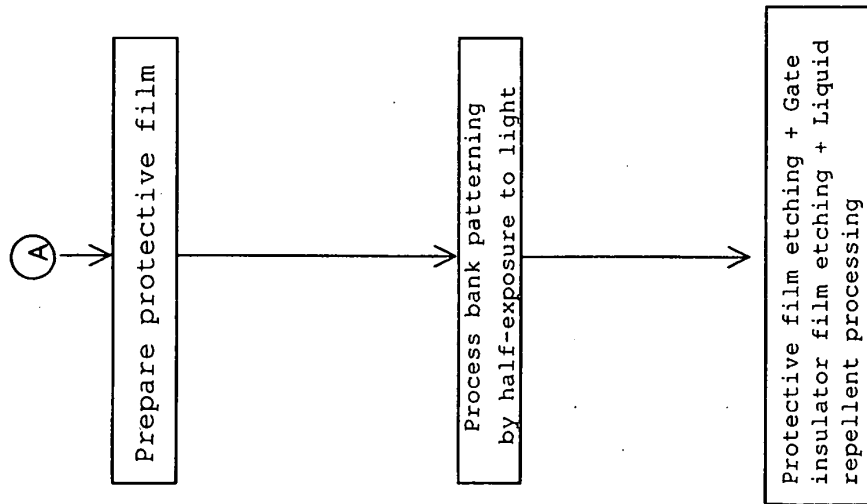


FIG.21(b)

«TFT unit» «Opening on gate insulator film»
(ex. Gate terminal unit)

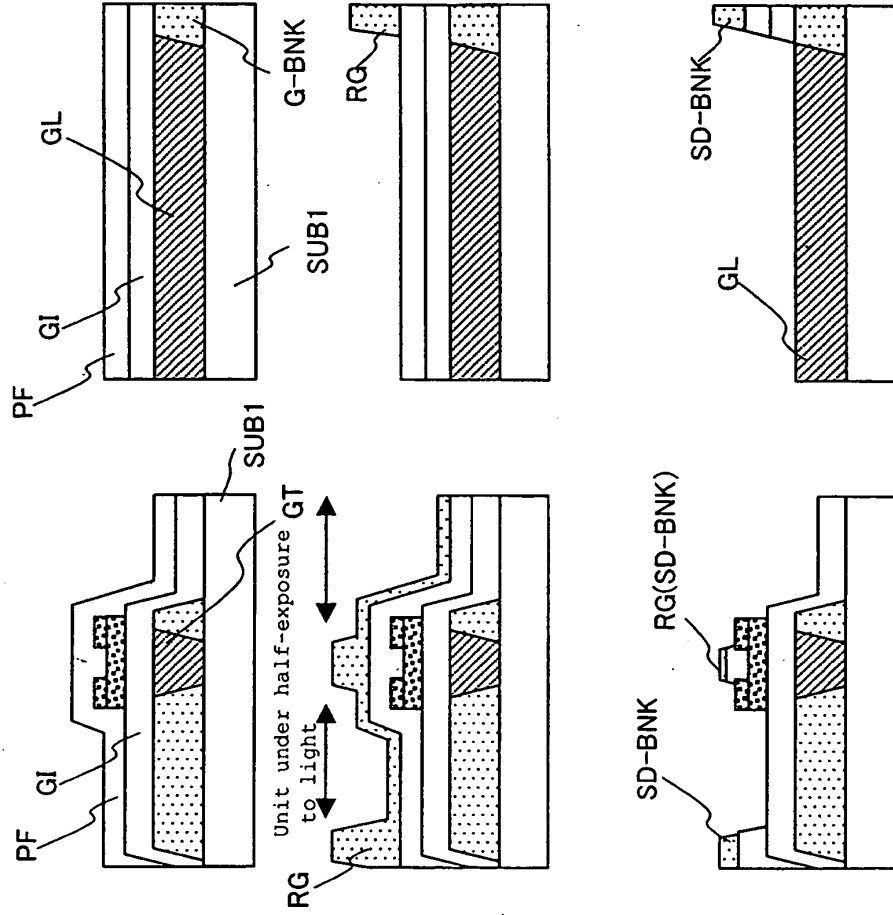


FIG.21(c)

«Opening on gate insulator film»
(ex. Gate terminal unit)

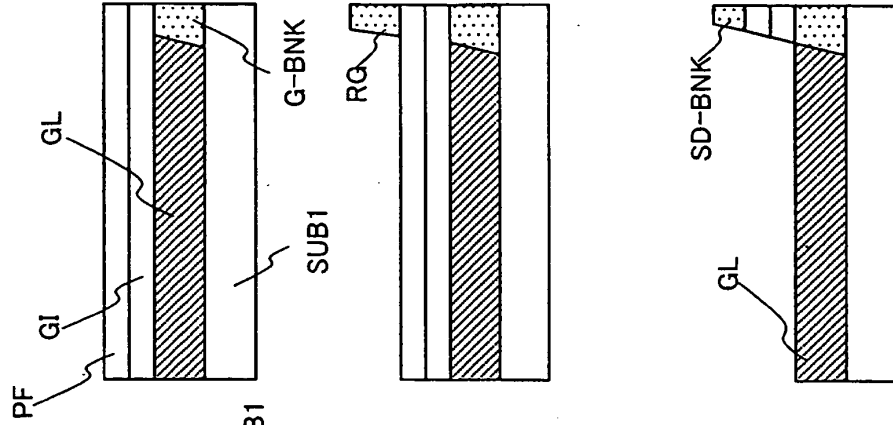


FIG.22(a)

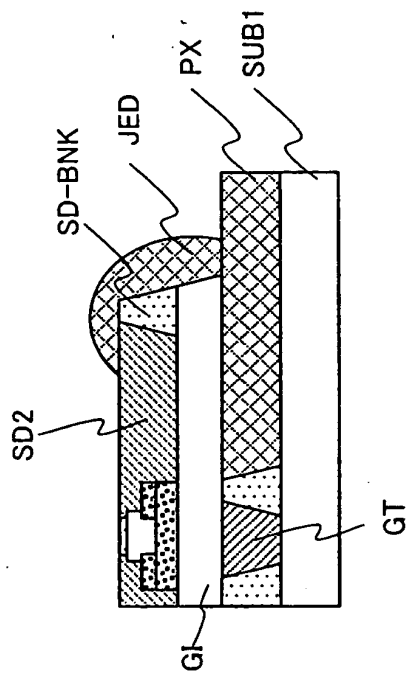


FIG.22(b)

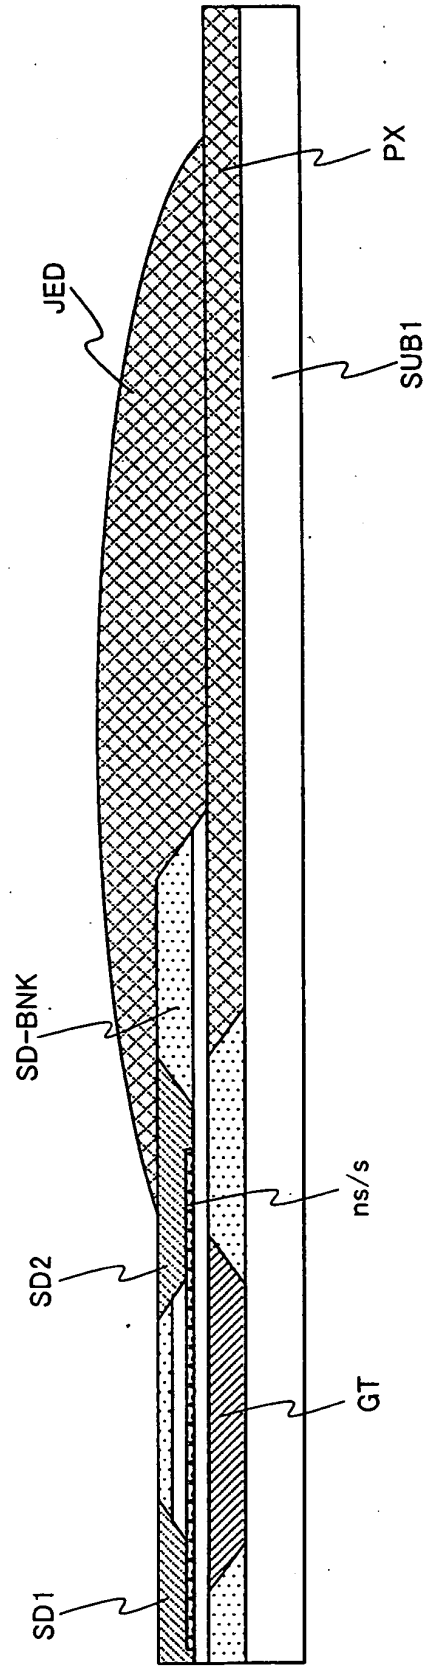


FIG.23(a)

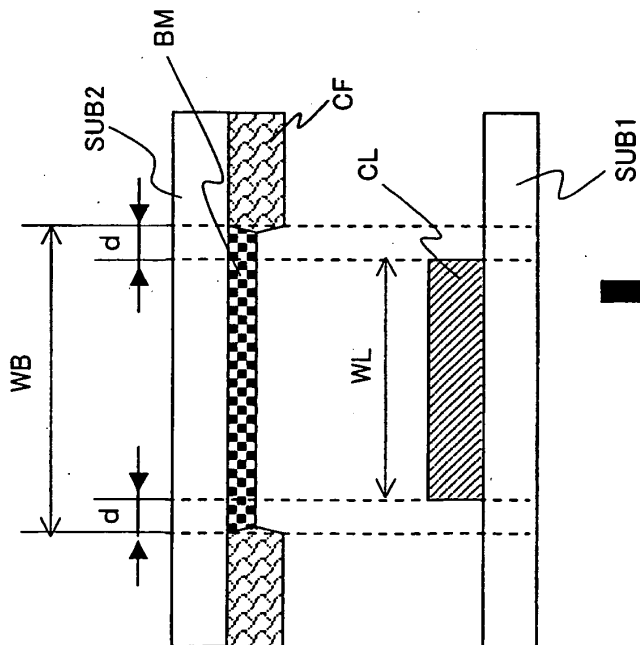


FIG.23(b)

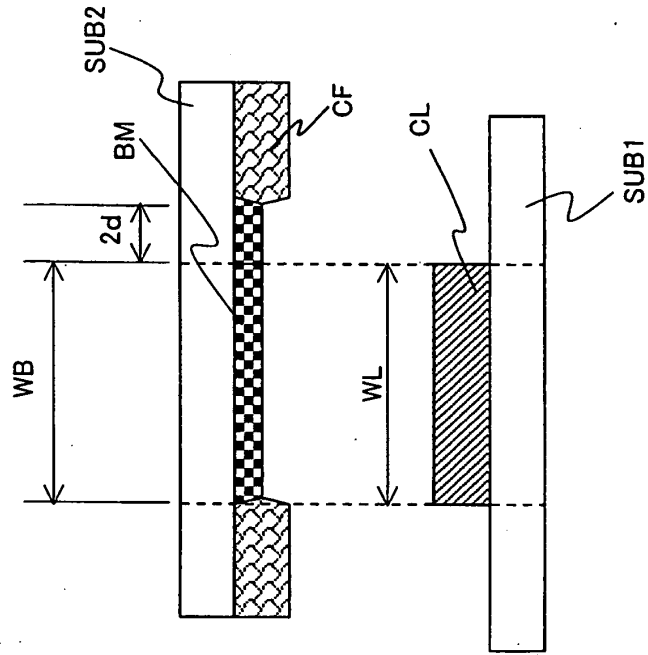


FIG.24(a)

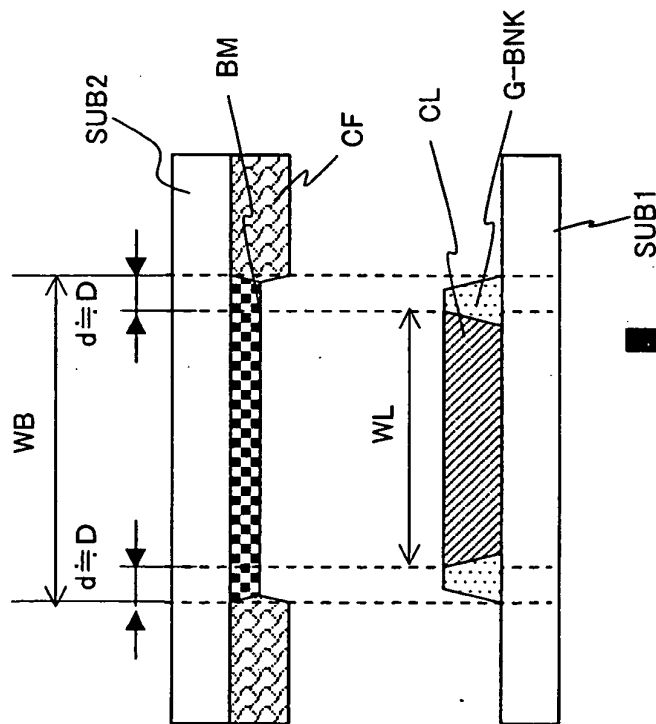


FIG.24(b)

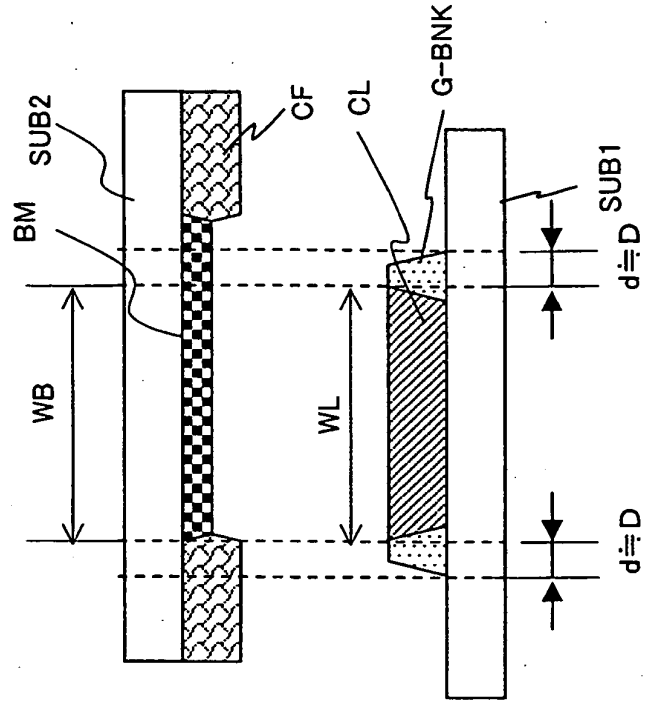


FIG.25(a)

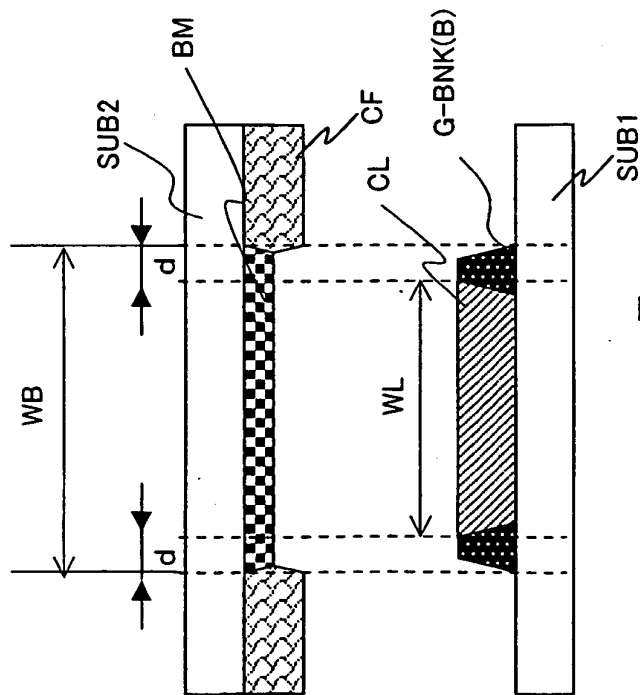


FIG.25(b)

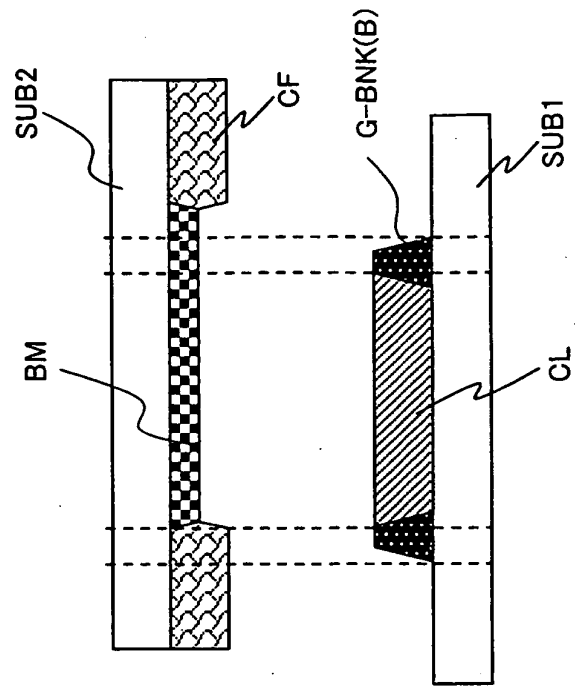


FIG.26(a)

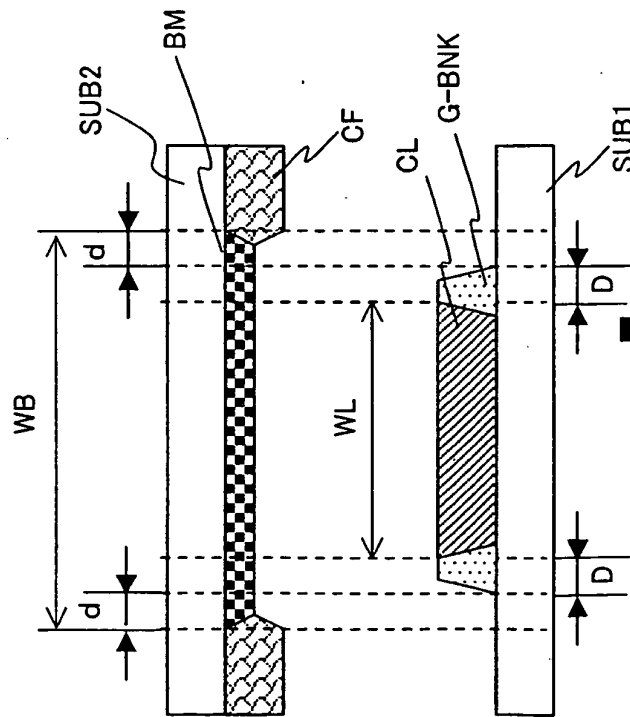


FIG.26(b)

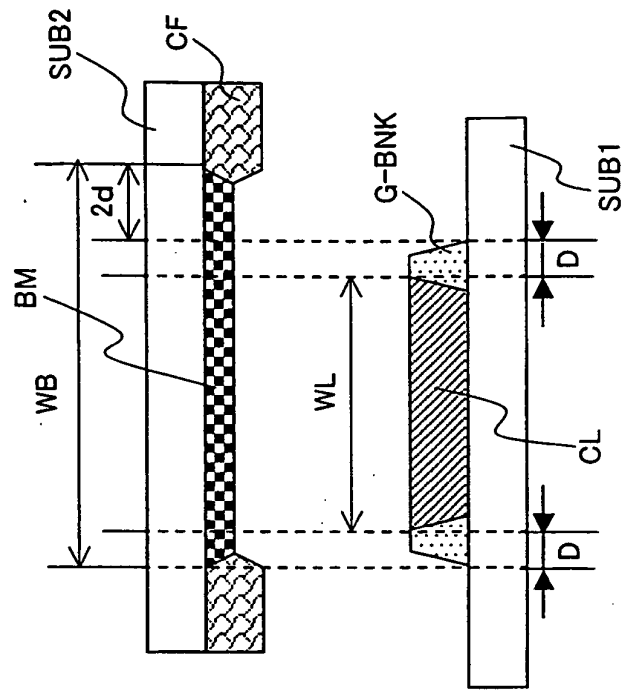


FIG.27


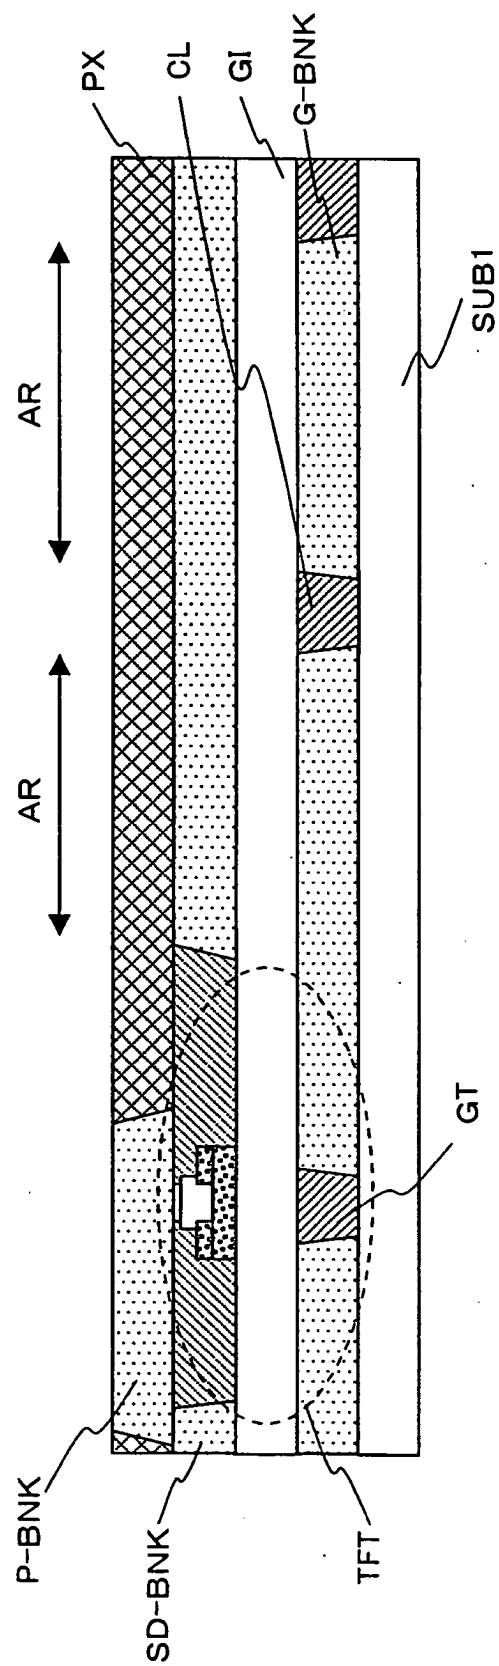


FIG.28

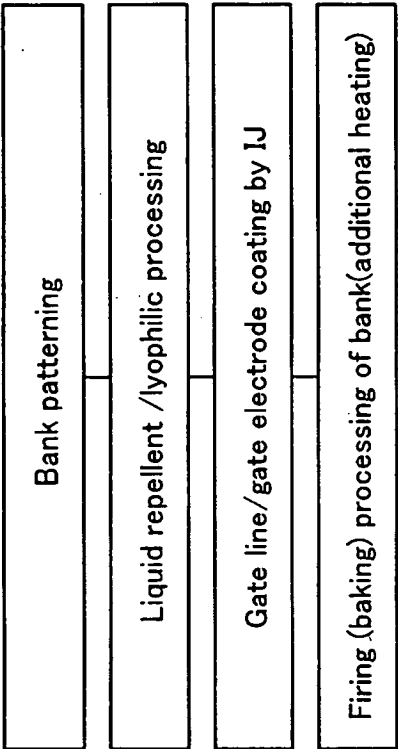

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2005012181 A [0005]
- US 2005022374 A [0005]

专利名称(译)	液晶显示装置		
公开(公告)号	EP1884821B1	公开(公告)日	2009-04-15
申请号	EP2007252400	申请日	2007-06-13
[标]申请(专利权)人(译)	未来视野股份有限公司		
申请(专利权)人(译)	未来愿景INC.		
当前申请(专利权)人(译)	未来愿景INC.		
[标]发明人	ABE MAKOTO TANAKA TSUTOMU TSUMURA MAKOTO		
发明人	ABE, MAKOTO TANAKA, TSUTOMU TSUMURA, MAKOTO		
IPC分类号	G02F1/1335 G02F1/1362 H01L51/00		
CPC分类号	G02F1/136286 G02F1/133512 G02F1/136213 G02F2001/136295		
优先权	2006206683 2006-07-28 JP		
其他公开文献	EP1884821A1		
外部链接	Espacenet		

摘要(译)

本发明提供一种低成本制造的具有高亮度和高显示质量的液晶显示装置，而不会降低透射率。液晶显示装置包括栅极线GL，其栅极GT为薄膜晶体管的栅极GT，制备在第一衬底SUE1上并用于施加扫描信号，栅极绝缘膜GI沉积以覆盖栅极线，半导体层nS/ S在栅极绝缘膜上形成岛状，构成薄膜晶体管的有源层，源极SD1和漏极SD2，配置在栅极绝缘膜上并分别与所述半导体层连接，连接到漏电极SD2的像素电极PX，其中栅极线GL和栅电极GT，源电极SD1，漏电极SD2和像素电极PX通过在封闭区域中的导电溶液的喷墨涂覆来制备通过银行G-BNK，SD-BNK和P-BNK的绝缘膜并通过烘烤。这些堤中的每一个仅布置在第二基板SUB2上被遮光膜BM隐藏的区域中。

