



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
19.05.2010 Bulletin 2010/20

(51) Int Cl.:
G02F 1/1368 (2006.01)

(21) Application number: **09004627.7**

(22) Date of filing: **31.03.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA RS

- **Kwon, Yeong-Keun**
Suwon-si
Gyeonggi-do (KR)
- **Ahn, Soon-Il**
Cheonan-si
Chungcheongnam-do (KR)
- **Park, Kyung-Ho**
Cheonan-si
Chungcheongnam-do (KR)

(30) Priority: **13.11.2008 KR 20080112843**

(71) Applicant: **Samsung Electronics Co., Ltd.**
Yeongtong-gu
Suwon-city, Gyeonggi-do 442-742 (KR)

(74) Representative: **Dr. Weitzel & Partner**
Patentanwälte
Friedenstrasse 10
89522 Heidenheim (DE)


(72) Inventors:
• **Kim, Yoon-Jang**
Suwon-si
Gyeonggi-do (KR)

(54) **Pixel array layout of a liquid crystal display**

(57) A liquid crystal display includes a substrate including a longer first side and a shorter second side, a plurality of gate lines disposed on the substrate, a plurality of data lines disposed on the substrate perpendicular to and insulated from the gate lines, and a plurality of pixel

electrodes, each pixel electrode electrically connected to a data line by a switching element, wherein a number of the gate lines is about half of a number of the pixel electrodes, and the data lines extend in a direction which is substantially parallel to a direction of the first side.

FIG. 4A

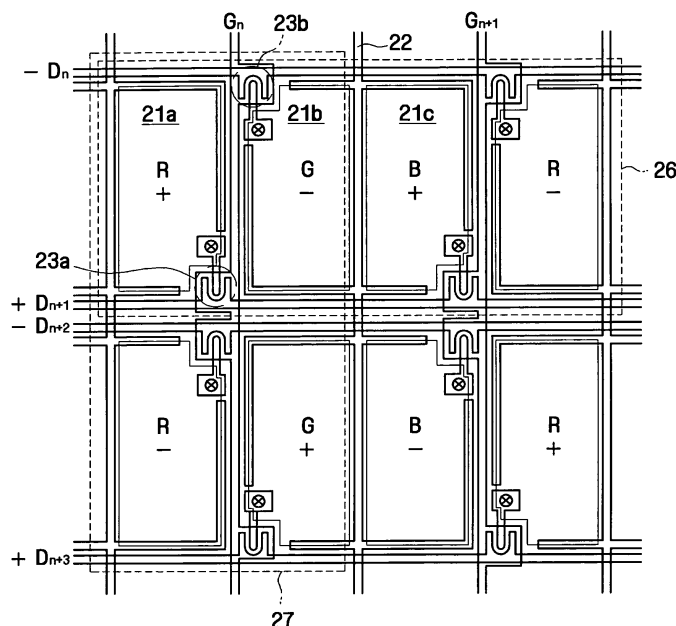

Description

[0001] This application claims priority to Korean Patent Application No. 10-2008-0112843, filed on November 13, 2008, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

(a) Field of the Invention

[0002] This disclosure relates to a pixel array layout of a liquid crystal display.

(b) Description of the Related Art

[0003] A data driver for a liquid crystal display ("LCD") is more expensive than a LCD gate driver, and it can be difficult to integrate a data driver on a glass substrate using an amorphous silicon ("a-Si") thin film transistor ("TFT") and provide a data driver having high mobility. In addition, a cost of a data driver can exponentially increase according to the number of channels in an LCD. Therefore it would be desirable to decrease the number of data driver and/or the number of gate driver channels to reduce manufacturing cost.

[0004] FIG. 1 is a schematic plan view of a prior art LCD. FIG. 2A is a plan view of the LCD of FIG. 1 showing a pixel array layout, and FIG. 2b is an equivalent circuit diagram of the pixel array layout of FIG. 2A.

[0005] As shown in FIG. 1, 2a, and 2b, the prior art LCD includes a plurality of gate lines G_i , including a first to a fourth gate lines G_n to G_{n+3} , and a plurality of data lines D_i , including a first to a fourth data lines D_n to D_{n+3} , a pixel electrode 11, a storage electrode 12, a TFT 13, a data driver 14, and a gate driver 15.

[0006] This configuration decreases the number of data driver channels by one third compared to a commercially available pixel array layout wherein the data line is a column line, which extends in a column direction, by using the data line D_i as row line and removing gate driver integrated circuits ("IC"s) by directly integrating the gate driver 15 on a glass substrate, in a pixel array manufacturing process, to reduce manufacturing cost.

[0007] As shown in FIGs. 2a and 2b, two data lines, the first and the second data lines D_n and D_{n+1} are disposed in one row pixel stripe 16, and one gate line, the first gate line G_n , is disposed in one column pixel stripe 17. The gate lines G_i are electrically connected in pairs and TFTs 13 are disposed in a zigzag fashion and are electrically connected to a corresponding data line D_i and gate line G_i . Therefore, a data signal can be simultaneously applied to two pixel electrodes in two corresponding column pixel stripes and sufficient pixel charging time can be provided.

[0008] In the addition, to prevent a texture, which can be caused by a gate field and which may cause distortion,

the storage electrode 12 can be disposed in close proximity to the gate line G_i .

[0009] In this configuration, however, because the gate line G_i is disposed in every column pixel stripe 17, and storage electrode 12 is disposed in close proximity to the gate line G_i , the aperture ratio is reduced. Furthermore, since two gate lines are electrically connected to one output terminal of the gate driver 15, a load of a gate line G_i can be relatively high so that a size of gate driver 15 may be increased. Therefore, a glass substrate use efficiency and a panel design margin can be reduced.

BRIEF SUMMARY OF THE INVENTION

[0010] The above described and other drawbacks are alleviated by a liquid crystal display wherein the number of gate lines is approximately halved.

[0011] In an embodiment, two pixel electrodes are disposed between substantially every two neighboring gate lines and thin film transistors are arranged in a zigzag fashion wherein at least one thin film transistor is centered on a gate line and electrically connects two pixel electrodes with two data lines, and a single gate turn on signal is used in every row pixel stripe.

[0012] Disclosed herein is a liquid crystal display including a substrate including a longer first side and a shorter second side; a plurality of gate lines disposed on the substrate; a plurality of data lines disposed on the substrate perpendicular to and insulated from the gate lines; and a plurality of pixel electrodes, each pixel electrode electrically connected to a data line by a switching element, wherein a number of the gate lines is about half of a number of the pixel electrodes, and the data lines extend in a direction which is substantially parallel to a direction of the first side.

[0013] Also disclosed is a liquid crystal display, including a substrate including a longer first side and a shorter second side; a plurality of gate lines disposed on the substrate; a plurality of data lines disposed on the substrate perpendicular to and insulated from the gate lines; and a plurality of pixel electrodes, each pixel electrode electrically connected to a data line by a switching element, wherein the data lines extend in a direction which is substantially parallel to a direction of the first side, and two pixel electrodes are disposed between substantially every two neighboring gate lines.

[0014] Also disclosed is a method of manufacturing a liquid crystal display, the method comprising forming a substrate having a longer first side and a shorter second side; disposing a plurality of gate lines on the substrate; disposing a plurality of data lines on the substrate perpendicular to and insulated from the gate lines; and electrically connecting each of a plurality of pixel electrodes to a data line by a switching element, wherein a number of the gate lines is about half of a number of the pixel electrodes, and the data lines extend in a direction which is substantially parallel to a direction of the first side.

[0015] These and other features, aspects, and advantages

tages of the disclosed embodiments will become better understood with reference to the following description and appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The disclosed subject matter is particularly pointed out and distinctly claimed in the claims at the conclusion of the specification. The foregoing and other objects, features, and advantages of the disclosed embodiments are apparent from the following detailed description taken in conjunction with the accompanying drawings in which:

FIG. 1 is a schematic plan view of a prior art LCD;
 FIG. 2A is a plan view showing a pixel array layout of the LCD in FIG. 1;
 FIG. 2B is an equivalent circuit diagram of the pixel array layout in FIG. 2A;
 FIG. 3 is a plan view showing an exemplary embodiment of an LCD;
 FIG. 4A is a plan view showing an exemplary embodiment of a pixel array layout of the LCD in FIG. 3; and
 FIG. 4B is an equivalent circuit diagram of an exemplary embodiment of the pixel array layout in FIG. 4A.

[0017] The detailed description explains the disclosed embodiments, together with advantages and features, by way of example with reference to the drawings.

DETAILED DESCRIPTION OF THE INVENTION

[0018] Aspects, advantages and features of the present invention and methods of accomplishing the same may be understood more readily by reference to the following detailed description of preferred embodiments and the accompanying drawings. The present invention may, however, be embodied in many different forms and should not be construed as being limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete and will fully convey the concept of the invention to those skilled in the art, and the present invention will only be defined by the appended claims. Like reference numerals refer to like elements throughout the specification.

[0019] It will be understood that when an element or layer is referred to as being "on" or "connected to" another element or layer, the element or layer can be directly on or connected to another element or layer or intervening elements or layers. In contrast, when an element is referred to as being "directly on" or "directly connected to" another element or layer, there are no intervening elements or layers present. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

[0020] It will be understood that, although the terms

first, second, third, etc., may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms.

These terms are only used to distinguish one element, component, region, layer or section from another region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the present invention.

[0021] Spatially relative terms, such as "below", "lower", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "below" or "lower" relative to other elements or features would then be oriented "above" relative to the other elements or features. Thus, the exemplary term "below" can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

[0022] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a," "an," and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0023] Embodiments of the invention are described herein with reference to cross-section illustrations that are schematic illustrations of idealized embodiments (and intermediate structures) of the invention. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, embodiments of the invention should not be construed as limited to the particular shapes of regions illustrated herein but are to include deviations in shapes that result, for example, from manufacturing.

[0024] For example, an implanted region illustrated as a rectangle will, typically, have rounded or curved features and/or a gradient of implant concentration at its edges rather than a binary change from implanted to non-implanted region. Likewise, a buried region formed by implantation may result in some implantation in the region between the buried region and the surface through which the implantation takes place. Thus, the regions illustrated in the figures are schematic in nature and their shapes

are not intended to illustrate the actual shape of a region of a device and are not intended to limit the scope of the invention.

[0025] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0026] All methods described herein can be performed in a suitable order unless otherwise indicated herein or otherwise clearly contradicted by context. The use of any and all examples, or exemplary language (e.g., "such as"), is intended merely to better illustrate the invention and does not pose a limitation on the scope of the invention unless otherwise claimed. No language in the specification should be construed as indicating any non-claimed element as essential to the practice of the invention as used herein.

[0027] Hereinafter, the present invention will be described in detail with reference to the accompanying drawings. However, the aspects, features and advantages of the present invention are not restricted to the ones set forth herein. The above and other aspects, features and advantages of the present invention will become more apparent to one of ordinary skill in the art to which the present invention pertains by referencing a detailed description of the present invention given below.

[0028] FIG. 3 is a plan view showing an exemplary embodiment of an LCD. FIG. 4A is a plan view showing an exemplary embodiment of a pixel array layout of the LCD in FIG. 3, and FIG. 4B is an equivalent circuit diagram of an exemplary embodiment of the pixel array in FIG. 4A.

[0029] As shown in FIG. 3, 4A, and 4B, a plurality of data lines D_i , which comprises the first to the fourth data lines D_n to D_{n+3} , are disposed as row lines extending in a row direction, and a plurality of gate lines G_i , which comprise the first to the fourth gate lines G_n to G_{n+1} , are disposed as column lines extending in a column direction. In an embodiment, a data driver 24 is disposed on a lateral side of a substrate and a gate driver 25 is disposed on an upper side of the substrate. In another embodiment, a data driver 24 is disposed on the upper side of a substrate and the gate driver 25 is disposed on the lateral side of the substrate. Thus, the location of the data driver 24 and the gate driver 25 is not limited.

[0030] In an information technologies ("IT") LCD panel or a television ("TV") LCD panel, the number of column lines can be greater than the number of row lines. In addition, a data driver for a LCD can be more expensive than a gate driver and a cost of a data driver can exponentially increase according to a number of channels. Therefore, it can be desirable for the data line D_i to be a

row line and extend in a row direction, rather than a column line extending in a column direction, to reduce a manufacturing cost.

[0031] Because the number of gate lines G_i can be increased if the gate line G_i is used as a column line, a pixel charging time can be reduced. For example, in an embodiment where a data line is a row line and a gate line is a column line in a high resolution LCD, such as a WXGA+ (comprising 1440x900 pixels and operating at 75Hz, for example) wherein a fast driving technology is applied, the real pixel charging time is about 2 microseconds (μs). As a result, it can be difficult to drive a LCD panel uniformly and stably with a-Si TFT because a mobility of an a-Si TFT is relatively low.

[0032] Therefore, in order to obtain sufficient pixel charging time, as shown in FIGs. 4A, and 4B, two data lines, such as the first and the second data lines D_n and D_{n+1} , are disposed in a row pixel stripe 26 and the first gate line G_n is disposed in one column pixel stripe 27. Two pixel electrodes, such as the first and the second pixel electrodes 21b and 21a, are alternately connected to an odd and an even data line, such as the first and the second data lines D_n and D_{n+1} , by two TFTs, such as the first and the second TFTs 23b and 23a, respectively, and the two TFTs, such as the first and the second TFTs 23b and 23a are simultaneously turned on by a single gate line, such as the first gate line G_n , disposed in the row pixel stripe 26. Thus, two data signals can be applied to two pixel electrodes, such as the first and the second pixel electrodes 21b and 21a, which are disposed adjacently in a row direction, through two data lines, such as the first and the second data lines D_n and D_{n+1} , at the same time. Accordingly, a pixel charging time can be doubled using this configuration.

[0033] In addition, for dot inversion driving, the polarity of the data signals applied to the data lines, such as the first to the fourth data lines D_n , D_{n+1} , D_{n+2} , and D_{n+3} , for example, can be changed alternately according to a column direction.

[0034] In an embodiment, a number of the gate lines can be about half of a number of the gate lines in a prior art LCD, as illustrated in FIG. 1, 2a, and 2b, even though a number of the data lines can be the same. Therefore an aperture ratio can be increased.

[0035] Furthermore, a load of a gate line connected to an output terminal of the gate driver may be reduced compared to the prior art LCD illustrated in FIG. 1, 2a, and 2b because the number of the gate lines per output terminal of the gate driver can be reduced. Thus, in an embodiment, a channel dimension of a gate driver's output TFT can be reduced when using an amorphous silicon gate driver ("ASG") technology, which directly integrates the gate driver on a glass substrate. Thus, it has been observed that the total size of gate driver circuit 25 can be reduced. Therefore a glass use efficiency can be improved.

[0036] In addition, a storage electrode 22 can be disposed adjacent to an edge of a pixel electrode edge and

between two gate lines, such as the first and the second gate lines G_n and G_{n+1} . A part of the storage electrode 22 disposed between two neighboring pixel electrodes, such as the first pixel electrode 21b and a third pixel electrode 21c, may be overlapped with the neighboring pixel electrodes, such as the first and the third pixel electrodes 21b and 21c, or the storage electrode 22 disposed between two neighboring pixel electrodes, such as the first and the third pixel electrodes 21b and 21c, may not be overlapped with the neighboring pixel electrodes, such as the first and the third pixel electrodes 21b and 21c.

[0037] The disclosed pixel array can comprise a line width which is greater than a line width of a commercially available pixel array, and an increased line width of the storage electrode 22 can provide several benefits.

[0038] First, a coupling capacitance between two neighboring pixel electrodes, such as the first and the third pixel electrodes 21b and 21c can be reduced.

[0039] Second, a size of a light shielding element located on an opposite substrate (not shown) can be reduced by shielding light emitted from a backlight module, increasing an aperture ratio of the LCD.

[0040] Third, the disclosed LCD is compatible with liquid crystals having a fast response characteristic because a load of the storage electrode 22 can be reduced and a ratio of a capacitance of a storage capacitor to a capacitance of a liquid crystal capacitor ("Cst/Clc") can be maintained at a larger value.

[0041] As stated above, the disclosed LCD has many advantages, such as high aperture ratio, high glass use efficiency, low manufacturing cost, and good compatibility with a liquid crystal having a fast response characteristic.

[0042] Various other modifications (such as variable pixel electrode structure, and variable driving mode, for example) different from the above disclosed embodiment will be apparent and can be readily made by those skilled in the art without departing from the scope and spirit of this invention. Accordingly, it is not intended that the scope of this disclosure be limited to the description as set forth herein.

Claims

1. A liquid crystal display comprising:

a substrate having a longer first side and a shorter second side;
a plurality of gate lines disposed on the substrate;
a plurality of data lines disposed on the substrate perpendicular to and insulated from the gate lines; and
a plurality of pixel electrodes, each pixel electrode electrically connected to a data line by a switching element,
wherein a number of the gate lines is about half

of a number of the pixel electrodes, and the data lines extend in a direction which is substantially parallel to a direction of the first side.

2. The liquid crystal display of claim 1, wherein two pixel electrodes are disposed between substantially every two neighboring gate lines.
3. The liquid crystal display of claim 1, wherein the first side is an upper side and the second side is a lateral side, and the data line is a row line.
4. The liquid crystal display of claim 1, wherein the first side is a lateral side and the second side is an upper side, and the data line is a column line.
5. The liquid crystal display of claim 1, wherein a number of the data lines is about twice the number of the pixel electrodes.
6. The liquid crystal display of claim 1, further comprising a plurality of storage electrodes, wherein the storage electrodes are disposed alternately with the gate lines.
7. The liquid crystal display of claim 1, further comprising a plurality of thin film transistors, wherein the thin film transistors are disposed in a zigzag fashion and wherein at least one thin film transistor is centered on a gate line.
8. The liquid crystal display of claim 2, further comprising a plurality of storage electrodes, wherein the storage electrodes are disposed alternately with the gate lines.
9. The liquid crystal display of claim 2, further comprising a plurality of thin film transistors, wherein the thin film transistors are disposed in a zigzag fashion and wherein at least one thin film transistor is centered on a gate line.
10. A liquid crystal display, comprising:

a substrate comprising a longer first side and a shorter second side;
a plurality of gate lines disposed on the substrate;
a plurality of data lines disposed on the substrate perpendicular to and insulated from the gate lines; and
a plurality of pixel electrodes, each pixel electrode electrically connected to a data line by a switching element,
wherein the data lines extend in a direction which is substantially parallel to a direction of the longer first side, and two pixel electrodes are disposed between substantially every two

neighboring gate lines.

11. The liquid crystal display of claim 10, wherein a number of the data lines is about twice a number of the pixel electrodes. 5
12. The liquid crystal display of claim 10, further comprising a plurality of storage electrodes, wherein the storage electrodes are disposed alternately with the gate lines. 10
13. The liquid crystal display of claim 10, further comprising a plurality of thin film transistors, wherein the thin film transistors are disposed in a zigzag fashion, and wherein at least one thin film transistor is centered on a gate line. 15
14. A method of manufacturing a liquid crystal display, the method comprising: 20
- forming a substrate having a longer first side and a shorter second side;
- disposing a plurality of gate lines on the substrate;
- disposing a plurality of data lines on the substrate perpendicular to and insulated from the gate lines; and 25
- electrically connecting each of a plurality of pixel electrodes to a data line by a switching element, wherein a number of the gate lines is about half of a number of the pixel electrodes, and the data lines extend in a direction which is substantially parallel to a direction of the first side. 30

35

40

45

50

55

FIG. 1
(Prior Art)

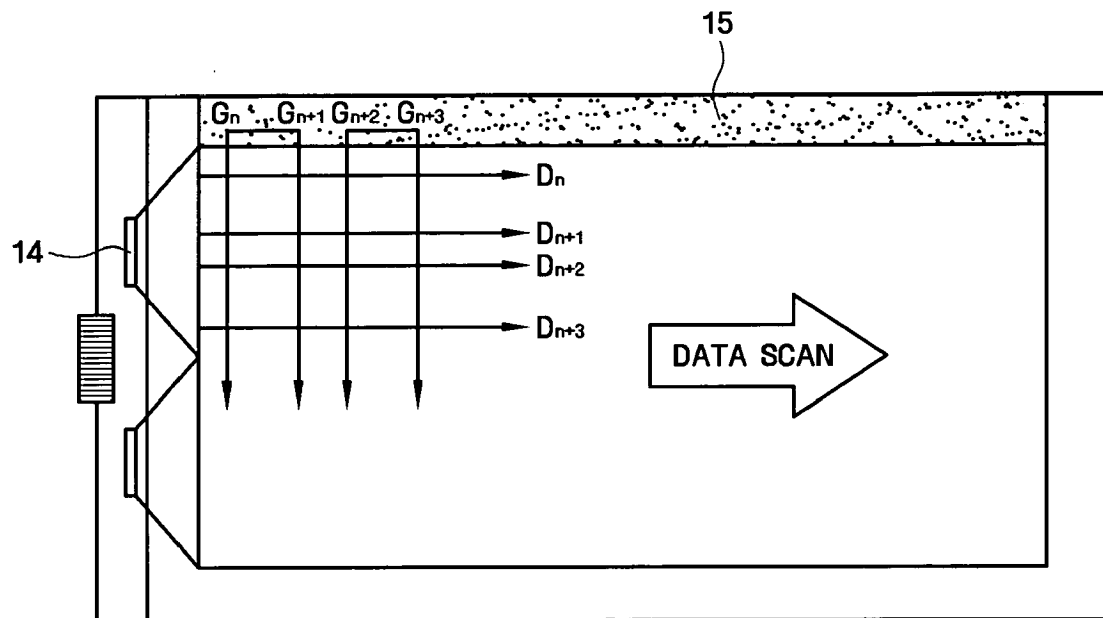


FIG. 2A
(Prior Art)

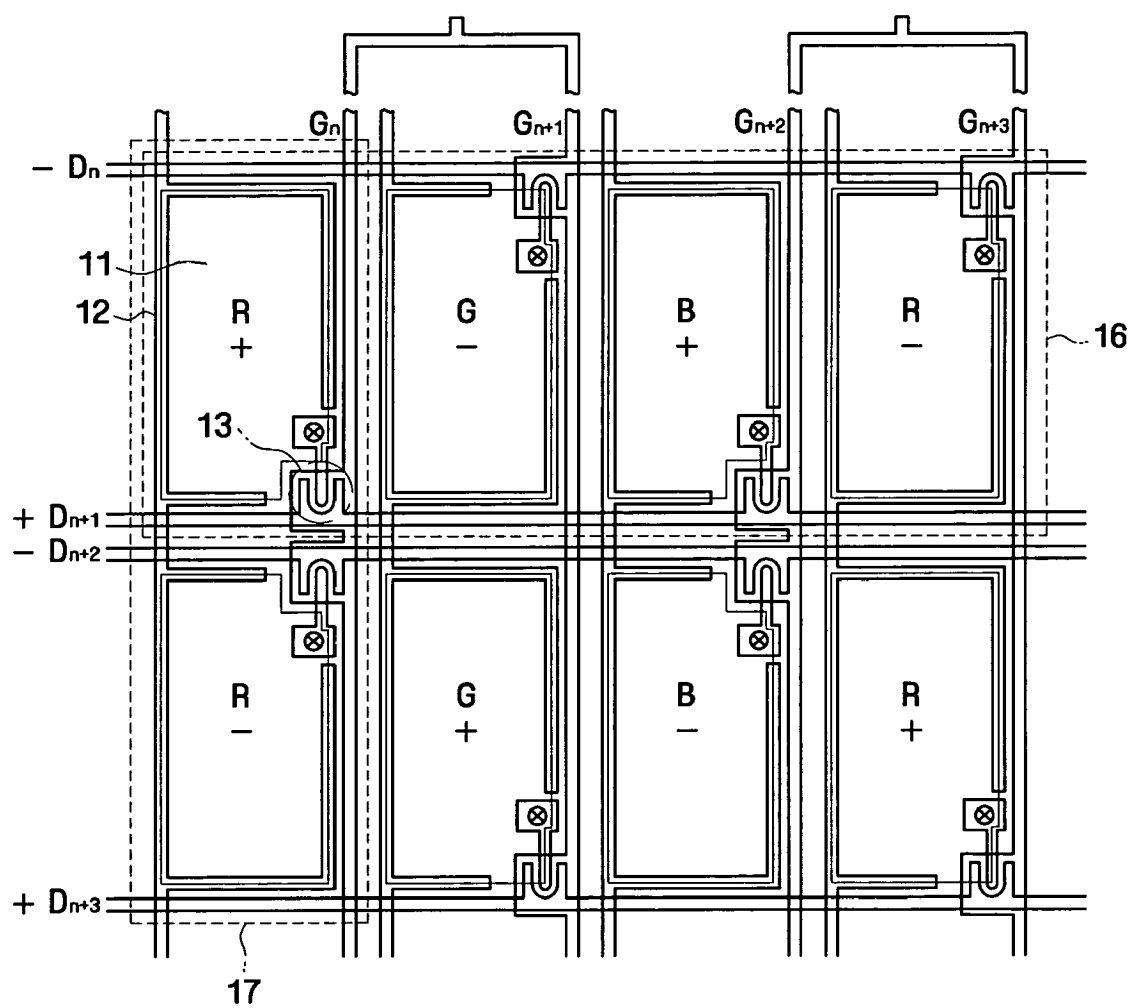


FIG. 2B
(Prior Art)

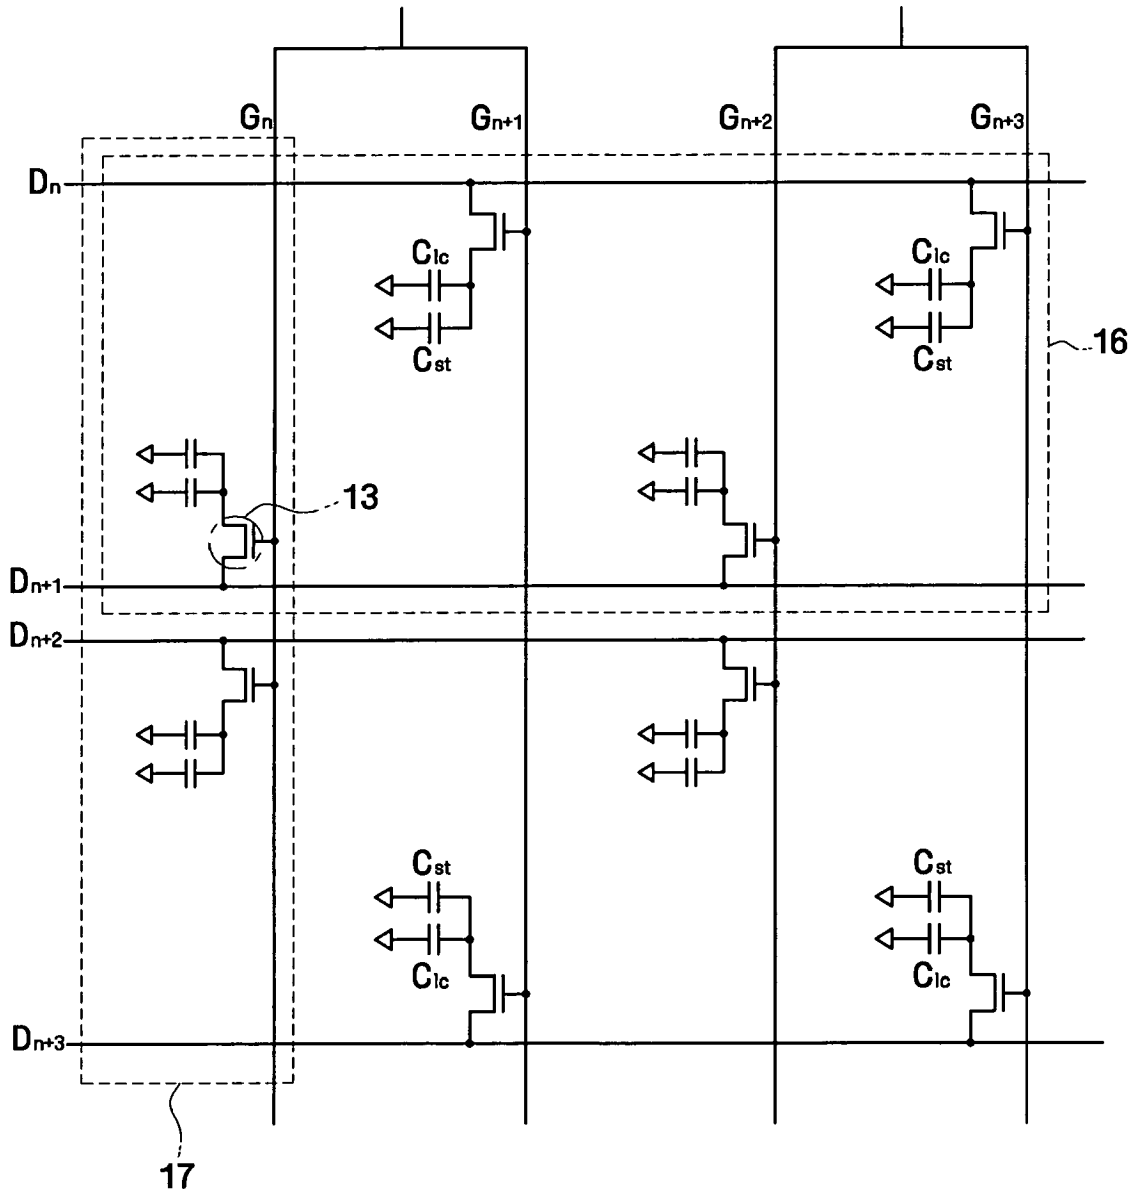


FIG. 3

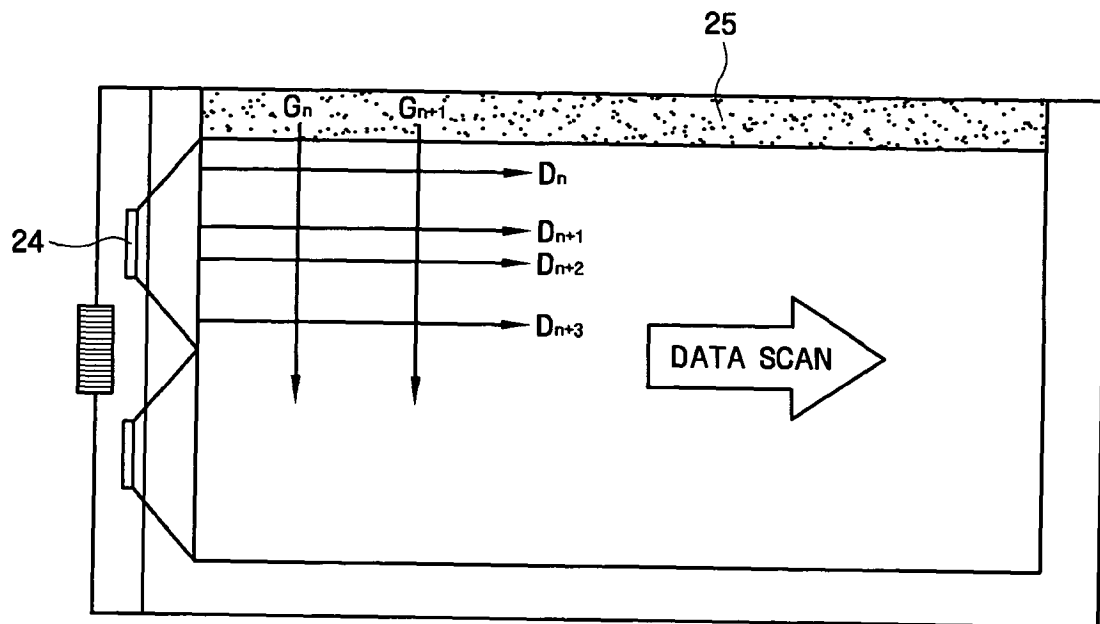


FIG. 4A


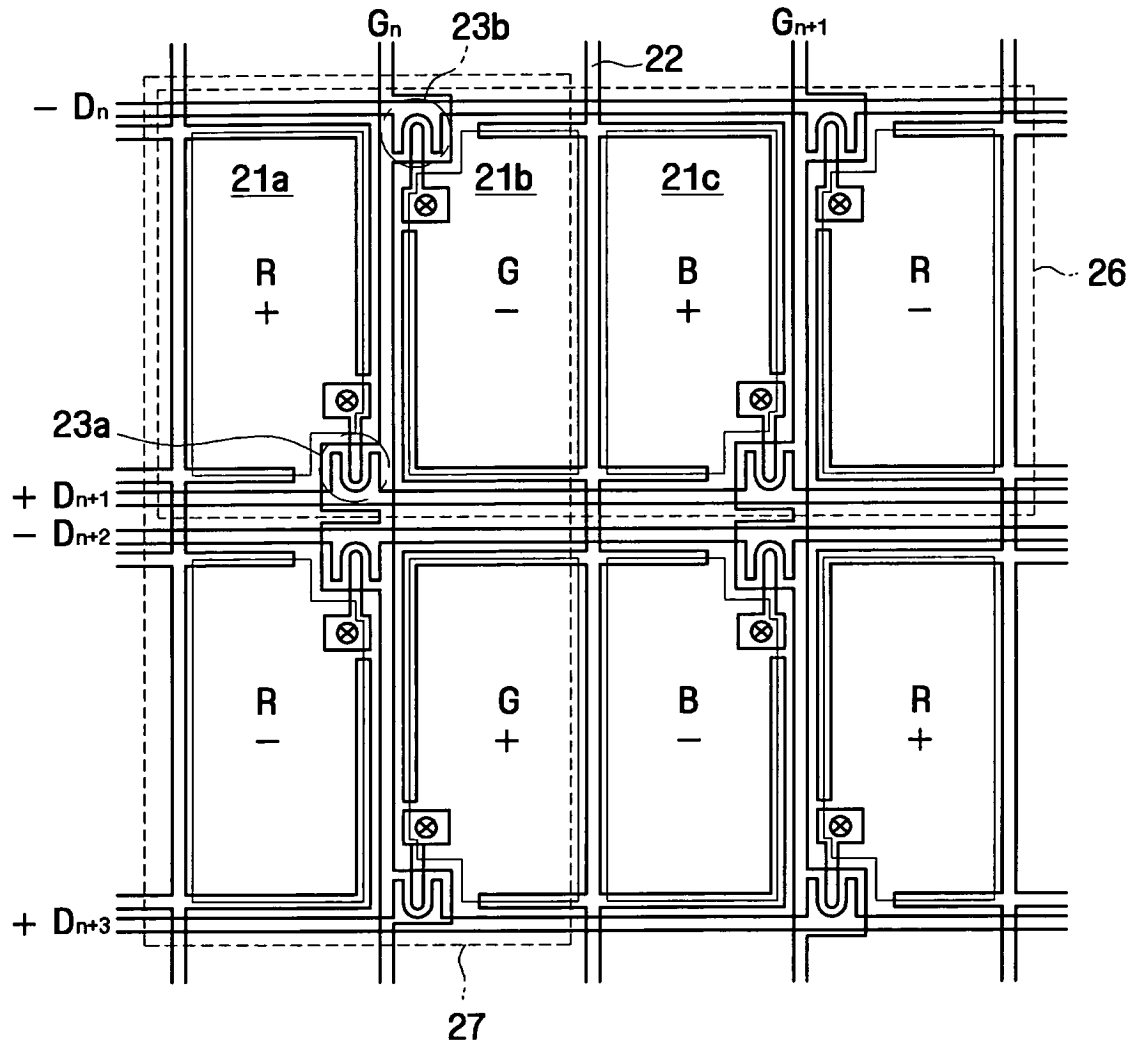


FIG. 4B



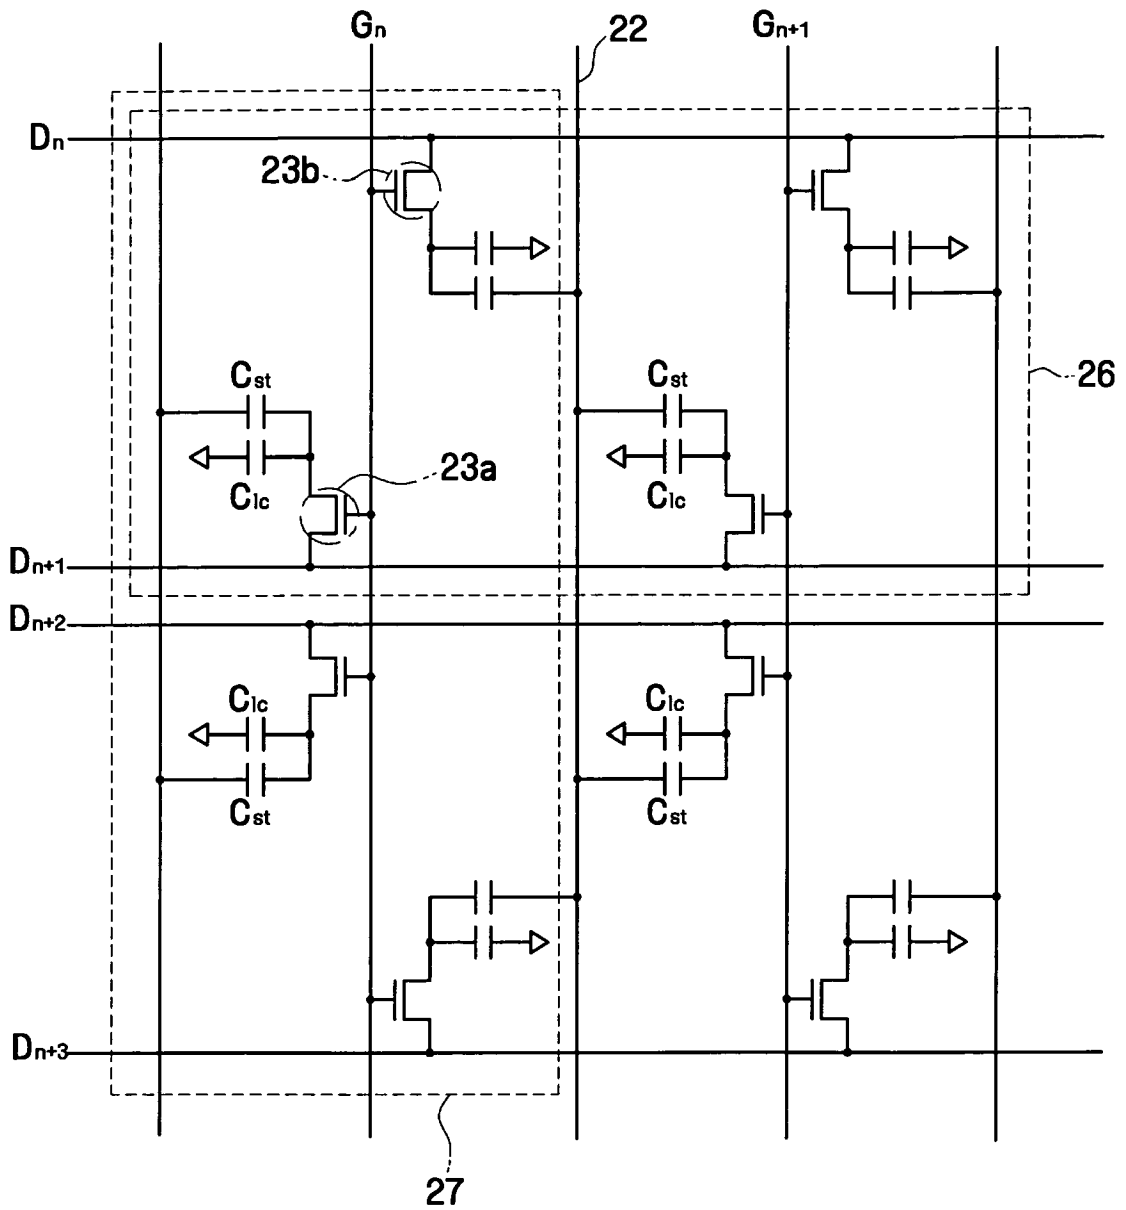

EUROPEAN SEARCH REPORT

Application Number
EP 09 00 4627

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	KR 2006 0119399 A (LG PHILIPS LCD CO LTD [KR]) 24 November 2006 (2006-11-24) * figure 4 *	1-14	INV. G02F1/1368
Y	-----	6,8,12	
X	US 2007/103631 A1 (MOON HONG M [KR] ET AL) 10 May 2007 (2007-05-10) * figures 3-5 * and the corresponding text passages	1-5,7, 9-11,13, 14	
Y	-----	6,8,12	
Y	US 2007/242206 A1 (YOON SANG-PIL [KR]) 18 October 2007 (2007-10-18) * figure 4 * and the corresponding text passages -----	6,8,12	
			TECHNICAL FIELDS SEARCHED (IPC)
			G02F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 5 October 2009	Examiner Lüssem, Georg
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

3
EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 09 00 4627

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-10-2009

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 20060119399 A	24-11-2006	NONE	
US 2007103631 A1	10-05-2007	KR 20070049923 A	14-05-2007
US 2007242206 A1	18-10-2007	CN 101055388 A	17-10-2007
		KR 20070101923 A	18-10-2007

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020080112843 [0001]

专利名称(译)	液晶显示器的像素阵列布局		
公开(公告)号	EP2187255A1	公开(公告)日	2010-05-19
申请号	EP2009004627	申请日	2009-03-31
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	KIM YOON JANG KWON YEONG KEUN AHN SOON IL PARK KYUNG HO		
发明人	KIM, YOON-JANG KWON, YEONG-KEUN AHN, SOON-IL PARK, KYUNG-HO		
IPC分类号	G02F1/1368		
CPC分类号	G02F1/136286 G02F1/13454 G02F1/136213 G02F2201/40		
代理机构(译)	DR.威猛和合作伙伴		
优先权	1020080112843 2008-11-13 KR		
外部链接	Espacenet		

摘要(译)

一种液晶显示器，包括：基板，包括较长的第一侧和较短的第二侧；多条栅极线，设置在基板上；多条数据线，设置在基板上，垂直于栅极线并与栅极线绝缘；以及多个像素电极，每个像素电极通过开关元件电连接到数据线，其中多条栅极线约为多个像素电极的一半，数据线沿基本平行于方向的方向延伸第一面。

