

(19)



(11)

EP 2 738 758 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
11.04.2018 Bulletin 2018/15

(51) Int Cl.:
G09G 3/36 ^(2006.01) **G11C 19/28** ^(2006.01)

(21) Application number: **13194861.4**

(22) Date of filing: **28.11.2013**

(54) Gate driving apparatus and display device

Gate-Ansteuerungsvorrichtung und Anzeigevorrichtung

Appareil de commande de grille et dispositif d'affichage

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **29.11.2012 CN 201210500711**

(43) Date of publication of application:
04.06.2014 Bulletin 2014/23

(73) Proprietors:
• **BOE Technology Group Co., Ltd.
Beijing 100015 (CN)**
• **Hefei BOE Optoelectronics Technology Co., Ltd.
Hefei, Anhui 230012 (CN)**

(72) Inventor: **Liu, Jinliang
100176 Beijing (CN)**

(74) Representative: **Klunker IP
Patentanwälte PartG mbB
Destouchesstraße 68
80796 München (DE)**

(56) References cited:
**CN-A- 101 546 607 CN-A- 102 708 925
GB-A- 2 452 279**

EP 2 738 758 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present disclosure relates to a field of liquid crystal displaying technique, and particularly, to a gate driving apparatus and a display device.

BACKGROUND

[0002] Application of a liquid crystal display device has filled in everywhere in people's life, such as a mobile phone, a game machine, a computer display, a television and the like. A traditional liquid crystal display device drives a liquid crystal panel to display generally in a manner of bonding by a gate driving IC and a source driving IC, and a driving technique for disposing a gate driver on the liquid crystal display integrally (gate in panel, GIP) arises to meet requirements for an increased resolution and a competitive cost pressure. In this technique, a gate driving circuit is composed of a plurality of thin film transistors TFTs, its manufacture process is the same as the liquid crystal display, which can reduce expenses of using the gate driving IC without increasing process difficulty and the cost.

[0003] Fig.1 is a schematic diagram illustrating a liquid crystal display driven by the existing GIP technique. A gate driving apparatus is composed of a plurality of shift register units 1 connected in cascade, each of the shift register units corresponds to a gate driving signal line, wherein a STV (frame start signal) provides a start signal with a cycle being same as a frame frequency to the shift register unit S 1; a first clock signal CLK and a second clock signal CLKB are the same but have opposite polarities, and are used for controlling the shift register to output a high level signal or a low level signal. A low level maintaining signal is provided to the shift register by VSS. An output signal from the shift register unit S1 is as a start signal for a next shift register unit S2 and provides a reset signal to the shift register unit S1 at the same time when the shift register unit S2 outputs a high level, so that the output from the S 1 is at the low level to produce a progressive driving process of the liquid crystal display device.

[0004] CN 102 708 925 A discloses a TFT shift register which comprises a shift register functional part and an auxiliary part, the shift register functional part is used for realizing a shift register function, the auxiliary part is used for controlling the voltage of a pulling low point in the shift register functional part, assisting charge and discharge of a PU point and an output terminal, and controlling output noise.

[0005] However, since the output signal from the shift register is connected directly with the gate driving signal line, the signal output from the shift register may change abnormally when a short-circuit occurs in the wirings associated with the gate driving signal lines (for example, a gate signal line and a data signal line, the gate signal

line and a common electrode line) within the panel of the liquid crystal display device, which may affect visibly the resetting of the previous shift register and the turning-on of the next shift register and in turn cause a disorder in timings and operation states of all of the shift registers, such that a display in a full screen is abnormal or fails. This problem may also affect seriously the research and analysis of reasons for the defect of the abnormality in a picture displaying, which will be made by engineers, and it is not benefit for increasing the product yield.

SUMMARY

[0006] It is an object of the present disclosure to provide a gate driving apparatus and a display device to settle an abnormal display in a full screen caused by an abnormality in signals output from a shift register, when a short-circuit occurs in wirings associated with gate lines within a liquid crystal panel.

[0007] The object is solved by the features of the respective independent claims. Further embodiments and developments are defined in the respective dependent claims.

[0008] The gate driving apparatus according to the embodiments of the present disclosure comprises the features of claim 1.

[0009] A display device according to the embodiments of the present disclosure comprises the above gate driving apparatus.

[0010] The embodiments of the present disclosure may settle an abnormal display in a full screen caused by an abnormality in signals output from a shift register, when a short-circuit occurs in wirings associated with gate lines within a liquid crystal panel, by arranging the outputting unit at the output terminal of the shift register unit, making an output signal from the shift register unit of the gate driving apparatus as a pulling-up control signal of the outputting unit, and providing an output signal to the gate line by the outputting unit, while it is able to enhance an analysis efficiency for defective phenomena such as the normal display, etc, and increase the product yield.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Fig.1 is a schematic diagram illustrating a structure of a gate driving apparatus in the prior art;

Fig.2 is a schematic diagram illustrating a structure of a gate driving apparatus according to an embodiment of the present disclosure;

Fig.3 is a schematic diagram illustrating a structure of a shift register unit in the gate driving apparatus shown in Fig. 1;

Fig.4 is a schematic diagram illustrating a structure of an outputting unit according to an embodiment of the present disclosure;

Fig.5 is a timing chart for respective signal terminals of the gate driving unit according to the embodiments of the present disclosure.

DETAILED DESCRIPTION

[0012] Embodiments of the present disclosure provide a gate driving apparatus and a display device for settling an abnormal displaying in a full screen caused by an abnormality in signals output from a shift register when short-circuit occurs in wirings associated with gate lines within a liquid crystal panel.

[0013] The embodiments of the present disclosure will be described below in connection with drawings.

[0014] Referring to Fig.2, the gate driving apparatus according to an embodiment of the present disclosure comprises a plurality of gate driving units 2 connected in cascade, wherein each stage of the gate driving unit 2 comprises a shift register unit 3, for example, S1, S2, etc. in Fig. 2. The shift register unit 3 comprises a pulling-down control node PD-CN. Each stage of the gate driving unit 2 further comprises an outputting unit 4, for example, Z1, Z2 and the like in the figure, for outputting a first power voltage V_{gh} or a second power voltage V_{ss} to a gate line.

[0015] A pulling-up control terminal IN of the outputting unit is connected to an output terminal OUTPUT of the shift register unit, a reset signal terminal RET thereof is connected to a reset signal terminal RET of the shift register unit in the same stage of the gate driving unit, a pulling-down control terminal thereof is connected to a pulling-down control node PD-CN of the shift register unit in the same stage of the gate driving unit, a first power supply input terminal thereof is connected to the first power voltage V_{gh}, a second power supply input terminal thereof is connected to the second power voltage V_{ss}, and an output terminal OUT of the outputting unit is connected to the gate line 'gate' as an output terminal of the gate driving unit.

[0016] The outputting unit 4 comprises:

a first outputting module for providing the first power voltage to the output terminal of the outputting unit, that is, outputting the same to the gate line, in response to a pulling-up control signal, namely in response to an output signal of the shift register unit;
a second outputting module for providing the second power voltage to the output terminal of the outputting unit, in response to a reset signal;
a third outputting module for providing the second power voltage to the output terminal of the outputting unit, in response to a pulling-down control signal, namely in response to a voltage signal at the PD-CN node of the shift register unit.

[0017] Optionally, the first outputting module comprises a first thin film transistor with a gate connected to the pulling-up control terminal of the outputting unit, a source connected to the first power supply input terminal, and a

drain connected to the output terminal of the outputting unit.

[0018] Optionally, the second outputting module comprises a second thin film transistor with a gate connected to the reset signal terminal of the outputting unit, a source connected to the output terminal of the outputting unit, and a drain connected to the second power supply input terminal.

[0019] Optionally, the third outputting module comprises a third thin film transistor with a gate connected to the pulling-down control terminal of the outputting unit, a source connected to the output terminal of the outputting unit, and a drain connected to the second power supply input terminal.

[0020] Optionally, the shift register unit comprises a plurality of N-type thin film transistors, and the first thin film transistor, the second thin film transistor and the third thin film transistor in the outputting unit are all the N-type thin film transistors. The N-type thin film transistor is turned on at a high level and is turned off at a low level.

[0021] Optionally, for the shift register units, an input signal terminal of a first stage of shift register unit is connected to a frame start signal, and a reset signal terminal of the first stage of shift register unit is connected to an output terminal of a second stage of shift register unit;

an input signal terminal of a last stage of shift register unit is connected to an output terminal of a previous stage of shift register unit, and a reset signal terminal of the last stage of shift register unit is connected to the frame start signal, or is connected to an outputting terminal of any stage of shift register unit except its previous stage of shift register unit or an output terminal of the outputting unit;

except the first stage of shift register unit and the last stage of shift register unit, the input signal terminals of the remaining respective stages of shift register units are connected to the output terminals of their corresponding previous stages of shift register units, and the reset signal terminals thereof are connected to the output terminals of the next stages of shift register units.

[0022] The embodiments of the present disclosure will be described below in connection with drawings.

[0023] Referring to Fig. 2, the gate driving apparatus according to an embodiment of the present disclosure comprises a plurality of gate driving units 2 connected in cascade, wherein each stage of the gate driving unit 2 comprises a shift register unit 3, for example, S1, S2, and the like in the figure, which comprises a pulling-down control node PD-CN, and each stage of the gate driving unit further comprises an outputting unit 4, for example, Z1, Z2 and the like in the figure.

[0024] A pulling-up control terminal IN of the outputting unit is connected to an output terminal OUTPUT of the shift register unit, a reset signal terminal RET thereof is connected to a reset signal terminal RET of the shift register unit, a pulling-down control terminal thereof is connected to a pulling-down control node PD-CN of the shift

register unit, a first power supply input terminal thereof is connected to the first power voltage V_{gh}, a second power supply input terminal thereof is connected to the second power voltage V_{SS}, and an output terminal OUT of the outputting unit is connected to the gate line 'gate' as an output terminal of the gate driving unit.

[0025] Herein, the first power voltage V_{gh} is a high level, and the second power voltage V_{SS} is a low level. An input signal terminal IN of the first stage of shift register unit S1 is connected to a frame start signal STV, the reset signal terminal RET of the first stage of shift register unit S1 is connected to an output terminal OUTPUT of the second stage of shift register unit; an input signal terminal of the last stage of shift register unit is connected to an output terminal of its previous stage of shift register unit, and a reset signal terminal of the last stage of shift register unit is connected to the frame start signal, or is connected to an output terminal of any stage of shift register unit except its previous stage of shift register unit or an output terminal of an outputting unit 4; except for the first stage of shift register unit and the last stage of shift register unit, the input signal terminals of the remaining respective stages of shift register units are connected to the output terminals of previous stages of shift register units, and the reset signal terminals thereof are connected to the output terminals of next stages of shift register units.

[0026] As illustrated in Fig.2, a STV, as the frame start signal, provides a driving start control signal to the shift register; CLK and CLKB are a first clock signal and a second clock signal, respectively, and control the shift register to output a high level signal and a low level signal, respectively; a V_{SS} provides a low level maintaining signal to the shift register 3 and the outputting unit 4; a V_{gh} provides a high level signal to a gate signal line through the outputting unit 4; and a high level signal output from the outputting unit 4 is controlled by an output signal from the shift register 3. Among the above signals, a pulse cycle of the STV is the same as a frame frequency of a display device, the CLK and the CLKB have the same signal pulses but opposite polarities, and the V_{gh} and the V_{SS} are the high level signal and the low level signal, respectively. During a process of progressive driving, when a first gate driving unit outputs a high level, an output signal at the high level from the shift register unit S1 functions as an input signal of the shift register unit S2 in the second gate driving unit; when the second gate driving unit outputs a high level, the output signal at the high level from the shift register unit S2 functions as a reset signal of the shift register unit S1 and the outputting unit Z1 (which makes the output from the shift register unit S1 and the gate signal be at the low levels); and when the S1 and Z1 are reset to the low level, the shift register S1 outputs a PD-CN signal to the outputting unit Z1 so as to maintain the output terminal of the outputting unit Z1 at the low level.

[0027] Similarly, the gate signal lines corresponding to each of the gate driving units outputs progressively a high level to drive a liquid crystal panel to drive progressively

the display. The gate driving apparatus is always maintained to output the low level outside periods of time during which it outputs the high level.

[0028] Fig. 3 is a schematic diagram illustrating a circuit structure of a shift register unit connected in cascade in the prior art. The shift register unit is used for the prior art shown in Fig. 1 and also may be used for the structure of the gate driving apparatus according to the embodiment of the present disclosure illustrated in Fig. 2. As shown in Figure 3, regions marked by reference numerals 11, 12, 13, 14 and 15 correspond to a pulling-up driving module, a pulling-up module, a pulling-down controlling module, a pulling-down module and a resetting module in the shift register, respectively.

[0029] As illustrated in Fig. 3, the pulling-up driving module 11 of the shift register unit comprises a TFT M1 with a gate and a source connected to a STV signal, and a drain connected to a PU node;

the pulling-up module 12 comprises a TFT M3 and a capacitor C1, a source of the M3 is connected to a first clock signal CLK, a gate thereof is connected to the PU node, and a drain thereof is connected to an output terminal OUTPUT; a first end of the capacitor C1 is connected to the PU node, and a second end thereof is connected to the output terminal OUTPUT;

the pulling-down controlling module 13 comprises a TFT M6 with a gate connected to the PU node, a drain connected to a V_{SS}, and a source used as a PD-CN node; the pulling-down module 14 comprises TFTs M2, M4, M5 and M8, wherein a source of the M2 is connected to the PU node, a gate thereof is connected to the PD-CN node, and a drain thereof is connected to the V_{SS}; a source of the M4 is connected to the output terminal OUTPUT, a gate thereof is connected to the PD-CN node, and a drain thereof is connected to the V_{SS}; a source and a gate of the M5 are connected to the second clock signal CLKB, and a drain thereof is connected to the PD-CN node; a source of the M8 is connected to the second clock signal CLKB, a gate thereof is connected to the PU node, and a drain thereof is connected to the PD-CN node;

the resetting module 15 comprises TFTs M7 and M9, wherein a source of the M7 is connected to the PU node, a gate thereof is connected to the reset signal terminal RET, and a drain thereof is connected to the V_{SS}; a source of the M9 is connected to the output terminal OUTPUT, a gate thereof is connected to the reset signal terminal RET, and a drain thereof is connected to the V_{SS}.

[0030] In the example, the pulling-up driving module 11 receives the high level signal outputting from the previous stage as a start signal, so that a level at the PU node connected with the pulling-up module 12 rises and a level at the PD-CN node is pulled down; when the first clock signal CLK is at the high level, the TFT M3 is turned on, and the shift register unit outputs the high level; when an output from the next stage of shift register unit is the high level (the second clock signal CLKB is at the high level), the RET signal is at the high level, the M7 and M9 are turned on, so that the PU node and the output terminal

OUTPUT are pulled down to a low level VSS, and the PD-CN node is pulled up to the high level at the same time; in subsequent high-low level switching processes of the CLKB, the high level at the PD-CN node retains the M2 and M4 to be turned on and maintains the PU node and the output terminal OUTPUT of the shift register to be at the low level.

[0031] In the gate driving unit 2 according to the embodiments of the present disclosure, the outputting unit 4 receives a voltage signal at the pulling-down node PD-CN outputting from the shift register unit 3, so that the output terminal OUT of the outputting unit 4 retains a low level signal.

[0032] Fig. 4 is a schematic diagram illustrating an internal structure of the outputting unit 4 in the n^{th} gate driving unit according to an embodiment of the present disclosure. As shown in Fig. 4, the outputting unit 4 comprises: a first outputting module 41 for providing the first power voltage Vgh to the output terminal OUT of this outputting unit, that is, outputting the same to the gate line, in response to a pulling-up control signal, namely in response to the output signal of the shift register unit; a second outputting module 42 for providing the second power voltage VSS to the output terminal OUT of this outputting unit, in response to a reset signal RET; a third outputting module 43 for providing the second power voltage VSS to the output terminal of the outputting unit, in response to a pulling-down control signal PD-CN, namely in response to the voltage signal at the PD-CN node of the shift register unit.

[0033] Specifically, the first outputting module comprises a first thin film transistor M21 whose gate is connected to the pulling-up control terminal IN of the outputting unit, source is connected to the first power supply input terminal Vgh, and drain is connected to the output terminal OUT of the outputting unit.

[0034] Specifically, the second outputting module comprises a second thin film transistor M22 whose gate is connected to the reset signal terminal RET of the outputting unit, source is connected to the output terminal OUT of the outputting unit, and drain is connected to the second power supply input terminal VSS.

[0035] Specifically, the third outputting module comprises a third thin film transistor M23 whose gate is connected to the pulling-down control terminal PD-CN of the outputting unit, source is connected to the output terminal OUT of the outputting unit, and drain is connected to the second power supply input terminal VSS.

[0036] In the gate driving apparatus according to the embodiments of the present disclosure, all of the thin film transistors in the above shift register unit are N-type thin film transistors, the first thin film transistor, the second thin film transistor and the third thin film transistor in the outputting unit are all the N-type thin film transistors. All of the N-type thin film transistors are turned on at a high level and are turned off at a low level.

[0037] A detailed operation principle of the outputting unit 4 is as follows.

[0038] When the shift register n outputs a high level, it shifts to a shift register $n+1$, at the same time the TFT M21 is turned on so that the output terminal OUT of the outputting unit outputs the high level Vgh to the gate line; when the shift register unit n outputs a low level, the TFT M21 is turned off, so that the output terminal OUT of the outputting unit is disconnected from Vgh.

[0039] When the shift register $n+1$ outputs the high level, the RET signal is at the high level, the TFT M22 is turned on, so that the VSS signal pulls down the level at the output terminal OUT of the outputting unit n , and the gate signal line n is at the low level correspondingly; when the shift register $n+1$ is reset to the low level, the low level at the output terminal OUT of the outputting unit n cannot be maintained continually.

[0040] At this time, the pulling-down control signal PD-CN of the shift register is high, so that the TFT M23 is turned on and the output terminal OUT of the outputting unit 4 is retained to be the low level signal VSS. Thus, with timing signals output from the outputting unit, the signal on the gate line can be at the high level when the shift register outputs the high level, and the signal on the gate line can be maintained at the low level outside the periods of time during which the shift register outputs the high level, so that the signal on the gate line can be ensured to be consistent with the output signal from the shift register.

[0041] The embodiments of the present disclosure will be described more clearly by referring to a timing chart illustrated in Fig. 5. Fig. 5 illustrates the timing chart for the signals at respective signal terminals, the PU node and the PD-CN node in the first stage of shift register unit, and the signals at the respective signal terminals in the first stage of outputting unit, with respect to a process during which the first stage of shift register unit finishes a shift once. It can be seen from the figure that an output signal 'gate1-out' of the first stage of gate driving unit may be maintained to be consistent with the output signal OUTPUT of the shift register completely.

[0042] In the gate driving apparatus of the prior art, when the gate line is short-circuited with other wirings at a certain position in a liquid crystal display region, the output signal from the related shift register is abnormal accordingly, such that the output signals from other stages of shift registers are affected to be abnormal, which in turn lead to an abnormality in the signals of corresponding gate lines. As a result, the thin film transistors for driving the display, which are connected to these gate lines, cannot operate normally, thereby causing an abnormal display in the full screen finally.

[0043] However, in the gate driving apparatus according to the embodiments of the present disclosure, when a gate line is short-circuited with other wirings at a certain position in a liquid crystal display region, only the low level signal VSS and the high level signal Vgh may be affected, but driving abilities of the low level signal VSS and the high level signal Vgh are both strong and not easy to be pulled generally. Meanwhile, in the embodi-

ments of the present disclosure, since the signals from the output terminal of the shift register is not connected to the gate line directly, the gate line short-circuited may not affect the output of the corresponding shift register, which in turn provide normally a normal reset signal to the (n-1)th stage of shift register unit and provide a normal input signal to the (n+1)th stage of shift register unit. Therefore, driving timings and operation states of the gate driving unit may not be disordered and the liquid crystal display device may display normally the remaining regions except for the region(s) affected by the short-circuit. Thus, the abnormality in the full screen display caused by the short-circuit within the panel may be found easily and there are many methods for repairing the short-circuit within the panel of the liquid crystal display device so that a defective product can become a good product by repairing, which improves the product yield.

[0044] The above embodiments are described only with respect to the shift register unit in a manner of gate driving using a pair of clock signals (CLK and CLKB), but they are not limited to the shift register unit in such a driving manner. For example, for a shift register unit having many gate lines and using a driving manner with a plurality groups of clock signals, the gate driving apparatus according to the embodiments of the present disclosure is also applicable, wherein the connection mode of the respective signal terminals of the outputting unit is the same as that of the embodiments of the present disclosure, and the details are omitted herein.

[0045] The embodiments of the present disclosure provide a display device comprising the above gate driving apparatus.

[0046] In conclusion, the embodiments of the present disclosure is able to settle the abnormal display in the full screen caused by an abnormality in signals output from the shift register, when a short-circuit occurs in wirings associated with gate lines within a liquid crystal panel, by arranging the outputting unit at the output terminal of the shift register unit, making an output signal from the shift register unit of the gate driving apparatus as a pulling-up control signal of the outputting unit, and providing an output signal to the gate line by the outputting unit, while it is able to enhance the efficiency of analysis for defective phenomena such as the abnormal display etc., and increase the product yield.

[0047] Obviously, those skilled in the art may make various amendments and variations to the embodiments of the present invention without departing from the scope of the present invention as defined in the appended claims. Thus, the present disclosure intends to cover such amendments and variations if they fall into the scope of the invention defined in the appended claims.

Claims

1. A gate driving apparatus comprising a plurality of gate driving units (2) connected in cascade, wherein

each stage of the gate driving units (2) comprises a shift register unit (3) comprising a pulling-up driving module (11), a pulling-up module (12), a pulling-down controlling module (13), a pulling-down module (14), and a resetting module (15), wherein an input terminal of the pulling-down controlling module (13) is connected to a pulling-up node (PU), and an output terminal of the pulling-down controlling module (13) is connected to a pulling-down control node (PD-CN) in the pulling-down module (14),

characterized in that each stage of the gate driving units (2) further comprises an outputting unit (4) for outputting a first power voltage (V_{gh}) or a second power voltage (V_{ss}) to a respective gate line (gate1, gate2, ...), the outputting unit (4) comprising:

a first outputting module (41) with a pulling-up control terminal (IN) connected to an output terminal (OUTPUT) of the shift register unit (3), for providing the first power voltage (V_{gh}) to an output terminal (OUT) of the outputting unit (4), in response to an output signal of the shift register unit (3);

a second outputting module (42) with a terminal connected to a reset signal terminal (RET) of the shift register unit (3), for providing the second power voltage (V_{ss}) to the output terminal (OUT) of the outputting unit (4), in response to a reset signal;

a third outputting module (43) with a pulling-down control terminal (PD-CN signal) connected to the pulling-down control node (PD-CN) of the shift register unit (3), for providing the second power voltage (V_{ss}) to the output terminal (OUT) of the outputting unit (4), in response to a voltage signal at the pulling-down control node (PD-CN),

wherein a first power supply input terminal of the outputting unit (4) is connected to the first power voltage (V_{gh}), a second power supply input terminal of the outputting unit (4) is connected to the second power voltage (V_{ss}), and the output terminal (OUT) of the outputting unit (4) is connected to the respective gate line (gate1, gate2, ...) as an output terminal (OUT) of the gate driving unit, so that the output terminal (OUTPUT) of the shift register unit (3) is not directly connected to the respective gate line (gate1, gate2, ...) to avoid a gate line shorted-circuit from affecting an output of the corresponding shift register unit (3);

wherein the first outputting module (41) comprises a first thin film transistor (M21) whose gate is connected to the pulling-up control terminal (IN) of the outputting unit (4), whose source is connected to the first power supply input terminal (V_{gh}), and whose drain is connected to the output terminal (OUT) of the outputting unit (4);

wherein the second outputting module (42) comprises a second thin film transistor (M22) whose gate is connected to the reset signal terminal (RET) of the outputting unit (4), whose source is connected to the output terminal (OUT) of the outputting unit (4), and whose drain is connected to the second power supply input terminal (VSS);

wherein the third outputting module (43) comprises a third thin film transistor (M23) whose gate is connected to the pulling-down control terminal (PD-CN signal) of the outputting unit (4), whose source is connected to the output terminal (OUT) of the outputting unit (4), and whose drain is connected to the second power supply input terminal (VSS),

the pulling-up module (12) comprises a fourth thin film transistor (M3) and a capacitor (C1), a gate of the fourth thin film transistor (M3) is connected to the pulling-up node (PU) and a first end of the capacitor (C1), a source of the fourth thin film transistor (M3) is connected to a clock signal input terminal (CLK), and a drain of the fourth thin film transistor (M3) is connected to the output terminal (OUTPUT) of the shift register and a second end of the capacitor (C1);

the pulling-down controlling module (13) comprises a fifth thin film transistor (M6), a gate of the fifth thin film transistor (M6) is connected to the pulling-up node (PU), a source of the fifth thin film transistor (M6) is connected to the pulling-down control node (PD-CN), and a drain of the fifth thin film transistor (M6) is connected to the second power voltage input terminal (VSS); and

the resetting module (15) comprises a sixth thin film transistor (M7) and a seventh thin film transistor (M9), a gate of the sixth thin film transistor (M7) is connected to the reset signal terminal (RET), a source of the sixth thin film transistor (M7) is connected to the pulling-up node (PU), and a drain of the sixth thin film transistor (M7) is connected to the second power voltage input terminal (VSS), and a gate of the seventh thin film transistor (M9) is connected to the reset signal terminal (RET), a source of the seventh thin film transistor (M9) is connected to the output terminal (OUTPUT) of the shift register, and a drain of the seventh thin film transistor (M9) is connected to the second power voltage input terminal (VSS).

2. The gate driving apparatus of claim 1, **characterized in that** all of the thin film transistors (M21, M22, M23, M3, M6, M7, M9) are N-type thin film transistors.
3. The gate driving apparatus of claim 1, **characterized in that**

an input signal terminal (IN) of a first stage of shift register unit (S1) is connected to a frame start signal (STV), and a reset signal terminal (RET) of the first stage of shift register unit (S1) is connected to an output terminal (OUTPUT) of a second stage of shift register unit (S2);

an input signal terminal of a last stage of shift register unit is connected to an output terminal of a previous stage of shift register unit, and a reset signal terminal of the last stage of shift register unit is connected to the frame start signal (STV), or is connected to an output terminal of any stage of the shift register units except for its previous stage of shift register unit or an output terminal of an outputting unit;

except for the first stage of shift register unit (S1) and the last stage of shift register unit, the input signal terminals of the remaining respective stage of shift register units are connected to the output terminals of their previous stage of shift register unit, and the reset signal terminals thereof are connected to the output terminals of next stage of shift register unit.

4. A display device, **characterized in that** the display device comprises the gate driving apparatus of any one of claims 1 to 3.

Patentansprüche

1. Gate-Ansteuereinrichtung mit einer Vielzahl von Gate-Ansteuer-Einheiten (2), die in Kaskade verschaltet sind, wobei jede Stufe der Gate-Ansteuer-Einheiten (2) aufweist eine Shift-Register-Einheit (3) mit einem Pull-up-Ansteuer-Modul (11), ein Pull-up-Modul (12), ein Pull-down-Steuer-Modul (13), ein Pull-down-Modul (14) und ein Rücksetz-Modul (15), wobei ein Eingangsanschluss des Pull-down-Steuermoduls (13) mit einem Pull-up-Knoten (PU) verbunden ist, und ein Ausgangsanschluss des Pull-down-Steuermoduls (13) mit einem Pull-down-Steuerknoten (PD-CN) in dem Pull-down-Modul (14) verbunden ist,

dadurch gekennzeichnet, dass jede Stufe der Gate-Ansteuer-Einheit (2) weiter aufweist eine Ausgabe-Einheit (4) zum Ausgeben einer ersten Leistungsspannung (Vgh) oder einer zweiten Leistungsspannung (VSS) an jeweilige Gate-Leitungen (Gate 1, Gate 2,...), wobei die Ausgabe-Einheit (4) aufweist:

ein erstes Ausgabe-Modul (41) mit einem Pull-up-Steueranschluss (IN), der mit einem Ausgangsanschluss (OUTPUT) der Shift-Register-Einheit (3) verbunden ist zum Bereitstellen der ersten Leistungsspannung (Vgh) an einen Ausgangsanschluss (OUT) der Ausgabe-Einheit (4) in Reaktion auf ein Ausgabesignal der Shift-Register-Einheit (3);

ein zweites Ausgabe-Modul (42) mit einem Anschluss, der mit einem Rücksetz-Signalanschluss (RET) der Shift-Register-Einheit (3) verbunden ist zum Bereitstellen der zweiten Leistungsspannung (VSS) an dem Ausgabeanschluss (OUT) der Ausgabe-Einheit (4) in Reaktion auf ein Rücksetz-Signal;

ein drittes Ausgabe-Modul (43) mit einem Pull-down-Steuer-Anschluss (PD-CN-Signal), welcher mit dem Pull-down-Steuerknoten (PD-CN) der Shift-Register-Einheit (3) verbunden ist zum Bereitstellen der zweiten Leistungsspannung (VSS) an dem Ausgangsschluss (OUT) der Ausgabe-Einheit (4) in Reaktion auf ein Spannungssignal an dem Pull-down-Steuerknoten (PD-CN),

wobei ein erster Leistungsversorgung-Eingangsanschluss der Ausgabe-Einheit (4) mit der ersten Leistungsspannung (Vgh) verbunden ist, ein zweiter Leistungsversorgung-Eingangsanschluss der Ausgabe-Einheit (4) mit der zweiten Leistungsspannung (VSS) verbunden ist, und der Ausgangsanschluss (OUT) der Ausgabe-Einheit (4) mit den jeweiligen Gate-Leitungen (Gate1, Gate2,...) als einem Ausgangsanschluss (OUT) der Gate-Ansteuer-Einheit verbunden ist, sodass der Ausgangsanschluss (OUTPUT) der Shift-Register-Einheit (3) nicht direkt mit der jeweiligen Gate-Leitung (Gate1, Gate 2,...) verbunden ist, um zu vermeiden, dass ein Gate-Leitungskurzschluss eine Ausgabe der jeweiligen Shift-Register-Einheit (3) beeinflusst;

wobei das erste Ausgabe-Modul (41) aufweist einen ersten Dünnschichttransistor (M21), dessen Gate-Anschluss mit dem Pull-up-Steueranschluss (IN) der Ausgabe-Einheit (4) verbunden ist, dessen Source-Anschluss mit dem ersten Leistungsversorgung-Eingangsanschluss (Vgh) verbunden ist und dessen Drain-Anschluss mit dem Ausgangsanschluss (OUT) der Ausgabe-Einheit (4) verbunden ist;

wobei das zweite Ausgabe-Modul (42) aufweist einen zweiten Dünnschichttransistor (M22), dessen Gate-Anschluss mit dem Rücksetzsignal-Anschluss (RET) der Ausgabe-Einheit (4) verbunden ist, dessen Source-Anschluss mit dem Ausgangsanschluss (OUT) der Ausgabe-Einheit (4) verbunden ist und dessen Drain-Anschluss mit dem zweiten Leistungsversorgung-Eingangsanschluss (VSS) verbunden ist;

wobei das dritte Ausgabe-Modul (43) aufweist einen dritten Dünnschichttransistor (M23), dessen Gate-Anschluss mit dem Pull-down-Steueranschluss (PD-CN-Signal) der Ausgabe-Einheit (4) verbunden ist, dessen Source-Anschluss mit dem Ausgangsanschluss (OUT) der Ausgabe-Einheit (4) verbunden ist und dessen Drain-Anschluss mit dem zweiten Leistungsspannung-

Eingangsanschluss (VSS) verbunden ist, das Pull-up-Modul (12) aufweist einen vierten Dünnschichttransistor (M3) und einen Kondensator (C1), wobei ein Gate-Anschluss des vierten Dünnschichttransistors (M3) mit dem Pull-up-Knoten (PU) verbunden ist und ein erstes Ende des Kondensators (C1), ein Source-Anschluss des vierten Dünnschichttransistors (M3) mit einem Taktsignal-Eingangsanschluss (CLK) verbunden ist und ein Drain-Anschluss des vierten Dünnschichttransistors (M3) mit dem Ausgangsanschluss (OUTPUT) des Shift-Registers und einem zweiten Ende des Kondensators (C1) verbunden ist;

das Pull-down-Steuer-Modul (13) aufweist einen fünften Dünnschichttransistor (M6), wobei ein Gate-Anschluss des fünften Dünnschichttransistors (M6) mit dem Pull-up-Knoten (PU) verbunden ist, ein Source-Anschluss des fünften Dünnschichttransistors (M6) mit dem Pull-down-Steuerknoten (PD-CN) verbunden ist und ein Drain-Anschluss des fünften Dünnschichttransistors (M6) mit dem zweiten Leistungsspannung-Eingangsanschluss (VSS) verbunden ist; und

das Rücksetz-Modul (15) aufweist einen sechsten Dünnschichttransistor (M7) und einen siebten Dünnschichttransistor (M9), wobei ein Gate-Anschluss des sechsten Dünnschichttransistors (M7) mit dem Rücksetzsignal-Anschluss (RET) verbunden ist, ein Source-Anschluss des sechsten Dünnschichttransistors (M7) mit dem Pull-up-Knoten (PU) verbunden ist und ein Drain-Anschluss des sechsten Dünnschichttransistors (M7) mit dem zweiten Leistungsspannung-Eingangsanschluss (VSS) verbunden ist, und wobei ein Gate-Anschluss des siebten Dünnschichttransistors (M9) mit dem Rücksetzsignal-Anschluss (RET) verbunden ist, ein Source-Anschluss des siebten Dünnschichttransistors (M9) mit dem Ausgangsanschluss (OUTPUT) des Shift-Registers verbunden ist und ein Drain-Anschluss des siebten Dünnschichttransistors (M9) mit dem zweiten Leistungsspannung-Eingangsanschluss (VSS) verbunden ist.

2. Gate-Ansteuereinrichtung gemäß Anspruch 1, **dadurch gekennzeichnet, dass** alle Dünnschichttransistoren (M21, M22, M23, M3, M6, M7, M9) N-Typ-Dünnschichttransistoren sind.
3. Gate-Ansteuereinrichtung gemäß Anspruch 1, **dadurch gekennzeichnet, dass** ein Eingangssignal-Anschluss (EN) einer ersten Stufe einer Shift-Register-Einheit (S1) mit einem Frame-Start-Signal (STV) verbunden ist, und ein Rücksetzsignal-Anschluss (RET) der ersten Stufe der Shift-Register-Einheit

(S1) mit einem Ausgangsanschluss (OUTPUT) einer zweiten Stufe einer Shift-Register-Einheit (S2) verbunden ist;

ein Eingangssignal-Anschluss einer letzten Stufe einer Shift-Register-Einheit mit einem Ausgangsanschluss einer vorhergehenden Stufe einer Shift-Register-Einheit verbunden ist und ein Rücksetzsignal-Anschluss der letzten Stufe der Shift-Register-Einheit mit dem Frame-Start-Signal (STV) verbunden ist oder mit einem Ausgangsanschluss einer beliebigen Stufe der Shift-Register-Einheiten mit Ausnahme der vorhergehenden Stufe der Shift-Register-Einheit oder einem Ausgangsanschluss einer Ausgabe-Einheit verbunden ist;

mit Ausnahme von der ersten Stufe der Shift-Register-Einheit (S1) und der letzten Stufe der Shift-Register-Einheit der Eingangssignal-Anschlüsse der verbleibenden jeweiligen Stufe der Shift-Register-Einheiten mit den Ausgabeanschlüssen ihrer vorhergehenden Stufe der Shift-Register-Einheit verbunden sind und die Rücksetzsignal-Anschlüsse davon mit den Ausgabeanschlüssen der nächsten Stufe der Shift-Register-Einheit verbunden sind.

4. Anzeigeeinrichtung, **dadurch gekennzeichnet, dass** die Anzeigeeinrichtung die Gate-Ansteuereinrichtung gemäß einem der Ansprüche 1 bis 3 aufweist.

Revendications

1. Appareil de commande de grille, comprenant une pluralité d'unités de commande de grille (2) connectées en cascade, dans lequel chaque étage des unités de commande de grille (2) comprend une unité de registre à décalage (3) comprenant un module de commande de rappel vers le niveau haut (11), un module de rappel vers le niveau haut (12), un module de contrôle de rappel vers le niveau bas (13), un module de rappel vers le niveau bas (14), et un module de réinitialisation (15), dans lequel une borne d'entrée du module de contrôle de rappel vers le niveau bas (13) est connecté à un noeud de rappel vers le niveau haut (PU), et une borne de sortie du module de contrôle de rappel vers le niveau bas (13) est connecté à un noeud de contrôle de rappel vers le niveau bas (PD-CN) dans le module de rappel vers le niveau bas (14),
- caractérisé en ce que** chaque étage des unités de commande de grille (2) comprend en outre une unité de sortie (4) pour produire une première tension de puissance (Vgh) ou une seconde tension de puissance (VSS) vers une ligne de grille respective (gate1, gate2, ...), l'unité de sortie (4) comprenant :

un premier module de sortie (41) doté d'une borne de contrôle de rappel vers le niveau haut (IN)

connectée à une borne de sortie (OUTPUT) de l'unité de registre à décalage (3), pour fournir la première tension de puissance (Vgh) à une borne de sortie (OUT) de l'unité de sortie (4), en réaction à un signal de sortie de l'unité de registre à décalage (3) ;

un deuxième module de sortie (42) doté d'une borne connectée à une borne de signal de réinitialisation (RET) de l'unité de registre à décalage (3), pour fournir la seconde tension de puissance (VSS) à la borne de sortie (OUT) de l'unité de sortie (4), en réaction à un signal de réinitialisation ;

un troisième module de sortie (43) doté d'une borne de contrôle de rappel vers le niveau bas (signal PD-CN) connectée au noeud de contrôle de rappel vers le niveau bas (PD-CN) de l'unité de registre à décalage (3), pour fournir la seconde tension de puissance (VSS) à la borne de sortie (OUT) de l'unité de sortie (4), en réaction à un signal de tension sur le noeud de contrôle de rappel vers le niveau bas (PD-CN) ;

dans lequel une première borne d'entrée d'alimentation électrique de l'unité de sortie (4) est connectée à la première tension de puissance (Vgh) ; une seconde borne d'entrée d'alimentation électrique de l'unité de sortie (4) est connectée à la seconde tension de puissance (VSS), et la borne de sortie (OUT) de l'unité de sortie (4) est connectée à la ligne de grille respective (gate1, gate2, ...) comme borne de sortie (OUT) de l'unité de commande de grille, de telle sorte que la borne de sortie (OUTPUT) de l'unité de registre à décalage (3) n'est pas directement connectée à la ligne de grille respective (gate1, gate2, ...) pour éviter qu'une ligne de grille court-circuitée n'affecte une sortie de l'unité de registre à décalage (3) ;

dans lequel le premier module de sortie (41) comprend un premier transistor à couches minces (M21) dont la grille est connectée à la borne de contrôle de rappel vers le niveau haut (IN) de l'unité de sortie (4), dont la source est connectée à la première borne d'entrée d'alimentation électrique (Vgh), et dont le drain est connecté à la borne de sortie (OUT) de l'unité de sortie (4) ;

dans lequel le deuxième module de sortie (42) comprend un deuxième transistor à couches minces (M22) dont la grille est connectée à la borne de signal de réinitialisation (RET) de l'unité de sortie (4), dont la source est connectée à la borne de sortie (OUT) de l'unité de sortie (4), et dont le drain est connecté à la seconde borne d'entrée d'alimentation électrique (VSS) ;

dans lequel le troisième module de sortie (43) comprend un troisième transistor à couches minces (M23) dont la grille est connectée à la

borne de contrôle de rappel vers le niveau bas (signal PD-CN) de l'unité de sortie (4), dont la source est connectée à la borne de sortie (OUT) de l'unité de sortie (4), et dont le drain est connecté à la seconde borne d'entrée d'alimentation électrique (VSS) ;

le module de rappel vers le niveau haut (12) comprend un quatrième transistor à couches minces (M3) et un condensateur (C1), une grille du quatrième transistor à couches minces (M3) est connectée au noeud de rappel vers le niveau haut (PU) et une première extrémité du condensateur (C1), une source du quatrième transistor à couches minces (M3) est connectée à une borne d'entrée de signal d'horloge (CLK), et un drain du quatrième transistor à couches minces (M3) est connecté à la borne de sortie (OUTPUT) du registre à décalage et à une seconde extrémité du condensateur (C1) ;

le module de contrôle de rappel vers le niveau bas (13) comprend un cinquième transistor à couches minces (M6), une grille du cinquième transistor à couches minces (M6) est connectée au noeud de rappel vers le niveau haut (PU), une source du cinquième transistor à couches minces (M6) est connectée au noeud de contrôle de rappel vers le niveau bas (signal PD-CN), et un drain du cinquième transistor à couches minces (M6) est connecté à la seconde borne d'entrée d'alimentation électrique (VSS), et le module de réinitialisation (15) comprend un sixième transistor à couches minces (M7) et un septième transistor à couches minces (M9), une grille du sixième transistor à couches minces (M7) est connectée à la borne de signal de réinitialisation (RET), une source du sixième transistor à couches minces (M7) est connectée au noeud de rappel vers le niveau haut (PU), et un drain du sixième transistor à couches minces (M7) est connecté à la seconde borne d'entrée d'alimentation électrique (VSS), et une grille du septième transistor à couches minces (M9) est connectée à la borne de signal de réinitialisation (RET), une source du septième transistor à couches minces (M9) est connectée à la borne de sortie (OUTPUT) du registre à décalage, et un drain du septième transistor à couches minces (M9) est connecté à la seconde borne d'entrée d'alimentation électrique (VSS).

2. Appareil de commande de grille selon la revendication 1, **caractérisé en ce que** la totalité des transistors à couches minces (M21, M22, M23, M3, M6, M7, M9) sont des transistors à couches minces de type N.
3. Appareil de commande de grille selon la revendication 1, **caractérisé en ce que**

une borne de signal d'entrée (IN) d'un premier étage de l'unité de registre à décalage (S1) est connectée à un signal de début de trame (STV), et une borne de signal de réinitialisation (RET) du premier étage de l'unité de registre à décalage (S1) est connectée à une borne de sortie (OUTPUT) d'un second étage de l'unité de registre à décalage (S2) ;

une borne de signal d'entrée d'un dernier étage de l'unité de registre à décalage est connectée à une borne de sortie d'un étage précédent de l'unité de registre à décalage, et une borne de signal de réinitialisation du dernier étage de l'unité de registre à décalage est connectée au signal de début de trame (STV), ou est connectée à une borne de sortie d'un étage quelconque de l'unité de registre à décalage, excepté pour son étage précédent d'unité de registre à décalage ou une borne de sortie d'une unité de sortie ;

excepté pour le premier étage d'unité de registre à décalage (S1) et le dernier étage d'unité de registre à décalage, les bornes de signal d'entrée de l'étage respectif restant des unités de registre à décalage sont connectées aux bornes de sortie de leur étage précédent d'unité de registre à décalage, et les bornes de signal de réinitialisation de celles-ci sont connectées aux bornes de sortie de l'étage suivant de l'unité de registre à décalage.

4. Dispositif d'affichage, **caractérisé en ce que** le dispositif d'affichage comprend l'appareil de commande de grille selon l'une quelconque des revendications 1 à 3.

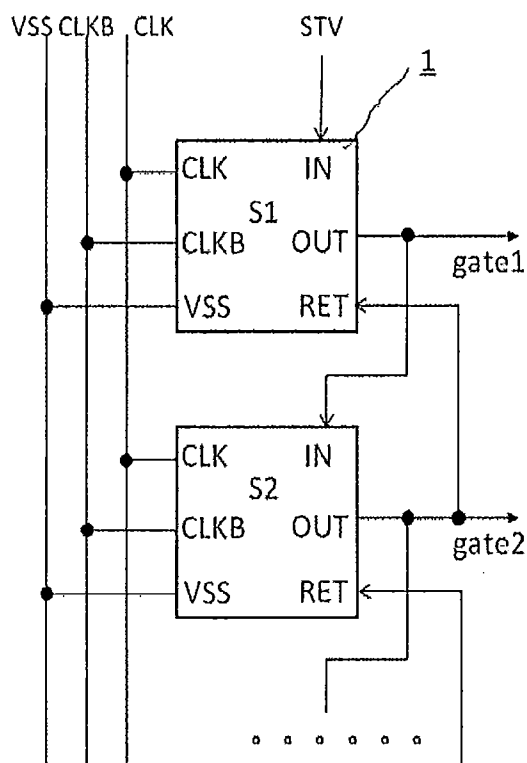


Fig.1

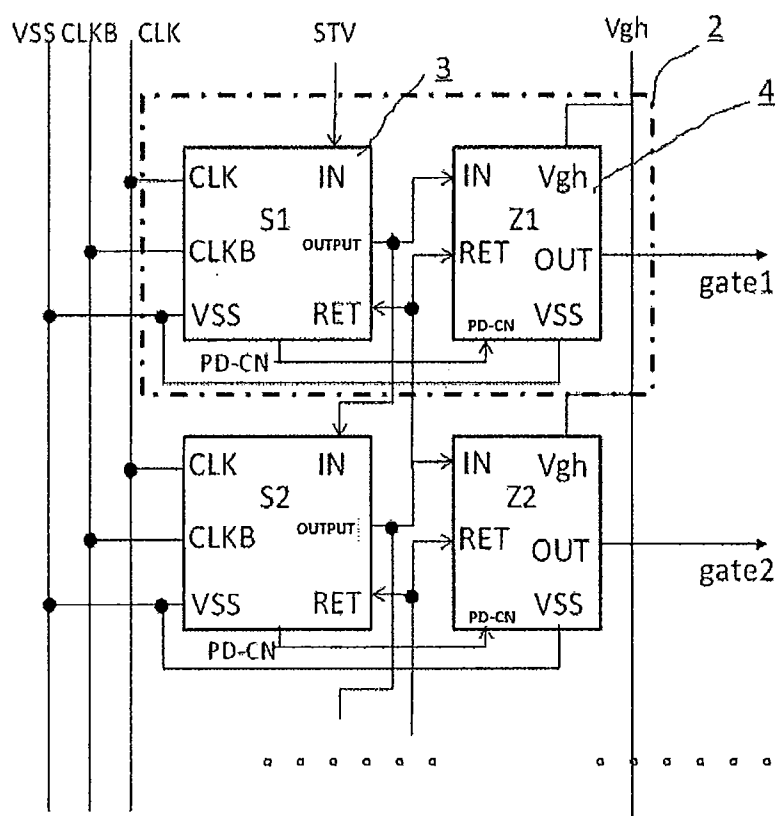


Fig.2

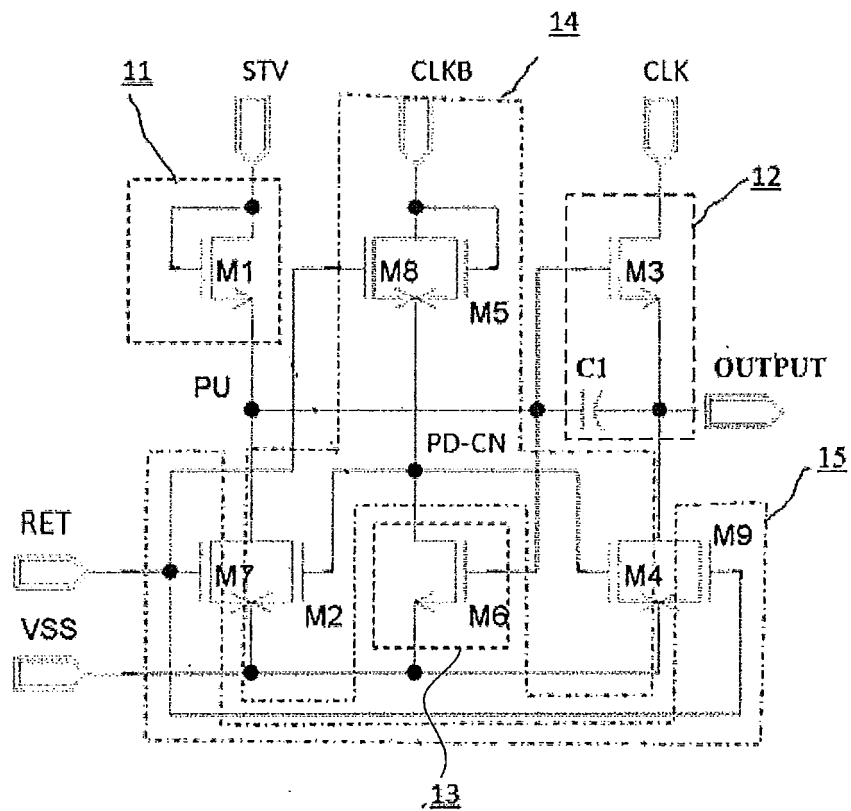


Fig.3

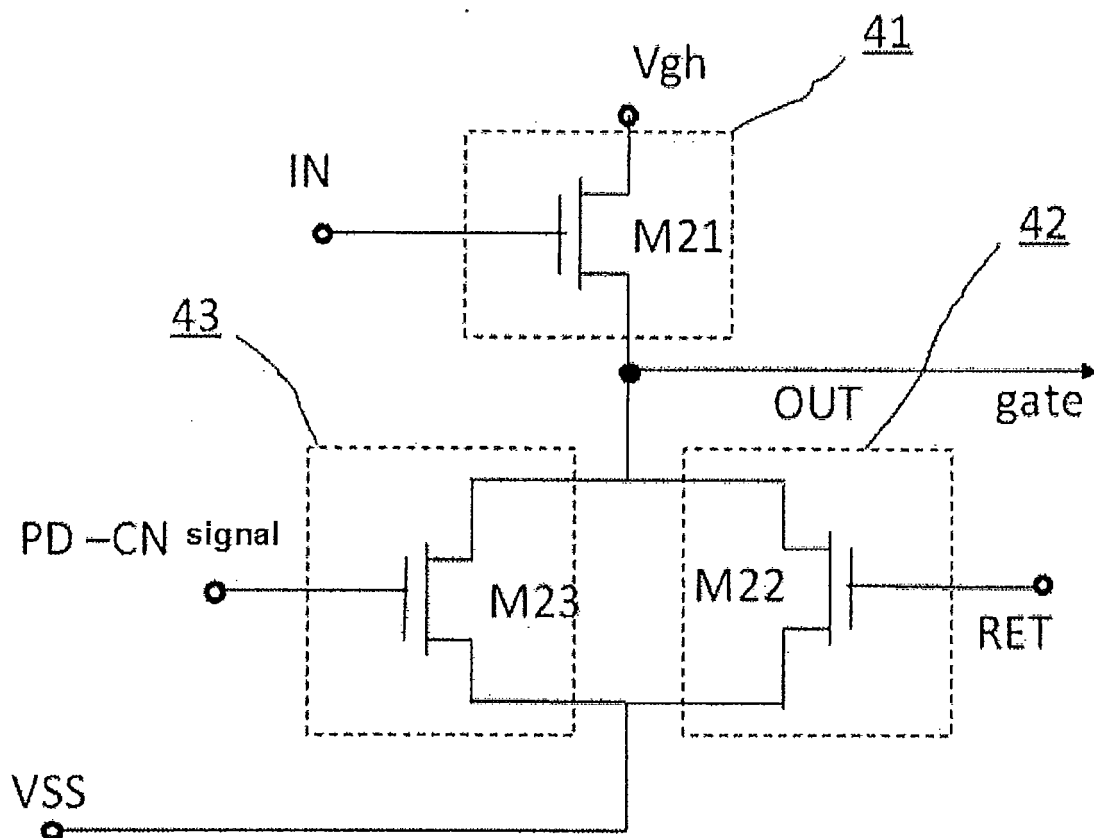


Fig.4

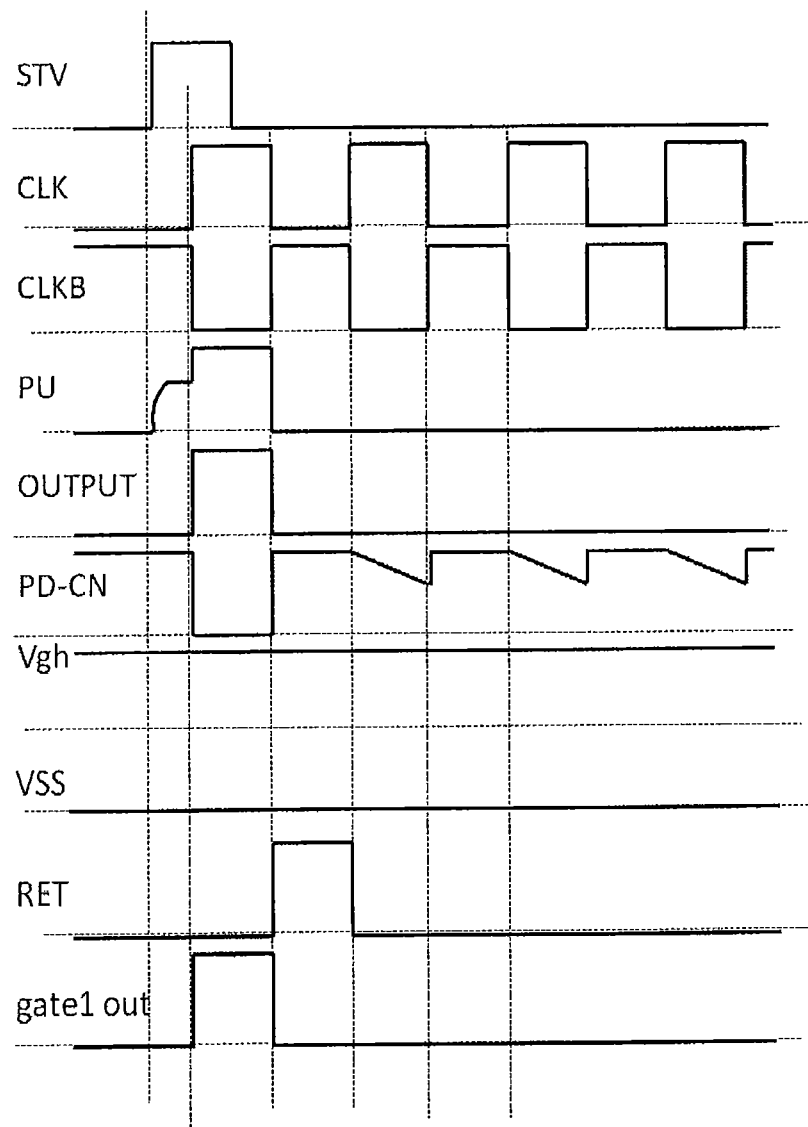


Fig.5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 102708925 A [0004]

专利名称(译)	门驱动装置和显示装置		
公开(公告)号	EP2738758B1	公开(公告)日	2018-04-11
申请号	EP2013194861	申请日	2013-11-28
[标]申请(专利权)人(译)	京东方科技集团股份有限公司 合肥京东方光电科技有限公司		
申请(专利权)人(译)	京东方科技集团有限公司. 合肥京东方光电科技有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司. 合肥京东方光电科技有限公司.		
[标]发明人	LIU JINLIANG		
发明人	LIU, JINLIANG		
IPC分类号	G09G3/36 G11C19/28		
CPC分类号	G09G3/3674 G09G2300/0408 G09G2310/0286 G09G2310/0291 G11C19/28 G09G3/3677		
优先权	201210500711.6 2012-11-29 CN		
其他公开文献	EP2738758A1		
外部链接	Espacenet		

摘要(译)

提供一种栅极驱动装置和显示装置，用于解决当在与液晶面板内的栅极线相关联的布线中发生短路时由移位寄存器输出的信号中的异常引起的全屏幕异常显示。该装置包括级联连接的多个栅极驱动单元。每一级栅极驱动单元包括移位寄存器单元和中继单元，中继单元的上拉控制端连接移位寄存器单元的输出端，复位信号端连接移位寄存器单元的复位信号端，下拉控制端连接移位寄存器单元的下拉控制节点，第一电源输入端连接第一电源电压，第二电源输入端连接第二电源电压，输出端为连接到栅极线作为栅极驱动单元的输出端。

