

(19)



(11)

EP 3 252 524 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

17.07.2019 Bulletin 2019/29

(51) Int Cl.:

G02F 1/1333 ^(2006.01)

G02F 1/1347 ^(2006.01)

G06F 3/044 ^(2006.01)

G02F 1/1362 ^(2006.01)

G02F 1/1335 ^(2006.01)

G06F 3/041 ^(2006.01)

G02F 1/1343 ^(2006.01)

(21) Application number: **17173454.4**

(22) Date of filing: **30.05.2017**

(54) **MIRROR DISPLAY**

SPIEGELANZEIGE

AFFICHAGE À MIROIR

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **30.05.2016 KR 20160066431**

(43) Date of publication of application:

06.12.2017 Bulletin 2017/49

(73) Proprietor: **LG Display Co., Ltd.**

Seoul 150-721 (KR)

(72) Inventors:

- **NAM, Sangjin**
330-735 Cheonan-si, Chungcheongnam-do (KR)

• **KIM, Kyujin**

10532 Goyang-si, Gyeonggi-do (KR)

• **YOO, Seungjin**

10361 Goyang-si, Gyeonggi-do (KR)

(74) Representative: **Viering, Jentschura & Partner
mbB**

Patent- und Rechtsanwälte

Am Brauhaus 8

01099 Dresden (DE)

(56) References cited:

EP-A1- 0 933 663

EP-A2- 2 837 967

US-B1- 9 024 913

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 252 524 B1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present disclosure relates to a mirror display which is driven in a display mode and a mirror mode and is capable of sensing a touch input.

Discussion of the Related Art

[0002] Recently, display devices for various purposes have been developed. A mirror display has a mirror coupled to a display. Mirror displays are expanding applications such as room mirrors in automobiles and mirrors in clothing stores.

[0003] An example of a mirror display is implemented by a method of assembling a reflector 8 and a display 4, 6 in a set frame 2 as shown in FIG. 1. The display may be implemented by a liquid crystal display (LCD) including a display panel 4 and a backlight unit (BLU) 6. The reflector 8 is a mirror region for reflecting light. This mirror display cannot change a mirror region MR and a display region DR because the mirror region MR and the display region DR are physically separated.

[0004] In the conventional mirror display, an in-cell touch sensor cannot be applied to the mirror region and the display region. In order to implement a touch screen on such a mirror display, a separate touch panel must be bonded to the mirror display.

[0005] In-cell touch sensor technology senses a touch input using a touch sensor embedded in a pixel array of a display. The in-cell touch sensor technology can implement a touch screen without increasing a thickness of the display. However, since pixels and touch sensors must be time-divisionally driven, the driving method is limited. In a display with an in-cell touch sensor, in order to prevent mutual influence due to coupling between the pixel and the touch sensor, one frame period is divided into a display period in which the pixels are driven and a touch sensing period in which the touch sensors are driven. Therefore, the in-cell touch driving method is difficult to increase a touch sensing sensitivity because the display period is short and the touch sensing period is short.

[0006] EP 0 933 663 A1 discloses a passive liquid crystal panel wherein portions can be switched between mirror and transmissive modes for use in combination with another display device. The cover glass provides a pressure-sensitive pen input function.

SUMMARY OF THE INVENTION

[0007] The invention provides a mirror display capable of varying a mirror region and a display region, reducing optical interference between the mirror region and the display region, and sensing a touch input using an in-cell touch sensor.

[0008] Various embodiments provide a mirror display panel (herein also referred to as mirror panel) according to claim 1. Further embodiments are described in the dependent claims.

5 [0009] In one aspect, there is provided a mirror display including a mirror panel including a plurality of first electrodes disposed on a first substrate, a plurality of sensor lines disposed on the first substrate and connected to the plurality of first electrodes, a plurality of second electrodes disposed on a second substrate and facing the first electrodes disposed on the first substrate with a liquid crystal layer interposed therebetween, a plurality of mirror driving lines disposed on the second substrate and connected to the plurality of second electrodes, a polarizing film adhered to the first substrate, and a reflective polarizing film adhered to the second substrate, a mirror panel driver configured to apply a sensor driving signal to the first electrodes through the sensor lines to sense a change of capacitance on the first electrodes, and apply a mirror driving signal for selecting a mirror mode and a display mode to the second electrodes, a display panel configured to display an input image, and a display panel driver configured to write data of the input image to pixels of the display panel.

20 [0010] The first electrodes and the second electrodes of the mirror panel may be divided into blocks of a predetermined size.

[0011] The mirror driving signal of the mirror mode may be applied (by the mirror panel driver) to the second electrodes that belong to a first block driven in the mirror mode. The mirror driving signal of the display mode may be applied (by the mirror panel driver) to the second electrodes that belong to a second block driven in the display mode.

35 [0012] Incident external light may be reflected by the reflective polarizing film at a location corresponding to the first block, and light from the display panel may pass through the reflective polarizing film at a location corresponding to the second block.

40 [0013] The mirror panel may be a liquid crystal panel configured to be driven in a normally white mode.

[0014] The mirror driving signal of the display mode may be in the same phase as the sensor driving signal, and the mirror driving signal of the mirror mode may be reverse phase (in other words, antiphase) with respect to the sensor driving signal.

45 [0015] An alternating current (AC) signal having the same phase as the sensor driving signal may be applied (by the mirror panel driver) to the first electrodes to which the sensor driving signal is not applied.

50 [0016] When a polarity of the mirror driving signal is inverted, the sensor driving signal may be not generated.

[0017] In another aspect, there is provided a mirror display panel including a plurality of first electrodes disposed on a first substrate, a plurality of sensor lines disposed on the first substrate and connected to the plurality of first electrodes, a plurality of second electrodes disposed on a second substrate and facing the first electrodes dis-

posed on the first substrate with a liquid crystal layer interposed therebetween, a plurality of mirror driving lines disposed on the second substrate and connected to the plurality of second electrodes, a polarizing film adhered to the first substrate, and a reflective polarizing film adhered to the second substrate.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

FIG. 1 illustrates an example of a mirror display;
 FIG. 2 is a block diagram illustrating a mirror display according to an embodiment of the invention;
 FIG. 3 is a cross-sectional view illustrating a cross-sectional structure of a display panel and a mirror panel shown in FIG. 2;
 FIG. 4 is a plan view schematically illustrating electrodes and lines of a mirror panel;
 FIG. 5 is a graph of voltage vs. transmittance illustrating a normally white mode;
 FIG. 6A is a plan view illustrating first electrodes and sensor lines of a mirror panel;
 FIG. 6B is a plan view illustrating second electrodes and mirror driving lines of a mirror panel;
 FIGS. 7 and 8 illustrate operations of a mirror display according to an embodiment of the invention;
 FIG. 9 is a cross-sectional view illustrating optical paths of transmitted light and reflected light in a mirror display according to an embodiment of the invention;
 FIG. 10 is a circuit diagram illustrating an equivalent circuit of a sensing circuit before touch input;
 FIG. 11 is a circuit diagram illustrating an equivalent circuit of a sensing circuit after touch input;
 FIGS. 12A to 12E are circuit diagrams illustrating operation of a sensing circuit step by step;
 FIG. 13 is a waveform diagram comparing voltages accumulated in a sensing circuit before and after touching;
 FIG. 14 is a waveform diagram illustrating that sensing sensitivity is improved as the number of sensing in an in-cell touch sensor increases;
 FIG. 15 is a waveform diagram illustrating signals applied to electrodes of a mirror panel.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0019] Reference will now be made in example embodiments of the invention, of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts. It will be paid attention

that detailed description of known arts will be omitted.

[0020] A display panel of a mirror display of the invention may be implemented based on a flat panel display device such as a liquid crystal display (LCD), and an organic light emitting display (OLED). In the following embodiments, the liquid crystal display will be mainly described, but the invention is not limited thereto. For example, the display panel described in the following embodiments is exemplified as a display panel of the liquid crystal display device, but may be replaced with a display panel of another flat panel display device such as the OLED display device.

[0021] An in-cell touch sensor of the invention can be implemented as a capacitive type touch sensor, for example, a mutual capacitance sensor or a self capacitance sensor, that can be embedded in a pixel array. Hereinafter, the touch sensor will be described with reference to the self capacitance sensor, but the invention is not limited thereto.

[0022] Referring to FIGS. 2 to 4, a mirror display of the invention includes a display panel PNL1, display panel drivers 12 and 14, a mirror panel PNL2, a mirror panel driver 20, and the like.

[0023] The display panel PNL 1 includes a pixel array in which an input image is reproduced. The pixel array includes $m \times n$ pixels arranged in a matrix defined by data lines D1 to Dm and gate lines G1 to Gn. The display panel PNL1 includes a lower substrate SUBS1 and an upper substrate SUBS2 which are adhered by a sealant material not shown with a liquid crystal layer LC1 interposed therebetween.

[0024] A TFT array may be disposed on the lower substrate SUBS 1 of the display panel PNL 1. The TFT array includes thin film transistors (TFTs) formed at intersections of the data lines D1 to Dm and the gate lines G1 to Gn, a pixel electrode for charging a data voltage, a common electrode for applying a common voltage Vcom, a storage capacitor Cst connected to the pixel electrode for maintaining the data voltage, and the like.

[0025] A color filter array may be disposed on the upper substrate SUBS2 of the display panel PNL1. The color filter array includes a black matrix (BM) and a color filter.

[0026] In a display panel PNL1 of a color filter on TFT (COT) structure, the black matrix and the color filters may be disposed on the TFT array. In an instance of a vertical electric field driving method such as a Twisted Nematic (TN) mode and a Vertical Alignment (VA) mode, the common electrode may be formed on the upper substrate. In an instance of a horizontal electric field driving method such as an In-Plane Switching (IPS) mode and a Fringe Field Switching (FFS) mode, the common electrode may be formed on the lower substrate SUBS1 together with the pixel electrode.

[0027] A first polarizing film POL1 is adhered to the lower substrate SUBS1 and a second polarizing film POL2 is adhered to the upper substrate SUBS2. An alignment film is formed for setting a pre-tilt angle of liquid crystal molecules on a surface in contact with the liquid

crystal molecules in each of the lower substrate SUBS1 and the upper substrate SUBS2.

[0028] The display device of the invention may be implemented in any form such as a transmissive liquid crystal display device, a transreflective liquid crystal display device, a reflective liquid crystal display device, and the like. In the transmissive liquid crystal display device and the transreflective liquid crystal display device, a backlight unit (BLU) is required. The backlight unit (BLU) may be implemented as a direct type backlight unit or an edge type backlight unit.

[0029] The display panel drivers 12 and 14 write data of the input image to the pixels of the display panel PNL1. The display panel drivers 12 and 14 include a data driver 12 and a gate driver 14.

[0030] The data driver 12 receives the data of the input image from a timing controller 16. The data driver 12 converts the data of the input image into a positive/negative gamma compensation voltage under a control of the timing controller 16, and outputs a positive/negative data voltage. The data voltages output from the data driver 12 are applied to the data lines D1 to Dm.

[0031] The gate driver 14 sequentially applies gate pulses to the gate lines G1 to Gn under a control of the timing controller 16. The gate pulses output from the gate driver 14 are synchronized with the data voltages to be charged to the pixels. The gate driver 14 may be formed directly on the lower substrate SUBS1 of the display panel PNL1 together with the pixel array.

[0032] The timing controller 16 transmits the data of the input image received from a host system 18 to the data driver 12. The timing controller 16 receives timing signals that are synchronized with the data of the input image from the host system 18. The timing signals include a vertical synchronization signal Vsync, a horizontal synchronization signal Hsync, a data enable signal DE, a clock MCLK, and the like. The timing controller 16 generates control signals DCS and GCS for controlling operation timings of the data driver 12 and the gate driver 14 using the timing signals Vsync, Hsync, DE, and MCLK received together with the data of the input image. In addition, the timing controller 16 generates a control signal SCS for controlling a operation timing of the mirror panel driver 20 using the timing signals Vsync, Hsync, DE and MCLK received from the host system 18. The timing controller 16 synchronizes the operation timings of the display panel drivers 12 and 14 and the mirror panel driver 20.

[0033] The host system 18 may be implemented as any one of the following: a television system, a set-top box, a navigation system, a DVD player, a Blue-ray player, a personal computer PC, a home theater system, and a phone system. The host system 18 may transmit the data of the input image and the timing signal synchronized with the data of the input image to the timing controller 16. The host system 18 includes a system on chip (SoC) with an embedded scaler, and may convert the digital video data of the input image into a format suitable

for display on the display panel PNL1. The host system 18 executes an application program associated with coordinate information XY of a touch input received from the mirror panel driver 20.

[0034] A third polarizing film POL3 is disposed between the display panel PNL1 and the mirror panel PNL2. The third polarizing film POL3 is a reflective polarizing film. The third polarizing film POL3 has a transmission axis and a reflection axis. When linearly polarized light parallel to the transmission axis of the third polarizing film POL3 is incident on the third polarizing film POL3, the light transmits the reflective polarizing film POL3. On the other hand, when linearly polarized light parallel to the reflection axis of the third polarizing film POL3 is incident on the third polarizing film POL3, the light is reflected. Thus, the third polarizing film POL3 enables mirror driving in the mirror display. Operations of a mirror mode and a display mode using the third polarizing film POL3 will be described in detail with reference to FIG. 9.

[0035] The mirror panel PNL2 operates in the mirror mode and the display mode by adjusting a phase delay of light passing through a liquid crystal layer LC2 depending on an electric field applied to the liquid crystal layer LC2. The mirror panel PNL2 reflects light incident from outside in the mirror mode, and operates as a mirror. On the other hand, the mirror panel PNL2 passes light incident from the display panel PNL1 as it is in the display mode, and shows an input image reproduced in the display panel PNL1 to a user. Electrodes E1 and E2 for applying an electric field to the liquid crystal layer LC2 in the mirror panel PNL2 are divided into blocks of a predetermined size. The blocks may be set to a size of one pixel or more of the display panel PNL1.

[0036] The divided electrodes E1 and E2 enable the mirror mode and the display mode to be driven on a block-by-block basis in the mirror panel PNL2, and implement a block-sized in-cell touch sensor. In the mirror panel PNL2, if the block size is small and the blocks are arranged at a high density, fingerprint sensing as well as touch input is possible.

[0037] The mirror panel PNL2 can freely vary sizes of a mirror region MR and a display region DR using the divided electrodes E1 and E2. Since the mirror region MR and the display region DR are separated on a block-by-block basis in the mirror panel PNL2, when the mirror and the display are driven simultaneously in a screen, optical interference between transmitted light and reflected light between the mirror region MR and the display region DR can be minimized. Since the mirror panel PNL2 can independently drive the mirror mode and the display mode on a block-by-block basis using the divided electrodes E1 and E2, the mirror panel PNL2 can drive an entire screen in the mirror mode or in the display mode, further, simultaneously drive the mirror mode and the display mode within a screen of the mirror panel PNL2.

[0038] The mirror panel PNL2 includes a lower substrate SUBS3 and an upper substrate SUBS4 bonded together by a sealant material with the liquid crystal layer

LC2 interposed therebetween.

[0039] Second electrodes E2 divided on a block-by-block basis of a predetermined size and mirror driving lines ML connected to the second electrodes E2 are disposed on the lower substrate SUBS3 of the mirror panel PNL2. The second electrodes E2 are connected to the mirror driving lines ML in a one-to-one relationship.

[0040] First electrodes E1 divided on a block-by-block basis of a predetermined size and sensor lines SL connected to the first electrodes E1 are disposed on the upper substrate SUBS4 of the mirror panel PNL2. The first electrodes E1 are connected to the sensor lines SL in a one-to-one relationship.

[0041] The first electrodes E1 and the second electrodes E2 face each other with the liquid crystal layer LC2 interposed therebetween in a one-to-one relationship as shown in FIG. 4. The liquid crystal layer LC2 delays a phase of light using liquid crystal molecules driven by an electric field generated by a potential difference between the first electrodes E1 and the second electrodes E2. Since the first electrodes E1 and the second electrodes E2 are divided on a block-by-block basis, the first electrodes E1 and the second electrodes E2 may divide the screen of the mirror panel PNL2 into blocks and independently adjust a voltage of the liquid crystal layer LC2 in each of the blocks. A block driven in the mirror mode includes the second electrode E2 to which a mirror driving signal of the mirror mode is applied. A block driven in the display mode includes the second electrode E2 to which a mirror driving signal of the display mode is applied. The block in which the mirror driving signal of the mirror mode is applied to the second electrode E2 reflects light incident from external light. On the other hand, the block in which the mirror driving signal of the display mode is applied to the second electrode E2 passes light from the display panel. Therefore, the mirror panel PNL2 can individually drive the liquid crystal layer LC2 in the mirror mode and the display mode on a block-by-block basis.

[0042] The third polarizing film POL3 is adhered to the lower substrate SUBS3 and a fourth polarizing film POL4 is adhered to the upper substrate SUBS4. An alignment film is formed for setting a pre-tilt angle of liquid crystal molecules on a surface in contact with the liquid crystal molecules in each of the lower substrate SUBS3 and the upper substrate SUBS4.

[0043] The mirror panel PNL2 is driven in a normally white mode. In the normally white mode, when a voltage V of the liquid crystal layer LC2 is minimum as shown in FIG. 5, the liquid crystal molecules are maintained in an initial state and delay a phase of incident light by 90°, so that transmittance T of the light passing through the polarizing film POL4 becomes maximum. On the other hand, in the normally white mode, as the voltage V of the liquid crystal layer LC2 increases, the liquid crystal molecules are driven and a phase delay value of the light passing through the liquid crystal layer LC2 becomes smaller, so that transmittance T of the light passing

through the polarizing film POL4 becomes smaller.

[0044] The third polarizing film POL3 of the mirror panel PNL2 is the reflective polarizing film as described above. An optical axis of light incident on the third polarizing film POL3 depends on whether the liquid crystal layer LC2 is driven or not. As a result, as shown in FIG. 9, a block having low transmittance T of the liquid crystal layer LC2 is driven in the mirror mode by increasing the amount of external light reflected from the third polarizing film POL3. On the other hand, a block having high transmittance T of the liquid crystal layer LC2 is driven in the display mode because the light transmitted through the third polarizing film POL3 increases.

[0045] In the mirror panel PNL2 operating in the normally white mode, a block having large voltage difference between the electrodes E1 and E2 operates in the mirror mode to reflect light. On the other hand, a block having no voltage difference between the electrodes E1 and E2 operates in the display mode to pass light from the display panel PNL1 and display an input image.

[0046] A typical example of the liquid crystal mode driven in the normally white mode is the TN mode. But the invention is not limited thereto. It should be noted that the liquid crystal driving mode of the mirror panel PNL2 is not limited to the normally white mode. The mirror panel PNL2 may be implemented in a normally black mode. A typical example of the normally black mode is the IPS mode.

[0047] The liquid crystal molecules are driven by the potential difference applied to the electrodes E1 and E2 without a TFT in the mirror panel PNL2. Accordingly, the mirror panel PNL2 is a liquid crystal panel driven by a passive matrix (PX) without a color filter array and a TFT array.

[0048] The mirror panel driver 20 is connected to the mirror driving lines ML and the sensor lines SL to drive the mirror panel PNL2 in the mirror mode and the display mode on a block-by-block basis. The mirror panel driver 20 applies a mirror driving signal to the second electrodes E2 through the mirror driving lines ML. The mirror driving signal selects the mirror driving mode or the display driving mode and inverts a polarity of a voltage applied to the liquid crystal layer LC2. When a DC voltage is applied to the liquid crystal layer LC2 for a long time, the liquid crystal layer LC2 is deteriorated and an after-image can be seen. Therefore, the polarity of the mirror driving signal applied to the liquid crystal layer LC2 is inverted every predetermined frame period, for example, one frame period.

[0049] The mirror panel driver 20 sequentially applies sensor driving signals (TDS in FIG. 15) to the first electrodes E1 through the sensor lines SL, and applies an AC signal (hereinafter, referred to as a load free driving (LFD) signal) having the same phase as the sensor driving signal TDS to the first electrodes E1 to which the sensor driving signal TDS is not applied. The LFD signal may be generated by an AC signal obtained by adding an AC signal swinging with the same voltage as a voltage

of the sensor driving signal TDS to the common voltage Vcom which is a reference voltage of the liquid crystal layer LC2.

[0050] The first electrodes E1 of the mirror panel PNL2 are driven as an in-cell touch sensor to which the sensor driving signal TDS is sequentially applied. A sensing circuit of the mirror panel driver 20 sequentially applies the sensor driving signals TDS to the sensor lines SL and senses a touch input based on a capacitance change of each of the first electrodes E1 to which the sensor driving signal TDS is applied.

[0051] The sensing circuit of the mirror panel driver 20 applies the sensor driving signal TDS to the first electrode E1 of the in-cell touch sensor to be sensed and applies the LFD signal to the other first electrodes E1 to minimize a parasitic capacitance of the in-cell touch sensor. The sensing circuit sequentially applies the sensor driving signal TDS to all the first electrodes E1 to sense the touch input. The sensing circuit is connected to the sensor line SL connected to the in-cell touch sensor to which the sensor driving signal TDS is applied, and senses a capacitance change before and after the touch input. The sensing circuit compares an amount of the capacitance change of the in-cell touch sensor with a preset threshold value, and judges a touch sensor having the amount of the capacitance change larger than the threshold value as a touch input position. The sensing circuit calculates coordinates of the touch input position to generate coordinate information (XY) and transmits it to the host system 18.

[0052] The mirror panel driver 20 includes a multiplexer for switching a current path between the sensing circuit and the sensor lines SL. The multiplexer is omitted from the drawing. The multiplexer connects the sensor line SL to which the sensor driving signal TDS is applied to the sensing circuit while blocking a current path between the sensor line SL to which the LFD signal is applied and the sensing circuit.

[0053] The mirror panel driver 20 may be divided into two integrated circuits (ICs), or integrated into one IC as shown in FIGS. 6A and 6B. IC1 shown in FIG. 6A applies the sensor driving signal TDS and the LFD signal to the first electrodes E1 and senses a capacitance change of the electrode E1 to which the sensor driving signal TDS is applied. IC2 shown in FIG. 6B applies a mirror driving signal.

[0054] The capacitance of the in-cell touch sensor is coupled with the electrodes E1 and E2 and lines SL and ML close to the in-cell touch sensor, so that the parasitic capacitance becomes large. When the parasitic capacitance of the in-cell touch sensor becomes large, noise of the in-cell touch sensor signal becomes large. When the LFD signal is applied to the electrodes E1 and E2 and the lines SL and ML except for the first electrode E1 which is operated as the in-cell touch sensor by the sensor driving signal TDS, the parasitic capacitance of the in-cell touch sensor can be reduced. This is because a voltage difference across the parasitic capacitance can

be minimized to minimize an amount of charge of the parasitic capacitance. By reducing the parasitic capacitance of the in-cell touch sensor, a signal-to-noise ratio (SNR) of the touch sensor signal can be improved to widen an operation margin of the sensing circuit in the mirror panel driver 20 and increase a sensing sensitivity.

[0055] FIG. 6A is a plan view illustrating first electrodes E1 and sensor lines SL of a mirror panel PNL2. FIG. 6B is a plan view illustrating second electrodes E2 and mirror driving lines ML of a mirror panel PNL2.

[0056] Referring to FIG. 6A, in the mirror panel PNL2, the first electrodes E1 divided on a block-by-block basis overlap the sensor lines SL with an insulating layer interposed therebetween. The first electrodes E1 are connected to the sensor lines SL through a contact hole CH1 passing through the insulating layer.

[0057] Referring to FIG. 6B, in the mirror panel PNL2, the second electrodes E2 divided on a block-by-block basis overlap the mirror driving lines ML with an insulating layer interposed therebetween. The second electrodes E2 are connected to the mirror driving lines ML through a contact hole CH2 through the insulating layer.

[0058] FIGS. 7 and 8 illustrate operations of a mirror display according to an embodiment of the invention.

[0059] Referring to FIGS. 7 and 8, light of the display panel PNL1 is passed through the third polarizing film POL3 of a block (hereinafter, referred to as "display block") having a small potential difference between the electrodes E1 and E2 for applying an electric field to the liquid crystal layer LC2 of the mirror panel PNL2. The display block has high transmittance and low reflectance. Thus, an input image is visible in the display block of the mirror panel.

[0060] In a block (hereinafter, referred to as "mirror block") having no voltage difference between the electrodes E1 and E2 of the mirror panel PNL2, light does not pass through the display panel PNL1 and external light is reflected on the third polarizing film POL3. The mirror block has high reflectance and low transmittance. Therefore, an input image is not visible in the mirror block, but an inverted image of an external image is visible as reflected light.

[0061] [Display driving] in FIG. 8 is an example in which an entire screen of the mirror display is driven by the display blocks. [Mirror driving] in FIG. 8 is an example in which an entire screen of the mirror display is driven by the mirror blocks. [Multi driving] in FIG. 8 is an example in which the mirror blocks and the display blocks are simultaneously driven on the screen of the mirror display and the input image and the external image are displayed together.

[0062] FIG. 9 is a cross-sectional view illustrating optical paths of transmitted light and reflected light in a mirror display according to an embodiment of the invention.

[0063] Referring to FIG. 9, transmission axes of the first and second polarizing films PO1 and POL2 are orthogonal to each other. The third polarizing film POL3 is a reflective polarizing film having a transmission axis and

a reflection axis orthogonal to each other. The transmission axis of the third polarizing film POL3 is parallel to the transmission axis of the second polarizing film POL2, that is, the upper polarizing film of the display panel PNL1. The transmission axis of the third polarizing film POL3 is orthogonal to the transmission axis of the fourth polarizing film POL4, that is, the upper polarizing film of the mirror panel PNL2.

[0064] An optical axis of first linearly polarized light is an optical axis of linearly polarized light parallel to the transmission axis of the third polarizing film POL3. An optical axis of second linearly polarized light is an optical axis of linearly polarized light parallel to the reflection axis of the third polarizing film POL3. The first linearly polarized light may be vertical linearly polarized light, and the second linearly polarized light may be horizontal linearly polarized light, but this is merely an example, and the invention is not limited thereto. For example, the optical axis of the linearly polarized light may be changed depending on the transmission axis of the polarizing films POL1 to POL4.

[0065] In the display mode, the optical axis of the first linearly polarized light that has passed through the display panel PNL coincides with the transmission axis of the third polarizing film POL3 so that the first linearly polarized light is incident on the liquid crystal layer LC2. A phase of the first linearly polarized light in the liquid crystal layer LC2 is delayed by 90° , so that the first linearly polarized light is converted into the second linearly polarized light. The optical axes of the first linearly polarized light and the second linearly polarized light are orthogonal to each other. In the display mode, since a potential difference between the electrodes E1 and E2 of the display block is minimum, the liquid crystal molecules of the liquid crystal layer LC2 maintain their initial alignment state (OFF) and remain in a twisted state. The second linearly polarized light having passed through the liquid crystal layer LC2 passes through the fourth polarizing film POL4. The user can see an image of the image input to the display panel PNL1 as the light passing through the display blocks of the mirror panel PNL2.

[0066] In the mirror mode, the optical axis of the first linearly polarized light that has passed through the display panel PNL1 coincides with the transmission axis of the third polarizing film POL3 so that the first linearly polarized light is incident on the liquid crystal layer LC2. The first linearly polarized light passes through the liquid crystal layer LC2 without a phase delay and is directly incident on the fourth polarizing film POL4. The first linearly polarized light from the display panel PNL1 does not pass through the fourth polarizing film POL4 because the optical axis of the first linearly polarized light and the transmission axis of the fourth polarizing film POL4 are orthogonal to each other. In mirror mode, an electric potential difference between the electrodes E1 and E2 of the mirror block becomes large, and an electric field is applied to the liquid crystal layer LC2 (ON) to drive the liquid crystal molecules.

[0067] In the mirror mode, external light passing through the transmission axis of the fourth polarizing film POL4 is the second linearly polarized light. The second linearly polarized light of the external light passes through the liquid crystal layer LC2 and is reflected by the third polarizing film POL3. Since the optical axis of the second linearly polarized light is parallel to the reflection axis of the third polarizing film POL3, the second linearly polarized light does not pass through the third polarizing film POL3 and is reflected by the third polarizing film POL3. The second linearly polarized light reflected by the third polarizing film POL3 passes through the liquid crystal layer LC2 as it is and passes through the fourth polarizing film POL4. The user can thus see an inverted image of the external image on the mirror blocks with the light reflected from the mirror panel PNL2.

[0068] FIG. 10 is a circuit diagram illustrating an equivalent circuit of a sensing circuit before touch input. FIG. 11 is a circuit diagram illustrating an equivalent circuit of a sensing circuit after touch input. It should be noted that FIGS. 10 and 11 are represented by the simplest circuit to show the principle of the sensing circuit. An actual sensing circuit includes a multiplexer for switching a current path between sensor lines and a sensing circuit, an amplifier received through the sensor lines, an integrator for accumulating an output of the amplifier in a sampling capacitor Cs, an analog-to-digital converter (ADC) for converting an output voltage of the integrator into digital data, a counter, and the like.

[0069] Referring to FIGS. 10 and 11, the sensing circuit includes the first to third switches S1 to S3 and a sampling capacitor Cs. Cx is an in-cell touch sensor. Cs has a capacitance about 1000 times larger than Cx.

[0070] When a finger is touched on the mirror panel PNL2, a capacitor Ct due to the finger is connected to the sensing circuit. Therefore, a capacitance of the in-cell touch sensor increases when the touch is input. As a result, a voltage of the sampling capacitor Cs after touch input is sampled at a voltage higher than a voltage of the sampling capacitor Cs before the touch input.

[0071] FIGS. 12A to 12E are circuit diagrams illustrating operation of a sensing circuit 201 step by step. In FIGS. 12A to 12E, i is a current.

[0072] In Step 1 (FIG. 12A), while the first and third switches S1 and S3 are turned on, the second switch S2 is turned off. At this time, the sampling capacitor Cs and the in-cell touch sensor Cx are connected to a ground voltage source GND so that the sampling capacitor Cs is discharged. In step 1, the sampling capacitor Cs and the in-cell touch sensor Cx are reset.

[0073] In Step 2 (FIG. 12B), the first to third switches S1 to S3 are turned off. Step 2 is a standby state before charge is supplied to the in-cell touch sensor Cx.

[0074] Step 3 (FIG. 12C) is a charge transfer step. In Step 3, when the second switch S2 is turned on, a power supply voltage VDD is applied to the sampling capacitor Cs to charge the sampling capacitor Cs and the in-cell touch sensor Cx. VDD is a high level voltage of the sensor

driving signal TDS.

[0075] In Step 4 (FIG. 12D), the second switch S2 is turned off. As a result, the sampling capacitor Cs and the in-cell touch sensor Cx are on standby in a floating state after charging charges.

[0076] In Step 5 (FIG. 12E), the first switch S1 is turned on. In Step 5, the in-cell touch sensor Cx is discharged through the first switch S1. A voltage Vcs of the sampling capacitor Cs is measured, and the voltage Vcs is compared with a preset reference voltage Vref.

[0077] Referring to FIG. 13, the sensing circuit 201 compares the voltage Vcs of the sampling capacitor Cs with the preset reference voltage Vref and when Vcs is equal to or lower than Vref, the sensing circuit 201 repeats Steps 2 to 5 until Vcs reaches Vref. When Vcs reaches Vref, the sensing circuit 201 performs Step 1 to discharge and reset the sampling capacitor Cs and the in-cell touch sensor Cx.

[0078] When a touch input occurs (after touching), as shown in FIG. 11, since the capacitance of the in-cell touch sensor Cx is increased due to Ct, a charged amount of the in-cell touch sensor Cx becomes larger than when there is no touch input (before touching). Therefore, when a touch input occurs, Vcs reaches Vref in a shorter time. As a result, when the sensing circuit 201 measures a time until Vcs reaches Vref, since the sensing circuit 201 can know a capacitance change of the in-cell touch sensor Cx before and after touching, the sensing circuit 201 can sense the touch input. In FIG. 13, reference numeral 202a denotes a voltage Vcs of the sampling capacitor CS connected to touched in-cell touch sensor Cx. Reference numeral 202b denotes a voltage Vcs of the sampling capacitor CS connected to non-touched (before touching) in-cell touch sensor Cx.

[0079] Every time the sensor driving signal TDS is generated once, the above-described sensing operation is generated once. As the number of sensing increases, a time difference ΔT until Vcs reaches Vref before and after the touching increases. The sensing circuit 201 compares Vcs and Vref using a method of comparing an output data of the ADC to which the output voltage Vcs of the integrator is input with a digital value of Vref. As shown in FIG. 14, the sensing circuit 201 accumulates values of the counter for counting a clock CLK for the time until Vcs reaches Vref, and measures ΔT . Therefore, a capacitance change amount of the in-cell touch sensor Cx before and after the touching can be known. As shown in FIG. 14, as the number of sensing increases, the time difference ΔT before and after the touching increases. Therefore, a sensing sensitivity is improved.

[0080] As shown in FIG. 15, the pixels of the display panel and the in-cell touch sensor of the mirror panel are simultaneously driven, and the in-cell touch sensor and the mirror are simultaneously driven in the mirror panel. Therefore, since the display period and the touch sensing period are not time-divided, the number of sensing in the in-cell touch sensor can be greatly increased. On the other hand, since the conventional in-cell touch sensor

technology divides one frame period into a display period and a touch sensing period, the number of sensing in the in-cell touch sensor cannot be increased due to lack of time.

[0081] FIG. 15 is a waveform diagram illustrating signals applied to electrodes of a mirror panel.

[0082] Referring to FIG. 15, the mirror panel driver 20 applies a mirror driving signal to the second electrodes E2 through the mirror driving lines ML. A polarity of the mirror driving signal may be inverted in units of a predetermined time to prevent the deterioration of the liquid crystal due to the direct current driving of the liquid crystal. The predetermined time may be one frame period, but is not limited thereto. When a low level voltage of the mirror driving signal is changed, the polarity of the mirror driving signal is inverted.

[0083] When the polarity of the mirror driving signal is inverted, since the charge of the in-cell touch sensor fluctuates, touch sensing can be inaccurate. To prevent this, during a polarity transition period DTS in which the polarity of the mirror driving signal is inverted, the sensing circuit 201 does not generate the sensor driving signal TDS. The polarity transition period DTS is a very short period of time, approximately 1 to 2 horizontal periods. In FIG. 15, F(N) is a Nth (N is a positive integer) frame period, and F(N+1) is a (N+1)-th frame period.

[0084] The mirror driving signals applied to the second electrodes E2 select the mirror driving mode and the display driving mode. When the mirror driving signal is in the same phase as the signals TDS and LFD applied to the first electrode E1, since there is no potential difference between the first electrode E1 and the second electrode E2, the block operates in the display mode. When the mirror driving signal is reverse phase with respect to the signals TDS and LFD applied to the first electrode E1, since a potential difference between the first electrode E1 and the second electrode E2 is large, the block operates in the mirror mode.

[0085] In FIG. 15, E2 (1) is a second electrode of a block which operates in a display mode during the Nth and (N+1)-th frame periods F(N) and F(N+1). E2 (2) is a second electrode of a block which operates in a mirror mode during the Nth and (N+1)-th frame periods F(N) and F(N+1). E2 (3) is a second electrode of a block which operates in a mirror mode during the Nth frame period F(N) and operates in a display mode during the (N+1)-th frame period F(N+1). E2 (4) is a second electrode of a block which operates in a display mode during the Nth frame period F(N) and operates in a mirror mode during the (N+1)-th frame period F(N+1).

[0086] In order to minimize a parasitic capacitance of the in-cell touch sensor, an LFD signal is applied to the first electrodes E1(1) other than the first electrode E1(2) to which the sensor driving signal TDS is applied. The LFD signal is also applied to the second electrodes E2 to which the mirror driving signal of the mirror mode is not applied.

[0087] As described above, according to the invention,

the mirror region and the display region are independently controlled on a block-by-block basis using the electrodes divided on a block-by-block basis in the mirror panel. Therefore, the mirror region and the display region can be varied. Since the mirror region and the display region are divided on a block-by-block basis, the optical interference between the reflected light and the transmitted light can be reduced. Further, according to the invention, the in-cell touch sensor is implemented using the divided electrodes in the mirror panel. Therefore, the touch input can be sensed without a separate touch panel.

[0088] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure and drawings. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

Claims

1. A mirror display panel comprising:

a plurality of first electrodes (E1) disposed on a first substrate (SUBS4);
 a plurality of sensor lines (SL) disposed on the first substrate (SUBS4) and connected to the plurality of first electrodes (E1);
 a plurality of second electrodes (E2) disposed on a second substrate (SUBS3) and facing the first electrodes (E1) disposed on the first substrate (SUBS4) with a liquid crystal layer (LC2) interposed therebetween;
 a plurality of mirror driving lines (ML) disposed on the second substrate (SUBS3) and connected to the plurality of second electrodes (E2);
 a polarizing film (POL4) adhered to the first substrate (SUBS4); and
 a reflective polarizing film (POL3) adhered to the second substrate (SUBS3).

2. A mirror display comprising:

a mirror display panel (PNL2) according to claim 1;
 a mirror panel driver (20) configured to apply a sensor driving signal (TDS) to the first electrodes (E1) through the sensor lines (SL) to sense a change of capacitance on the first electrodes (E1), and apply a mirror driving signal for selecting a mirror mode and a display mode to the second electrodes (E2);

a display panel (PNL1) configured to display an input image; and
 a display panel driver (12) configured to write data of the input image to pixels of the display panel (PNL1).

3. The mirror display of claim 2, wherein the first electrodes (E1) and the second electrodes (E2) of the mirror display panel (PNL2) are divided into blocks of a predetermined size.

4. The mirror display of claim 3, wherein the mirror panel driver (20) is configured to apply the mirror driving signal of the mirror mode to the second electrodes (E2) that belong to a first block driven in the mirror mode, and apply the mirror driving signal of the display mode to the second electrodes (E2) that belong to a second block driven in the display mode.

5. The mirror display of claim 4, wherein incident external light is reflected by the reflective polarizing film (POL3) at a location corresponding to the first block, and wherein light from the display panel (PNL1) passes through the reflective polarizing film (POL3) at a location corresponding to the second block.

6. The mirror display of claim 5, wherein the mirror display panel (PNL2) is a liquid crystal panel configured to be driven in a normally white mode.

7. The mirror display of claim 6, wherein the mirror driving signal of the display mode is in the same phase as the sensor driving signal (TDS), and the mirror driving signal of the mirror mode is reverse phase with respect to the sensor driving signal (TDS).

8. The mirror display of claim 7, wherein the mirror panel driver (20) is configured to apply an alternating current signal (LFD) having the same phase as the sensor driving signal (TDS) to the first electrodes (E1) to which the sensor driving signal (TDS) is not applied.

9. The mirror display of any one of claims 2 to 8, configured to, when a polarity of the mirror driving signal is inverted, not generate the sensor driving signal (TDS).

Patentansprüche

1. Ein Spiegelanzeige-Panel, aufweisend:

eine Vielzahl von ersten Elektroden (E1), die auf einem ersten Substrat (SUBS4) angeordnet sind;
 eine Vielzahl von Sensorleitungen (SL), die auf

dem ersten Substrat (SUBS4) angeordnet sind und mit der Vielzahl von ersten Elektroden (E1) verbunden sind;

eine Vielzahl von zweiten Elektroden (E2), die auf einem zweiten Substrat (SUBS3) angeordnet sind und den ersten Elektroden (E1), die auf dem ersten Substrat (SUBS4) angeordnet sind, mit einer dazwischen eingefügten Flüssigkristallschicht (LC2) gegenüberliegen;

eine Vielzahl von Spiegel-Treiberleitungen (ML), die auf dem zweiten Substrat (SUBS3) angeordnet sind und mit der Vielzahl von zweiten Elektroden (E2) verbunden sind;

einen Polarisationsfilm (POL4), der an dem ersten Substrat (SUBS4) anhaftet; und

einen reflektierenden Polarisationsfilm (POL3), der an dem zweiten Substrat (SUBS3) anhaftet.

2. Eine Spiegelanzeige, aufweisend:

ein Spiegelanzeige-Panel (PNL2) gemäß Anspruch 1;

einen Spiegel-Panel-Treiber (20), der konfiguriert ist, ein Sensoransteuersignal (TDS) durch die Sensorleitungen (SL) an die ersten Elektroden (E1) anzulegen, um eine Änderung der Kapazität auf den ersten Elektroden (E1) zu erfassen, und ein Spiegelansteuersignal zum Auswählen eines Spiegelmodus und eines Anzeigemodus an die zweiten Elektroden (E2) anzulegen;

ein Anzeige-Panel (PNL1), das konfiguriert ist, ein Eingabebild anzuzeigen; und

einen Anzeige-Panel-Treiber (12), der konfiguriert ist, Daten des Eingabebildes an die Pixel des Anzeige-Panels (PNL1) zu schreiben.

3. Die Spiegelanzeige gemäß Anspruch 2, wobei die ersten Elektroden (E1) und die zweiten Elektroden (E2) des Spiegelanzeige-Panels (PNL2) in Blöcke von einer vorgegebenen Größe geteilt sind.

4. Die Spiegelanzeige gemäß Anspruch 3, wobei der Spiegel-Panel-Treiber (20) konfiguriert ist, das Spiegelansteuersignal des Spiegelmodus an die zweiten Elektroden (E2), die zu einem in dem Spiegelmodus angesteuerten ersten Block gehören, anzulegen, und das Spiegelansteuersignal des Anzeigemodus an die zweiten Elektroden (E2), die zu einem in dem Anzeigemodus angesteuerten zweiten Block gehören, anzulegen.

5. Die Spiegelanzeige gemäß Anspruch 4, wobei einfallendes externes Licht durch den reflektierenden Polarisationsfilm (POL3) an einem zu dem ersten Block korrespondierenden Ort reflektiert wird, und wobei Licht von dem Anzeige-Panel (PNL1) durch den reflektierenden Polarisationsfilm (POL3) an ei-

nem zu dem zweiten Block korrespondierenden Ort hindurch geht.

6. Die Spiegelanzeige gemäß Anspruch 5, wobei das Spiegelanzeige-Panel (PNL2) ein Flüssigkristall-Panel ist, das konfiguriert ist, in einem Normally-White-Modus angesteuert zu werden.

7. Die Spiegelanzeige gemäß Anspruch 6, wobei das Spiegelansteuersignal des Anzeigemodus in der gleichen Phase ist wie das Sensoransteuersignal (TDS), und das Spiegelansteuersignal des Spiegelmodus zu dem Sensoransteuersignal (TDS) in gegenläufiger Phase ist.

8. Die Spiegelanzeige gemäß Anspruch 7, wobei der Spiegel-Panel-Treiber (20) konfiguriert ist, ein alternierendes Stromsignal (LFD), das die gleiche Phase hat wie das Sensoransteuersignal (TDS) an die ersten Elektroden (E1), an die das Sensoransteuersignal (TDS) nicht angelegt wird, anzulegen.

9. Die Spiegelanzeige gemäß einem der Ansprüche 2 bis 8, die konfiguriert ist, das Sensoransteuersignal (TDS) nicht zu erzeugen, wenn eine Polarität des Spiegelansteuersignals invertiert ist.

Revendications

1. Panneau d'affichage miroir comprenant :

une pluralité de premières électrodes (E1) disposées sur un premier substrat (SUBS4) ;

une pluralité de lignes de détection (SL) disposées sur le premier substrat (SUBS4), et connectées à la pluralité de premières électrodes (E1) ;

une pluralité de secondes électrodes (E2) disposées sur un second substrat (SUBS3), et faisant face aux premières électrodes (E1) disposées sur le premier substrat (SUBS4), une couche de cristaux liquides (LC2) étant interposée entre ces dernières ;

une pluralité de lignes de commande de miroir (ML) disposées sur le second substrat (SUBS3), et connectées à la pluralité de secondes électrodes (E2) ;

un film de polarisation (POL4) collé sur le premier substrat (SUBS4) ; et

un film de polarisation réfléchissant (POL3) collé sur le second substrat (SUBS3).

2. Affichage miroir comprenant :

un panneau d'affichage miroir (PNL2) selon la revendication 1 ;

un dispositif de commande de panneau miroir

- (20) configuré pour appliquer un signal de commande de détection (TDS) aux premières électrodes (E1) par l'intermédiaire des lignes de détection (SL) afin de détecter un changement de capacité sur les premières électrodes (E1), et appliquer aux secondes électrodes (E2) un signal de commande de miroir pour sélectionner un mode miroir ou un mode affichage ;
 un panneau d'affichage (PNL1) configuré pour afficher une image d'entrée ; et
 un dispositif de commande de panneau d'affichage (12) configuré pour écrire des données de l'image d'entrée dans les pixels du panneau d'affichage (PNL1).
3. Affichage miroir selon la revendication 2, où les premières électrodes (E1) et les secondes électrodes (E2) du panneau d'affichage miroir (PNL2), sont divisées en blocs d'une taille prédéterminée.
4. Affichage miroir selon la revendication 3, où le dispositif de commande de panneau de miroir (20) est configuré pour appliquer le signal de commande de miroir du mode miroir aux secondes électrodes (E2) qui appartiennent à un premier bloc commandé dans le mode miroir, et pour appliquer le signal de commande de miroir du mode affichage aux secondes électrodes (E2) qui appartiennent à un second bloc commandé dans le mode affichage.
5. Affichage miroir selon la revendication 4, où la lumière extérieure incidente est réfléchiée par le film de polarisation réfléchissant (POL3) à un emplacement correspondant au premier bloc, et où la lumière provenant du panneau d'affichage (PNL1) passe à travers le film de polarisation réfléchissant (POL3) à un emplacement correspondant au second bloc.
6. Affichage miroir selon la revendication 5, où le panneau d'affichage miroir (PNL2) est un panneau à cristaux liquides configuré pour être commandé dans un mode normalement blanc.
7. Affichage miroir selon la revendication 6, où le signal de commande de miroir du mode affichage est en phase avec le signal de commande de détection (TDS), et le signal de commande de miroir du mode miroir est en opposition de phase par rapport au signal de commande de détection (TDS).
8. Affichage miroir selon la revendication 7, où le dispositif de commande de panneau de miroir (20) est configuré pour appliquer un signal de courant alternatif (LFD) présentant la même phase que le signal de commande de détection (TDS), aux premières électrodes (E1) auxquelles le signal de commande de détection (TDS) n'est pas appliqué.
9. Affichage miroir selon l'une quelconque des revendications 2 à 8, configuré pour ne pas générer de signal de commande de détection (TDS), lorsque la polarité du signal de commande de miroir est inversée.

FIG. 1
(RELATED ART)

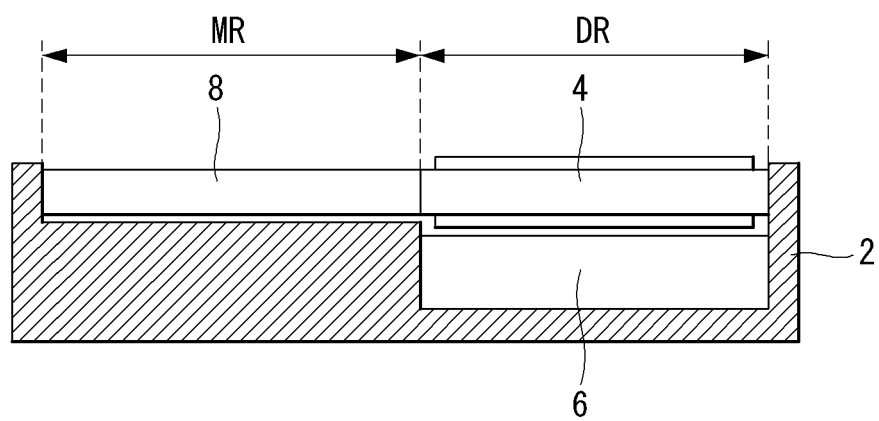


FIG. 2

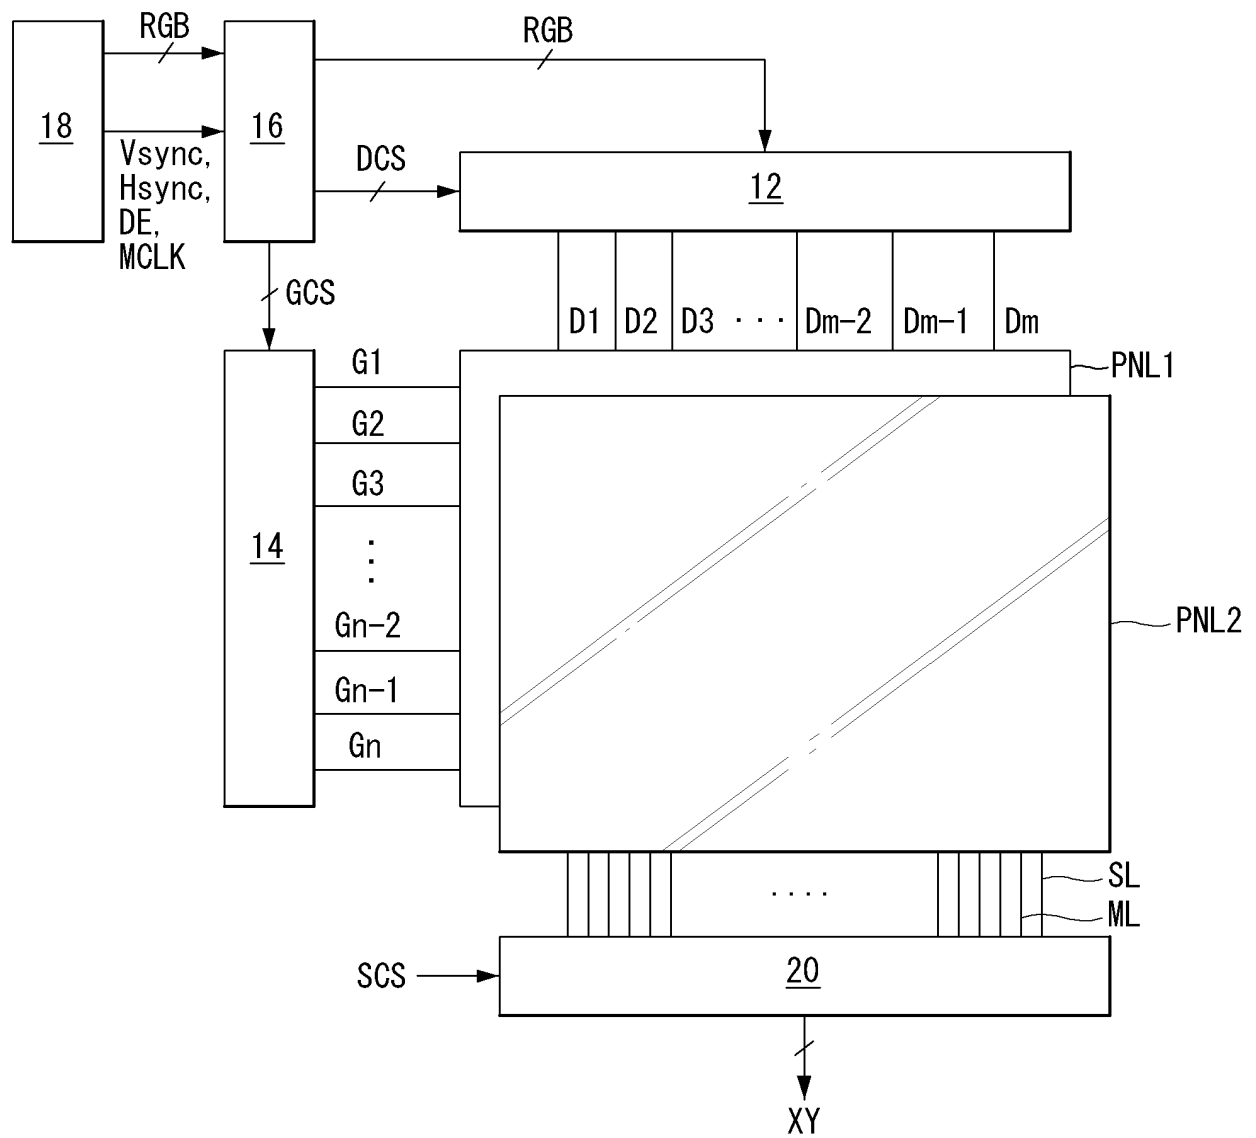


FIG. 3

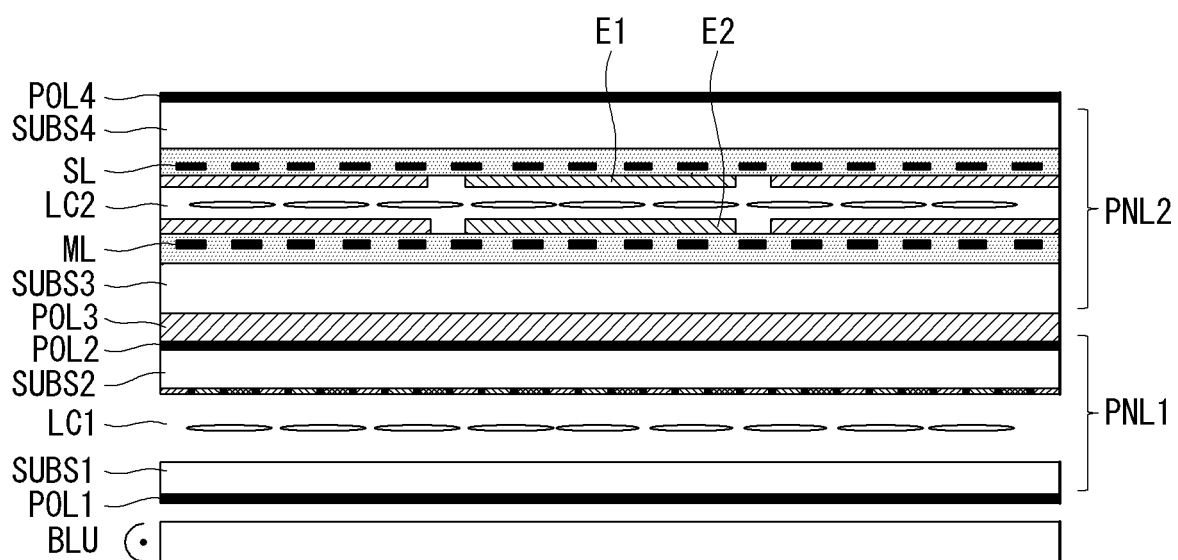


FIG. 4

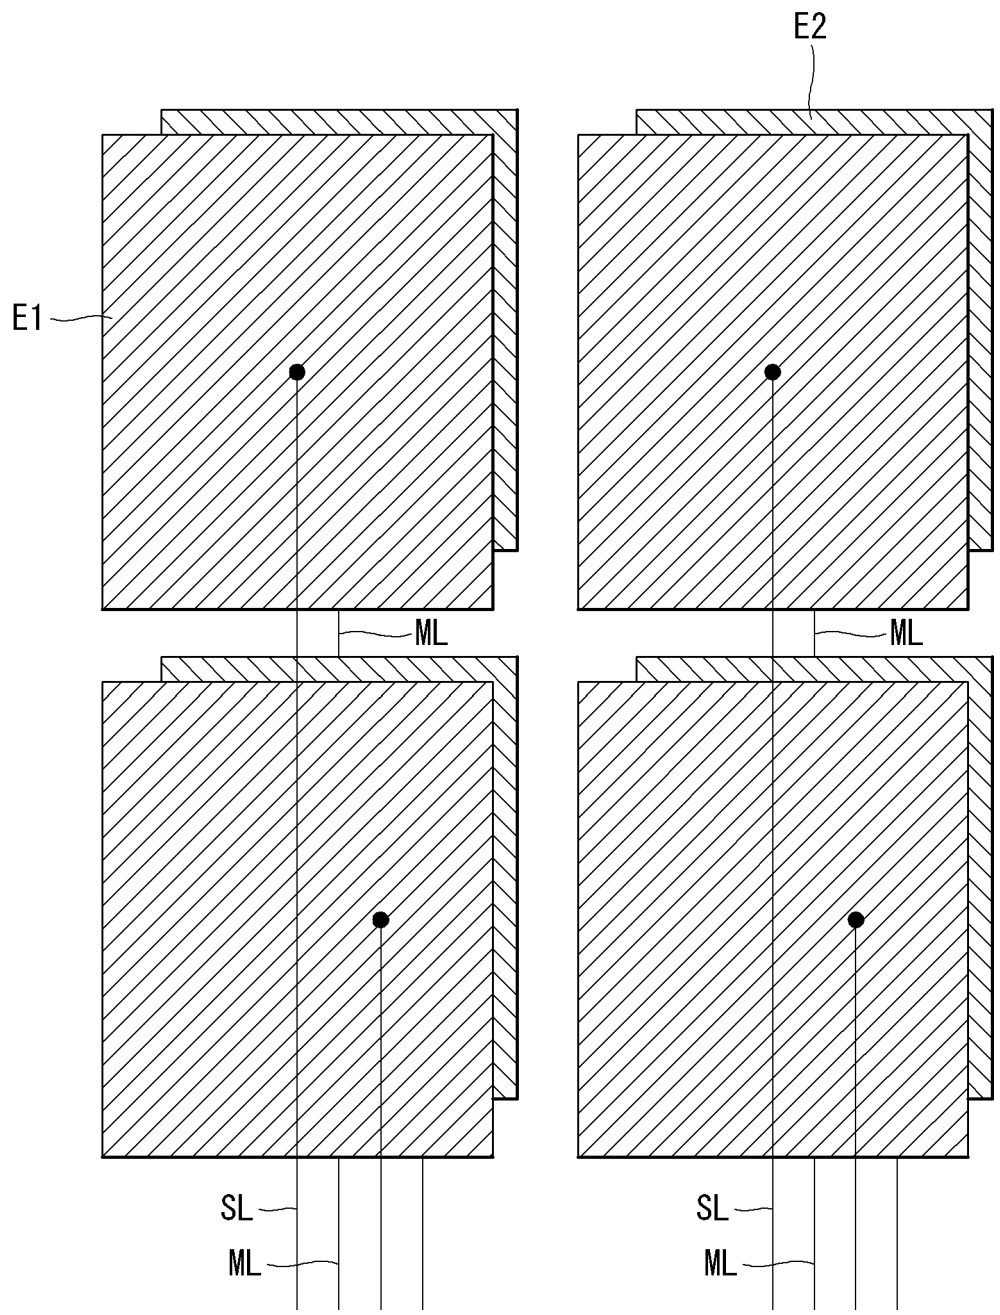


FIG. 5

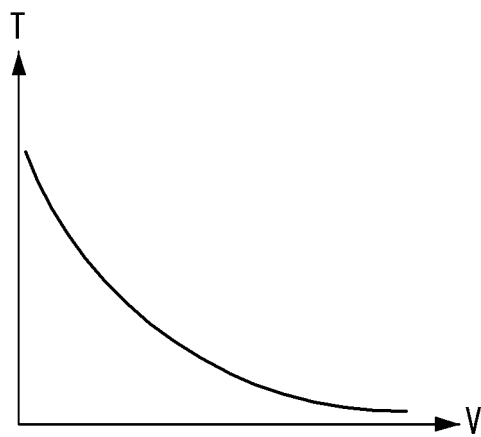


FIG. 6A

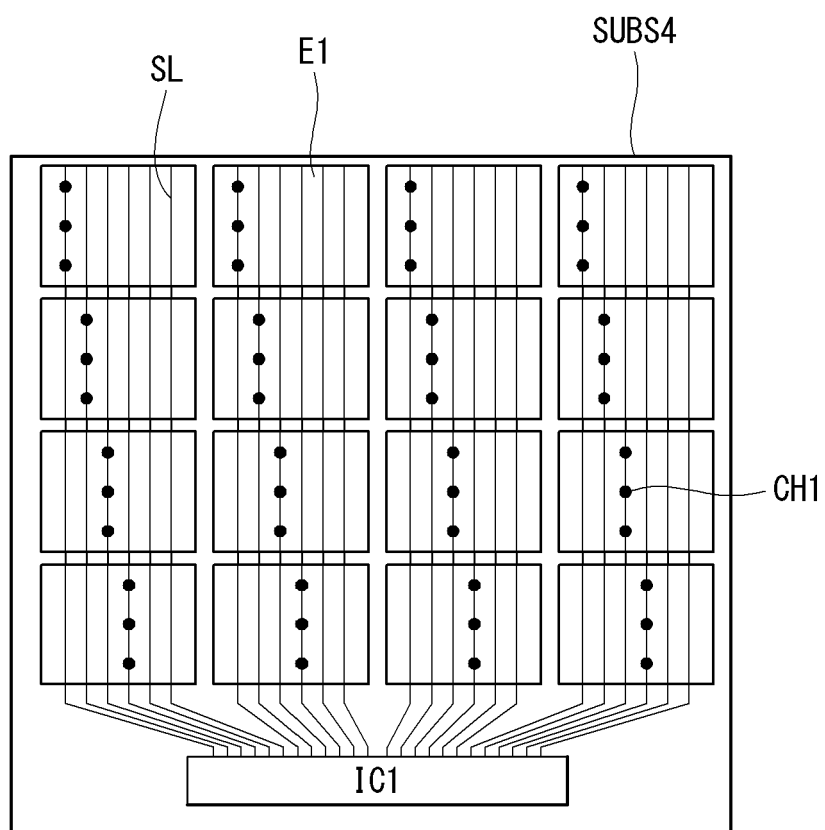


FIG. 6B

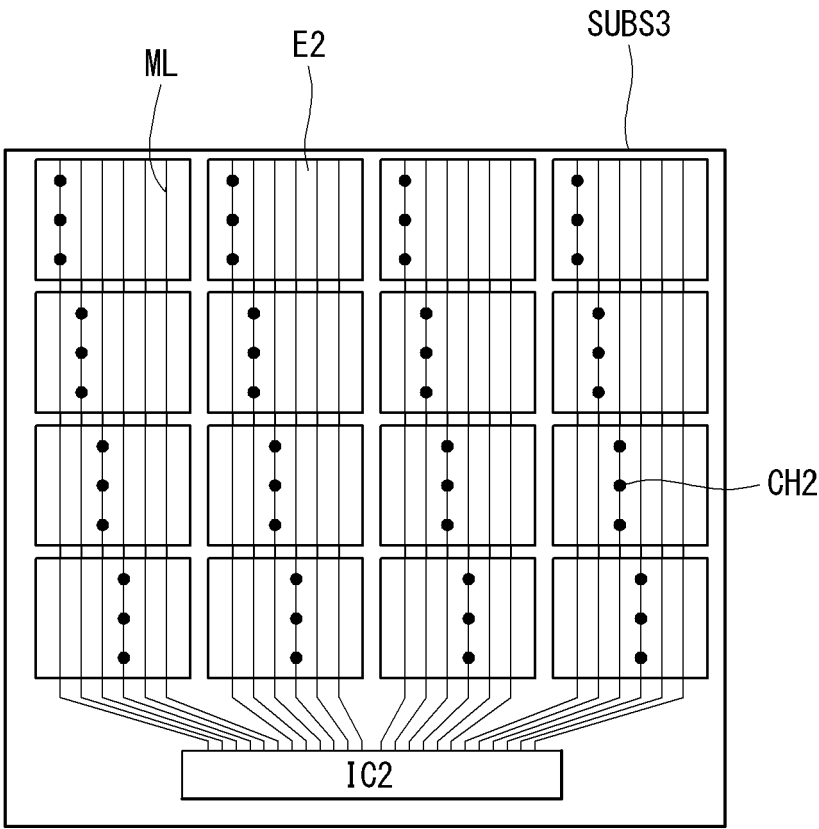


FIG. 7

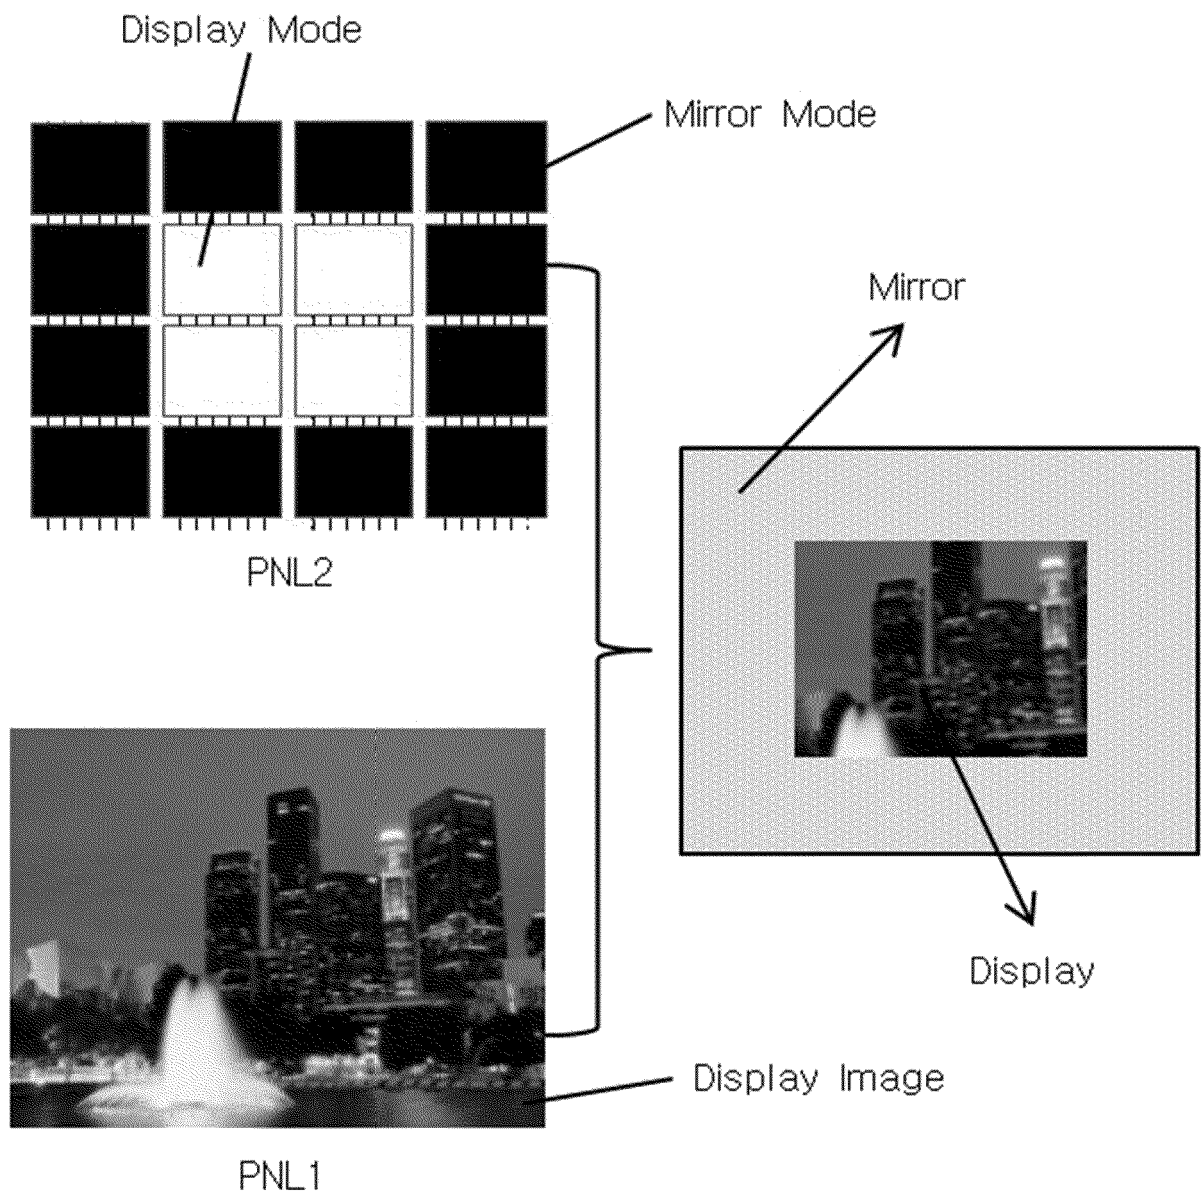


FIG. 8

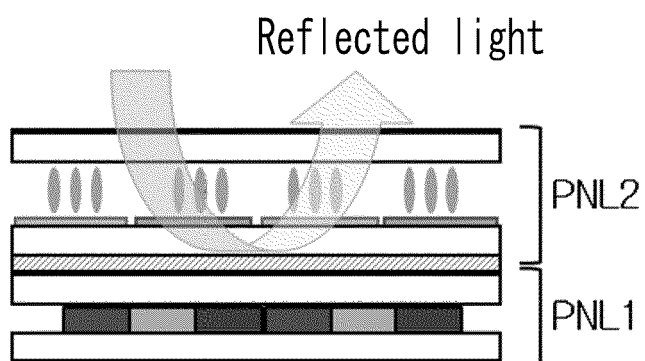
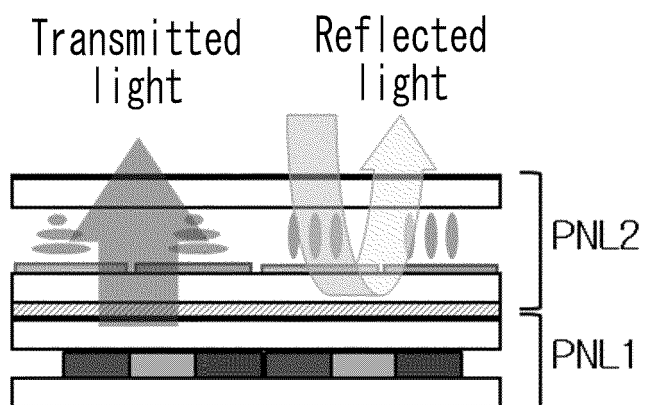
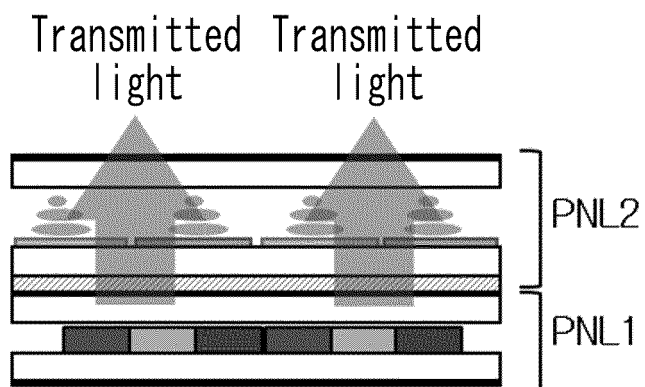


FIG. 9

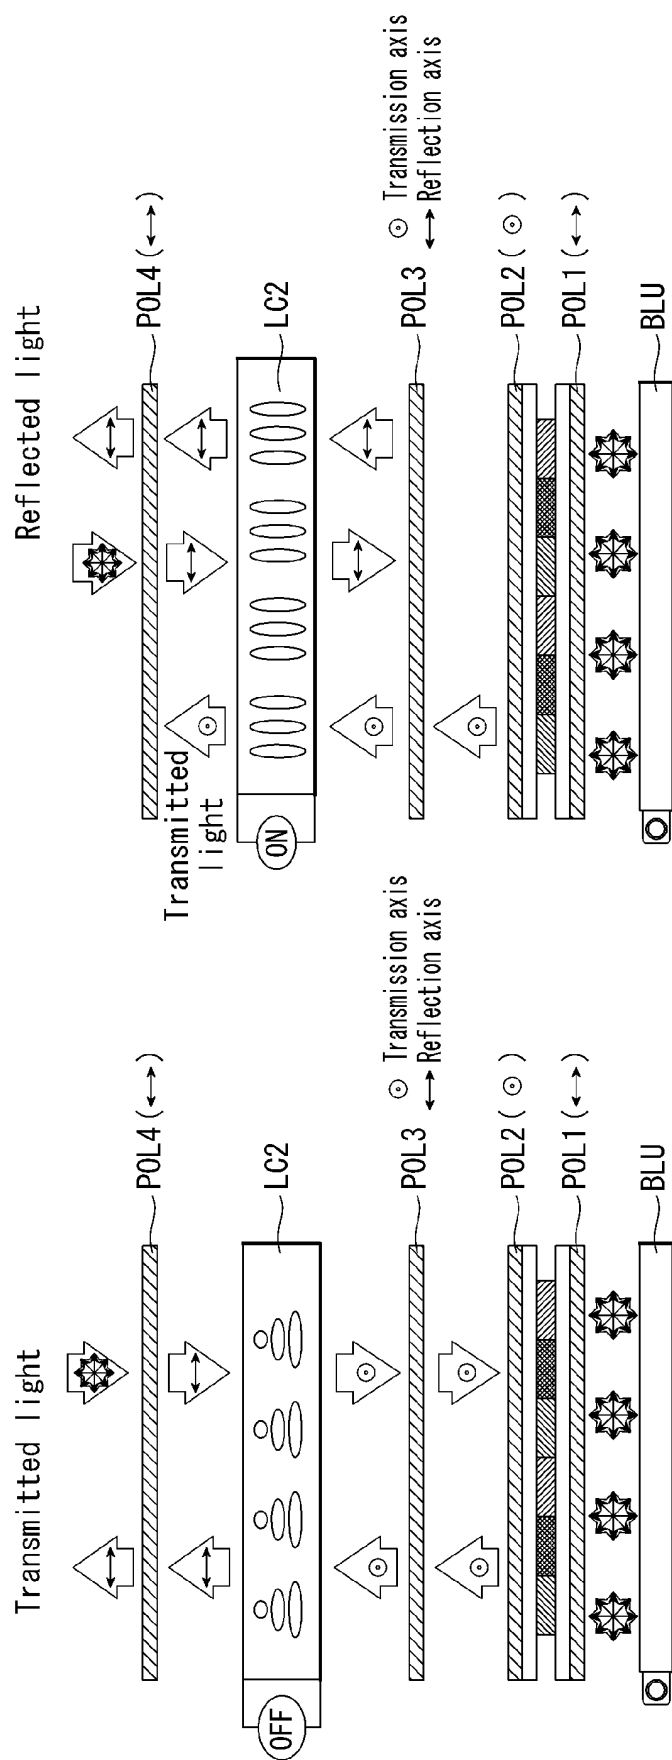


FIG. 10

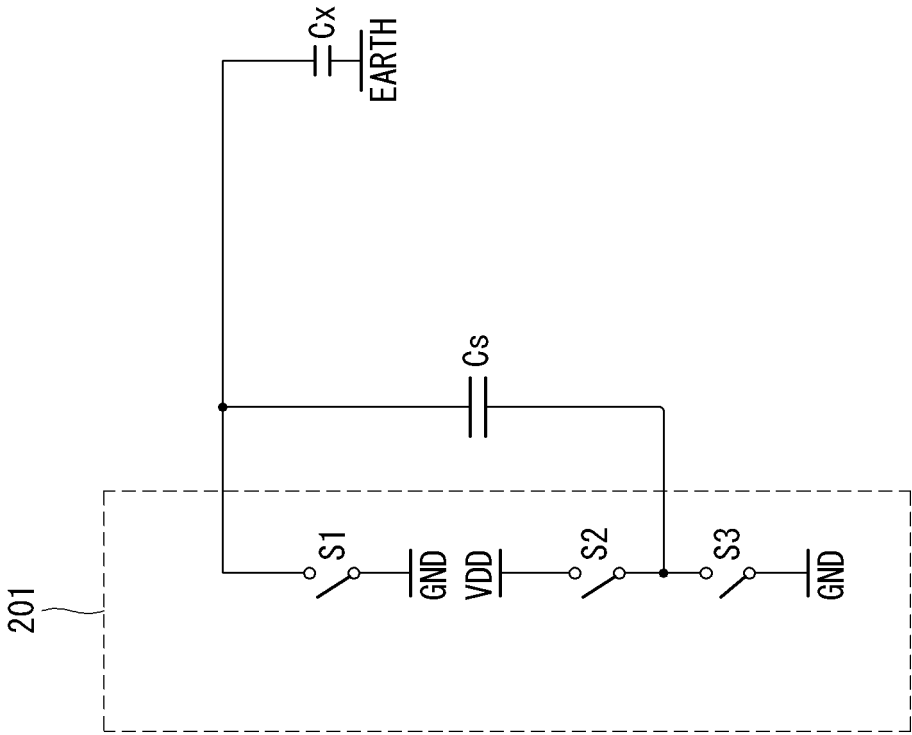


FIG. 11

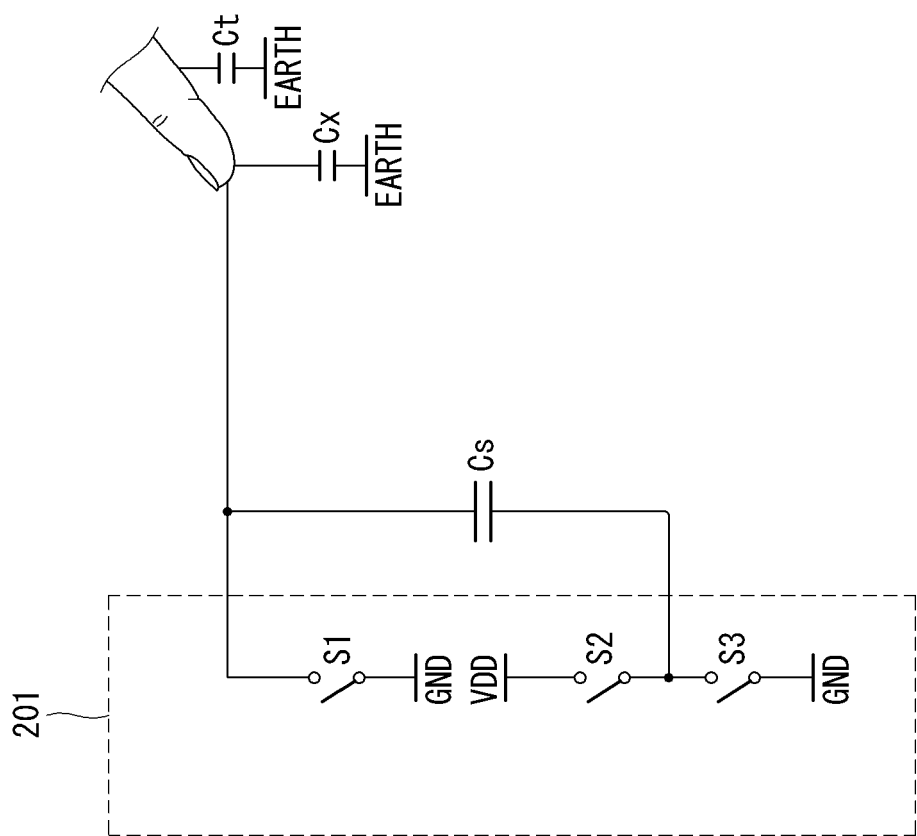


FIG. 12A

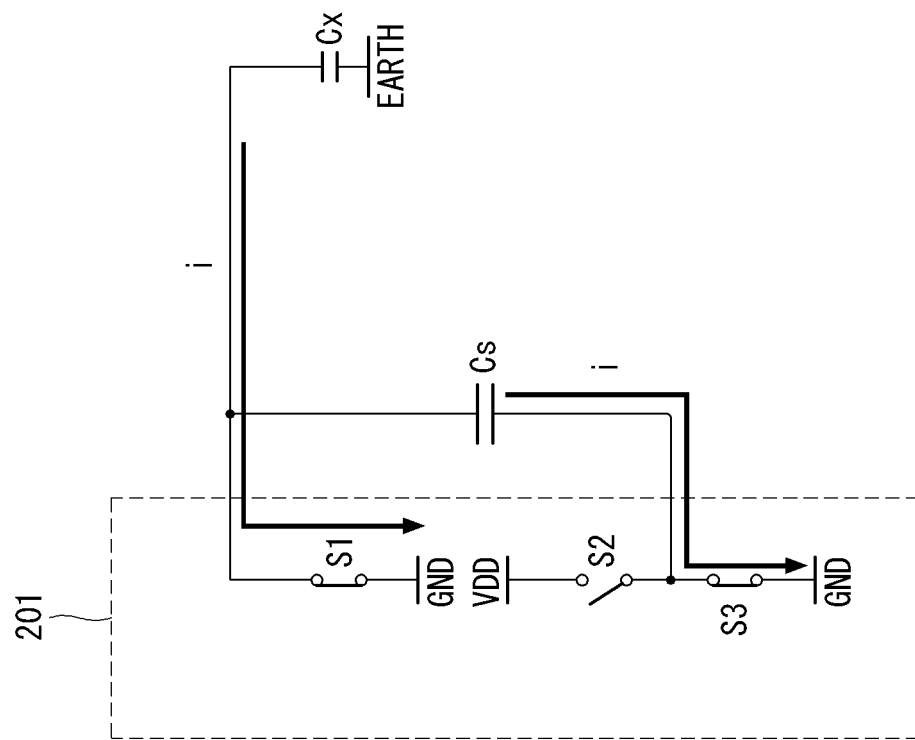


FIG. 12B

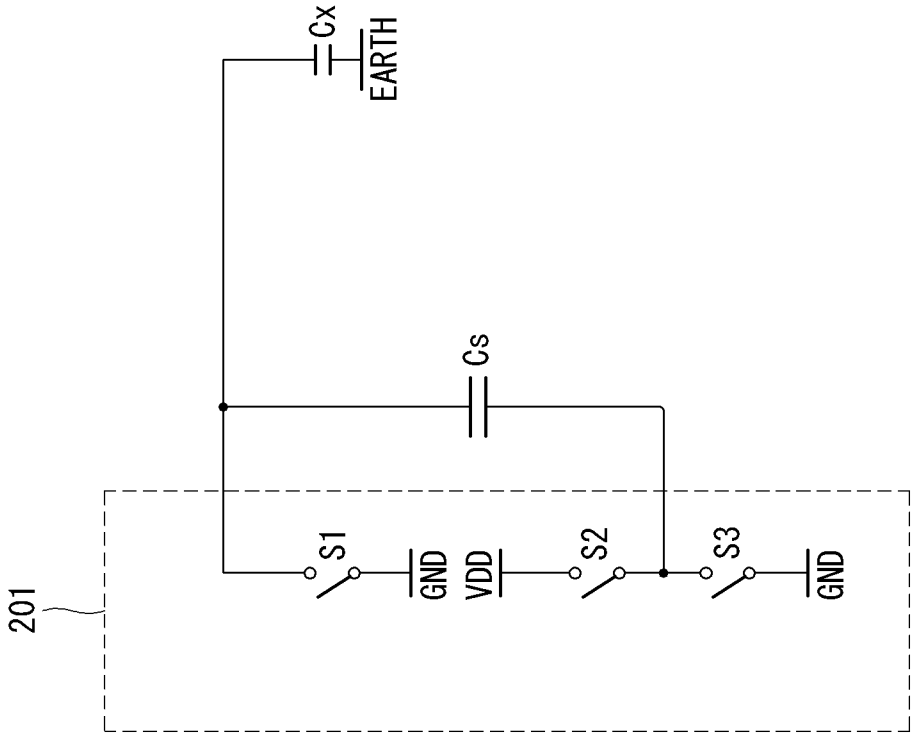


FIG. 12C

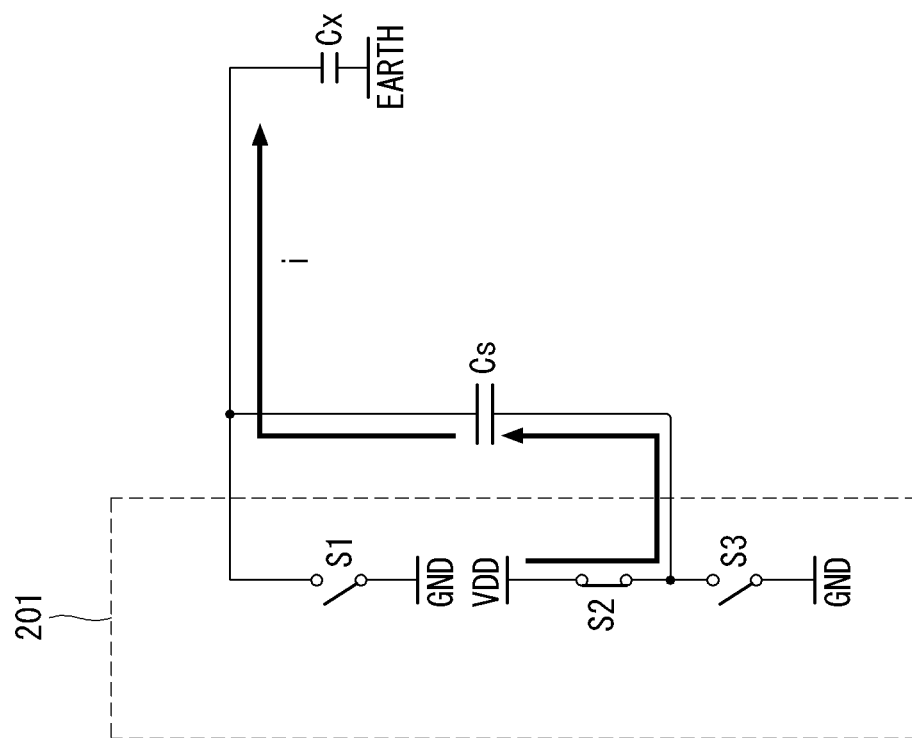


FIG. 12D

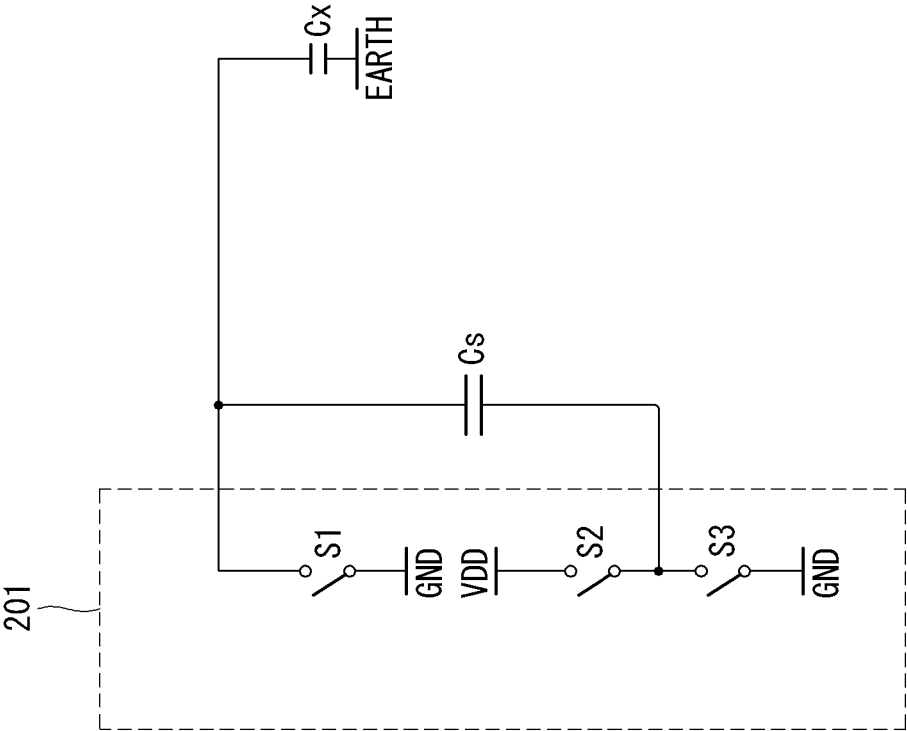


FIG. 12E

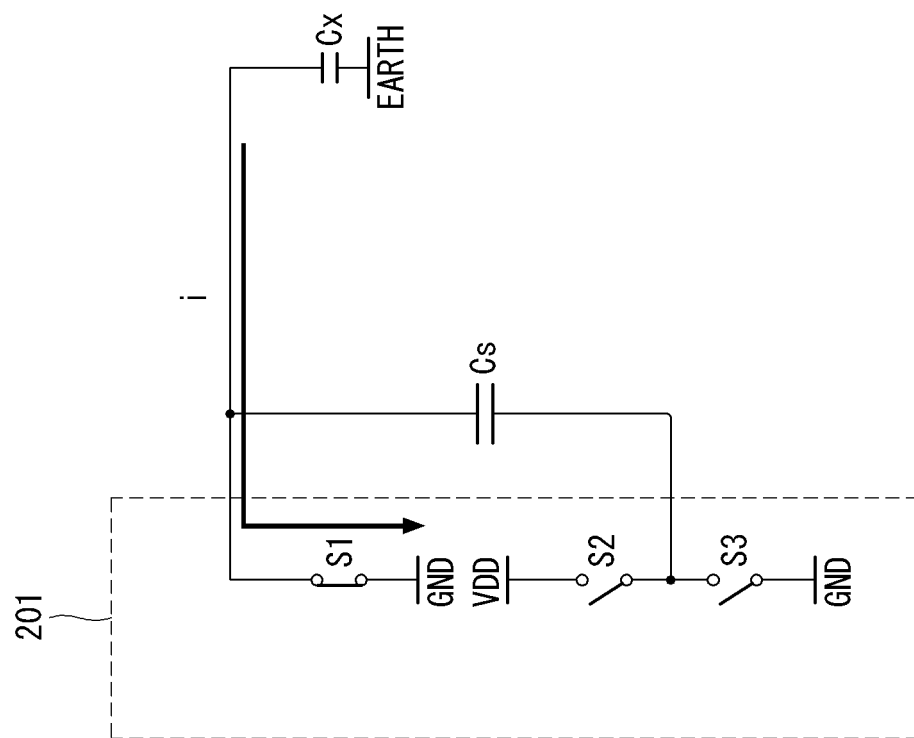


FIG. 13

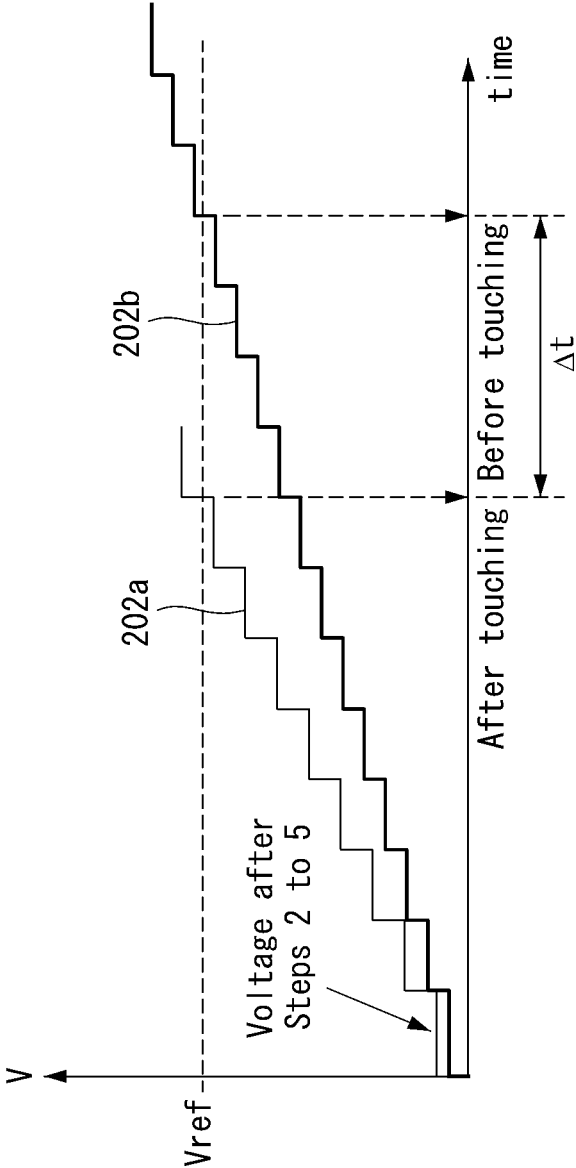


FIG. 14


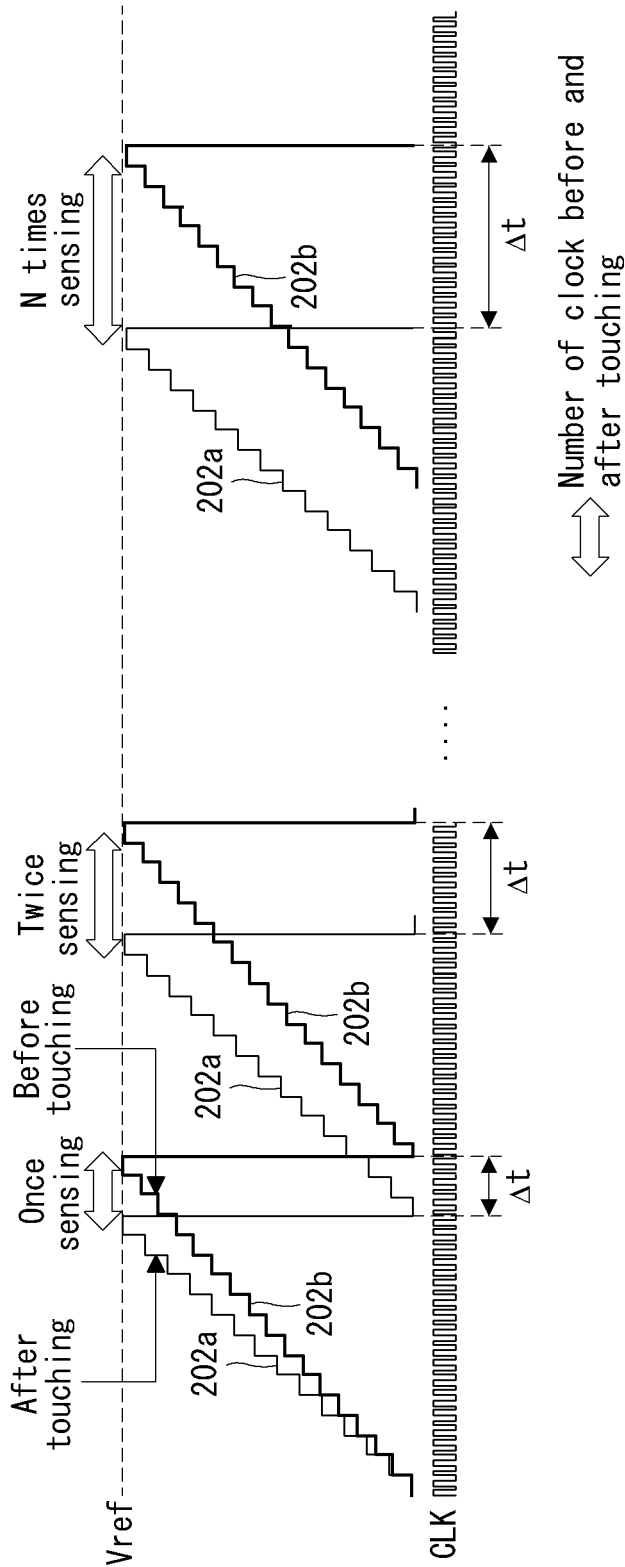


FIG. 15

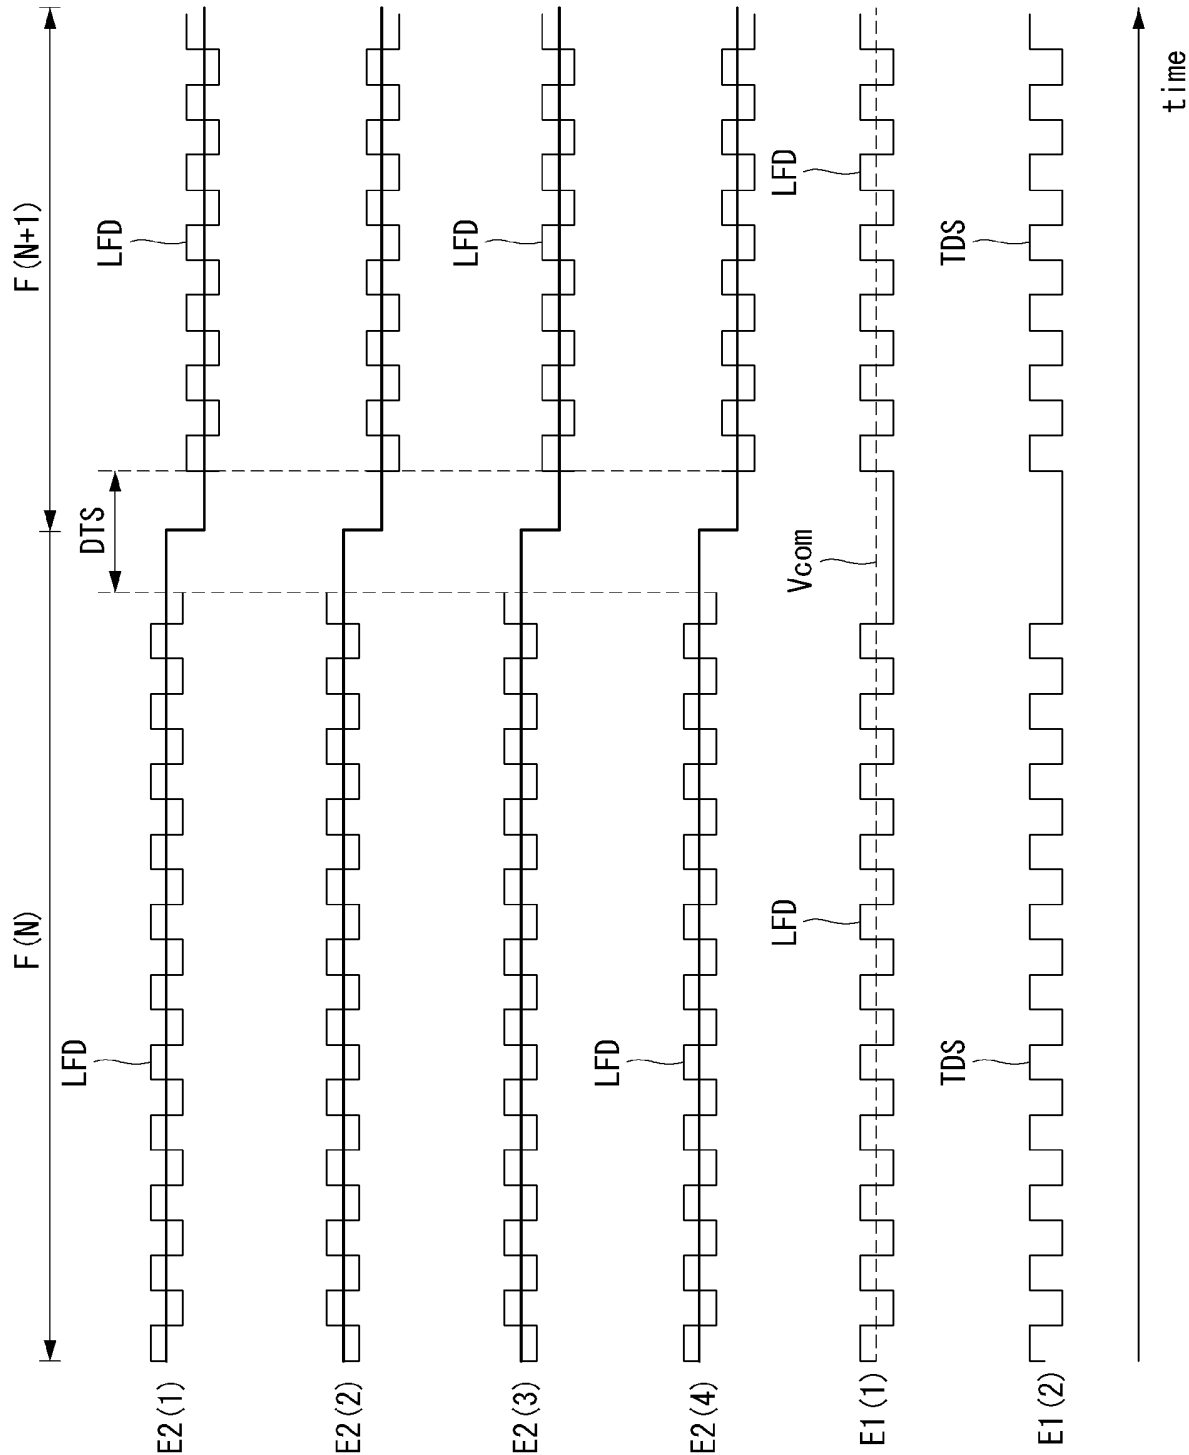

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0933663 A1 [0006]

专利名称(译)	镜子显示		
公开(公告)号	EP3252524B1	公开(公告)日	2019-07-17
申请号	EP2017173454	申请日	2017-05-30
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	NAM SANGJIN KIM KYUJIN YOO SEUNGJIN		
发明人	NAM, SANGJIN KIM, KYUJIN YOO, SEUNGJIN		
IPC分类号	G02F1/1333 G02F1/1335 G02F1/1347 G06F3/041 G06F3/044 G02F1/1343 G02F1/1362		
CPC分类号	G06F3/0412 G06F3/044 G02F1/13338 G02F1/133536 G02F1/134309 G02F1/13471 G02F1/136286 G02F2001/133567 G02F2203/02 G02F2203/66 G06F3/0416 G09G3/3614 G09G2300/0426		
优先权	1020160066431 2016-05-30 KR		
其他公开文献	EP3252524A1		
外部链接	Espacenet		

摘要(译)

讨论了镜子显示器。根据实施例的镜子显示器包括设置在第一基板 (SUBS4) 上的多个第一电极 (E1) , 设置在第一基板 (SUBS4) 上并连接到多个第一电极的多个传感器线 (SL) (E1) , 多个第二电极 (E2) 设置在第二基板 (SUBS3) 上并且面对设置在第一基板 (SUBS4) 上的第一电极 (E1) , 其间插入有液晶层 (LC2) , 多个镜子设置在第二基板 (SUBS3) 上并连接到多个第二电极 (E2) 的驱动线 (ML) , 粘附到第一基板 (SUBS4) 的偏振膜 (POL4) 和粘附到第二基板 (SUBS4) 的反射偏振膜 (POL3) 第二基板 (SUBS3) 。

FIG. 1

(RELATED ART)

