



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
18.08.2010 Bulletin 2010/33

(21) Application number: **08855500.8**

(22) Date of filing: **03.09.2008**

(51) Int Cl.:
G02F 1/1368 (2006.01) **G02F 1/133** (2006.01)
G09G 3/20 (2006.01) **G09G 3/36** (2006.01)
H04N 5/66 (2006.01)

(86) International application number:
PCT/JP2008/065891

(87) International publication number:
WO 2009/069359 (04.06.2009 Gazette 2009/23)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA MK RS

(30) Priority: **30.11.2007 JP 2007311626**


(71) Applicant: **Sharp Kabushiki Kaisha**
Osaka-shi
Osaka 545-8522 (JP)

(72) Inventor: **TSUBATA, Toshihide**
Osaka-shi
Osaka 545-8522 (JP)

(74) Representative: **Goddard, Heinz J.**
Forrester & Boehmert
Pettenkoferstrasse 20-22
80336 München (DE)

(54) **LIQUID CRYSTAL DISPLAY, ACTIVE MATRIX SUBSTRATE, LIQUID CRYSTAL PANEL, LIQUID CRYSTAL DISPLAY UNIT, AND TELEVISION RECEIVER**

(57) The present invention provides a configuration in which: each pixel array is provided correspondingly with a first and second data signal lines (S1, s1); a pixel (P) included in each pixel array includes four subpixels (1a through 1d) which are connected to an identical scanning signal line (e.g. G1); the pixel (P) is associated correspondingly with two storage capacitor wires (Cs1, Cs2); the two subpixels (1a, 1c) of the pixel (P) define respective capacitances with one (Cs1) of the two storage capacitor wires; one (1a) of the two subpixels is connected to the first data signal line (S1) while the other one (1c) of the two subpixels is connected to the second data signal line (s1); the other two subpixels (1b, 1d) define respective capacitances with the other one (Cs2) of the two storage capacitor wires; and one (1b) of the other two subpixels is connected to the first data signal line (S1) while the other one (1d) of the other two subpixels is connected to the second data signal line (s1). According to the configuration, it is possible to control four subpixels included in each pixel so that the four subpixels have respective different luminance levels. As such, it is possible to display a gray level by making use of the different luminance levels.

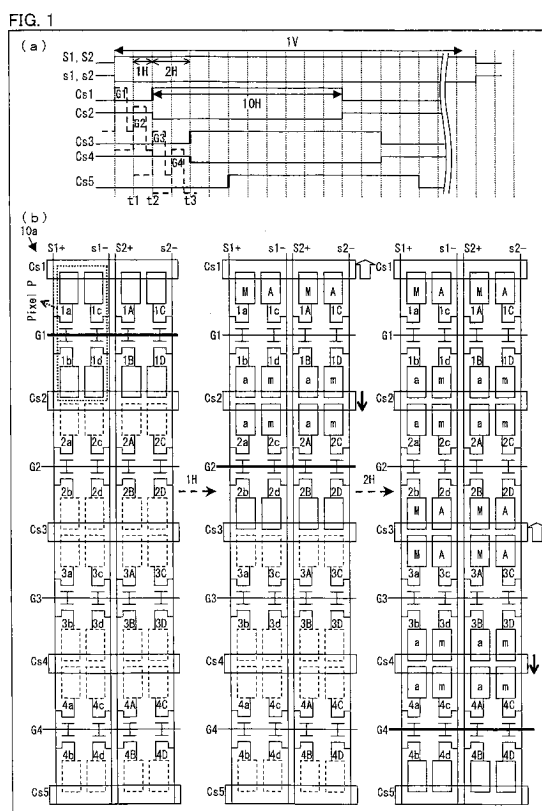

Description

Technical Field

[0001] The present invention relates to (i) a liquid crystal display device employing a divided-pixel system, in which each pixel includes a plurality of subpixels, (ii) an active matrix substrate used in a liquid crystal display device employing the divided-pixel system, and (iii) a liquid crystal panel used in a liquid crystal display device employing the divided-pixel system.

Background Art

[0002] Viewing angle dependence of a gamma characteristic is a difference between (i) a gamma characteristic of a liquid crystal display device as seen from the front and (ii) a gamma characteristic of the liquid crystal display device as seen at an angle. In order to improve the viewing angle dependence of the gamma characteristic on the liquid crystal display device, various solutions have been proposed. One of the solutions is a divided-pixel system (so-called multi-pixel technique), in which each pixel includes a plurality of subpixels (for example, refer to Patent Literature 1).

[0003] Fig. 46 illustrates an equivalent circuit of a liquid crystal display device employing the divided-pixel system. According to Fig. 46, the liquid crystal display device includes data signal lines *s* and scanning signal lines *g* which are orthogonal to each other, storage capacitor wires *csx* and storage capacitor wires *csy*, and pixels *p* which are arrayed in a matrix manner. Each of the pixels *p* includes two subpixels *spa* and *spb*. The subpixel *spa* includes a transistor *Tra* and a pixel electrode *pea*, while the subpixel *spb* includes a transistor *Trb* and a pixel electrode *peb*. Each of the scanning signal lines *g* is provided so as to pass through corresponding one of the pixels *p* in the middle of the pixel *p*. The transistors *Ta* and *Trb* are connected to identical one of the scanning signal lines *g* and to identical one of the data signal lines *s*. The pixel electrode *pea* and corresponding one of the storage capacitor wires *csx* define a capacitance *Ccsa*, and the pixel electrode *pea* and a common electrode (counter electrode) *com* define *Clca*. Further, the pixel electrode *peb* and corresponding one of the storage capacitor wires *csy* define a capacitance *Ccsb*, and the pixel electrode *peb* and the common electrode (counter electrode) *com* define *Clcb*. That is, in the liquid crystal display device as above, each of the pixels *p* is provided correspondingly with two storage capacitor wires (*csx* and *csy*).

[0004] According to the above liquid crystal display device, the pixel electrode *pea* and the pixel electrode *peb* receive the same signal potential (a potential corresponding to a data signal), which is supplied from corresponding one of the data signal lines *s*. However, if a potential of each of the two storage capacitor wires *csx* and *csy* is individually controlled when or while the transistor *Tra*

and the transistor *Trb* are in an OFF state, then it is possible to cause, via the storage capacitance *Ccsa* and the storage capacitance *Ccsb*, the pixel electrode *pea* and the pixel electrode *peb* to have respectively different effective potentials. As used herein, "a potential of each of the two storage capacitor wires *csx* and *csy* is individually controlled" means that, for example, during each frame period, each of potential levels of the two storage capacitor wires *csx* and *csy* is reversed for every horizontal scanning period. Specifically, for example, (i) the potential levels of the two storage capacitor wires *csx* and *csy* shift in a positive direction and in a negative direction, respectively, during a horizontal scanning period, and (ii) the potential levels of the two storage capacitor wires *csx* and *csy* shift in the negative direction and in the positive direction, respectively, during a subsequent horizontal scanning period. For example, assuming that *Vs* represents a signal potential to be supplied to the data signal lines *s*, *VF* represents a feed-through potential obtained when transistors are in the OFF state, and $2 \times Vp$ represents each of level shift amounts of the potential levels of the two storage capacitor wires *csx* and *csy*, and $Kca = Ccsa / (Clca + Ccsa)$ and $Kcb = Ccsb / (Clcb + Ccsb)$, the effective potential of the pixel electrode *pea* is represented by $Vs - VF + Kca \times Vp$, and the effective potential of the pixel electrode *peb* is represented by $Vs - VF - Kcb \times Vp$.

[0005] As described above, according to the above liquid crystal display device, it is possible to display a gray level by controlling pixels so that each of them includes a high-luminance subpixel *spa* (bright subpixel) and a low-luminance subpixel *spb* (dark subpixel). As such, the viewing angle dependence of the gamma characteristic (e.g., excess brightness of a display screen) is improved.

[0006] According to the above divided-pixel system, the viewing angle dependence of the gamma characteristic is improved for each pixel by blending different gamma characteristics of the subpixels. However, the conventional configuration, in which each pixel includes only two subpixels, brought about only a limited effect.

Citation List

Patent Literature 1

[0007] Japanese Patent Application Publication, Tokukai, No. 2004-62146 A (Publication Date: February 26, 2004)

Summary of Invention

[0008] Under the circumstances, the inventors of the present invention conceived of providing, for each pixel, a larger number of storage capacitor wires. In this way, it would be possible to control three or more subpixels included in each pixel so that they have respective different luminance levels. However, if the number of storage capacitor wires is increased, then a complicated con-

figuration is needed so as to control potentials of the storage capacitor wires. In addition, the storage capacitor wires become likely to short-circuit, and an aperture ratio of each pixel is reduced.

[0009] The present invention has been made in view of the above problems, and an object of the present invention is to provide a liquid crystal display device employing a divided-pixel system, in which three or more subpixels included in each pixel are controlled so that they have respective different luminance levels, without increasing the number of storage capacitor wires. In this way, a gray level is displayed by making use of area coverage modulation of the subpixels.

[0010] A liquid crystal display device of the present invention includes: scanning signal lines; first data signal lines and second data signal lines; pixels; and a plurality of storage capacitor wires whose potential is controllable, in a case where a direction in which the scanning signal lines extend is referred to as a row direction, the pixels being arrayed in matrix along the row direction and a column direction, each pixel array in the column direction being provided correspondingly with one of the first data signal lines and one of the second data signal lines, each of the pixels including four subpixels which are connected to identical one of the scanning signal lines, the pixel being associated correspondingly with two storage capacitor wires of the plurality of storage capacitor wires, two subpixels of the four subpixels defining respective capacitances with one of the two storage capacitor wires, one of the two subpixels being connected to the one of the first data signal lines, and an other one of the two subpixels being connected to the one of the second data signal lines, other two subpixels of the four subpixels defining respective capacitances with an other one of the two storage capacitor wires, and one of the other two subpixels being connected to the one of the first data signal lines, and an other one of the other two subpixels being connected to the one of the second data signal lines.

[0011] According to the above configuration, it is possible to control the four subpixels included in the each of the pixels so that the four subpixels have respective different luminance levels. This is achieved by (i) supplying respective different signal potentials (for example, the signal potentials are identical in absolute value but opposite in direction from a reference potential to each other) to the one of the first data signal lines and the one of the second data signal lines, and (ii) individually controlling the two storage capacitor wires. This makes it possible to display a gray level by making use of area coverage modulation of the four subpixels having respective different luminance levels, without increasing the number of storage capacitor wires (i.e., without providing a complicated configuration for controlling a potential of each of the storage capacitor wires). As such, it is possible to reduce viewing angle dependence of a gamma characteristic (e.g., excess brightness of a display screen).

[0012] A liquid crystal display of the present invention

includes: scanning signal lines; first data signal lines and second data signal lines; pixels; and a plurality of storage capacitor wires whose potential is controllable, in a case where a direction in which the scanning signal lines extend is referred to as a row direction, the pixels being arrayed in matrix along the row direction and a column direction, each pixel array in the column direction being provided correspondingly with one of the first data signal lines and one of the second data signal lines, each of the pixels including three subpixels which are connected to identical one of the scanning signal lines, the pixel being associated correspondingly with two storage capacitor wires of the plurality of storage capacitor wires, two subpixels of the three subpixels defining respective capacitances with one of the two storage capacitor wires, one of the two subpixels being connected to the one of the first data signal lines, and an other one of the two subpixels being connected to the one of the second data signal lines, an other subpixel of the three subpixels defining a capacitance with an other one of the two storage capacitor wires, and the other subpixel being connected to the one of the first data signal lines or the one of the second data signal lines.

[0013] According to the above configuration, it is possible to control the three subpixels included in the each of the pixels so that the three subpixels have respective different luminance levels. This is achieved by (i) supplying respective different signal potentials (for example, the signal potentials are identical in absolute value but opposite in direction from a reference potential to each other) to the one of the first data signal lines and the one of the second data signal lines, and (ii) individually controlling the two storage capacitor wires. This makes it possible to display a gray level by making use of area coverage modulation of the three subpixels having respective different luminance levels, without increasing the number of storage capacitor wires (i.e., without providing a complicated configuration for controlling a potential of each of the storage capacitor wires). As such, it is possible to reduce viewing angle dependence of a gamma characteristic (e.g., excess brightness of a display screen).

[0014] The liquid crystal display device of the present invention can be configured such that each pair of the first data signal lines and the second data signal lines receive signal potentials corresponding to identical data but having respective different polarities. According to the configuration, it is possible to simplify data processing and an arithmetic circuit configuration therefor, as compared to a configuration in which the each pair of the first data signal lines and the second data signal lines receive signal potentials corresponding to respective different gray scale levels.

[0015] The liquid crystal display device of the present invention can be configured such that a potential level of each storage capacitor wire shifts after scanning of the scanning signal line that is connected to the subpixel or subpixels facing this storage capacitor wire, the potential

level of each storage capacitor wire shifting at least once after the scanning in a frame in which the scanning is carried out.

[0016] The liquid crystal display device of the present invention can be configured such that potential levels of the two storage capacitor wires associated with the same pixel shift by respective different amounts. Such a liquid crystal display device can be so configured that the two storage capacitor wires associated with the same pixel define substantially identical capacitances with the subpixels corresponding thereto.

[0017] The liquid crystal display device of the present invention can be configured such that potential levels of the two storage capacitor wires associated with the same pixel shift by a same amount. Such a liquid crystal display device can be so configured that the two storage capacitor wires associated with the same pixel define different capacitances one of which is larger than the other, with the subpixels corresponding thereto.

[0018] The liquid crystal display device of the present invention can be configured such that the potential levels of the two storage capacitor wires associated with the same pixel shift in respective opposite directions at a first timing after the scanning.

[0019] The liquid crystal display device of the present invention can be configured such that the signal potentials are reversed in polarity (i) every or every plural horizontal scanning periods or (ii) every vertical scanning period.

[0020] The liquid crystal display device of the present invention can be configured such that each pixel shares one of the plurality of storage capacitor wires with its neighboring pixel adjacent to this pixel in the column direction so that one of the subpixels of this pixel and one of the subpixels of the neighboring pixel define respective capacitances with this storage capacitor wire. This makes it possible to reduce the number of the storage capacitor wires.

[0021] The liquid crystal display device of the present invention can be configured such that the two storage capacitor wires associated with the same pixel shift their potential levels at an identical timing. Alternatively, the liquid crystal display device of the present invention can be configured such that the two storage capacitor wires associated with the same pixel shift their potential levels at respective timings different by one horizontal period from each other.

[0022] The liquid crystal display device of the present invention can be configured such that the potential level of each of the plurality of storage capacitor wires changes so that the potential level is periodically switched between two levels, and potential phases of odd-numbered storage capacitor wires are subsequently shifted in a same direction by a same amount, whereas potential phases of even-numbered storage capacitor wires are subsequently shifted in a same direction by a same amount, where a first storage capacitor wire is one, being positioned upstream in a scanning direction, of two stor-

age capacitor wires corresponding to that pixel, in each pixel array, which is first to receive data among the pixels of the pixel array.

[0023] The liquid crystal display device of the present invention can be configured such that the potential phases of the odd-numbered storage capacitor wires are subsequently shifted in a same direction by two horizontal scanning periods, whereas the potential phases of the even-numbered storage capacitor wires are subsequently shifted in a same direction by two horizontal scanning periods.

[0024] The liquid crystal display device of the present invention can be configured such that a potential level of first one of the plurality of storage capacitor wires and a potential level of second one of the plurality of storage capacitor wires shift in respective opposite directions at an identical timing.

[0025] The liquid crystal display device of the present invention can be configured such that each of the two levels remains constant over a plurality of horizontal scanning periods.

[0026] The liquid crystal display device of the present invention can be configured such each of the plurality of storage capacitor wires performs a potential level shifting at a first timing after the scanning in such a manner that the level shifting is different between successive frames in terms of at least one of (i) a direction in which the potential level of the each of the plurality of storage capacitor wires shifts and (ii) an amount by which the potential level of the each of the plurality of storage capacitor wires shifts. Such a liquid crystal display device can be configured such that the amount by which the potential level shifts at the first timing can either be large or small, and the direction in which the potential level shifts at the first timing can either be positive or negative, and four types of level shift pattern, obtained by combining (i) the amount which is the large or the small and (ii) the direction which is the positive or the negative, are carried out in respective successive four frames in the potential level shiftings at the first timing after the scanning.

[0027] The liquid crystal display device of the present invention can be configured such that each of the pixels includes the four subpixels which are arrayed in matrix along the row direction and the column direction, in such a way that two of the four subpixels are arrayed along the row direction on one side of corresponding one of the scanning signal lines, while other two of the four subpixels are arrayed along the row direction on an other side of the corresponding one of the scanning signal lines, two of subpixels arrayed along the column directions are both connected to corresponding one of the first data signal lines or to corresponding one of the second data signal lines, while two of the subpixels arrayed along the row direction define respective capacitances with identical one of the plurality of storage capacitor wires, and two of the subpixels adjacent to each other in the column direction with no scanning signal line therebetween define respective capacitances with identical one of the plu-

ality of storage capacitor wires. Such a liquid crystal display device can be configured such that, in one of two of the pixels adjacent to each other in the column direction, a first subpixel and a second subpixel, which are arrayed along the column direction, are connected to corresponding one of the first data signal lines, while a third subpixel and a fourth subpixel, which are arrayed along the column direction, are connected to corresponding one of the second data signal lines, and in an other one of the two of the pixels, two subpixels, which are included in a corresponding subpixel array including the first subpixel and the second subpixel, are connected to the corresponding one of the first data signal lines, while two subpixels, which are included in a corresponding subpixel array including the third subpixel and the fourth subpixel, are connected to the corresponding one of the second data signal lines. Alternatively, such a liquid crystal display device can be configured such that, in one of two of the pixels adjacent to each other in the column direction, a first subpixel and a second subpixel, which are arrayed along the column direction, are connected to corresponding one of the first data signal lines, while a third subpixel and a fourth subpixel, which are arrayed along the column direction, are connected to corresponding one of the second data signal lines, and in an other one of the two of the pixels, two subpixels, which are included in a corresponding subpixel array including the first subpixel and the second subpixel, are connected to the corresponding one of the second data signal lines, while two subpixels, which are included in a corresponding subpixel array including the third subpixel and the fourth subpixel, are connected to the corresponding one of the first data signal lines.

[0028] The liquid crystal display device of the present invention can be configured such that each of the pixels includes the three subpixels, in such a way that two of the three subpixels are arrayed along the row direction on one side of corresponding one of the scanning signal lines, while an other one of the three subpixels is provided on an other side of the corresponding one of the scanning signal lines, two of subpixels arrayed along the row direction define respective capacitances with identical one of the plurality of storage capacitor wires, and two of the subpixels adjacent to each other in the column direction with no scanning signal line therebetween define respective capacitances with identical one of the plurality of storage capacitor wires. Such a liquid crystal display device can be configured such that, in one of two of the pixels adjacent to each other, a first subpixel and a third subpixel, which are arrayed along the row direction, define respective capacitances with identical one of the plurality of storage capacitor wires, while a second subpixel defines a capacitance with another one of the plurality of storage capacitor wires, and in an other one of the two of the pixels, two subpixels arrayed along the row direction define respective capacitances with the another one of the plurality of storage capacitor wires. Alternatively, such a liquid crystal display device can be configured

such that, in one of two of the pixels adjacent to each other, a first subpixel and a third subpixel, which are arrayed along the row direction, define respective capacitances with identical one of the plurality of storage capacitor wires, while a second subpixel defines a capacitance with another one of the plurality of storage capacitor wires, and in an other one of the two of the pixels, a pixel, which is other than two subpixels arrayed along the row direction, defines a capacitance with the another one of the plurality of storage capacitor wires.

[0029] The liquid crystal display device of the present invention can be configured such that, in a case where a first storage capacitor wire is one, being positioned upstream in a scanning direction, of two storage capacitor wires corresponding to a pixel, in each pixel array, which is first to receive data among pixels of the pixel array, a potential level of each odd-numbered storage capacitor wire changes so that the potential level is periodically switched between two levels, and potential phases of the odd-numbered storage capacitor wires subsequently shift in a same direction by a same amount, while a potential level of each even-numbered storage capacitor wire remains constant, or the potential level of each even-numbered storage capacitor wire changes so that the potential level is periodically switched between two levels, and potential phases of the even-numbered storage capacitor wires subsequently shift in a same direction by a same amount, while the potential level of each odd-numbered storage capacitor wire substantially remains constant.

[0030] The liquid crystal display device of the present invention can be configured such that each pixel array is provided correspondingly with one of the first data signal lines and one of the second data signal lines, and each pixel array is such that (i) the first data signal line of a pixel array and (ii) the second data signal line of a neighboring pixel array adjacent to this pixel array are adjacent to each other with no pixel array therebetween, and receive signal potentials having respective different polarities. Alternatively, the liquid crystal display device can be configured such that the one of the first data signal lines and the one of the second data signal lines receive signal potentials having an identical polarity.

[0031] The liquid crystal display device of the present invention can be configured such that each subpixel includes a pixel electrode and a transistor, the transistor is connected to (i) corresponding one of the scanning signal lines and (ii) corresponding one of the first data signal lines or corresponding one of the second data signal lines, and the pixel electrode or an electrode electrically connected with the pixel electrode defines a capacitance with corresponding one of the storage capacitor wires.

[0032] The liquid crystal display device of the present invention can be configured such that, in each of the pixels, a gap between (i) one pixel electrode included in one of two subpixels arrayed along the row direction and (ii) another pixel electrode included in an other one of the

two subpixels arrayed along the row direction serves as an alignment control structure. Such a liquid crystal display device can be configured such that the gap is in a V shape as seen in the row direction.

[0033] A potential of each of the plurality of storage capacitor wires is controlled by, for example, a storage capacitor wire signal (CS signal) supplied to the each of the plurality of storage capacitor wires. In this case, the potential of each of the plurality of storage capacitor wires can be referred to as a level (potential) of the storage capacitor wire signal.

[0034] An active matrix substrate of the present invention includes: scanning signal lines; first data signal lines and second data signal lines; pixel regions; and a plurality of storage capacitor wires, in a case where a direction in which the scanning signal lines extend is referred to as a row direction, the pixel regions being arrayed in matrix along the row direction and a column direction, each pixel region array in the column direction being provided correspondingly with one of the first data signal lines and one of the second data signal lines, each of the pixel regions including four pixel electrodes which are connected to identical one of the scanning signal lines via respective transistors, the pixel region being associated correspondingly with two storage capacitor wires of the plurality of storage capacitor wires, two pixel electrodes of the four pixel electrodes defining respective capacitances with one of the two storage capacitor wires, one of the two pixel electrodes being connected to the one of the first data signal lines via corresponding one of the transistors, and an other one of the two pixel electrodes being connected to the one of the second data signal lines via corresponding one of the transistors, other two pixel electrodes of the four pixel electrodes defining respective capacitances with an other one of the two storage capacitor wires, and one of the other two pixel electrodes being connected to the one of the first data signal lines via corresponding one of the transistors, and an other one of the other two pixel electrodes being connected to the one of the second data signal lines via corresponding one of the transistors.

[0035] An active matrix substrate of the present invention includes: scanning signal lines; first data signal lines and second data signal lines; pixel regions; and a plurality of storage capacitor wires, in a case where a direction in which scanning signal lines extend is referred to as a row direction, the pixel regions being arrayed in matrix along the row direction and a column direction, each pixel region array in the column direction being provided correspondingly with one of the first data signal lines and one of the second data signal lines, each of the pixel regions including three pixel electrodes which are connected to identical one of the scanning signal lines via respective transistors, the pixel region being associated correspondingly with two storage capacitor wires of the plurality of storage capacitor wires, two pixel electrodes of the three pixel electrodes defining respective capacitances with one of the two storage capacitor wires, one of the

two pixel electrodes being connected to the one of the first data signal lines via corresponding one of the transistors, and an other one of the two pixel electrodes being connected to the one of the second data signal lines via corresponding one of the transistors, an other pixel electrode of the three pixel electrodes defining a capacitance with an other one of the two storage capacitor wires, and the other pixel electrode being connected to the one of the first data signal lines or the one of the second data signal lines via corresponding one of the transistors.

[0036] A liquid crystal panel of the present invention includes: any of the above active matrix substrates; and a substrate including a common electrode. A liquid crystal display unit of the present invention includes: the above liquid crystal panel; and a driver. A television receiver of the present invention includes: any of the above liquid crystal display devices; and a tuner section for receiving television broadcasting.

[0037] As so far described, according to the liquid crystal display device of the present invention, it is possible to control three or more subpixels included in each of the pixels so that the subpixels have respective different luminance levels, without increasing the number of storage capacitor wires (i.e., without providing a complicated configuration for controlling a potential of each of the storage capacitor wires). Accordingly, it is possible to display a gray level by making use of area coverage modulation of the three or more subpixels. As such, it is possible to reduce viewing angle dependence of a gamma characteristic (e.g., excess brightness of a display screen).

Brief Description of Drawings

[0038]

Fig. 1

(a) of Fig. 1 is a view schematically illustrating a display section of a liquid crystal display device according to Embodiment 1. (b) of Fig. 1 is a view schematically illustrating how the display section is driven.

Fig. 2

(a) of Fig. 2 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 1. (b) of Fig. 2 is a view schematically illustrating how the display section is driven.

Fig. 3

(a) of Fig. 3 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 1. (b) of Fig. 3 is a view schematically illustrating how the display section is driven.

Fig. 4

(a) of Fig. 4 is a view schematically illustrating a display section of the liquid crystal display device ac-

cording to Embodiment 1. (b) of Fig. 4 is a view schematically illustrating how the display section is driven.

Fig. 5

(a) of Fig. 5 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 1. (b) of Fig. 5 is a view schematically illustrating how the display section is driven.

Fig. 6

(a) of Fig. 6 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 1. (b) of Fig. 6 is a view schematically illustrating how the display section is driven.

Fig. 7 (a) of Fig. 7 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 1. (b) of Fig. 7 is a view schematically illustrating how the display section is driven.

Fig. 8

(a) of Fig. 8 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 1. (b) of Fig. 8 is a view schematically illustrating how the display section is driven.

Fig. 9

(a) of Fig. 9 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 1. (b) of Fig. 9 is a view schematically illustrating how the display section is driven.

Fig. 10

(a) of Fig. 10 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 1. (b) of Fig. 10 is a view schematically illustrating how the display section is driven.

Fig. 11

(a) of Fig. 11 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 1. (b) of Fig. 11 is a view schematically illustrating how the display section is driven.

Fig. 12

Fig. 12 is a timing diagram indicating how the display section of (a) and (b) of Fig. 1 is driven.

Fig. 13

Fig. 13 is a timing diagram indicating how the display

section of (a) and (b) of Fig. 3 is driven.

Fig. 14

Fig. 14 is a timing diagram indicating how the display section of (a) and (b) of Fig. 8 is driven.

Fig. 15

Fig. 15 is a timing diagram indicating how the display section of (a) and (b) of Fig. 9 is driven.

Fig. 16

Fig. 16 is a timing diagram indicating how the display section of (a) and (b) of Fig. 11 is driven.

Fig. 17

(a) and (b) of Fig. 17 are plan views each illustrating a specific configuration of the display section of (b) of Fig. 1.

Fig. 18

Fig. 18 is a plan view illustrating another specific configuration of the display section of (b) of Fig. 1.

Fig. 19

(a) and (b) of Fig. 19 are plan views illustrating specific configurations of the display sections of (b) of Fig. 6 and (b) of Fig. 7, respectively.

Fig. 20

Fig. 20 is a plan view illustrating a specific configuration of the display section of (b) of Fig. 11.

Fig. 21

Fig. 21 is a plan view illustrating another specific configuration of the display section of (b) of Fig. 11.

Fig. 22

(a) of Fig. 22 is a view schematically illustrating the display section of (b) of Fig. 1. (b) of Fig. 22 is a view schematically illustrating how the display section is driven.

Fig. 23

(a) of Fig. 23 is a view schematically illustrating the display section of (b) of Fig. 2. (b) of Fig. 23 is a view schematically illustrating how the display section is driven.

Fig. 24

(a) of Fig. 24 is a view schematically illustrating the display of (b) of Fig. 3. (b) of Fig. 24 is a view schematically illustrating how the display section is driven.

Fig. 25

(a) of Fig. 25 is a view schematically illustrating the display section of (b) of Fig. 8. (b) of Fig. 25 is a view schematically illustrating how the display section is

driven.

Fig. 26

(a) of Fig. 26 is a view schematically illustrating a display section of a liquid crystal display device according to Embodiment 2. (b) of Fig. 26 is a view schematically illustrating how the display section is driven.

Fig. 27

(a) of Fig. 27 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 27 is a view schematically illustrating how the display section is driven.

Fig. 28

(a) of Fig. 28 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 28 is a view schematically illustrating how the display section is driven.

Fig. 29

(a) of Fig. 29 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 29 is a view schematically illustrating how the display section is driven.

Fig. 30

(a) of Fig. 29 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 30 is a view schematically illustrating how the display section is driven.

Fig. 31

(a) of Fig. 31 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 31 is a view schematically illustrating how the display section is driven.

Fig. 32

(a) of Fig. 32 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 32 is a view schematically illustrating how the display section is driven.

Fig. 33

(a) of Fig. 33 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 33 is a view schematically illustrating how the display section is driven.

Fig. 34

(a) of Fig. 34 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 34 is a view schematically illustrating how the display section is driven.

Fig. 35

(a) of Fig. 35 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 35 is a view schematically illustrating how the display section is driven.

Fig. 36

(a) of Fig. 36 is a view schematically illustrating a display section of the liquid crystal display device according to Embodiment 2. (b) of Fig. 36 is a view schematically illustrating how the display section is driven.

Fig. 37

Fig. 37 is a timing diagram indicating how the display section of (b) of Fig. 26 is driven.

Fig. 38

Fig. 38 is an equivalent circuit diagram of a pixel P of (b) of Fig. 1.

Fig. 39

Fig. 39 is an equivalent circuit diagram of a pixel P of (b) of Fig. 26.

Fig. 40

Fig. 40 is a block diagram illustrating a configuration of a liquid crystal display device (employing a divided-pixel system) of the present invention.

Fig. 41

Fig. 41 is a block diagram illustrating a configuration of a data rearrangement circuit of the liquid crystal display device of the present invention.

Fig. 42

Fig. 42 is a block diagram illustrating a configuration of a source driver of the liquid crystal display device of the present invention.

Fig. 43

Fig. 43 is a block diagram for describing a function of the liquid crystal display device of the present invention.

Fig. 44

Fig. 44 is a block diagram for describing a function of a television receiver of the present invention.

Fig. 45

Fig. 45 is an exploded perspective view illustrating a configuration of the television receiver of the present invention.

Fig. 46

Fig. 46 is a circuit diagram illustrating a configuration of one pixel included in a conventional liquid crystal

display device.

Reference Signs List

[0039]

10a, 10b	Display Section
S1, S2, s1, s2	First and Second Data Signal Lines
P	Pixel
G1 through G4	Scanning Signal Lines
Cs1 through Cs5	Storage Capacitor Wires
PE	Pixel Electrode
84	Liquid Crystal Display Unit
601	Television Receiver
800	Liquid Crystal Display Device

Description of Embodiments

[0040] Exemplary embodiments of the present invention are described below with reference to Figs. 1 through 45. A liquid crystal display device of the present invention (e.g., a normally-black type liquid crystal display device) includes, in its display section, scanning signal lines and data signal lines which are orthogonal to each other. For the sake of easy description, a direction in which the scanning signal lines extend is referred to as a row direction, whereas a direction in which the data signal lines extend is referred to as a column direction. The display section further includes storage capacitor wires which extend in the row direction and are capable of governing potential therein, and pixels arrayed in matrix along the row direction and the column direction. Each of the pixels includes three or four subpixels. Each of the subpixels is connected to corresponding one of the data signal lines and to corresponding one of the scanning signal lines. Further, each of the subpixels and corresponding two of the storage capacitor wires define respective capacitances (storage capacitances). More specifically, each of the subpixels includes a transistor and a pixel electrode. The transistor is connected to corresponding one of the scanning signal lines and to corresponding one of the data signal lines. Further, (i) the pixel electrode or an electrode (storage capacitor electrode) electrically connected with the pixel electrode and (ii) corresponding one of the storage capacitor wires define a capacitance.

[Embodiment 1]

[0041] The following description discusses an embodiment of Fig. 1. (a) of Fig. 1 is a timing diagram illustrating how a display section of a liquid crystal display device of the present invention is driven. (b) of Fig. 1 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 1 illustrates the display section at a timing t1 of (a) of Fig. 1. The center of (b) of Fig. 1 illustrates the display section at a timing t2 of (a) of Fig. 1. The right side of (b) of Fig. 1 illustrates the display

section at a timing t3 of (a) of Fig. 1. As illustrated in (b) of Fig. 1, a display section 10a is so configured that (i) first and second data signal lines are provided correspondingly to each pixel array at its both side ends and (ii) each pixel includes four subpixels which are connected to identical one of the scanning signal lines. Each pixel is associated correspondingly with two storage capacitor wires. In each pixel, two subpixels of the four subpixels and one of the two storage capacitor wires define respective capacitances. Further, one of the two subpixels is connected to corresponding one of the first data signal lines, whereas the other one of the two subpixels is connected to corresponding one of the second data signal lines. Meanwhile, the other two subpixels of the four subpixels and the other one of the two storage capacitor wires define respective capacitances. Further, one of the other two subpixels is connected to the corresponding one of the first data signal lines, whereas the other one of the other two subpixels is connected to the corresponding one of the second signal lines.

[0042] More specifically, in each pixel, two of the four subpixels are arrayed along a row direction on one side of corresponding one of the scanning signal lines, while the other two of the four subpixels are arrayed along the row direction on the other side of the corresponding one of the scanning signal lines. In this way, the four subpixels are arrayed in matrix along the row direction and the column direction. Meanwhile, two of the four subpixels arrayed along the column direction are both connected to corresponding one of the first data signal lines or both connected to corresponding one of the second data signal lines, while two of the four subpixels arrayed along the row direction define respective capacitances with corresponding one of the storage capacitor wires. Further, in one of two pixels adjacent to each other in the column direction, two subpixels (first and second subpixels), of the four subpixels, arrayed along the column direction are connected to corresponding one of the first data signal lines, while the other two subpixels (third and fourth subpixels), of the four subpixels, arrayed along the column direction are connected to corresponding one of the second data signal lines. On the other hand, in the other one of the two pixels adjacent to each other in the column direction, two subpixels, of the four subpixels, included in a subpixel array including the first subpixel and the second subpixel are connected to the corresponding one of the first data signal lines, while the other two subpixels, of the four subpixels, included in a subpixel array including the third subpixel and the fourth subpixel are connected to the corresponding one of the second data signal lines. Moreover, (i) one, of the second data signal lines, corresponding to one of two pixel arrays adjacent to each other and (ii) one, of the first data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other are adjacent to each other with no pixel array therebetween.

[0043] Further, (i) a subpixel included in one of two pixels adjacent to each other in the column direction and

(ii) a subpixel included in the other one of the two pixels adjacent to each other in the column direction define respective capacitances with identical one of the storage capacitor wires. Specifically, two subpixels, which are adjacent to each other in the column direction with no scanning signal line therebetween, define respective capacitances with identical one of the storage capacitor wires.

[0044] For example, first and second data signal lines S1 and s1 are provided corresponding to a pixel array including a pixel P, and the pixel P includes four subpixels 1a through 1d which are connected to a scanning signal line G1. Specifically, in the pixel P, the subpixels 1a and 1c are arrayed along the row direction on one side (the upper side in (b) of Fig. 1) of the scanning signal line G1, while the subpixels 1b and 1d are arrayed along the row direction on the other side (the lower side in (b) of Fig. 1) of the scanning signal line G1. In this way, the four subpixels 1a through 1d are arrayed in matrix along the row direction and the column direction. The subpixels 1a and 1b (first and second subpixels) arrayed along the column direction are both connected to the first data signal line S1, while the subpixels 1c and 1d (third and fourth subpixels) arrayed along the column direction are both connected to the second data signal line s1. Further, the subpixels 1a and 1c arrayed along the row direction define respective capacitances with a storage capacitor wire Cs1, while the subpixels 1b and 1d arrayed along the row direction define respective capacitances with a storage capacitor wire Cs2.

[0045] Similarly, a pixel adjacent to the pixel P in the column direction includes four subpixels 2a through 2d, which are connected to a scanning signal line G2. Specifically, the subpixels 2a and 2c are arrayed along the row direction on one side (the upper side of (b) of Fig. 1) of the scanning signal line G2, while the subpixels 2b and 2d are arrayed along the row direction on the other side (the lower side of (b) of Fig. 1) of the scanning signal line G2. The subpixels 2a and 2b which are included in a pixel array including the subpixels 1a and 1b of the pixel P are both connected to the first signal line S1, while the subpixels 2c and 2d which are included in a pixel array including the subpixels 1c and 1d of the pixel P are both connected to the second data signal line s1. Further, the subpixels 2a and 2c arrayed along the row direction define respective capacitances with a storage capacitor wire Cs2, while the subpixels 2b and 2d arrayed along the row direction define respective capacitances with a storage capacitor wire Cs3.

[0046] Meanwhile, first and second data signal lines S2 and s2 are provided correspondingly to a pixel array adjacent to the pixel array including the pixel P. A pixel adjacent to the pixel P in the row direction includes four subpixels 1A through 1D, which are connected to the scanning signal line G1. Specifically, the subpixels 1A and 1C are arrayed along the row direction on one side (the upper side in (b) of Fig. 1) of the scanning signal line G1, while the subpixels 1B and 1D are arrayed along the

row direction on the other side (the lower side in (b) of Fig. 1) of the scanning signal line G1. The subpixels 1A and 1B arrayed along the column direction are both connected to the first data signal line S2, while the subpixels 1C and 1D arrayed along the column direction are both connected to the second data signal line s2. Further, the subpixels 1A and 1C arrayed along the row direction define respective capacitances with the storage capacitor wire Cs1, while the subpixels 1B and 1D arrayed along the row direction define respective capacitances with the storage capacitor wire Cs2.

[0047] As described above, (i) a subpixel (1b, 1d, 1B, or 1D) included in one of two pixels adjacent to each other in the column direction and (ii) a subpixel (2a, 2c, 2A, or 2C) included in the other one of the two pixels adjacent to each other in the column direction define respective capacitances with the storage capacitor wire Cs2. In other words, two subpixels adjacent to each other in the column direction with no scanning signal line therebetween (i.e., the subpixels 1b and 2a, 1d and 2c, 1B and 2A, or 1D and 2C) define respective capacitances with identical one of the storage capacitor wires (i.e., the storage capacitor wire Cs2).

[0048] Fig. 38 illustrates an equivalent circuit of the pixel P. As illustrated in Fig. 38, the pixel P includes four subpixels 1a through 1d. The subpixel 1a includes a transistor TRa and a pixel electrode PEa. The subpixel 1b includes a transistor TRb and a pixel electrode PEb. The subpixel 1c includes a transistor TRc and a pixel electrode PEC. The subpixel 1d includes a transistor TRd and a pixel electrode PED.

[0049] The transistors TRa and TRb are both connected to the scanning signal line G1 and to the data signal line S1, while the transistors TRc and TRd are both connected to the scanning signal line G1 and the data signal line s1. The pixel electrode PEa and the storage capacitor wire Cs1 define a capacitance CCSa, while the pixel electrode PEa and a common electrode (counter electrode) com define CLCa. The pixel electrode PEb and the storage capacitor wire Cs2 define a capacitance CCSb, while the pixel electrode PEb and the common electrode (counter electrode) com define CLCb. The pixel electrode PEC and the storage capacitor wire Cs1 define a capacitance CCSc, while the pixel electrode PEC and the common electrode (counter electrode) com define CLCc. The pixel electrode PED and the storage capacitor wire Cs2 define a capacitance CCSd, while the pixel electrode PED and the common electrode (counter electrode) com define CLCd.

[0050] Now, refer back to (a) and (b) of Fig. 1. Each pair of the first and second data signal lines receive signal potentials corresponding to identical data (gray scale data) but having respective different polarities (for example, assuming that Vcom is a reference potential, the signal potentials are identical in absolute value but opposite in direction from Vcom to each other). Each of the polarities of the signal potentials is reversed for every one (1) vertical scanning period. One, of the first data signal lines,

corresponding to one of two pixel arrays adjacent to each other and one, of the second data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other receive signal potentials having respective different polarities. An example is as follows. First, in a frame, the first data signal lines S1 and S2 receive signal potentials having a positive polarity, while the second data signal lines s1 and s2 receive signal potentials having a negative polarity. Then, in a subsequent frame, the first data signal lines S1 and S2 receive the signal potentials having the negative polarity, while the second data signal lines s1 and s2 receive the signal potentials having the positive polarity.

[0051] Further, as illustrated in (a) and (b) of Fig. 1, a potential level of each of the storage capacitor wires shifts after scanning of a scanning signal line that is connected to the subpixel or subpixels facing the storage capacitor wire. The potential level of each of the storage capacitor wires shifts a plurality of times after the scanning in a frame in which the scanning is carried out. Specifically, the potential level of each of the storage capacitor wires so changes that the potential level is periodically switched between two levels during one frame period. In a case where a first storage capacitor wire is one, being positioned upstream in a scanning direction, of two storage capacitor wires corresponding to a pixel which is included in each pixel array and is first to receive data among pixels of the pixel array, potential phases of odd-numbered storage capacitor wires are subsequently shifted in the same direction by the same amount. Similarly, potential phases of even-numbered storage capacitor wires are subsequently shifted in the same direction by the same amount. Further, each of the above two levels remains constant over a plurality of horizontal scanning periods.

[0052] More specifically, a potential phase of each odd-numbered storage capacitor wire leads a potential phase of a subsequent odd-numbered storage capacitor wire by two horizontal scanning periods, while a potential phase of each even-numbered storage capacitor wire leads a potential phase of a subsequent even-numbered storage capacitor wire by two horizontal scanning periods. The potential level of the first storage capacitor wire and the potential level of a second storage capacitor wire shift, two horizontal scanning periods after start of a corresponding frame, in respective opposite directions at the same timing. Here, the potential level of each odd-numbered storage capacitor wires is switched between two levels whose difference is identical, while the potential level of each even-numbered storage capacitor wires is switched between two levels whose difference is also identical. Note however that the difference between the two levels between which the potential level of each odd-numbered storage capacitor wires is switched is larger than the difference between the two levels between which the potential level of each even-numbered storage capacitor wires is switched. Further, the four subpixels included in each pixel have an identical area size. Fur-

thermore, (i) each of the capacitances defined by two, of the four subpixels, arrayed along the row direction and corresponding one of the storage capacitor wires and (ii) each of the capacitances defined by the other two of the four subpixels and corresponding one of the storage capacitor wires are identical.

[0053] For example, a potential level of the storage capacitor wire Cs1 shifts after scanning of the scanning signal line G1 that is connected to the subpixel (e.g., 1a or 1c) facing the storage capacitor wire Cs1. The potential level of the storage capacitor wire Cs1 shifts a plurality of times after the scanning during a frame period during which the scanning is carried out. On the other hand, a potential level of the storage capacitor wire Cs2 shifts after scanning of the scanning signal lines G1 and G2 that are connected to the subpixels (e.g., 1b, 1d, 1B, 1D, 2a, 2c, 2A, or 2C) facing the storage capacitor wire Cs2. The potential level of the storage capacitor wire Cs2 shifts a plurality of times after the scanning during a frame period during which the scanning is carried out. That is, the potential level of each of the storage capacitor wires (Cs1, Cs2, and so on) so changes that the potential level is switched between two levels (High and Low) for every 10 horizontal scanning periods (10H). In a case where a first storage capacitor wire is the storage capacitor wire Cs1, which is positioned more upstream in the scanning direction than the storage capacitor wire Cs2 (the storage capacitor wires Cs1 and Cs2 correspond to a pixel (e.g., pixel P) which is first to receive data among pixels in corresponding one of the pixel arrays), a potential phase of an odd-numbered storage capacitor wire (e.g., Cs1) leads a potential phase of a subsequent odd-numbered storage capacitor wire (e.g., Cs3) by two horizontal scanning periods. Similarly, a potential phase of an even-numbered storage capacitor wire (e.g., Cs2) leads a potential phase of a subsequent even-numbered storage capacitor wire (e.g., Cs4) by two horizontal scanning periods. The potential level of the storage capacitor wire Cs1 (first storage capacitor wire) shifts in a positive direction (L to H) at the timing t2, which is two horizontal scanning periods (2H) after the start of the frame. The potential level of the storage capacitor wire Cs2 (second storage capacitor wire) shifts in a negative direction (H to L) at the timing t2, which is two horizontal scanning periods (2H) after the start of the frame. Further, a difference between two potential levels (level shift amount) between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches remains constant throughout one (1) frame period, while a difference between two potential levels (level shift amount) between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches also remains constant throughout one (1) frame period. Note however that the difference between the two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches is larger than the difference between the two potential levels between which the potential level

of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches. Further, for example, four subpixels (1a through 1d) included in the pixel P each have the identical area size. Furthermore, (i) each of the capacitances defined by two (1a and 1c), of the four subpixels, arrayed along the row direction, and the storage capacitor wire Cs1 and (ii) each of the capacitances defined by the other two (1b and 1d) of the four subpixels and the storage capacitor wire Cs2 are identical in value.

[0054] The display section 10a configured as above, in which the first and second data signal lines and the storage capacitor wires are controlled as above, is driven in a manner shown in (b) of Fig. 1. The following description discusses how the pixel P is driven, with reference to Figs. 1, 12, and 38. Fig. 12 is a timing diagram illustrating (i) potentials of the first and second data signal lines S1 and s1, (ii) potentials of the storage capacitor wires Cs1 and Cs2, and (iii) potentials of the subpixels (1a through 1d) included in the pixel P (i.e., potentials of pixel electrodes included in the respective subpixels).

[0055] In Fig. 38, assuming that (i) VS represents a signal potential supplied to the data signal line S1, (ii) Vs represents a signal potential supplied to the data signal line s1, (iii) VF represents a feed-through potential when transistors are in an OFF state, (iv) $2 \times Vp$ represents a level shift amount (a difference between High and Low) of the potential level of the storage capacitor wire Cs1, (v) $2 \times Vq$ represents a level shift amount (a difference between High and Low) of the potential level of the storage capacitor wire Cs2, and (vi) $Kca = CCSa/(CLCa + CCSa)$, $KCb = CCSb/(CLCb + CCSb)$, $KCc = CCSc/(CLCc + CCSc)$, and $KCd = CCSd/(CLCd + CCSd)$, an effective potential of a pixel electrode 1a is represented by $VS - VF + Kca \times Vp$, an effective potential of a pixel electrode 1b is represented by $VS - VF - Kcb \times Vq$, an effective potential of a pixel electrode 1c is represented by $Vs - VF + Kcc \times Vp$, and an effective potential of a pixel electrode 1d is represented by $Vs - VF - Kcd \times Vq$.

[0056] As illustrated in Figs. 1 and 12, according to the embodiment of Fig. 1, $VS = Vda$ (a positive signal potential corresponding to gray scale data da), $Vs = -Vda$ (a negative signal potential corresponding to gray scale data da), and $Kca = Kcb = Kcc = Kcd = KC$. Accordingly, the effective potential of the pixel electrode 1a is represented by $Vda - VF + KC \times Vp$, the effective potential of the pixel electrode 1b is represented by $Vda - VF - KC \times Vq$, the effective potential of the pixel electrode 1c is represented by $-Vda - VF + KC \times Vp$, and the effective potential of the pixel electrode 1d is represented by $-Vda - VF - KC \times Vq$.

[0057] Further, since the Vp is greater than Vq , it is assumed that a super-bright subpixel has a luminance level higher than that of a bright subpixel, whereas a super-dark subpixel has a luminance level lower than that of a dark subpixel. Accordingly, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (hereinafter may be referred to as "M"),

the subpixel 1b serves as a dark subpixel (hereinafter may be referred to as "a"), the subpixel 1c serves as a super-dark subpixel (hereinafter may be referred to as "A"), and the subpixel 1d serves as a bright subpixel (hereinafter may be referred to as "m"). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a dark subpixel (a), the subpixel 2b serves as a super-bright subpixel (M), the subpixel 2c serves as a bright subpixel (m), and the subpixel 2d serves as a super-dark subpixel (A). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as the dark subpixel (a), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a bright subpixel (m).

[0058] As described above, according to the embodiment of Fig. 1, it is possible to display a gray level by (i) controlling the four subpixels included in each of the pixels so that they have respective different luminance levels and (ii) making use of area coverage modulation of the four subpixels, without increasing the number of storage capacitor wires (i.e., without providing a complicated configuration for controlling a potential of each of the storage capacitor wires). Accordingly, it is possible to reduce viewing angle dependence of a gamma characteristic (e.g., excess brightness of a display screen). Moreover, each pair of the first and second data signal lines receive signal potentials having respective different polarities but corresponding to the same gray scale level. This makes it possible to simplify data processing and an arithmetic circuit configuration therefor, as compared to a configuration in which data signal lines receive respective different signal potentials corresponding to respective different gray scale levels so that the subpixels have respective different luminance levels.

[0059] Furthermore, in each of the pixel arrays, a super-bright subpixel and a bright subpixel are not adjacent to each other, while a super-dark subpixel and a dark subpixel are not adjacent to each other. Accordingly, it is possible to prevent display roughness and display unevenness in a line form in the column direction. Moreover, in each of the subpixel arrays, (i) super-bright subpixels and super-dark subpixels are alternately provided, or (ii) bright subpixels and dark subpixels are alternately provided. Accordingly, it is possible to prevent display roughness and display unevenness in a line form in the row direction. Moreover, since the potential level of each of the storage capacitor wires is periodically shifted, it is possible to control the potential phase of each of the storage capacitor wires so that every predetermined number of storage capacitor wires are identical in potential phase. This makes it possible to simplify a configuration for controlling the potential of each of the storage capacitor wires. In addition, since the potential level shifts every 10H, it is possible to shift the potential level by a sufficient amount even if a waveform distortion occurs.

[0060] (a) of Fig. 17 illustrates an exemplary configu-

ration of the display section 10a. As illustrated in (a) of Fig. 17, in the pixel P, (i) a source electrode and a drain electrode of each of four transistors included in the pixel P are provided on the scanning signal line G1 passing in the middle of the pixel P, (ii) the storage capacitor wire Cs1 faces the pixel electrode PEa and the pixel electrode PEc included respectively in the subpixel 1a and the subpixel 1c, and (iii) the storage capacitor wire Cs2 faces the pixel electrode PEb and the pixel electrode PED included respectively in the subpixel 1b and the subpixel 1d. Here, a slit which separates between pixel electrodes, included in the pixel P, adjacent to each other in the row direction can be in a linear shape in the column direction (see (a) of Fig. 17). Alternatively, the slit can be in a 90-degree rotated V shape (see (b) of Fig. 17). The configuration in (b) of Fig. 17 is preferably applicable for use in, for example, an MVA (multidomain vertical alignment) liquid crystal display device. In an MVA configuration, ribs and/or slits in the 90-degree rotated V shape are provided on surfaces, of pixel electrodes, facing a color filter substrate.

[0061] According to Figs. 1 and 17, each of the pixel arrays is provided correspondingly with one of the first signal lines and one of the second data signal lines at both side ends of the pixel array. However, the present embodiment is not limited to this configuration. For example, as illustrated in Fig. 18, the present embodiment can be configured such that the first and second data signal lines S1 and s1 are provided respectively at one side end and in the middle (e.g., in a space between the subpixels 1a and 1c adjacent to each other in the row direction) of corresponding one of the pixel arrays. According to this arrangement, it is possible to reduce the likelihood that a short circuit occurs between the first data signal line S1 and the second data signal line s1. Further, in a case where the first data signal line S1 and the second data signal line s1 receive signals having respective different polarities, the arrangement of the first and second data signal lines S1 and s1 as in Fig. 18 makes it possible to cancel variation, in a potential of each of the subpixels, due to a parasitic capacitance defined by (i) the data signal lines S1 and s1 and (ii) the subpixels. As such, it is possible to improve a display quality.

[0062] The following description discusses an embodiment of Fig. 2. (a) of Fig. 2 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 2 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 2 illustrates the display section at a timing t1 of (a) of Fig. 2. The center of (b) of Fig. 2 illustrates the display section at a timing t2 of (a) of Fig. 2. The right side of (b) of Fig. 2 illustrates the display section at a timing t3 of (a) of Fig. 2. The embodiments of Figs. 1 and 2 are different from each other in control of the storage capacitor wires. Therefore, (i) the configuration of the display section and (ii) control of the first and second data signal lines of the embodi-

ment of Fig. 2 are same as those of Fig. 1.

[0063] As illustrated in (a) and (b) of Fig. 2, a potential level of the storage capacitor wire Cs1 shifts after scanning of the scanning signal line G1 that is connected to the subpixel (e.g., 1a or 1c) facing the storage capacitor wire Cs1. The potential level of the storage capacitor wire Cs1 shifts a plurality of times after the scanning during a frame period during which the scanning is carried out. On the other hand, a potential level of the storage capacitor wire Cs2 shifts after scanning of the scanning signal lines G1 and G2 that are connected to the subpixels (e.g., 1b, 1d, 1B, 1D, 2a, 2c, 2A, or 2C) facing the storage capacitor wire Cs2. The potential level of the storage capacitor wire Cs2 shifts a plurality of times after the scanning during a frame period during which the scanning is carried out. That is, the potential level of each of the storage capacitor wires (Cs1, Cs2, and so on) changes so that the potential level is switched between two levels (High and Low) for every 10 horizontal scanning periods (10H). In a case where a first storage capacitor wire is the storage capacitor wire Cs1, which is positioned more upstream in the scanning direction than the storage capacitor wire Cs2 (the storage capacitor wires Cs1 and Cs2 correspond to a pixel (e.g., pixel P) which is first to receive data among pixels in corresponding one of the pixel arrays), a potential phase of an odd-numbered storage capacitor wire (e.g., Cs1) leads a potential phase of a subsequent odd-numbered storage capacitor wire (e.g., Cs3) by two horizontal scanning periods. Similarly, a potential phase of an even-numbered storage capacitor wire (e.g., Cs2) leads a potential phase of a subsequent even-numbered storage capacitor wire (e.g., Cs4) by two horizontal scanning periods. The potential level of the storage capacitor wire Cs1 (first storage capacitor wire) shifts in the positive direction (L to H) at the timing t2, which is two horizontal scanning periods (2H) after the start of the frame. The potential level of the storage capacitor wire Cs2 (second storage capacitor wire) shifts in the positive direction (L to H) at the timing t2, which is two horizontal scanning periods (2H) after the start of the frame. Further, a difference between two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches remains constant, while a difference between two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches also remains constant. Note however that the difference between the two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches is larger than the difference between the two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches.

[0064] According to the embodiment, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a bright subpixel (m), the subpixel 1c serves as a super-

dark subpixel (A), and the subpixel 1d serves as a dark subpixel (a). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a bright subpixel (m), the subpixel 2b serves as a super-bright subpixel (M), the subpixel 2c serves as a dark subpixel (a), and the subpixel 2d serves as a super-dark subpixel (A). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a bright subpixel (m), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a dark subpixel (a).

[0065] According to the embodiment of Fig. 2, it is possible to attain advantages same as those of the embodiment of Fig. 1, except that an advantage regarding arrangement of bright and dark subpixels in each of the subpixel arrays.

[0066] The following description deals with an embodiment of Fig. 3. (a) of Fig. 3 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 3 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 3 illustrates the display section at a timing t1 of (a) of Fig. 3. The center of (b) of Fig. 3 illustrates the display section at a timing t2 of (a) of Fig. 3. The right side of (b) of Fig. 3 illustrates the display section at a timing t3 of (a) of Fig. 3. The embodiments of Figs. 1 and 3 are different from each other in control of the storage capacitor wires. Therefore, (i) the configuration of the display section and (ii) control of the first and second data signal lines of the embodiment of Fig. 3 are same as those of Fig. 1.

[0067] As illustrated in (a) and (b) of Fig. 3, a potential level of the storage capacitor wire Cs1 shifts after scanning of the scanning signal line G1 that is connected to the subpixel (e.g., 1a or 1c) facing the storage capacitor wires Cs1. The potential level of the storage capacitor wire Cs1 shifts once after the scanning during a frame period during which the scanning is carried out. On the other hand, a potential level of the storage capacitor wire Cs2 shifts after scanning of the scanning signal lines G1 and G2 that are connected to the subpixels (e.g., 1b, 1d, 1B, 1D, 2a, 2c, 2A, or 2C) facing the storage capacitor wire Cs2. The potential level of the storage capacitor wire Cs2 shifts once after the scanning during a frame period during which the scanning is carried out. That is, the potential level of each of the storage capacitor wires (Cs1, Cs2, and so on) changes so that the potential level is switched between two levels (High and Low) for every one (1) vertical scanning period (one (1) frame period). In a case where a first storage capacitor wire is the storage capacitor wire Cs1, which is positioned more upstream in the scanning direction than the storage capacitor wire Cs2 (the storage capacitor wires Cs1 and Cs2 correspond to a pixel (e.g., pixel P) which is first to receive data among pixels in corresponding one of the pixel ar-

rays), a potential phase of an odd-numbered storage capacitor wire (e.g., Cs1) leads a potential phase of a subsequent odd-numbered storage capacitor wire (e.g., Cs3) by two horizontal scanning periods. Similarly, a potential phase of an even-numbered storage capacitor wire (e.g., Cs2) leads a potential phase of a subsequent even-numbered storage capacitor wire (e.g., Cs4) by two horizontal scanning periods. The potential level of the storage capacitor wire Cs1 (first storage capacitor wire) shifts in the positive direction (L to H) at the timing t1, which is one (1) horizontal scanning period (1H) after the start of the frame. The potential level of the storage capacitor wire Cs2 (second storage capacitor wire) shifts in the negative direction (H to L) at the timing t2, which is two horizontal scanning periods (2H) after the start of the frame. Further, a difference between two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches remains constant, while a difference between two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches also remains constant. Note however that the difference between the two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches is larger than the difference between the two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches.

[0068] Fig. 13 is a timing diagram, for the embodiment of the Fig. 3, illustrating (i) potentials of the first data signal line S1 and the second data signal line s1, (ii) potentials of the storage capacitor wire Cs1 and the storage capacitor wire Cs2, and (iii) potentials of the respective subpixels (1a through 1d) included in the pixel P (potentials of the pixel electrodes included in the respective subpixels). As illustrated in Fig. 13, according to the embodiment of Fig. 3, the potential level of each of the storage capacitor wires is shifted only once during one (1) frame period. Therefore, even if the level shift amount is smaller than that of the embodiment of Fig. 1, the subpixels 1a through 1d (the pixel electrodes included in respective subpixels 1a through 1d) have effective values that are same as those of the

embodiment of Fig. 1.

[0069] According to the embodiment, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), the subpixel 1c serves as a super-dark subpixel (A), and the subpixel 1d serves as a bright subpixel (m). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a dark subpixel (a), the subpixel 2b serves as a super-bright subpixel (M), the subpixel 2c serves as a bright subpixel (m), and the subpixel 2d serves as a super-dark subpixel (A). Moreover, it is pos-

sible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a bright subpixel (m).

[0070] According to the configuration of Fig. 3, it is possible to attain advantages same as those of the embodiment of Fig. 1, except that an advantage that every predetermined number of storage capacitor wires are identical in potential phase. Besides, it is possible to reduce the level shift amount (amplitude) of the potential of each of the storage capacitor wires, and reduce power consumption.

[0071] The following description deals with an embodiment of Fig. 4. (a) of Fig. 4 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 4 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 4 illustrates the display section at a timing t1 of (a) of Fig. 4. The center of (b) of Fig. 4 illustrates the display section at a timing t2 of (a) of Fig. 4. The right side of (b) of Fig. 4 illustrates the display section at a timing t3 of (a) of Fig. 4. The embodiments of Figs. 4 and 1 are different from each other in control of the storage capacitor wires. Therefore, (i) the configuration of the display section and (ii) control of the first and second data signal lines of the embodiment of Fig. 4 are same as those of Fig. 1.

[0072] As illustrated in (a) and (b) of Fig. 4, a potential level of the storage capacitor wire Cs1 shifts after scanning of the scanning signal line G1 that is connected to the subpixel (e.g., 1a or 1c) facing the storage capacitor wires Cs1. The potential level of the storage capacitor wire Cs1 shifts once after the scanning during a frame period during which the scanning is carried out. On the other hand, a potential level of the storage capacitor wire Cs2 shifts after scanning of the scanning signal lines G1 and G2 that are connected to the subpixels (e.g., 1b, 1d, 1B, 1D, 2a, 2c, 2A, or 2C) facing the storage capacitor wire Cs2. The potential level of the storage capacitor wire Cs2 shifts once after the scanning during a frame period during which the scanning is carried out. That is, the potential level of each of the storage capacitor wires (Cs1, Cs2, and so on) changes so that the potential level is switched between two levels (High and Low) for every one (1) vertical scanning period (one (1) frame period). In a case where a first storage capacitor wire is the storage capacitor wire Cs1, which is positioned more upstream in the scanning direction than the storage capacitor wire Cs2 (the storage capacitor wires Cs1 and Cs2 correspond to a pixel (e.g., pixel P) which is first to receive data among pixels in corresponding one of the pixel arrays), a potential phase of an odd-numbered storage capacitor wire (e.g., Cs1) leads a potential phase of a subsequent odd-numbered storage capacitor wire (e.g., Cs3) by two horizontal scanning periods. Similarly, a po-

tential phase of an even-numbered storage capacitor wire (e.g., Cs2) leads a potential phase of a subsequent even-numbered storage capacitor wire (e.g., Cs4) by two horizontal scanning periods. The potential level of the storage capacitor wire Cs1 (first storage capacitor wire) shifts in the positive direction (L to H) at the timing t1, which is one (1) horizontal scanning period (1H) after the start of the frame. The potential level of the storage capacitor wire Cs2 (second storage capacitor wire) shifts in the positive direction (L to H) at the timing t2, which is two horizontal scanning periods (2H) after the start of the frame. Further, a difference between two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches remains constant, while a difference between two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches also remains constant. Note however that the difference between the two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches is larger than the difference between the two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches.

[0073] According to the embodiment, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a bright subpixel (m), the subpixel 1c serves as a super-dark subpixel (A), and the subpixel 1d serves as a dark subpixel (a). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a bright subpixel (m), the subpixel 2b serves as a super-bright subpixel (M), the subpixel 2c serves as a dark subpixel (a), and the subpixel 2d serves as a super-dark subpixel (A). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a bright subpixel (m), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a dark subpixel (a).

[0074] According to the embodiment of Fig. 4, it is possible to attain advantages same as those of the embodiment of Fig. 3, except for an advantage regarding arrangement of bright and dark subpixels in each of the subpixel arrays.

[0075] The following description deals with an embodiment of Fig. 5. (a) of Fig. 5 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 5 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 5 illustrates the display section at a timing t1 of (a) of Fig. 5. The center of (b) of Fig. 5 illustrates the display section at a timing t2 of (a) of Fig. 5. The right side of (b) of Fig. 5 illustrates the display section at a timing t3 of (a) of Fig. 5. The

embodiments of Figs. 5 and 1 are different from each other in control of the storage capacitor wires. Therefore, (i) the configuration of the display section and (ii) control of the first and second data signal lines of the embodiment of Fig. 5 are same as those of Fig. 1.

[0076] As illustrated in (a) and (b) of Fig. 5, a potential level of the storage capacitor wire Cs1 shifts after scanning of the scanning signal line G1 that is connected to the subpixel (e.g., 1a or 1c) facing the storage capacitor wires Cs1. The potential level of the storage capacitor wire Cs1 shifts a plurality of times after the scanning during a frame period during which the scanning is carried out. On the other hand, a potential level of the storage capacitor wire Cs2 shifts after scanning of the scanning signal lines G1 and G2 that are connected to the subpixels (e.g., 1b, 1d, 1B, 1D, 2a, 2c, 2A, or 2C) facing the storage capacitor wire Cs2. The potential level of the storage capacitor wire Cs2 shifts a plurality of times after the scanning during a frame period during which the scanning is carried out. That is, the potential level of each of the storage capacitor wires (Cs1, Cs2, and so on) changes so that the potential level is switched between two levels (High and Low) for every one (1) horizontal scanning period (1H). In a case where a first storage capacitor wire is the storage capacitor wire Cs1, which is positioned more upstream in the scanning direction than the storage capacitor wire Cs2 (the storage capacitor wires Cs1 and Cs2 correspond to a pixel (e.g., pixel P) which is first to receive data among pixels in corresponding one of the pixel arrays), potential phases of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) are identical. Similarly, potential phases of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) are identical. The potential level of the storage capacitor wire Cs1 (first storage capacitor wire) shifts in the positive direction (L to H) at the timing t1, which is one (1) horizontal scanning period (1H) after the start of the frame. The potential level of the storage capacitor wire Cs2 (second storage capacitor wire) shifts in the negative direction (H to L) at the timing t1, which is one (1) horizontal scanning period (1H) after the start of the frame. Further, a difference between two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches remains constant, while a difference between two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches also remains constant. Note however that the difference between the two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches is larger than the difference between the two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches.

[0077] According to the configuration, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), the subpixel 1c serves as a super-dark

subpixel (A), and the subpixel 1d serves as a bright subpixel (m). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a bright subpixel (m), the subpixel 2b serves as a super-dark subpixel (A), the subpixel 2c serves as a dark subpixel (a), and the subpixel 2d serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a bright subpixel (m).

[0078] As described above, according to the embodiment of Fig. 5, it is possible to attain advantages same as those of the embodiment of Fig. 1, except for an advantage regarding securement of a sufficient level shift amount. Besides, it is possible to arrange the subpixel arrays such that (i) the super-bright subpixel or the bright subpixel and (ii) the super-dark subpixel or the dark subpixel are arranged checkerwise. Accordingly, it is possible to more surely prevent the display roughness. Further, the number of types of potential phase for each of the storage capacitor wires is reduced to two. As such, it is possible to achieve more simple configuration for controlling the potential of each of the storage capacitor wires.

[0079] The following description deals with an embodiment of Fig. 6. (a) of Fig. 6 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 6 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 6 illustrates the display section at a timing t1 of (a) of Fig. 6. The center of (b) of Fig. 6 illustrates the display section at a timing t2 of (a) of Fig. 6. The right side of ((b) of Fig. 6 illustrates the display section at a timing t3 of (a) of Fig. 6. The embodiments of Figs. 6 and 1 are different from each other in relation of connection between the subpixels and the first and second data signal lines. Therefore, (i) control of the first and second data signal lines and (ii) control of the storage capacitor wires of the embodiment of Fig. 6 are same as those of Fig. 1.

[0080] Specifically, as illustrated in (b) of Fig. 6, in one of two pixels adjacent to each other in the column direction, two subpixels (first and second subpixels) arrayed along the column direction are connected to corresponding one of the first data signal lines, while two subpixels (third and fourth subpixels) arrayed along the column direction are connected to corresponding one of the second data signal lines. In the other one of the two pixels adjacent to each other in the column direction, two subpixels included in a subpixel array including the first and second subpixels are connected to the corresponding one of the second data signal lines, while two subpixels included in the subpixel array including the third and fourth subpixels are connected to the corresponding one

of the first data signal lines.

[0081] For example, first and second data signal lines S1 and s1 are provided correspondingly to a pixel array including a pixel P, and the pixel P includes four subpixels 1a through 1d which are connected to a scanning signal line G1. Meanwhile, the two subpixels 1a and 1b (first and second subpixels) arrayed along the column direction are both connected to the first data signal line S1, while the two subpixels 1c and 1d (third and fourth subpixels) arrayed along the column direction are both connected to the second data signal line s1. On the other hand, a pixel adjacent to the pixel P in the column direction includes four subpixels 2a through 2d which are connected to a scanning signal line G2. The two subpixels 2a and 2c are arrayed along the row direction on one side (the upper side of (b) of Fig. 6) of the scanning signal line G2, whereas the two subpixels 2b and 2d are arrayed along the row direction on the other side (the lower side of (b) of Fig. 6) of the scanning signal line G2. The subpixels 2a and 2b included in a pixel array including the subpixels 1a and 1b of pixel P are both connected to the second data signal line s1, whereas the subpixels 2c and 2d included in a pixel array including the subpixels 1c and 1d of pixel P are both connected to the first data signal line S1.

[0082] According to the embodiment, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), the subpixel 1c serves as a super-dark subpixel (A), and the subpixel 1d serves as a bright subpixel (m). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a bright subpixel (m), the subpixel 2b serves as a super-dark subpixel (A), the subpixel 2c serves as a dark subpixel (a), and the subpixel 2d serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a bright subpixel (m).

[0083] According to the embodiment of Fig. 6, besides the advantages same as those of the embodiment of Fig. 1, it is possible to arrange the subpixel arrays such that (i) the super-bright subpixel or the bright subpixel and (ii) the super-dark subpixel or the dark subpixel are arranged checkerwise. As such, it is possible to more surely prevent the display roughness.

[0084] The following description deals with an embodiment of Fig. 7. (a) of Fig. 7 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 7 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 7 illustrates the display section at a timing t1 of (a) of Fig. 7. The center of (b) of Fig. 7 illustrates the display section at a timing

t2 of (a) of Fig. 7. The right side of (b) of Fig. 7 illustrates the display section at a timing t3 of (a) of Fig. 7. The embodiments of Figs. 7 and 3 are different from each other in relation of connection between the subpixels and the first and second data signal lines. Therefore, (i) control of the first and second data signal lines and (ii) control of the storage capacitor wires of the embodiment of Fig. 7 are same as those of Fig. 3.

[0085] Specifically, as illustrated in (b) of Fig. 7, in one of two pixels adjacent to each other in the column direction, two subpixels (first and second subpixels) arrayed along the column direction are connected to corresponding one of the first data signal lines, while two subpixels (third and fourth subpixels) arrayed along the column direction are connected to corresponding one of the second data signal lines. In the other one of the two pixels adjacent to each other in the column direction, two subpixels included in a subpixel array including the first and second subpixels are connected to the corresponding one of the second data signal lines, while two subpixels included in a subpixel array including the third and fourth subpixels are connected to the corresponding one of the first data signal lines.

[0086] For example, first and second data signal lines S1 and s1 are provided correspondingly to a pixel array including a pixel P, and the pixel P includes four subpixels 1a through 1d which are connected to a scanning signal line G1. Meanwhile, the two subpixels 1a and 1b (first and second subpixels) arrayed along the column direction are both connected to the first data signal line S1, while the two subpixels 1c and 1d (third and fourth subpixels) arrayed along the column direction are both connected to the second data signal line s1. On the other hand, a pixel adjacent to the pixel P in the column direction includes four subpixels 2a through 2d which are connected to a scanning signal line G2. The two subpixels 2a and 2c are arrayed along the row direction on one side (the upper side of (b) of Fig. 7) of the scanning signal line G2, whereas the two subpixels 2b and 2d are arrayed along the row direction on the other side (the lower side of (b) of Fig. 7) of the scanning signal line G2. The two subpixels 2a and 2b included in a pixel array including the subpixels 1a and 1b of the pixel P are both connected to the second data signal line s1, whereas the two subpixels 2c and 2d included in a pixel array including the subpixels 1c and 1d of the pixel P are both connected to the first data signal line S1.

[0087] According to the embodiment, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), the subpixel 1c serves as a super-dark subpixel (A), and the subpixel 1d serves as a bright subpixel (m). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a bright subpixel (m), the subpixel 2b serves as a super-dark subpixel (A), the subpixel 2c serves as a dark subpixel (a), and the subpixel 2d serves as a super-bright subpixel (M). Moreover, it is pos-

sible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a bright subpixel (m).

[0088] According to the configuration of Fig. 7, besides the advantages same as those of the embodiment of Fig. 3, it is possible to arrange the subpixel arrays such that (i) the super-bright subpixel or the bright subpixel and (ii) the super-dark subpixel or the dark subpixel are arranged checkerwise. As such, it is possible to more surely prevent the display roughness.

[0089] (a) of Fig. 19 illustrates an exemplary configuration of the display section of Figs. 6 and 7. As illustrated in (a) of Fig. 19, in each of the pixels, a source electrode and a drain electrode of each of transistors are provided on a scanning signal line passing in the middle of the pixel. In each even-numbered pixel included in each of the pixel arrays, the drain electrodes of the transistors are drawn toward corresponding one of the first data signal lines or corresponding one of the second data signal lines. In this way, connection between the subpixels and the first and second data signal lines, as illustrated in (b) of Fig. 6 and (b) of Fig. 7, are achieved. Here, a slit separating between pixel electrodes, which are adjacent to each other in the row direction in each of the pixels, can be in a linear shape in the column direction (see (a) of Fig. 19). Alternatively, the slit can be in a 90-degree rotated V shape (see (b) of Fig. 19). The configuration of (b) of Fig. 19 is suitably applicable for, for example, an MVA liquid crystal display device, in which ribs and/or slits in the 90-degree rotated V shape are formed on surfaces, of the pixel electrodes, facing a color filter substrate.

[0090] The following description deals with an embodiment of Fig. 8. (a) of Fig. 8 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 8 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 8 illustrates the display section at a timing t1 of (a) of Fig. 8. The center of (b) of Fig. 8 illustrates the display section at a timing t2 of (a) of Fig. 8. The right side of (b) of Fig. 8 illustrates the display section at a timing t3 of (a) of Fig. 8. The embodiments of Figs. 8 and 1 are different from each other in control of the first and second data signal lines. Therefore, (i) the configuration of the display section and (ii) control of the storage capacitor wires of the embodiment of Fig. 8 are same as those of Fig. 1.

[0091] Specifically, as illustrated in (a) and (b) of Fig. 8, each pair of the first and second data signal lines receive signal potentials corresponding to identical data (gray scale data) but having respective different polarities (for example, assuming that Vcom is a reference potential, the signal potentials are identical in absolute value but opposite in direction from Vcom to each other). Each

of the polarities of the signal potentials is reversed for every one (1) horizontal scanning period (1H). Also in the configuration of Fig. 8, (i) one, of the first data signal lines, corresponding to one of two pixel arrays adjacent to each other and (ii) one, of the second data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other receive signal potentials having respective different polarities. Fig. 14 is a timing diagram, for the configuration of Fig. 8, illustrating (i) potentials of the first data signal line S1 and the second data signal line s1, (ii) potentials of the storage capacitor wire Cs1 and the storage capacitor wire Cs2, and (iii) potentials of the respective subpixels (1 through 1d) included in the pixel P (potentials of pixel electrodes included in the respective subpixels).

[0092] According to the embodiment, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), the subpixel 1c serves as a super-dark subpixel (A), and the subpixel 1d serves as a bright subpixel (m). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a bright subpixel (m), the subpixel 2b serves as a super-dark subpixel (A), the subpixel 2c serves as a dark subpixel (a), and the subpixel 2d serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a bright subpixel (m).

[0093] According to the configuration of Fig. 8, besides the advantages of the embodiment of Fig. 1, it is possible to arrange the subpixel arrays such that (i) the super-bright subpixel or the bright subpixel and (ii) the super-dark subpixel or the dark subpixel are arranged checkerwise. As such, it is possible to more surely prevent the display roughness.

[0094] The following description deals with an embodiment of Fig. 9. (a) of Fig. 9 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 9 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (a) of Fig. 9 illustrates the display section at a timing t1 of (a) of Fig. 9. The center of (a) of Fig. 9 illustrates the display section at a timing t2 of (a) of Fig. 9. The right side of (a) of Fig. 9 illustrates the display section at a timing t3 of (a) of Fig. 9. The embodiments of Figs. 9 and 3 are different from each other in control of the first and second data signal lines. Therefore, (i) the configuration of the display section and (ii) control of the storage capacitor wires of the embodiment of Fig. 9 are same as those of Fig. 3.

[0095] Specifically, as illustrated in (a) and (b) of Fig. 9, each pair of the first and second data signal lines receive signal potentials corresponding to identical data

(gray scale data) but having respective different signal polarities (for example, assuming that V_{com} is a reference potential, the signal potentials are identical in absolute value but opposite in direction from V_{com} to each other). Each of the polarities of the signal potentials is reversed for every one (1) horizontal scanning period (1H). Also in the configuration of Fig. 9, (i) one, of the first data signal lines, corresponding to one of two pixel arrays adjacent to each other and (ii) one, of the second data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other receive signal potentials having respective different polarities. Fig. 15 is a timing diagram, for the configuration of Fig. 9, illustrating (i) potentials of the first data signal line S1 and the second data signal line s1, (ii) potentials of the storage capacitor wire Cs1 and the storage capacitor wire Cs2, and (iii) potentials of the respective subpixels (1a through 1d) included in the pixel P (potentials of pixel electrodes included in the respective subpixels).

[0096] According to the embodiment, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), the subpixel 1c serves as a super-dark subpixel (A), and the subpixel 1d serves as a bright subpixel (m). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a bright subpixel (m), the subpixel 2b serves as a super-dark subpixel (A), the subpixel 2c serves as a dark subpixel (a), and the subpixel 2d serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a bright subpixel (m).

[0097] According to the configuration of Fig. 9, besides the advantages same as those of the embodiment of Fig. 3, it is possible to arrange the subpixel arrays such that (i) the super-bright subpixel or the bright subpixel and (ii) the super-dark subpixel or the dark subpixel are arranged checkerwise. As such, it is possible to more surely prevent the display roughness.

[0098] The following description deals with an embodiment of Fig. 10. (a) of Fig. 10 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 10 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 10 illustrates the display section at a timing t1 of (a) of Fig. 10. The center of (b) of Fig. 10 illustrates the display section at a timing t2 of (a) of Fig. 10. The right side of (b) of Fig. 10 illustrates the display section at a timing t3 of (a) of Fig. 10. The embodiments of Figs. 10 and 1 are different from each other in control of the first and second data signal lines. Therefore, (i) the configuration of the display section and (ii) control of the storage capacitor

wires of the embodiment of Fig. 10 are same as those of Fig. 1.

[0099] Specifically, as illustrated in (a) and (b) of Fig. 10, each pair of the first and second data signal lines receive signal potentials corresponding to identical data (gray scale data) but having respective different signal potentials (for example, assuming that V_{com} is a reference potential, the signal potentials are identical in absolute value but opposite in direction from V_{com} to each other). Each of the polarities of the signal potentials is reversed for every one (1) vertical scanning period. One, of the first data signal lines, corresponding to one of two pixel arrays adjacent to each other and one, of the second data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other receive signal potentials having an identical polarity. For example, in a frame, the first data signal lines S1 and S2 respectively receive positive and negative signal potentials, whereas the second data signal lines s1 and s2 respectively receive negative and positive signal potentials. In a subsequent frame, the first data signal lines S1 and S2 respectively receive negative and positive signal potentials, whereas the second data signal lines s1 and s2 respectively receive positive and negative signal potentials.

[0100] According to the configuration, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), the subpixel 1c serves as a super-dark subpixel (A), and the subpixel 1d serves as a bright subpixel (m). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a dark subpixel (a), the subpixel 2b serves as a super-bright subpixel (M), the subpixel 2c serves as a bright subpixel (m), and the subpixel 2d serves as a super-dark subpixel (A). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-dark subpixel (A), the subpixel 1B serves as a bright subpixel (m), the subpixel 1C serves as a super-bright subpixel (M), and the subpixel 1D serves as a dark subpixel (a).

[0101] According to the embodiment of Fig. 10, it is possible to attain advantages same as those of the embodiment of Fig. 1, except for an advantage regarding arrangement of bright and dark subpixels in each of the subpixel arrays. Besides, since two data signal lines adjacent to each other with no pixel array therebetween receive signal potentials having the identical polarity, it is possible to reduce power consumption due to a parasitic capacitance defined by the two data signal lines. As such, it is possible to reduce a load on a source driver.

[0102] The following description deals with an embodiment of Fig. 11. (a) of Fig. 11 is a timing diagram illustrating how the display section included in the liquid crystal display device of the present invention is driven. (b) of Fig. 11 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 11

illustrates the display section at a timing t1 of (a) of Fig. 11. The center of (b) of Fig. 11 illustrates the display section at a timing t2 of (a) of Fig. 11. The right side of (b) of Fig. 11 illustrates the display section at a timing t3 of (a) of Fig. 11. The embodiments of Figs. 11 and 1 are different from each other in (i) a value of a capacitance defined by each of the subpixels and corresponding one of the storage capacitor wires in the display section and (ii) a level shift amount of the potential of each of the storage capacitor wires. Therefore, (a) configurations other than those described above and (b) control of wires of the embodiment of Fig. 11 are same as those of Fig. 1.

[0103] As illustrated in (a) and (b) of Fig. 11, a difference between two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) shifts is identical, while a difference between two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches is also identical. Further, the difference between two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) shifts is same as the difference between two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches. Meanwhile, four subpixels included in each of the pixels each have an identical area size. Moreover, (i) a capacitance defined by each of two subpixels adjacent to each other in the row direction and corresponding one of the storage capacitor wires is larger than (ii) a capacitance defined by each of the other two subpixels and corresponding one of the storage capacitor wires. For example, the four subpixels (1a through 1d) included in the pixel P each have the identical area size. Further, (i) a capacitance defined by each of two subpixels (1a and 1c) adjacent to each other in the row direction and the storage capacitor wire Cs1 is larger than (ii) a capacitance defined by each of the other two subpixels (1b and 1d) and the storage capacitor wire Cs2.

[0104] As described above, an effective potential of the pixel electrode 1a is represented by $V_S - V_F + K_{Ca} \times V_p$, an effective potential of the pixel electrode 1b is represented by $V_S - V_F - K_{Cb} \times V_q$, an effective potential of the pixel electrode 1c is represented by $V_S - V_F + K_{Cc} \times V_p$, and an effective potential of the pixel electrode 1d is represented by $V_S - V_F - K_{Cd} \times V_q$. According to the present embodiment, $K_{Ca} = CC_{Sa} / (CLC_a + CC_{Sa}) = K_{Cc} = CC_{Sc} / (CLC_c + CC_{Sc}) > K_{Cb} = CC_{Sb} / (CLC_b + CC_{Sb}) = K_{Cd} = CC_{Sd} / (CLC_d + CC_{Sd})$, and in addition, $V_p = V_q$. Accordingly, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M); the subpixel 1b serves as a dark subpixel (a), the subpixel 1c serves as a super-dark subpixel (A), and the subpixel 1d serves as a bright subpixel (m). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a dark subpixel (a), the subpixel 2b serves as a super-bright subpixel (M), the subpixel 2c serves as a bright subpixel

(m), and the subpixel 2d serves as a super-dark subpixel (A). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), the subpixel 1C serves as a super-dark subpixel (A), and the subpixel 1D serves as a bright subpixel (m). Fig. 16 is a timing diagram, for the embodiment of Fig. 11, illustrating (i) potentials of the first data signal line S1 and the second data signal line s1, (ii) potentials of the storage capacitor wire Cs1 and the storage capacitor wire Cs2, and (iii) potentials of the subpixels (1a through 1d) included in the pixel P (potentials of pixel electrodes included in the respective subpixels).

[0105] According to the embodiment of Fig. 11, it is possible to attain advantages same as those of the embodiment of Fig. 1. Besides, it is possible to control the storage capacitor wires so that potentials of the respective storage capacitor wires shift by the identical amount. As such, it is possible to simplify the configuration for controlling the potentials of the respective storage capacitor wires.

[0106] Fig. 20 illustrates an exemplary configuration of the display section of (b) of Fig. 11. As illustrated in Fig. 20, the pixel P is configured such that (i) a source electrode and a drain electrode of each of four transistors are provided on the scanning signal line G1 passing in the middle of the pixel P, (ii) the storage capacitor wire Cs1 faces pixel electrodes PEa and PEc included respectively in the subpixels 1a and 1c, and (iii) the storage capacitor wire Cs2 faces pixel electrodes PEb and PEd included respectively in the subpixels 1b and 1d. The pixel electrode PEb and the storage capacitor wire Cs2 overlap with each other by a larger area size than the pixel electrode PEa and the storage capacitor wire Cs1 do. Further, the pixel electrode PEd and the storage capacitor wire Cs2 overlap with each other by a larger area size than the pixel electrode PEc and the storage capacitor wire Cs1 do. According to Fig. 20, each of the pixel arrays is provided correspondingly with one of the first data signal lines and one of the second data signal lines at both side ends of the pixel array. However, the present embodiment is not limited to this configuration. For example, as illustrated in Fig. 21, the present embodiment can be configured such that the first and second data signal lines S1 and s1 are provided respectively at one side end and in the middle (e.g., in a space between the subpixels 1a and 1c adjacent to each other in the row direction) of corresponding one of the pixel arrays.

[0107] The configuration of Fig. 1 can be modified so that the level shift amount (amplitude) by which the potential level of each of the storage capacitor wires shifts and/or a direction in which the potential level of each of the storage capacitor wires shifts are changed for every frame. That is, the configuration is modified so that each of the storage capacitor wires performs a potential level shifting at a first timing after scanning of corresponding one of the scanning signal lines in such a manner that

the level shifting is different between successive frames in terms of at least one of (i) the level shift amount and (ii) a level shift direction. More specifically, there are prepared (a) two types of level shift amount (large, small) and (b) two types of level shift direction (positive, negative) for each of the above level shiftings. Then, four types of level shift pattern obtained by combining (a) one of the two types of level shift amount and (b) one of the two types of level shift direction (i.e., (1) the level shift amount is large and the direction is negative, (2) the level shift amount is large and the direction is positive, (3) the level shift amount is small and the direction is negative, and (4) the level shift amount is small and the direction is positive) are carried out, in respective successive four frames, at the first timing after the scanning of the corresponding one of the scanning signal lines.

[0108] For example, as illustrated in (a) of Fig. 22, in a frame 1, the potential level of the storage capacitor wire Cs1 shifts in the positive direction (L to H) by a large amount, whereas the potential level of the storage capacitor wire Cs2 shifts in the negative direction (H to L) by a small amount, at a timing t2 which is two horizontal scanning periods after the start of the frame 1. In a subsequent frame 2, the potential level of the storage capacitor wire Cs1 shifts in the positive direction (L to H) by the small amount, whereas the potential level of the storage capacitor wire Cs2 shifts in the negative direction (H to L) by the large amount, at the timing t2 which is two horizontal scanning periods after the start of the frame 2. In a subsequent frame 3, the potential level of the storage capacitor wire Cs1 shifts in the negative direction (H to L) by the large amount, whereas the potential level of the storage capacitor wire Cs2 shifts in the positive direction (L to H) by the small amount, at the timing t2 which is two horizontal periods after the start of the frame 3. In a subsequent frame 4, the potential level of the storage capacitor wire Cs1 shifts in the negative direction (H to L) by the small amount, whereas the potential level of the storage capacitor wire Cs2 shifts in the positive direction (L to H) by the large amount, at the timing t2 which is two horizontal scanning periods after the start of the frame 4. This makes it possible to achieve such a configuration that layout of the super-bright subpixel (M), the dark subpixel (a), the super-dark subpixel, and the bright subpixel (m) is changed for every frame (see (b) of Fig. 22). As such, it is possible to prevent image sticking, display roughness, and the like.

[0109] Further, the configuration of Fig. 2 also makes it possible to prevent the image sticking, display roughness, and the like (see (b) of Fig. 23). This is achieved by modifying the configuration of Fig. 2 so that the amount by which the potential level of each of the storage capacitor wires shifts and/or the direction in which the potential level of each of the storage capacitor wires shifts are changed for each frame, as illustrated in (a) of Fig. 23. Furthermore, the configuration of Fig. 3 also makes it possible to prevent the image sticking, display roughness, and the like (see (b) of Fig. 24). This is achieved

by modifying the configuration of Fig. 3 so that the amount by which the potential level of each of the storage capacitor wires shifts and/or the direction in which the potential level of each of the storage capacitor wires shifts are changed for each frame, as illustrated in (a) of Fig. 24. Moreover, the configuration of Fig. 8 also makes it possible to prevent the image sticking (see (b) of Fig. 25). This is achieved by modifying the configuration of Fig. 8 so that the amount by which the potential level of each of the storage capacitor wires shifts and/or the direction in which the potential level of each of the storage capacitor wires shifts are changed for each frame, as illustrated in (a) of Fig. 25.

15 [Embodiment 2]

[0110] The following description discusses a configuration of Fig. 26. (a) of Fig. 26 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 26 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 26 illustrates the display section at a timing t1 of (a) of Fig. 26. The center of (b) of Fig. 26 illustrates the display section at a timing t2 of (a) of Fig. 26. The right side of (b) of Fig. 26 illustrates the display section at a timing t3 of (a) of Fig. 26. As illustrated in (b) of Fig. 26, a display section 10b is configured such that (i) first and second data signal lines are provided correspondingly to each pixel array at its both side ends and (ii) each pixel includes three subpixels which are connected to identical one of scanning signal lines. Each pixel is associated correspondingly with two storage capacitor wires. In each pixel, two subpixels of the three subpixels and one of the two storage capacitor wires define respective capacitances. Further, one of the two subpixels is connected to corresponding one of the first data signal lines, whereas the other one of the two subpixels is connected to corresponding one of the second data signal lines. Meanwhile, the other one of the three subpixels and the other one of the two storage capacitor wires define a capacitance. The other one of the three subpixels is connected to the corresponding one of the first data signal lines or the corresponding one of the second data signal lines.

[0111] More specifically, in each pixel, two subpixels of the three subpixels are arrayed along the row direction on one side of corresponding one of the scanning signal lines, while the other one subpixel of the three subpixels is provided on the other side of the corresponding one of the scanning signal lines. The two subpixels arrayed along the row direction define respective capacitances with corresponding one of the storage capacitor wires. In one of two pixels adjacent to each other in the column direction, two subpixels (first and third subpixels), of the three subpixels, arrayed along the row direction define respective capacitances with same one of the storage capacitor wires, whereas the other one subpixel (second

subpixel) defines a capacitance with another one of the storage capacitor wires. In the other one of the two pixels adjacent to each other in the column direction, two, of the three subpixels, arrayed along the row direction define respective capacitances with the another one of the storage capacitor wires. Further, (i) one, of the second data signal lines, corresponding to one of two pixel arrays adjacent to each other and (ii) one, of the first data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other are adjacent to each other with no pixel array therebetween.

[0112] For example, first and second data signal lines S1 and s1 are provided correspondingly to a pixel array including a pixel P, and the pixel P includes subpixels 1a through 1c which are connected to a scanning signal line G1. Specifically, in the pixel P, the subpixels 1a and 1c are arrayed along the row direction on one side (the upper side of Fig. 26) of the scanning signal line G1, whereas the subpixel 1b is provided on the other side (the lower side of Fig. 26) of the scanning signal line G1. The subpixels 1a and 1b (first and second subpixels) are both connected to the first data signal line S1, whereas the subpixel 1c (third subpixel) is connected to the second data signal line s1. Further, the subpixels 1a and 1c arrayed along the row direction define respective capacitances with the storage capacitor wire Cs1, while the subpixel 1b defines a capacitance with the storage capacitor wire Cs2.

[0113] Similarly, a pixel adjacent to the pixel P in the column direction includes three subpixels 2a through 2c, which are connected to a scanning signal line G2. Specifically, the subpixels 2a and 2c are arrayed along the row direction on one side (the upper side of Fig. 26) of the scanning signal line G2, while the subpixel 2b is provided on the other side (the lower side of Fig. 26) of the scanning signal line G2. The subpixels 2a and 2b are both connected to the first data signal line S1, while the subpixel 2c is connected to the second data signal line s1. The subpixels 2a and 2c arrayed along the row direction define respective capacitances with the storage capacitor wire Cs2 (which defines the capacitance also with the subpixel 1b of the pixel P), whereas the subpixel 2b defines a capacitance with a storage capacitor wire Cs3.

[0114] Further, first and second signal lines S2 and s2 are provided correspondingly to a pixel array adjacent to the pixel array including the pixel P, and a pixel adjacent to the pixel P in the row direction includes three subpixels 1A through 1C which are connected to the scanning signal line G1. Specifically, the subpixels 1A and 1C are arrayed along the row direction on one side (the upper side of Fig. 26) of the scanning signal line G1, while the subpixel 1B is provided on the other side (the lower side of Fig. 26) of the scanning signal line G1. The subpixels 1A and 1B are both connected to the first data signal line S2, while the subpixel 1C is connected to the second data signal line s2. The subpixels 1A and 1C arrayed along the row direction define respective capacitances

with the storage capacitor wire Cs1, while the subpixel 1B defines a capacitance with the storage capacitor wire Cs2.

[0115] As described above, (i) a subpixel (1b or 1B) included in one of two pixels adjacent to each other in the column direction and (ii) subpixels (2a and 2c, or 2A and 2C) included in the other one of the two pixels adjacent to each other in the column direction, define respective capacitances with identical one of the storage capacitor wires (i.e., the storage capacitor wire Cs2). In other words, two subpixels adjacent to each other in the column direction with no scanning signal line therebetween (e.g., 1b and 2a, 1b and 2c, 1B and 2A, or 1B and 2C) define respective capacitances with the identical one of the storage capacitor wires (i.e., the storage capacitor wire Cs2).

[0116] Fig. 39 illustrates an equivalent circuit of the pixel P. As illustrated in Fig. 39, the pixel P includes three subpixels 1a through 1c. The subpixel 1a includes a transistor TRa and a pixel electrode PEa. The subpixel 1b includes a transistor TRb and a pixel electrode PEb. The subpixel 1c includes a transistor TRc and a pixel electrode PEc.

[0117] The transistors TRa and TRb are both connected to the scanning signal line G1 and the data signal line S1, whereas the transistor TRc is connected to the scanning signal line G1 and the data signal line s1. The pixel electrode PEa and the storage capacitor wire Cs1 define a capacitance CCSa, while the pixel electrode PEa and a common electrode (counter electrode) com define CLCa. The pixel electrode PEb and the storage capacitor wire Cs2 define a capacitance CCSb, while the pixel electrode PEb and the common electrode (counter electrode) com define CLCb. The pixel electrode PEc and the storage capacitor wire Cs1 define a capacitance CCSc, while the pixel electrode PEc and the common electrode (counter electrode) com define CLCc.

[0118] Now, refer back to (a) and (b) of Fig. 26. Each pair of the first and second data signal lines receive signal potentials corresponding to identical data (gray scale data) but having respective different polarities (for example, assuming that Vcom is a reference potential, the signal potentials are identical in absolute value but opposite in direction from Vcom to each other). Each of the polarities of the signal potentials is reversed for every one (1) vertical scanning period. One, of the first data signal lines, corresponding to one of two pixel arrays adjacent to each other and one, of the second data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other receive signal potentials having respective different polarities. An example is as follows. First, in a frame, the first data signal lines S1 and S2 receive signal potentials having a positive polarity, while the second data signal lines s1 and s2 receive signal potentials having a negative polarity. Then, in a subsequent frame, the first data signal lines S1 and S2 receive the signal potentials having the negative polarity, while the second data signal lines s1 and s2 receive the signal potentials

having the positive polarity.

[0119] Further, as illustrated in (a) and (b) of Fig. 26, a potential level of each of the storage capacitor wires shifts after scanning of a scanning signal line that is connected to the subpixel or subpixels facing the storage capacitor wire. The potential level of each of the storage capacitor wires shifts a plurality of times after the scanning in a frame in which the scanning is carried out. Specifically, the potential level of each of the storage capacitor wires changes so that the potential level is periodically switched between two levels during one frame period. In a case where a first storage capacitor wire is one, being positioned upstream in a scanning direction, of two storage capacitor wires corresponding to a pixel which is included in each pixel array and is first to receive data among pixels of the pixel array, potential phases of odd-numbered storage capacitor wires are subsequently shifted in the same direction by the same amount. Similarly, potential phases of even-numbered storage capacitor wires are subsequently shifted in the same direction by the same amount. Further, each of the above two levels remains constant over a plurality of horizontal scanning periods.

[0120] More specifically, a potential phase of each odd-numbered storage capacitor wire leads a potential phase of a subsequent odd-numbered storage capacitor wire by two horizontal scanning periods, while a potential phase of each even-numbered storage capacitor wire leads a potential phase of a subsequent even-numbered storage capacitor wire by two horizontal scanning periods. The potential level of the first storage capacitor wire and the potential level of a second storage capacitor wire shift, two horizontal scanning periods after start of a corresponding frame, in respective opposite directions at the same timing. Here, the potential level of each odd-numbered storage capacitor wire is switched between two levels whose difference is identical, while the potential level of each even-numbered storage capacitor wires is switched between two levels whose difference is also identical. Further, the difference between the two levels between which the potential level of each odd-numbered storage capacitor wire is switched is same as the difference between the two levels between which the potential level of each even-numbered storage capacitor wire is switched. Furthermore, two subpixels, of the three subpixels, arrayed along the row direction in each pixel each have an identical area size. Note however that the area size of each of the two subpixels is smaller than an area size of the other one subpixel of the three subpixels. Moreover, (i) each of the capacitances defined by the two subpixels and corresponding one of the storage capacitor wires and (ii) a capacitance defined by the other one subpixel and corresponding one of the storage capacitor wires are identical.

[0121] For example, a potential level of the storage capacitor wire Cs1 shifts after scanning of the scanning signal line G1 that is connected to the subpixel (e.g., 1a or 1c) facing the storage capacitor wire Cs1. The potential

level of the storage capacitor wire Cs1 shifts a plurality of times after the scanning during a frame period during which the scanning is carried out. On the other hand, a potential level of the storage capacitor wire Cs2 shifts after scanning of the scanning signal wires G1 and G2, that are connected to the subpixels (e.g., 1b, 1B, 2a, 2C, 2A, or 2C) facing the storage capacitor wire Cs2. The potential level of the storage capacitor wire Cs2 shifts a plurality of times after the scanning during a frame period during which the scanning is carried out. That is, the potential level of each of the storage capacitor wires (Cs1, Cs2, and so on) changes so that the potential level is switched between two levels (High and Low) for every 10 horizontal scanning periods (10H). In a case where a first storage capacitor wire is the storage capacitor wire Cs1, which is positioned more upstream in the scanning direction than the storage capacitor wire Cs2 (the storage capacitor wires Cs1 and Cs2 correspond to a pixel (e.g., pixel P) which is first to receive data among pixels in corresponding one of the pixel arrays), a potential phase of an odd-numbered storage capacitor wire (e.g., Cs1) leads a potential phase of a subsequent odd-numbered storage capacitor wire (e.g., Cs3) by two horizontal scanning periods. Similarly, a potential phase of an even-numbered storage capacitor wire (e.g., Cs2) leads a potential phase of a subsequent even-numbered storage capacitor wire (e.g., Cs4) by two horizontal scanning periods. The potential level of the storage capacitor wire Cs1 (first storage capacitor wire) shifts in a positive direction (L to H) at the timing t2, which is two horizontal scanning periods (2H) after the start of the frame. The potential level of the storage capacitor wire Cs2 (second storage capacitor wire) shifts in a negative direction (H to L) at the timing t2, which is two horizontal scanning periods (2H) after the start of the frame. Further, a difference between two potential levels (level shift amount) between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches remains constant throughout one frame period, while a difference between two potential levels (level shift amount) between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches also remains constant throughout one frame period. Further, the difference between the two levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches is same as the difference between the two levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches. Furthermore, for example in the pixel P, two subpixels (1a and 1c), of the three subpixels, arrayed along the row direction each have an identical area size. Note however that the area size of each of the two subpixels (1a and 1c) is smaller than that of the other one subpixel (1b) of the three subpixels. In addition, (i) each of the capacitances defined by the subpixels 1a and 1c and the storage capacitor wire Cs1 and (ii) the capacitance defined by the subpixel 1b and the storage capacitor wire Cs2

are identical in value. That is, in Fig. 39, $K_{ca} = CCSa / (CLCa + CCSa) = KCc = CCSc / (CLCc + CCSc) > KCb = CCSb / (CLCb + CCSb)$.

[0122] The display section 10b configured as above, in which the first and second data signal lines and the storage capacitor wires are controlled as above, is driven in a manner shown in (b) of Fig. 26. The following description discusses how the pixel P is driven, with reference to Figs. 26, 37, and 39. Fig. 37 is a timing diagram illustrating (i) potentials of the first data signal line S1 and the second data signal line s1, (ii) potentials of the storage capacitor wire Cs1 and the storage capacitor wire Cs2, and (iii) potentials of the subpixels (1a thorough 1c) included in the pixel P (i.e., potentials of pixel electrodes included in respective subpixels).

[0123] Specifically, assuming that (i) VS represents a signal potential supplied to the data signal S1, (ii) Vs represents a signal potential supplied to the data signal line s1, (iii) VF represents a feed-through potential when transistors are in an OFF state, (iv) $2 \times Vp$ represents a level shift amount (a difference between High and Low) of the potential level of the storage capacitor wire Cs1, and (v) $2 \times Vq$ represents a level shift amount (a difference between High and Low) of the potential level of the storage capacitor wire Cs2, an effective potential of the pixel electrode 1a is represented by $VS - VF + K_{ca} \times Vp$, an effective potential of the pixel electrode 1b is represented by $VS - VF - K_{cb} \times Vq$, and an effective potential of the pixel electrode 1c is represented by $Vs - VF + K_{cc} \times Vp$. However, according to the present embodiment, $K_{ca} = CCSa / (CLCa + CCSa) = KCc = CCSc / (CLCc + CCSc) > KCb = CCSb / (CLCb + CCSb)$. In addition, $Vp = Vq$. Accordingly, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), and the subpixel 1c serves as a super-dark subpixel (A). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a super-dark subpixel (A), the subpixel 2b serves as a dark subpixel (a), and the subpixel 2c serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), and the subpixel 1C serves as a super-dark subpixel (A).

[0124] As described above, according to the embodiment of Fig. 26, it is possible to (i) control the three subpixels included in one pixel so that they have respective different luminance levels and (ii) display a gray level by making use of area coverage modulation of the three subpixels, without increasing the number of storage capacitor wires (i.e., without providing a complicated configuration for controlling a potential of each of the storage capacitor wires). Accordingly, it is possible to reduce viewing angle dependence of a gamma characteristic (e.g., excess brightness of a display screen). Moreover, each pair of first and second data signal lines receive signal potentials corresponding to the same gray scale

level but having respective different polarities. This makes it possible to simplify data processing and an arithmetic circuit configuration therefor, as compared to a configuration in which the each pair of the first and second data signal lines receive signal potentials corresponding to respective different gray scale levels so that the subpixels have respective different luminance levels. Furthermore, in each of the subpixel arrays, (i) super-bright subpixels and super-dark subpixels are alternately provided or (ii) bright subpixels and dark subpixels are alternately provided. Accordingly, it is possible to prevent display roughness and display unevenness in a line form in the row direction. Moreover, since the potential level of each of the storage capacitor wires is periodically shifted, it is possible to control the potential phase of each of the storage capacitor wires so that every predetermined number of storage capacitor wires are identical in potential phase. This makes it possible to simplify a configuration for controlling the potential of each of the storage capacitor wires. In addition, since the potential level shifts every 10H, it is possible to shift the potential level by a sufficient amount even if an waveform distortion occurs.

[0125] The following description discusses a configuration of Fig. 27. (a) of Fig. 27 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 27 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 27 illustrates the display section at a timing t1 of (a) of Fig. 27. The center of (b) of Fig. 27 illustrates the display section at a timing t2 of (a) of Fig. 27. The right side of (b) of Fig. 27 illustrates the display section at a timing t3 of (a) of Fig. 27. The embodiments of Figs. 26 and 27 are different from each other in control of the storage capacitor wires. Therefore, (i) the configuration of the display section and (ii) control of the first and the second data signal lines of the embodiment of Fig. 27 are same as those of Fig. 26.

[0126] As illustrated in (a) and (b) of Fig. 27, a potential level of the storage capacitor wire Cs1 shifts after scanning of the scanning signal line G1 that is connected to the subpixel (e.g., 1a or 1c) facing the storage capacitor wires Cs1. The potential level of the storage capacitor wire Cs1 shifts once after the scanning during a frame period during which the scanning is carried out. On the other hand, a potential level of the storage capacitor wire Cs2 shifts after scanning of the scanning signal lines G1 and G2 that are connected to the subpixels (e.g., 1b, 1B, 2a, 2C, 2A, or 2C) facing the storage capacitor wire Cs2. The potential level of the storage capacitor wire Cs2 shifts once after the scanning during a frame period during which the scanning is carried out. That is, the potential level of each of the storage capacitor wires (Cs1, Cs2, and so on) changes so that the potential level is switched between two levels (High and Low) for every one (1) vertical scanning period (one (1) frame period). In a case where a first storage capacitor wire is the storage capacitor wire Cs1, which is positioned more upstream in the

scanning direction than the storage capacitor wire Cs2 (the storage capacitor wires Cs1 and Cs2 correspond to a pixel (e.g., pixel P) which is first to receive data among pixels in corresponding one of the pixel arrays), a potential phase of an odd-numbered storage capacitor wire (e.g., Cs1) leads a potential phase of a subsequent odd-numbered storage capacitor wire (e.g., Cs3) by two horizontal scanning periods. Similarly, a potential phase of an even-numbered storage capacitor wire (e.g., Cs2) leads a potential phase of a subsequent even-numbered storage capacitor wire (e.g., Cs4) by two horizontal scanning periods. The potential level of the storage capacitor wire Cs1 (first storage capacitor wire) shifts in the positive direction (L to H) at the timing t1, which is one (1) horizontal scanning period (1H) after the start of the frame. The potential level of the storage capacitor wire Cs2 (second storage capacitor wire) shifts in the negative direction (H to L) at the timing t2, which is two horizontal scanning periods (2H) after the start of the frame. Further, a difference between two potential levels (level shift amount) between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches remains constant throughout one frame period, while a difference between two potential levels (level shift amount) between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches also remains constant throughout one frame period. Moreover, (i) the difference between the two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches and (ii) the difference between the two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches are identical.

[0127] According to the embodiment, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), and the subpixel 1c serves as a super-dark subpixel (A). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a super-dark subpixel (A), the subpixel 2b serves as a dark subpixel (a), and the subpixel 2c serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), and the subpixel 1C serves as a super-dark subpixel (A).

[0128] According to the configuration of Fig. 27, it is possible to attain advantages same as those of the embodiment of Fig. 26, except that an advantage that every predetermined number of storage capacitor wires are identical in potential phase. Besides, it is possible to reduce the level shift amount (amplitude) of the potential of each of the storage capacitor wires, and reduce power consumption.

[0129] The following description discusses a configuration of Fig. 28. (a) of Fig. 28 is a timing diagram illus-

trating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 28 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 28 illustrates the display section at a timing t1 of (a) of Fig. 28. The center of (b) of Fig. 28 illustrates the display section at a timing t2 of (a) of Fig. 28. The right side of (b) of Fig. 28 illustrates the display section at a timing t3 of (a) of Fig. 28.

[0130] The configuration of Fig. 28 is obtained by modifying the configuration of Fig. 26 so that the potential of each of the storage capacitor wires in the configuration of Fig. 28 is out of phase with the potential of each of the storage capacitor wires in the configuration of Fig. 26 by half a period. According to the configuration of Fig. 28, it is possible to control the pixel P so that the subpixel 1a serves as a super-dark subpixel (A), the subpixel 1b serves as a bright subpixel (m), and the subpixel 1c serves as a super-bright subpixel (M). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a super-bright subpixel (M), the subpixel 2b serves as a bright subpixel (m), and the subpixel 2c serves as a super-dark subpixel (A). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-dark subpixel (A), the subpixel 1B serves as a bright subpixel (m), and the subpixel 1C serves as a super-bright subpixel (M).

[0131] According to the configuration of Fig. 28, it is possible to attain advantages same as those of the configuration of Fig. 26.

[0132] The following description discusses a configuration of Fig. 29. (a) of Fig. 29 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 29 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 29 illustrates the display section at a timing t1 of (a) of Fig. 29. The center of (b) of Fig. 29 illustrates the display section at a timing t2 of (a) of Fig. 29. The right side of (b) of Fig. 29 illustrates the display section at a timing t3 of (a) of Fig. 29.

[0133] The configuration of Fig. 29 is obtained by changing the configuration of Fig. 26 in control of the first and second data signal lines. Specifically, (i) one, of the first data signal lines, corresponding to one of two pixel arrays adjacent to each other and (ii) one, of the second data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other receive signal potentials having an identical polarity. Accordingly, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), and the subpixel 1c serves as a super-dark subpixel (A). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a super-dark subpixel (A), the subpixel 2b serves as a dark subpixel (a), and the subpixel 2c serves as a super-bright

subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-dark subpixel (A), the subpixel 1B serves as a dark subpixel (a), and the subpixel 1C serves as a super-bright subpixel (M).

[0134] According to the configuration of Fig. 29, it is possible to attain advantages same as those of the configuration of Fig. 26. Further, since two data signal lines adjacent to each other with no pixel array therebetween receive signal potentials having an identical polarity, it is possible to reduce power consumption due to a parasitic capacitance defined by the two data signal lines. As such, it is possible to reduce a load on a source driver.

[0135] The following description discusses a configuration of Fig. 30. (a) of Fig. 30 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 30 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 30 illustrates the display section at a timing t1 of (a) of Fig. 30. The center of (b) of Fig. 30 illustrates the display section at a timing t2 of (a) of Fig. 30. The right side of (b) of Fig. 30 illustrates the display section at a timing t3 of (a) of Fig. 30.

[0136] The configuration of Fig. 30 is obtained by changing the configuration of Fig. 26 in a potential phase of each of the storage capacitor wires. Specifically, a potential phase of an odd-numbered storage capacitor wire (e.g., Cs1) leads a potential phase of a subsequent odd-numbered storage capacitor wire (e.g., Cs3) by two horizontal scanning periods, while a potential phase of an even-numbered storage capacitor wire (e.g., Cs2) leads a potential phase of a subsequent even-numbered storage capacitor wire (e.g., Cs4) by two horizontal scanning periods. The potential of the storage capacitor wire Cs1 (first storage capacitor wire) shifts in the negative direction (H to L) at the timing t2, which is two horizontal periods (2H) after the start of corresponding frame. On the other hand, the potential of the storage capacitor wire Cs2 (second storage capacitor wire) shifts in the negative direction (H to L) at the timing t2, which is two horizontal periods (2H) after the start of the corresponding frame.

[0137] Accordingly, it is possible to control the pixel P so that the subpixel 1a serves as a super-dark subpixel (A), the subpixel 1b serves as a dark subpixel (a), and the subpixel 1c serves as a super-bright subpixel (M). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a super-dark subpixel (A), the subpixel 2b serves as a dark subpixel (a), and the subpixel 2c serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-dark subpixel (A), the subpixel 1B serves as a dark subpixel (a), and the subpixel 1C serves as a super-bright subpixel (M).

[0138] According to the configuration of Fig. 30, it is possible to attain advantages same as those of the con-

figuration of Fig. 26. Besides, it is possible to reduce the number of types of potential phases for each of the storage capacitor wires. As such, it is possible to achieve more simple configuration for controlling the potential of each of the storage capacitor wires.

[0139] The following description discusses a configuration of Fig. 31. (a) of Fig. 31 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 31 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 31 illustrates the display at a timing t1 of (a) of Fig. 31. The center of (b) of Fig. 31 illustrates the display section at a timing t2 of (a) of Fig. 31. The right side of (b) of Fig. 31 illustrates the display section at a timing t3 of (a) of Fig. 31.

[0140] The configuration of Fig. 31 is obtained by changing the configuration of Fig. 26 in control of the first and second data signal lines. Specifically, each pair of the first and second data signal lines receive signal potentials corresponding to identical data (gray scale data) but having respective different polarities. Meanwhile, a polarity of each of the signal potentials is reversed for every one (1) horizontal scanning period.

[0141] According to the configuration of Fig. 31, it is possible to attain advantages same as those of the configuration of Fig. 26.

[0142] The following description discusses a configuration of Fig. 32. (a) of Fig. 32 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 32 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 32 illustrates the display at a timing t1 of (a) of Fig. 32. The center of (b) of Fig. 32 illustrates the display section at a timing t2 of (a) of Fig. 32. The right side of (b) of Fig. 32 illustrates the display section at a timing t3 of (a) of Fig. 32. The configuration of Fig. 32 is obtained by changing the configuration of Fig. 26 in an arrangement of pixels and control of the storage capacitor wires.

[0143] As illustrated in (b) of Fig. 32, in one of two pixels adjacent to each other in the column direction, two subpixels (first and third subpixels), of the three subpixels, arrayed along the row direction define respective capacitances with identical one of the storage capacitor wires, while the other one subpixel (second subpixel) of the three subpixels defines a capacitance with another one of the storage capacitor wires. In the other one of the two pixels adjacent to each other in the column direction, a subpixel, other than two subpixels arrayed along the row direction, defines a capacitance with the another one of the storage capacitor wires. Moreover, (i) one, of the second data signal lines, corresponding to one of two pixel arrays adjacent to each other and (ii) one, of the first data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other are adjacent to each other with no pixel array therebetween.

[0144] For example, first and second data signal lines S1 and s1 are provided correspondingly to a pixel array including a pixel P, and the pixel P includes three subpixels 1a through 1c which are connected to a scanning signal line G1. Specifically, the two subpixels 1a and 1c are arrayed along the row direction on one side (the upper side of (b) of Fig. 32) of the scanning signal line G1, whereas the other subpixel 1b is provided on the other side (the lower side of (b) of Fig. 32) of the scanning signal line G1. The subpixels 1a and 1b (first and second subpixels) are both connected to the first data signal line S1, whereas the subpixel 1c (third subpixel) is connected to the second data signal line s1. Further, the subpixels 1a and 1c arrayed along the row direction define respective capacitances with the storage capacitor wire Cs1, whereas the other subpixel 1b defines a capacitance with the storage capacitor wire Cs2.

[0145] Meanwhile, a pixel adjacent to the pixel P in the column direction includes three subpixels 2a through 2c, which are connected to a scanning signal line G2. Specifically, the subpixels 2a and 2c are arrayed along the row direction on one side (the upper side of (b) of Fig. 32) of the scanning signal line G2, while the other subpixel 2b is provided on the other side (the lower side of (b) of Fig. 32) of the scanning signal line G2. The subpixels 2a and 2b are both connected to the first data signal line S1, while the subpixel 2c is connected to the second data signal line s1. Further, the subpixel 2b, which is other than the subpixels 2a and 2c arrayed along the row direction, defines a capacitance with the storage capacitor wire Cs2 (which defines the capacitance also with the subpixel 1b of the pixel P), while the subpixels 2a and 2c define respective capacitances with a storage capacitor wire Cs3.

[0146] Further, first and second data signal lines S2 and s2 are provided correspondingly to a pixel array adjacent to the pixel array including the pixel P. A pixel that is adjacent to the pixel P in the row direction includes three subpixels 1A through 1C, which are connected to the scanning signal line G1. Specifically, the subpixels 1A and 1C are arrayed along the row direction on one side (the upper side in (b) of Fig. 32) of the scanning signal line G1, while the subpixel 1B is provided on the other side (the lower side in (b) of Fig. 32) of the scanning signal line G1. The subpixels 1A and 1B are both connected to the first data signal line S2, while the subpixel 1C is connected to the second data signal line s2. Further, the subpixels 1A and 1C arrayed along the row direction define respective capacitances with the storage capacitor wire Cs1, while the subpixel 1B defines a capacitance with the storage capacitor wire Cs2.

[0147] A potential phase of each of the storage capacitor wires shifts in the following manner. A potential phase of each odd-numbered storage capacitor wire leads a potential phase of a subsequent odd-numbered storage capacitor wire by two horizontal scanning periods, while a potential phase of each even-numbered storage capacitor wire remains constant. A potential level of a stor-

age capacitor wire (first storage capacitor wire) shifts one (1) horizontal scanning period after the start of a corresponding frame. Further, a difference between two potential levels, between which the potential level of each odd-numbered storage capacitor wire is switched, is constant.

[0148] Specifically, a potential phase of an odd-numbered storage capacitor wire (e.g., Cs1) leads a potential phase of a subsequent odd-numbered storage capacitor wire (e.g., Cs3) by two horizontal scanning periods. On the other hand, a potential phase of each of the even-numbered storage capacitor wires (e.g., Cs2, Cs4, and so on) remains constant. The potential level of the storage capacitor wire Cs1 shifts in the positive direction (L to H) at the timing t1, which is one (1) horizontal scanning period (1H) after the start of the corresponding frame. Further, a difference between two potential levels, between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) is switched, remains constant throughout one frame period.

[0149] According to the above configuration, the following is possible. Assuming that a subpixel having a luminance corresponding to a signal potential supplied to the subpixel is referred to as a neutral subpixel (indicated with "N"), it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a neutral subpixel (N), and the subpixel 1c serves as a super-dark subpixel (A). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a super-dark subpixel (A), the subpixel 2b serves as a neutral subpixel (N), and the subpixel 2c serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a neutral subpixel (N), and the subpixel 1C serves as a super-dark subpixel (A).

[0150] According to the configuration of Fig. 32, it is possible to attain advantages same as those of the configuration of Fig. 26. Besides, it is possible to reduce the number of types of the potential phases for each of the storage capacitor wires. As such, it is possible to achieve more simple configuration for controlling the potential of each of the storage capacitor wires. Moreover, it is possible to control each of the pixels so that its including three subpixels serve as the super-bright subpixel, the super-dark subpixel, and the neutral subpixel having the luminance corresponding to the signal potential, respectively. As such, it is possible to prevent, in each of the pixels, excessive brightness or excessive darkness.

[0151] The following description discusses a configuration of Fig. 33. (a) of Fig. 33 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 33 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 33 illustrates the display section

at a timing t1 of (a) of Fig. 33. The center of (b) of Fig. 33 illustrates the display section at a timing t2 of (a) of Fig. 33. The right side of (b) of Fig. 33 illustrates the display section at a timing t3 of (a) of Fig. 33.

[0152] The configuration of Fig. 33 is obtained by changing the configuration of Fig. 32 in relation of connection between the pixels and the first and second data signal lines. Specifically, in one of two pixels adjacent to each other in the column direction, a subpixel other than two subpixels arrayed along the row direction is connected to corresponding one of the first data signal lines. In the other one of the two pixels adjacent to each other in the column direction, a subpixel other than two subpixels arrayed along the row direction is connected to corresponding one of the second data signal lines. Further, in one of two pixels adjacent to each other in the row direction, a subpixel other than two subpixels arrayed along the row direction is connected to corresponding one of the first data signal lines. In the other one of the two pixels adjacent to each other in the row direction, a subpixel other than two subpixels arrayed along the row direction is connected to corresponding one of the second data signal lines.

[0153] According to the above configuration, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a neutral subpixel (N), and the subpixel 1c serves as a super-dark subpixel (A). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a super-dark subpixel (A), the subpixel 2b serves as a neutral subpixel (N), and the subpixel 2c serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a neutral subpixel (N), and the subpixel 1C serves as a super-dark subpixel (A).

[0154] According to the configuration of Fig. 33, it is possible to attain advantages same as those of the configuration of Fig. 32. Besides, it is possible to provide neutral subpixels (N) in a 2×2 matrix in such a way that polarities of the respective neutral subpixels (N) are distributed checkerwise. As such, it is possible to prevent flicker.

[0155] The following description discusses a configuration of Fig. 34. (a) of Fig. 34 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 34 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 34 illustrates the display section at a timing t1 of (a) of Fig. 34. The center of (b) of Fig. 34 illustrates the display section at a timing t2 of (a) of Fig. 34. The right side of (b) of Fig. 34 illustrates the display section at a timing t3 of (a) of Fig. 34.

[0156] The configuration of Fig. 34 is obtained by changing the configuration of Fig. 32 in control of the first and second data signal lines. Specifically, (i) one, of the

first data signal lines, corresponding to one of two pixel arrays adjacent to each other and (ii) one, of the second data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other receive signal potentials having an identical polarity. According to the configuration, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a neutral subpixel (N), and the subpixel 1c serves as a super-dark subpixel (A). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a super-dark subpixel (A), the subpixel 2b serves as a neutral subpixel (N), and the subpixel 2c serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-dark subpixel (A), the subpixel 1B serves as a neutral subpixel (N), and the subpixel 1C serves as a super-bright subpixel (M).

[0157] According to the configuration of Fig. 34, it is possible to attain advantages same as those of the configuration of Fig. 32. Besides, two data signal lines adjacent to each other with no pixel array therebetween receive signal potentials having an identical polarity. Therefore, it is possible to reduce power consumption due to a parasitic capacitance defined by the two data signal lines. As such, it is possible to reduce a load on the source driver.

[0158] The following description discusses a configuration of Fig. 35. (a) of Fig. 35 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 35 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 35 illustrates the display section at a timing t1 of (a) of Fig. 35. The center of (b) of Fig. 35 illustrates the display section at a timing t2 of (a) of Fig. 35. The right side of (b) of Fig. 35 illustrates the display section at a timing t3 of (a) of Fig. 35. The configurations of Fig. 35 and Fig. 32 are different from each other in control of the storage capacitor wires. Therefore, (i) the configuration of the display section and (ii) control of the first and second data signal lines of the embodiment of Fig. 35 are same as those of Fig. 32.

[0159] As illustrated in (a) and (b) of Fig. 35, a potential level of each of the storage capacitor wires (Cs1, Cs2, and so on) changes so that the potential level is switched between two levels (High and Low) for every 10 horizontal scanning periods (10H). In a case where a first storage capacitor wire is the storage capacitor wire Cs1, which is positioned more upstream in the scanning direction than the storage capacitor wire Cs2 (the storage capacitor wires Cs1 and Cs2 correspond to a pixel (e.g., pixel P) which is first to receive data among pixels in corresponding one of the pixel arrays), a potential phase of an odd-numbered storage capacitor wire (e.g., Cs1) leads a potential phase of the subsequent odd-numbered storage capacitor wire (e.g., Cs3) by two horizontal scan-

ning periods. Similarly, a potential phase of an even-numbered storage capacitor wire (e.g., Cs2) leads a potential phase of the subsequent even-numbered storage capacitor wire (e.g., Cs4) by two horizontal scanning periods. The potential level of the storage capacitor wire Cs1 (first storage capacitor wire) shifts in the positive direction (L to H) at the timing t2, which is two horizontal scanning periods (2H) after the start of a corresponding frame. The potential level of the storage capacitor wire Cs2 (second storage capacitor wire) shifts in the negative direction (H to L) at the timing t2, which is two horizontal scanning periods (2H) after the start of a corresponding frame. Further, a difference between two potential levels (level shift amount) between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches remains constant throughout one (1) frame period, while a difference between two potential levels (level shift amount) between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches also remains constant throughout one (1) frame period. Note however that the difference between the two potential levels between which the potential level of each of the odd-numbered storage capacitor wires (Cs1, Cs3, and so on) switches is larger than the difference between the two potential levels between which the potential level of each of the even-numbered storage capacitor wires (Cs2, Cs4, and so on) switches. Meanwhile, two subpixels, of the three subpixels, arrayed along the row direction in each pixel each have an identical area size, which is half an area size of the other one subpixel of the three subpixels included in the one pixel. Each of capacitances defined by the two subpixels arrayed along the row direction and corresponding one of the storage capacitor wires is half a capacitance defined by the other one subpixel and another one of the storage capacitor wires. For example, the two subpixels (1a and 1c) arrayed along the row direction in the pixel P each have the identical area size, which is half the area size of the other subpixel (1b). Each of capacitances defined by the two subpixels (1a and 1c) and the storage capacitor wire Cs1 is half a capacitance defined by the other subpixel (1b) and the storage capacitor wire Cs2. As such, in Fig. 39, $K_{ca} = CCSa / (CLCa + CCSa) = KCc = CCS / (CLCc + CCS) = KCb = CCSb / (CLCb + CCSb)$.

[0160] According to the configuration of Fig. 35, it is possible to control the pixel P so that the subpixel 1a serves as a super-bright subpixel (M), the subpixel 1b serves as a dark subpixel (a), and the subpixel 1c serves as a super-dark subpixel (A). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a serves as a super-dark subpixel (A), the subpixel 2b serves as a dark subpixel (a), and the subpixel 2c serves as a super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A serves as a super-bright subpixel (M), the subpixel 1B serves as a dark subpixel (a), and

the subpixel 1C serves as a super-dark subpixel (A).

[0161] According to the configuration of Fig. 35, it is possible to attain advantages same as those of the configuration of Fig. 32, except for an advantage of preventing excess brightness or excess darkness in each of the pixels.

[0162] The following description discusses a configuration of Fig. 36. (a) of Fig. 36 is a timing diagram illustrating how a display section of the liquid crystal display of the present invention is driven. (b) of Fig. 36 is a view schematically illustrating a configuration of the display section and a process of how the display section is driven. The left side of (b) of Fig. 36 illustrates the display section at a timing t1 of (a) of Fig. 36. The center of (b) of Fig. 36 illustrates the display section at a timing t2 of (a) of Fig. 36. The right side of (b) of Fig. 36 illustrates the display section at a timing t3 of (a) of Fig. 36.

[0163] The configuration of Fig. 36 is obtained by changing the configuration of Fig. 35 in control of the first and second data signal lines. Specifically, (i) one, of the first data signal lines, corresponding to one of two pixel arrays adjacent to each other and (ii) one, of the second data signal lines, corresponding to the other one of the two pixel arrays adjacent to each other receive signal potentials having an identical polarity. According to the configuration, it is possible to control pixel P so that the subpixel 1a is the super-bright subpixel (M), the subpixel 1b is the dark subpixel (a), and the subpixel 1c is the super-dark subpixel (A). Further, it is possible to control a pixel, which is adjacent to the pixel P in the column direction, so that the subpixel 2a is the super-dark subpixel (A), the subpixel 2b is the dark subpixel (a), and the subpixel 2c is the super-bright subpixel (M). Moreover, it is possible to control a pixel, which is adjacent to the pixel P in the row direction, so that the subpixel 1A is the super-dark subpixel (A), the subpixel 1B is the dark subpixel (a), and the subpixel 1C is the super-bright subpixel (M).

[0164] According to the configuration of Fig. 36, it is possible to attain advantages same as those of the configuration of Fig. 35. Besides, since two data signal lines adjacent to each other with no pixel array therebetween receive signal potentials having the identical polarity, it is possible to prevent power consumption due to a parasitic capacitance defined by the two data signal lines. As such, it is possible to reduce a load on the source driver.

[0165] According to the present embodiment, the potential level of each of the storage capacitor wires is controlled by a storage capacitor wire signal (CS signal) supplied to each of the storage capacitor wires. It should be noted that the potential phase of each of the storage capacitor wires is illustrated without taking into consideration a waveform distortion due to a parasitic capacitance etc. Therefore, in the present embodiment, the potential phase of each of the storage capacitor wires is same as a phase (waveform) of the storage capacitor wire signal (CS signal).

[0166] Fig. 40 is a block diagram illustrating a configuration of a liquid crystal display device of the present invention. As illustrated in Fig. 40, the liquid crystal display device of the present invention includes a display section (liquid crystal panel), a source driver, a gate driver, a backlight, a backlight drive circuit, a display control circuit, a data rearrangement circuit 44, and a CS control circuit. The source driver drives data signal lines. The gate driver drives scanning signal lines. The data rearrangement circuit 44 rearranges pieces of input data (described later). The display control circuit controls the source driver, the gate driver, and the backlight drive circuit. The CS control circuit controls a phase and cycle etc. of the CS signal, which is for controlling a potential of each of storage capacitor wires (CS wires).

[0167] The display control circuit receives, from an external signal source (e.g., tuner), (i) a digital video signal Dv indicative of an image to be displayed, (ii) a horizontal sync signal HSY and a vertical sync signal VSY, which correspond to the digital video signal Dv, and (iii) a control signal Dc for controlling display operation. Based on the signals Dv, HSY, VSY, and Dc thus received, the display control circuit generates, as signals for causing the display section to display the image indicated by the digital video signal Dv, (a) a data start pulse signal SSP, (b) a data clock signal SCK, (c) a latch strobe signal LS, (d) a digital image signal DA (corresponding to the video signal Dv) indicative of the image to be displayed, (e) a gate start pulse signal GSP, (f) a gate clock signal GCK, and (f) a gate driver output control signal (scanning signal output control signal) GOE. Then, the display control circuit outputs these signals.

[0168] More specifically, the display control circuit processes the video signal Dv by using its incorporated memory to adjust a timing or the like, if needed, so as to obtain the digital image signal DA. Then, the display control circuit outputs the digital image signal DA. Further, the display control circuit generates, as a signal having pulses and corresponding to each image indicated by the digital image signal DA, the data clock signal SCK. Based on the horizontal sync signal HSY, the display control circuit generates the data start pulse signal SSP, which is in a high-level (H level) state for only a predetermined period in every one (1) horizontal scanning period. Based on the vertical sync signal VSY, the display control circuit generates the gate start pulse signal GSP, which is in the H level state for only a predetermined period in every one (1) frame (one (1) vertical scanning period). Based on the horizontal sync signal HSY, the display control section generates the gate clock signal GCK. Based on the horizontal sync signal HSY and the control signal Dc, the display control circuit generates the latch strobe signal LS and the gate driver output control signal COE.

[0169] Among the signals thus generated by the display control circuit as above, the digital image signal DA, the latch strobe signal LS, a signal POL which controls a polarity of a signal potential (data signal potential), the

data start pulse signal SSP, and the data clock signal SCK are inputted into the source driver. On the other hand, the gate start pulse signal GSP, the gate clock signal GCK, and the gate driver output control signal GOE are inputted into the gate driver. Further, the gate start pulse signal GSP and the gate clock signal GCK, which are outputted from the display control circuit, are inputted into the CS control circuit.

[0170] Based on the digital image signal DA, the data clock signal SCK, the latch strobe signal LS, the data start pulse signal SSP, and the polarity reversal signal POL, the source driver sequentially generates, every one (1) horizontal scanning period, data signals which have analog potentials corresponding to respective pixel values of pixels in the scanning signal lines for the image indicated by the digital image signal DA. Then, the source driver supplies these signals to the data signal lines (e.g., S1a, S1A, S1x, and S1y).

[0171] The gate driver generates a scanning signal based on the gate start pulse signal GSP and the gate clock signal GCK, and the gate driver output control signal GOE. Then, the gate driver supplies these signals to the scanning signal lines, thereby selectively driving the scanning signal lines.

[0172] Since the data signal lines and the scanning signal lines in the display section (liquid crystal panel) are driven by the source driver and the gate driver as above, each of pixel electrodes receives a signal potential from corresponding one of the data signal lines via a TFT which is connected with selected one of the scanning signal lines. Accordingly, a liquid crystal layer included in each of pixels receives a voltage corresponding to the digital image signal DA. The voltage controls an amount of light, which is emitted from the backlight and transmits the liquid crystal layer. As such, the image indicated by the digital video signal Dv is displayed on the pixels.

[0173] Fig. 41 illustrates a configuration of the data rearrangement circuit 44 (refer to Fig. 40) which is employed in the liquid crystal display of the present invention. As illustrated in Fig. 41, the data rearrangement circuit 44 includes a rearrangement control circuit 61, a first line memory 51A, and a second line memory 51B. The rearrangement control circuit 61 receives the parallel inputted signals Dv, HSY, VSY, and Dc, which are data for one (1) line, and generates output data for one (1) horizontal scanning period (1H). For example, the rearrangement control circuit 61 temporarily stores, on the first memory 51A, pieces of data for a pixel array. Meanwhile, the rearrangement control circuit 61 temporally stores, on the second line memory 51B, pieces of data that are same as those stored in the first memory 51A. Then, the rearrangement control circuit 61 reads out the pieces of data alternately from the first line memory 51A and the second line memory 51B. In this way, the rearrangement control circuit 61 generates serial data, for one (1) horizontal scanning period, in which plural pairs of pieces of identical data are sequentially aligned. The pieces of data read out alternately from the first line memory 51A and

the second line memory 51B correspond to signal potentials to be supplied to first data signal lines and second data signal lines, respectively.

[0174] Further, as illustrated in Fig. 42, the display control circuit transmits, to the source driver, the data generated in the data rearrangement circuit 44. The source driver includes a DAC1 (for a positive polarity) and a DAC2 (for a negative polarity). Two pieces of data (two pieces of identical gray scale data) corresponding to one pixel array (a pair of first and second signal lines) are inputted into the DAC1 and the DAC1, respectively, so as to be converted into analog signal potentials.

[0175] In this Description, the "potential polarity" is indicative of a longitudinal level with respect to a reference potential. Further, the "reversal of polarity (reversal of potential polarity)" indicates that a potential lower than the reference potential shifts to a potential higher than the reference potential, or that a potential higher than the reference potential shifts to a potential lower than the reference potential. The reference potential can be Vcom (common potential), which is a potential of a common electrode (counter electrode). Alternatively, the reference potential can be any other potential.

[0176] The following description discusses an exemplary configuration of the liquid crystal display device of the present invention for use in a television receiver. Fig. 43 is a block diagram illustrating a configuration of a liquid crystal display device 800 for use in the television receiver. The liquid crystal display device 800 includes a liquid crystal display unit 84, a Y/C separation circuit 80, a video chroma circuit 81, an A/D converter 82, a liquid crystal controller 83, a backlight drive circuit 85, a backlight 86, a microcomputer 87, and a gray scale circuit 88. The liquid crystal display unit 84 includes (i) a liquid crystal panel and (ii) a source driver and a gate driver which are for driving the liquid crystal panel.

[0177] According to the liquid crystal display device 800 as above, first, a composite color video signal Scv, serving as a television signal, is externally supplied to the Y/C separation circuit 80. Then, the Y/C separation circuit 80 separates the composite color video signal Scv into a luminance signal and a color signal. The luminance signal and color signal are converted, by the video chroma circuit 81, into analog RGB signals corresponding to three primary colors of light. The analog RGB signals are further converted, by the A/C converter 82, into digital RGB signals. The digital RGB signals are inputted into the liquid crystal controller 83. Meanwhile, the Y/C separation circuit 80 extracts horizontal and vertical sync signals from the externally-inputted composite color video signal Scv. The horizontal and vertical sync signals are also inputted into the liquid crystal controller 83 via the microcomputer 87.

[0178] The liquid crystal display unit 84 receives the digital RGB signals from the liquid crystal controller 83, at a predetermined timing. The digital RGB signals are inputted into the liquid crystal display unit 84 together with a timing signal, which is based on the above hori-

zontal and vertical sync signals. The gray scale circuit 88 generates gray scale potentials for R, G, and B (three primary colors of light), respectively. The gray scale potentials are also supplied to the liquid crystal display unit 84. The liquid crystal display unit 84 generates driving signals (data signals = signal potentials, scanning signals etc.) based on the digital RGB signals, the timing signal, and the gray scale potentials. The driving signals are generated in the source driver, the gate driver, and the like included in the liquid crystal display unit 84. Based on the driving signals, the liquid crystal display unit 84 causes its incorporated liquid crystal panel to display a color image. In order for the liquid crystal display unit 84 to display an image, the liquid crystal panel included in the liquid crystal display unit 84 needs to be backlit. According to the liquid crystal display device 800, a backside surface of the liquid crystal panel is irradiated by the backlight 86 which is driven by the backlight drive circuit 85, under control of the microcomputer 87.

[0179] The microcomputer 87 controls a whole system, such as a drive system as above. In addition, the video signal (composite color video signal) which is externally supplied is not limited to a video signal of television broadcasting, and can therefore be a video signal such as a video signal taken with a camera or a video signal supplied over the Internet. The liquid crystal display device 800 is thus capable of displaying an image based on a variety of video signals.

[0180] In a case where the liquid crystal display device 800 displays an image based on the television broadcasting, the liquid crystal display device 800 is connected with a tuner section 90 (see Fig. 44). The liquid crystal display device 800 and the tuner section 90 constitute a television receiver 601 of the present invention. The tuner section 90 extracts, from a wave (a high-frequency signal) received via an antenna (not illustrated), a signal of a channel to be received. The tuner section 90 then converts the signal to an intermediate frequency signal. Then, the tuner section 90 detects the intermediate frequency signal so as to extract the composite color video signal Scv, serving as a television signal. The composite color video signal Scv is supplied to the liquid crystal display device 800 as described earlier. The liquid crystal display device 800 then displays an image based on the composite color video signal Scv.

[0181] Fig. 45 is an exploded perspective view illustrating an exemplary configuration of a television receiver of the present invention. As illustrated in Fig. 45, the television receiver 601 of the present invention is constituted by the liquid crystal display device 800, a first housing 801, and a second housing 806. The liquid crystal display device 800 is arranged so as to be sandwiched between and held by the first housing 801 and the second housing 806. The first housing 801 has an opening 801a for transmitting an image to be displayed on the liquid crystal display device 800. The second housing 806 covers a backside of the display device 800, and includes an operation circuit 805 for handling the liquid crystal display device

800. Further, the second housing 806 is supported by a support member 808 at the bottom.

[0182] The invention is not limited to the description of the embodiments above, but may be altered within the scope of the claims. An embodiment based on a proper combination of technical means disclosed in different embodiments is encompassed in the technical scope of the invention.

Industrial Applicability

[0183] A liquid crystal panel of the present invention and a liquid crystal display device of the present invention are suitably applicable for use in, for example, a liquid crystal television.

Claims

1. A liquid crystal display device, comprising:

scanning signal lines;
first data signal lines and second data signal lines;
pixels; and
a plurality of storage capacitor wires whose potential is controllable,
in a case where a direction in which the scanning signal lines extend is referred to as a row direction, the pixels being arrayed in matrix along the row direction and a column direction, each pixel array in the column direction being provided correspondingly with one of the first data signal lines and one of the second data signal lines,
each of the pixels including four subpixels which are connected to identical one of the scanning signal lines, the pixel being associated correspondingly with two storage capacitor wires of the plurality of storage capacitor wires, two subpixels of the four subpixels defining respective capacitances with one of the two storage capacitor wires,
one of the two subpixels being connected to the one of the first data signal lines, and an other one of the two subpixels being connected to the one of the second data signal lines,
other two subpixels of the four subpixels defining respective capacitances with an other one of the two storage capacitor wires, and
one of the other two subpixels being connected to the one of the first data signal lines, and an other one of the other two subpixels being connected to the one of the second data signal lines.

2. A liquid crystal display device, comprising:

scanning signal lines;

first data signal lines and second data signal lines;
pixels; and
a plurality of storage capacitor wires whose potential is controllable,
in a case where a direction in which the scanning signal lines extend is referred to as a row direction, the pixels being arrayed in matrix along the row direction and a column direction, each pixel array in the column direction being provided correspondingly with one of the first data signal lines and one of the second data signal lines,
each of the pixels including three subpixels which are connected to identical one of the scanning signal lines, the pixel being associated correspondingly with two storage capacitor wires of the plurality of storage capacitor wires, two subpixels of the three subpixels defining respective capacitances with one of the two storage capacitor wires,
one of the two subpixels being connected to the one of the first data signal lines, and an other one of the two subpixels being connected to the one of the second data signal lines,
an other subpixel of the three subpixels defining a capacitance with an other one of the two storage capacitor wires, and
the other subpixel being connected to the one of the first data signal lines or the one of the second data signal lines.

3. The liquid crystal display device according to claim 1 or 2, wherein each pair of the first data signal lines and the second data signal lines receive signal potentials corresponding to identical data but having respective different polarities.

4. The liquid crystal display device according to any one of claims 1 through 3, wherein:

a potential level of each storage capacitor wire shifts after scanning of the scanning signal line that is connected to the subpixel or subpixels facing this storage capacitor wire, the potential level of each storage capacitor wire shifting at least once after the scanning in a frame in which the scanning is carried out.

5. The liquid crystal display device according to claim 4, wherein potential levels of the two storage capacitor wires associated with the same pixel shift by respective different amounts.

6. The liquid crystal display device according to claim 5, wherein the two storage capacitor wires associated with the same pixel define substantially identical capacitances with the subpixels corresponding

thereto.

7. The liquid crystal display device according to any one of claims 1 through 4, wherein potential levels of the two storage capacitor wires associated with the same pixel shift by a same amount. 5
8. The liquid crystal display device according to claim 7, wherein the two storage capacitor wires associated with the same pixel define different capacitances one of which is larger than the other, with the subpixels corresponding thereto. 10
9. The liquid crystal display device according to claim 4, wherein: 15

the potential levels of the two storage capacitor wires associated with the same pixel shift in respective opposite directions at a first timing after the scanning. 20
10. The liquid crystal display device according to claim 3, wherein the signal potentials are reversed in polarity (i) every or every plural horizontal scanning periods or (ii) every vertical scanning period. 25
11. The liquid crystal display device according to claim 4, wherein each pixel shares one of the plurality of storage capacitor wires with its neighboring pixel adjacent to this pixel in the column direction so that one of the subpixels of this pixel and one of the subpixels of the neighboring pixel define respective capacitances with this storage capacitor wire. 30
12. The liquid crystal display device according to claim 11, wherein the two storage capacitor wires associated with the same pixel shift their potential levels at an identical timing. 35
13. The liquid crystal display device according to claim 11, wherein the two storage capacitor wires associated with the same pixel shift their potential levels at respective timings different by one horizontal period from each other. 40
14. The liquid crystal display device according to claim 12, wherein: 45

the potential level of each of the plurality of storage capacitor wires changes so that the potential level is periodically switched between two levels, and 50

potential phases of odd-numbered storage capacitor wires are subsequently shifted in a same direction by a same amount, whereas potential phases of even-numbered storage capacitor wires are subsequently shifted in a same direction by a same amount, where a first storage 55

capacitor wire is one, being positioned upstream in a scanning direction, of two storage capacitor wires corresponding to that pixel, in each pixel array, which is first to receive data among the pixels of the pixel array.

15. The liquid crystal display device according to claim 14, wherein the potential phases of the odd-numbered storage capacitor wires are subsequently shifted in a same direction by two horizontal scanning periods, whereas the potential phases of the even-numbered storage capacitor wires are subsequently shifted in a same direction by two horizontal scanning periods.
16. The liquid crystal display device according to claim 14 or 15, wherein a potential level of first one of the plurality of storage capacitor wires and a potential level of second one of the plurality of storage capacitor wires shift in respective opposite directions at an identical timing.
17. The liquid crystal display device according to any one of claims 14 through 16, wherein each of the two levels remains constant over a plurality of horizontal scanning periods.
18. The liquid crystal display device according to claim 4, wherein each of the plurality of storage capacitor wires performs a potential level shifting at a first timing after the scanning in such a manner that the level shifting is different between successive frames in terms of at least one of (i) a direction in which the potential level of the each of the plurality of storage capacitor wires shifts and (ii) an amount by which the potential level of the each of the plurality of storage capacitor wires shifts.
19. The liquid crystal display device according to claim 18, wherein:

the amount by which the potential level shifts at the first timing can either be large or small, and the direction in which the potential level shifts at the first timing can either be positive or negative, and 45

four types of level shift pattern, obtained by combining (i) the amount which is the large or the small and (ii) the direction which is the positive or the negative, are carried out in respective successive four frames in the potential level shiftings at the first timing after the scanning.
20. The liquid crystal display device according to claim 1, wherein:

each of the pixels includes the four subpixels which are arrayed in matrix along the row direc-

tion and the column direction, in such a way that two of the four subpixels are arrayed along the row direction on one side of corresponding one of the scanning signal lines, while other two of the four subpixels are arrayed along the row direction on an other side of the corresponding one of the scanning signal lines, two of subpixels arrayed along the column directions are both connected to corresponding one of the first data signal lines or to corresponding one of the second data signal lines, while two of the subpixels arrayed along the row direction define respective capacitances with identical one of the plurality of storage capacitor wires, and two of the subpixels adjacent to each other in the column direction with no scanning signal line therebetween define respective capacitances with identical one of the plurality of storage capacitor wires.

- 21.** The liquid crystal display device according to claim 20, wherein:

in one of two of the pixels adjacent to each other in the column direction, a first subpixel and a second subpixel, which are arrayed along the column direction, are connected to corresponding one of the first data signal lines, while a third subpixel and a fourth subpixel, which are arrayed along the column direction, are connected to corresponding one of the second data signal lines, and in an other one of the two of the pixels, two subpixels, which are included in a corresponding subpixel array including the first subpixel and the second subpixel, are connected to the corresponding one of the first data signal lines, while two subpixels, which are included in a corresponding subpixel array including the third subpixel and the fourth subpixel, are connected to the corresponding one of the second data signal lines.

- 22.** The liquid crystal display device according to claim 20, wherein:

in one of two of the pixels adjacent to each other in the column direction, a first subpixel and a second subpixel, which are arrayed along the column direction, are connected to corresponding one of the first data signal lines, while a third subpixel and a fourth subpixel, which are arrayed along the column direction, are connected to corresponding one of the second data signal lines, and in an other one of the two of the pixels, two subpixels, which are included in a corresponding

subpixel array including the first subpixel and the second subpixel, are connected to the corresponding one of the second data signal lines, while two subpixels, which are included in a corresponding subpixel array including the third subpixel and the fourth subpixel, are connected to the corresponding one of the first data signal lines.

- 23.** The liquid crystal display device according to claim 2, wherein:

each of the pixels includes the three subpixels, in such a way that two of the three subpixels are arrayed along the row direction on one side of corresponding one of the scanning signal lines, while an other one of the three subpixels is provided on an other side of the corresponding one of the scanning signal lines, two of subpixels arrayed along the row direction define respective capacitances with identical one of the plurality of storage capacitor wires, and two of the subpixels adjacent to each other in the column direction with no scanning signal line therebetween define respective capacitances with identical one of the plurality of storage capacitor wires.

- 24.** The liquid crystal display device according to claim 23, wherein:

in one of two of the pixels adjacent to each other, a first subpixel and a third subpixel, which are arrayed along the row direction, define respective capacitances with identical one of the plurality of storage capacitor wires, while a second subpixel defines a capacitance with another one of the plurality of storage capacitor wires, and in an other one of the two of the pixels, two subpixels arrayed along the row direction define respective capacitances with the another one of the plurality of storage capacitor wires.

- 25.** The liquid crystal display device according to claim 23, wherein:

in one of two of the pixels adjacent to each other, a first subpixel and a third subpixel, which are arrayed along the row direction, define respective capacitances with identical one of the plurality of storage capacitor wires, while a second subpixel defines a capacitance with another one of the plurality of storage capacitor wires, and in an other one of the two of the pixels, a pixel, which is other than two subpixels arrayed along the row direction, defines a capacitance with the another one of the plurality of storage capacitor

wires.

26. The liquid crystal display device according to claim 23, wherein, in a case where a first storage capacitor wire is one, being positioned upstream in a scanning direction, of two storage capacitor wires corresponding to a pixel, in each pixel array, which is first to receive data among pixels of the pixel array, a potential level of each odd-numbered storage capacitor wire changes so that the potential level is periodically switched between two levels, and potential phases of the odd-numbered storage capacitor wires subsequently shift in a same direction by a same amount, while a potential level of each even-numbered storage capacitor wire remains constant, or the potential level of each even-numbered storage capacitor wire changes so that the potential level is periodically switched between two levels, and potential phases of the even-numbered storage capacitor wires subsequently shift in a same direction by a same amount, while the potential level of each odd-numbered storage capacitor wire substantially remains constant.
27. The liquid crystal display device according to claim 3, wherein:
- each pixel array is provided correspondingly with one of the first data signal lines and one of the second data signal lines, and each pixel array is such that (i) the first data signal line of a pixel array and (ii) the second data signal line of a neighboring pixel array adjacent to this pixel array are adjacent to each other with no pixel array therebetween, and receive signal potentials having respective different polarities.
28. The liquid crystal display device according to claim 3, wherein:
- each pixel array is provided correspondingly with one of the first data signal lines and one of the second data signal lines, and each pixel array is such that (i) the first data signal line of a pixel array and (ii) the second data signal line of a neighboring pixel array adjacent to this pixel array are adjacent to each other with no pixel array therebetween, and receive signal potentials having an identical polarity.
29. The liquid crystal display device according to claim 1 or 2, wherein:
- each subpixel includes a pixel electrode and a transistor, the transistor is connected to (i) corresponding one of the scanning signal lines and (ii) corre-

sponding one of the first data signal lines or corresponding one of the second data signal lines, and

the pixel electrode or an electrode electrically connected with the pixel electrode defines a capacitance with corresponding one of the storage capacitor wires.

30. The liquid crystal display device according to claim 29, wherein, in each of the pixels, a gap between (i) one pixel electrode included in one of two subpixels arrayed along the row direction and (ii) another pixel electrode included in an other one of the two subpixels arrayed along the row direction serves as an alignment control structure.
31. The liquid crystal display device according to claim 30, wherein the gap is in a V shape as seen in the row direction.
32. An active matrix substrate, comprising:

scanning signal lines;
first data signal lines and second data signal lines;
pixel regions; and
a plurality of storage capacitor wires,
in a case where a direction in which the scanning signal lines extend is referred to as a row direction, the pixel regions being arrayed in matrix along the row direction and a column direction, each pixel region array in the column direction being provided correspondingly with one of the first data signal lines and one of the second data signal lines,
each of the pixel regions including four pixel electrodes which are connected to identical one of the scanning signal lines via respective transistors, the pixel region being associated correspondingly with two storage capacitor wires of the plurality of storage capacitor wires,
two pixel electrodes of the four pixel electrodes defining respective capacitances with one of the two storage capacitor wires,
one of the two pixel electrodes being connected to the one of the first data signal lines via corresponding one of the transistors, and an other one of the two pixel electrodes being connected to the one of the second data signal lines via corresponding one of the transistors,
other two pixel electrodes of the four pixel electrodes defining respective capacitances with an other one of the two storage capacitor wires, and
one of the other two pixel electrodes being connected to the one of the first data signal lines via corresponding one of the transistors, and an other one of the other two pixel electrodes being connected to the one of the second data signal

lines via corresponding one of the transistors.

33. An active matrix substrate, comprising:

scanning signal lines; 5
 first data signal lines and second data signal lines;
 pixel regions; and
 a plurality of storage capacitor wires,
 in a case where a direction in which scanning 10
 signal lines extend is referred to as a row direction, the pixel regions being arrayed in matrix along the row direction and a column direction, each pixel region array in the column direction being provided correspondingly with one of the 15
 first data signal lines and one of the second data signal lines,
 each of the pixel regions including three pixel electrodes which are connected to identical one of the 20
 scanning signal lines via respective transistors, the pixel region being associated correspondingly with two storage capacitor wires of the plurality of storage capacitor wires,
 two pixel electrodes of the three pixel electrodes 25
 defining respective capacitances with one of the two storage capacitor wires,
 one of the two pixel electrodes being connected to the one of the first data signal lines via corresponding one of the transistors, and an other 30
 one of the two pixel electrodes being connected to the one of the second data signal lines via corresponding one of the transistors,
 an other pixel electrode of the three pixel electrodes defining a capacitance with an other one 35
 of the two storage capacitor wires, and the other pixel electrode being connected to the one of the first data signal lines or the one of the second data signal lines via corresponding one of the transistors. 40

34. A liquid crystal panel, comprising:

an active matrix substrate as set forth in claim 32 or 33; and 45
 a substrate including a common electrode.

35. A liquid crystal display unit, comprising:

a liquid crystal panel as set forth in claim 34; and 50
 a driver.

36. A television receiver, comprising:

a liquid crystal display device as set forth in any 55
 one of claims 1 through 31; and
 a tuner section for receiving television broadcasting.

FIG. 1

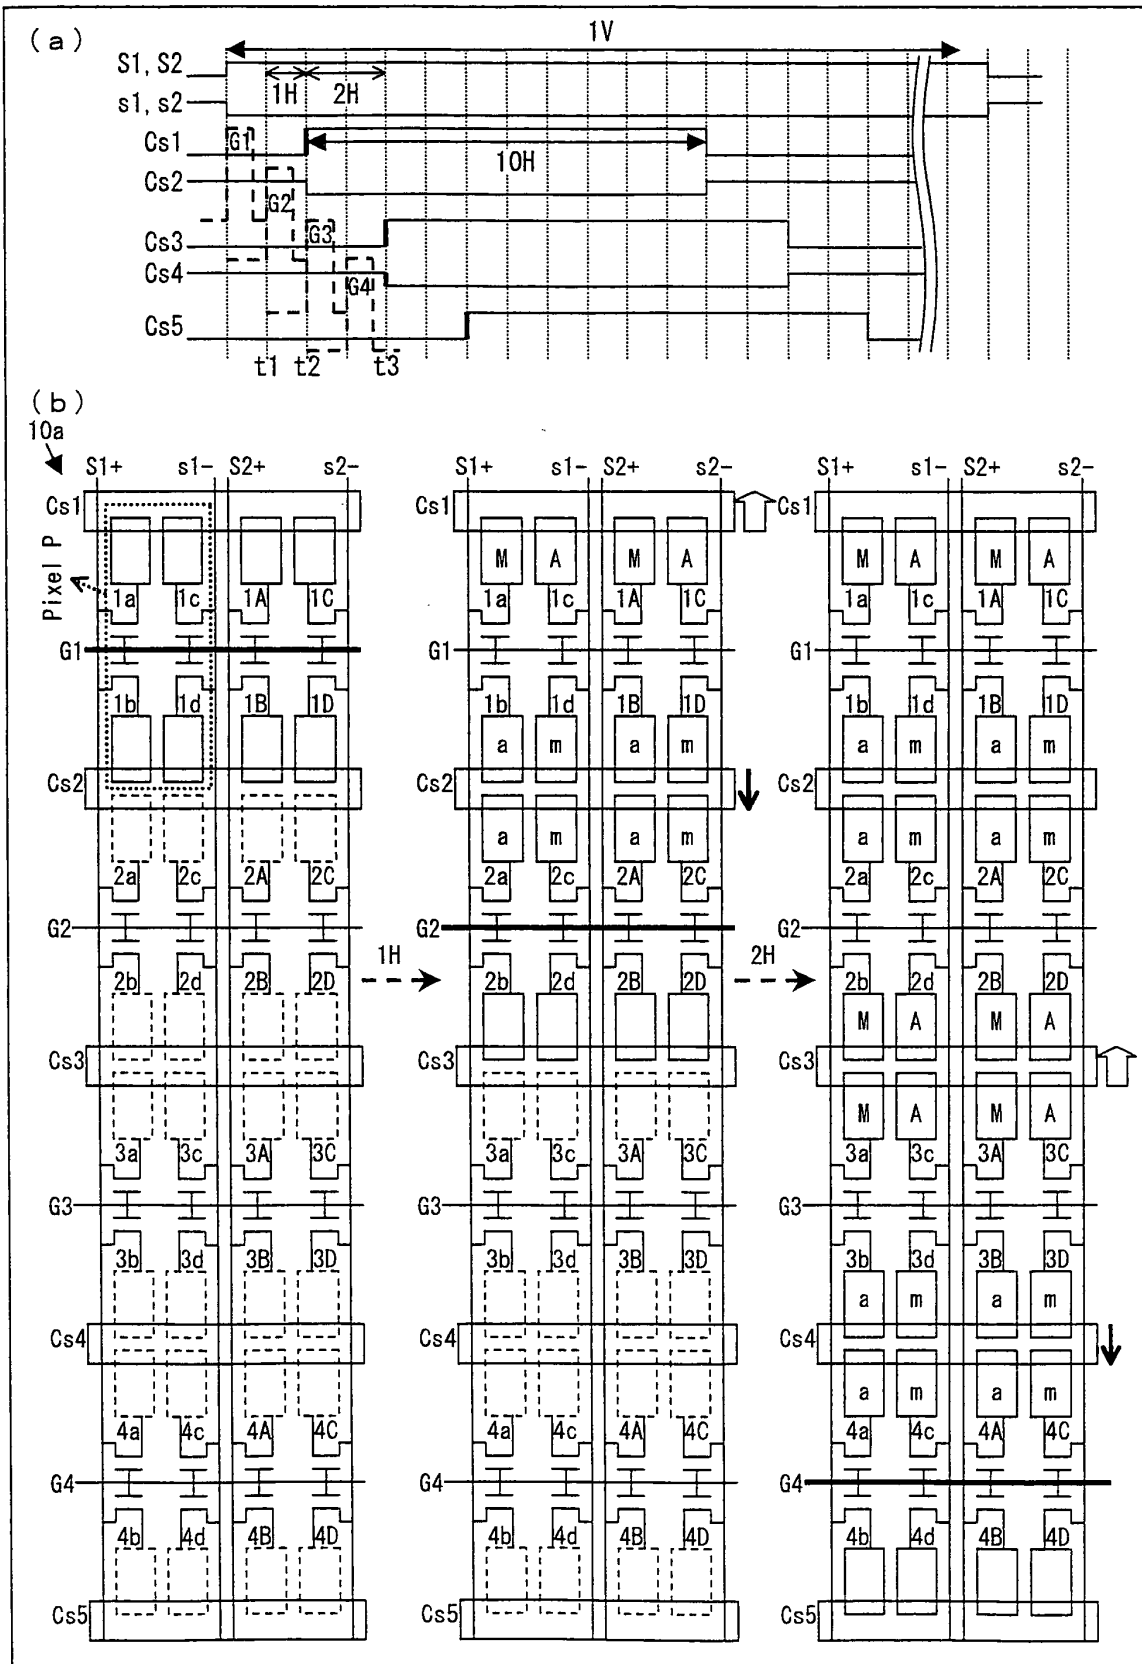


FIG. 2

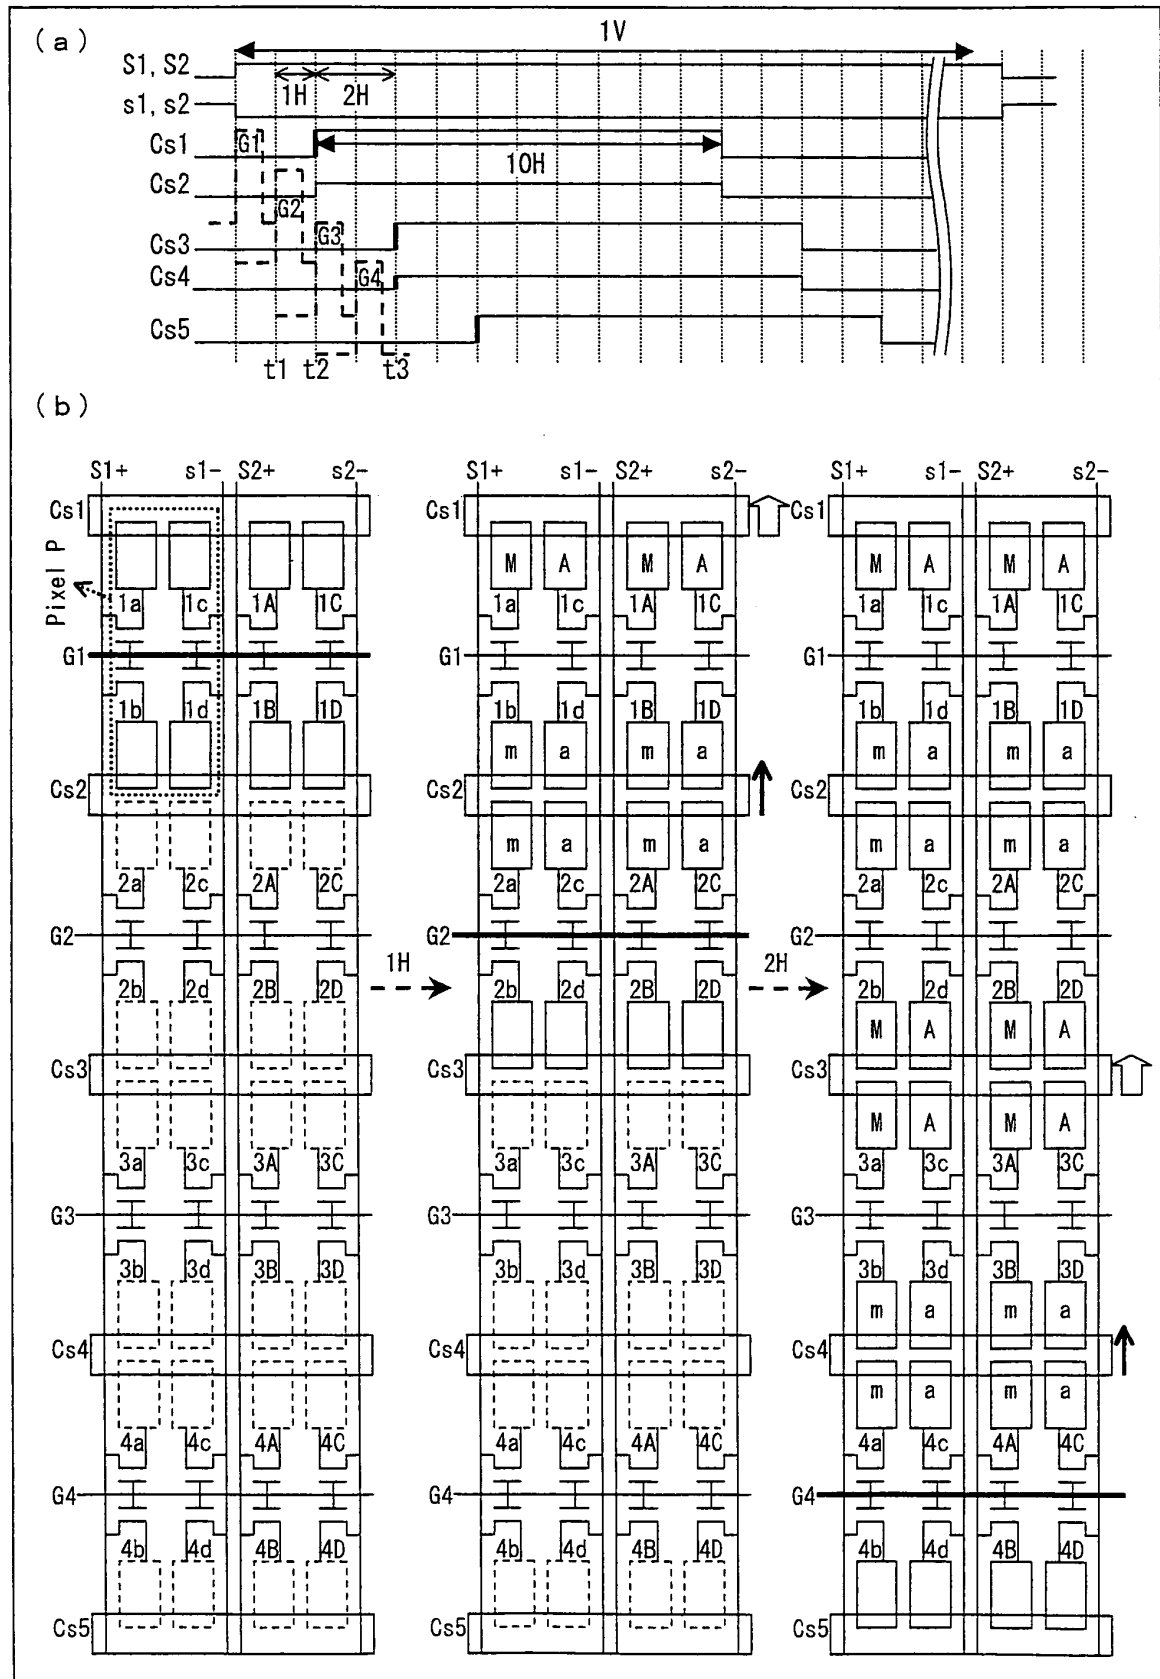


FIG. 3

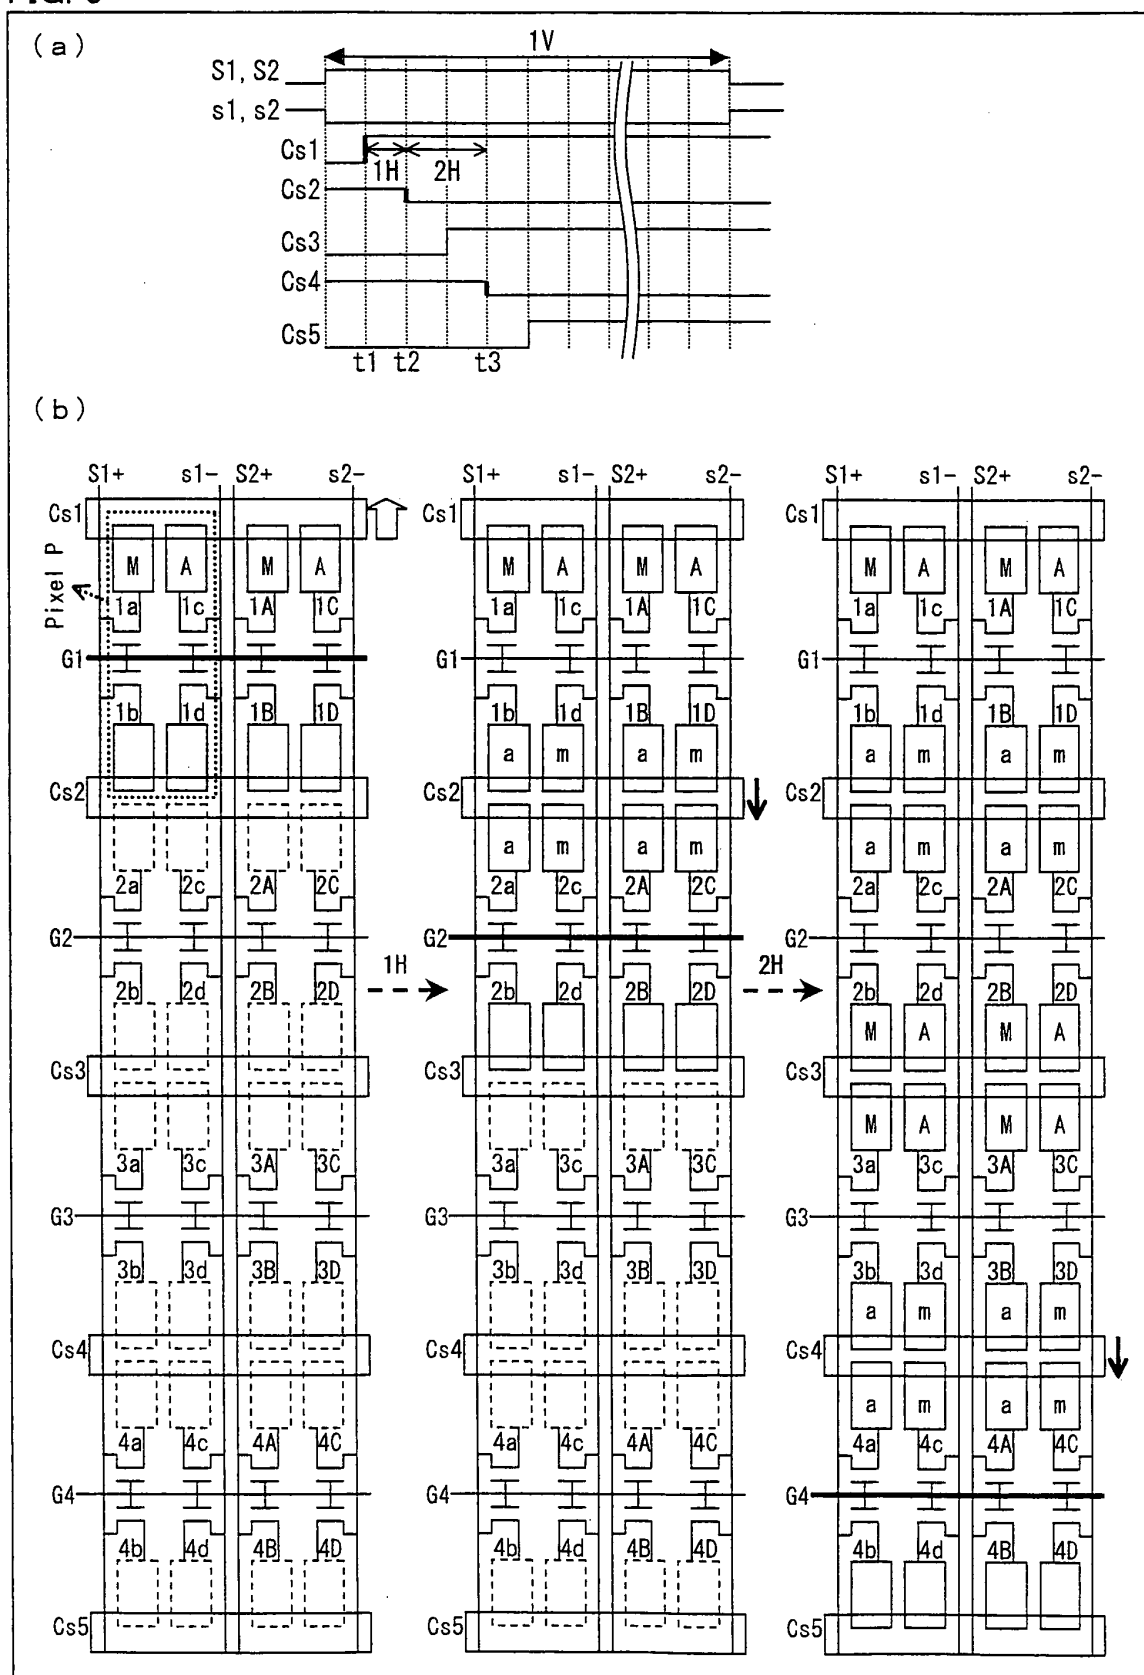


FIG. 4

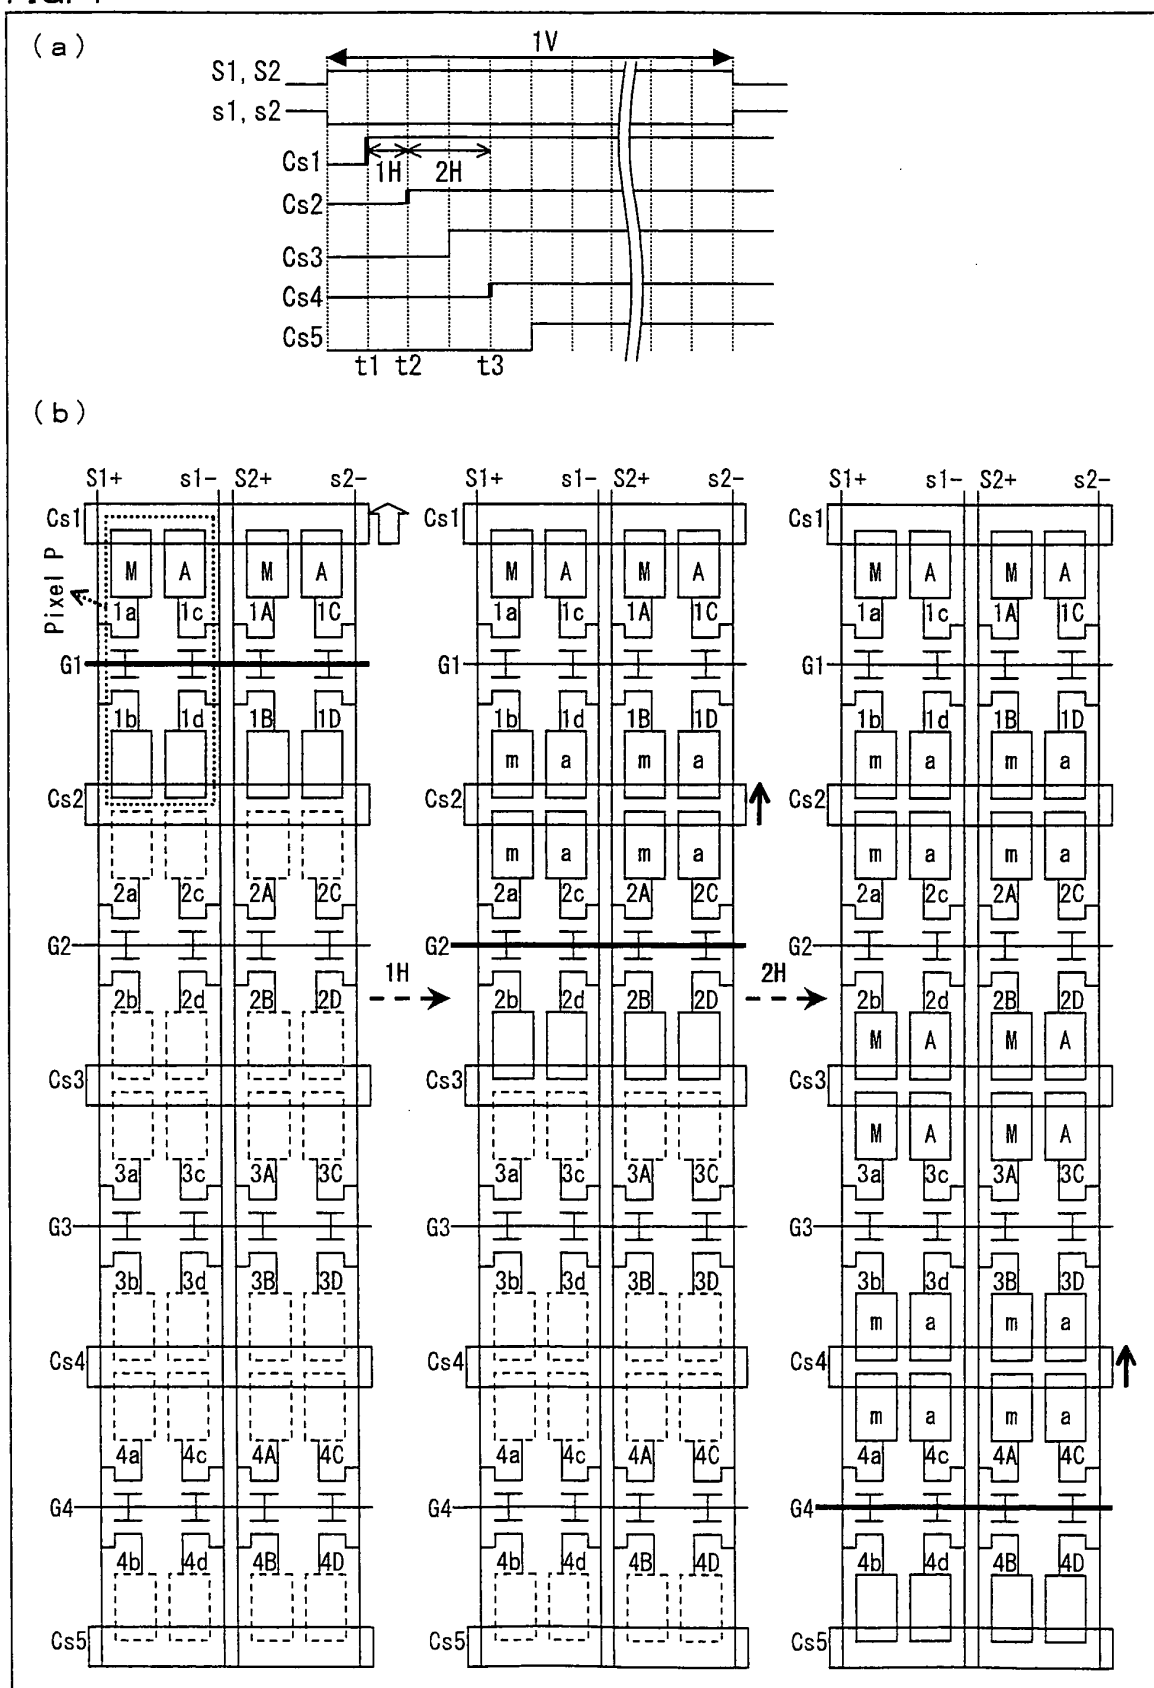


FIG. 5

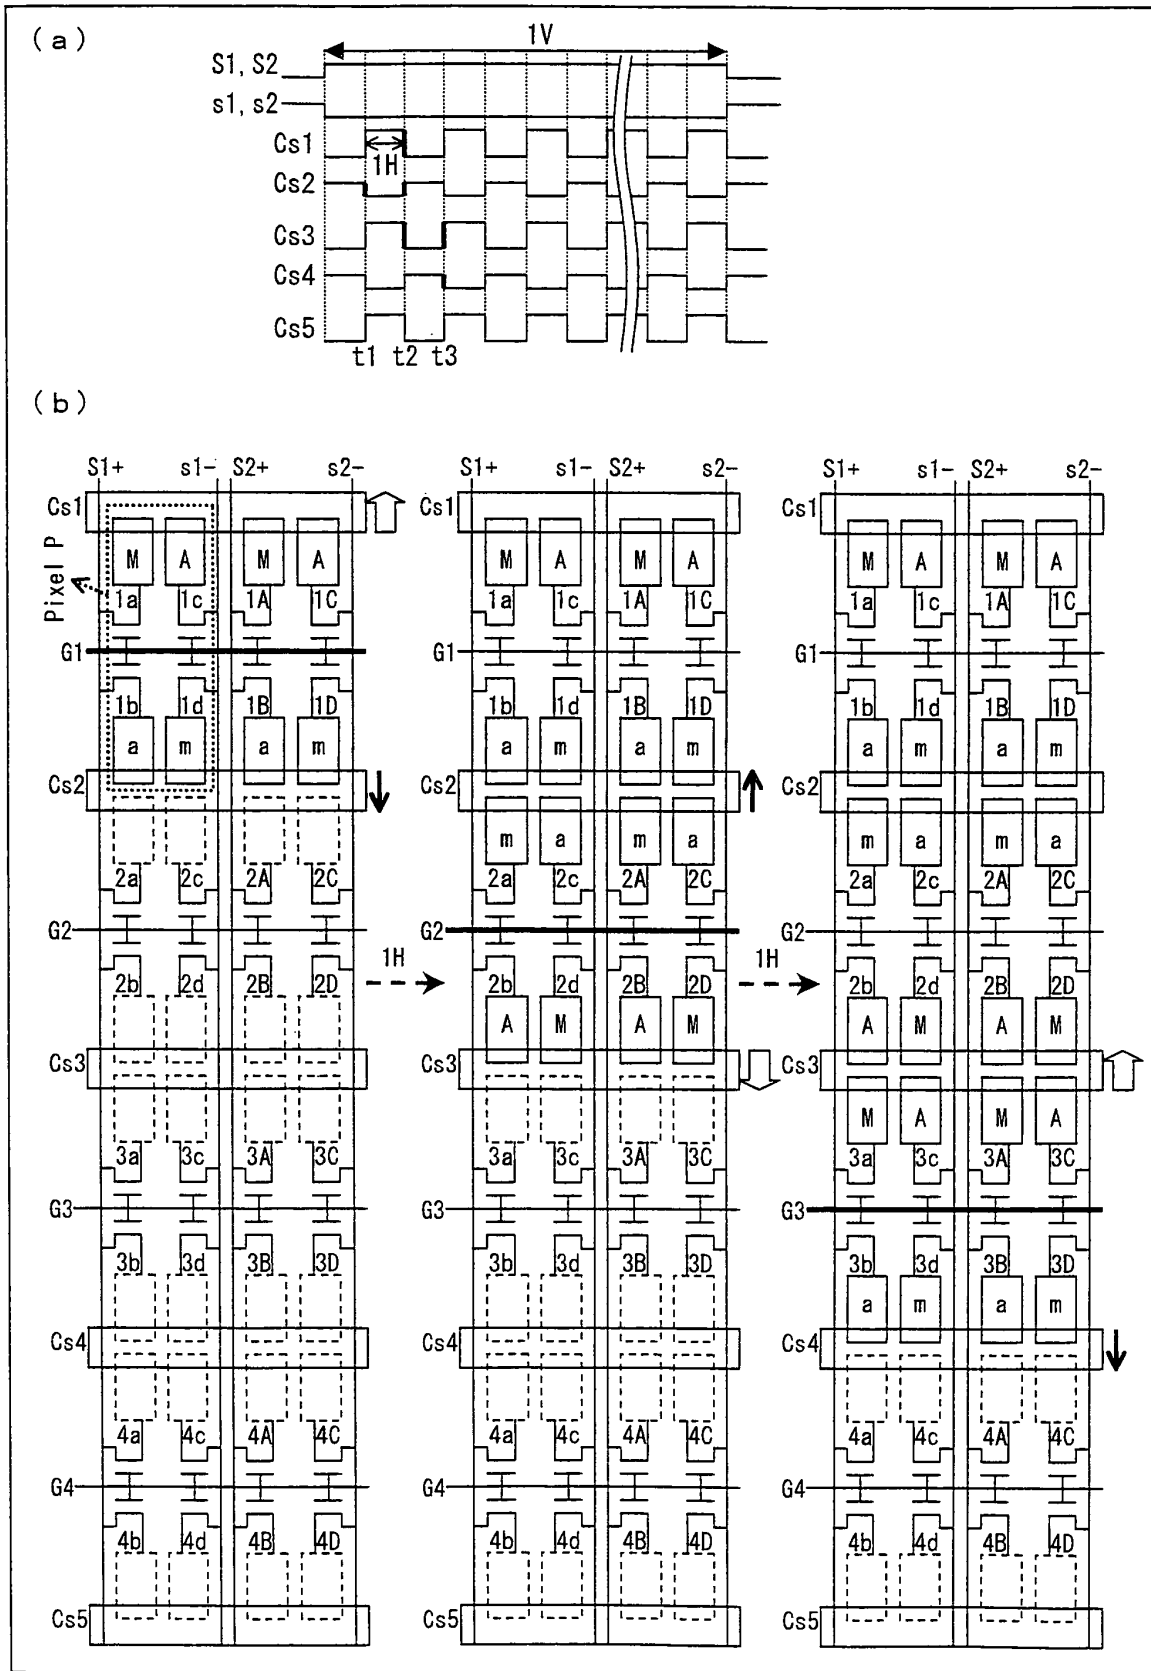


FIG. 6

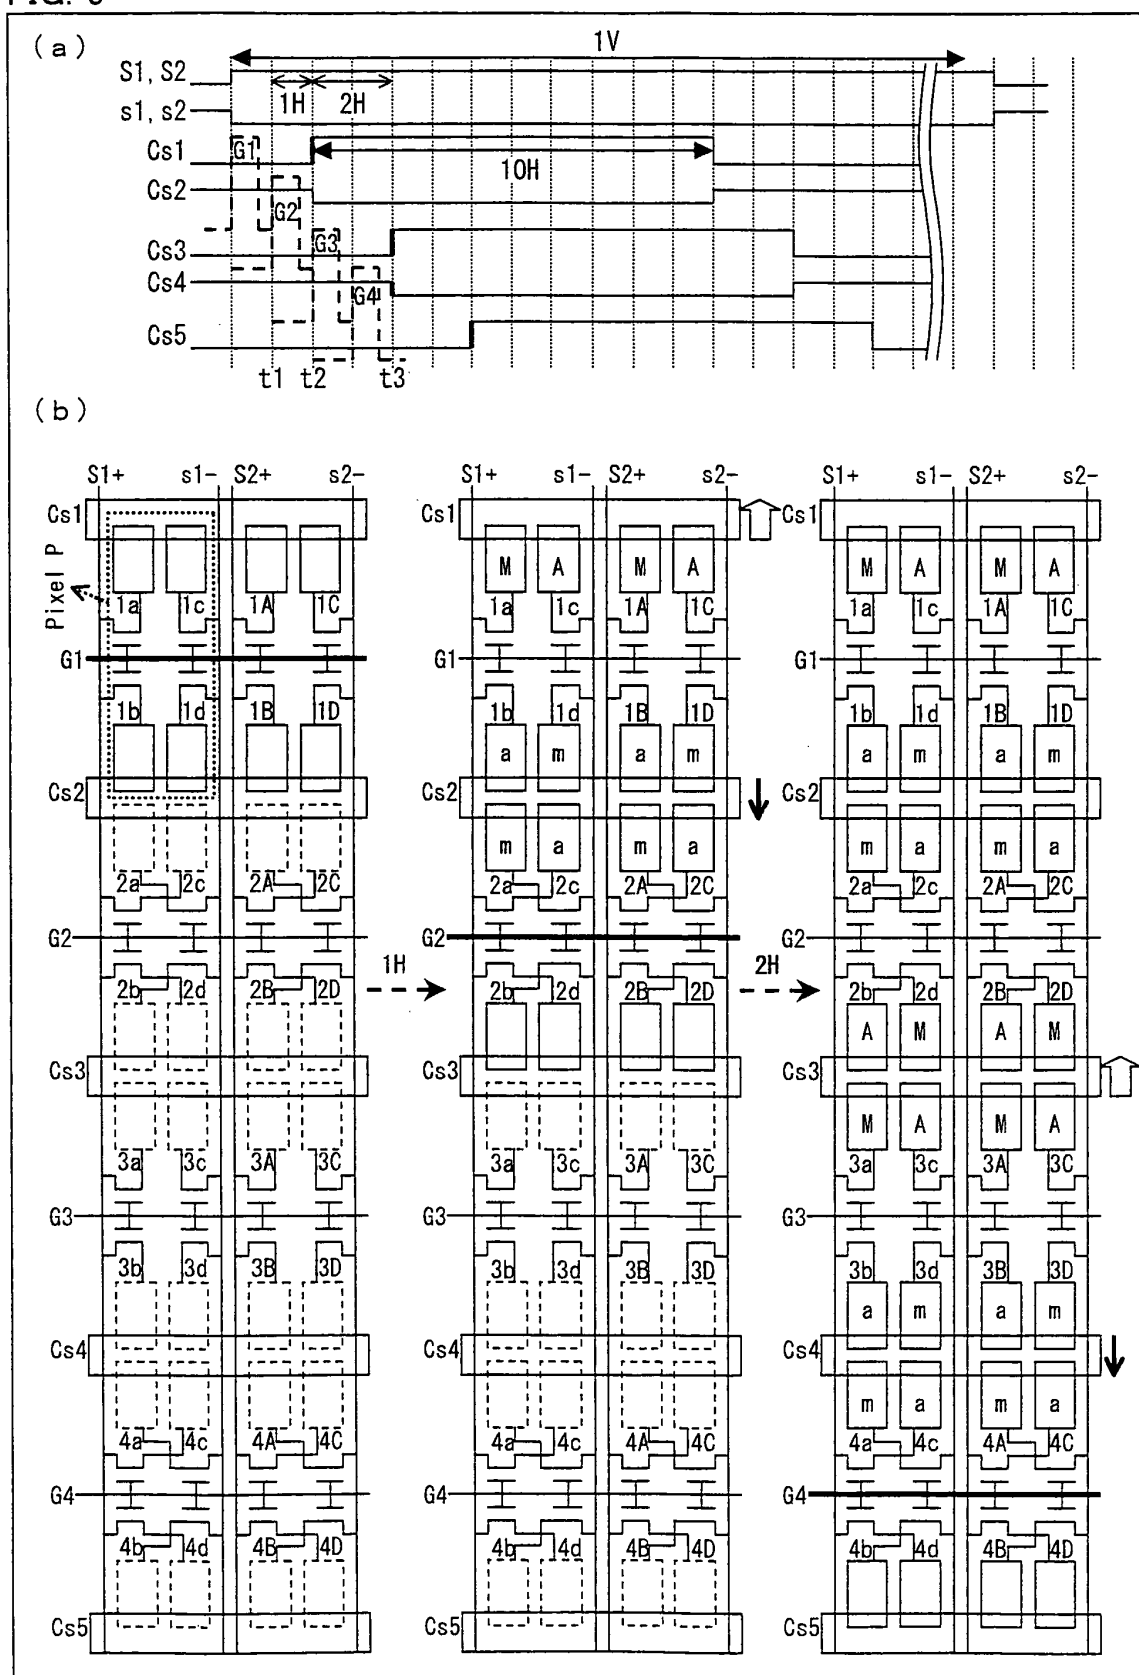


FIG. 7

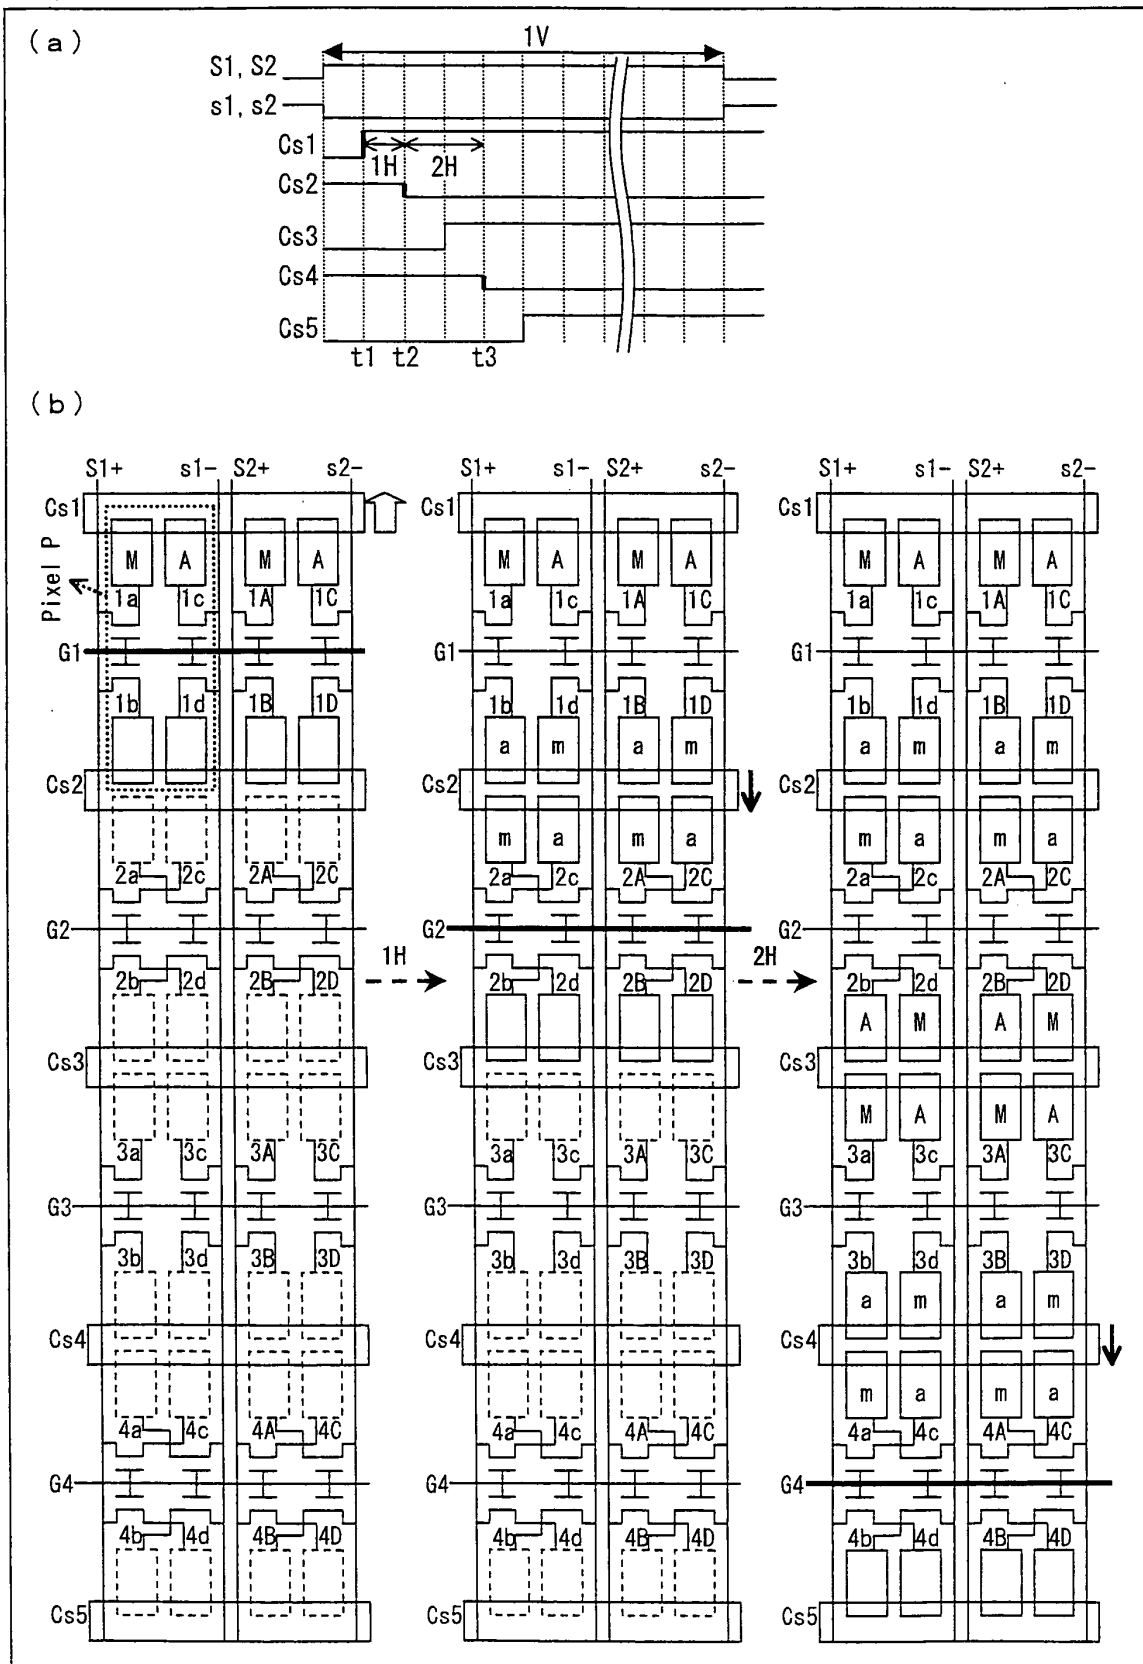


FIG. 8

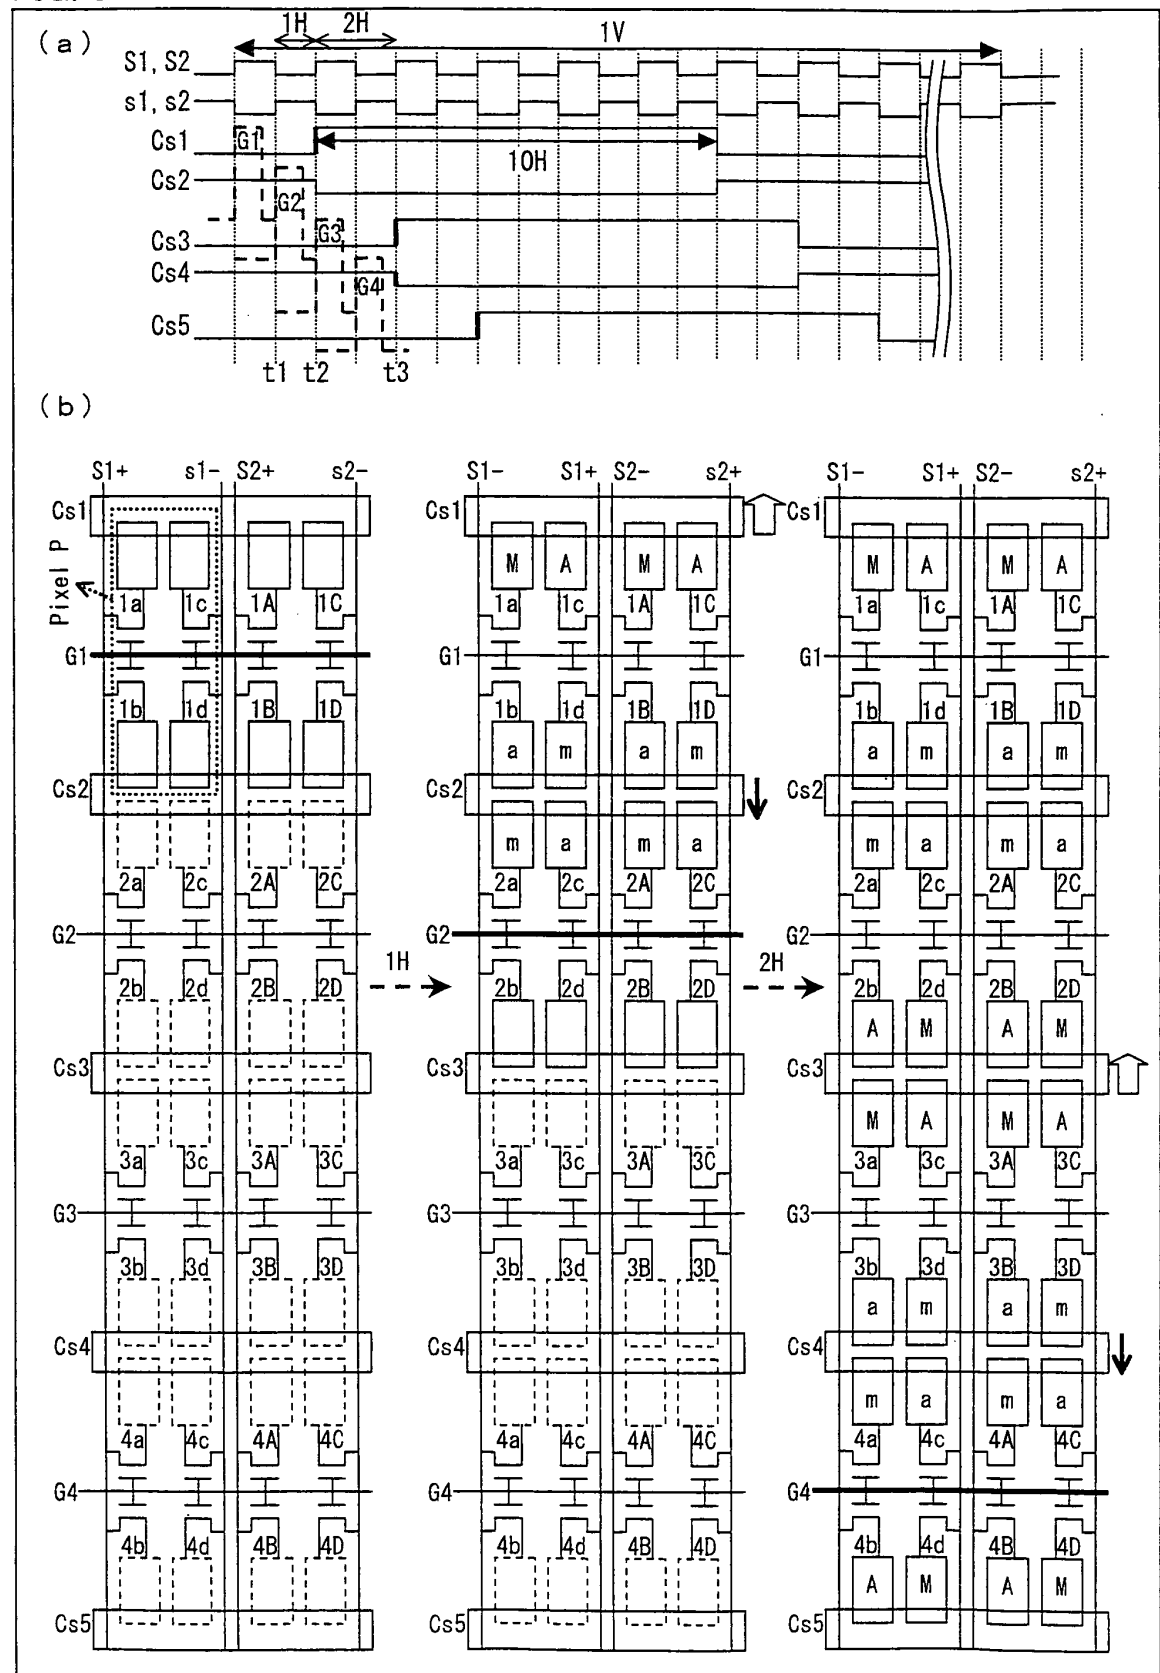


FIG. 9

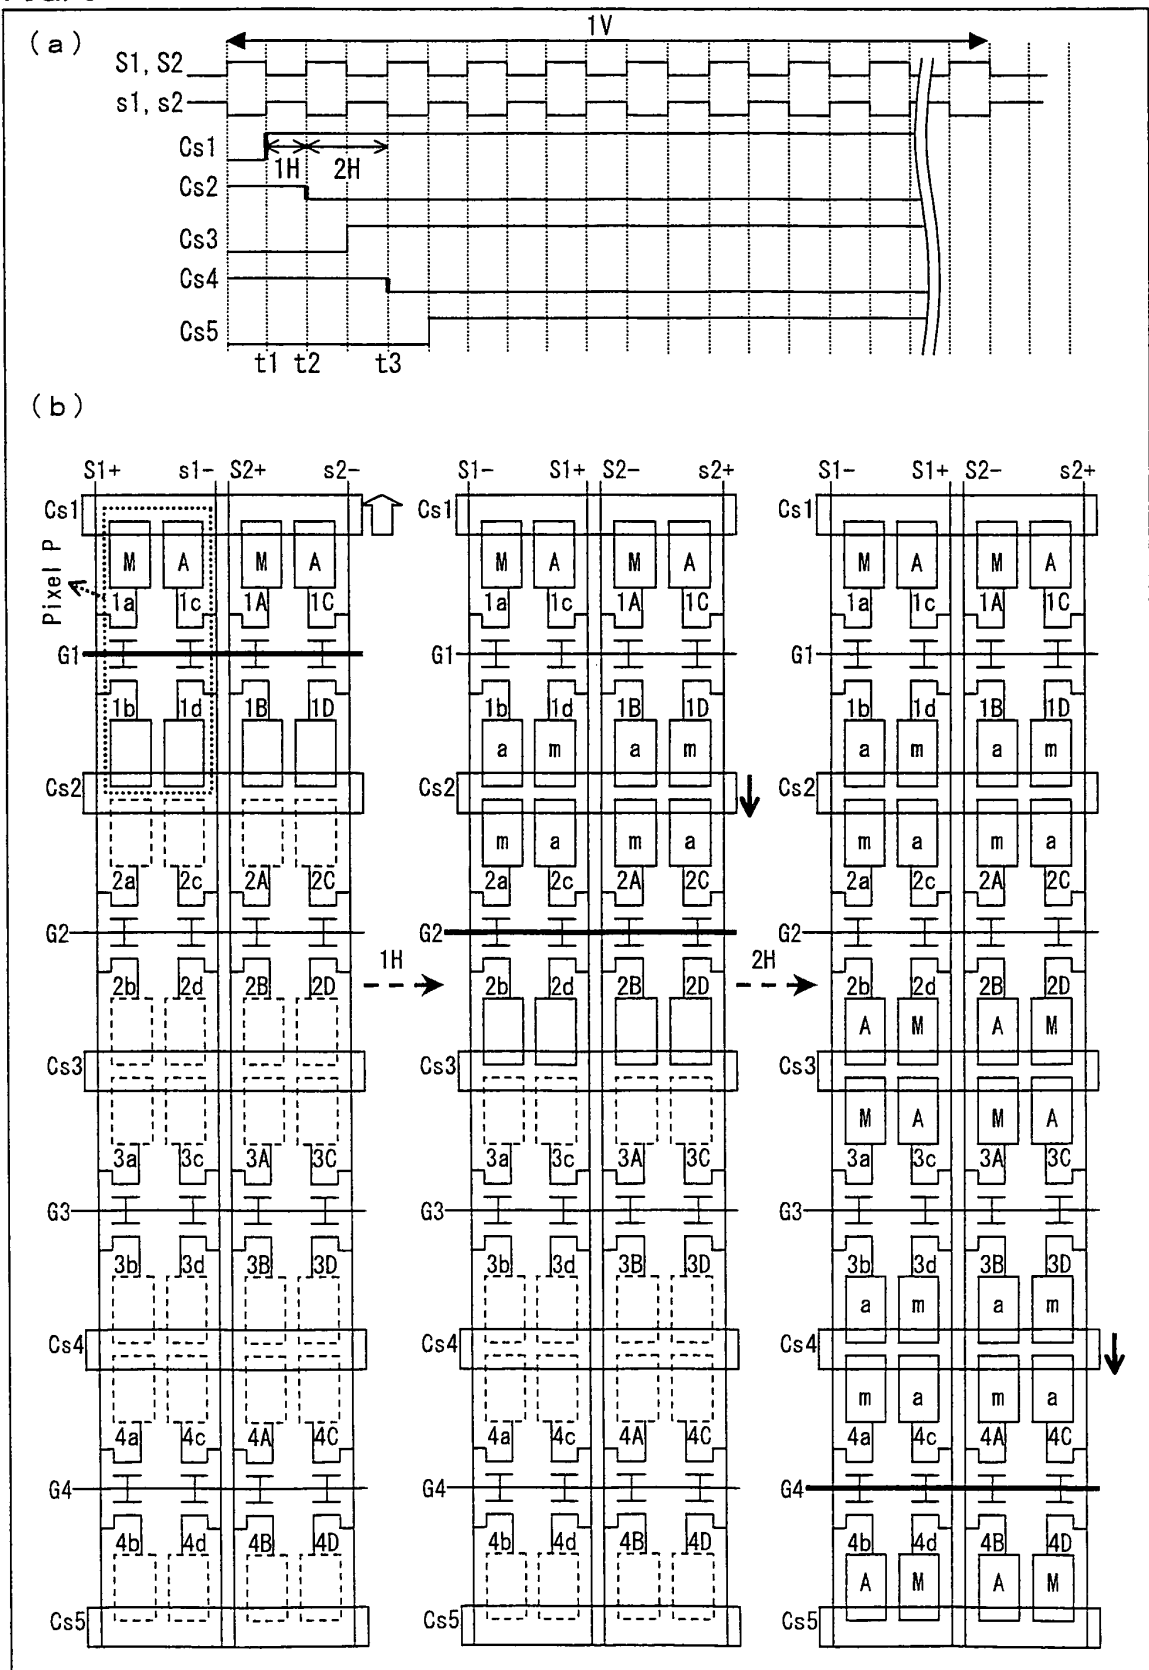


FIG. 10

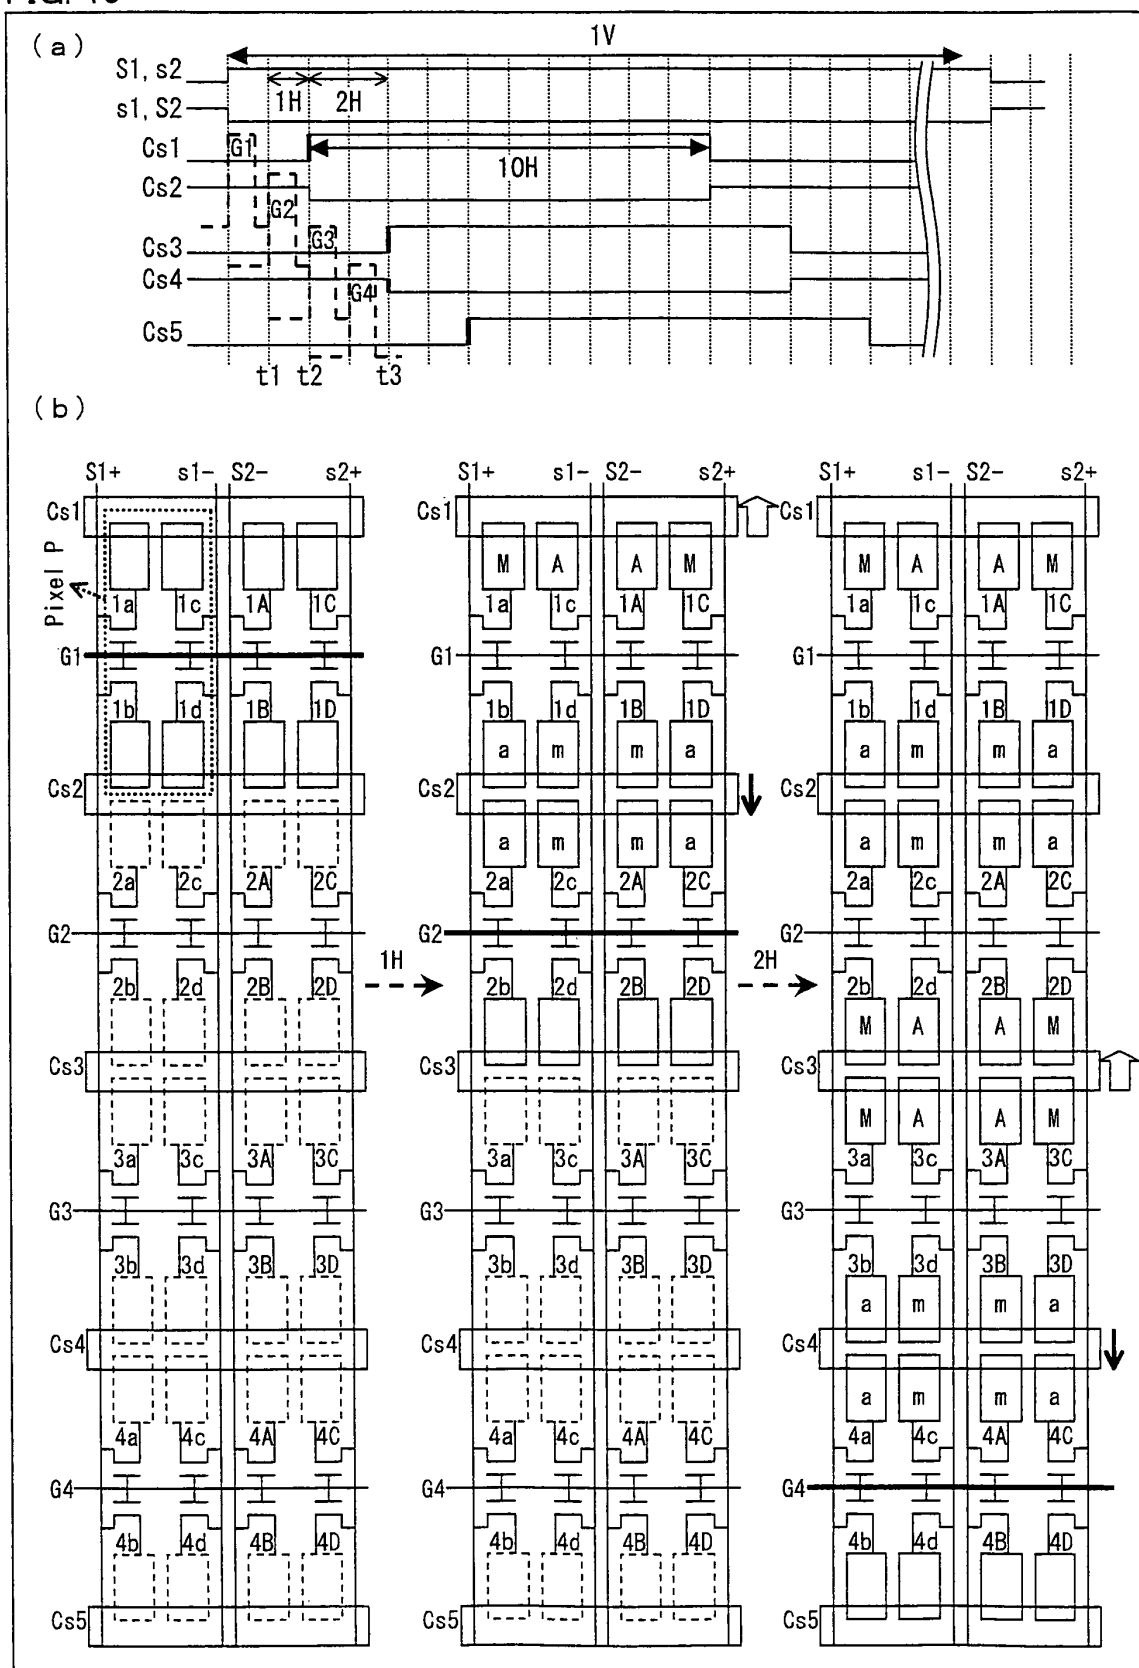


FIG. 11

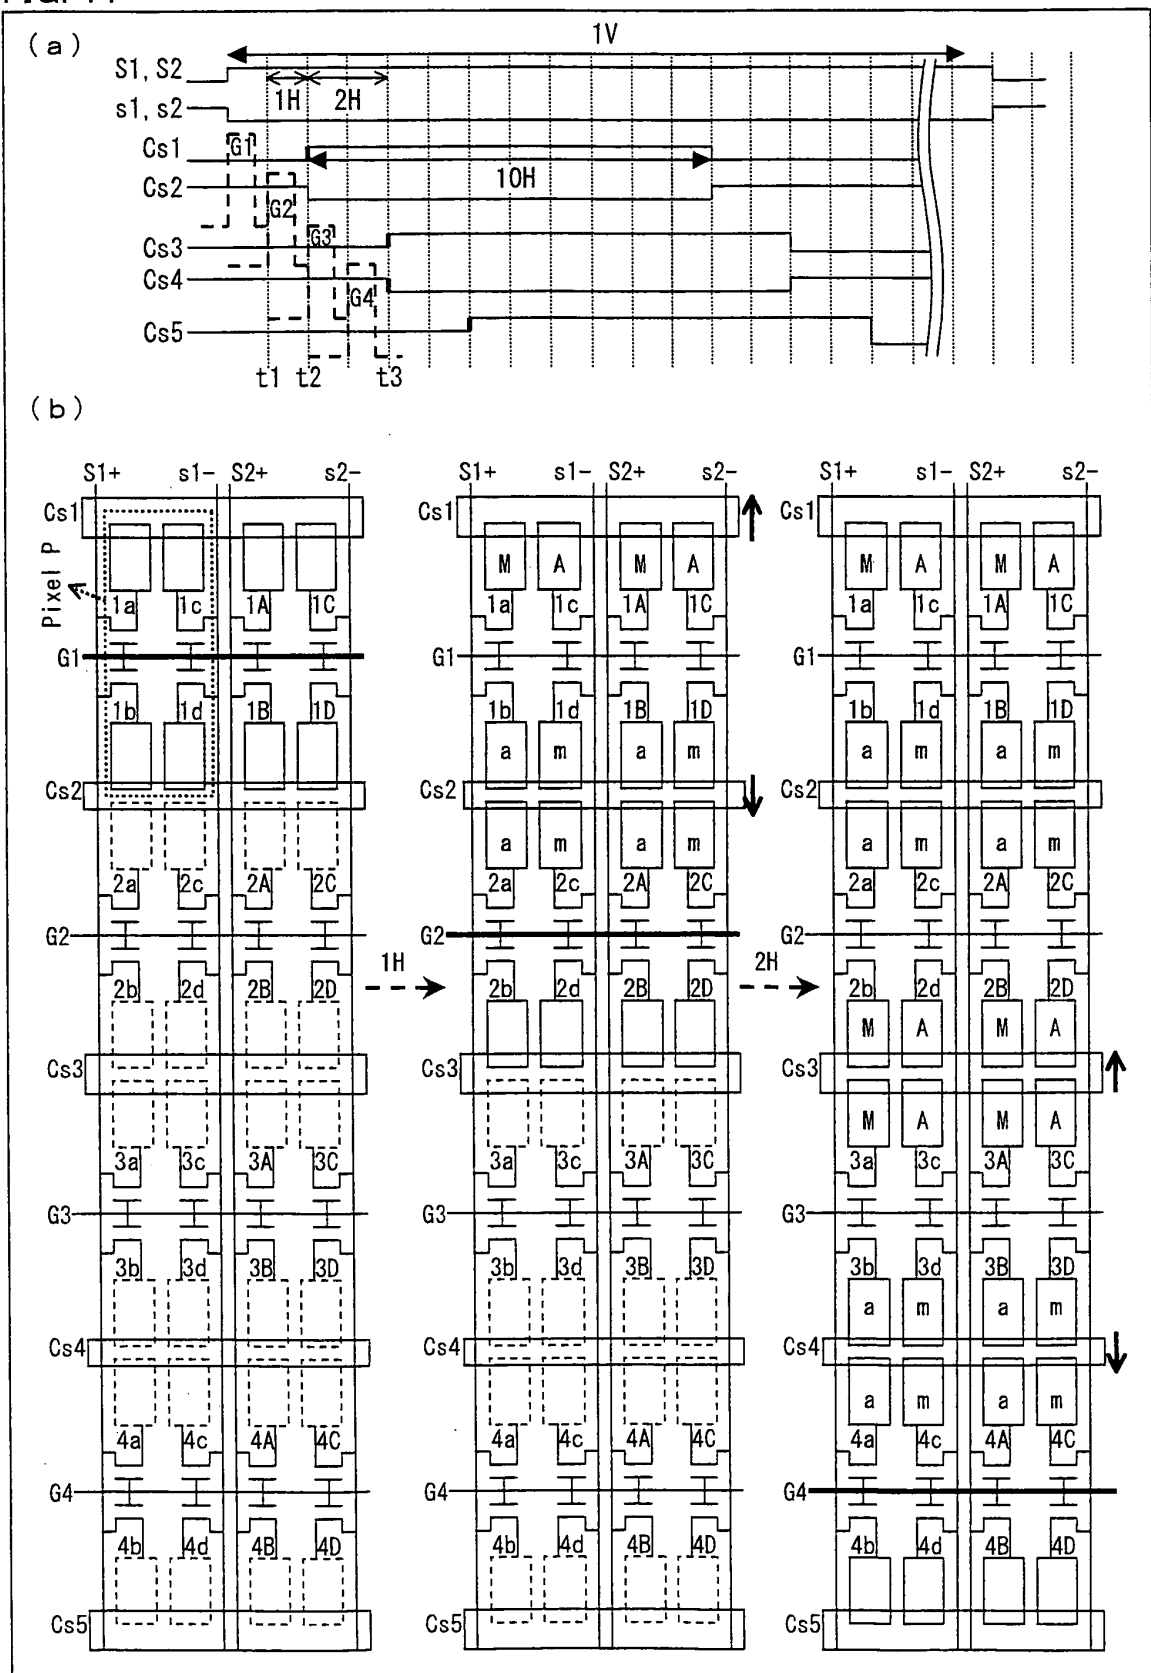


FIG. 12

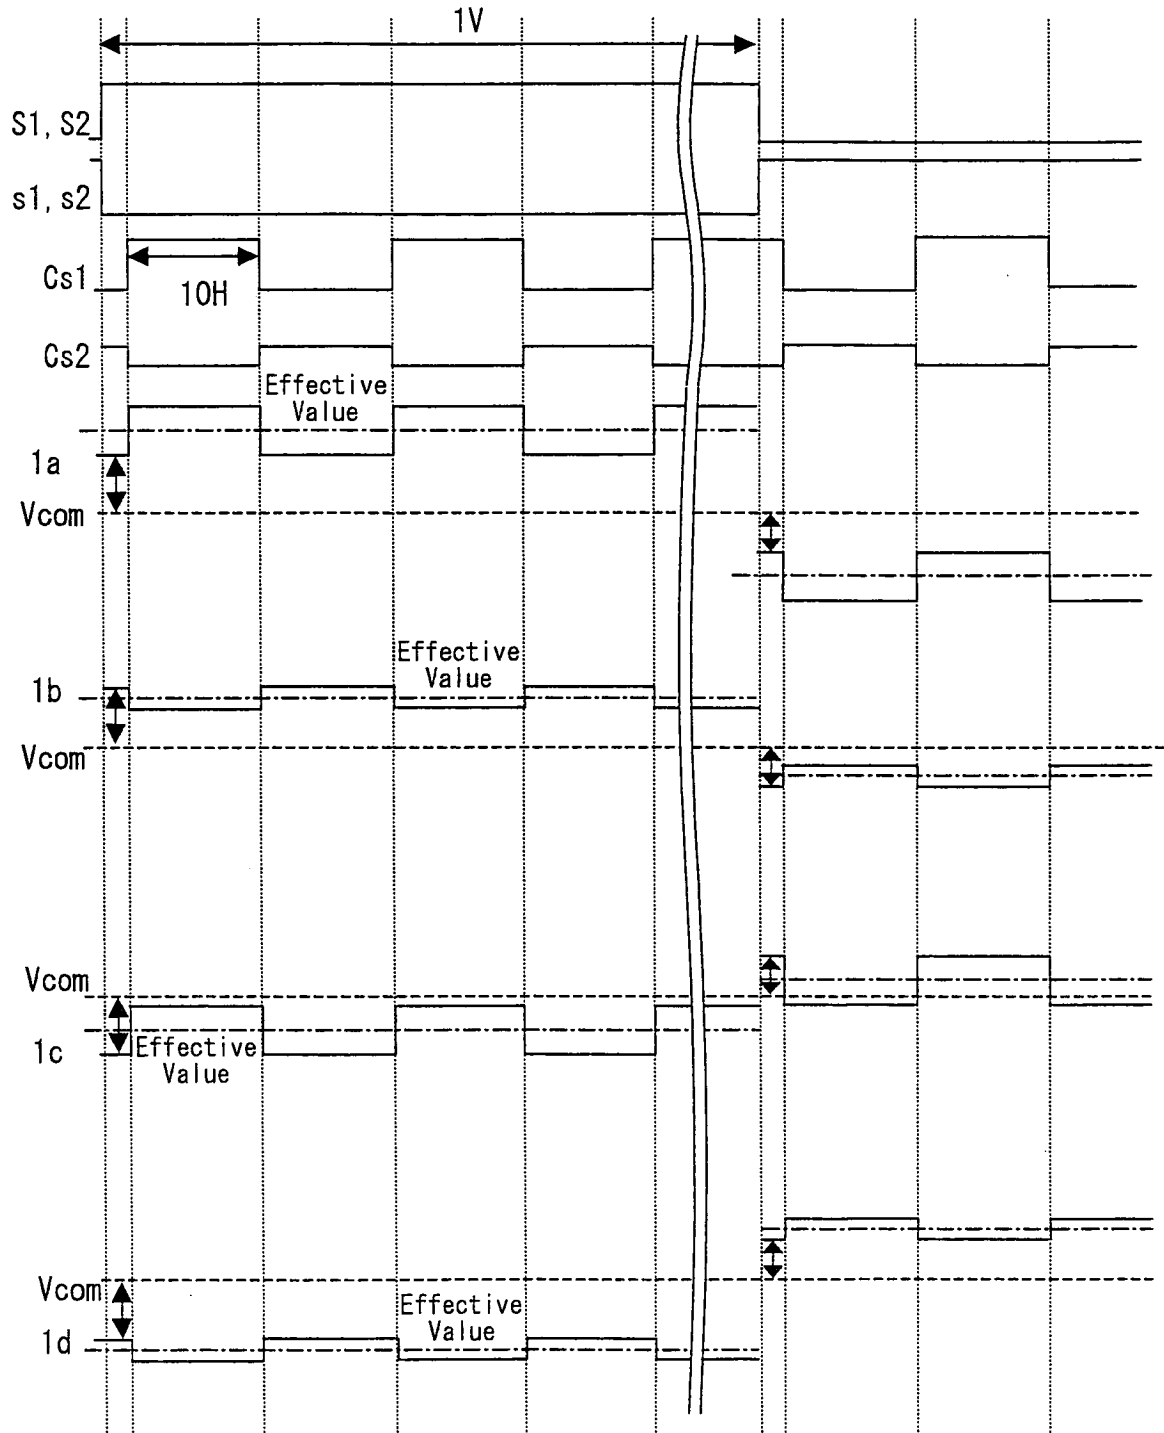


FIG. 13

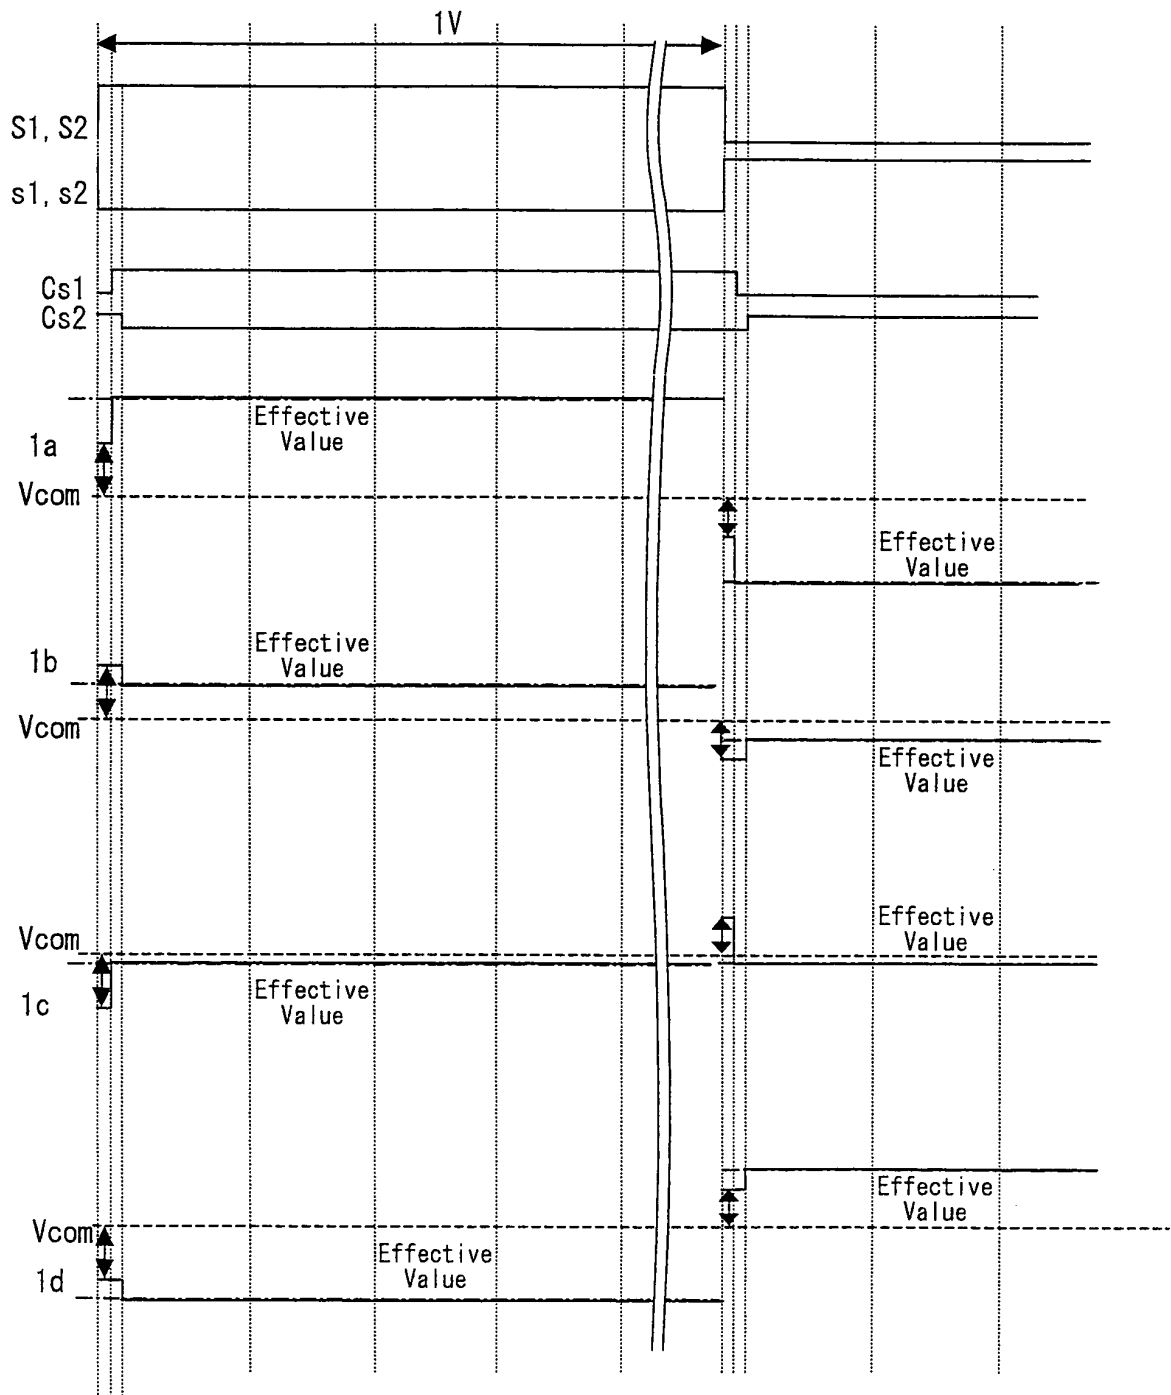


FIG. 14

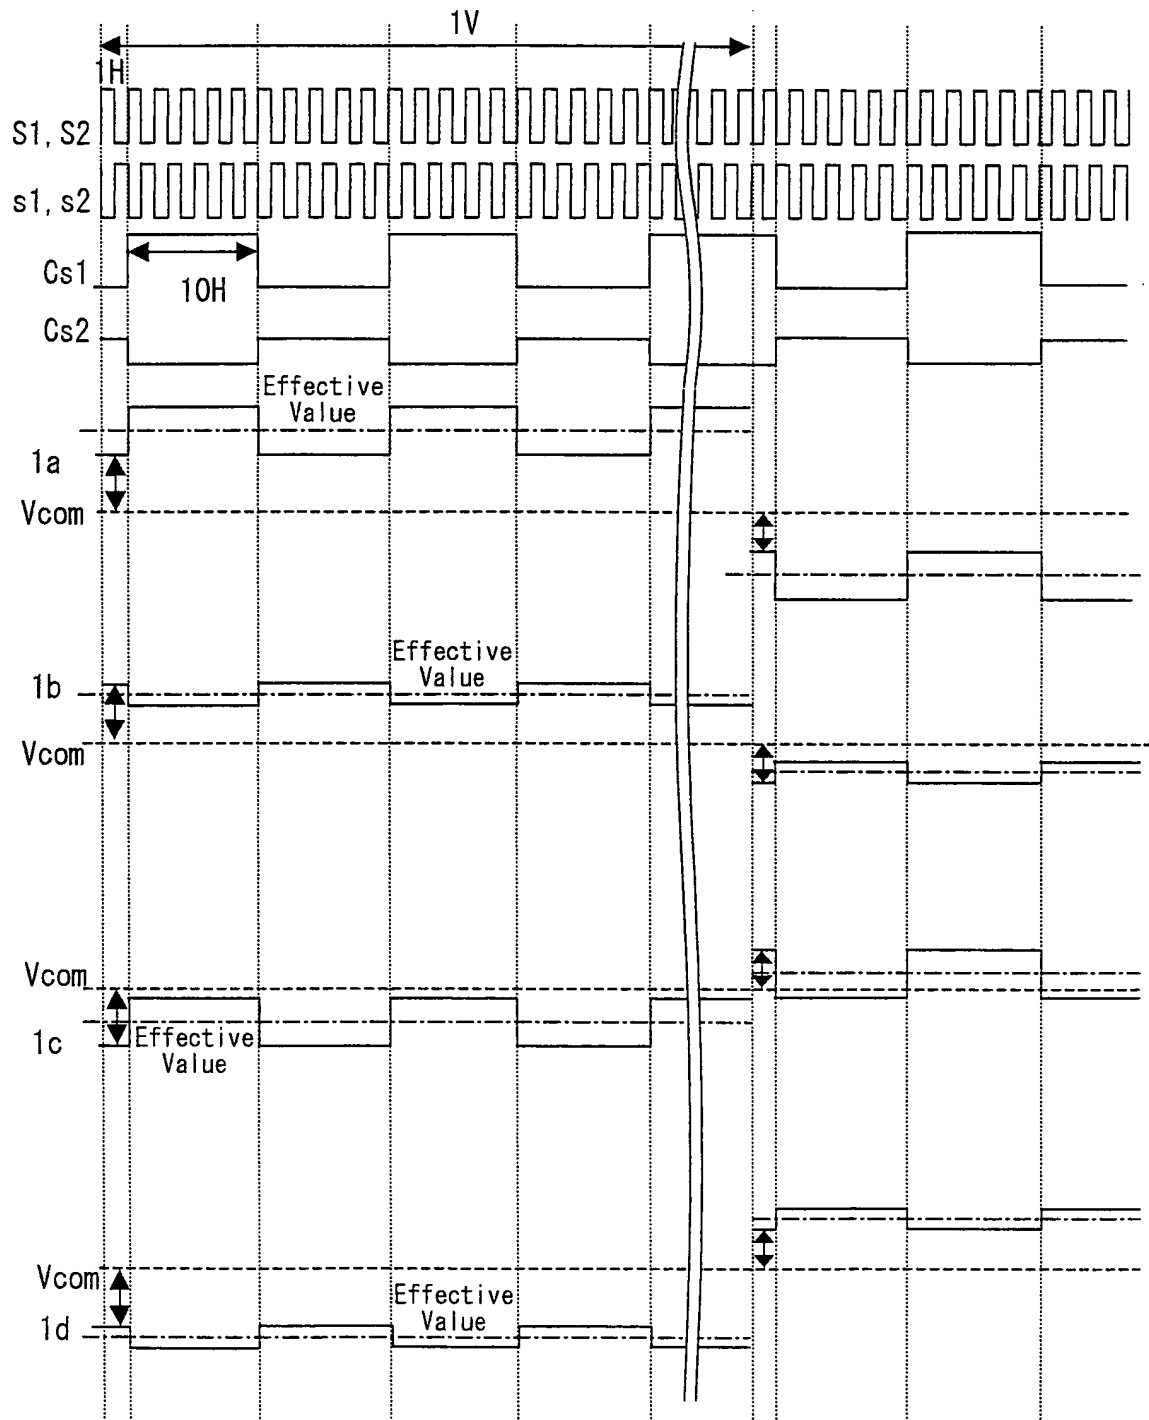


FIG. 15

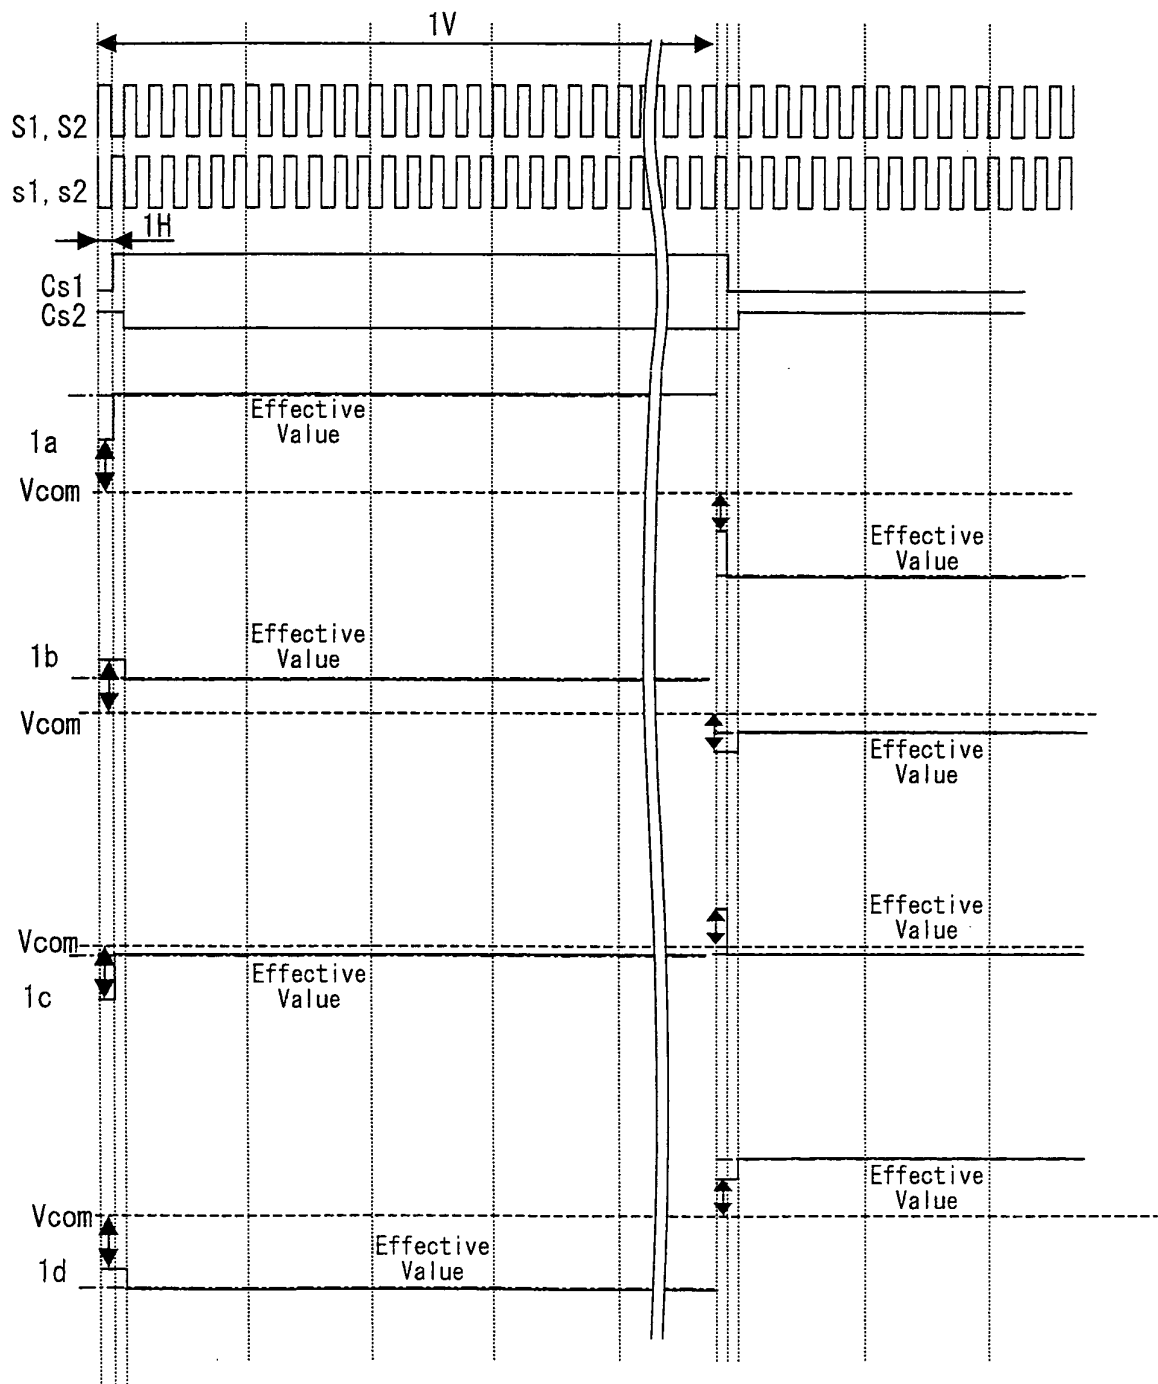


FIG. 16

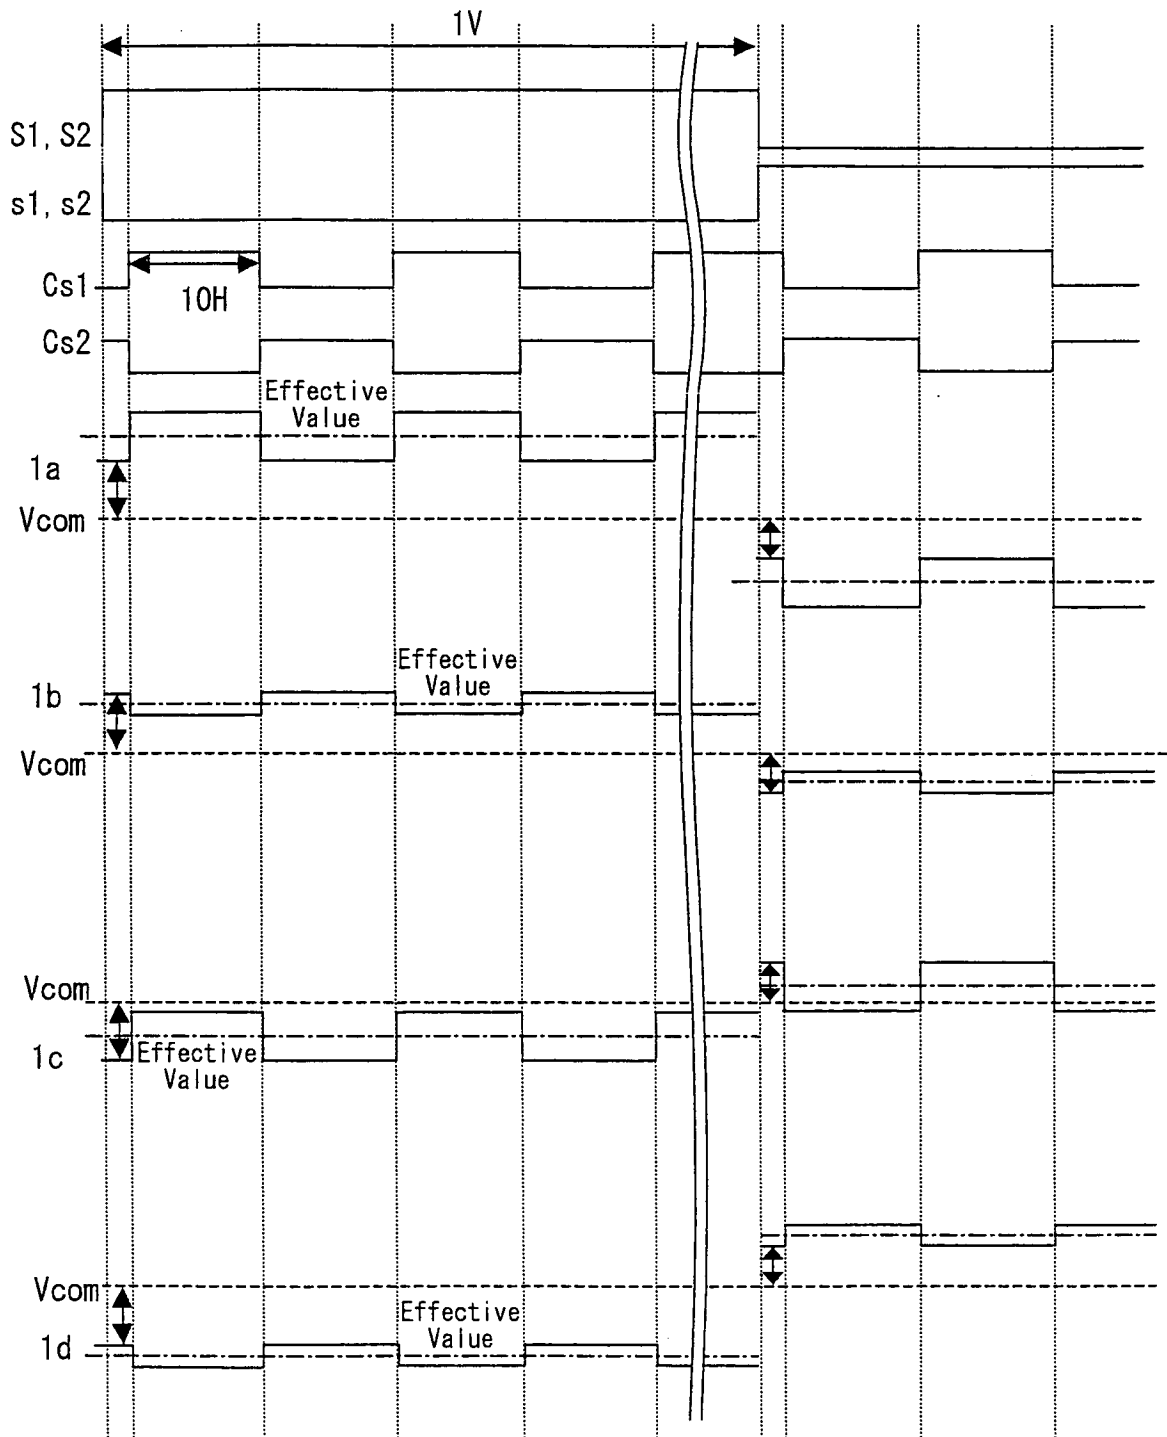


FIG. 17

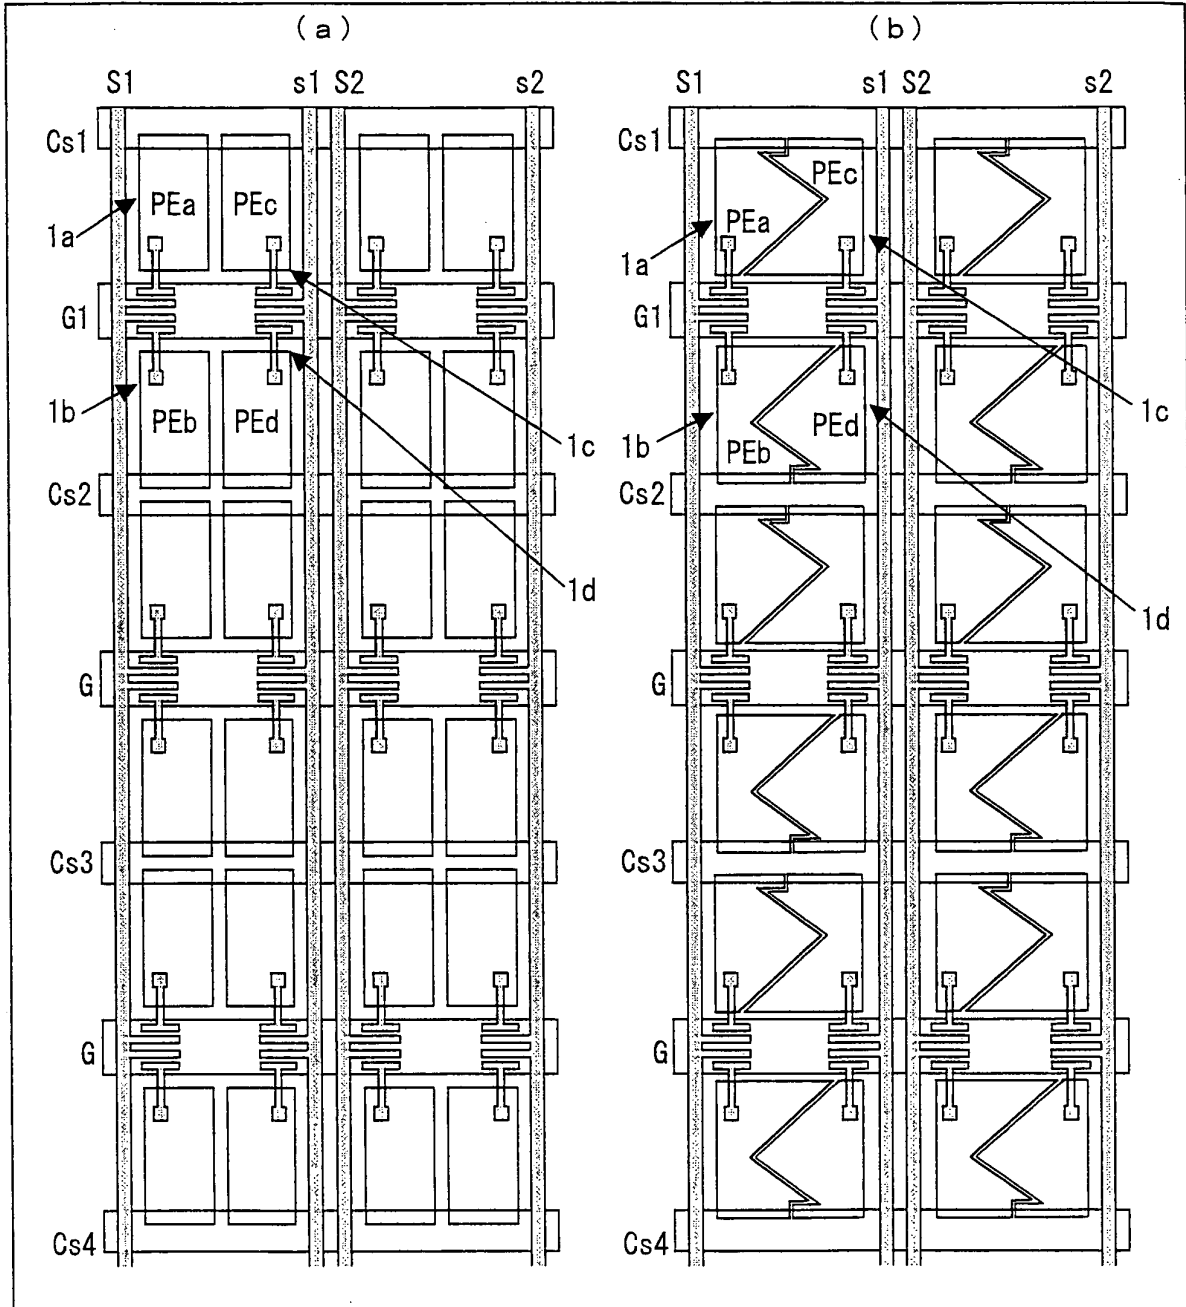


FIG. 18

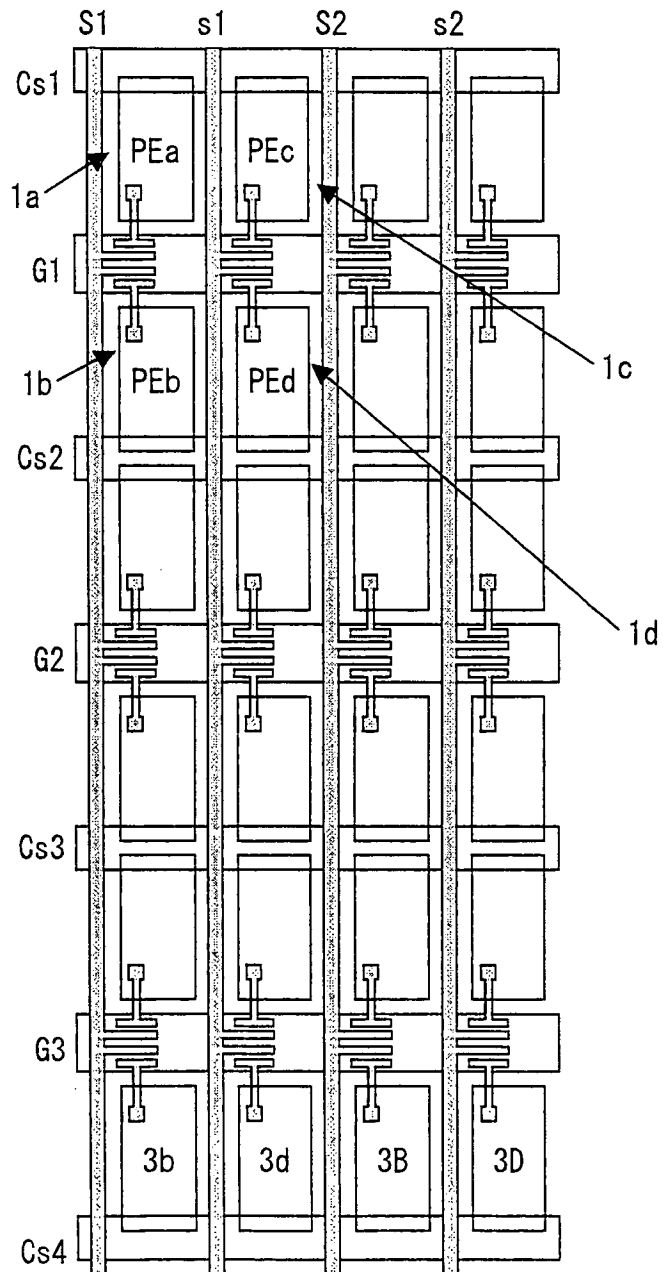


FIG. 19

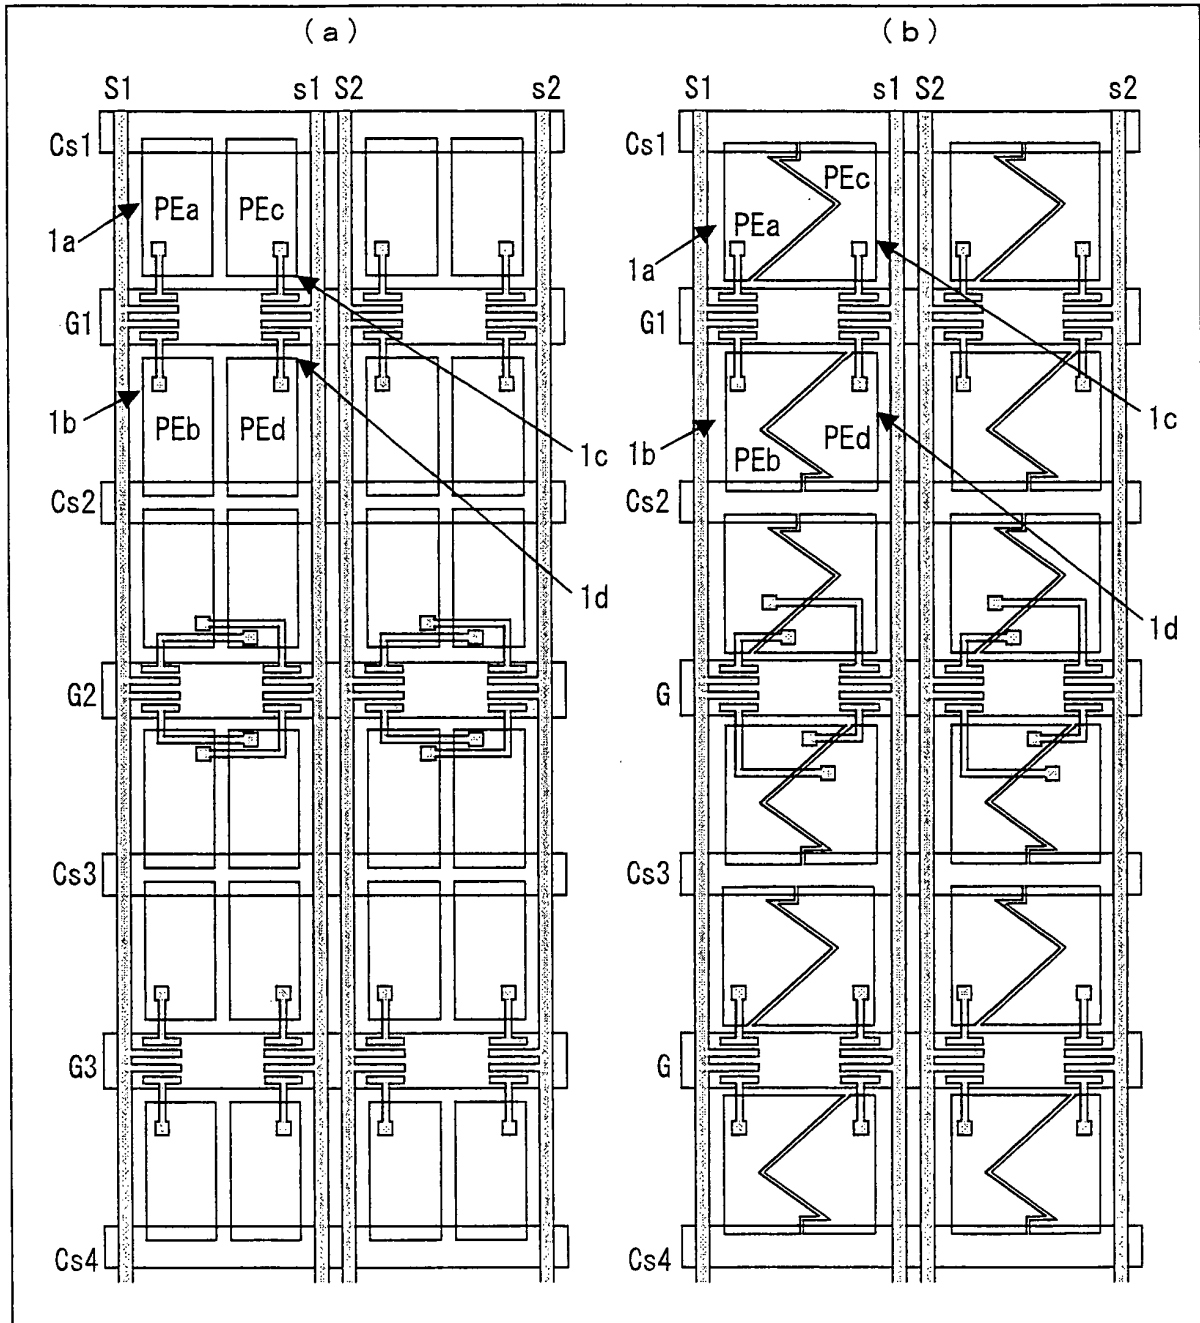


FIG. 20

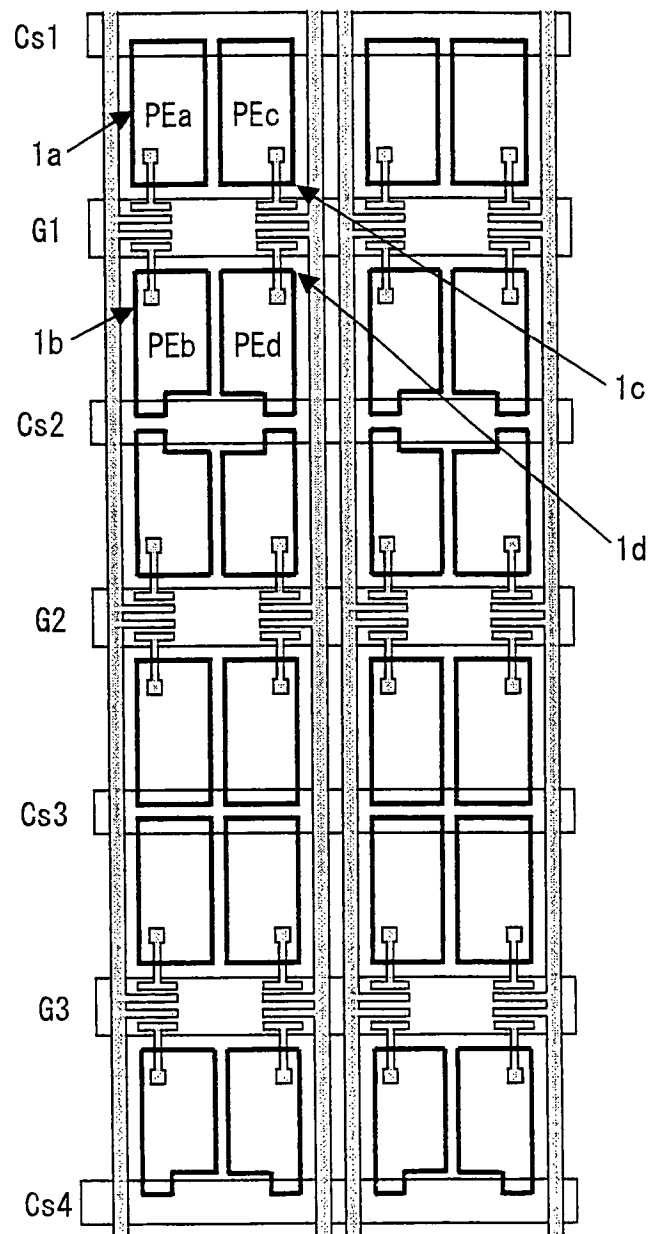


FIG. 21

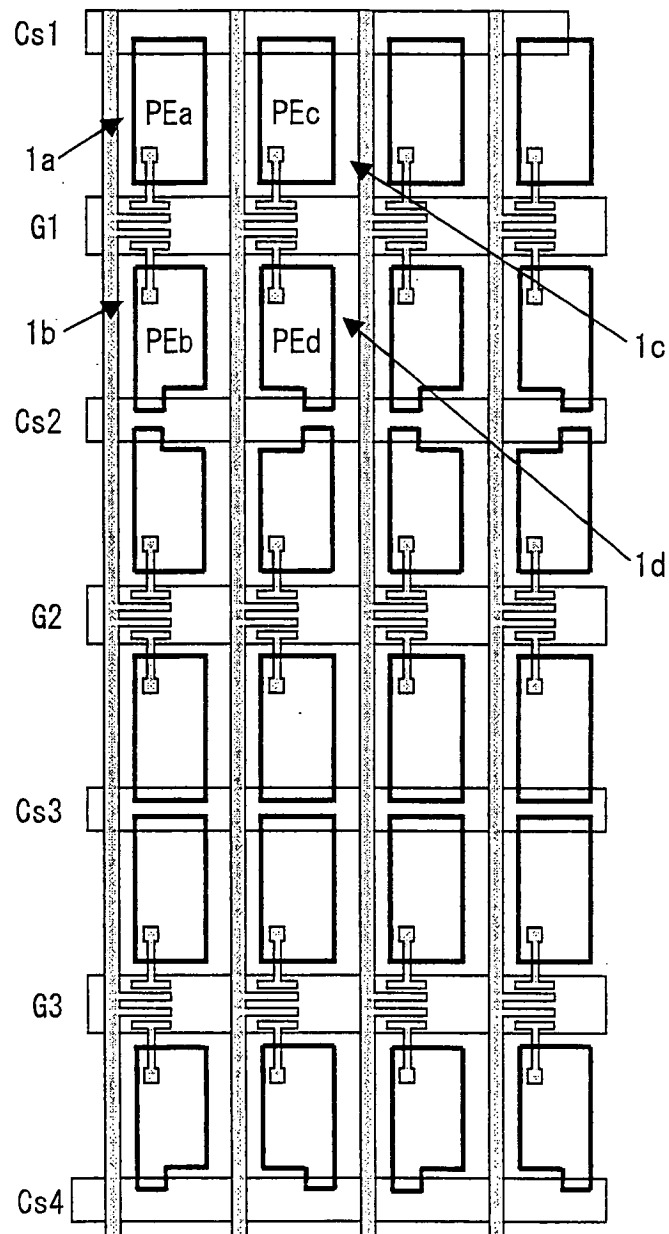


FIG. 22

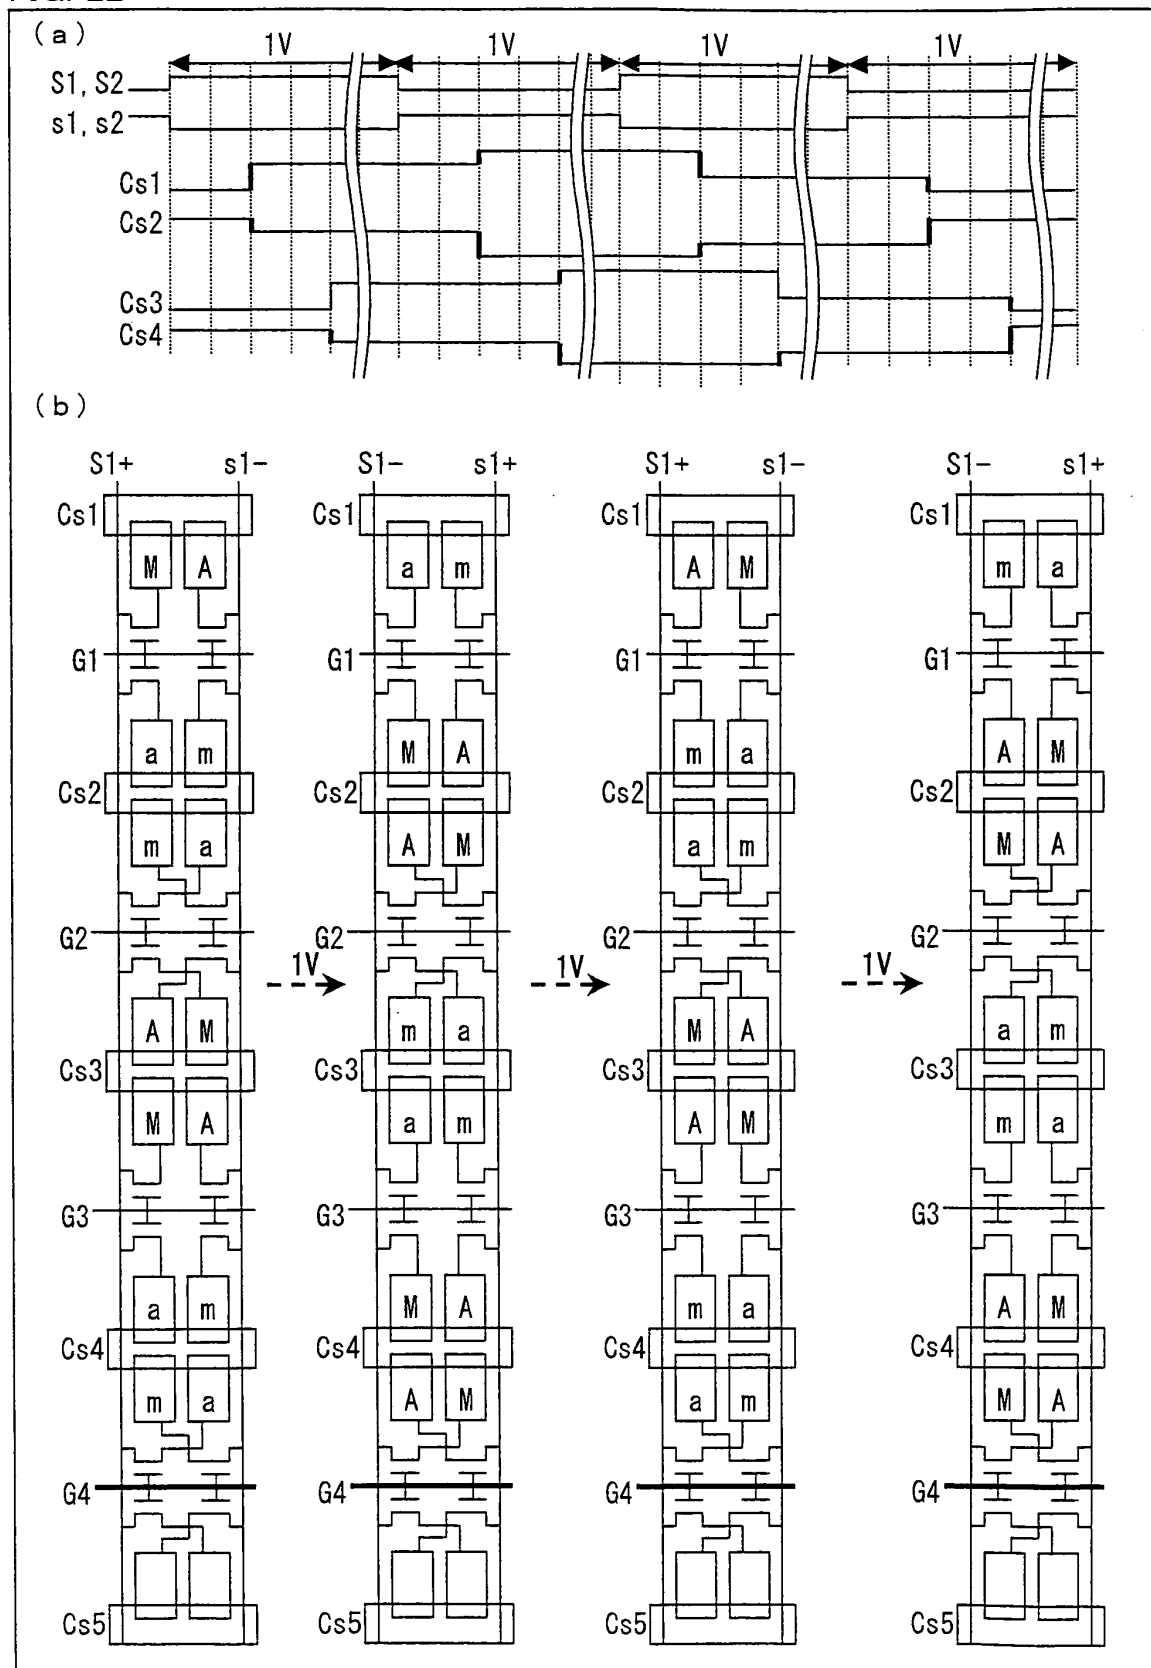


FIG. 23

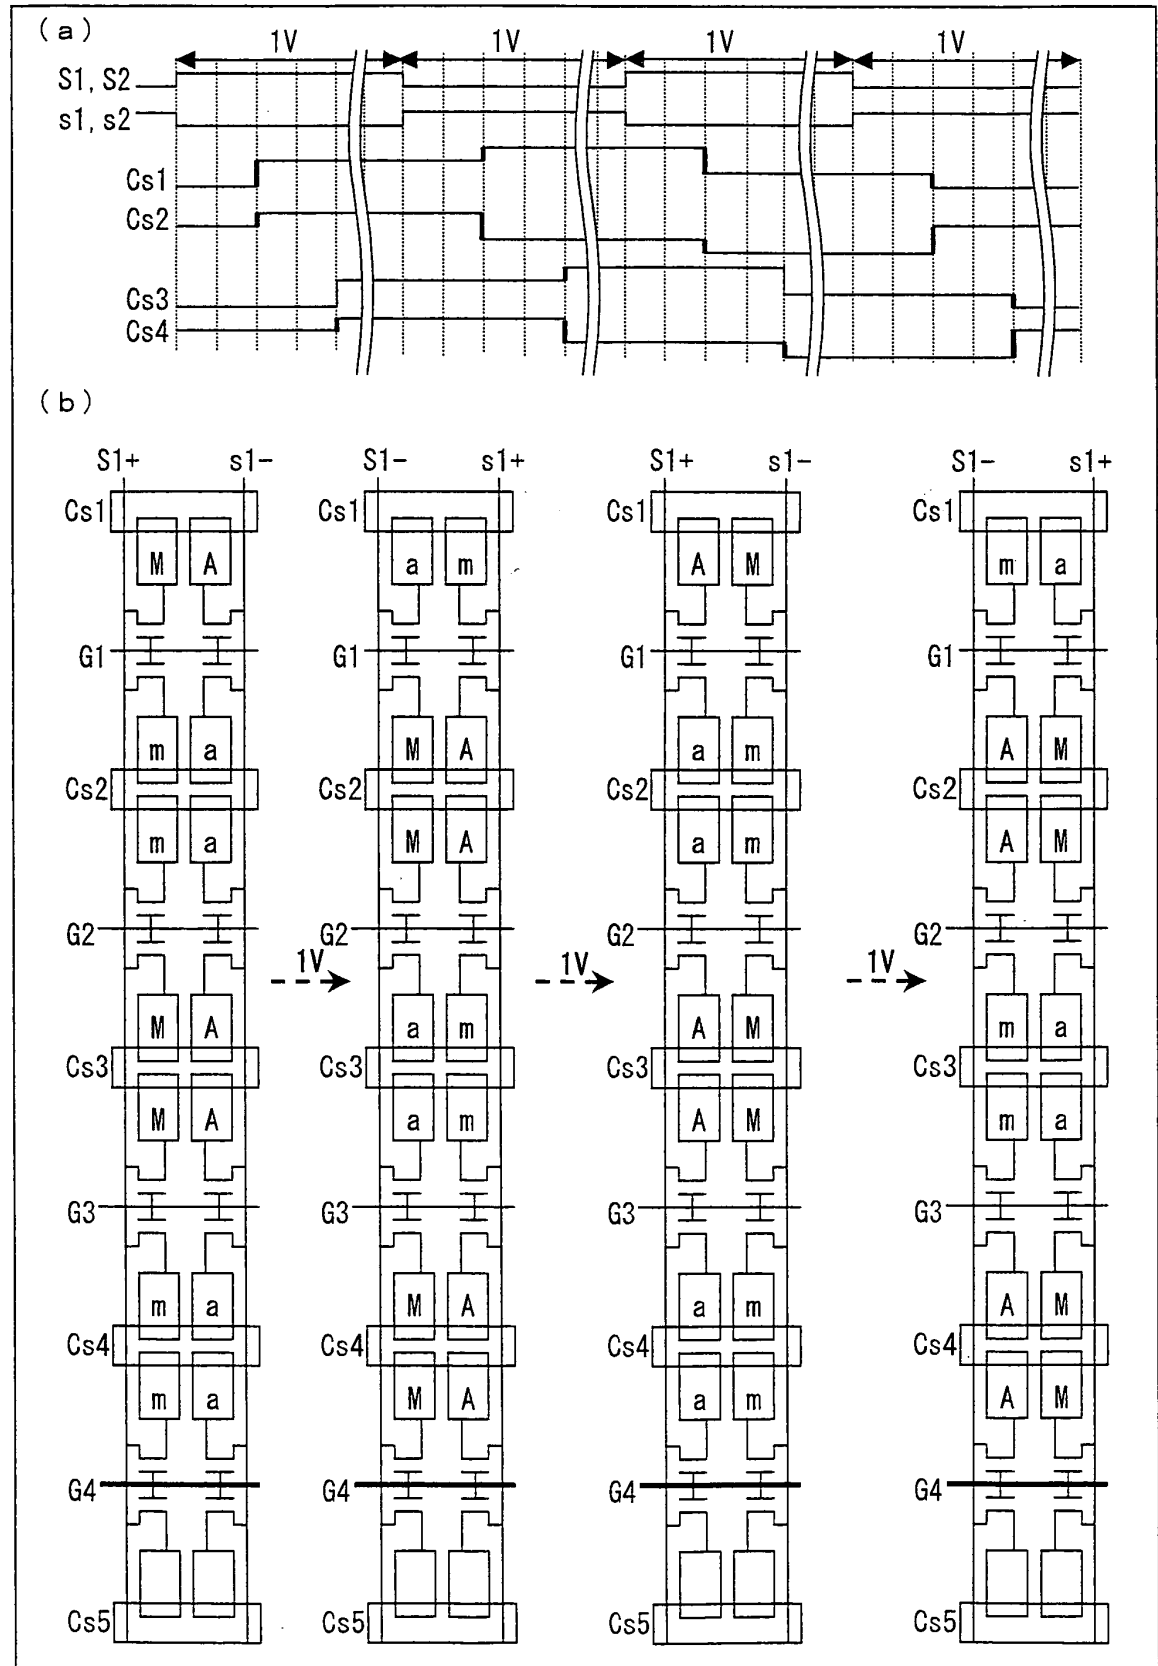


FIG. 24

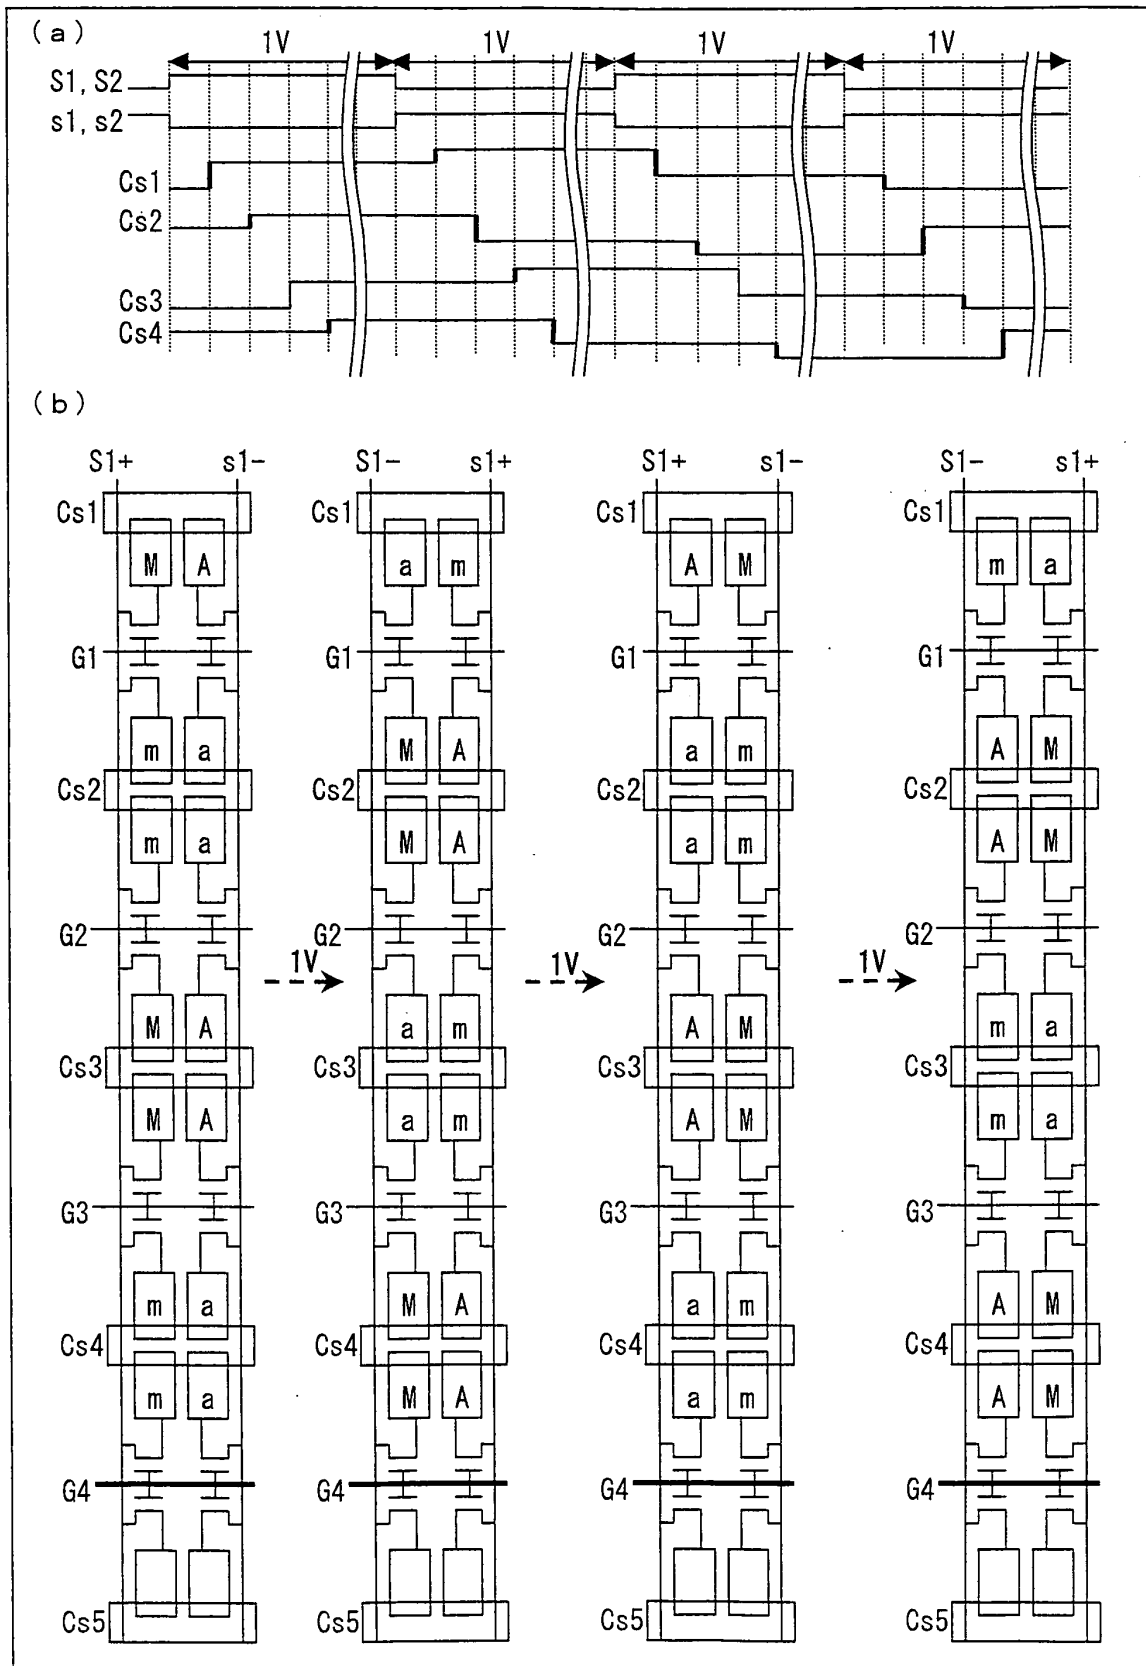


FIG. 25

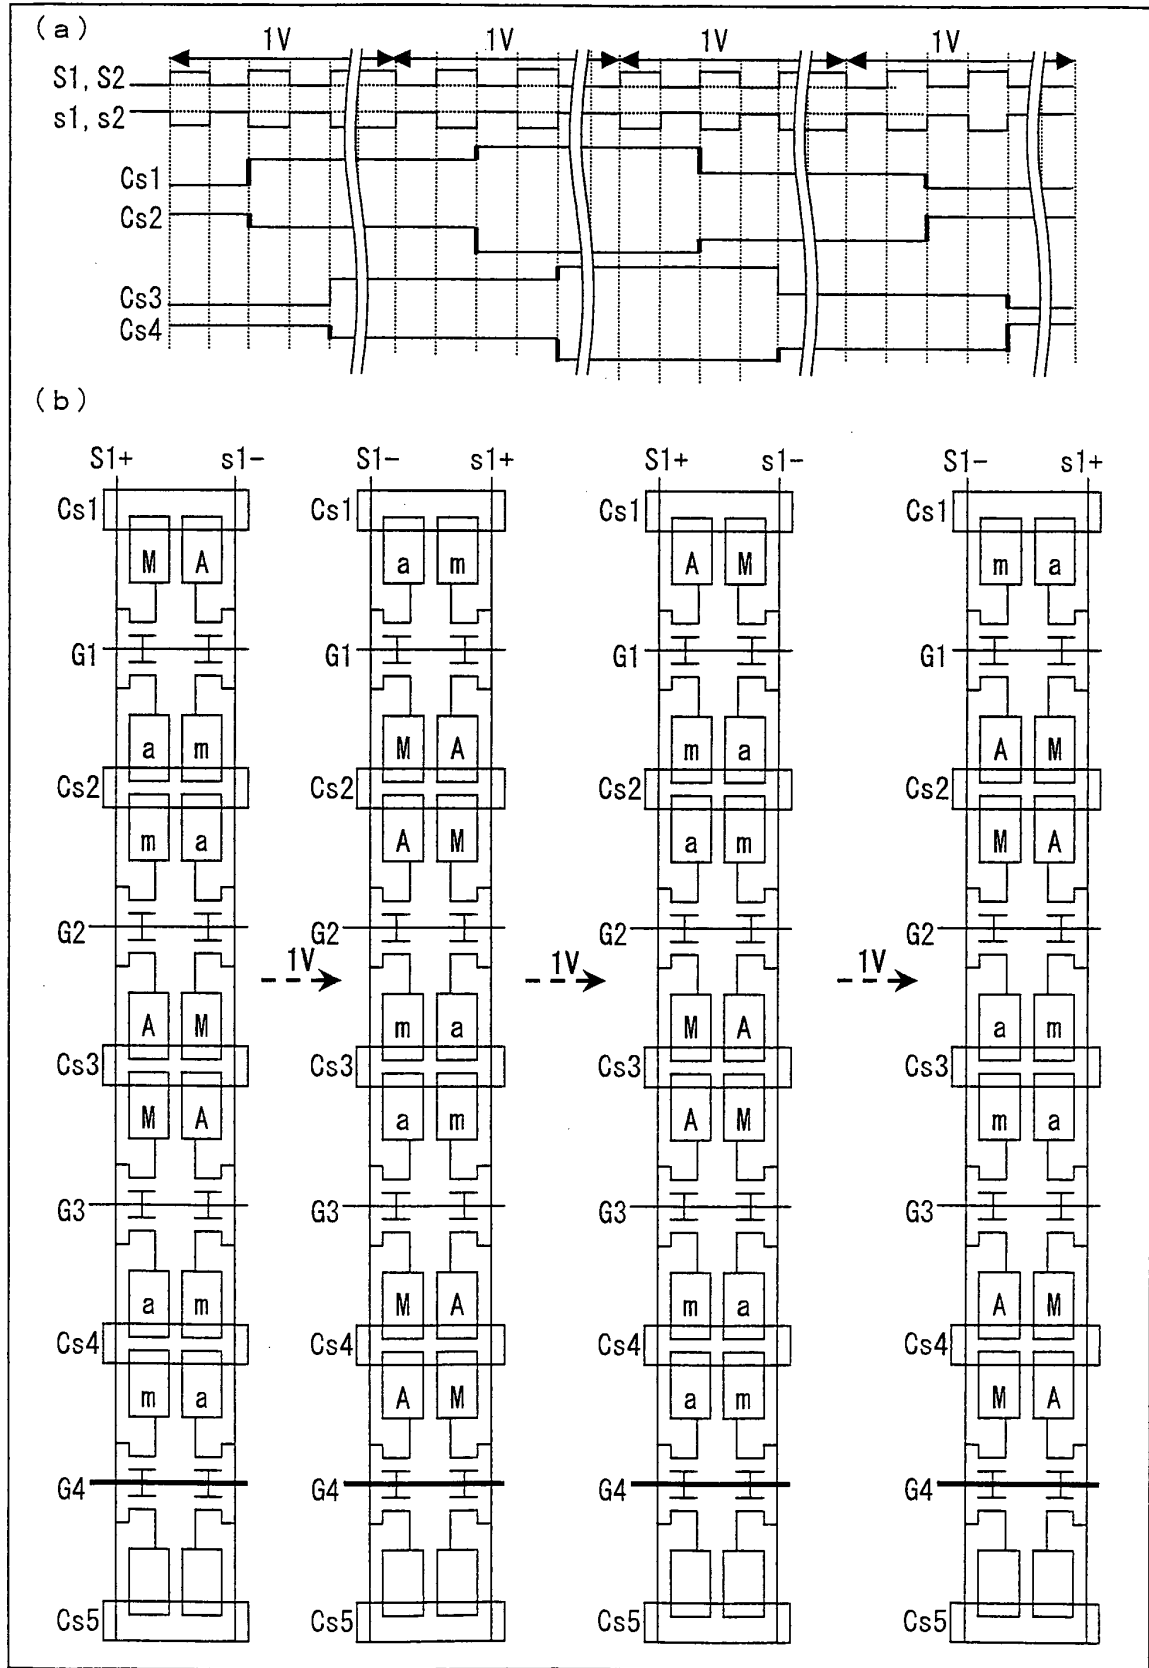


FIG. 26

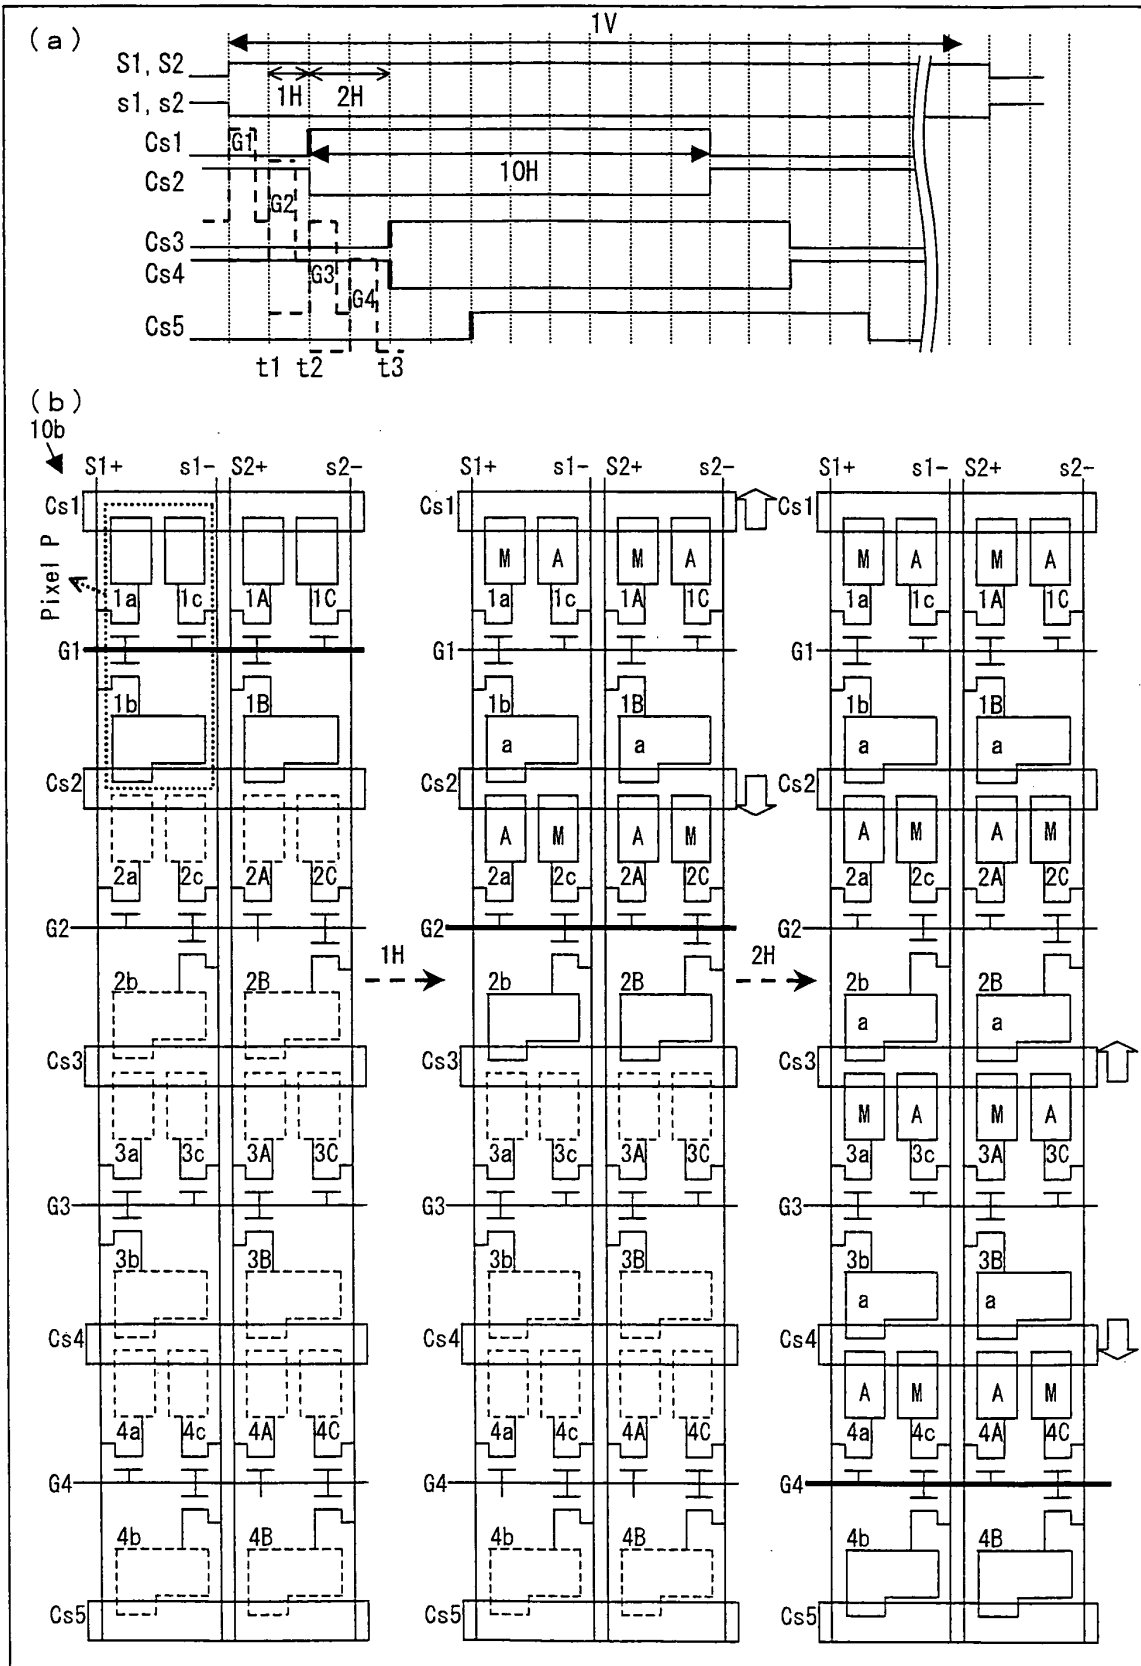


FIG. 27

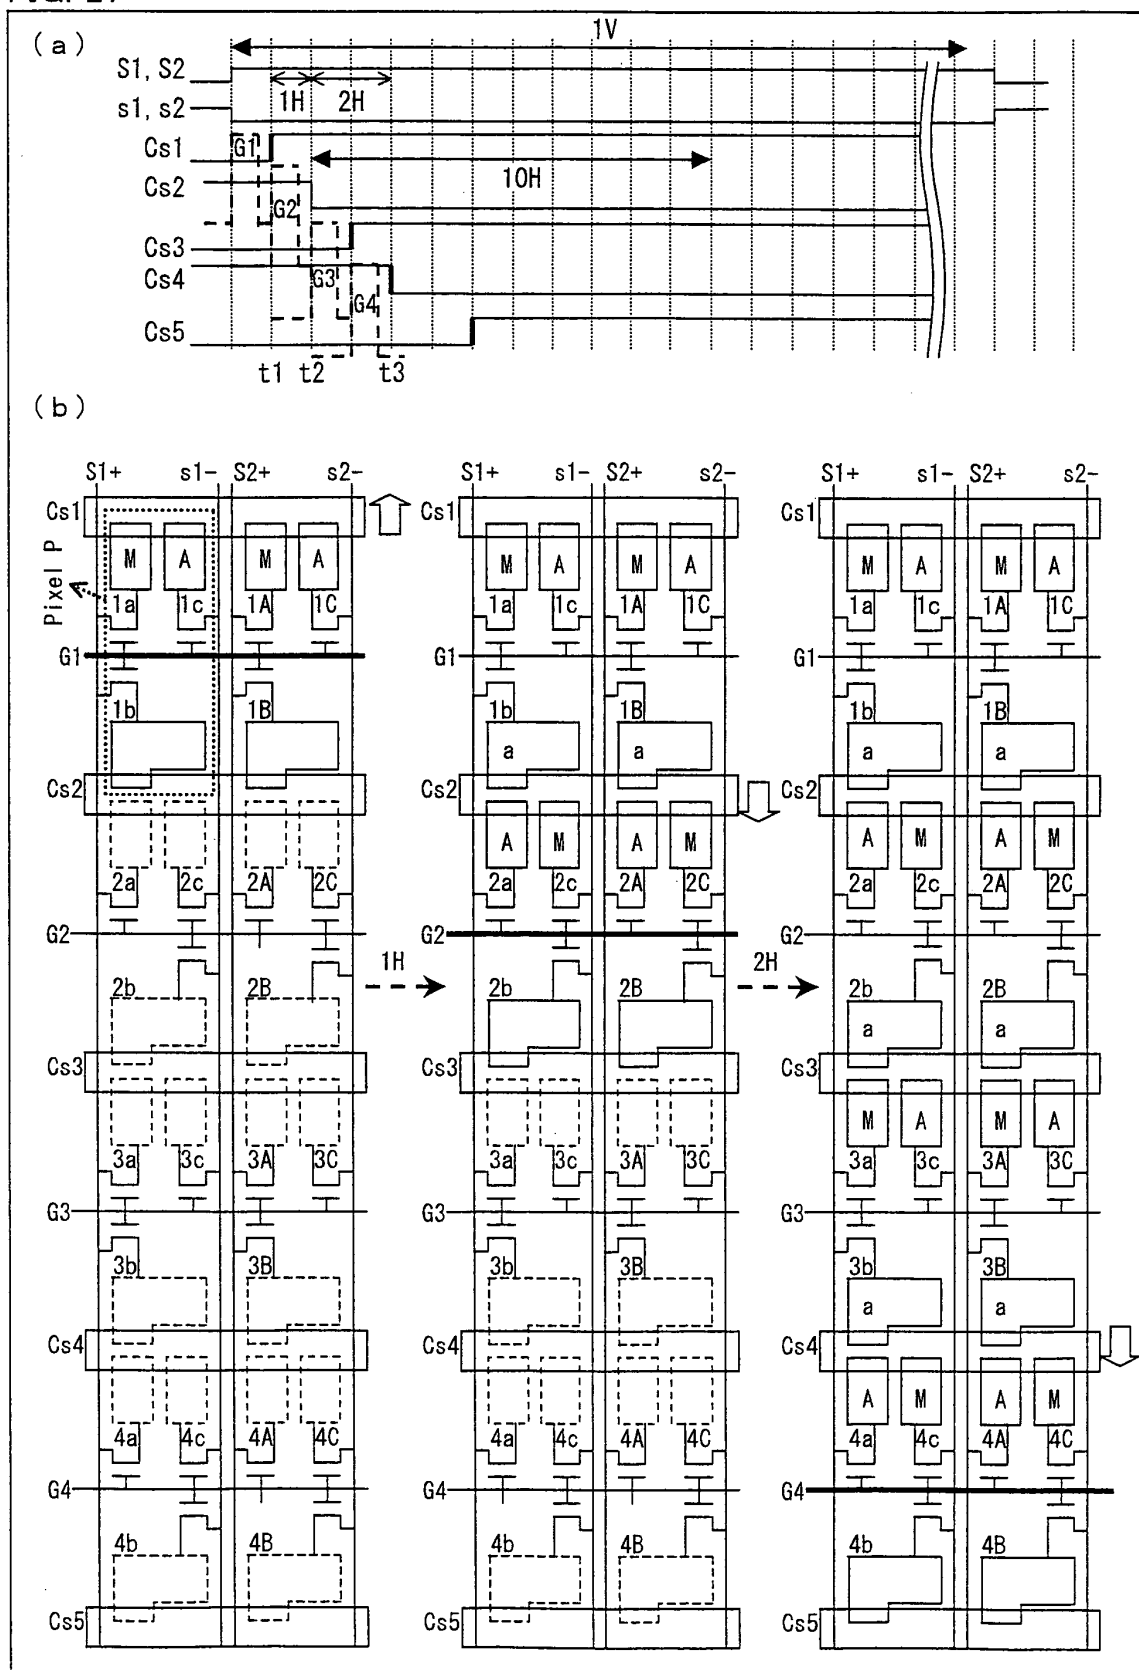


FIG. 28

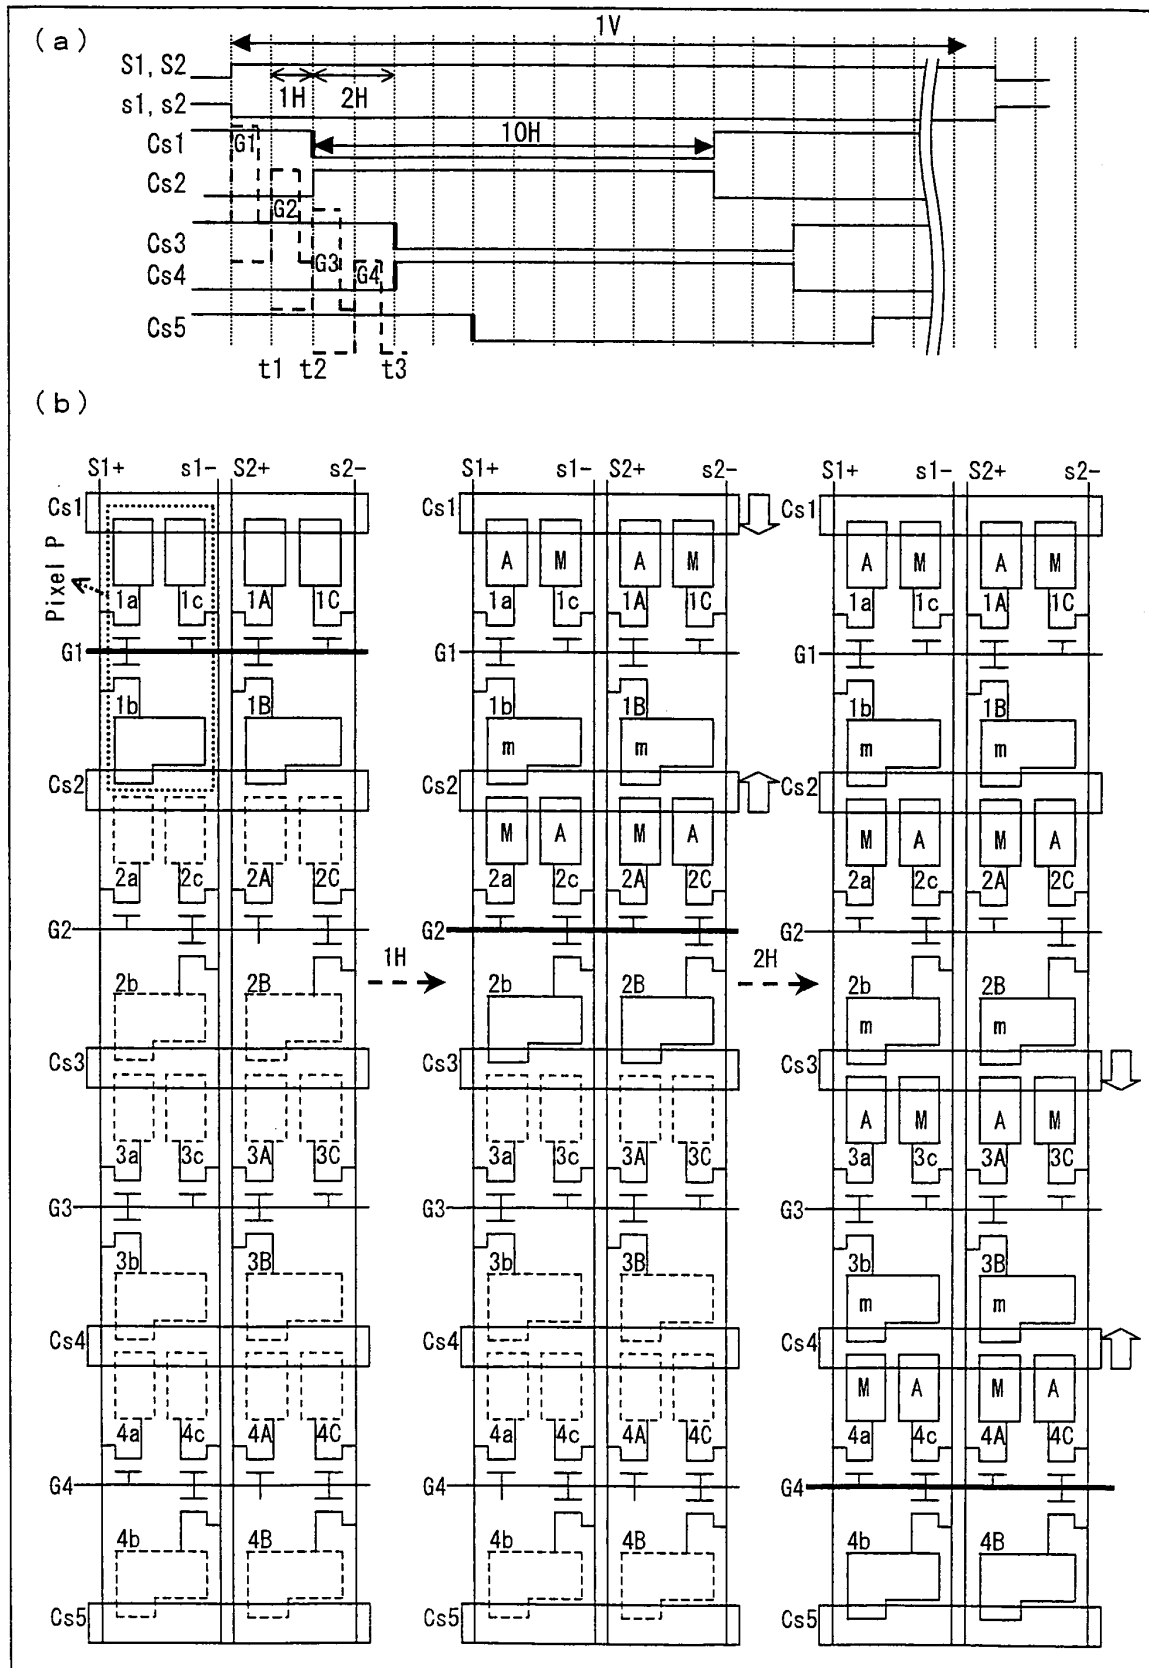


FIG. 29

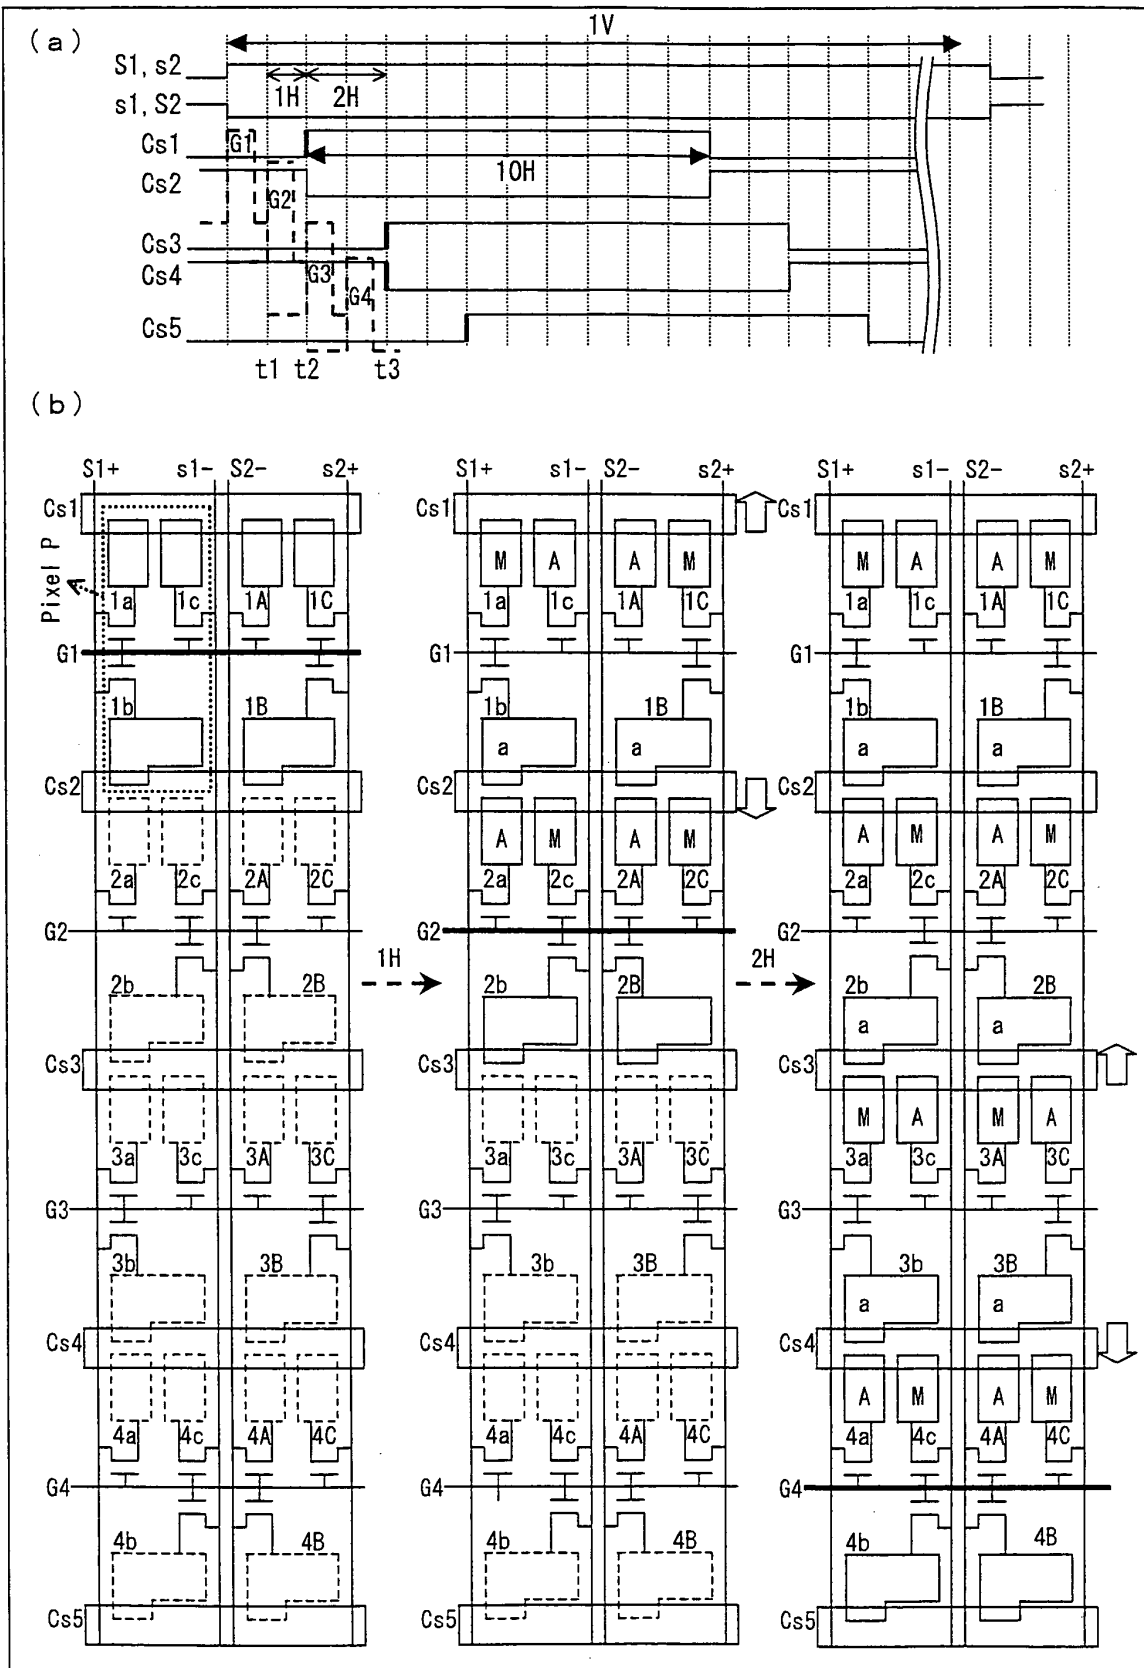


FIG. 30

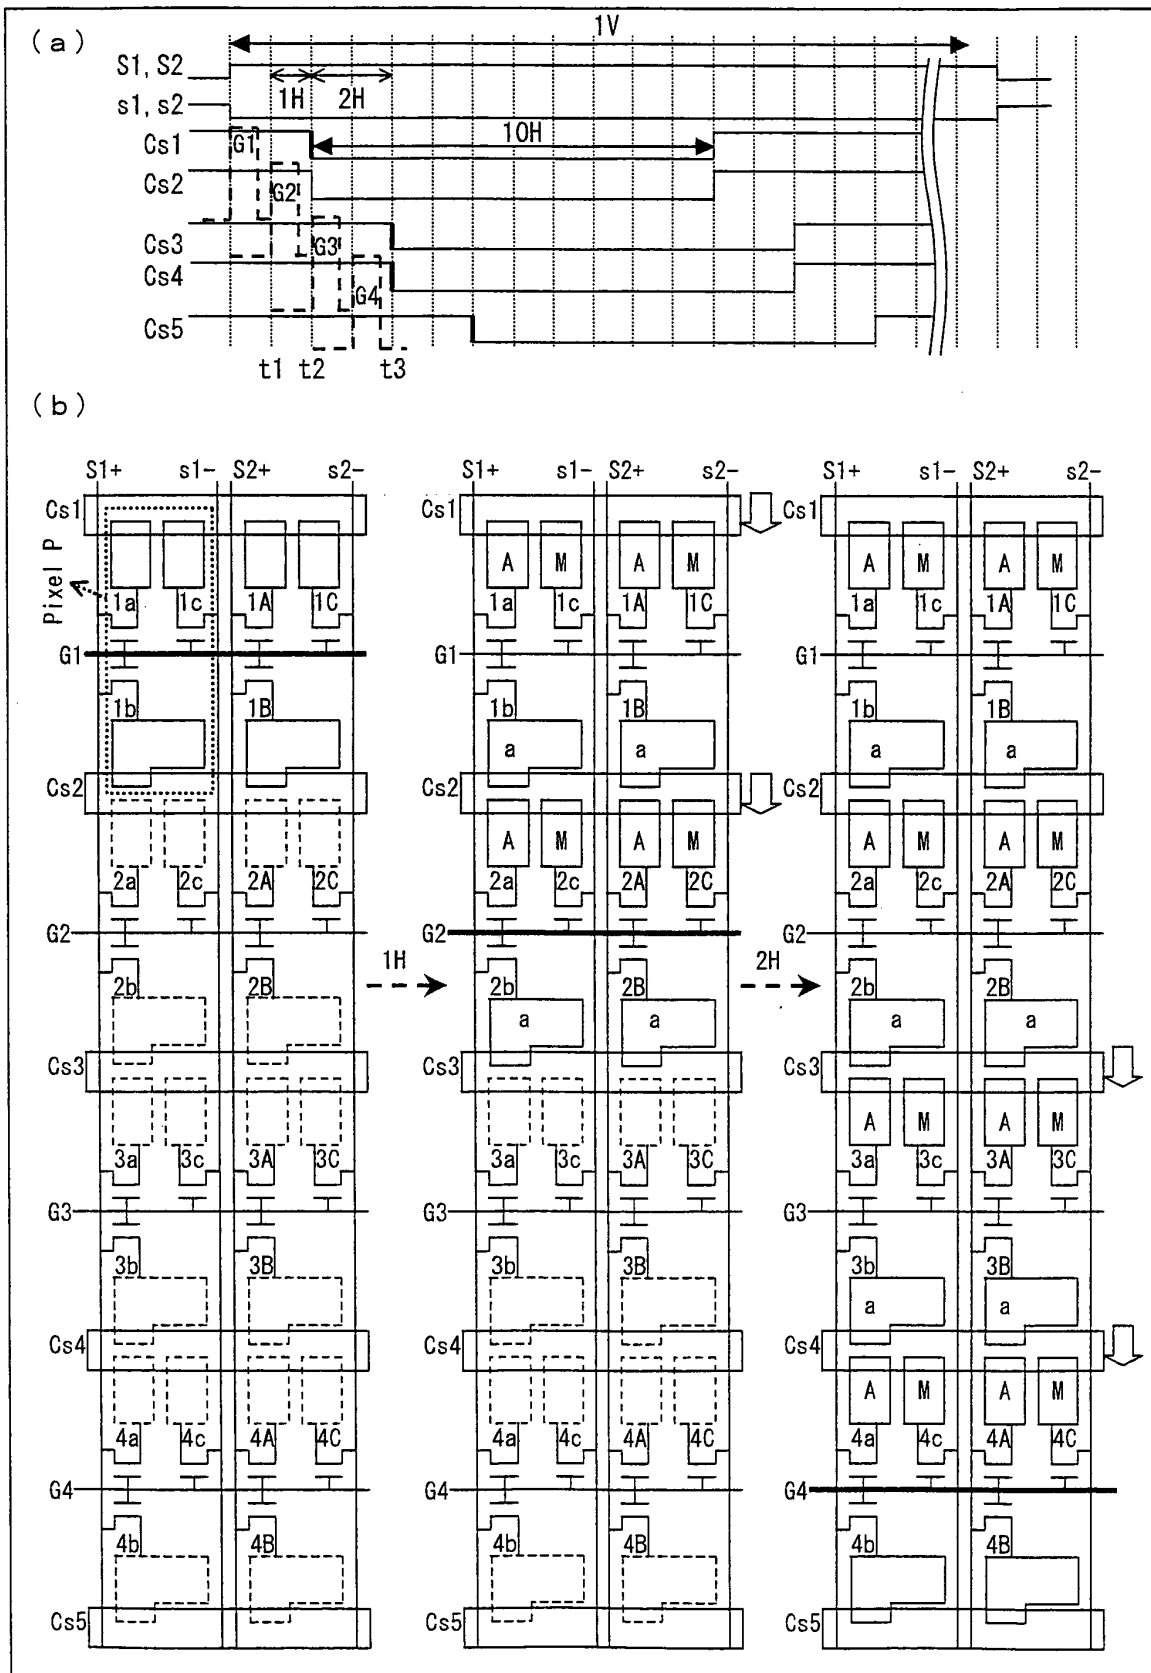


FIG. 31

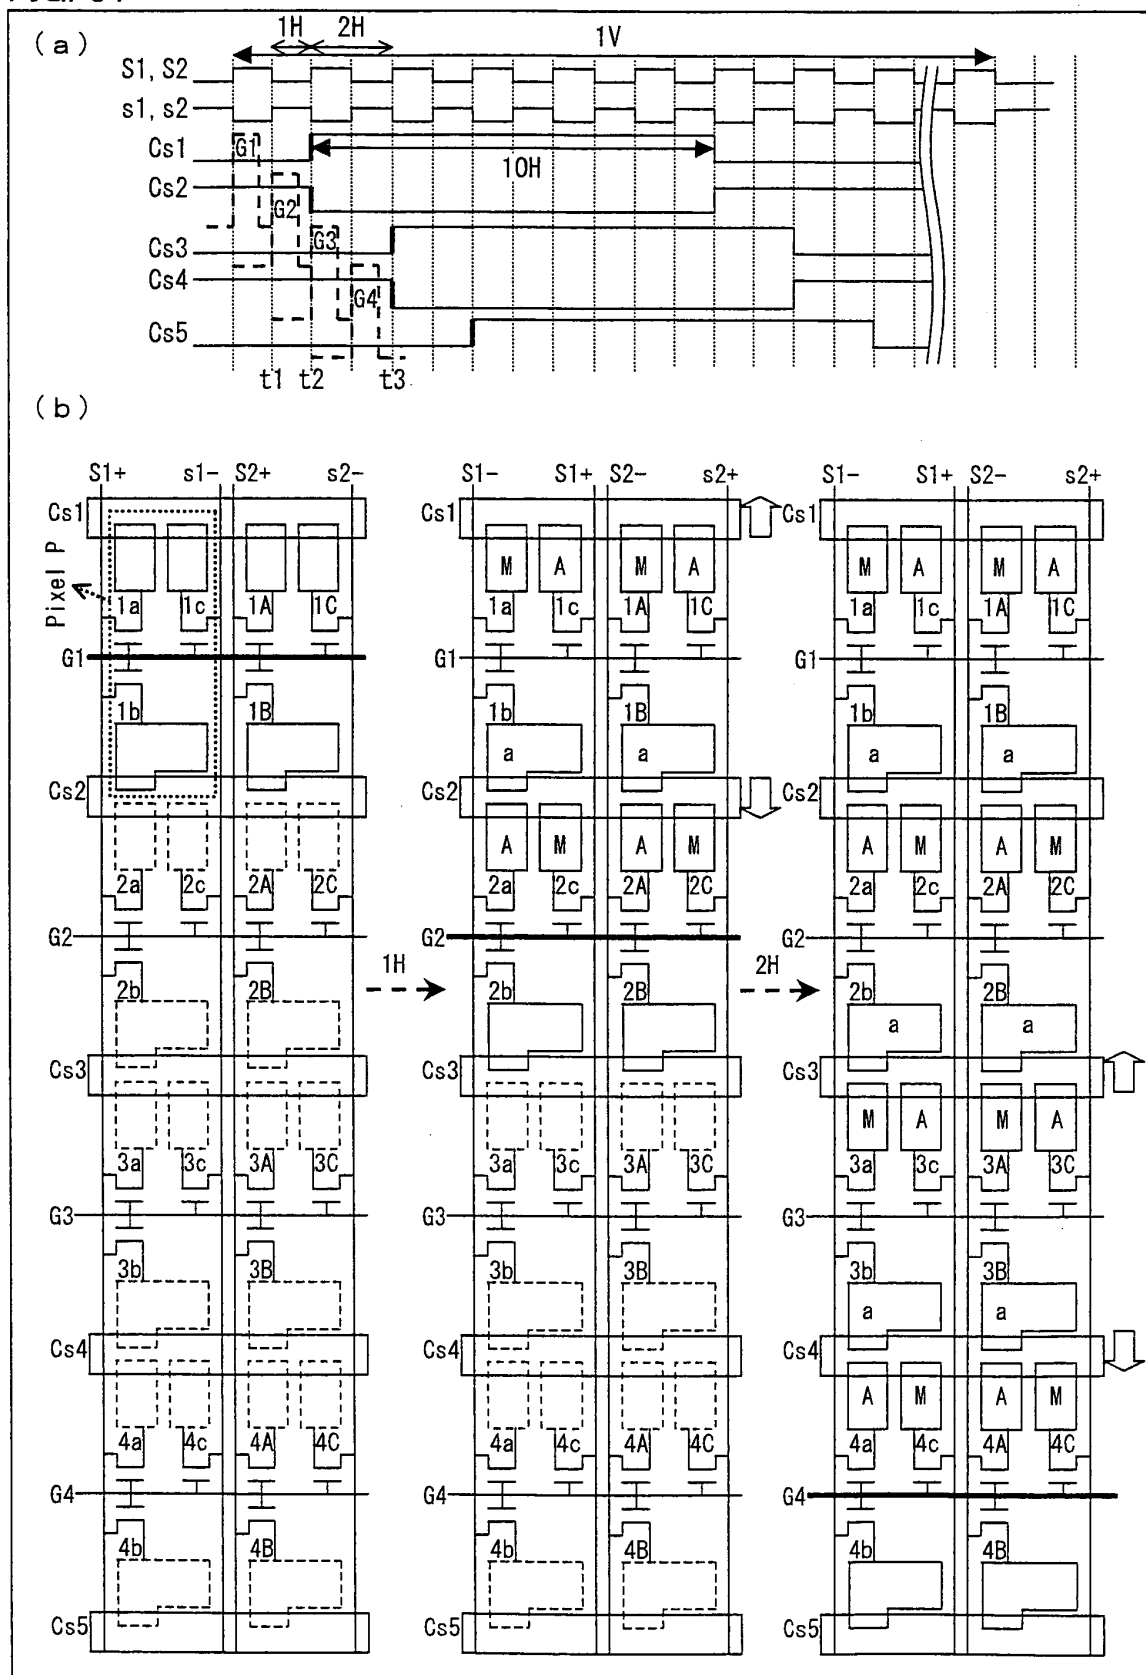


FIG. 32

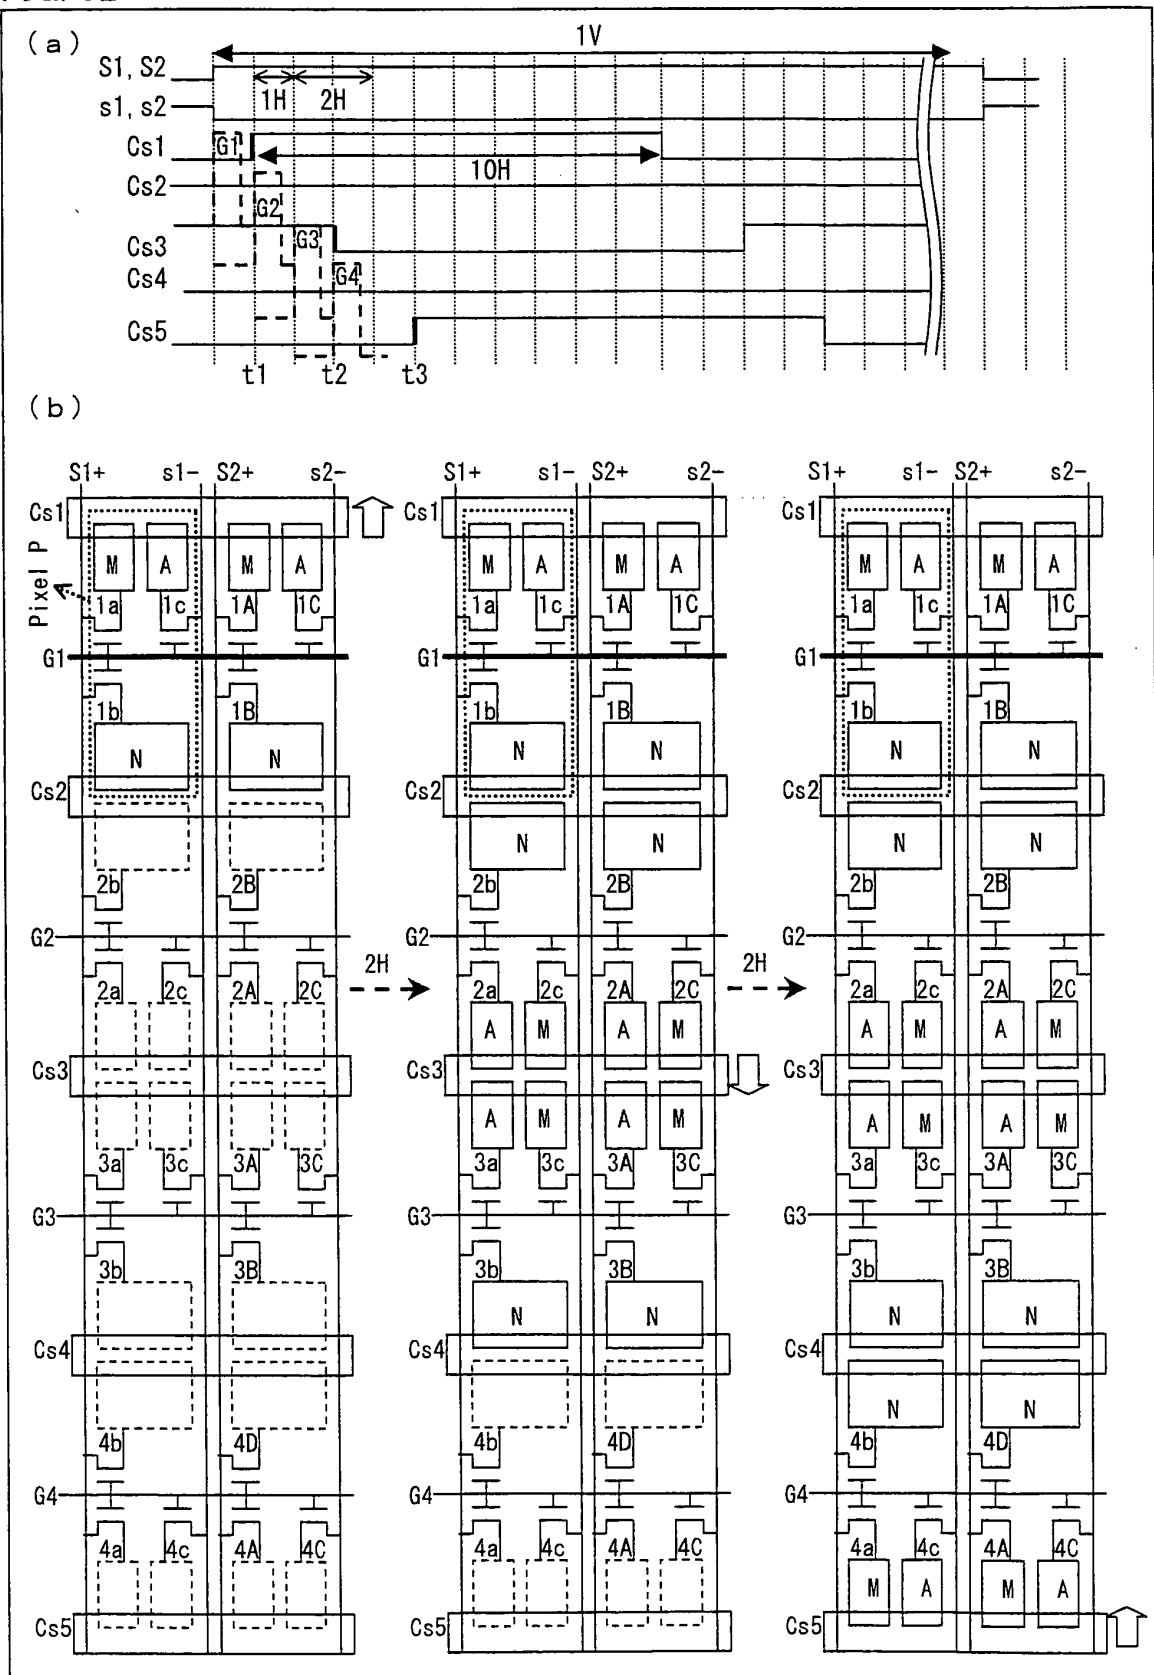


FIG. 33

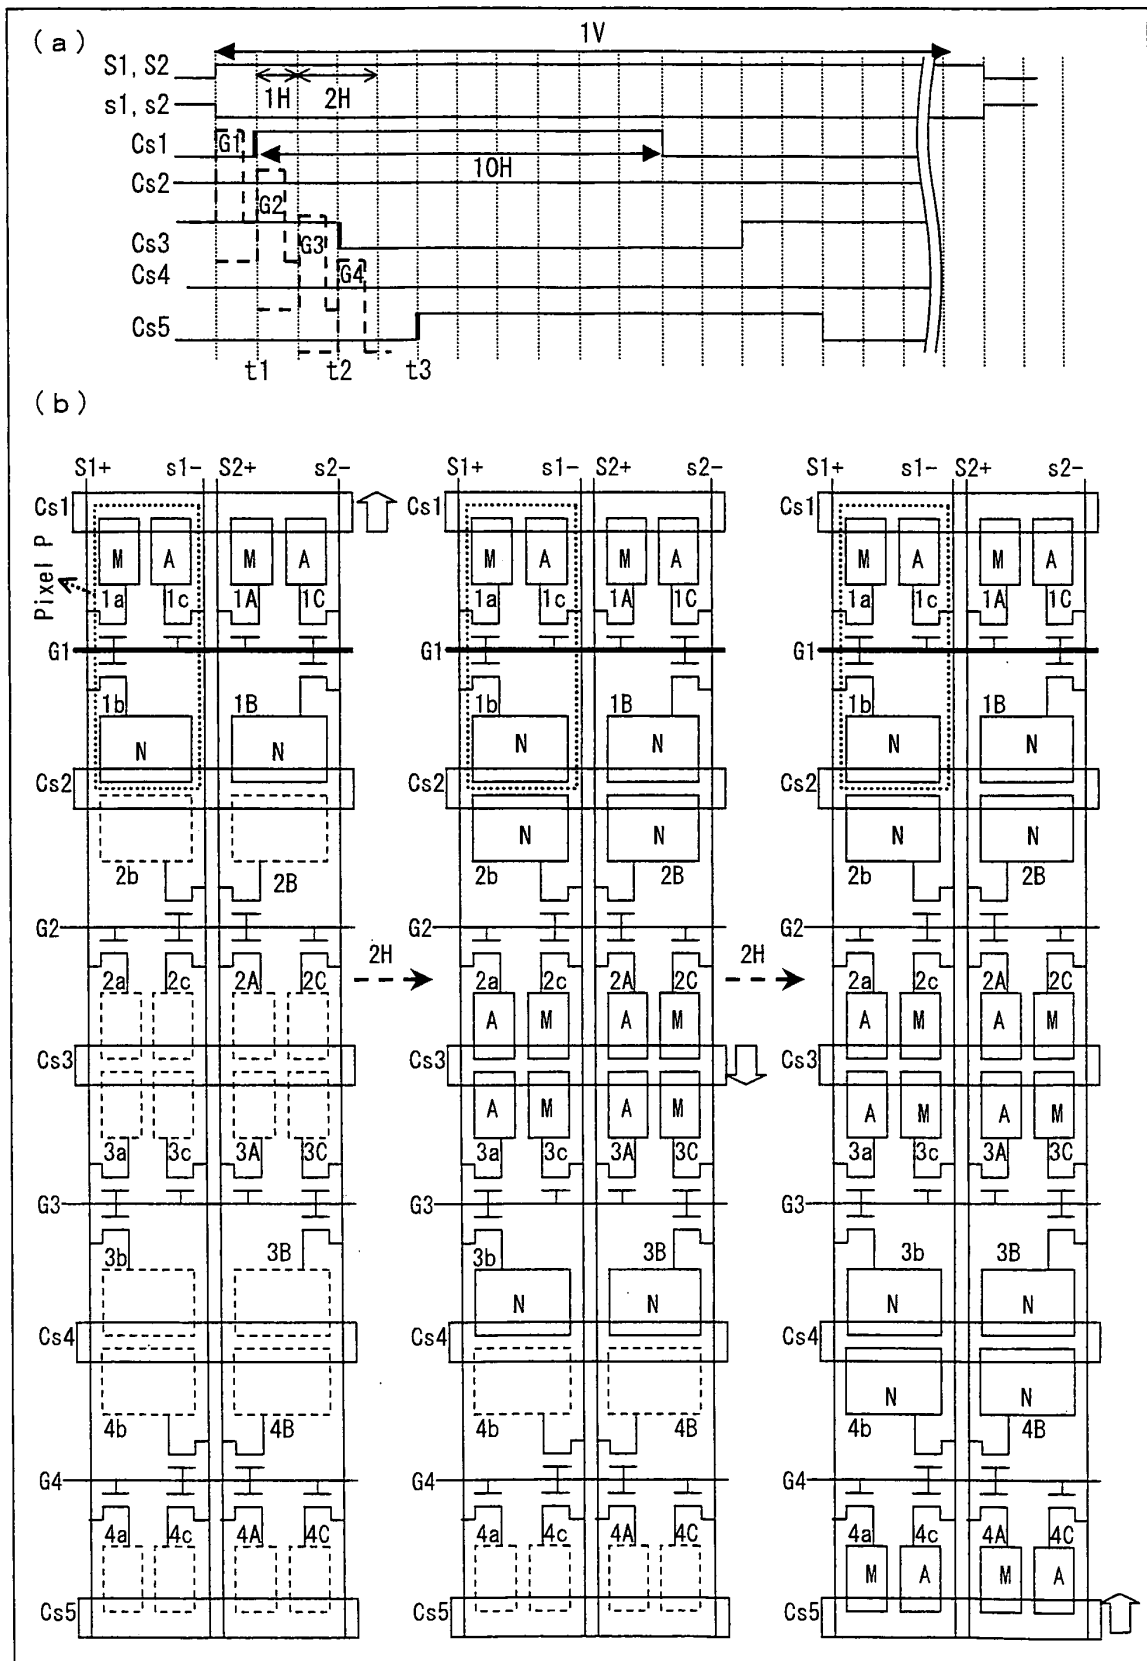


FIG. 34

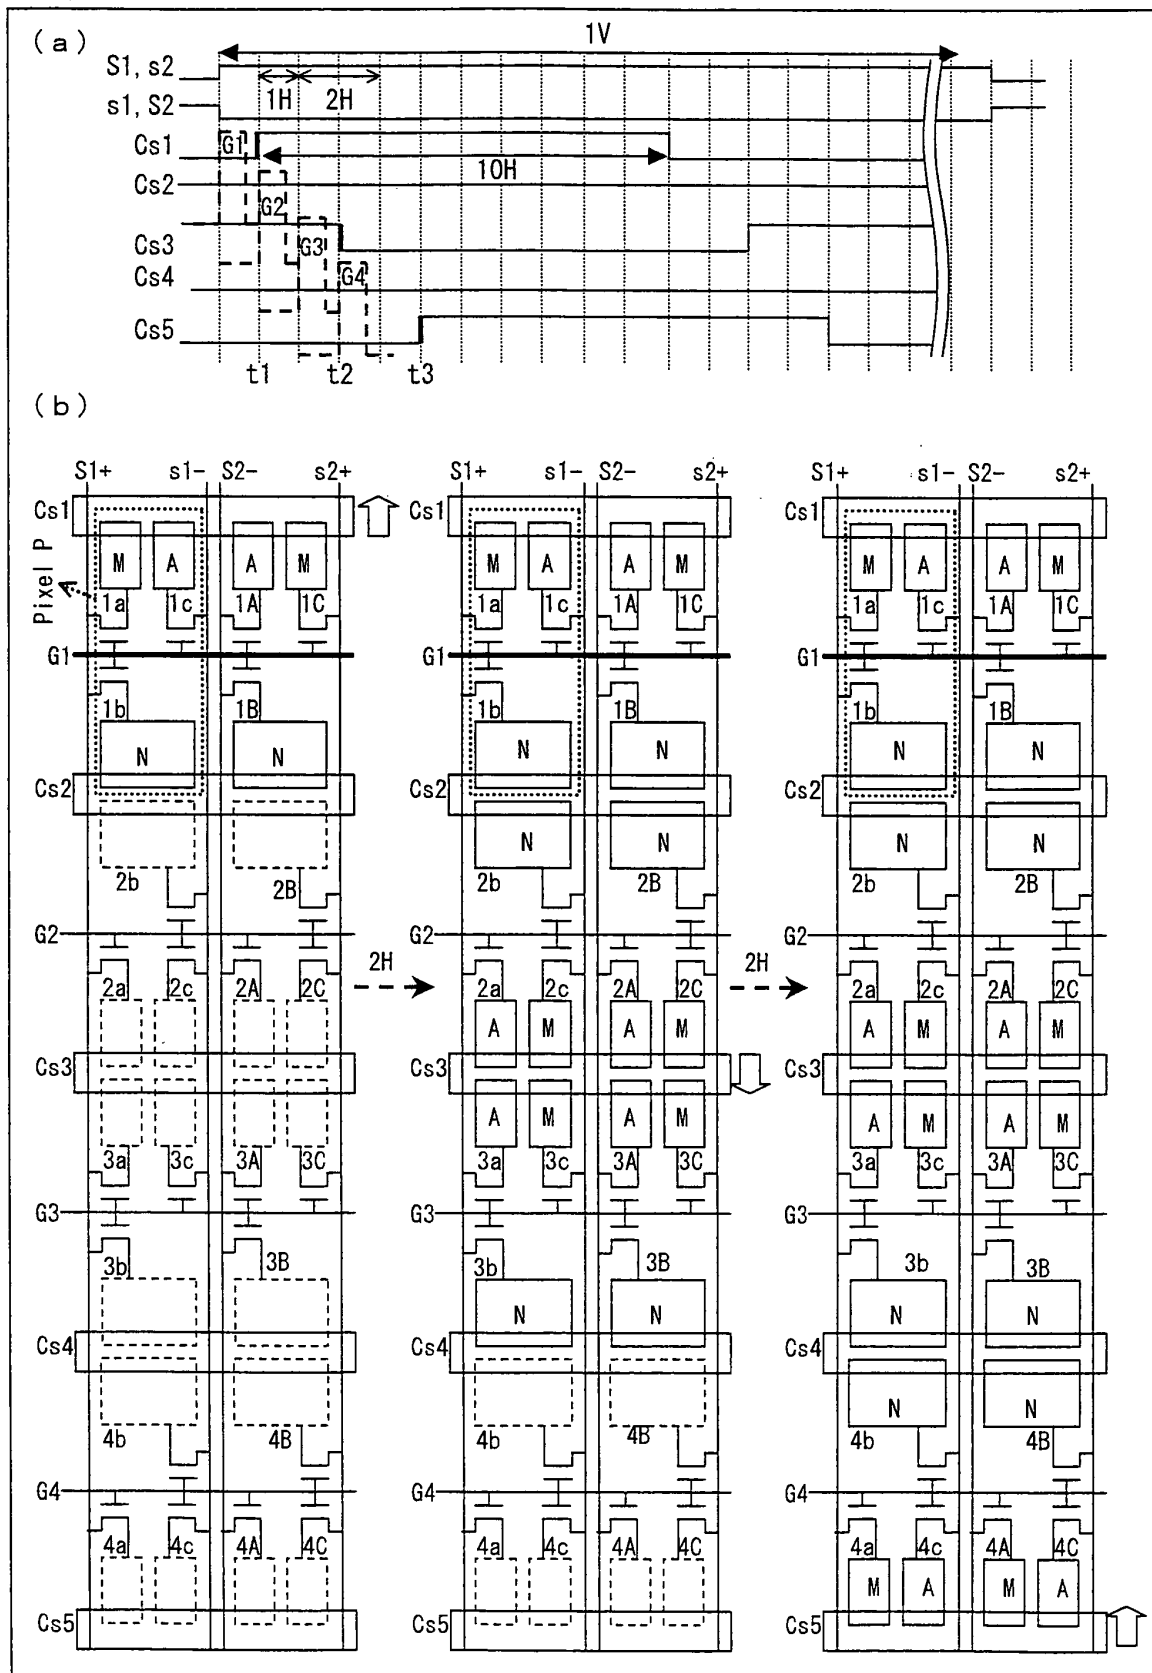


FIG. 35

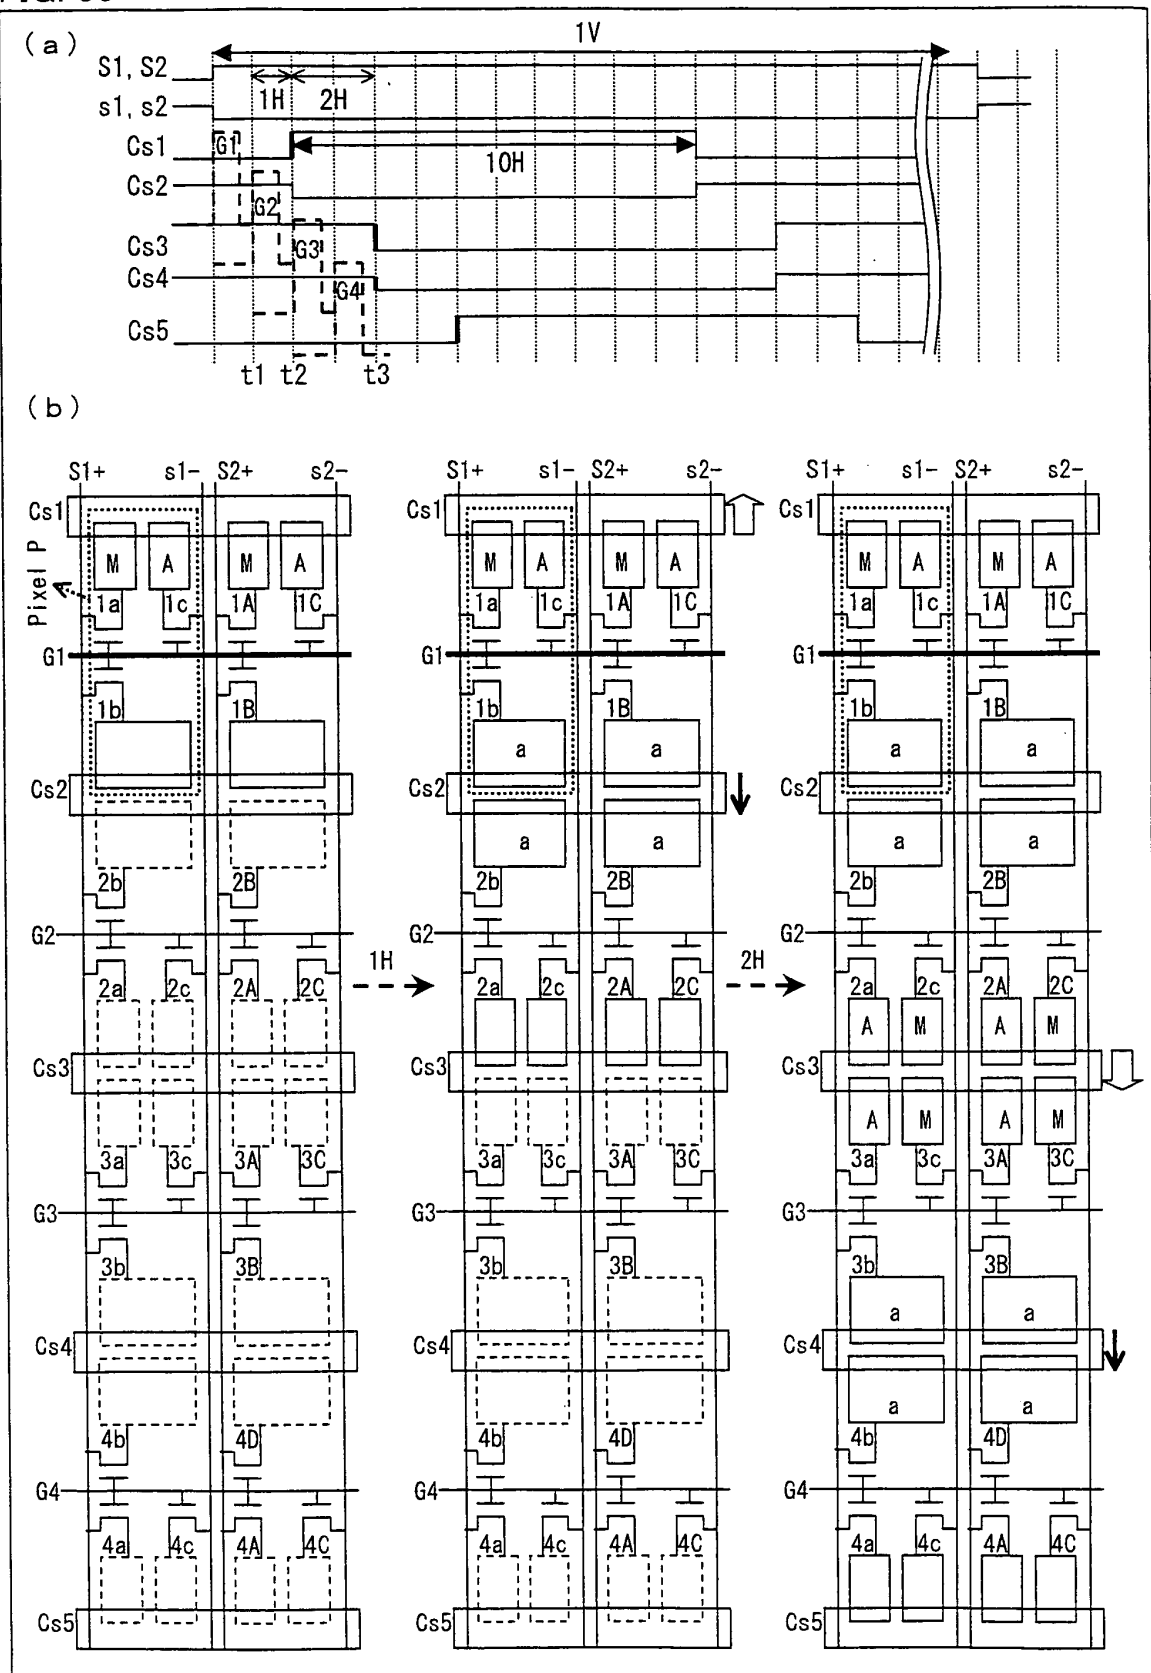


FIG. 36

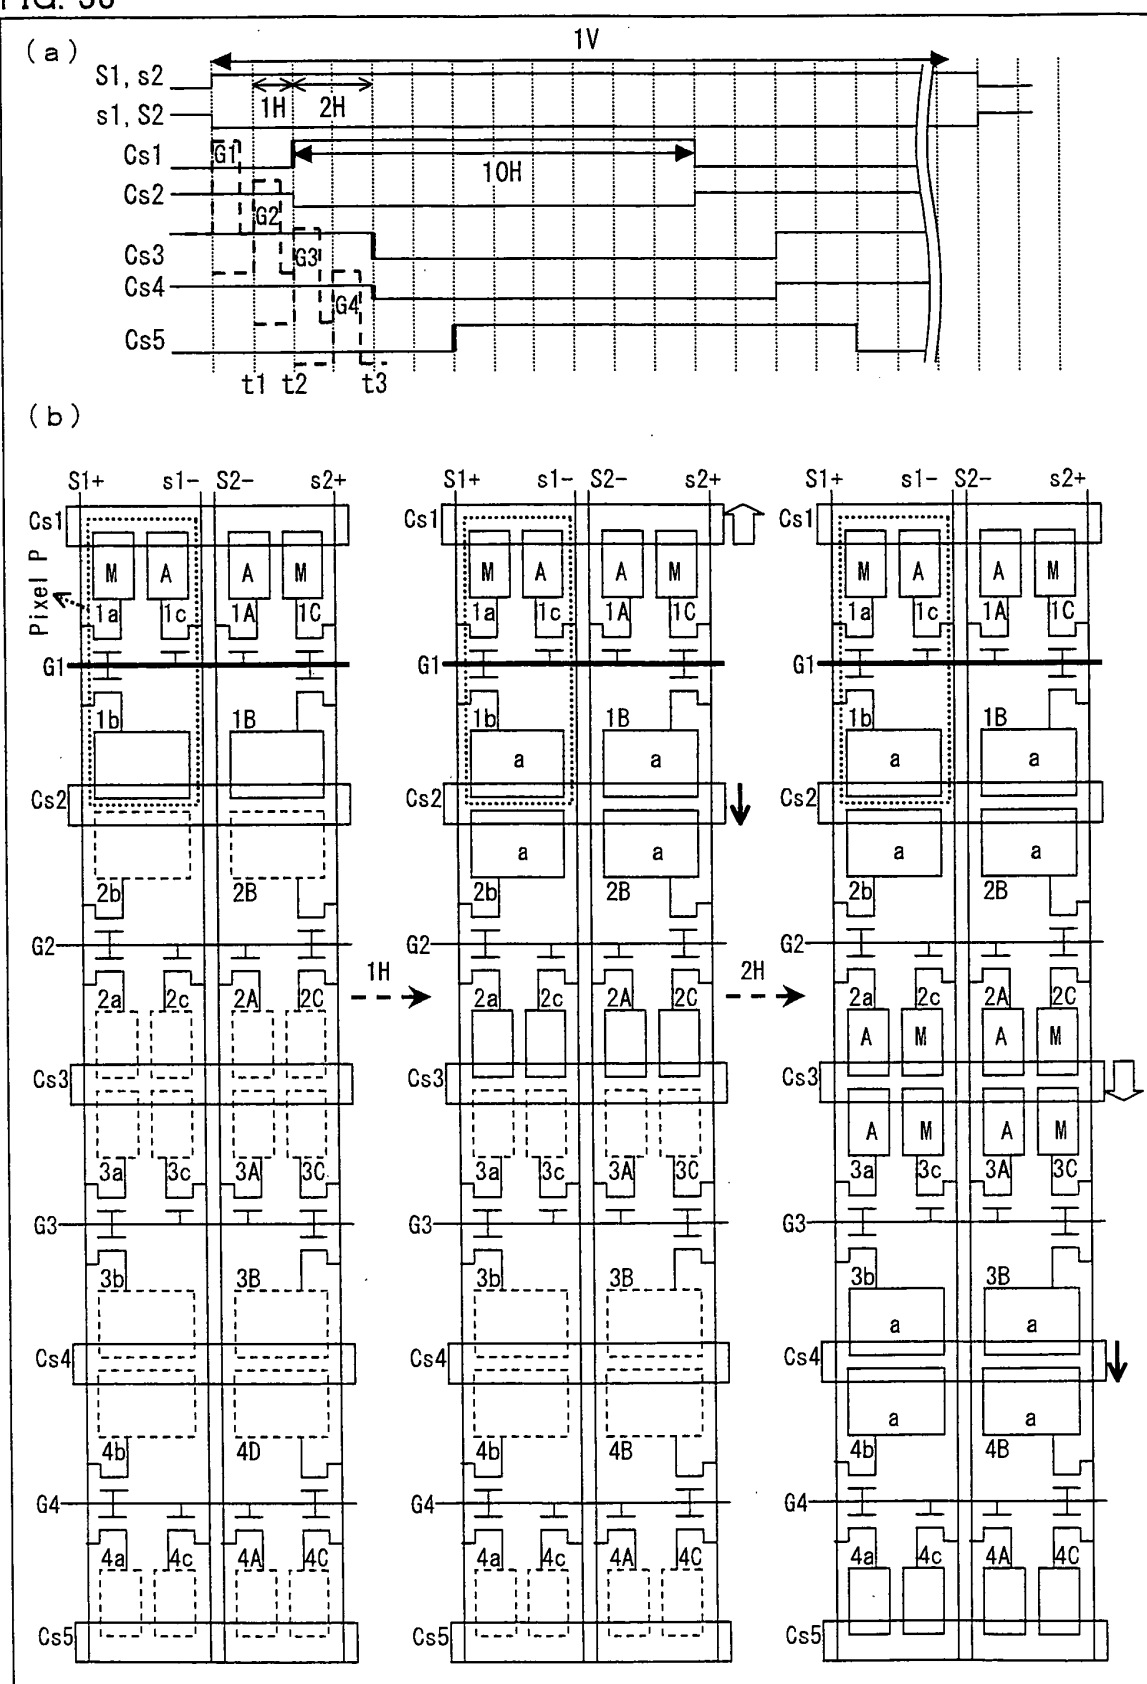


FIG. 37

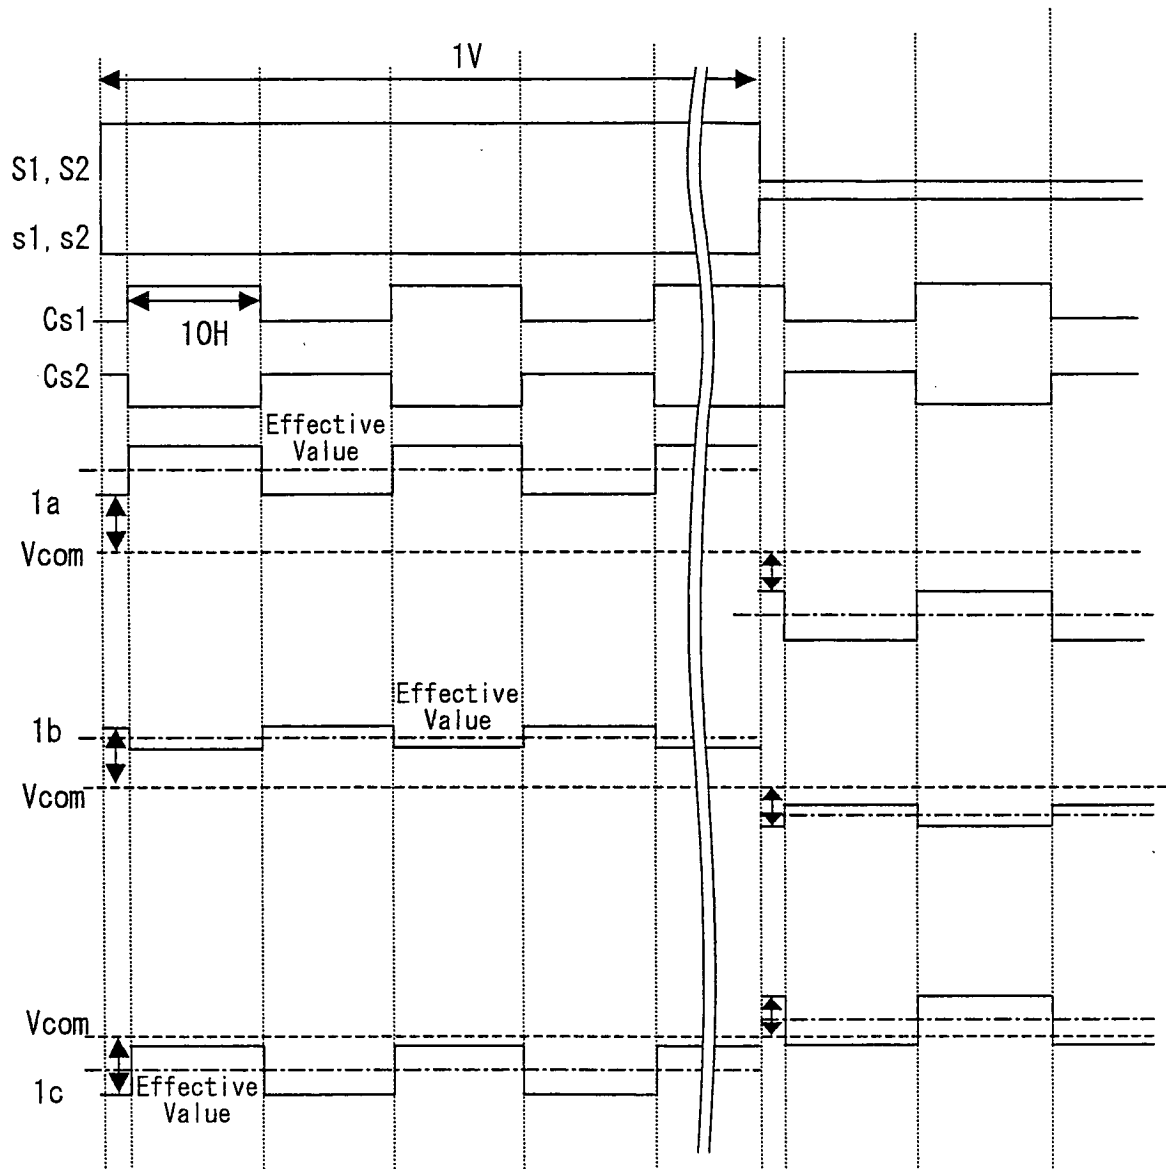


FIG. 38

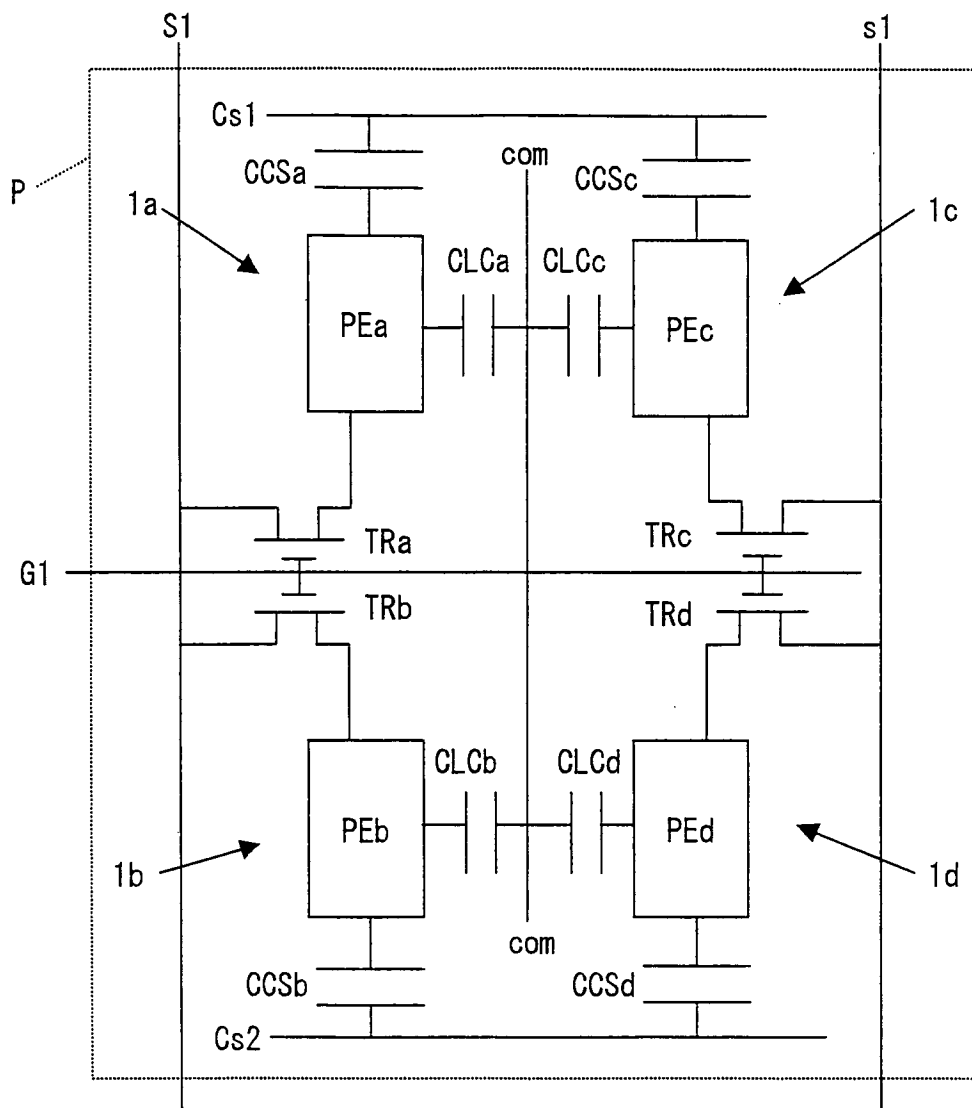


FIG. 39

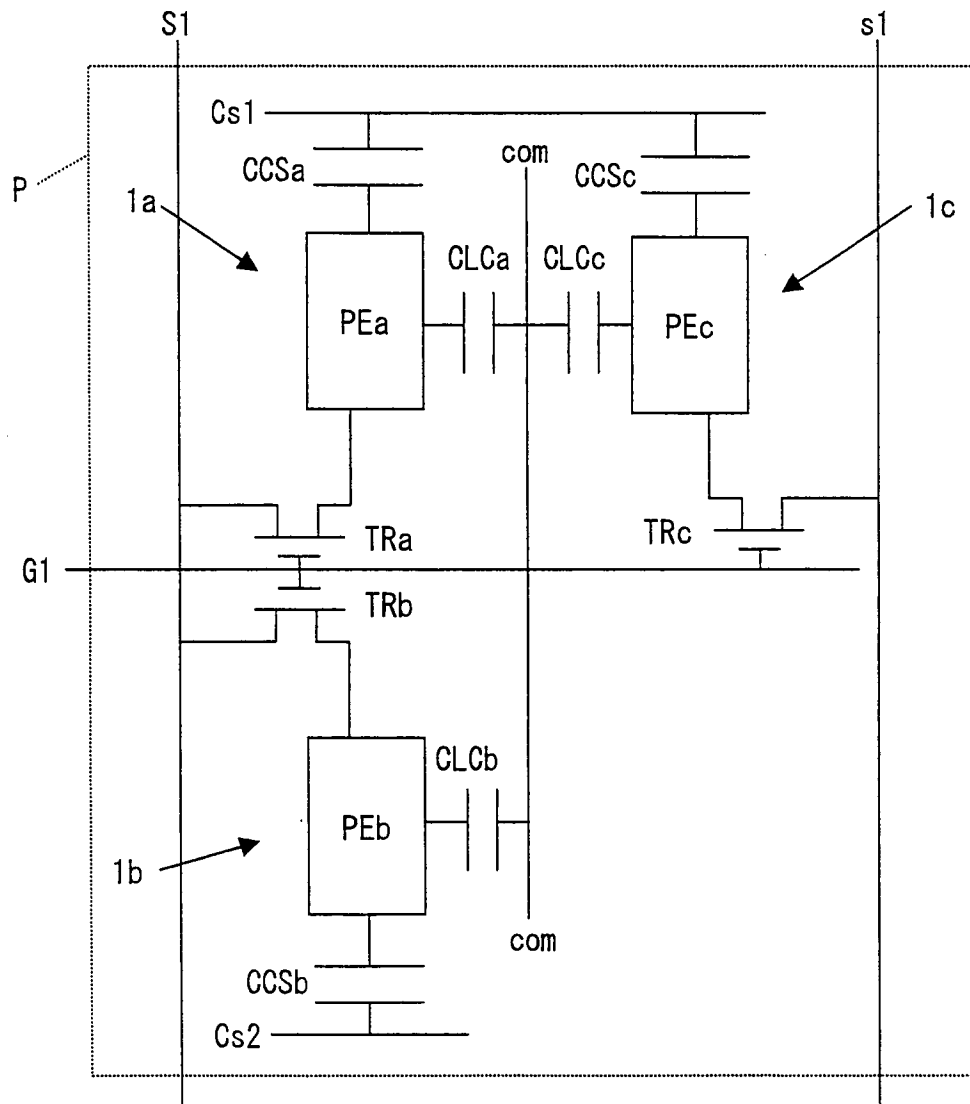


FIG. 40

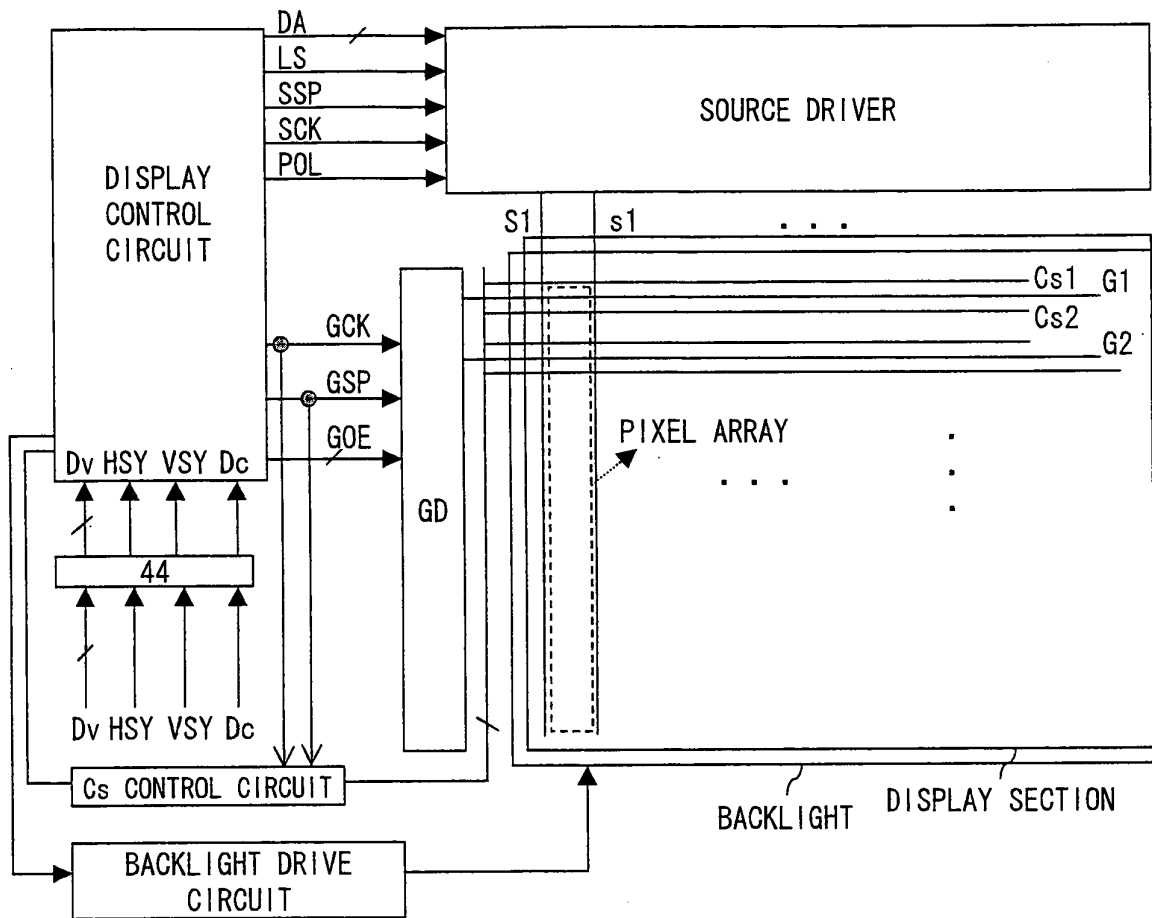


FIG. 41

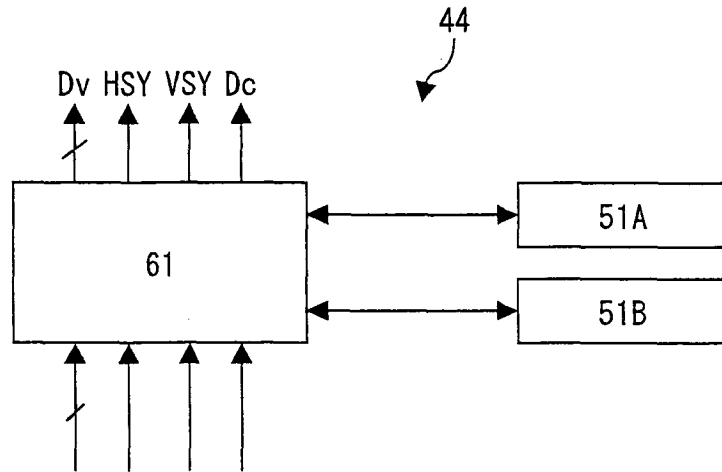


FIG. 42

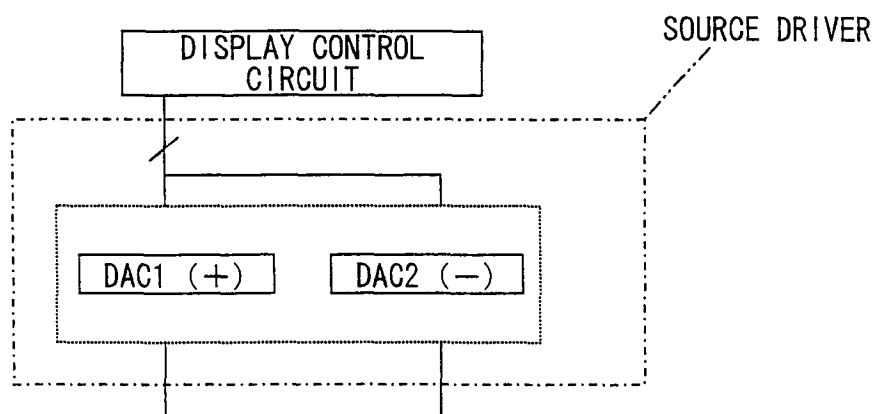


FIG. 43

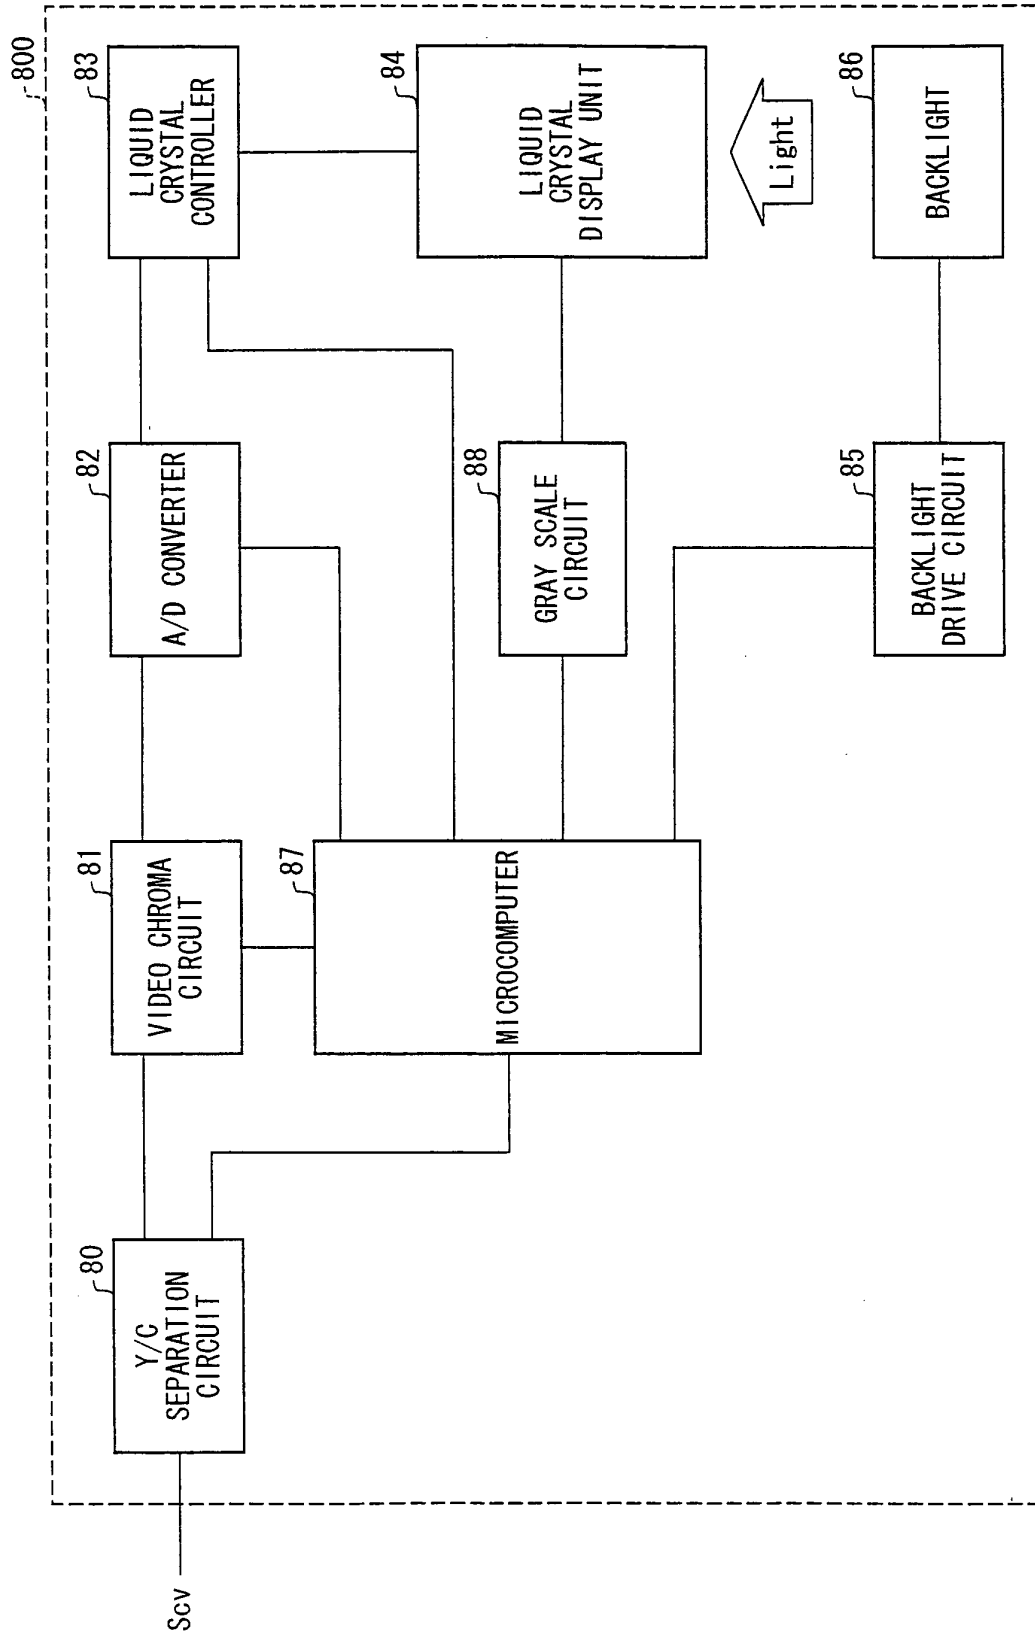


FIG. 44

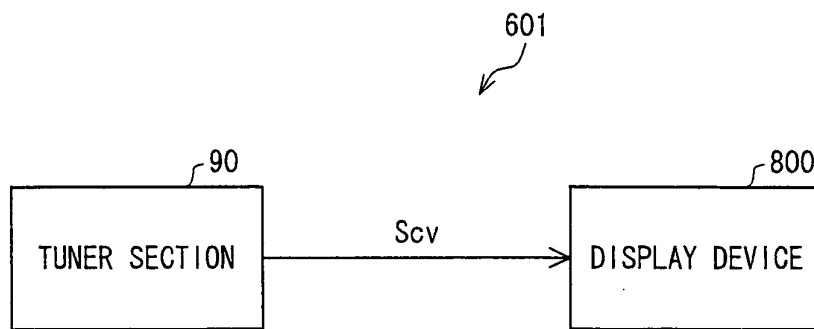


FIG. 45


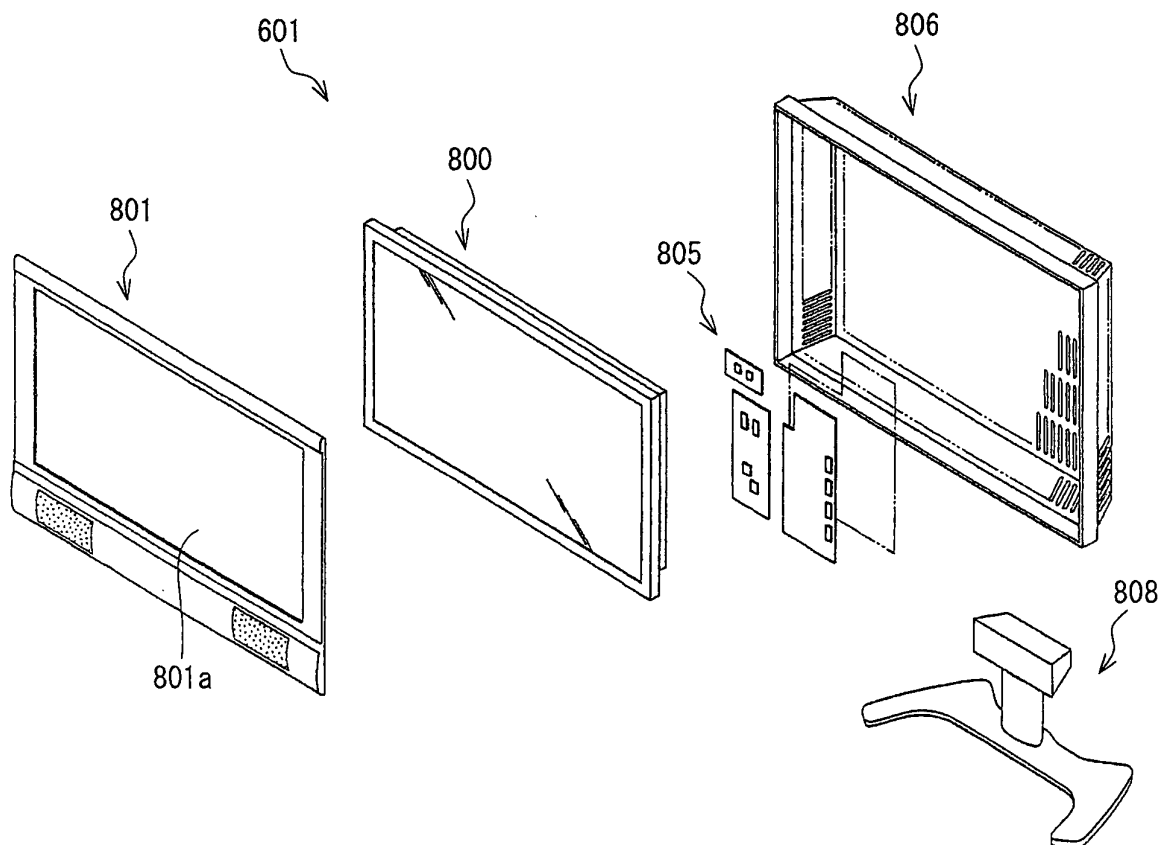


FIG. 46

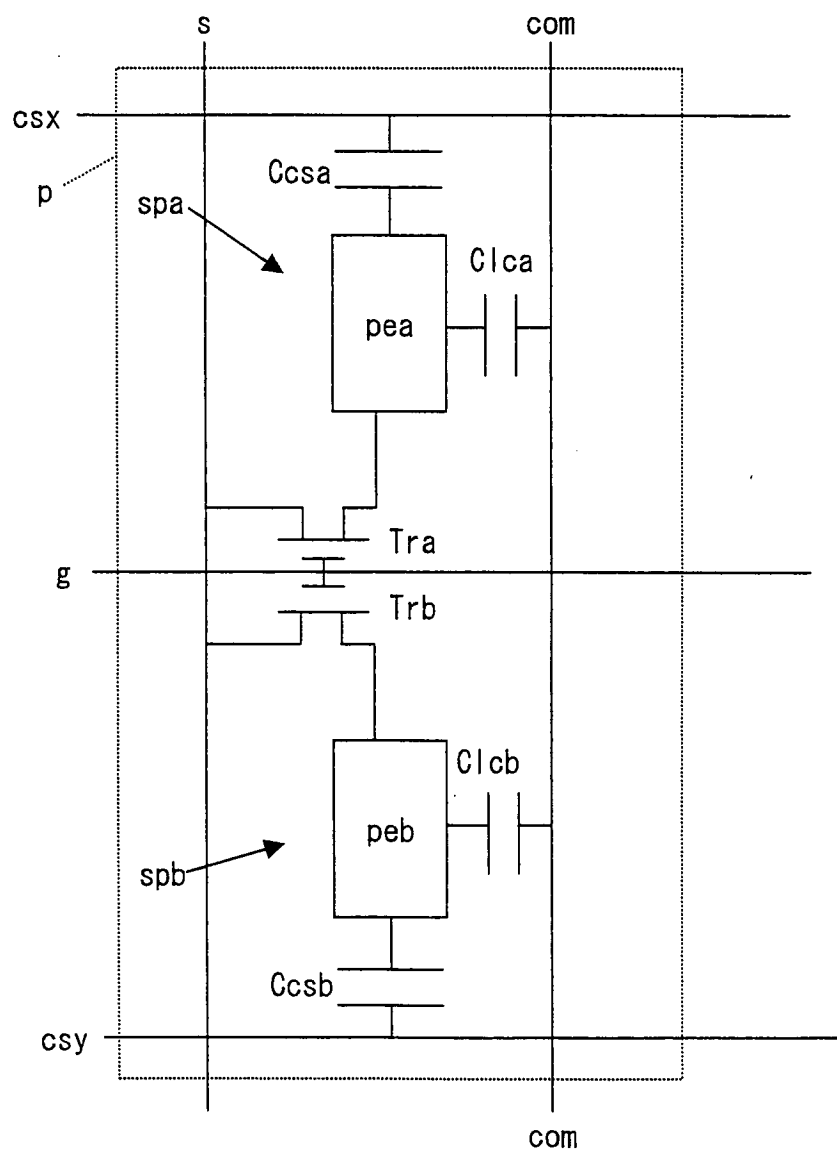

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/065891

A. CLASSIFICATION OF SUBJECT MATTER

G02F1/1368(2006.01)i, G02F1/133(2006.01)i, G09G3/20(2006.01)i, G09G3/36(2006.01)i, H04N5/66(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02F1/1368, G02F1/133, G09G3/20, G09G3/36, H04N5/66

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2008
Kokai Jitsuyo Shinan Koho 1971-2008 Toroku Jitsuyo Shinan Koho 1994-2008

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2004-62146 A (Sharp Corp.), 26 February, 2004 (26.02.04), Full text; Figs. 1 to 21 & US 2003/0227429 A1 & KR 2003-0095260 A & CN 1482593 A	1-36
A	WO 2006/038598 A1 (Sharp Corp.), 13 April, 2006 (13.04.06), Full text; Figs. 1 to 9 & EP 1798591 A1 & KR 2007-0056165 A & US 2008/0122772 A1	1-36
A	JP 5-119344 A (NEC Corp.), 18 May, 1993 (18.05.93), Full text; Figs. 1 to 2 (Family: none)	1-36

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
26 September, 2008 (26.09.08)

Date of mailing of the international search report
07 October, 2008 (07.10.08)

Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004062146 A [0007]

专利名称(译)	液晶显示器，有源矩阵基板，液晶面板，液晶显示单元和电视接收器		
公开(公告)号	EP2219069A1	公开(公告)日	2010-08-18
申请号	EP2008855500	申请日	2008-09-03
[标]申请(专利权)人(译)	夏普株式会社		
申请(专利权)人(译)	夏普株式会社		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	TSUBATA TOSHIHIDE		
发明人	TSUBATA, TOSHIHIDE		
IPC分类号	G02F1/1368 G02F1/133 G09G3/20 G09G3/36 H04N5/66 G02F1/1362		
CPC分类号	G02F1/136213 G02F1/13624 G02F1/136286 G02F2001/134345 G09G3/2074 G09G3/3607 G09G3/3648 G09G2300/0426 G09G2300/0447 G09G2300/0876 G09G2320/028		
优先权	2007311626 2007-11-30 JP		
其他公开文献	EP2219069A4 EP2219069B1		
外部链接	Espacenet		

摘要(译)

本发明提供一种配置，其中：每个像素阵列对应地设置有第一和第二数据信号线（S1，s1）；包括在每个像素阵列中的像素（P）包括四个子像素（1a到1d），它们连接到相同的扫描信号线（例如G1）；像素（P）相应地与两个存储电容器线（Cs1，Cs2）相关联；像素（P）的两个子像素（1a，1c）与两个存储电容器线中的一个（Cs1）限定相应的电容；两个子像素中的一个（1a）连接到第一数据信号线（S1），而两个子像素中的另一个（1c）连接到第二数据信号连接（s1）；另外两个子像素（1b，1d）与两个存储电容器线中的另一个（Cs2）限定相应的电容；另外两个子像素中的一个（1b）连接到第一数据信号线（S1），而另外两个子像素中的另一个（1d）连接到第二数据信号线（s1）。根据该配置，可以控制每个像素中包括的四个子像素，使得四个子像素具有各自不同的亮度级别。这样，可以通过利用不同的亮度级别来显示灰度级。

