



US008207921B2

(12) **United States Patent**
Lee et al.

(10) **Patent No.:** **US 8,207,921 B2**
(45) **Date of Patent:** ***Jun. 26, 2012**

(54) **LIQUID CRYSTAL DISPLAY PANEL AND
DRIVING METHOD FOR LIQUID CRYSTAL
DISPLAY PANEL**

(75) Inventors: **Seok Lyul Lee**, Tao-Yuan Hsien (TW);
Po Sheng Shih, Tao-Yuan Hsien (TW)

(73) Assignee: **Hannstar Display Corporation**, Taipei
(TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 1246 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **11/657,640**

(22) Filed: **Jan. 25, 2007**

(65) **Prior Publication Data**

US 2007/0120798 A1 May 31, 2007

Related U.S. Application Data

(63) Continuation of application No. 10/790,824, filed on
Mar. 3, 2004, now Pat. No. 7,271,789.

(30) **Foreign Application Priority Data**

Oct. 15, 2003 (TW) 92128619 A

(51) **Int. Cl.**
G09G 3/36 (2006.01)

(52) **U.S. Cl.** 345/87; 345/92; 345/95; 345/98;
345/89; 345/100

(58) **Field of Classification Search** 345/204,
345/205, 210, 87-100, 208, 76, 55, 690;
315/169.1, 169.3; 257/57, E29.003; 349/38,
349/39, 43, 129, 139, 116

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,206,634	A *	4/1993	Matsumoto et al.	345/99
5,424,753	A *	6/1995	Kitagawa et al.	345/94
5,657,041	A *	8/1997	Choi	345/99
5,818,413	A *	10/1998	Hayashi et al.	345/100
5,844,536	A *	12/1998	Okada et al.	345/94
6,344,841	B1 *	2/2002	Moon	345/60
6,476,786	B1 *	11/2002	Miyachi	345/90
6,545,653	B1 *	4/2003	Takahara et al.	345/87
6,693,618	B2 *	2/2004	Son et al.	345/99
6,727,875	B1 *	4/2004	Mikami et al.	345/92
6,809,482	B2 *	10/2004	Koyama	315/169.3
6,819,317	B1 *	11/2004	Komura et al.	345/204
6,853,372	B2 *	2/2005	Kanzaki et al.	345/208
6,933,910	B2 *	8/2005	Kodate et al.	345/55
6,937,222	B2 *	8/2005	Numao	345/98
7,256,774	B1 *	8/2007	Senda et al.	345/204
7,701,431	B2 *	4/2010	Asuma et al.	345/98
7,916,108	B2 *	3/2011	Yang et al.	345/98
2002/0154086	A1 *	10/2002	Furuhashi et al.	345/100
2003/0006948	A1 *	1/2003	Son et al.	345/87
2003/0030602	A1 *	2/2003	Kasai	345/76
2003/0174152	A1 *	9/2003	Noguchi	345/690
2004/0046914	A1 *	3/2004	Hirota	349/129
2004/0135756	A1 *	7/2004	Mikami et al.	345/92
2005/0083279	A1 *	4/2005	Lee et al.	345/87
2006/0001640	A1 *	1/2006	Lee	345/100
2006/0176291	A1 *	8/2006	Asuma et al.	345/204
2009/0262056	A1 *	10/2009	Yang et al.	345/89

* cited by examiner


Primary Examiner — Prabodh M Dharja

(74) *Attorney, Agent, or Firm* — Volentine & Whitt, PLLC

(57) **ABSTRACT**

A couple of scanning signals are applied to a pixel on the liquid crystal display panel. The scanning signals allows voltage to be separately written into a control electrode and a pixel electrode during two adjacent horizontal scanning periods or a vertical scanning period, and a coupled voltage is induced on the control electrode due to the potential variation of the pixel electrode during the next horizontal scanning period.

14 Claims, 5 Drawing Sheets

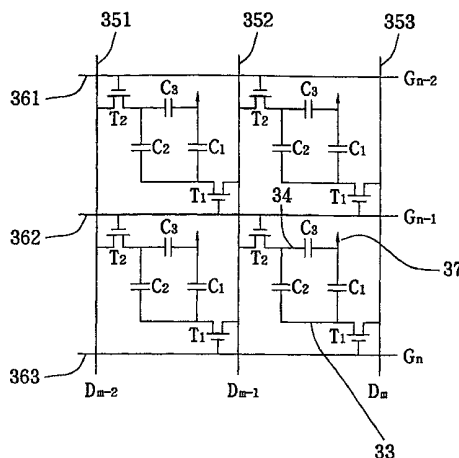

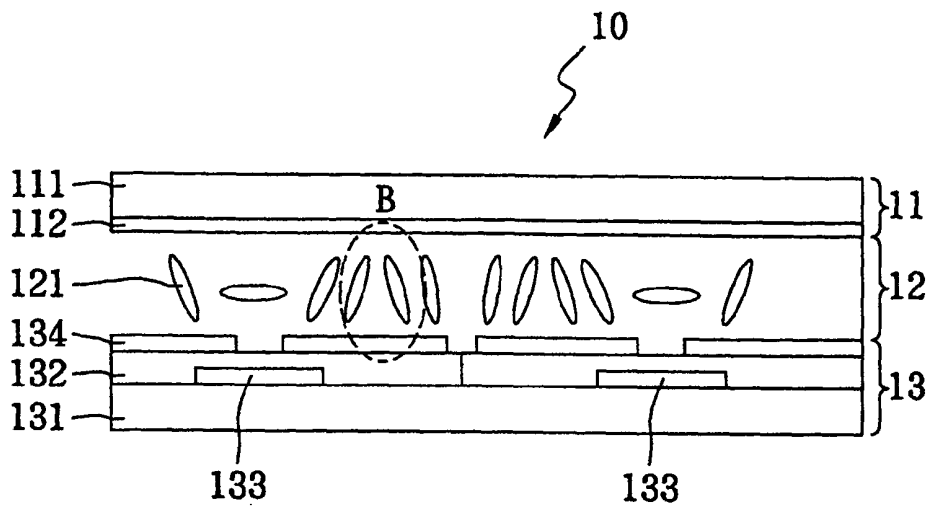


FIG. 1 (Background Art)

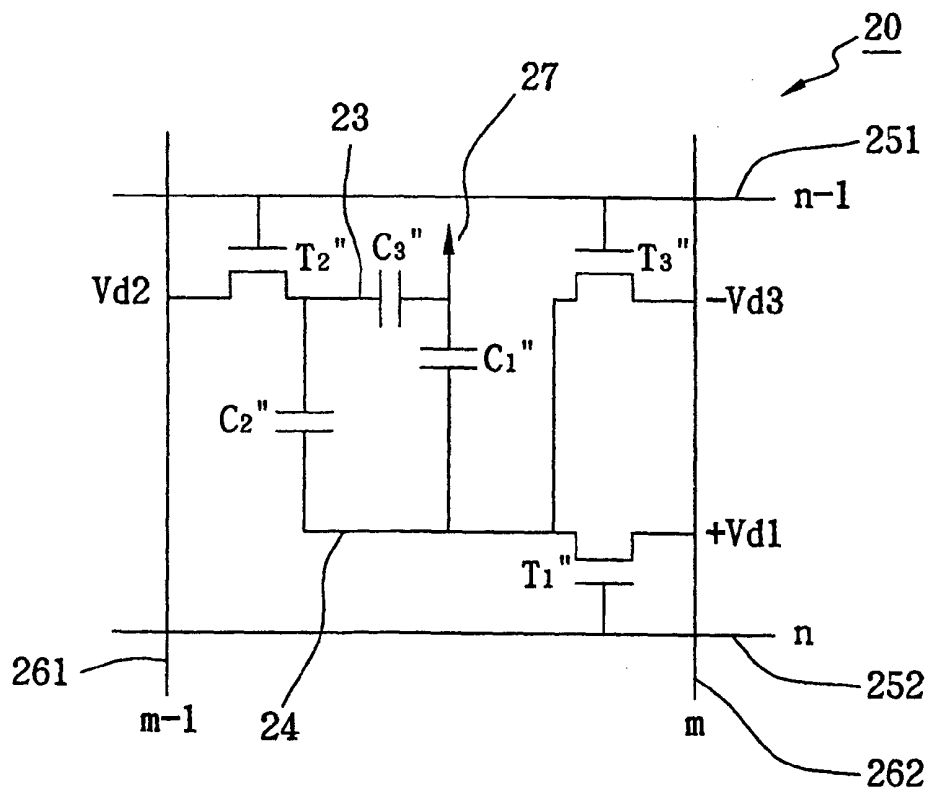


FIG. 2 (Background Art)

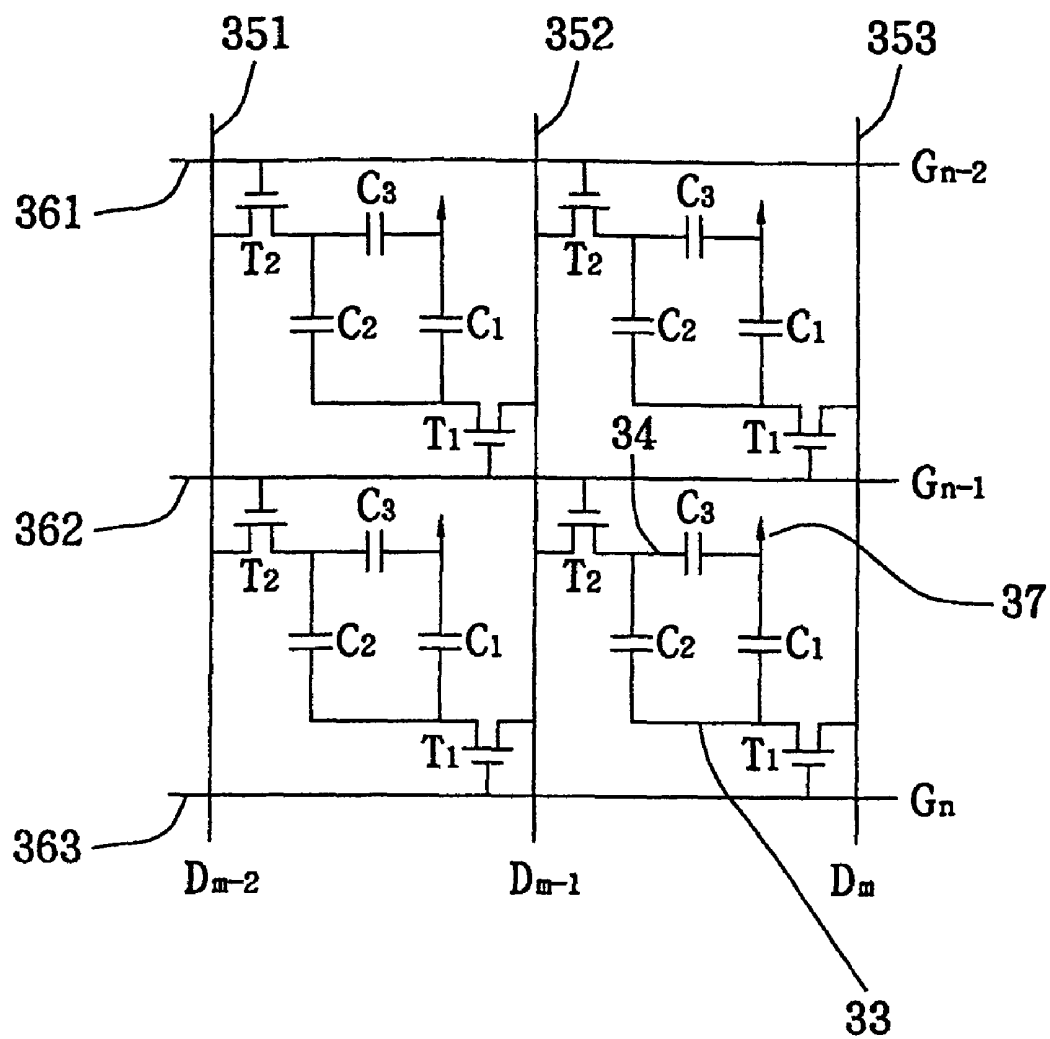


FIG. 3

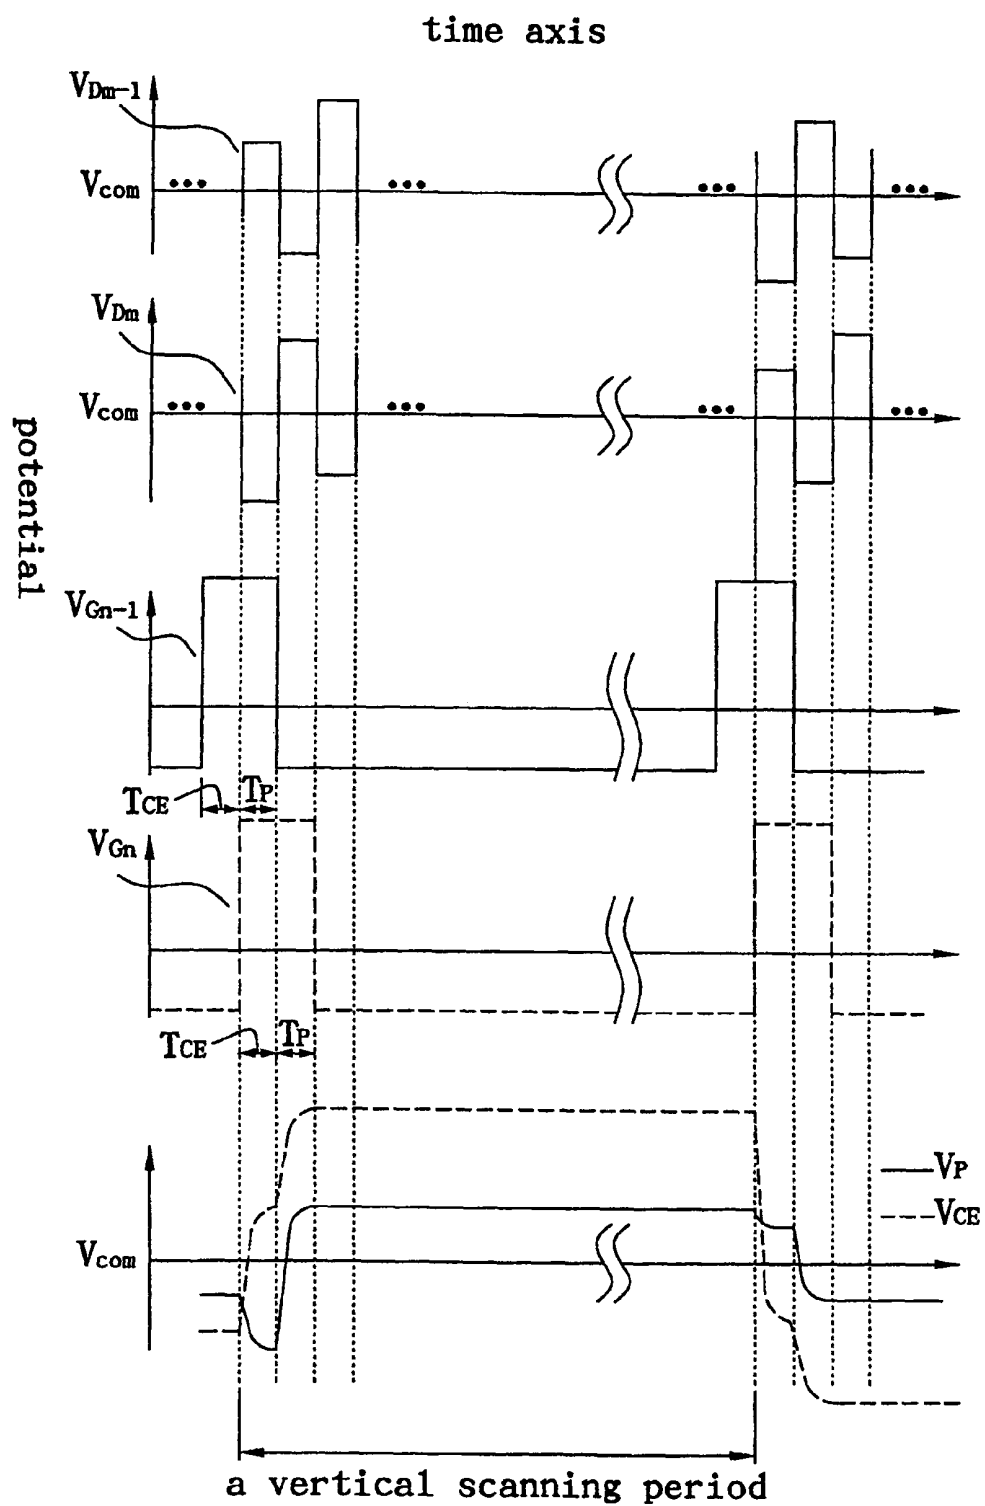


FIG. 4

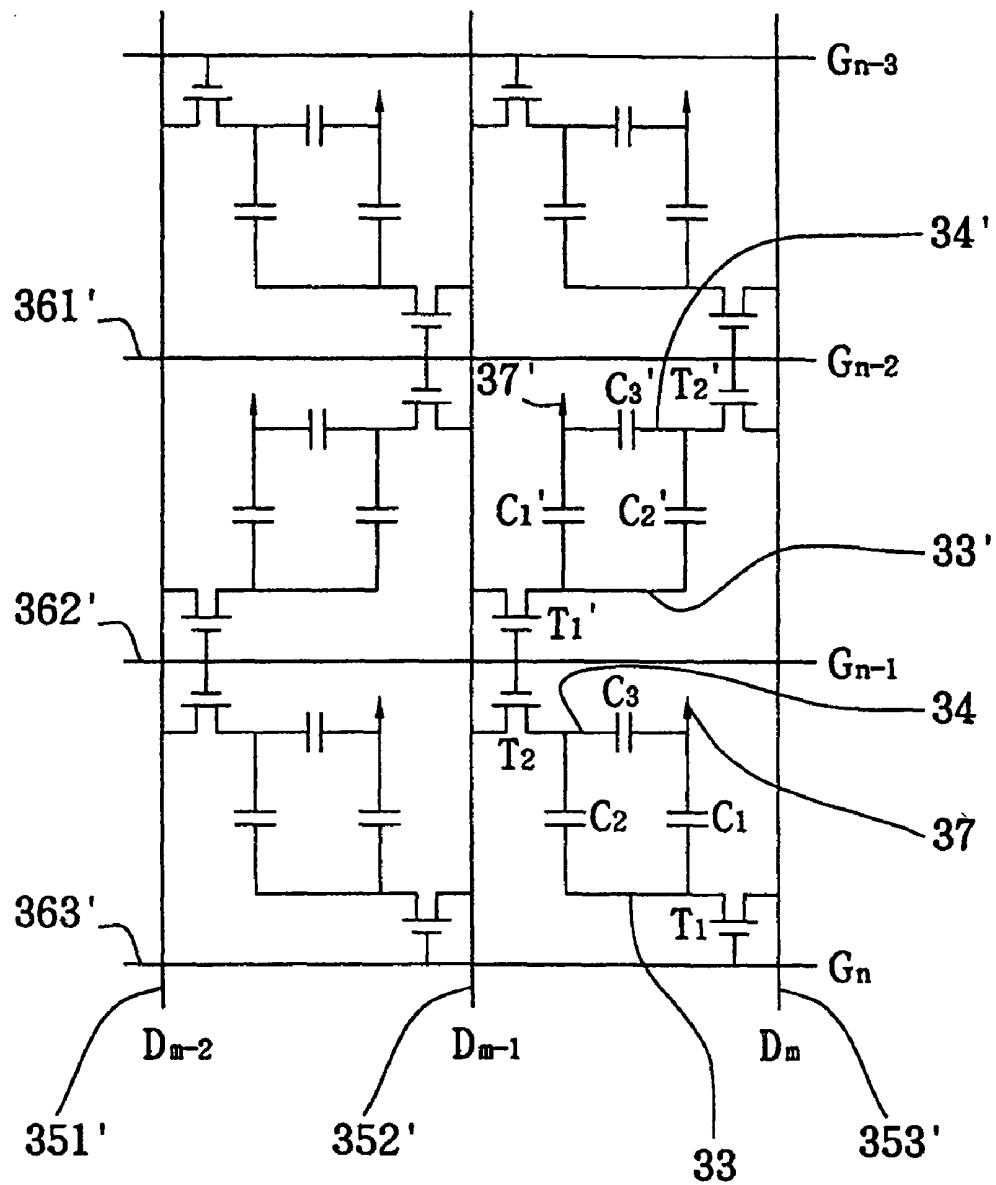


FIG. 5

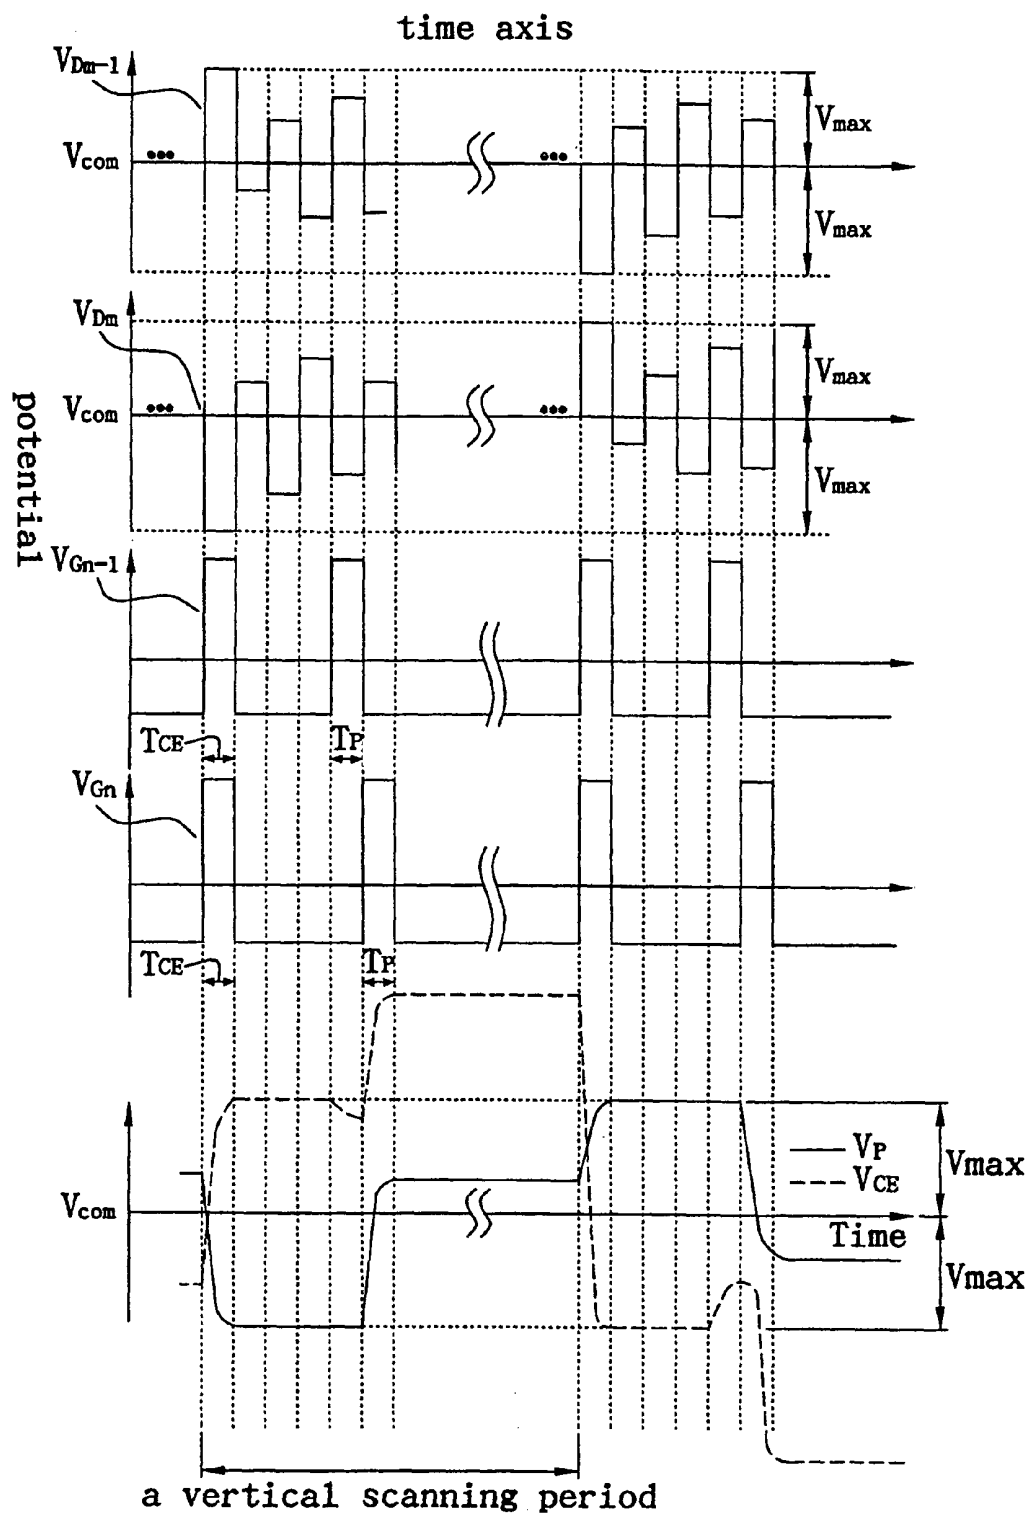


FIG. 6

LIQUID CRYSTAL DISPLAY PANEL AND DRIVING METHOD FOR LIQUID CRYSTAL DISPLAY PANEL

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a Continuation of application Ser. No. 10/790,824 filed Mar. 3, 2004, now U.S. Pat. No. 7,271,789, which claims foreign priority from Taiwanese Patent Application No. 09128619 filed Oct. 15, 2003.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a liquid crystal display panel and a driving method for a liquid crystal display panel, especially relates to a method to drive the potential of a control electrode higher than the potential of a pixel electrode.

2. Description of the Related Art

With the wide applications of liquid crystal display (LCD) panels, users have more and more demands about the quality of the LCD panel, such as high brightness, high contrast, high resolution, high color saturation and fast response time. Especially as the panel size increases, the LCD panels have generally been applied to household flat displays, such as liquid crystal (LC) TV sets, which have become an important application of the LCD panels. Most of the general, traditional LCD panels have narrow view angles so the normal images displayed by them only can be viewed directly in front of the display area. If we watch the display area from an oblique view angle, color distortion occurs in what we watch, and even gray inversion occurs. That is, what appears black is actually white and what appears white is actually black. Therefore, how to widen the view angle is an important subject for the LCD manufacturers.

Among various methods for widening the view angle, an LC Vertical Alignment (VA) technique is still one of the most popular techniques in the current LCD market. However, because liquid crystal molecules are aligned in the same direction (mono-domain vertical alignment), we also cannot see a normal image from the view angle perpendicular to or symmetric to the direction. No matter when the liquid crystal molecules are realigned in a different direction after the electrical field existing therein changes, the view angle is also limited to the parallel direction of the liquid crystal molecules. Therefore, a multi-domain VA technique was put forth to improve the drawback of the prior art, hence the quality of various view angles is assured. Japanese Fujitsu Corporation once tried to form ridges or bumps on the color filter, and use the oblique boundary generated by bumps to control the alignment of the tilt direction of liquid crystal molecules automatically align tilt direction according to where region they belong to. But because the existence of the bumps results in that the precise alignment between a color filter and an active matrix substrate is necessary, and an additional over coating is necessarily formed on the color filter, the yield of this LCD panel becomes worse and the cost thereof increases.

FIG. 1 is a cross-sectional diagram of a conventional LCD display panel with a bias-bending vertical alignment (BBVA) type. The LCD panel 10 comprises a color filter 11, a liquid crystal layer 12 and an active matrix substrate 13. The color filter 11 and active matrix substrate 13 have a transparent substrate 111 and 131 respectively. A main electric field exists between the common electrode 112 formed on the color filter 11 and the pixel electrode 134 formed on the active matrix

substrate 13, and a pair of symmetrically oblique electric fields exists between a control electrode 133 and the pixel electrode 134 together formed on the active matrix substrate 13 to make liquid crystal molecules 121 have oblique positions. There is another insulation layer 132 interposed between the control electrode 133 and the pixel electrode 134.

But when $V_{CE} < V_{com} < V_P$ is satisfied, a declination line is brought into existence in the center of an area B, wherein V_{CE} , V_{com} and V_P represent the potentials of the control electrode, common electrode and pixel electrode respectively. The existence of the declination line result in that the liquid crystal layer 12 has a lower transmission ratio, a longer response time and an unstable status. In order to avoid the occurrence of these negative phenomena, it is expect that the following criteria should be satisfied during polarity inversion:

Criterion 1: If the current pixel is a positive frame, then $V_{CE} > V_P > V_{com}$; and

Criterion 2: If the current pixel is a negative frame, then $V_{CE} < V_P < V_{com}$.

FIG. 2 is an equivalent circuit diagram of a pixel proposed by Korean Samsung Electronics Cooperation. The circuit of pixel 20 can satisfy aforesaid criteria to eliminate declination lines. One electrode of the first thin film transistor T_1 is connected to a data line 262, and the gate electrode of it is driven by the scanning line 252. When the first thin film transistor T_1 is turned on, the data signal of the data line 262 is written into a pixel electrode 24. One electrode of the second thin film transistor T_2 is connected to a data line 261, and the gate electrode of it is driven by a scanning line 251. When the second thin film transistor T_2 is turned on, the data signal of the data line 261 is written into a control electrode 23. One electrode of the third thin film transistor T_3 is connected to the data line 262, and the gate electrode of it is driven by the scanning line 251. When the third thin film transistor T_3 is turned on, the data signal of the data line 262 is written into the pixel electrode 24.

In the pixel 20, a liquid crystal capacitor C_1 exists between the pixel electrode 24 and common electrode 27, a Bias-Bending capacitor C_2 exists between the control electrode 23 and pixel electrode 24, and a capacitor C_3 exists between the control electrode 23 and the common electrode 27. Therefore, we obtain the following formula:

$$V_{CE} = \frac{C_2''}{C_2'' + C_3} (V_{d1} + V_{d3}) + V_{d2},$$

wherein V_{d1} , V_{d2} and V_{d3} respectively represents the potentials of pixels, dividedly placed on coordinate (n,m), coordinate (n-1,m-1) and coordinate (n-1,m), to which the data signals are respectively applied. Meantime, we obtain an equation $V_{CE} - V_P = V_{d2} + V_{d3}$ to satisfy Criteria 1 and 2. However, because each of the pixels 20 includes three thin film transistors, only if one of the thin film transistors is damaged, the pixel is considered to be malfunctioning. Therefore, the manufacture yield of this LCD cannot meet an acceptable standard currently. On the other hand, the number of the thin film transistors connected to a same scanning line is too much so as to result in a severe RC delay on the scan signal. The foresaid problems have to be further resolved.

SUMMARY OF THE INVENTION

The first objective of the present invention is to provide a liquid crystal display panel. The polarity of a control electrode synchronously changes with the polarity of the pixel.

When the polarity of the pixel is positive, the potential of the control electrode is higher than that of the pixel electrode; when the polarity of pixel is negative, the potential of control electrode is lower than that of the pixel electrode.

The second objective of the present invention is to provide a driving method for a liquid crystal display panel. The polarity of a control electrode synchronously changes with the polarity of the pixel. When the polarity of the pixel is positive, the potential of the control electrode is higher than that of the pixel electrode; when the polarity of pixel is negative, the potential of control electrode is lower than that of the pixel electrode.

In order to achieve the objective, the present invention discloses a driving method for a liquid crystal display panel. A couple of scanning signals are applied to a pixel on the liquid crystal display panel. The scanning signals allows voltage to be separately written into a control electrode and a pixel electrode during two adjacent horizontal scanning periods or a vertical scanning period, and a coupled voltage is induced on the control electrode due to the potential variation of the pixel electrode during the next horizontal scanning period.

Furthermore, a liquid crystal display panel is provided, which includes an active matrix substrate having a plurality of thin film transistors. The active matrix substrate comprises a plurality of parallel scanning lines and a plurality of parallel data lines, which cross mutually and form a plurality of pixels. Each of the pixels includes the first thin film transistor, the second thin film transistor, a control electrode (CE) and a pixel electrode. The first electrode of the first thin film transistor is connected to the data line; the second electrode of it is connected to the pixel electrode; the gate electrode of it is connected to the scanning line. The first electrode of the second thin film transistor is connected to another adjacent data line; the second electrode of it is connected to the control electrode, and the gate of it is connected to another adjacent scanning line. The scanning signals driving the pixel allows the control electrode and the pixel electrode to be written into their potentials during two horizontal scanning periods or during a vertical scanning period respectively. The gate electrode of first thin film transistor of the pixel located in a middle pixel row is connected to the gate electrode of second thin film transistor of the pixel located in a next pixel row and the gate electrode of second thin film transistor of the pixel located in the middle pixel row is connected to the gate electrode of first thin film transistor of the pixel located in a previous pixel row.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described according to the appended drawings in which:

FIG. 1 is a cross-sectional diagram of a conventional LCD display panel with a bias-bending vertical alignment (BBVA) type;

FIG. 2 is an equivalent circuit diagram of a pixel proposed by Korean Samsung Electronics Cooperation;

FIG. 3 is an equivalent circuit diagram of the pixel of an LCD panel in accordance with the present invention;

FIG. 4 is a waveform diagram of driving signals applied to the pixel in FIG. 3;

FIG. 5 is an equivalent circuit diagram of the pixel of an LCD panel in accordance with another embodiment of the present invention; and

FIG. 6 is a waveform diagram of driving signals applied to the pixel in FIG. 5.

PREFERRED EMBODIMENT OF THE PRESENT INVENTION

FIG. 3 an equivalent circuit diagram of the pixel of an LCD panel in accordance with the present invention. Only four adjacent pixels are shown in FIG. 3, which are formed by scanning lines 361, 362 and 363 (representing G_{n-2} , G_{n-1} , and G_n respectively) crossing data lines 351, 352 and 353 (representing D_{m-2} , D_{m-1} and D_m respectively). Each pixel includes a first thin film transistor T_1 , a second thin film transistor T_2 , a control electrode 34 and a pixel electrode 33 for the pixel at the intersection of the data line 353 and scanning line 363. The first electrode of the first thin film transistor T_1 is connected to a data line 353, the second electrode of it is connected to the pixel electrode 33, and the gate electrode of it is connected to a scanning line 363. The first electrode of the second thin film transistor T_2 is connected to another adjacent data line 352, the second electrode of it is connected to the control electrode 34, and the gate electrode of it is connected to a scanning line 362. In the pixel configuration of the presented invention, a liquid crystal capacitor C_1 exists between the pixel electrode 33 and a common electrode 37, a bias-bending capacitor C_2 exists between the control electrode 34 and the pixel electrode 33, and further a capacitor C_3 is formed between the control electrode 34 and the common electrode 37.

FIG. 4 is a waveform diagram of driving signals applied to the pixel in FIG. 3. V_{Dm-1} and V_{Dm} represent the data signals applied to the data lines 352 and 353, respectively, and V_{Gn-1} and V_{Gn} represent the scan signals applied to the scanning lines 362 and 363, respectively. The scanning waveform during each vertical scanning period includes a first waveform in a T_{CE} interval and a second waveform in a T_P interval.

The waveform the lowest row in FIG. 4 is the variations of the corresponding potentials of the pixel placed at the intersection of the scanning line 363 and the data line 353, wherein V_P and V_{CE} represent the potential of the pixel electrode 33 and control electrode 34, respectively. During the preceding interval T_{CE} on the scanning signal V_{Gn} , the second thin film transistor T_2 is turned on by the scanning signal V_{Gn-1} , and then the data signal V_{Dm-1} is written into the control electrode 34. As shown in FIG. 4, the potential of the control electrode 34 change from an initial potential (lower than V_{com}) to the same potential as the data signal V_{Dm-1} (higher than V_{com}). At the same time, because the first thin film transistor T_1 is turned on by V_{Gn} , the potential (lower than V_{com}) of the data signal V_{Dm} is written into the pixel electrode 33. During the succeeding interval T_P on the scanning signal V_{Gn} , the first thin film transistor T_1 is turned on by the scanning signal V_{Gn} , and then the potential (higher than V_{com}) of the data signal V_{Dm} is written into the pixel electrode 33. Meanwhile, because the second thin film transistor T_2 is turned off, the control electrode 34 is in a floating state, while the potential of the control electrode 34 is advanced to a higher level due to a capacitively coupled effect.

From FIG. 4, it is clear that when the polarity of the pixel is positive, Criterion 1 $V_{CE} > V_P > V_{com}$ is satisfied. After the vertical scanning period terminating, because the polarity of the pixel changes to negative, Criterion 2 $V_{CE} < V_P < V_{com}$ is also satisfied accordingly.

FIG. 5 is an equivalent circuit diagram of the pixel of an LCD panel in accordance with another embodiment of the present invention. The configuration of the pixel connected to a scanning line 363' is given as following: the first electrode of

the first thin film transistor T_1 is connected to a data line 353', the second electrode of it is connected to a pixel electrode 33, and the gate electrode of it is connected to a scanning line 363'; the first electrode of the second thin film transistor T_2 is connected to another adjacent data line 352', the second electrode of it is connected to a control electrode 34, and the gate electrode of it is connected to a scanning line 362'. As the configuration in FIG. 5 shows, a liquid crystal capacitor C_1 exists between the pixel electrode 33 and a common electrode 37, a bias-bending capacitor C_2 exists between the control electrode 34 and the pixel electrode 33, and further a capacitor C_3 is formed between the control electrode 34 and the common electrode 37.

The configuration of the pixel connected to the scanning line 362' is horizontally symmetric to the configuration of the pixel connected to the scanning line 363', and is given as follows: the first electrode of the first thin film transistor T_1 ' is connected to the data line 352', the second electrode of it is connected to a pixel electrode 33', and the gate electrode of it is connected to the scanning line 362'; the first electrode of the second thin film transistor T_2 ' is connected to another adjacent data line 353', the second electrode of it is connected to a control electrode 34', and the gate electrode of it is connected to a scanning line 361'. A liquid crystal capacitor C_1' exists between the pixel electrode 33' and a common electrode 37', a bias-bending capacitor C_2' exists between the control electrode 34' and the pixel electrode 33', and further a capacitor C_3' is formed between the control electrode 34' and the common electrode 37'.

FIG. 6 is a waveform diagram of driving signals applied to the pixel in FIG. 5. V_{Dm-1} and V_{Dm} represent the data signals applied to the data lines 352' and 353', respectively, and V_{Gn-1} and V_{Gn} represent the scan signals applied to the scanning lines 362' and 363', respectively. The scanning waveform during a vertical scanning period includes two parts. That is, the data signals V_{Dm-1} and V_{Dm} are respectively written into the control electrode 34 and 34' during an interval T_{CE} , and the data signals V_{Dm} and V_{Dm-1} are respectively written into the pixel electrodes 33 and 33' during an interval T_P .

The first pulses of the scanning signals V_{Gn} and V_{Gn-1} are active at the same horizontal scanning period, which is equal to the interval T_{CE} . When the potential of V_{Dm-1} is higher than that of V_{com} , the data signal V_{Dm-1} is allowed to be written into the control electrode 34 after the second thin film transistor T_2 is turned on. Meanwhile, the potential of V_{Dm-1} is equal to V_{com} plus V_{max} representing the maximum voltage between the potential of the data signals and the potential of the common electrode. Therefore, the potential of the control electrode 34 changes to a higher level the same as that of the data signal V_{Dm-1} from a lower level. Meanwhile, the potential of data signal V_{Dm} is at a lower level, and the data signal V_{Dm} is also written into the pixel electrode 33, wherein the potential of V_{Dm} is equal to V_{com} minus V_{max} .

The second pulses of the scanning signals V_{Gn-1} and V_{Gn} are respectively active at two adjacent horizontal scanning periods, i.e., the intervals T_P . The high potential of the second pulse on the scanning signal V_{Gn-1} turns on the second thin film transistor T_2 ; meanwhile, the potential of the data signal V_{Dm-1} is written into the control electrode 34. Then the high potential of the second pulse on the scanning signal V_{Gn} turns on the first thin film transistor T_1 ; meanwhile, the high potential of the data signal V_{Dm} is written into the pixel electrode 33. Because the second thin film transistor T_2 is turned off at this time, the control electrode 34 is in a floating state; consequently, the potential V_{CE} of the control electrode 34 advanced to a higher level due to a capacitively coupled effect. Because the capacitance of the capacitor C_3 is far less

than that of that of the capacitors C_1 and C_2 , for the pixels placed at the intersection of the scan line 363' and the data line 353', a formula is given as follows:

$$V_{CE} - V_P \cong \pm \frac{(C_1 + 2C_2)V_{max} + C_1 \times |V_{Pn-1}|}{C_1 + C_2},$$

wherein V_{max} represents the maximum voltage between the potential of the data signals and the potential of the common electrode, and V_{Pn-1} represents the voltage of the pixel electrode at the intersection of the scanning line 362' and the data line 352' against the potential V_{com} .

From FIG. 6, it is clear that when the polarity of pixel is positive, except for an ignorable interval, Criterion 1 $V_{CE} > V_P > V_{com}$ is satisfied during most of the remaining period. After a vertical scanning period terminating, the polarity of the pixel changes to negative, then Criterion 2 $V_{CE} < V_P < V_{com}$ is satisfied during most of another vertical scanning period.

The whole screen of the LCD panel can be divided into several groups according to the scanning lines, and each group has several adjacent scan lines, such as two, three and four adjacent scanning lines. The intervals T_{CE} of the scanning lines in the same group appear on the same horizontal scanning period.

The above-described embodiments of the present invention are intended to be illustrative only. Numerous alternative embodiments may be devised by persons skilled in the art without departing from the scope of the following claims.

What is claimed is:

1. A driving method for a liquid crystal display panel, comprising the steps of:

applying a couple of scanning signals to a pixel on the liquid crystal display panel, wherein the scanning signals allow voltages to be separately written into a control electrode and a pixel electrode during two adjacent horizontal scanning periods or a vertical scanning period, and a coupled voltage is induced on the control electrode due to a potential variation of the pixel electrode during a next horizontal scanning period or the vertical scanning period, wherein the pixel includes thin film transistors including only a first thin film transistor and a second thin film transistor respectively coupled to the pixel electrode and the control electrode as well as respectively coupled to two adjacent scanning lines, and the first thin film transistor and the second thin film transistor of the same pixel are turned on together during a duration in the vertical scanning period,

wherein the scanning signals have the same pulse width, and wherein each of the first and second thin film transistors includes a gate electrode, a first electrode and a second electrode, and the first and second electrodes of the first thin film transistor do not connect to the first and second electrodes of the second thin film transistor, and wherein a potential of the control electrode synchronously changes with a polarity of the pixel electrode such that when a polarity of the pixel is positive the driven potential of the control electrode is higher than a potential of the pixel electrode, and when the polarity of the pixel is negative the driven potential of the control electrode is lower than the potential of the pixel electrode.

2. The driving method for a liquid crystal display panel of claim 1, wherein one of the couple of scanning signals during

a previous horizontal scanning period controls voltage to be written into the control electrode, and the other scanning signal during the next horizontal scanning period controls voltage to be written into the pixel electrode.

3. The driving method for a liquid crystal display panel of claim 1, wherein the liquid crystal display panel is divided into several groups according to pixels on a plurality of scanning lines, and the scanning signals on the plurality of scanning lines allow corresponding potentials to be written into the control electrodes of the pixels simultaneously.

4. A driving method for a liquid crystal display panel, comprising the step of:

applying at least a first scanning signal and a second scanning signal to a pixel on the liquid crystal display panel, wherein there exists a duration during two adjacent horizontal periods or a vertical scanning period at which the first scanning signal and the second scanning signal simultaneously make corresponding voltages to be written into a control electrode and a pixel electrode of the pixel, wherein the first scanning signal and the second scanning signal have the same pulse width;

wherein the pixel on the liquid crystal display panel includes the control electrode, the pixel electrode and only two thin film transistors,

wherein each thin film transistor includes a gate electrode, a first electrode and a second electrode, and the first and second electrodes of one of the two thin film transistors do not connect to the first and second electrodes of another of the two thin film transistors, and

wherein a potential of the control electrode synchronously changes with a polarity of the pixel electrode such that when a polarity of the pixel is positive the driven potential of the control electrode is higher than a potential of the pixel electrode, and when the polarity of the pixel is negative the driven potential of the control electrode is lower than the potential of the pixel electrode.

5. The driving method for a liquid crystal display panel of claim 4, wherein the first scanning signal during a previous horizontal scanning period controls voltage to be written into the control electrode, and the second scanning signal during a next horizontal scanning period controls voltage to be written into the pixel electrode.

6. The driving method for a liquid crystal display panel of claim 5, wherein a coupled voltage is induced on the control electrode due to a potential variation of the pixel electrode during the next horizontal scanning period or the vertical scanning period.

7. The driving method for a liquid crystal display panel of claim 4, wherein the liquid crystal display panel is divided into several groups according to pixels on a plurality of scanning lines, and the scanning signals on the plurality of scanning lines allow corresponding potentials to be written into the control electrodes of the pixels simultaneously.

8. A liquid crystal display panel, comprising:
at least one common electrode;

a plurality of scanning lines for transmitting scanning signals, wherein a pulse of a scanning signal of a scanning line and a pulse of a scanning signal of an adjacent scanning line are active at a same time during a duration in a vertical scanning period, and the scanning signals have a same pulse width;

a plurality of data lines; and

a plurality of pixels respectively formed at intersections of the scanning lines and the data lines, each of the pixels including:

(a) a pixel electrode;

(b) a control electrode; and

(c) thin film transistors including only a first thin film transistor and a second thin film transistor, the first thin film transistor having a gate electrode connected to a scanning line, a first electrode connected to a data line and a second electrode connected to the pixel electrode, and the second thin film transistor having a gate electrode connected to another adjacent scanning line, a first electrode connected to another adjacent data line and a second electrode connected to the control electrode,

wherein the first and second electrodes of the first thin film transistor do not connect to the first and second electrodes of the second thin film transistor, and wherein a potential of the control electrode synchronously changes with a polarity of the pixel electrode such that when a polarity of the pixel is positive the driven potential of the control electrode is higher than a potential of the pixel electrode, and when the polarity of the pixel is negative the driven potential of the control electrode is lower than the potential of the pixel electrode.

9. The liquid crystal display panel of claim 8, wherein the gate electrode of the first thin film transistor of a pixel located in a pixel row is electrically connected to the gate electrode of the second thin film transistor of an adjacent pixel located in an adjacent pixel row.

10. The liquid crystal display panel of claim 8, wherein each of the scanning signals includes a first pulse and a second pulse during a vertical scanning period.

11. The liquid crystal display panel of claim 10, wherein the first pulse and the second pulse are connected.

12. The liquid crystal display panel of claim 10, wherein the first pulse and the second pulse are separate.

13. The liquid crystal display panel of claim 10, wherein the first pulse of two adjacent scanning lines are active at a same time.

14. The liquid crystal display panel of claim 10, wherein the first pulse of a scanning line and the second pulse of an adjacent scanning line are active at a same time.

* * * * *

专利名称(译)	液晶显示面板和液晶显示面板的驱动方法		
公开(公告)号	US8207921	公开(公告)日	2012-06-26
申请号	US11/657640	申请日	2007-01-25
[标]申请(专利权)人(译)	LEE SEOK大号 SHIH PO小号		
申请(专利权)人(译)	LEE SEOK大号 SHIH PO小号		
当前申请(专利权)人(译)	瀚宇彩晶股份有限公司		
[标]发明人	LEE SEOK LYUL SHIH PO SHENG		
发明人	LEE, SEOK LYUL SHIH, PO SHENG		
IPC分类号	G09G3/36 G02F1/136		
CPC分类号	G09G3/3614 G09G3/3655 G09G3/3659 G09G2300/0809 G09G2300/0876 G09G2320/0223		
优先权	092128619 2003-10-15 TW		
其他公开文献	US20070120798A1		
外部链接	Espacenet USPTO		

摘要(译)

将一对扫描信号施加到液晶显示板上的像素。扫描信号允许在两个相邻的水平扫描周期或垂直扫描周期期间将电压分别写入控制电极和像素电极，并且由于像素电极在图像电极期间的电位变化而在控制电极上感应出耦合电压。下一个水平扫描期。

