



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0098934 A1**

Lee et al.

(43) **Pub. Date: May 29, 2003**

(54) **LIQUID CRYSTAL DISPLAY PANEL HAVING REDUCED FLICKER**

(30) **Foreign Application Priority Data**

(76) Inventors: **Hsin-Ta Lee**, Tainan County (TW);
Yuan-Liang Wu, Tainan County (TW);
Cheng-I Wu, Tainan County (TW);
Wen-Chieh Lin, Tainan County (TW)

Nov. 23, 2001 (TW)..... 090129131

Publication Classification

(51) **Int. Cl.⁷** **G02F 1/1343**

(52) **U.S. Cl.** **349/39**

Correspondence Address:
**NAIPO (NORTH AMERICA
INTERNATIONAL PATENT OFFICE)
P.O. BOX 506
MERRIFIELD, VA 22116 (US)**

(57) **ABSTRACT**


(21) Appl. No.: **10/064,777**

A liquid crystal display panel includes an upper substrate, a lower substrate, and a plurality of pixels located between the upper substrate and the lower substrate. Each of the pixels has at least a compensating capacitor for providing an approximately identical feed-through voltage for each of the pixels, thus reducing a flicker effect of the liquid crystal display device.

(22) Filed: **Aug. 16, 2002**

Related U.S. Application Data

(63) Continuation-in-part of application No. 10/064,049, filed on Jun. 4, 2002.

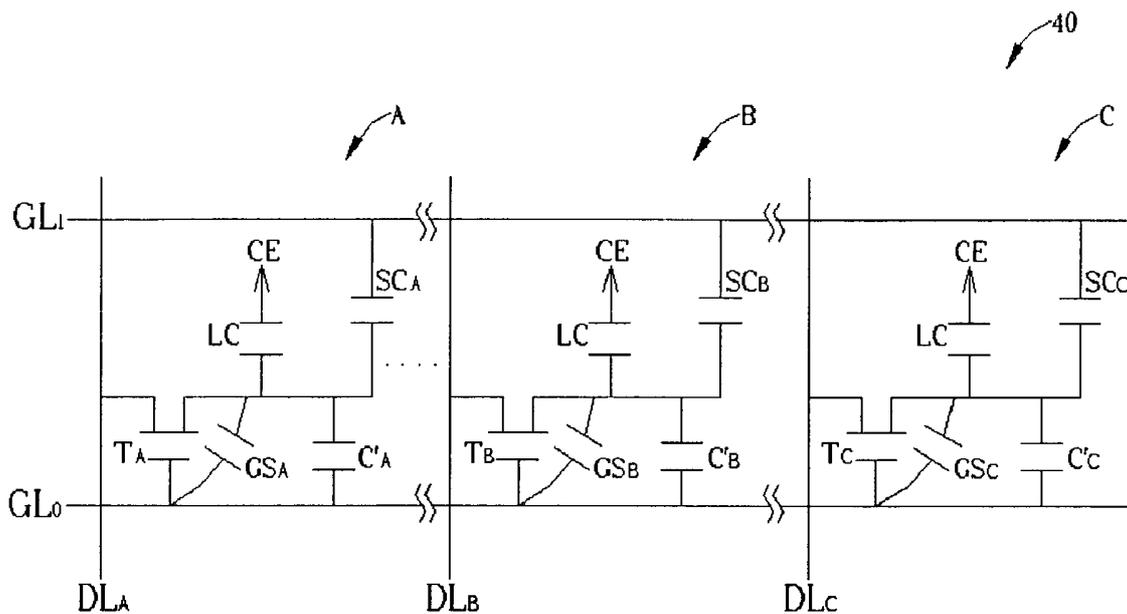

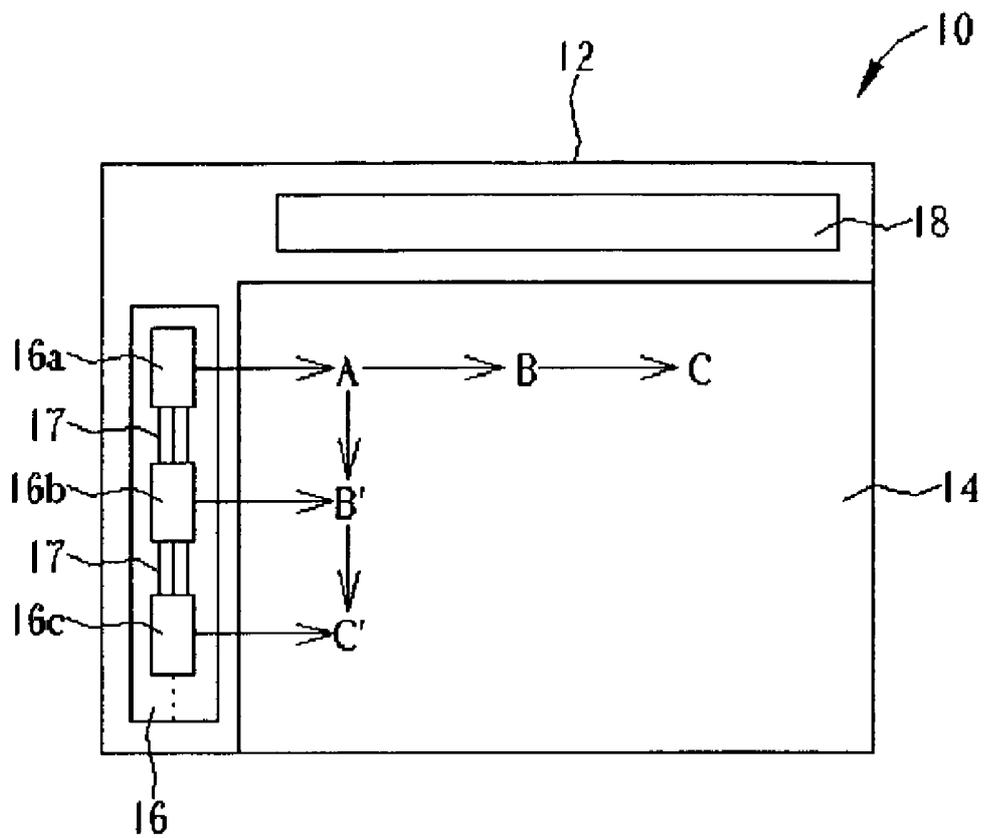


Fig. 1 Prior art

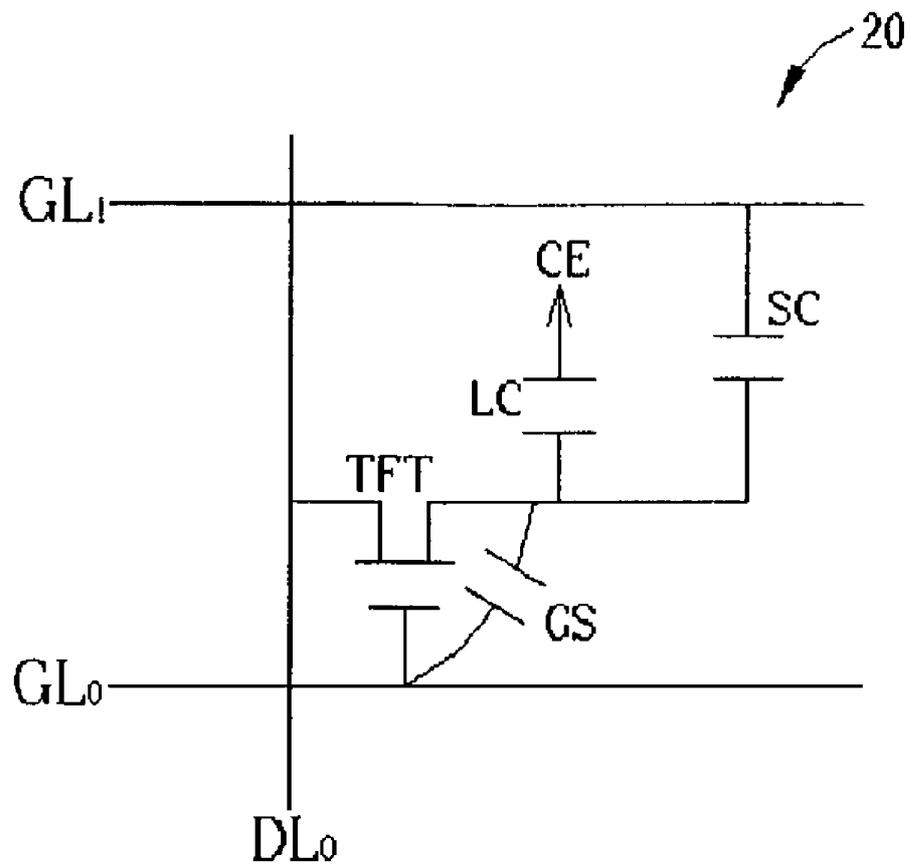


Fig. 2 Prior art

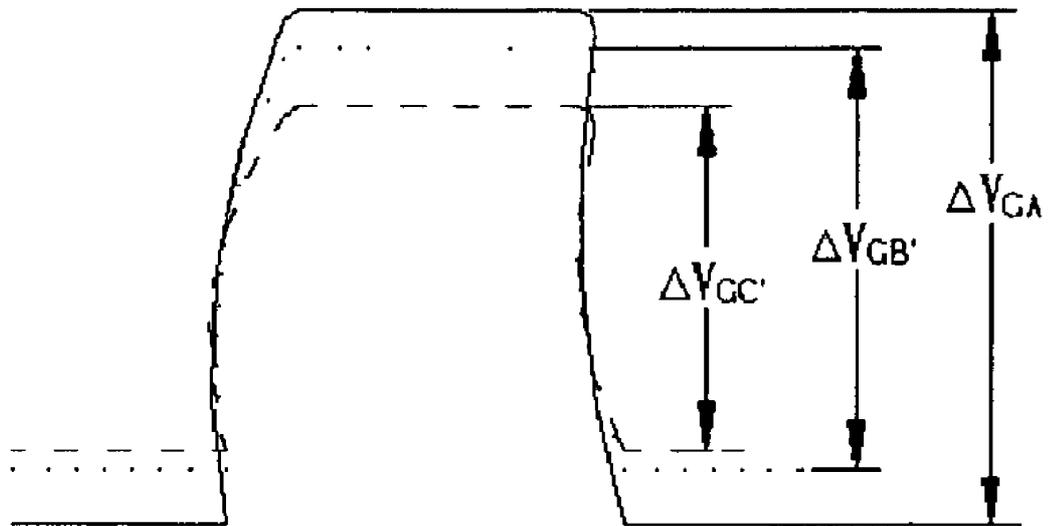


Fig. 3 Prior art

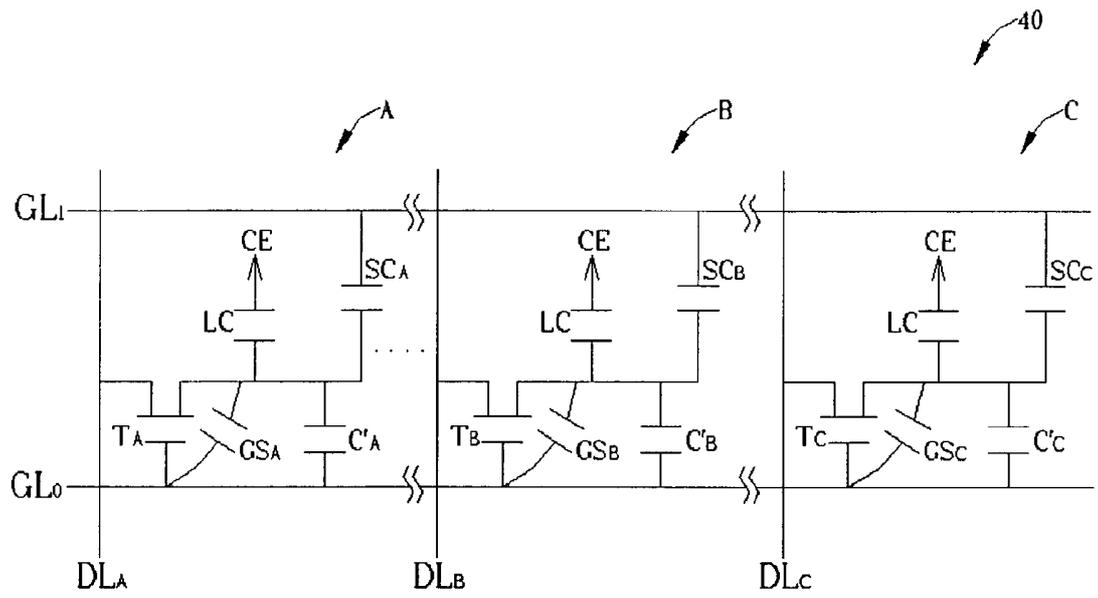


Fig. 4

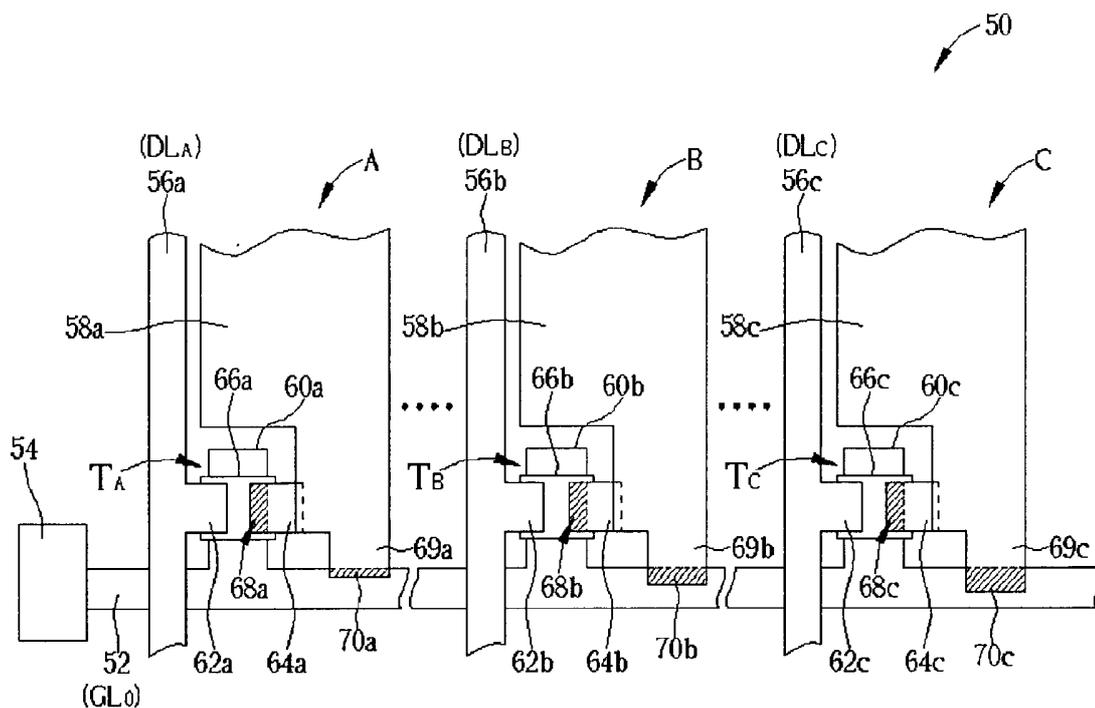


Fig. 5A

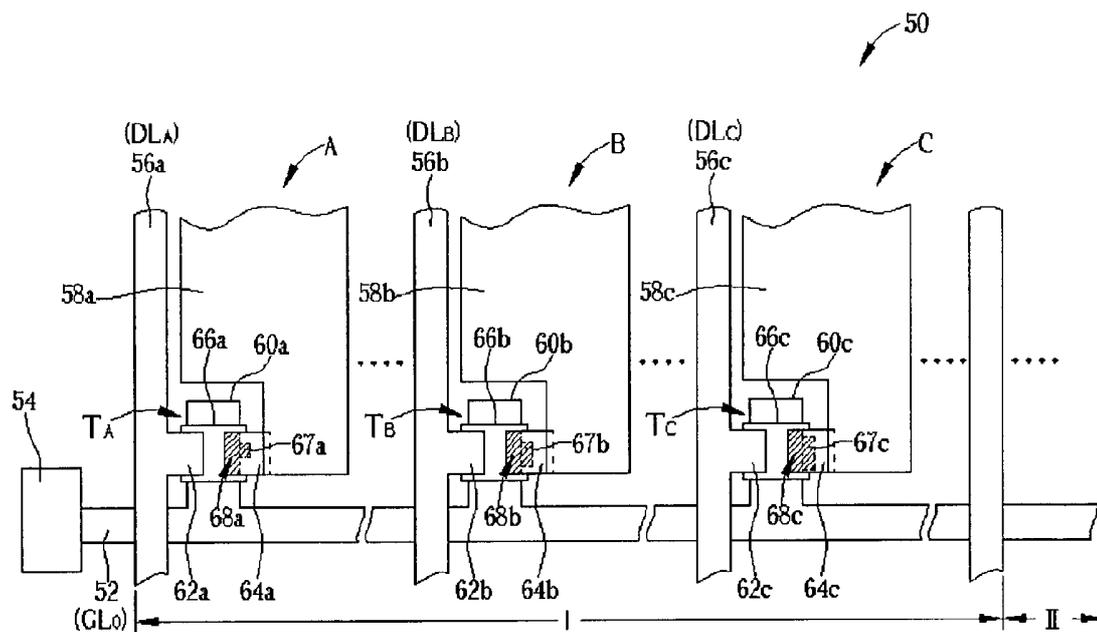


Fig. 6

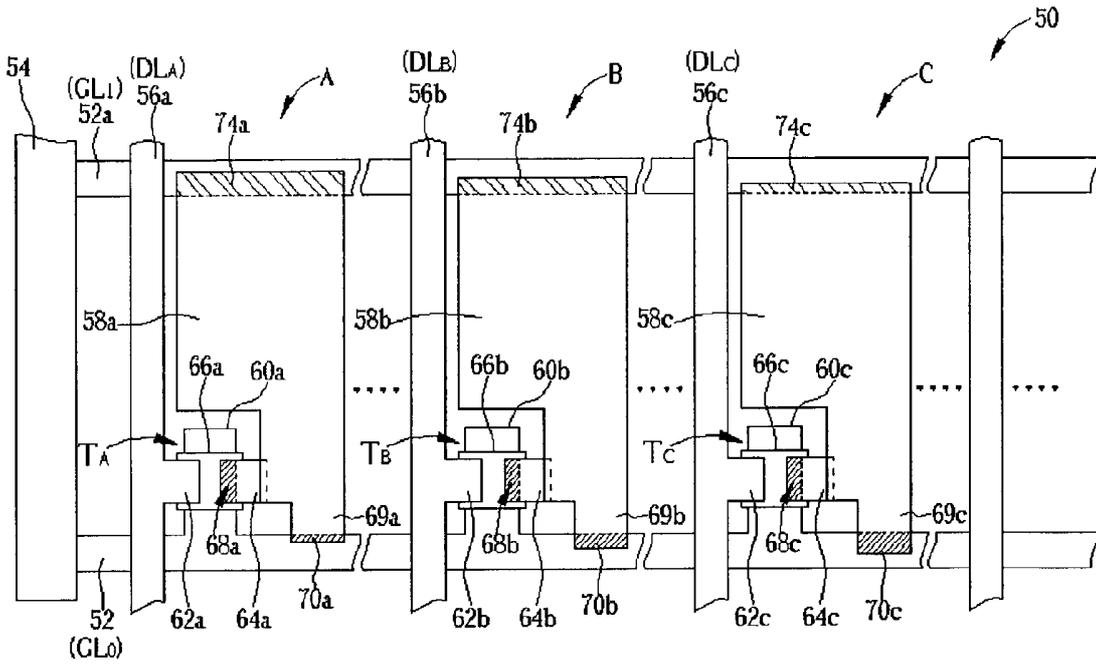


Fig. 7

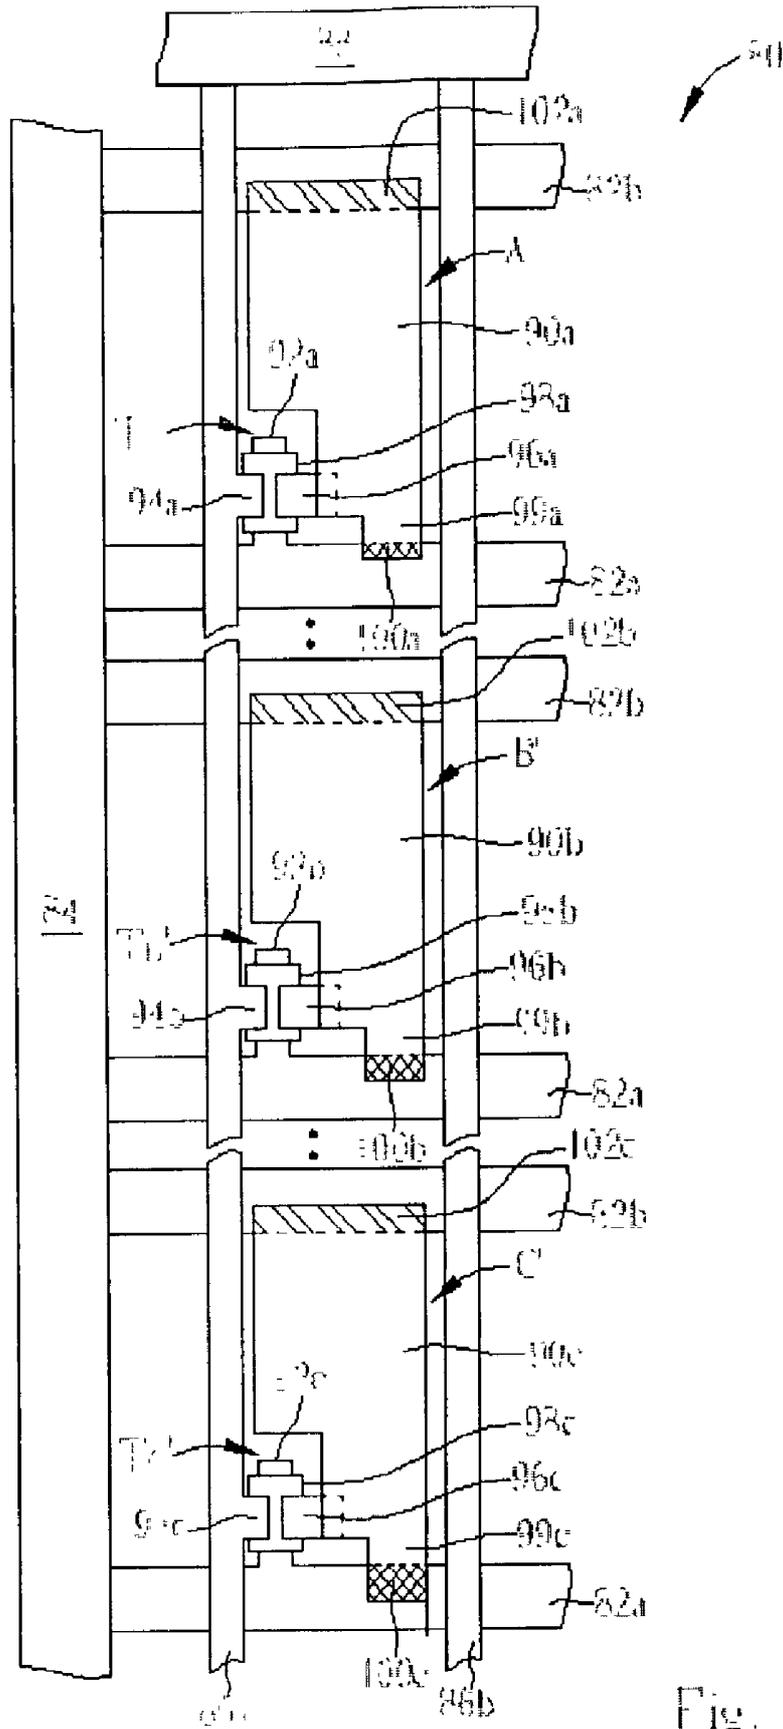


Fig. 3

LIQUID CRYSTAL DISPLAY PANEL HAVING REDUCED FLICKER

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This is a continuation-in-part of U.S. application Ser. No. 10/064,049, filed Jun. 4, 2002, and which is included herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD) panel, and more particularly, to a liquid crystal display panel with low flicker.

[0004] 2. Description of the Prior Art

[0005] A thin film transistor display, such as a thin film transistor liquid crystal display (TFT-LCD), utilizes many thin film transistors, in conjunction with other elements such as capacitors and bonding pads, arranged in a matrix as switches for driving liquid crystal molecules to produce brilliant images. The advantages of the TFT-LCD over a conventional CRT monitor include better portability, lower power consumption, and lower radiation. Therefore, the TFT-LCD is widely used in various portable products, such as notebooks, personal data assistants (PDA), electronic toys, etc.

[0006] Please refer to FIG. 1 and FIG. 2. FIG. 1 is a schematic diagram of a prior art TFT-LCD. FIG. 2 is an equivalent circuit diagram of the TFT-LCD. The TFT-LCD 10 comprises a lower substrate 12. The lower substrate 12 comprises a pixel array 14, a scanning line driving circuit 16, and a data line driving circuit 18. The pixel array 14 includes a plurality of scanning lines (not shown) and a plurality of data lines (not shown). A plurality of pixels (ex. pixels A, B, C, B", and C") is therefore defined by the scanning lines and the data lines. The pixel A, B, and C are located on the same scanning line, while the pixel A, B" and C" are located on the same data line.

[0007] As shown in FIG. 1, the scanning line driving circuit 16 comprises a plurality of driver IC chips (such as chips 16a, 16b, and 16c), which are directly formed on the lower substrate 12 by utilizing chip-on-glass (COG) technology. Additionally, the driver IC chips are connected to each other by several bus lines 17, which is the so-called wiring on array (WOA) technology.

[0008] As shown in FIG. 2, a pixel 20 comprises a liquid crystal cell (LC) and a thin film transistor (TFT). The liquid crystal cell (LC) is made of a pixel electrode, a common counter electrode (CE), and a liquid crystal layer inserted there between. The thin film transistor (TFT) comprises a gate electrode connected to a scanning line GL_0 , a drain electrode connected to a data line DL_0 , and a source electrode connected to a pixel electrode of the liquid crystal cell. A parasitic capacitor (GS) is produced since the gate electrode and the source electrode of the thin film transistor (TFT) forms an overlapping region. Additionally, the pixel 20 contains a storage capacitor (SC) connected between the liquid crystal cell and a scanning line GL_1 . The storage capacitor is used to reduce the voltage variation of the liquid

crystal cell due to current leakage and thus help the liquid crystal cell store electric charges.

[0009] As shown in FIG. 2, the light passing through the pixels varies with the voltage applied to the liquid crystal cell. By changing the voltage to the liquid crystal cell, the amount of light passing through each pixel can be changed and thus the TFT-LCD can display predetermined images. The voltage applied to the liquid crystal cell is the difference between the voltage of the common counter electrode and the voltage of the pixel electrode. When the thin film transistor is turned off, the pixel electrode has a floating status. If any fluctuations occur in the voltages of electric elements around the pixel electrode, the fluctuations will cause the voltage of the pixel electrode to deviate from its desirable voltage. The deviation of the voltage of the pixel electrode referred to feed-through voltage (V_{FD}), which is represented by:

$$V_{FD} = [C_{GS} / (C_{LC} + C_{SC} + C_{GS})] * \Delta V_G \quad (1)$$

[0010] where C_{LC} is the capacitance of the liquid crystal cell (LC), C_{SC} is the capacitance of the storage capacitor (SC), C_{GS} is the capacitance between the source electrode and the gate electrode of the thin film transistor, and ΔV_G is the amplitude of a pulse voltage applied to the gate electrode.

[0011] In general, adjusting the voltage of the common counter electrode can compensate for the feed-through voltage. However, because the resistance and the capacitance of the scanning line round the falling edge of a pulse voltage applied to the gate electrode, a feed-through voltage of a pixel decreases as the distance between the scanning line driving circuit and the pixel increases. For example, as shown in FIG. 1, feed-through voltage of the pixel A is larger than that of the pixel B, whose feed-through voltage is larger than that of the pixel C (that is, $(V_{FD})_A > (V_{FD})_B > (V_{FD})_C$ where $(V_{FD})_A$, $(V_{FD})_B$, and $(V_{FD})_C$ represent feed-through voltages of the pixels A, B, C, respectively). Accordingly, it is difficult to compensate feed-through voltages for all pixels by adjusting the voltage of the common counter electrode. Therefore, it is hard to provide a TFT-LCD without flicker.

[0012] Furthermore, the resistances of the bus lines are so large that as a pulse voltage is input into the driver IC chips from the bus lines 17, the input voltages of the driver IC chips are different from one another, which leads to different waveforms of output voltages output from the driver IC chips. For example, as shown in FIG. 3, the waveforms of the output voltages output from the chips 16a, 16b, and 16c are quite different. The voltage difference (ΔV_{GA}) output from the chip 16a is larger than the voltage difference (ΔV_{GB}) output from the chip 16b, which is larger than the voltage difference (ΔV_{GC}) output from the chip 16c. Therefore, a feed-through voltage of a pixel will decrease as the distance between the data line driving circuit and the pixel increases. That is, as shown in FIG. 1, feed-through voltage of the pixel A is larger than that of the pixel B", whose feed-through voltage is larger than that of the pixel C" (that is, $(V_{FD})_A > (V_{FD})_B > (V_{FD})_C$), which make flicker that reduces display quality of an LCD panel.

SUMMARY OF THE INVENTION

[0013] It is therefore an objective of the invention to provide a liquid crystal display panel with reduced flicker for solving the above-mentioned problems.

[0014] According to the invention, a liquid crystal display panel comprises an upper substrate, a lower substrate, and a plurality of pixels located between the upper substrate and the lower substrate. Each of the pixels has at least a compensating capacitor for providing an approximately identical feed-through voltage for each of the pixels, thus reducing a flicker effect of the liquid crystal display device.

[0015] It is an advantage that the invention introduces a compensating capacitor, formed by lapping a pixel electrode over a corresponding scanning line, into a pixel. By adjusting the capacitances of the compensating capacitors of the pixels, the feed-through voltages of the pixels are approximately equal, thus reducing a flicker effect of an LCD panel and further improving display quality of an LCD panel.

[0016] These and other objectives of the present invention will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the preferred embodiment, which is illustrated in the multiple figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] FIG. 1 is a schematic diagram of a prior art TFT-LCD.

[0018] FIG. 2 is an equivalent circuit diagram of the TFT-LCD shown in FIG. 1.

[0019] FIG. 3 illustrates waveforms of output voltages output from driver IC chips.

[0020] FIG. 4 is an equivalent circuit diagram according to the present invention.

[0021] FIG. 5(A) and FIG. 5(B) are top views of a pixel array of an LCD panel according to the first embodiment of the present invention.

[0022] FIG. 6 is a top view of a pixel array of an LCD panel according to the second embodiment of the present invention.

[0023] FIG. 7 is a top view of a pixel array of an LCD panel according to the third embodiment of the present invention.

[0024] FIG. 8 is a top view of a pixel array of an LCD panel according to the fourth embodiment of the present invention.

DETAILED DESCRIPTION

[0025] Please refer to FIG. 4. FIG. 4 is an equivalent circuit diagram according to the present invention. As shown in FIG. 4, the equivalent circuit 40 comprises at least pixels A, B, and C, which respectively correspond to pixels A, B, and C shown in FIG. 1. Pixel A comprises a liquid crystal cell LC and a thin film transistor T_A . The liquid crystal cell LC is composed of a pixel electrode, a common counter electrode, and a liquid crystal layer there between, and therefore, the liquid crystal cell LC can be regarded as a liquid crystal capacitor. The thin film transistor T_A includes a gate electrode connected to a scanning line GL_0 , a drain electrode connected to a data line DL_0 , and a source electrode connected to the pixel electrode of the liquid crystal cell LC. In addition, a parasitic capacitor GS_A is thus produced when the gate electrode overlaps the source electrode of the thin film transistor T_A . Furthermore, pixel A

further comprises a compensating capacitor C_A connected between the pixel electrode of the liquid crystal cell LC and the scanning line GL_0 , that is, compensating capacitor C_A is connected to the scanning line GL_0 and either the source electrode of TFT or the pixel electrode, and a storage capacitor SC_A connected between the pixel electrode of the liquid crystal cell LC and the scanning line GL_1 .

[0026] Similarly, the pixel B comprises at least a liquid crystal cell LC, a thin film transistor T_B , a storage capacitor SC_B , a compensating capacitor C_B , and additionally, a parasitic capacitor GS_B is generated due to an overlapping region of a gate electrode and a source electrode of the thin film transistor T_B . The pixel C comprises at least a liquid crystal cell LC, a thin film transistor T_C , a storage capacitor SC_C , and a compensating capacitor C_C . In addition, a parasitic capacitor GS_C is formed when a gate electrode overlaps a source electrode of the thin film transistor T_C .

[0027] As shown in FIG. 4, the compensating capacitors C_A , C_B , and C_C are respectively connected to the parasitic capacitors GS_A , GS_B , and GS_C in parallel. Therefore, equation (1) can be rewritten as follows:

$$V_{FD} = [(C_{GS} + C) / (C_{LC} + C_{SC} + C_{GS} + C)] * \Delta V_G \quad (2)$$

[0028] In equation (2), C represents the capacitance of the compensating capacitor C". Referring to equations (1) and (2), in general, both C_{SC} and C_{LC} are much larger than C_{GS} and C (i.e. $C_{SC}, C_{LC} \gg C_{GS}, C$). Therefore, equation (2) can be rewritten as follows:

$$V_{FD} = [C_{GS} + C / (C_{LC} + C_{SC})] * \Delta V_G \quad (3)$$

[0029] Referring to FIG. 4 and equation (3). Due to the resistance and the capacitance of the scanning line GL_0 , if $(C_{GS})_A = (C_{GS})_B = (C_{GS})_C$, $(C_{SC})_A = (C_{SC})_B = (C_{SC})_C$, $(C_{LC})_A = (C_{LC})_B = (C_{LC})_C$, and $C_A = C_B = C_C$, the feed-through voltages of pixels A, B, C is $(V_{FD})_A > (V_{FD})_B > (V_{FD})_C$, which leads to a flicker effect of the LCD panel. As described above, the feed-through voltages of pixels A, B, C has to be $(V_{FD})_A \approx (V_{FD})_B \approx (V_{FD})_C$ in order to reduce the flicker effect of the LCD panel. According to equation (3), adjusting the capacitance of the compensating capacitor C", the parasitic capacitor GS, or the storage capacitor SC can be tried to achieve approximately equal feed-through voltages of pixels A, B, C. The methods for adjusting the capacitance of the compensating capacitor C", the parasitic capacitor GS, or the storage capacitor SC are described as follows:

[0030] (1) If $C_A < C_B < C_C$, $(C_{GS})_A = (C_{GS})_B = (C_{GS})_C$, $(C_{SC})_A = (C_{SC})_B = (C_{SC})_C$, and $(C_{LC})_A = (C_{LC})_B = (C_{LC})_C$, then the feed-through voltages of pixels A, B, C is $(V_{FD})_A \approx (V_{FD})_B \approx (V_{FD})_C$. That is, the feed-through voltages of pixels A, B, C, are approximately equal as long as the condition $C_A < C_B < C_C$ is achieved. Accordingly, each of the pixels will have an approximately identical feed-through voltage, while the capacitance of the compensating capacitor C" increases as the distance between the input end of the scanning line and the pixel increases.

[0031] (2) If $(C_{GS})_A < (C_{GS})_B < (C_{GS})_C$, $C_A = C_B = C_C$, $(C_{SC})_A = (C_{SC})_B = (C_{SC})_C$, and $(C_{LC})_A = (C_{LC})_B = (C_{LC})_C$, then the feed-through voltages of pixels A, B, C is $(V_{FD})_A \approx (V_{FD})_B \approx (V_{FD})_C$. That is, the feed-through voltages of pixels A, B, C, are approximately equal as long as the condition $(C_{GS})_A < (C_{GS})_B < (C_{GS})_C$ is achieved. As a result, while the capacitance of the parasitic capacitor GC increases as the distance between the input end of the scanning line

and the pixel increases, each of the pixels will have approximately the same feed-through voltage.

[0032] (3) If $(C_{SC})_A > (C_{SC})_B > (C_{SC})_C$, $C_A = C_B = C_C$, $(C_{GS})_A = (C_{GS})_B = (C_{GS})_C$, and $(C_{LC})_A = (C_{LC})_B = (C_{LC})_C$, then the feed-through voltages of pixels A, B, C is $(V_{FD})_A \approx (V_{FD})_B \approx (V_{FD})_C$. That is, the feed-through voltages of pixels A, B, C, are approximately equal as long as the condition $(C_{SC})_A > (C_{SC})_B > (C_{SC})_C$ is achieved. As a result, while the capacitance of the storage capacitor SC decreases as the distance between the input end of the scanning line and the pixel increases, each of the pixels will have approximately the same feed-through voltage.

[0033] Moreover, the above-mentioned methods (1), (2), and (3) can be combined with one another to achieve approximately equal feed-through voltages of pixels A, B, C. The following description describes various embodiments of the present invention according to the above-mentioned methods (1), (2), and (3).

[0034] Please refer to FIG. 5(A) and FIG. 5(B). FIG. 5(A) and FIG. 5(B) are top views of a pixel array of an LCD panel according to the first embodiment of the present invention. Moreover, the first embodiment of the present invention is implemented according to the above-mentioned method (1). As shown in FIG. 5(A), a pixel array 50 comprises at least a scanning line 52 electrically connected to a scanning line driving circuit 54, and data lines 56a, 56b, 56c, which are electrically connected to a data line driving circuit (not shown). Additionally, the pixel array 50 further comprises pixels A, B, and C, which respectively include thin film transistors T_A , T_B , T_C and corresponding liquid crystal cells (not shown). The gate electrodes 60a, 60b, 60c of thin film transistors T_A , T_B , T_C are connected to the scanning line 52. The drain electrodes 62a, 62b, 62c of the thin film transistors T_A , T_B , T_C are respectively connected to the data lines 56a, 56b, 56c. The source electrodes 64a, 64b, 64c of thin film transistors T_A , T_B , T_C are connected to pixel electrodes 58a, 58b, 58c of the liquid crystal cells separately. Furthermore, semi-conductive layers 66a, 66b, 66c are respectively disposed between the gate electrodes and the source, the drain electrodes.

[0035] As shown in FIG. 5(A), the pixels A, B, C further comprise overlapping regions 68a, 68b, and 68c. The overlapping region 68a is formed by lapping the source electrode 64a over the gate electrode 60a, a portion of the scanning line 52. Equally, the overlapping regions 68b, 68c are respectively formed by lapping the source electrodes 64b, 64c over the gate electrodes 60b, 60c, a portion of the scanning line 52. In addition, the pixels A, B, C further comprise overlapping regions 70a, 70b, and 70c. The pixel electrodes 58a, 58b, 58c include extension portions 69a, 69b, 69c respectively. The overlapping region 70a is formed by lapping the extension portion 69a over the scanning line 52. Similarly, the overlapping regions 70b, 70c are respectively formed by lapping the extension portions 69b, 69c over the scanning line 52. The area of the overlapping region 70a is smaller than that of the overlapping region 70b, whose area is smaller than that of the overlapping region 70c.

[0036] In the first embodiment, the overlapping regions 68a, 68b, and 68c respectively correspond to the parasitic capacitors GS_A , GS_B , and GS_C shown in FIG. 4, while the overlapping regions 70a, 70b, and 70c respectively corre-

spond to the compensating capacitors C_A , C_B , and C_C shown in FIG. 4. Since the areas of the overlapping regions 70a, 70b, and 70c are increased sequentially, the capacitance of the compensating capacitor C_A is smaller than the capacitance of the compensating capacitor C_B , whose capacitance is smaller than that of the compensating capacitor C_C (i.e. $C_A < C_B < C_C$). Thus, feed-through voltages of pixels A, B, C, are approximately equal (i.e. $(V_{FD})_A \approx (V_{FD})_B \approx (V_{FD})_C$). Additionally, the shapes of the overlapping regions 70a, 70b, and 70c are not necessarily rectangular. They can be any shape as long as the area of the overlapping region 70a is smaller than that of the overlapping region 70b, whose area is smaller than that of the overlapping region 70c. Moreover, owing to large space existing between the pixel electrodes and the scanning line, the first embodiment of the present invention can be applied to a large-scaled liquid crystal display panel.

[0037] In addition, the first embodiment of the present invention can be carried out in an alternative way, which is shown in FIG. 5(B). As shown in the pixel array 50 of FIG. 5(B), the scanning line 52 comprises extension portions 71a, 71b, and 71c, which are respectively positioned below the pixel electrodes 58a, 58b, and 58c. Therefore, overlapping regions 72a, 72b, and 72c are formed, and furthermore, the area of the overlapping region 72a is smaller than that of the overlapping region 72b, whose area is smaller than that of the overlapping region 72c.

[0038] Referring to FIG. 5(B) and FIG. 4, the overlapping regions 68a, 68b, and 68c respectively correspond to the parasitic capacitors GS_A , GS_B , and GS_C , while the overlapping regions 72a, 72b, and 72c respectively correspond to the compensating capacitors C_A , C_B , and C_C . Since the areas of the overlapping regions 72a, 72b, and 72c are increased sequentially, the capacitance of the compensating capacitor C_A is smaller than the capacitance of the compensating capacitor C_B , whose capacitance is smaller than that of the compensating capacitor C_C (i.e. $C_A < C_B < C_C$). Thus, feed-through voltages of pixels A, B, C, are approximately equal.

[0039] As shown in FIG. 5(B), for regulating an alignment direction of liquid crystal molecules, protrusion structures 73a, 73b, and 73c are formed on the pixel electrodes 58a, 58b, and 58c, and are positioned over the extension portions 71a, 71b, and 71c. The protrusion structures 73a, 73b, and 73c can prevent the extension portions 71a, 71b, and 71c of the scanning line 52 from disturbing the alignment direction of liquid crystal molecules. In general, the protrusion structures 73a, 73b, and 73c are made of photoresist materials, for example. Moreover, the protrusion structures 73a, 73b, and 73c can be formed over a common electrode on an upper substrate (not shown), which is positioned parallel to a lower substrate (not shown) where the pixel array 50 is positioned.

[0040] Please refer to FIG. 6. FIG. 6 is a top view of a pixel array of an LCD panel according to the second embodiment of the present invention. Furthermore, the second embodiment of the present invention is implemented according to the above-mentioned methods (1) and (2). As shown in FIG. 6, the pixel array 50 is at least divided into a I and a part II. The pixels A, B, and C are located within the part I. The gate electrodes 60a, 60b, 60c of the thin film transistors T_A , T_B , T_C further comprise blocks 67a, 67b, 67c, which are located within the overlapping regions 68a, 68b,

68c. The area of the block **67a** is smaller than that of the block **67b**, whose area is smaller than that of the block **67c**. Thus, the area of the overlapping region **68a** is smaller than that of the overlapping region **68b**, whose area is smaller than that of the overlapping region **68c**.

[0041] Referring to **FIG. 6** and **FIG. 4**, the overlapping regions **68a**, **68b**, and **68c** respectively correspond to the parasitic capacitors GS_A , GS_B , and GS_C . Since the areas of the overlapping regions **68a**, **68b**, and **68c** are increased sequentially, the capacitance of the parasitic capacitor GS_A is smaller than the capacitance of the parasitic capacitor GS_B , whose capacitance is smaller than that of the parasitic capacitor GS_C (i.e. $(C_{GS})_A < (C_{GS})_B < (C_{GS})_C$). Thus, feed-through voltages of pixels A, B, C, are approximately equal (i.e. $(V_{FD})_A \approx (V_{FD})_B \approx (V_{FD})_C$). In brief, the second embodiment utilizes adjusting the capacitances of the parasitic capacitors GS of the pixels to achieve approximately equal feed-through voltages of the pixels within the part I of the pixel array **50**.

[0042] In addition, adjusting only the capacitances of the parasitic capacitors GS of the pixels is not suitable for a large-scaled LCD panel, because of restrictions on the sizes of both the gate electrodes and the source electrodes. As a result, in the second embodiment of the present invention, the pixel array **50** further comprises a part II, and moreover, the pixels within the part II utilize adjusting the capacitances of the compensating capacitors C" of the pixels to achieve approximately equal feed-through voltages. The structures of the pixels within the part II can be designed by referring to the first embodiment of the present invention, and will not be described again.

[0043] Please refer to **FIG. 7**. **FIG. 7** is a top view of a pixel array of an LCD panel according to the third embodiment of the present invention. Furthermore, the third embodiment of the present invention is implemented according to the above-mentioned methods (1) and (3). As shown in **FIG. 7**, the pixels A, B, C comprise overlapping regions **70a**, **70b**, and **70c**. The pixel electrodes **58a**, **58b**, **58c** include extension portions **69a**, **69b**, **69c** respectively. The overlapping region **70a**, **70b**, **70c** are respectively formed by lapping the extension portions **69a**, **69b**, **69c** over the scanning line **52**. The area of the overlapping region **70a** is smaller than that of the overlapping region **70b**, whose area is smaller than that of the overlapping region **70c**. In addition, the pixels A, B, and C further comprise overlapping regions **74a**, **74b**, and **74c** respectively. The overlapping regions **74a**, **74b**, **74c** are separately formed by lapping the pixel electrodes **58a**, **58b**, **58c** over the scan line **52a**. Moreover, the area of the overlapping region **74a** is larger than that of the overlapping region **74b**, whose area is larger than that of the overlapping region **74c**.

[0044] Referring to **FIG. 7** and **FIG. 4**, the overlapping regions **74a**, **74b**, and **74c** respectively correspond to the storage capacitors SC_A , SC_B , and SC_C , while the overlapping regions **70a**, **70b**, and **70c** respectively correspond to the compensating capacitors C_A , C_B , and C_C . Since the areas of the overlapping regions **70a**, **70b**, and **70c** are increased gradually, the capacitances of the compensating capacitor C_A , C_B , and C_C are increased sequentially (i.e. $C_A < C_B < C_C$). Moreover, the areas of the overlapping regions **74a**, **74b**, and **74c** are decreased gradually, so that the capacitances of the storage capacitors SC_A , SC_B , and SC_C are therefore

decreased sequentially (i.e. $(C_{SC})_A > (C_{SC})_B > (C_{SC})_C$). Thus, feed-through voltages of pixels A, B, C, can be approximately equal (i.e. $(V_{FD})_A \approx (V_{FD})_B \approx (V_{FD})_C$).

[0045] In addition, the capacitance of a storage capacitor SC cannot be reduced without limitation, because as the storage capacitor SC gets farther from the scanning line driving circuit **54**, its capacitance becomes smaller. As a result, it is hard for such a storage capacitor with low capacitance to help the liquid crystal cells hold electric charges. Therefore, as the capacitance of the storage capacitor SC cannot be further reduced, the third embodiment of the present invention will only adjust the capacitances of the compensating capacitors C" of the pixels to achieve approximately equal feed-through voltages. Accordingly, the third embodiment of the present invention can not only provide an identical feed-through voltage for each of the pixels, but also prevent a storage capacitor from losing its ability to hold electric charges of the liquid crystal cells.

[0046] Please refer to **FIG. 8**. **FIG. 8** is a top view of a pixel array of an LCD panel according to the fourth embodiment of the present invention. Moreover, the fourth embodiment of the present invention is implemented according to the above-mentioned method (1). As shown in **FIG. 8**, a pixel array **80** comprises at least a plurality of scanning lines **82a** and **82b** electrically connected to a scanning line driving circuit **84**, and data lines **86a**, **86b** electrically connected to a data line driving circuit **88**. Additionally, the pixel array **80** further comprises pixels A, B", and C", which correspond to the pixels A, B", and C" of **FIG. 1**. The pixels A, B", and C" comprise thin film transistors T_A , T_B , T_C and corresponding liquid crystal cells (not shown). The gate electrodes **92a**, **92b**, **92c** of thin film transistors T_A , T_B , T_C are connected to the scanning lines **82a**. The drain electrodes **94a**, **94b**, **94c** of the thin film transistors T_A , T_B , T_C are respectively connected to the data line **86a**. The source electrodes **96a**, **96b**, **96c** of thin film transistors T_A , T_B , T_C are connected to pixel electrodes **90a**, **90b**, **90c** of the liquid crystal cells respectively. Furthermore, semi-conductive layers **98a**, **98b**, **98c** are separately disposed between the gate electrodes and the source, the drain electrodes.

[0047] In addition, as shown in **FIG. 8**, the pixel electrodes **90a**, **90b**, and **90c** include extension portions **99a**, **99b**, and **99c**. Thus, overlapping region **100a**, **100b**, and **100c** are formed in the pixels A, B", and C". The overlapping region **100a** is formed by lapping the extension portion **99a** over the scanning line **82a**. Similarly, the overlapping regions **100b**, **100c** are respectively formed by lapping the extension portions **99b**, **99c** over the scanning lines **82a**. The area of the overlapping region **100a** is smaller than that of the overlapping region **100b**, whose area is smaller than that of the overlapping region **100c**. Additionally, the pixel electrodes **90a**, **90b**, and **90c** are lapped over the scanning lines **82b** to form overlapping regions **102a**, **102b**, and **102c**, which form the storage capacitors of the pixels A, B", and C".

[0048] In the fourth embodiment, the overlapping regions **100a**, **100b**, and **100c** respectively correspond to the compensating capacitors C_A , C_B , and C_C (not shown). Since the areas of the overlapping regions **100a**, **100b**, and **100c** are increased sequentially, the capacitance of the compensating capacitor C_A is smaller than the capacitance of the compensating capacitor C_B , whose capacitance is smaller than that

of the compensating capacitor CC (i.e. $C_A < C_B < C_C$). Thus, feed-through voltages of pixels A, B, C, are approximately equal (that is, $(V_{FD})_A \approx (V_{FD})_B \approx (V_{FD})_C$).

[0049] Alternatively, the overlapping regions 100a, 100b, and 100c can be formed by extending the scanning lines 82a under the pixel electrodes 90a, 90b, and 90c, which can reach the same purpose as the fourth embodiment of the present invention.

[0050] The present invention introduces a compensating capacitor, formed by lapping a pixel electrode over a corresponding scanning line, into a pixel. By adjusting the capacitances of the compensating capacitors of the pixels, the feed-through voltages of the pixels are approximately equal, thus reducing a flicker effect of an LCD panel and further improving display quality of an LCD panel.

[0051] Those skilled in the art will readily observe that numerous modifications and alterations of the device may be made while retaining the teachings of the invention. Accordingly, the above disclosure should be construed as limited only by the metes and bound of the appended claims.

What is claimed is:

1. A liquid crystal display panel comprising an upper substrate, a lower substrate, and a plurality of pixels located between the upper substrate and the lower substrate, each of the pixels having at least a compensating capacitor for providing an approximately identical feed-through voltage for each of the pixels.

2. The liquid crystal display panel of claim 1 further comprising a first scanning line, a second scanning line, and a scanning line driving circuit, each of the pixels being located between the first scanning line and the second scanning line, each of the first scanning line and the second scanning line having a first input end so that the scanning line driving circuit can input signals into the first scanning line and the second scanning line through the first input ends.

3. The liquid crystal display panel of claim 2 wherein a capacitance of each of the compensating capacitors is increased when a distance between the pixels and the first input end of the second scanning line is increased.

4. The liquid crystal display panel of claim 3 wherein each of the pixels further comprises:

a liquid crystal cell having a common electrode, a pixel electrode connected to the corresponding compensating capacitor, and a liquid crystal layer disposed between the pixel electrode and the common electrode; and

a thin film transistor having a gate electrode connected to the first scanning line, a drain electrode connected to a corresponding first data line, and a source electrode connected to the pixel electrode.

5. The liquid crystal display panel of claim 4 wherein each of the compensating capacitors is composed of a first overlapping region, which is formed by overlapping the corresponding pixel electrode over the first scanning line.

6. The liquid crystal display panel of claim 5 wherein an area of each of the first overlapping regions is increased as a distance between the first input end of the first scanning line and the pixel corresponding to each of the first overlapping regions is increased.

7. The liquid crystal display panel of claim 4 wherein each of the compensating capacitors is composed of a second

overlapping region, which is formed by overlapping the corresponding source electrode over the corresponding gate electrode.

8. The liquid crystal display panel of claim 7 wherein an area of each of the second overlapping regions is increased as a distance between the first input end of the first scanning line and the pixel corresponding to each of the second overlapping regions is increased.

9. The liquid crystal display panel of claim 7 wherein each of the pixels further comprises a storage capacitor, and a capacitance of each of the storage capacitors is reduced as a distance between each of the storage capacitors and the first input end of the second scanning line is increased.

10. The liquid crystal display panel of claim 1 further comprising a second data line and a data line driving circuit, each of the pixels being connected to the second data line, which has a second input end so that the data line driving circuit can input signals into the second data line through the second input end.

11. The liquid crystal display panel of claim 10 wherein a capacitance of each of the compensating capacitors is increased as a distance between each of the compensating capacitors and the second input end is increased.

12. The liquid crystal display panel of claim 11 wherein each of the pixels is located between a third scanning line and a fourth scanning line, and further comprises:

a liquid crystal cell having a common electrode, a pixel electrode connected to the corresponding compensating capacitor, and a liquid crystal layer disposed between the pixel electrode and the common electrode; and

a thin film transistor having a gate electrode connected to the corresponding third scanning line, a drain electrode connected to the second data line, and a source electrode connected to the pixel electrode.

13. The liquid crystal display panel of claim 12 wherein each of the compensating capacitors is composed of a first overlapping region, which is formed by overlapping the corresponding pixel electrode over the corresponding third scanning line.

14. The liquid crystal display panel of claim 13 wherein an area of each of the first overlapping regions is increased as a distance between the second input end and the pixel corresponding to each of the first overlapping regions is increased.

15. The liquid crystal display panel of claim 12 wherein each of the compensating capacitors is composed of a second overlapping region, which is formed by overlapping the corresponding source electrode over the corresponding gate electrode.

16. The liquid crystal display panel of claim 15 wherein an area of each of the second overlapping regions is increased as a distance between the second input end and the pixel corresponding to each of the second overlapping regions is increased.

17. The liquid crystal display panel of claim 12 wherein each of the pixels further comprises a storage capacitor, and a capacitance of each of the storage capacitors is reduced as a distance between each of the storage capacitors and the second input end is increased.

18. A liquid crystal display panel comprising:

a plurality of scanning lines;

a plurality of data lines; and

a plurality of pixels, each of the pixels having a pixel electrode, and a thin film transistor having a gate electrode connected to the corresponding scanning line, a drain electrode connected to the corresponding data line, and a source electrode connected to the pixel electrode, wherein a first overlapping region is formed by overlapping the pixel electrode over the corresponding scanning line;

wherein an area of each of the first overlapping regions is increased gradually along a first direction.

19. The liquid crystal display panel of claim 18 wherein each of the first overlapping region forms a compensating capacitor for providing an approximately identical feed-through voltage for each of the pixels, thus reducing a flicker effect of the liquid crystal display panel.

20. The liquid crystal display panel of claim 18 wherein each of the pixel electrodes comprises a first extending portion partially overlapping the corresponding scanning line so as to form each of the first overlapping regions.

21. The liquid crystal display panel of claim 18 wherein each of the pixel electrodes partially overlaps a second extending portion of the corresponding scanning line so as to form each of the first overlapping regions.

22. The liquid crystal display panel of claim 21 wherein a protrusion structure is disposed on each of the pixel electrodes and above the corresponding second extending portion, for regulating an alignment direction of liquid crystal molecules.

23. The liquid crystal display panel of claim 18 further comprising a scanning line driving circuit and a data line driving circuit, wherein the scanning line driving circuit inputs signals into each of the scanning lines through a first input end of each of the scanning lines, and the data line driving circuit inputs signals into each of the data lines through a second input end of each of the data lines.

24. The liquid crystal display panel of claim 23 wherein the first direction is parallel to each of the scanning lines, and an area of each of the first overlapping regions is increased as a distance between each of the first overlapping regions and the first input end of the scanning line corresponding to each of the first overlapping regions is increased.

25. The liquid crystal display panel of claim 23 wherein the first direction is parallel to each of the data lines, and an area of each of the first overlapping regions is increased as a distance between each of the first overlapping regions and the second input end of the data line corresponding to each of the first overlapping regions is increased.

26. The liquid crystal display panel of claim 23 wherein a second overlapping region is formed by overlapping each of the source electrodes over the corresponding gate electrode of each of the source electrodes.

27. The liquid crystal display panel of claim 26 wherein each of the second overlapping regions forms a compensating capacitor for providing an approximately identical feed-through voltage for each of the pixels, thus reducing a flicker effect of the liquid crystal display panel.

28. The liquid crystal display panel of claim 27 wherein an area of each of the second overlapping regions is increased as a distance between each of the second overlapping regions and the first input end of the scanning line corresponding to each of the second overlapping regions is increased.

29. The liquid crystal display panel of claim 27 wherein an area of each of the second overlapping regions is

increased as a distance between each of the second overlapping regions and the second input end of the data line corresponding to each of the second overlapping regions is increased.

30. A liquid crystal display panel comprising:

a scanning line driving circuit;

at least a scanning line connected to the scanning line driving circuit;

a first region positioned on the scanning line having at least a first pixel, which comprises a first pixel electrode, a first overlapping region being formed by overlapping the first pixel electrode over the scanning line; and

a second region positioned on the scanning line having at least a second pixel, which comprises a second pixel electrode, a second overlapping region being formed by overlapping the second pixel electrode over the scanning line;

wherein the first region is located between the scanning line driving circuit and the second region, and an area of the second overlapping region is larger than an area of the first overlapping region.

31. The liquid crystal display panel of claim 30 wherein the first pixel further comprises a first thin film transistor, which includes a first gate electrode connected to the scanning line, a first drain electrode connected to a first data line, and a first source electrode connected to the first pixel electrode, and a third overlapping region is formed by overlapping the first source electrode over the first gate electrode.

32. The liquid crystal display panel of claim 31 wherein the second pixel further comprises a second thin film transistor, which includes a second gate electrode connected to the scanning line, a second drain electrode connected to a second data line, and a second source electrode connected to the second pixel electrode, and a fourth overlapping region is formed by overlapping the second source electrode over the second gate electrode.

33. The liquid crystal display panel of claim 32 wherein an area of the fourth overlapping region is larger than an area of the third overlapping region.

34. A liquid crystal display panel comprising:

a data line driving circuit;

at least a data line connected to the data line driving circuit;

a first region positioned on the data line having at least a first thin film transistor, which comprises a first gate electrode connected to a first scanning line, a first drain electrode connected to the data line, and a first source electrode connected to a first pixel electrode, a first overlapping region being formed by overlapping the first pixel electrode over the first scanning line; and

a second region positioned on the data line having at least a second thin film transistor, which comprises a second gate electrode connected to a second scanning line, a second drain electrode connected to the data line, and a second source electrode connected to a second pixel electrode, a second overlapping region being formed by overlapping the second pixel electrode over the second scanning line;

wherein the first region is located between the data line driving circuit and the second region, and an area of the second overlapping region is larger than an area of the first overlapping region.

35. The liquid crystal display panel of claim 34 wherein a third overlapping region is formed by overlapping the first source electrode over the first gate electrode, a fourth overlapping region is formed by overlapping the second source electrode over the second gate electrode, and an area of the fourth overlapping region is larger than an area of the third overlapping region.

36. The liquid crystal display panel of claim 34 wherein the first region comprises a plurality of first thin film transistors, and an area of each of the first overlapping regions is increased as a distance between the data line driving circuit and the first thin film transistor corresponding to each of the first overlapping regions is increased.

37. The liquid crystal display panel of claim 34 wherein the second region comprises a plurality of second thin film transistors, and an area of each of the second overlapping regions is increased as a distance between the data line driving circuit and the second thin film transistor corresponding to each of the second overlapping regions is increased.

38. A liquid crystal display panel comprising:

a plurality of scanning lines for transmitting scanning signals from a scanning line driving circuit;

a plurality of data lines for transmitting image signals from a data line driving circuit; and

a plurality of pixels, each of the pixels comprising:

a liquid crystal capacitor;

a thin film transistor electrically connected to the corresponding scanning line, the corresponding data line, and the liquid crystal capacitor; and

a compensating capacitor electrically connected between the liquid crystal capacitor and the corresponding scanning line, being connected to the thin film transistor, for providing an approximately identical feed-through voltage for each of the pixels.

39. The liquid crystal display panel of claim 38 wherein a capacitance of each of the compensating capacitors is increased as a distance between each of the pixels and the scanning line driving circuit is increased.

40. The liquid crystal display panel of claim 38 wherein a capacitance of each of the compensating capacitors is increased as a distance between each of the pixels and the data line driving circuit is increased.

41. The liquid crystal display panel of claim 38 further comprising a storage capacitor connected to the liquid crystal capacitor.

42. The liquid crystal display panel of claim **41** wherein a capacitance of each of the storage capacitors is reduced as a distance between each of the storage capacitors and the scanning line driving circuit is increased.

43. The liquid crystal display panel of claim **41** wherein a capacitance of each of the storage capacitors is reduced as a distance between each of the storage capacitors and the data line driving circuit is increased.

* * * * *

专利名称(译)	液晶显示面板具有减少的闪烁		
公开(公告)号	US20030098934A1	公开(公告)日	2003-05-29
申请号	US10/064777	申请日	2002-08-16
[标]申请(专利权)人(译)	LEE HSIN TA 吴袁亮 吴澄我 林文杰		
申请(专利权)人(译)	李HSIN-TA 吴元梁 吴承我 林文CHIEH		
当前申请(专利权)人(译)	群创光电		
[标]发明人	LEE HSIN TA WU YUAN LIANG WU CHENG I LIN WEN CHIEH		
发明人	LEE, HSIN-TA WU, YUAN-LIANG WU, CHENG-I LIN, WEN-CHIEH		
IPC分类号	G02F1/1362 H01L27/12 G02F1/1343		
CPC分类号	G02F1/136213 H01L27/12 G02F1/136286		
优先权	090129131 2001-11-23 TW		
其他公开文献	US6897908		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示面板包括上基板，下基板和位于上基板和下基板之间的多个像素。每个像素至少具有补偿电容器，用于为每个像素提供近似相同的馈通电压，从而减小液晶显示装置的闪烁效应。

