

(19)



(11)

EP 2 706 399 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

12.03.2014 Bulletin 2014/11

(51) Int Cl.:

G02F 1/1333 ^(2006.01)**G02F 1/1345** ^(2006.01)**G02F 1/1362** ^(2006.01)(21) Application number: **13183301.4**(22) Date of filing: **06.09.2013**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:


BA ME• **Ye, Teng****100176 Beijing (CN)**• **Zhao, Lijun****100176 Beijing (CN)**• **Liu, Yaohu****100176 Beijing (CN)**(30) Priority: **07.09.2012 CN 201210330582**(74) Representative: **Brötz, Helmut****Rieder & Partner****Corneliusstraße 45****42329 Wuppertal (DE)**(71) Applicant: **Boe Technology Group Co. Ltd.****Beijing 100015 (CN)**

(72) Inventors:

• **Im, Yunsik****100176 Beijing (CN)**(54) **Touch liquid crystal display device, liquid crystal display panel, array substrate and color film substrate**

(57) The present disclosure provides a touch liquid crystal display device, a liquid crystal display panel, an array substrate (1) and a color film substrate (2). On said array substrate (1) is formed a Gate On Array (GOA) circuit (11), and at the outer side of said color film substrate (2) is formed a touch signal transmission line (22). The touch liquid crystal display panel further comprises

a shielding electrode (12, 23) located between said GOA circuit (11) and said touch signal transmission line (2), said shielding electrode being used for shielding the interference caused by the clock signal of said GOA circuit (11) to the touch sensing signal on said touch signal transmission line (22) so as to reduce the interference caused by the clock signal to the touch sensing signal.

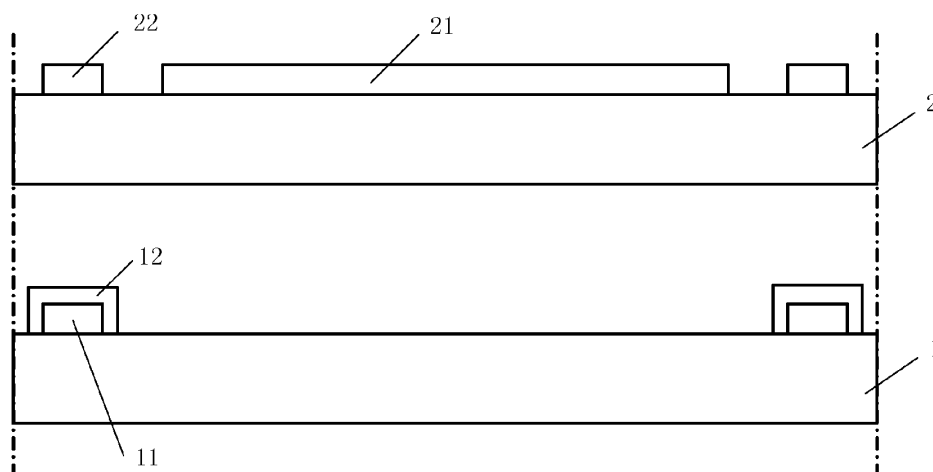**Figure 2****EP 2 706 399 A1**

Description

FIELD OF THE INVENTION

[0001] The present disclosure relates to the field of liquid crystal display technology, and in particular to a touch liquid crystal display device, a liquid crystal display panel, an array substrate and a color film substrate.

BACKGROUND

[0002] Currently the touch screen in the market includes an add on mode touch screen and a integrated touch screen, and the integrated touch screen is a touch screen into which a touchpad is integrated at the same time when the liquid crystal panel is manufactured. There are two kinds of integration approaches for the integrated touch screen, one is to integrate the touchpad functionality at the outer side of the color film substrate of the liquid crystal panel (also referred to on-cell integration approach), and the other is to integrate the touchpad functionality between the color film substrate and the array substrate of the liquid crystal panel, generally directly at the inner side of the color film substrate (also referred to in-cell integration approach).

[0003] FIG. 1 is a schematic diagram of the structure of a touch liquid crystal display panel of an on-cell integration approach. As shown in Figure 1, said touch liquid crystal display panel includes an array substrate 1 and a color film substrate 2, a touch electrode unit 21 and a touch signal transmission line 22 are formed at the outer side of said color film substrate 2, and said touch signal transmission line 22 is located in the non-display area of said color film substrate 2.

[0004] In some liquid crystal displays, the gate line driving circuit is made on the array substrate, and this kind of gate line driving circuit is called a Gate on Array (GOA) circuit. The application of GOA technology can reduce the production process procedures and the product process costs, and improve the integration degree of the liquid crystal panel. Corresponding to Figure 1, on said array substrate 1 is formed a GOA circuit 11, and said GOA circuit 11 is formed in the non-display area of the array substrate 1.

[0005] For a liquid crystal display panel in an Advanced Super Dimension Switch (ADS) mode, there are no common electrodes on its color film substrate, both the common electrodes and the pixel electrodes are made on the array substrate, and the fringe field effect between the common electrode and the pixel electrode is utilized to drive the liquid crystal for display. In this way, for a touch liquid crystal display panel in the ADS mode, the clock signal of its GOA circuit will cause interference to the touch sensing signal on the touch signal transmission line, resulting in abnormality in the function of touch screen.

SUMMARY

[0006] Embodiments of the present disclosure provide a touch liquid crystal display device, a liquid crystal display panel, an array substrate and a color film substrate, which can reduce the interference caused by the clock signal of the GOA circuit to the touch sensing signal on the touch signal transmission line.

[0007] To solve the above technical problem, the present disclosure provides a technical solution as follows:

[0008] A touch liquid crystal display panel comprising: an array substrate and a color film substrate, on said array substrate is formed a GOA circuit, and at the outer side of said color film substrate is formed a touch signal transmission line, the touch liquid crystal display panel further comprises:

[0009] a shielding electrode located between said GOA circuit and said touch signal transmission line, said shielding electrode being used for shielding the interference caused by the clock signal of said GOA circuit to the touch sensing signal on said touch signal transmission line.

[0010] The above touch liquid crystal display panel, wherein said shielding electrode is located on said array substrate, and covers said GOA circuits.

[0011] The above touch liquid crystal display panel, wherein

[0012] said shielding electrode is grounded; or

[0013] said shielding electrode is connected to the common electrode on said array substrate.

[0014] The above touch liquid crystal display panel, wherein said shielding electrode is located at the outer side of said color film substrate and underneath said touch signal transmission line.

[0015] The above touch liquid crystal display panel, wherein

[0016] said shielding electrode is grounded; or

[0017] said shielding electrode is externally connected to the common electrode.

[0018] An array substrate being used for a touch liquid crystal display panel, said touch liquid crystal display panel comprises said array substrate and the color film substrate, on said array substrate is formed a GOA circuit, at the outer side of said color film substrate is formed a touch sensing line, said array substrate further comprises:

[0019] a shielding electrode covering said GOA circuit, said shielding electrode being used for shielding the interference caused by the clock signal of said GOA circuit to the touch sensing signal on said touch signal transmission line.

[0020] The above array substrate, wherein

[0021] said shielding electrode is grounded; or

[0022] said shielding electrode is connected to the common electrode on said array substrate.

[0023] A color film substrate being used for a touch liquid crystal display panel, said touch liquid crystal display

play panel comprises the array substrate and said color film substrate, on said array substrate is formed a GOA circuit, at the outer side of said color film substrate is formed a touch signal transmission line, said color film substrate further comprises:

[0024] a shielding electrode located at the outer side of said color film substrate and underneath said touch signal transmission line, said shielding electrode being used for shielding the interference caused by the clock signal of said GOA circuit to the touch sensing signal on said touch signal transmission line.

[0025] The above color film substrate, wherein

[0026] said shielding electrode is grounded; or

[0027] said shielding electrode is externally connected to the common electrode.

[0028] A touch liquid crystal display device comprising the above touch liquid crystal display panel.

[0029] Compared with the prior art, the present disclosure through setting a shielding electrode between the GOA circuit of the array substrate and the touch signal transmission line of the color film substrate, utilizes the shielding electrode to shield the interference caused by the clock signal of said GOA circuit to the touch sensing signal on said touch signal transmission line, thereby improving the touch performance of touch screen.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] Figure 1 is a schematic diagram of the structure of a touch liquid crystal display panel according to the prior art;

[0031] Figure 2 is a schematic diagram of the structure of a touch liquid crystal display panel according to embodiment 1 of the present disclosure; and

[0032] Figure 3 is a schematic diagram of the structure of a touch liquid crystal display panel according to embodiment 2 of the present disclosure.

DETAILED DESCRIPTION

[0033] In order to solve the technical problems in the prior art, and make technical solution and advantages of the present disclosure more apparent, the present disclosure will be specifically described below in conjunction with the accompanying drawings and particular embodiments.

[0034] In order to solve the existing interference caused by the clock signal of the GOA circuit on the array substrate to the touch sensing signal on the touch signal transmission line on the color film substrate, the embodiments of the present disclosure provide a touch liquid crystal display panel including an array substrate and a color film substrate, on said array substrate being formed a GOA circuit, at the outer side of said color film substrate being formed a touch signal transmission line, said touch liquid crystal display panel further comprises a shielding electrode located between said GOA circuit and said touch signal transmission line. In this way, the interfer-

ence caused by the clock signal of said GOA circuit to the touch sensing signal on said touch signal transmission line can be shielded utilizing said shielding electrode, thereby improving the touch performance of touch screen.

[0035] Two specific embodiments of the present disclosure are given below.

[0036] Embodiment 1

[0037] Figure 2 is a schematic diagram of the structure of a touch liquid crystal display panel according to embodiment 1 of the present disclosure. Referring to Figure 2, said touch liquid crystal display panel includes an array substrate 1 and a color film substrate 2, wherein:

[0038] at the outer side of said color film substrate 2 remote from the array substrate 1 is formed a touch electrode unit 21 and a touch signal transmission line 22, said touch signal transmission line 22 being located in the non-display area of said color film substrate 2;

[0039] On said array substrate 1 is formed a GOA circuit 11, said GOA circuit 11 is formed in the non-display region of the array substrate 1, and on said GOA circuit 11 is covered with a shielding electrode 12, said shielding electrode 12 is used for shielding the interference caused by the clock signal of said GOA circuit 11 to the touch sensing signal on said touch signal transmission line 22.

[0040] The touch liquid crystal display panel may be a liquid crystal display panel in an ADS mode, and said shielding electrode 12 may be grounded; or, said shielding electrode 12 may be connected to the common electrode on said array substrate 1, so that the interference caused by the clock signal of said GOA circuit 11 to the touch sensing signal on said touch signal transmission line can be shielded utilizing said shielding electrode 12, thereby improving the touch performance of touch screen.

[0041] Wherein said shielding electrode 12 may be made of a transparent conductive material or a metal material. Said transparent conductive material may be indium tin oxide (ITO), indium zinc oxide (IZO), indium tin zinc oxide (ITZO), and antimony tin oxide (ATO) and the like; said metal material may be silver (Ag), gold (Au), tungsten (W), titanium (Ti) and molybdenum (Mo) and the like.

[0042] Embodiment 2

[0043] Figure 3 is a schematic diagram of the structure of a touch liquid crystal display panel according to embodiment 2 of the present disclosure. Referring to Figure 3, said touch liquid crystal display panel includes an array substrate 1 and a color film substrate 2, wherein:

[0044] on said array substrate 1 is formed a GOA circuit 11, and said GOA circuit 11 is formed in the non-display region of the array substrate 1;

[0045] at the outer side of said color film substrate 2 is formed a touch electrode unit 21 and a touch signal transmission line 22, said touch signal transmission line 22 being located in the non-display region of the color film substrate 2, and underneath the touch signal transmission line 22 being also formed a shielding electrode 23,

said shielding electrode 23 being used for shielding the interference caused by the clock signal of said GOA circuit 11 to the touch sensing signal on said touch signal transmission line 22.

[0046] The touch liquid crystal display panel may be a liquid crystal display panel in an ADS mode, and said shielding electrode 12 may be grounded; or, said shielding electrode 12 may be externally connected to the common electrode. In this way, the interference caused by the clock signal of said GOA circuit 11 to the touch sensing signal on said touch signal transmission line can be shielded utilizing said shielding electrode 12, thereby improving the touch performance of touch screen.

[0047] Wherein said shielding electrode 12 may be made of a transparent conductive material or a metal material. Said transparent conductive material may be indium tin oxide (ITO), indium zinc oxide (IZO), indium tin zinc oxide (ITZO), and antimony tin oxide (ATO) and the like; said metal material may be silver (Ag), gold (Au), tungsten (W), titanium (Ti) and molybdenum (Mo) and the like.

[0048] Further, the present disclosure also provides a touch liquid crystal display device, comprising the afore-said touch liquid crystal display panel. Specifically, said touch liquid crystal display device can be a LCD TV, a mobile phone, a LCD display, a digital photo frame, a tablet computer and the like, and any touch liquid crystal display devices with a touch function.

[0049] Finally, it should be noted that the above embodiments are merely used to illustrate but not to limit the technical solution of the present disclosure. It should be appreciated by an ordinary skilled person in the art that modifications or equivalent replacements can be made to the technical solution of the present disclosure without departing from spirit and scope of the technical solution of the present disclosure, all of which should fall into the scope of the claims of the present disclosure.

Claims

1. A touch liquid crystal display panel, comprising an array substrate and a color film substrate, on said array substrate being formed a GOA circuit, at the outer side of said color film substrate being formed a touch signal transmission line, **characterized in that** said touch liquid crystal display panel further comprises:

a shielding electrode located between said GOA circuit and said touch signal transmission line, said shielding electrode being used for shielding the interference caused by the clock signal of said GOA circuit to the touch sensing signal on said touch signal transmission line.

2. The touch liquid crystal display panel according to Claim 1, **characterized in that**:

said shielding electrode is located on said array substrate, and covers said GOA circuits.

3. The touch liquid crystal display panel according to Claim 2, **characterized in that**:

said shielding electrode is grounded; or
said shielding electrode is connected to the common electrode on said array substrate.

4. The touch liquid crystal display panel according to Claim 1, **characterized in that**:

said shielding electrode is located at the outer side of said color film substrate and underneath said touch signal transmission line.

5. The touch liquid crystal display panel according to Claim 4, **characterized in that**:

said shielding electrode is grounded; or
said shielding electrode is externally connected to the common electrode.

6. An array substrate for a touch liquid crystal display panel, said touch liquid crystal display panel including said array substrate and a color film substrate, on said array substrate being formed a GOA circuit, at the outer side of said color film substrate being formed a touch sensing line, **characterized in that** said array substrate further comprises:

a shielding electrode covering said GOA circuit, said shielding electrode being used for shielding the interference caused by the clock signal of said GOA circuit to the touch sensing signal on said touch signal transmission line.

7. The array substrate according to Claim 6, **characterized in that**:

said shielding electrode is grounded; or
said shielding electrode is connected to the common electrode on said array substrate.

8. A color film substrate for a touch liquid crystal display panel, said touch liquid crystal display panel including a array substrate and said color film substrate, on said array substrate being formed a GOA circuit, at the outer side of said color film substrate being formed a touch signal transmission line, **characterized in that** said color film substrate further comprises:

a shielding electrode located at the outer side of said color film substrate and underneath said touch signal transmission line, said shielding electrode being used for shielding the interfer-

ence caused by the clock signal of said GOA circuit to the touch sensing signal on said touch signal transmission line.

9. The color film substrate according to Claim 8, **characterized in that:**

said shielding electrode is grounded; or
said shielding electrode is externally connected to the common electrode.

10. A touch liquid crystal display device, **characterized in that** it includes the touch liquid crystal display panel according to any one of Claim 1-5.

5

10

15

20

25

30

35

40

45

50

55

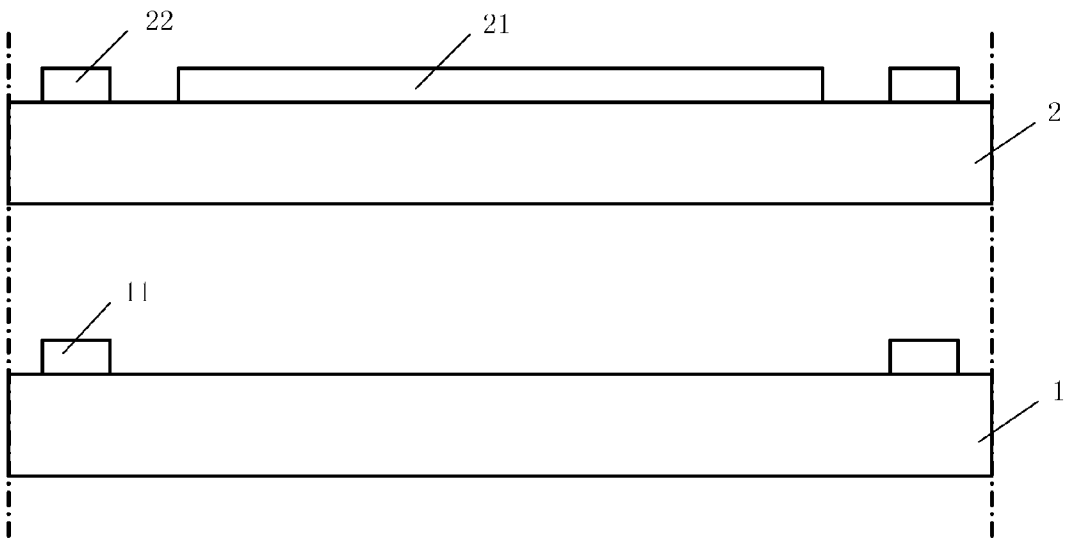


Figure 1

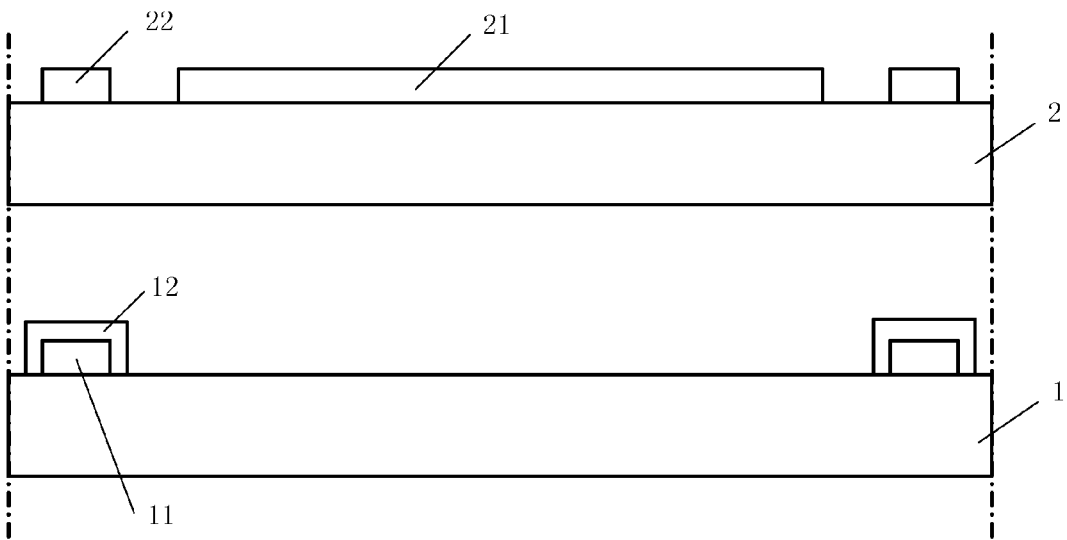


Figure 2

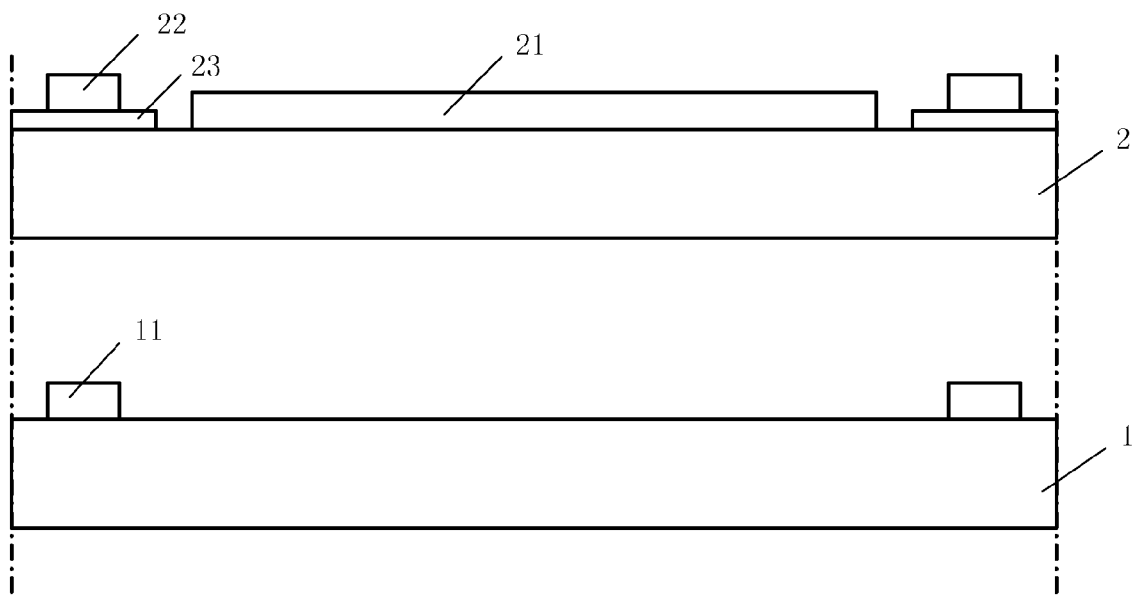


Figure 3



EUROPEAN SEARCH REPORT

Application Number
EP 13 18 3301

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 1 422 601 A1 (SHARP KK [JP]) 26 May 2004 (2004-05-26)	1,4,5, 8-10	INV. G02F1/1333
A	* figures 5(a),12,16 * * paragraphs [0086], [0092], [0116], [0119], [0149], [0150], [0157] *	2,3,6,7	G02F1/1345 G02F1/1362
A	US 2007/268243 A1 (CHOO DAE-HO [KR] ET AL) 22 November 2007 (2007-11-22) * paragraph [0033] - paragraph [0035] * * figure 4 *	2,3,6,7	
A	EP 1 455 264 A2 (SHARP KK [JP]) 8 September 2004 (2004-09-08) * paragraphs [0023], [0037], [0044] * * page 6 *	1-10	
			TECHNICAL FIELDS SEARCHED (IPC)
			G02F G06F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 November 2013	Examiner Hauser, Markus
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 13 18 3301

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-11-2013

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 1422601	A1	26-05-2004	CN	1520544 A	11-08-2004
			EP	1422601 A1	26-05-2004
			EP	2261777 A1	15-12-2010
			EP	2267584 A1	29-12-2010
			TW	1225219 B	11-12-2004
			US	2004217945 A1	04-11-2004
			US	2011310059 A1	22-12-2011
			WO	03019346 A1	06-03-2003

US 2007268243	A1	22-11-2007	CN	101075030 A	21-11-2007
			JP	5144122 B2	13-02-2013
			JP	2007310885 A	29-11-2007
			KR	20070110988 A	21-11-2007
			US	2007268243 A1	22-11-2007

EP 1455264	A2	08-09-2004	CN	1527274 A	08-09-2004
			EP	1455264 A2	08-09-2004
			GB	2398916 A	01-09-2004
			JP	4201191 B2	24-12-2008
			JP	2004264845 A	24-09-2004
			KR	20040077542 A	04-09-2004
			TW	1300548 B	01-09-2008
			US	2004227743 A1	18-11-2004

专利名称(译)	触摸液晶显示装置，液晶显示面板，阵列基板和彩膜基板		
公开(公告)号	EP2706399A1	公开(公告)日	2014-03-12
申请号	EP2013183301	申请日	2013-09-06
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团有限公司.		
当前申请(专利权)人(译)	京东方科技集团有限公司.		
[标]发明人	IM YUNSIK YE TENG ZHAO LIJUN LIU YAOHU		
发明人	IM, YUNSIK YE, TENG ZHAO, LIJUN LIU, YAOHU		
IPC分类号	G02F1/1333 G02F1/1345 G02F1/1362		
CPC分类号	G02F1/13439 G02F1/13338 G02F1/13454 G02F2001/133334 G02F2001/136218		
审查员(译)	HAUSER , MARKUS		
优先权	201210330582.0 2012-09-07 CN		
其他公开文献	EP2706399B1		
外部链接	Espacenet		

摘要(译)

本发明提供一种触控式液晶显示装置，液晶显示面板，阵列基板（1）以及彩膜基板（2）。在所述阵列基板（1）上形成栅极阵列（GOA）电路（11），并且在所述彩膜基板（2）的外侧形成触摸信号传输线（22）。触控式液晶显示面板还包括位于所述GOA电路（11）与所述触控信号传输线（2）之间的屏蔽电极（12,23），所述屏蔽电极用于屏蔽由所述时钟信号引起的干扰。GOA电路（11）对所述触摸信号传输线（22）上的触摸传感信号进行处理，以减少时钟信号对触摸传感信号的干扰。

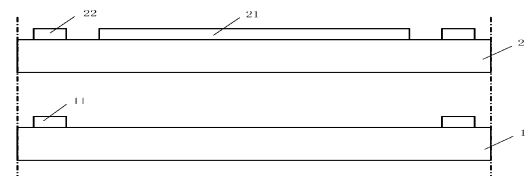


Figure 1

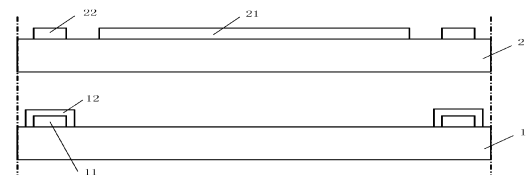


Figure 2