

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0030611 A1****Kim et al.**(43) **Pub. Date: Feb. 13, 2003**(54) **LIQUID CRYSTAL DISPLAY CONTROLLER
WITH IMPROVED DITHERING AND FRAME
RATE CONTROL AND METHOD THEREOF**(52) **U.S. Cl. 345/89**(75) **Inventors: Hong-Kyu Kim, Yongin-shi (KR);
Kyung-Mook Lim, Yongin-shi (KR)**(57) **ABSTRACT**

Correspondence Address:

F. CHAU & ASSOCIATES, LLP**1900 Hempstead Turnpike, Suite 501****East Meadow, NY 11554 (US)**(73) **Assignee: Samsung Electronics Co., Ltd.**(21) **Appl. No.: 09/894,062**(22) **Filed: Jun. 28, 2001**(30) **Foreign Application Priority Data**

Mar. 28, 2001 (KR) 2001-16193

Publication Classification(51) **Int. Cl.⁷ G09G 3/36**

Disclosed is a liquid crystal display (LCD) controller with improved dithering and frame rate control to reduce the physical (hardware) cost and power consumption, and a method thereof. The LCD controller utilizes a mechanism of minimizing a size of a dithering pattern register which stores plural gray levels. A duty cycle value for the respective gray levels is determined by using the same bit number as denominator values of the plural gray levels. The LCD controller includes a dithering pattern register section for storing the plural gray levels, modular register counters for performing counting operation to determine a binary value of most significant bit of the respective gray levels, multiplexers for generating data patterns for the respective gray levels in accordance with an output of the respective modular register counters; and a selection means for selecting and generating a corresponding bit of a data pattern corresponding to pixel data provided on a LCD panel.

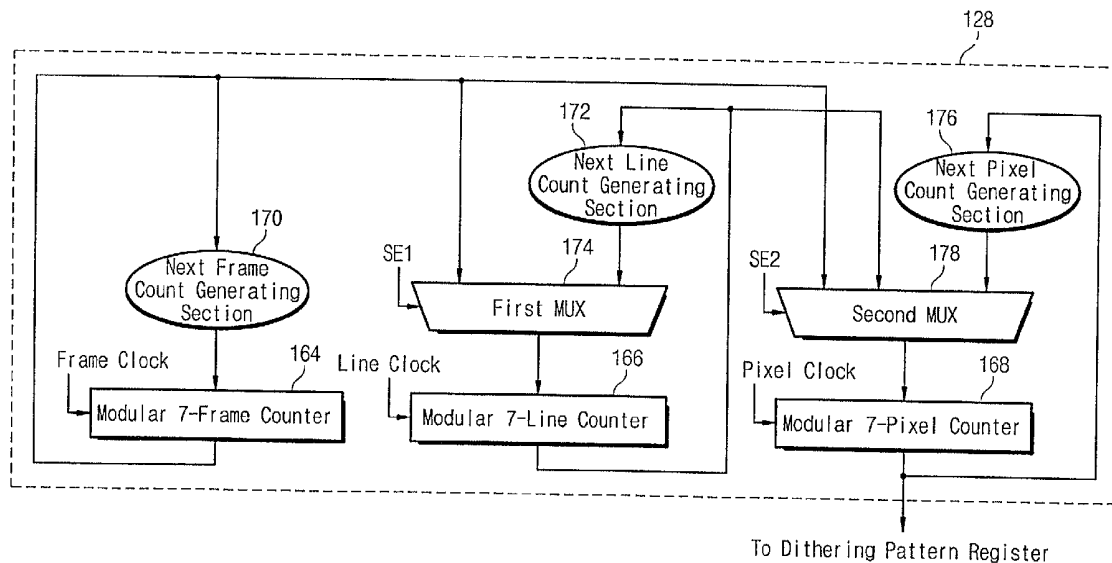


Fig. 1

(Prior Art)

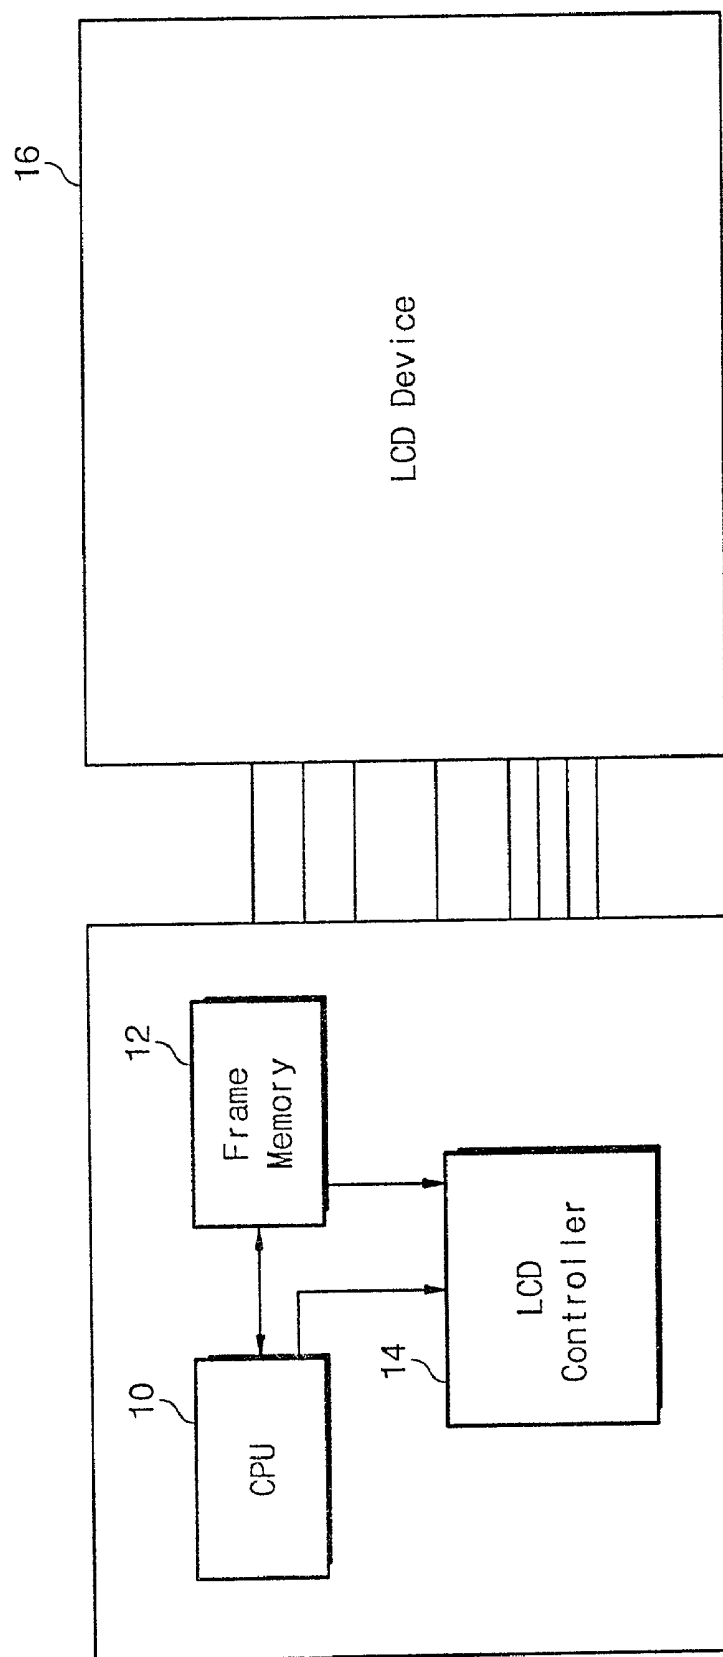


Fig. 2A

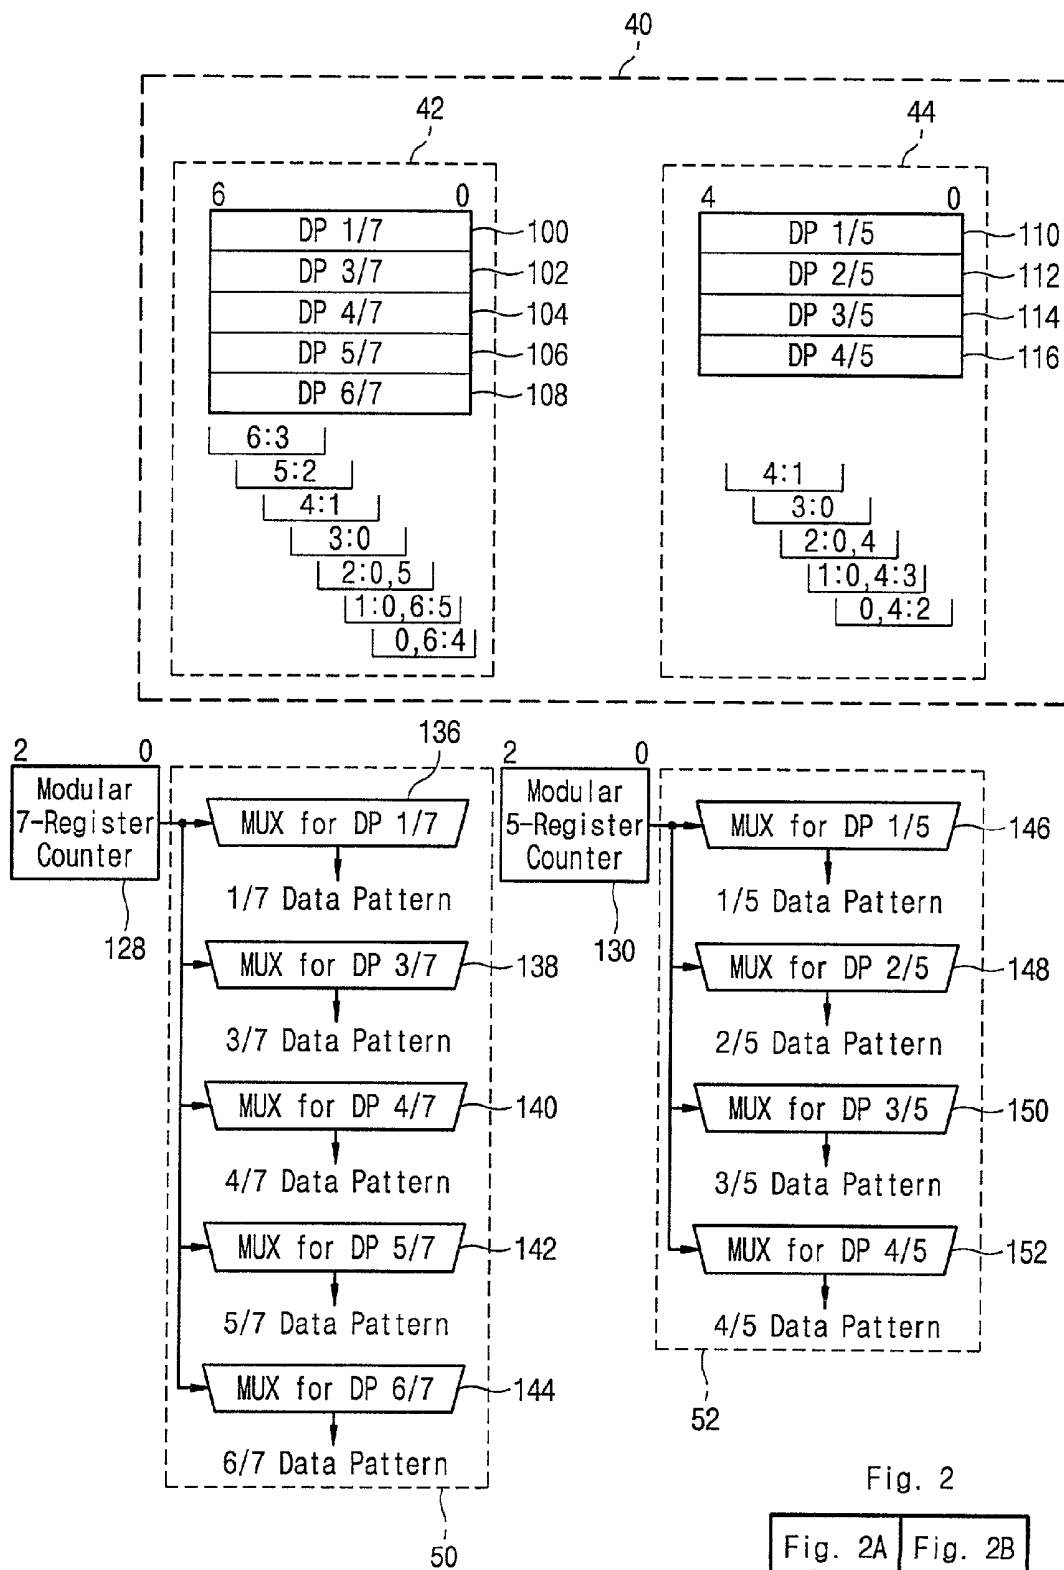


Fig. 2B


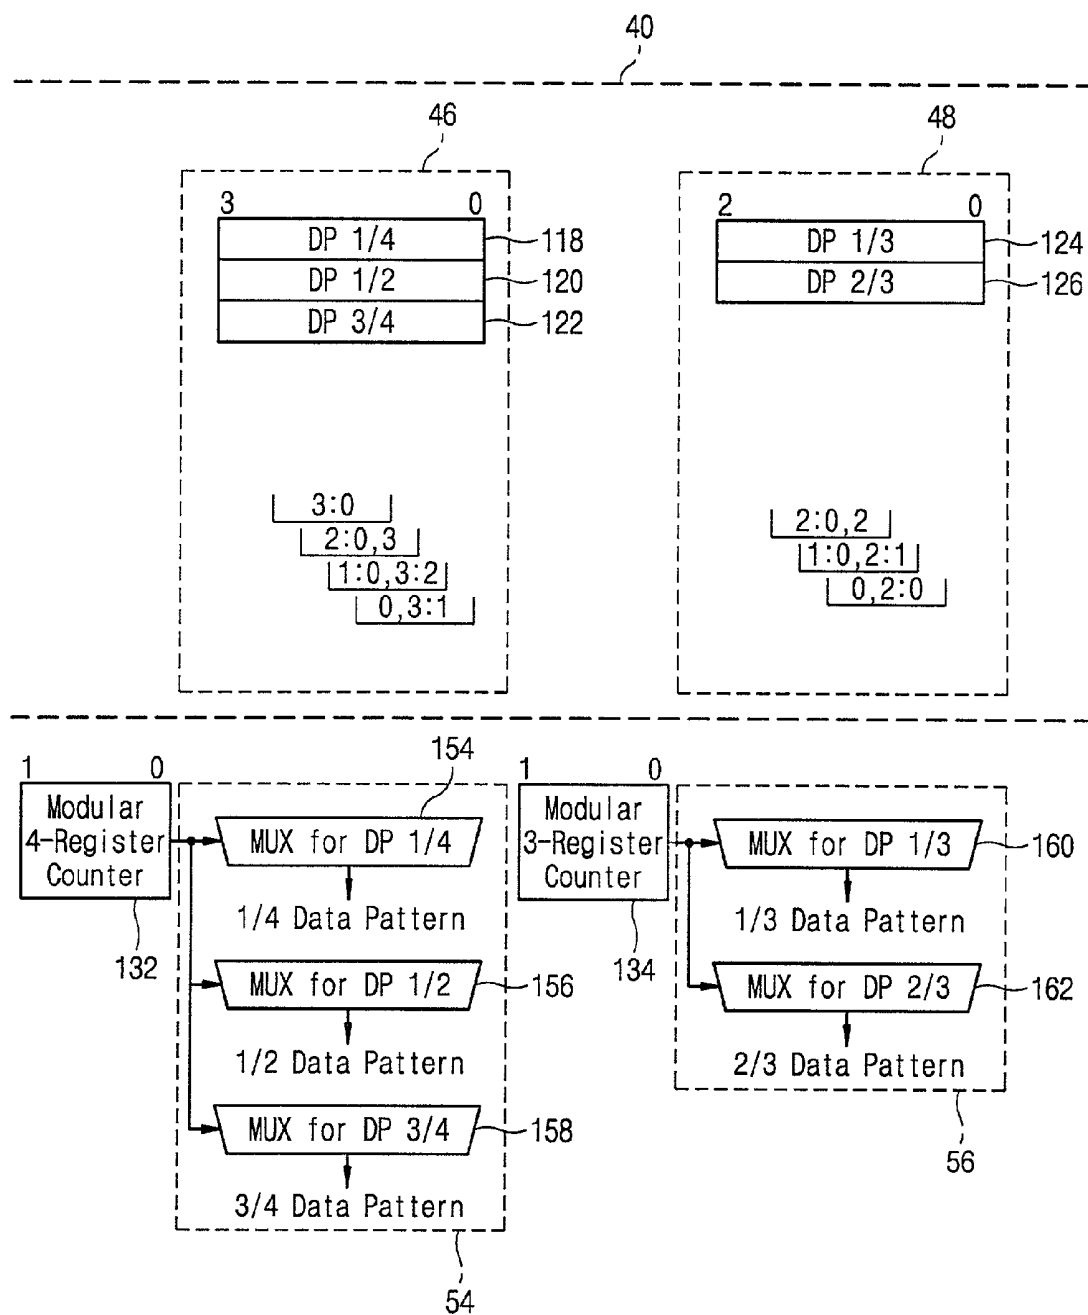


Fig. 3

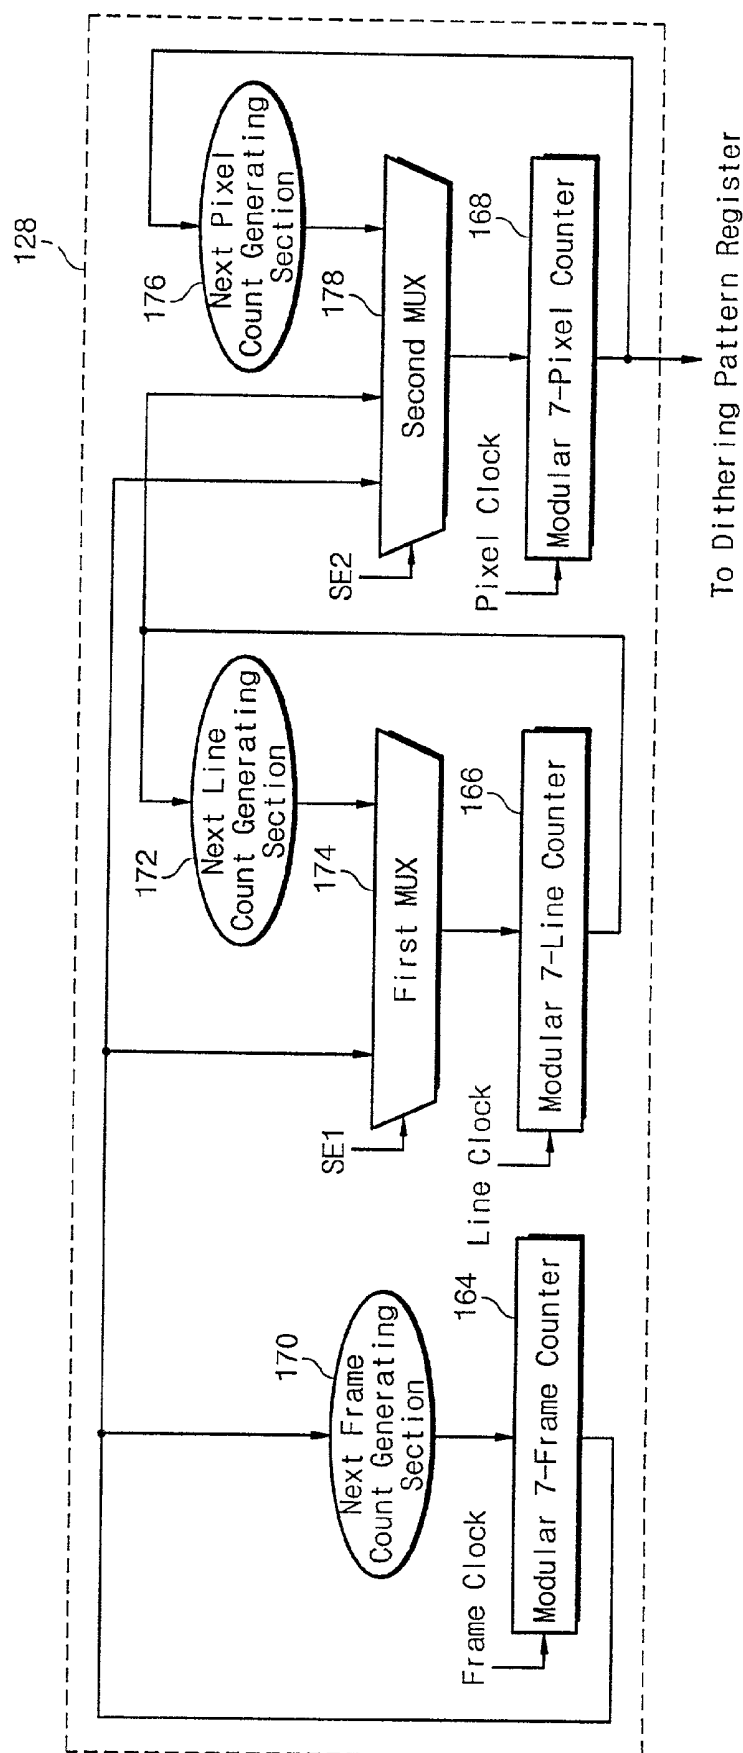

LIQUID CRYSTAL DISPLAY CONTROLLER WITH IMPROVED DITHERING AND FRAME RATE CONTROL AND METHOD THEREOF

[0001] This application relies for priority upon Korean Patent Application No. 2001-016193, filed on Mar. 28, 2001, the contents of which are herein incorporated by reference in their entirety.

FIELD OF THE INVENTION

[0002] The present invention generally relates to a liquid crystal display (LCD) controller and, more specifically, to a LCD controller for improving dithering and frame rate control in LCD devices.

BACKGROUND OF THE INVENTION

[0003] FIG. 1 shows a general scheme of a liquid crystal display (LCD) device for displaying pictures thereon. Referring to FIG. 1, a general function of an LCD controller 14 is transferring contents of a video buffer embedded in a frame memory (or system memory) 12 to a LCD device 16. The LCD device 16 includes a gate driver and a source driver for driving LCD panels, and the LCD controller 14 generates signals to control the drivers. The control signals provided from the LCD controller 14 are generally divided into two types, i.e. clock signals such as pixel clock, line clock, and frame clock for synchronization between two modules, and data signals required for providing picture data to be displayed on LCD panels. In general, the data signals are formed of 4-bit, 8-bit, or 16-bit, which allows a bandwidth of data transferred to a LCD driver to be large.

[0004] Further, the LCD controller 14 supports not only white and black mode but also gray levels by use of a dither and frame rate control block. The dither and frame rate control block is used for expressing gray level values as binary data. Suppose that gray level values for 4 gray levels are "0, 1/3, 2/3 and 1", binary data transferred to the LCD device is "0" or "1". For the purpose of expressing the gray level values such as "1/3" and "2/3", binary data is transferred in a certain number of frames such that "0" in a first frame, "1" in a second frame, and "0" in a third frame are respectively transferred. As a result, the transferred data value is "010", which results in making a duty cycle to be "1/3" which expresses the gray level of "1/3".

[0005] In general, the dither and frame rate control block includes dithering pattern registers to store gray level values and a control unit to control drawing a value for a frame from the registers. However, conventional LCD controllers have more dithering pattern registers than needed to store required gray level values. Specifically, the conventional dithering pattern registers are configured as a 4-bit unit to synchronously provide four (4) pixel values. Such a configuration of the dithering pattern registers forms 4-bit dithering pattern as much as a denominator value to express dithering pattern values for plural gray levels. That is, assuming that a denominator value of a predetermined gray level is "7", bit length of the dithering pattern registers is 28 (=4×7) bits. If a denominator value of a predetermined gray level is "5", bit length of the dithering pattern registers is 20 (=4×5) bits. Dithering pattern values of the dithering pattern registers are programmed to have a value as much as a required duty cycle in one bit length. For instance, if the gray level is "1/7", the dithering pattern value of a corresponding

dithering pattern register is programmed to assign "1" to 4 bits and "0" to the rest (24 bits) of the total 28 bits.

[0006] Respective dithering pattern values for 16 gray levels dithered by the foregoing manner are as follows:

[0007] 6/7: 0111 1111 1101 1111 1011 1111 1110

[0008] 4/5: 0111 1110 1011 1101 1111

[0009] 5/7: 0111 1011 1110 0101 1101 1011 1110

[0010] 3/4: 0111 1101 1011 1110

[0011] 2/3: 1101 0110 1011

[0012] 3/5: 0101 1010 0101 1011 1110

[0013] 4/7: 1011 0101 1010 0101 1010 0101 1110

[0014] 1/2: 1010 0101 1010 0101

[0015] 3/7: 0100 1010 0101 1010 0101 1010 0001

[0016] 2/5: 1010 0101 1010 0100 0001

[0017] 1/3: 0010 1001 0100

[0018] 1/4: 1000 0010 0100 0001

[0019] 1/5: 1000 0001 0100 0010 0000

[0020] 1/7: 1000 0000 0010 0000 0100 0000 0001

[0021] Thus, the size of the total dithering pattern values in the dithering pattern registers is 292 (=7×4×5+5×4×4+4×4×3+3×4×2) bits. Since circuitry for one bit is made of a flip-flop, the hardware cost for the conventional dithering pattern registers increases due to the large size of the dithering pattern value data. In addition, power consumption of the dithering pattern registers also increases.

[0022] Moreover, in the conventional LCD controller, only one nibble is continuously supplied through one line among the respective bit patterns. Assuming that all of a first line of a frame have gray level values of "1/7", a specific nibble of the dithering pattern values for the gray level "1/7" is continuously provided. If only a first nibble of the dithering pattern values for the gray level "1/7" is selected, data "1000" is always provided in the line. It is temporally possible to make the dithering pattern value for the gray level "1/7", but the data "1000" is spatially reiterative in one line. This also occurs in the case of providing the dithering pattern value for the gray level "1/4".

SUMMARY OF THE INVENTION

[0023] It is an object of the present invention to provide a liquid crystal display (LCD) controller having a circuit configuration capable of minimizing power consumption and hardware cost.

[0024] It is another object of the present invention to provide a method for realizing a LCD controller having a circuit configuration capable of minimizing power consumption and hardware cost.

[0025] In order to attain the above objects, according to an aspect of the present invention, there is provided a LCD controller including a dithering pattern register section, a plurality of modular register counters, a plurality of multiplexers, and a selection means.

[0026] The dithering pattern register section forms dithering pattern of binary data values for a plurality of gray

levels using the same number as denominator values of the gray levels, and stores dithering pattern values for the gray levels having the same denominator value by grouping the same. The plurality of modular register counters perform counting operation to determine a binary value of most significant bit of the respective gray levels in synchronization with a frame clock, a line clock, and a pixel clock. The plurality of multiplexers generate data patterns for the gray levels in accordance with an output of the respective modular register counters. The selection means selects and generates a corresponding bit of the data pattern corresponding to a pixel data provided on a LCD panel among the data patterns.

[0027] Each of the modular register counters includes a modular frame counter, a modular line counter, a modular pixel counter, a next frame count generating means, a next line counter, a first multiplexer, a next pixel counter, and a second multiplexer. The modular frame counter performs counting operation whenever frame is changed by synchronously responding to the frame clock. The modular line counter performs counting operation whenever line is changed by synchronously responding to the line clock. The modular pixel counter performs counting operation whenever pixel is changed by synchronously responding to the pixel clock. The next frame counter generates a first update value to the modular frame counter in response to an output signal of the modular frame counter so that a current value in the modular frame counter is updated whenever the frame is changed. The next line counter generates a second update value in response to an output signal of the modular line counter. The first multiplexer selectively generates an initial value of the modular frame counter whenever the frame is changed or the second update value provided from the next line counter whenever the line is changed to the modular line counter in response to a first selection signal. The next pixel counter generates a third update value whenever the pixel is changed in response to an output signal of the modular pixel counter. The second multiplexer selectively generates the initial value of the modular frame counter whenever the frame is changed, an initial value of the modular line counter whenever the line is changed, and the third update value provided from the next pixel counter whenever the pixel is changed to the modular pixel counter in response to a second selection signal. The next frame counter increases the first update value whenever the frame is changed. The next frame counter increase the second update value whenever the line is changed. The next pixel counter increases the third update value whenever the pixel is changed.

[0028] According to another aspect of this invention, there is provided a method for performing a dithering and frame rate control in a liquid crystal display controller generating control signals for displaying in response to pixel data to display pictures on a liquid crystal panel having a plurality of pixels. The method preferably includes storing binary data of gray levels in dithering pattern registers using a same bit number as denominator values of the gray levels; performing counting operation to determine a binary value of most significant bit of the respective gray levels; generating data patterns for the gray levels based on the binary value of most significant bit; and selecting and generating a corresponding bit of a data pattern corresponding to the pixel data.

[0029] The step of performing counting operation may include performing counting operation whenever a frame is changed in response to a frame clock; performing counting operation whenever a line of the frame is changed in response to a line clock; performing counting operation whenever a pixel of the line is changed in response to a pixel clock; providing a first update value whenever the frame is changed to update a current value for the counting operation in response to the frame clock; providing a second update value whenever the line is changed in response to a result of the counting operation in response to the line clock; selectively providing an initial value for the counting operation in response to the frame clock or the second update value, to update a current value for the counting operation in response to the line clock; providing a third update value in response to a result of the counting operation in response to the pixel clock whenever the pixel is changed; and selectively providing the initial value for the counting operation in response to the frame clock, an initial value for the counting operation in response to the line clock, or the third update value, to update a current value for the counting operation in response to the pixel clock.

[0030] According to the device and the method of the invention, the LCD controller is realized to have a dither and frame rate control block capable of storing plural gray levels without increasing the size of the dithering pattern registers.

[0031] The foregoing features and advantages of the present invention will be more fully described in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

[0033] **FIG. 1** is a block diagram illustrating a general scheme of liquid crystal display (LCD) device and controller;

[0034] **FIGS. 2A and 2B** show a block diagram of a dither and frame rate control block in a LCD controller according to a preferred embodiment of the present invention; and

[0035] **FIG. 3** is a block diagram of a modular register counter shown in **FIGS. 2A and 2B**.

DESCRIPTION OF PREFERRED EMBODIMENTS

[0036] It should be understood that the description of preferred embodiments is merely illustrative and not taken in a limiting sense. In the following detailed description, several specific details are set forth in order to provide a thorough understanding of the present invention. It will be obvious, however, to one skilled in the art that the present invention may be practiced without these specific details.

[0037] To describe preferred embodiments of the present invention, there is provided a liquid crystal display (LCD) controller where 16 gray levels are supported and 4 pixel values are synchronously generated.

[0038] **FIGS. 2A and 2B** show a block diagram of a dither and frame rate control block according to a preferred embodiment of the present invention. Referring to **FIGS. 2A**

and **2B**, the present invention provides dithering value by employing the same bit number as a denominator value of the respective gray levels. The 16 gray levels are defined as “1, 6/7, 4/5, 5/7, 3/4, 2/3, 3/5, 4/7, 1/2, 3/7, 2/5, 1/3, 1/4, 1/5, 1/7 and 0”, which can be modified in accordance with a configuration of a LCD controller and characteristics of a LCD device.

[0039] A duty cycle value for a gray level is programmed with “0” and “1” using the same bit number as a denominator value of the gray level. For example, duty cycle values are programmed such that a duty cycle value for gray level 6/7 is programmed to “011111”, to “11101” for gray level 4/5, to “1101101” for gray level 5/7, to “0111” for gray level 3/4, to “011” for gray level 2/3, to “01011” for gray level 3/5, to “0101011” for gray level 4/7, to “0110” for gray level 1/2, to “1010100” for gray level 3/7, to “00110” for gray level 2/5, to “100” for gray level 1/3, to “1000” for gray level 1/4, to “10000” for gray level 1/5, and to “0000001” for gray level 1/7.

[0040] A dithering pattern register section **40** is divided into four groups, i.e., a first group through a fourth group **42**, **44**, **46** and **48**. The first group **42** stores programmed values of denominator value “7” among 16 gray levels. In other words, dithering pattern values, i.e., “0000001” for gray level 1/7, “1010100” for gray level 3/7, “0101011” for gray level 4/7, “1101101” for gray level 5/7, and “0111111” for gray level 6/7, are respectively stored in blocks **100** through **108**.

[0041] The second group **44** stores programmed values of denominator value “5” among 16 gray levels. In other words, dithering pattern values, i.e., “10000” for gray level 1/5, “00110” for gray level 2/5, “01011” for gray level 3/5, and “11101” for gray level 4/5, are respectively stored in blocks **110-116**.

[0042] The third group **46** stores programmed values of denominator value “4” among 16 gray levels. In other words, dithering pattern values, i.e., “1000” for gray level 1/4, “0110” for gray level 1/2 (or 2/4), and “0111” for gray level 3/4, are respectively stored in blocks **118-122**.

[0043] The fourth group **48** stores programmed values of denominator value “3” among 16 gray levels. In other words, dithering pattern values, i.e., “100” for gray level 1/3 and “011” for gray level 2/3, are respectively stored in blocks **124** and **126**.

[0044] In **FIGS. 2A and 2B**, the numbers indicated below the groups **42**, **44**, **46** and **48** represent 4 bits for pixel values to be provided on LCD panel, which are determined by values provided from modular register counters. A most significant bit (MSB) and a least significant bit (LSB) of 4 bits for the gray levels programmed in the first group **42** are determined in accordance with an output value of the modular 7-register counter **128**. A MSB and a LSB of 4 bits for the gray levels programmed in the second group **44** are determined in accordance with an output value of the modular 5-register counter **130**. A MSB and a LSB of 4 bits for the gray levels programmed in the third group **46** are determined in accordance with an output value of the modular 4-register counter **132**. A MSB and a LSB of 4 bits for the gray levels programmed in the fourth group **48** are determined in accordance with an output value of the modular 3-register counter **134**.

[0045] The modular register counters **128**, **130**, **132** and **134** are respectively connected to multiplexer groups **50**, **52**, **54** and **56**, and utilized to select/provide four pixel data. In other words, the modular 7-register counter **128** for determining the MSB of 4 bits for the gray levels programmed in the first group **42** is connected to the first multiplexer group **50** synchronously providing higher 4 bits for the respective gray levels programmed in the first group **42** according to the output value of the modular 7-register counter **128**.

[0046] The first multiplexer group **50** includes a multiplexer for dithering pattern (DP) **1/7136**, a multiplexer for DP **3/7138**, a multiplexer for DP **4/7140**, a multiplexer for DP **5/7142**, and a multiplexer for DP **6/7144**. The multiplexer for DP **1/7136** outputs higher 4 bits of the gray level 1/7 programmed as a required duty cycle in accordance with the output value of the modular 7-register counter **128**, and the multiplexer for DP **3/7138** outputs higher 4 bits of the gray level 3/7 programmed as a required duty cycle in accordance with the output value of the modular 7-register counter **128**. The multiplexer for DP **4/7140** outputs higher 4 bits of the gray level 4/7 programmed as a required duty cycle in accordance with the output value of the modular 7-register counter **128**, and the multiplexer for DP **5/7142** outputs higher 4 bits of the stored gray level 5/7 programmed as a required duty cycle in accordance with the output value of the modular 7-register counter **128**. The multiplexer for DP **6/7144** outputs higher 4 bits of the stored gray level 6/7 programmed as a required duty cycle in accordance with the output value of the modular 7-register counter **128**.

[0047] The modular 5-register counter **130** for determining the MSB of 4 bits for the gray levels programmed and stored in the second group **44** is connected to the second multiplexer group **52** synchronously providing higher 4 bits of the respective gray levels stored in the second group **44**. The second multiplexer group **52** includes a multiplexer for DP **1/5146**, a multiplexer for DP **2/5148**, a multiplexer for DP **3/5150**, and a multiplexer for DP **4/5152**. The multiplexer for DP **1/5146** outputs higher 4 bits of the stored gray level 1/5 programmed as a required duty cycle in accordance with the output value of the modular 5-register counter **130**, and the multiplexer for DP **2/5148** outputs higher 4 bits of the stored gray level 2/5 which is programmed as a required duty cycle in accordance with the output value of the counter **130**. The multiplexer for DP **3/5150** outputs higher 4 bits of the stored gray level 3/5 programmed as a required duty cycle in accordance with the output value of the counter **130**. The multiplexer for DP **4/5152** outputs higher 4 bits of the stored gray level 4/5 which is programmed as a required duty cycle in accordance with the modular 5-register counter **130**.

[0048] The modular 4-register counter **132** for determining the MSB of 4 bits for the gray levels programmed and stored in the third group **46** is connected to the third multiplexer group **54** synchronously providing higher 4 bits of the respective gray levels stored in the third group **46**. The third multiplexer group **54** includes a multiplexer for DP **1/4154**, a multiplexer for DP **1/2156**, and a multiplexer for DP **3/4158**. The multiplexer for DP **1/4154** outputs higher 4 bits of the stored gray level 1/4 programmed as a required duty cycle in accordance with the output value of the modular 4-register counter **132**, and the multiplexer for DP **1/2156** outputs higher 4 bits of the stored gray level 1/2 programmed as a required duty cycle in accordance with the

output value of the counter **132**. The multiplexer for DP **3/4158** outputs higher 4 bits of the stored gray level **3/4** programmed as a required duty cycle in accordance with the output value of the counter **132**.

[0049] The modular 3-register counter **134** for determining the MSB of 4 bits for the gray levels programmed and stored in the fourth group **48** is connected to the fourth multiplexer group **56** synchronously providing higher 4 bits of the respective gray levels stored in the fourth group **48**. The fourth multiplexer group **56** includes a multiplexer for DP **1/3160**, and a multiplexer for DP **2/3162**. The multiplexer for DP **1/3160** outputs higher 4 bits of the stored gray level **1/3** programmed as a required duty cycle in accordance with the output value of the modular 3-register counter **134**, and the multiplexer for DP **2/3162** outputs higher 4 bits of the stored gray level **2/3** programmed as a required duty cycle in accordance with the output value of the modular 3-register counter **134**.

[0050] As shown in **FIGS. 2A and 2B**, the dithering pattern values for the gray levels are formed by using the same bit number as a denominator value of the respective gray levels, which minimizes the power consumption by reducing the number of flip-flops.

[0051] FIG. 3 is a block diagram illustrating the modular 7-register counter 128 in FIG. 2A. Since all the modular register counters 128, 130, 132, 134, even including any modular register counter whose number is increased in proportion to the number of groups in the dithering pattern register section 40, have the same circuit configuration, a detailed description for the modular register counters 130, 132, 134 is omitted to avoid the redundancy.

[0052] In the modular 7-register counter **128**, modular 7-frame counter **164** performs counting operation whenever a frame is changed by synchronously responding to frame clock Frame Clock. Modular 7-line counter **166** performs counting operation whenever a line is changed by synchronously responding to line clock Line Clock. Modular 7-pixel counter **168** performs counting operation whenever a pixel is changed by synchronously responding to pixel clock Pixel Clock. A next frame count generating section **170** outputs a value for update to the modular 7-frame counter **164** whenever a frame is changed, in response to an output signal of the frame counter **164**. A next line count generating section **172** outputs a value for update whenever a line is changed, in response to an output signal of the modular 7-line counter **166**. A first multiplexer **174** reiteratively outputs either an initial value received from the modular 7-frame counter **164** whenever a frame is changed or the value for update received from the next line count generating section **172** whenever a line is changed, to the modular 7-line counter **166** in response to a first selection signal SE1. A next pixel

count generating section **176** outputs a value for update whenever a pixel is changed, in response to an output signal of the modular 7-pixel counter **168**. A second multiplexer **178** reiteratively outputs the initial value received from the modular 7-frame counter **164** whenever a frame is changed, an initial value from the modular 7-line counter **166** whenever a line is changed, or the value for update provided from the next pixel count generating section **176** whenever a pixel is changed, to the modular 7-pixel counter **168** in response to second selection signal SE2.

[0053] The next frame count generating section **170** outputs a value increasing whenever a frame is changed, and the next line count generating section **172** outputs a value increasing whenever a line is changed. The next pixel count generating section **176** outputs a value increasing whenever the pixel is changed.

[0054] In the modular register counter having the aforementioned configuration as shown in **FIG. 3**, the value of the modular line counter is updated in the modular pixel counter whenever a line is changed, to eliminate relevance between patterns of the respective lines. Further, for the purpose of eliminating a temporal relation between the patterns, the value of the modular frame counter is updated in the modular line counter and the modular pixel counter whenever a frame is changed. For example, it is assumed that value of the modular frame counter is reset to “0” when a first line of a first frame is started. Then, at the same time the frame clock is generated, and the reset value “0” of the modular frame counter is transferred to the modular line counter and to the modular pixel counter, respectively. Afterward, the modular frame counter is updated to a value for the next frame. Further, after the line clock is generated, value of the modular line counter is updated to a value of the next modular line counter. The modular pixel counter is updated to a value of the next modular pixel counter whenever the pixel clock is generated, and to the value of the line counter after an operation for one line is over.

[0055] Thus, the various counter values allows the duty cycle between frames to be maintained as well as the duty cycle in one line or one program, resulting in temporally and spatially performing the dithering.

[0056] Next, an operational relation of the LCD controller according to a preferred embodiment is explained with reference to the foregoing description.

[0057] A first example is that 80-pixel data having the same gray level is provided on panel. Here, even though pixel array can be constructed in various ways, 16-pixel data is provided per one line in matrix. Further, it is assumed that the provided gray level is “1/7”. Thus, on the panel, programmed data of the gray levels are provided as shown in Table 1 below:

TABLE 1

[illegible]

TABLE 1-continued

	1 st Pixel	2 nd Pixel	3 rd Pixel	4 th Pixel	5 th Pixel	6 th Pixel	7 th Pixel	8 th Pixel	9 th Pixel	10 th Pixel	11 th Pixel	12 th Pixel	13 th Pixel	14 th Pixel	15 th Pixel	16 th Pixel
4 th Line	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7
5 th Line	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7	1/7

[0058] First, it is assumed that 4-pixel data is sequentially provided in each line at one time. The modular 7-register counter **128** is updated to a predetermined value, whenever a pixel is changed, a line is changed, and a frame is changed. In other words, the modular 7-pixel counter **168** is increased by “4” whenever a pixel is changed, and the modular 7-line counter **166** is increased by “3” whenever a line is changed. And the modular 7-frame counter **164** is increased by “2” whenever a frame is changed.

[0059] As described above, the duty cycle value of the dithering pattern for the gray level 1/7 is “0000001”, which is stored in the block **100** of the first group **42** in the dithering pattern register section **40**. It is understandable that the duty cycle values of the dithering patterns for the remaining gray levels are also stored in the corresponding blocks **102-126** in the dithering pattern register section **40**.

[0060] It is assumed that a value of the modular 7-frame counter **164** in the modular 7-register counter **128** is reset to “0” when the first line of the first frame is started. In that case, the reset value “0” of the modular 7-frame counter **164** is transferred in response to the frame clock to the modular 7-line counter **166** and the modular 7-pixel counter **168**, respectively. Thus, the modular 7-line counter **166** and the modular 7-pixel counter **168** respectively output “0”. In this manner, the modular frame, line, and pixel counters in the modular 5-register counter **130**, modular 4-register counter **132**, and modular 3-register counter **134** respectively output the value of “0”.

[0061] Since the system recognizes whether the pixel data for the first 4 pixels on the first line of the first frame is provided, the output values of the modular pixel counters are significant. At this time, the output values of the modular frame counters and the modular line counters are insignificant. The output values of the modular frame and line counters become respectively effective when the line and the frame are changed. In case that only the pixel value is changed, output values of the modular pixel counters are effective. Hence, the modular 7-register counter **128** outputs “0” which is the output value of the modular 7-pixel counter **168**. Likewise, the modular 5-register counter **130**, the modular 4-register counter **132**, and the modular 3-register counter **134** respectively output the value of “0” of the modular 5-pixel counter, of the modular 4-pixel counter, and of the modular 3-pixel counter. As a result, the modular register counters **128**, **130**, **132** and **134** respectively output “0”, so that the MSB of 4 bits (bit field) for a gray level is determined to generate the duty cycle values of the dithering pattern stored in the respective groups **42**, **44**, **46** and **48** of the dithering pattern register section **40**. Thus, the modular 7-register counter **128** determines bit field of the duty cycle values of the respective dithering patterns for gray levels

1/7, 3/7, 4/7, 5/7 and 6/7 stored in the first group **42**, i.e., “0000001”, “1010100”, “0101011”, “1101101” and “0111111”.

[0062] As described above, the 0th values from the left of the values are provided to be determined as the MSB of 4 bits, since the output value of the modular 7-register counter **128** is “0”. In other words, “0” from “0000001”, “1” from “1010100”, “0” from “0101011”, “1” from “1101101”, and “0” from “0111111” are respectively determined as the MSB of the bit field. In the second group **44**, due to the output value “0” of the modular 5-register counter **130**, “1” from “10000”, “0” from “00110”, “0” from “01011”, and “1” from “11101” are respectively determined as the MSB of the bit field. In the third group **46**, “1” from “1000”, “0” from “0110”, and “0” from “0111” are respectively determined as the MSB of the bit field, due to the output value “0” of the modular 4-register counter **132**. And by the output value “0” of the modular 3-register counter **134**, “1” from “100”, and “0” from “011” are respectively determined as the MSB of the bit field in the fourth group **48**.

[0063] The numbers indicated below the groups **42**, **44**, **46** and **48** express that higher 4 bits determined in accordance with the output values of the modular register counters **128**, **130**, **132** and **134** are selected. In the duty cycle “0000001” of the dithering pattern for the gray level 1/7 in the first group **42**, if the modular 7-pixel counter **168** is increased by “4” for the first 4 pixel values in the first line of the first frame, the first pixel is selected from 6th to 3rd bits from the right (6:3). That is, “0000” is selected through the multiplexer for DP 1/7. The second pixel is selected from 2nd to 0th bits and 6th bit from the right (2:0, 6), for the modular 7-pixel counter **168** is increased by “4”. That is, “0010” is selected through the multiplexer for DP 1/7. The third pixel is selected from 5th to 2nd bits from the right (5:2), i.e. “0000” through the multiplexer for DP 1/7, for the modular 7-pixel counter **168** is again increased by “4”. If the modular 7-pixel counter **168** is again increased by “4”, the fourth pixel is selected from the first and 0th bits (1:0) and 6th and 5th bits (6:5) from the right, i.e., “0100” is selected through the multiplexer for the DP 1/7. Each of the pixel values of the selected 4-bit field is finally selected by a selection means to be assigned in a corresponding pixel as one data value. In other words, a first column value “0” from “0000” is assigned in the first pixel, and a second column value “0” from “0010” is assigned in the second pixel. A third column value “0” from “0000” is assigned in the third pixel. A fourth column value “0” from “0100” is assigned in the fourth pixel.

[0064] The multiplexer groups **50**, **52**, **54** and **56** shown in **FIGS. 2A and 2B** select/output a bit field of the higher 4 bits which are determined from output values of the modular register counters **128**, **130**, **132** and **134**. That is, the mul-

plexers in the first multiplexer group **50** select/output 4-bit bit fields for the first group **42**. For example, the multiplexer for DP **1/7136** selects/outputs the value from 6th to 3rd bit, i.e., “0000” from “0000001” that is the duty cycle value of the dithering pattern for the gray level **1/7**. The multiplexer for DP **3/7138** selects/outputs the value from 6th to 3rd bit, i.e., “1010” from “1010100” that is the duty cycle value of the dithering pattern for the gray level **3/7**. The multiplexer for DP **4/7140** selects/outputs the value from 6th to 3rd bit, i.e., “0101” from “0101011” that is the duty cycle value of the dithering pattern for the gray level **4/7**. The multiplexer for DP **5/7142** selects/outputs the value from 6th to 3rd bit, i.e., “1101” from “1101101” that is the duty cycle value of the dithering pattern for the gray level **5/7**. The multiplexer for DP **6/7144** selects/outputs the bit values from 6th to 3rd bit, i.e., “0111” from “011111” that is the duty cycle value of the dithering pattern for the gray level **6/7**.

[0065] The multiplexers in the second multiplexer group **52** select/output 4-bit bit fields for the second group **44**. For example, the multiplexer for DP **1/5146** selects/outputs the value from 4th to 1st bit, i.e., “1000” from “10000” that is the duty cycle value of the dithering pattern for the gray level **1/5**. The multiplexer for DP **2/5148** selects/outputs the value from 4th to 1st bit, i.e., “0011” from “00110” that is the duty cycle value of the dithering pattern for the gray level **2/5**. The multiplexer for DP **3/5150** selects/outputs bit value from 4th to 1st bit, i.e., “0101” from “01011” that is the duty cycle value of the dithering pattern for the gray level **3/5**. The multiplexer for DP **4/5152** selects/outputs the value from 4th to 1st bit, i.e., “1110” from “11101” that is the duty cycle value of the dithering pattern for the gray level **4/5**.

[0066] Further, the multiplexers in the third multiplexer group **54** select/output 4-bit bit fields for the third group **46**. The multiplexer for DP **1/4154** selects/outputs the value from 3rd to 0th bit, i.e., “1000” from “1000” that is the duty cycle value of the dithering pattern for the gray level **1/4**. The multiplexer for DP **1/2156** selects/outputs the value from 3rd to 0th bit, i.e., “0110” from “0110” that is the duty cycle value of the dithering pattern for the gray level **1/2**. The multiplexer for DP **3/4158** selects/outputs the value from 3rd to 0th bit, i.e., “0111” from “011” that is the duty cycle value of the dithering pattern for the gray level **3/4**.

[0067] The multiplexers in the fourth multiplexer group **56** select/output 4-bit bit fields for the fourth group **48**. The multiplexer for DP **1/3160** selects/outputs the value from 2nd to 0th bit and again 2nd bit, i.e., “1001” from “100” that is the duty cycle value of the dithering pattern for the gray level **1/3**. The multiplexer for DP **2/3162** selects/outputs the value from 2nd to 0th bit and again 2nd bit, i.e., “0110” from “011” that is the duty cycle value of the dithering pattern for the gray level **2/3**.

[0068] In this manner, the respective data patterns for the 16 gray levels are assigned in a corresponding pixel on the panel as one bit being finally selected.

[0069] Since all the pixel values are assumed as “1/7” in the invention, as shown in the Table 1, the data patterns relevant to the gray level **1/7** are effective here.

[0070] In the first line in the Table 1, each pixel data is filled with data pattern selected by the multiplexer for DP **1/7** in the first multiplexer group **50**. That is, corresponding column bit values among “0000”, “0010”, “0000”, and

“0100” are respectively assigned to first through fourth pixels in the first line. A third bit value “0” from the right of “0000” is assigned in the first pixel. A second bit value “0” from the right of “0010” is assigned in the second pixel. A first bit value “0” from the right of “0000” is assigned in the third pixel. A 0th bit value “0” from the right of “0100” is assigned in the fourth pixel. Further, corresponding column bit values among “0000”, “1000”, “0001” and “0000” are respectively assigned to fifth through eighth pixels of the first line. A third bit value “0” from the right of “0000” is assigned in the fifth pixel. A second bit value “0” from the right of “1000” is assigned in the sixth pixel. A first bit value “0” from the right of “0001” is assigned in the seventh pixel. A 0th bit value “0” from the right of “0000” is assigned in the eighth pixel. In ninth through twelfth pixels, corresponding column bit values among “0010”, “0600”, “0100”, and “0000” are respectively assigned. In other words, a third bit value “0” from the right of “0010” is assigned in the ninth pixel. A second bit value “0” from the right of “0000” is assigned in the tenth pixel. A first bit value “0” from the right of “0100” is assigned in the eleventh pixel. A 0th bit value “0” from the right of “0000” is assigned in the twelfth pixel. As the counting values are increased by “4” from the former pixels in thirteenth through sixteenth pixels, corresponding column bit values among “1000”, “0001”, “0000”, and “0010” are assigned. That is, a third bit value “1” from the right of “1000” is assigned in the thirteenth pixel. A second bit value “0” from the right of “0001” is assigned in the fourteenth pixel. A first bit value “0” from the right of “0000” is assigned in the fifteenth pixel. A 0th bit value “0” from the right of “0010” is assigned in the sixteenth pixel.

[0071] Next, an output process of the pixel data for the second line is progressed. As described above, the modular pixel counter is increased by “4” whenever the pixel is changed, and the modular line counter is increased by “3” whenever the line is changed. The modular frame counter is increased by “2” whenever the frame is changed. The modular frame counter is reset to an initial value whenever the frame is changed and the modular line counter is reset to an initial value whenever the frame is changed.

[0072] When the line is changed, all the counters are reset to initial values. Thus, the modular 7-frame counter **164**, the modular 7-line counter **166**, and the modular 7-pixel counter **168** respectively output “0”. As the modular 7-line counter **166** is increased by “3” whenever the line is changed, the initial value becomes “3”. The initial value of the modular 7-pixel counter **168** becomes “3”, since the output value “3” of the modular 7-line counter **166** is transferred to the modular 7-pixel counter **168**, as shown in FIG. 3. Briefly, the modular 7-frame counter **164**, the modular 7-line counter **166**, the modular 7-pixel counter **168** respectively output “0”, “3” and “3” as the last initial values. The next operation for the second line formed of 16 pixels is the operation between the pixels, so that the modular 7-pixel counter **168** is increased by “4” whenever the pixel is changed. And the initial values of the modular 7-frame counter **164** and modular 7-line counter **166** are respectively fixed to “0” and “3”.

[0073] Thus, the initial values of the modular 7-register counter **128**, the modular 5-register counter **130**, the modular 4-register counter **132**, and the modular 3-register counter **134** respectively becomes 3 as the initial value of the modular pixel counter. A detailed description of the data

patterns relevant to the modular counters **130**, **132** and **134** are omitted to avoid the redundancy.

[0074] An output relation for the respective pixel data in the second line is progressed in the same manner with that in the first line. The duty cycle value of the dithering pattern of DP **1/7** is increased by “4” whenever a pixel is changed as before without a difference, except that the bit field thereof is determined from the third bit from the left.

[0075] Thus, it will be described herein about data patterns of bit field of 4 bits and last bit values. A detailed description for third, fourth, and fifth lines will be omitted, but how the initial values are changed whenever a line is changed will be explained in detail.

[0076] For the first through fourth pixels in the second line, data pattern is selected/provided with being increased by “4” from the third bit from the left of “0000001”. Thus, “0001”, “0000”, “0010”, and “0000” are selected as the data patterns, and “0”, “0”, “1”, and “0” are respectively provided to the four pixels through a selection means. In the fifth through eighth pixels in the second line, “0100”, “0000”, “1000” and “0001” are selected as the data patterns, and “0”, “0”, “0”, and “1” are respectively provided thereto. In the ninth through twelfth pixels, “0000”, “0010”, “0000”, and “0100” are selected as the data patterns, and “0”, “0”, “0”, and “0” are respectively provided thereto. In the thirteenth through sixteenth pixels in the second line, “0000”, “1000”, “0001” and “0000” are selected as the data patterns, and “0”, “0”, “0”, and “0” are respectively provided thereto.

[0077] In the third line, because of the value “3” of the modular 7-line counter **166** and a value being increased by “3” whenever the line is changed, even though the modular 7-pixel counter **168** is reset, the value of “6” is finally transferred to the modular 7-pixel counter **168**. Thus, the modular 7-register counter **128** has the value “6” as an initial value. As a result, the third line provides data patterns being increased by “4” from the sixth bit from the left of “0000001”. In other words, in the first through fourth pixels

pixels, “0000”, “0100”, “0000” and “1000” are selected as the data patterns, and “0”, “1”, “0”, and “0” are respectively provided thereto. In the ninth through twelfth pixels, “0001”, “0000”, “000”, and “0000” are selected as the data patterns, and “0”, “0”, “1” and “0” are respectively provided thereto. In the thirteenth through sixteenth pixels, “0100”, “0000”, “1000”, and “0001” are selected as the data pattern, and “0”, “0”, “0”, and “1” are respectively provided thereto.

[0078] The modular 7-pixel counter **168** in the fourth line is increased from 2 by 4. Because the duty cycle value of the dithering pattern for the gray level **1/7** is constructed as 7 bits, it is reiterated when the counting value is over 6. Thus, in the first through fourth pixels in the fourth line, “0000”, “1000”, “0001”, and “0000” are selected as the data patterns, and “0”, “0”, “0”, and “0” are respectively provided thereto. In the fifth through eighth pixels, “0010”, “0000”, “0100”, and “0000” are respectively selected as the data patterns, and “0”, “0”, “0”, and “0” are respectively provided thereto. In the ninth through twelfth pixels, “1000”, “0001”, “0000”, and “0010” are respectively selected as the data patterns, and “1”, “0”, “0”, and “0” are respectively provided. In the thirteenth through sixteenth pixels, “0000”, “0100”, “0000”, and “1000” are selected as the data pattern, and “0”, “1”, “0”, and 0” are respectively provided thereto.

[0079] The modular 7-pixel counter **168** in the fifth line is increased from “5” by “4”. Thus, in the first through fourth pixels in the fifth line, “0100”, “0000”, “1000”, and “0001” are selected as the data patterns, and “0”, “0”, “0”, and “1” are respectively provided thereto. In the fifth through eighth pixels, “0000”, “0010”, “0000”, and “0100” are selected as the data patterns, and “0”, “0”, “0”, and “0” are respectively provided thereto. In the ninth through twelfth pixels, “0000”, “1000”, “0001”, and “0000” are selected as the data patterns, and “0”, “0”, “0”, and “0” are respectively provided. In the thirteenth through sixteenth pixels, “0010”, “0000”, “0100”, and “0000” are selected as the data pattern, and “0”, “0”, “0”, and 0” are respectively provided thereto, resulting in completing the operation for 1 frame. As a result, the modular 7-frame counter **164** provides “2”.

[0080] The foregoing output data will be illustrated in Table 2 below:

TABLE 2

	1 st Pixel	2 nd Pixel	3 rd Pixel	4 th Pixel	5 th Pixel	6 th Pixel	7 th Pixel	8 th Pixel	9 th Pixel	10 th Pixel	11 th Pixel	12 th Pixel	13 th Pixel	14 th Pixel	15 th Pixel	16 th Pixel
1 st Line	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0
2 nd Line	0	0	1	0	0	0	0	1	0	0	0	0	0	0	0	0
3 rd Line	1	0	0	0	0	1	0	0	0	0	1	0	0	0	0	1
4 th Line	0	0	0	0	0	0	0	0	1	0	0	0	0	1	0	1
5 th Line	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0

in the third line, “1000”, “0001”, “0000”, and “0010” are selected as the data patterns, and “1”, “0”, “0”, and “0” are respectively provided thereto. In the fifth through eighth

[0081] A second example is shown in Table 3 below. The Table 3 shows a case that 80 pixel arrays are formed and 16 gray levels are randomly provided to the respective pixels.

TABLE 3

	1 st Pixel	2 nd Pixel	3 rd Pixel	4 th Pixel	5 th Pixel	6 th Pixel	7 th Pixel	8 th Pixel	9 th Pixel	10 th Pixel	11 th Pixel	12 th Pixel	13 th Pixel	14 th Pixel	15 th Pixel	16 th Pixel
1 st Line	6/7	4/5	5/7	3/4	2/3	3/5	4/7	1/2	3/7	2/5	1/3	1/4	1/5	1/7	6/7	4/5
2 nd Line	5/7	3/4	2/3	3/5	4/7	1/2	3/7	2/5	1/3	1/4	1/5	1/7	6/7	4/5	5/7	3/4
3 rd Line	2/3	3/5	4/7	1/2	3/7	2/5	1/3	2/4	1/5	1/7	6/7	4/5	5/7	3/4	2/3	3/5
4 th Line	4/7	1/2	3/7	2/5	1/3	1/4	1/5	1/7	6/7	4/5	5/7	3/4	2/3	3/5	4/7	1/2
5 th Line	3/7	2/5	1/3	1/4	1/5	1/7	6/7	4/5	5/7	3/4	2/3	3/5	4/7	1/2	3/7	2/5

[0082] It is assumed that four pixel data are sequentially provided at one time in each line, and a counting value of a corresponding modular register counter is increased by “1” whenever the pixel is changed, by “2” whenever the line is changed, and by “3” whenever the frame is changed. Further, the modular 7-frame counter, modular 5-frame counter, modular 4-frame counter, and modular 3-frame counter respectively in the modular register counters **128**, **130**, **132**, and **134** are reset to the value of “0” when the first line of the first frame is started.

[0083] In this condition, when the frame clock Frame Clock is applied, output value “0” of a modular frame counter is transferred to a modular line counter and a modular pixel counter in each of the modular register counters. Thus, the modular 7-line counter, the modular

5-line counter, the modular 4-line counter, and the modular 3-line counter respectively output the value of “0”. Likewise, the modular 7-pixel counter, the modular 5-pixel counter, the modular 4-pixel counter, and the modular 3-pixel counter respectively outputs the value of “0”.

[0084] In the first line of the first frame, only the pixel is changed, so that the modular register counters **128**, **130**, **132**, and **134** finally output the value 0 which is the output value of the modular pixel counters.

[0085] With reference to the foregoing Table 3, outputs of the modular register counters **128**, **130**, **132**, and **134** are shown in Table 4 below:

TABLE 4

	Modular 7-register Counter	Modular 5-register counter	Modular 4-register counter	Modular 3-register counter
1 st ~4 th Pixel in 1 st Line	0	0	0	0
5 th ~8 th Pixel in 1 st Line	1	1	1	1
9 th ~12 th Pixel in 1 st Line	2	2	2	2
13 th ~16 th Pixel in 1 st Line	3	3	3	0
1 st ~4 th Pixel in 2 nd Line	2	2	2	2
5 th ~8 th Pixel in 2 nd Line	3	3	3	0
9 th ~12 th Pixel in 2 nd Line	4	4	0	1
13 th ~16 th Pixel in 2 nd Line	5	0	1	2
1 st ~4 th Pixel in 3 rd Line	4	4	0	1
5 th ~8 th Pixel in 3 rd Line	5	0	1	2
9 th ~12 th Pixel in 3 rd Line	6	1	2	0
13 th ~16 th Pixel in 3 rd Line	0	2	3	1
1 st ~4 th Pixel in 4 th Line	6	1	2	0
5 th ~8 th Pixel in 4 th Line	0	2	3	1
9 th ~12 th Pixel in 4 th Line	1	3	0	2
13 th ~16 th Pixel in 4 th Line	2	4	1	0
1 st ~4 th Pixel	1	3	0	2

TABLE 4-continued

	Modular 7-register Counter	Modular 5-register counter	Modular 4-register counter	Modular 3-register counter
in 5 th Line				
5 th ~8 th Pixel	2	4	1	0
in 5 th Line				
9 th ~12 th Pixel	3	0	2	1
in 5 th Line				
13 th ~16 th Pixel	4	1	3	2
in 5 th Line				

[0086] With reference to the Tables 3 and 4, output relation of the pixel data for the respective pixels will be explained. First, the output relation of the pixel data for the first through fourth pixels in the first line is as follows.

[0087] The duty cycle values of the dithering pattern for the gray levels 6/7, 4/5, 5/7 and 3/4 stored in the dithering pattern register 40 are respectively "011111", "11101", "1101101", and "0111". Further, the output values of the modular 7-register counter 128, the modular 5-register counter 130, and the modular 4-register counter 132 of the first through fourth pixels in the first line are respectively "0", as shown in the above Table 4. Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from 0th bit from the left in the duty cycle of the dithering pattern. Thus, the data pattern values for the gray levels 6/7, 4/5, 5/7, and 3/4 provided from the multiplexers for DP 6/7144, for DP 4/5152, for DP 5/7142, and for DP 3/4158 are respectively "0111", "1110", "1101", and "0111". The last pixel data value of the first pixel for the gray level 6/7 is "0" of third bit value from the right of "0111". The last pixel data value of the second pixel for the gray level 4/5 is "1" of second bit from the right of "1110". The last pixel data value of the third pixel for the gray level 5/7 is "0" of first bit from the right of "1101". The last pixel data value of the fourth pixel for the gray level 3/4 is "1" of 0th bit from the right of "0111".

[0088] Next, the output relation of the pixel data for the fifth through eighth pixels in the first line is as follows.

[0089] The duty cycle values for the gray levels 2/3, 3/5, 4/7, and 1/2 stored in the dithering pattern register 40 are respectively "011", "01011", "0101011", and "0110". Further, with reference to the Table 4, the output values of the modular 7-register counter 128, the modular 5-register counter 130, the modular 4-register counter 132, and the modular 3-register counter 134 of the fifth through eighth pixels in the first line are respectively 1 (it is assumed that the counting value is increased by "1" whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from 1st bit from the left in the duty cycle of the dithering pattern. Thus, the data pattern values for the gray levels 2/3, 3/5, 4/7, and 1/2 provided from the multiplexers for DP 2/3162, for DP 3/5150, for DP 4/7140, and for DP 1/2156 are respectively "1101", "1011", "1010", and "1100". The last pixel data value of the fifth pixel for the gray level 2/3 is "1" of the third bit value from the right of "1101". The last pixel data value of the sixth pixel for the gray level 3/5 is "0" of second bit from the right of "1011". The last pixel data value of the seventh pixel for the gray level 4/7 is "1" of the first

bit from the right of "1010". The last pixel data value of the eighth pixel for the gray level 1/2 is "0" of the 0th bit from the right of "1100".

[0090] The output relation of the pixel data for the ninth through twelfth pixels in the first line is as follows.

[0091] The duty cycle values of the dithering pattern for the gray level 3/7, 2/5, 1/3, and 1/4 stored in the dithering pattern register 40 are respectively "1010100", "00110", "100", and "1000". Referring to the Table 4, the output values of the modular 7-register counter 128, the modular 5-register counter 130, the modular 4-register counter 132, and the modular 3-register counter 134 of the ninth through twelfth pixels in the first line are respectively "2" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 2nd bit from the left in the duty cycles of the dithering patterns. Thus, the data pattern values for the gray levels 3/7, 2/5, 1/3, and 1/4 provided from the multiplexers for DP 3/7138, for DP 2/5148, for DP 1/3160, and for DP 1/4154 are respectively "1010", "1100", "0100", and "0010". The last pixel data value of the ninth pixel for the gray level 3/7 is "1" of the third bit value from the right of "1010". The last pixel data value of the tenth pixel for the gray level 2/5 is "1" of the second bit from the right of "1100". The last pixel data value of the eleventh pixel for the gray level 1/3 is "0" of the first bit from the right of "0100". The last pixel data value of the twelfth pixel for the gray level 1/4 is "0" of the 0th bit from the right of "0010".

[0092] The output relation of the pixel data for the thirteenth through sixteenth pixels in the first line is as follows.

[0093] The duty cycle values of the dithering pattern for the gray levels 1/5, 1/7, 6/7, and 4/5 stored in the dithering pattern register 40 are respectively "10000", "0000001", "0111111", and "11101". Referring to the Table 4, the output values of the modular 7-register counter 128 and the modular 5-register counter 130 of the thirteenth through sixteenth pixels in the first line are respectively "3" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 3rd bit from the left in the duty cycles of the dithering patterns. Thus, the data pattern values for the gray levels 1/5, 1/7, 6/7, and 4/5 provided from the multiplexers for DP 1/5146, for DP 1/7136, for DP 6/7144, and for DP 4/5152 are respectively "0010", "0001", "1111", and "0111". The last pixel data value of the thirteenth pixel for the gray level 1/5 is "0" of the third bit value from the right of "0010". The last pixel data value of the fourteenth pixel for the gray level 1/7

is "0" of the second bit from the right of "0001". The last pixel data value of the fifteenth pixel for the gray level 6/7 is "1" of the first bit from the right of "1111". The last pixel data value of the sixteenth pixel for the gray level 4/5 is "1" of the 0th bit from the right of "0111".

[0094] Next, the output relation of the pixel data for the first through fourth pixels in the second line is as follows.

[0095] The duty cycle values of the dithering pattern for the gray levels 5/7, 3/4, 2/3, and 3/5 stored in the dithering pattern register 40 are respectively "1101101", "0111", "011", and "01011". Referring to the Table 4, the output values of the modular 7-register counter 128, the modular 5-register counter 130, the modular 4-register counter 132, and the modular 3-register counter 134 of the first through fourth pixels in the second line are respectively "2" (it is assumed that the counter is reset whenever the line is changed, and the counting value is increased by "2"). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 2nd bit from the left in the duty cycles of the dithering patterns. Thus, the data pattern values for the gray levels 5/7, 3/4, 2/3, and 3/5 provided from the multiplexers for DP 5/7142, for DP 3/4158, for DP 2/3162, and for DP 3/5150 are respectively "0110", "1101", "1011", and "0110". The last pixel data value of the first pixel for the gray level 5/7 is "0" of the third bit value from the right of "010". The last pixel data value of the second pixel for the gray level 3/4 is "1" of the second bit from the right of "1101". The last pixel data value of the third pixel for the gray level 2/3 is "1" of the first bit from the right of "1011". The last pixel data value of the fourth pixel for the gray level 3/5 is "0" of the 0th bit from the right of "0110".

[0096] The output relation of the pixel data for the fifth through eighth pixels in the second line is as follows.

[0097] The duty cycle values of the dithering pattern for the gray levels 4/7, 1/2, 3/7, and 2/5 stored in the dithering pattern register 40 are respectively "0101011", "0110", "1010100", and "00110". Referring to the Table 4, the output values of the modular 7-register counter 128, the modular 5-register counter 130, and the modular 4-register counter 132 of the fifth through eighth pixels in the second line are respectively 3 (it is assumed that the counting value is increased by "1" whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 3rd bit from the left in the duty cycles of the dithering patterns. Thus, the data pattern values for the gray levels 4/7, 1/2, 3/7, and 2/5 provided from the multiplexers for DP 4/7140, for DP 1/2156, for DP 3/7138, and for DP 2/5148 are respectively "1011", "0011", "0100", and "1000". The last pixel data value of the fifth pixel for the gray level 4/7 is "1" of the third bit value from the right of "1011". The last pixel data value of the sixth pixel for the gray level 1/2 is "0" of the second bit from the right of "0011". The last pixel data value of the seventh pixel for the gray level 3/7 is "0" of the first bit from the right of "0100". The last pixel data value of the eighth pixel for the gray level 2/5 is "0" of the 0th bit from the right of "1000".

[0098] The output relation of the pixel data for the ninth through twelfth pixels in the second line is as follows.

[0099] The duty cycle values of the dithering pattern for the gray levels 1/3, 1/4, 1/5, and 1/7 stored in the dithering

pattern register 40 are respectively "100", "1000", "10000", and "0000001". Referring to the Table 4, the output values of the modular 7-register counter 128 and the modular 5-register counter 130 are respectively "4" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). The output value of the modular 4-register counter 132 is "1" (it is assumed that the counting value is increased by "1", and the counter 132 can count to "3"). The output value of the modular 3-register counter 134 is "1" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 4th bit from the left in the duty cycles of the dithering patterns for the gray levels 1/7 and 1/5, from the 0th bit for the gray level 1/4, and from the 1st bit for the gray level 1/3. Thus, the data pattern value for the gray level 1/3 is "0010". The data pattern value for the gray level 1/4 is "1000". The data pattern values for the gray levels 1/5 and 1/7 are respectively "0100" and "0010". The last pixel data value of the ninth pixel for the gray level 1/3 is "0" of the third bit value from the right of "0010". The last pixel data value of the tenth pixel for the gray level 1/4 is "0" of the second bit from the right of "1000". The last pixel data value of the eleventh pixel for the gray level 1/5 is "0" of the first bit from the right of "0100". The last pixel data value of the twelfth pixel for the gray level 1/7 is "0" of the 0th bit from the right of "0010".

[0100] The output relation of the pixel data for the thirteenth through sixteenth pixels in the second line is as follows.

[0101] The duty cycle values of the dithering pattern for the gray levels 6/7, 4/5, 5/7, and 3/4 stored in the dithering pattern register 40 are respectively "0111111", "11101", "1101101", and "0111". Referring to the Table 4, the output value of the modular 7-register counter 128 of the thirteenth through sixteenth pixels in the second line is "5" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). The output value of the modular 5-register counter 130 is 0 (it is assumed that the counting value is increased by "1" whenever the pixel is changed, and the counter 130 can count to "4"). The output value of the modular 4-register counter 132 is "1" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). The output value of the modular 3-register counter 134 is "2" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 5th bit from the left in the duty cycles of the dithering patterns for the gray level 6/7, from the 1st bit for the gray level 4/5, from the 1st bit for the gray level 5/7, and from the 2nd bit for the gray level 3/4. Thus, the data pattern value provided from the multiplexer for DP 6/7144 for the gray level 6/7 is "1101". The data pattern value provided from the multiplexer for DP 4/5152 for the gray level 4/5 is "1110". The data pattern value provided from the multiplexer for DP 5/7142 for the gray level 5/7 is "0111". The data pattern value provided from the multiplexer for DP 3/4158 for the gray level 3/4 is "1101". Thus, the last pixel data value of the thirteenth pixel for the gray level 6/7 is "1" of the third bit value from the right of "1101". The last pixel data value of the fourteenth pixel for the gray level 4/5 is "1" of the second bit from the right of "1110". The last pixel data value of the fifteenth pixel for the gray level 5/7 is "1" of the first bit from the right of "011".

The last pixel data value of the sixteenth pixel for the gray level 3/4 is “1” of the 0th bit from the right of “1101”.

[0102] Next, the output relation of the pixel data for the first through fourth pixels in the third line is as follows.

[0103] The duty cycle values of the dithering pattern for the gray levels 2/3, 3/5, 4/7, and 1/2 stored in the dithering pattern register 40 are respectively “011”, “01011”, “0101011”, and “0110”. In the Table 4, the output value of the modular 7-register counter 128 of the first through fourth pixels in the third line is “4” (it is assumed that the counting value is increased by “2” whenever the line is changed). The output value of the modular 5-register counter 130 is “4” (it is assumed that the counting value is increased by “2” whenever the line is changed). The output value of the modular 4-register counter 132 is “0” (it is assumed that the counting value is increased by “2”, and the counter 132 can count to “3”). The output value of the modular 3-register counter 134 is “1” (it is assumed that the counting value is increased by “2” whenever the line is changed, and the counter 134 can count to “2”). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 4th bit from the left in the duty cycles of the dithering patterns for the gray level 2/3, from the 4th bit for the gray level 3/5, from the 0th bit for the gray level 4/7, and from the 1st bit for the gray level 1/2. Thus, the data pattern value provided from the multiplexer for DP 2/3162 for the gray level 2/3 is “1101”. The data pattern value provided from the multiplexer for DP 3/5150 for the gray level 3/5 is “1010”. The data pattern value provided from the multiplexer for DP 4/7 for the gray level 4/7 is “0110”. The data pattern value provided from the multiplexer for DP 1/2 for the gray level 1/2 is “0110”. Thus, the last pixel data value of the first pixel for the gray level 2/3 is “1” of the third bit value from the right of “1101”. The last pixel data value of the second pixel for the gray level 3/5 is “0” of the second bit from the right of “1010”. The last pixel data value of the third pixel for the gray level 4/7140 is “1” of the first bit from the right of “0110”. The last pixel data value of the fourth pixel for the gray level 1/2156 is “0” of the 0th bit from the right of “0110”.

[0104] The output relation of the pixel data for the fifth through eighth pixels in the third line is as follows.

[0105] The duty cycle values of the dithering pattern for the gray levels 3/7, 2/5, 1/3, and 1/4 stored in the dithering pattern register 40 are respectively “1010100”, “00110”, “100”, and “1000”. In the Table 4, the output value of the modular 7-register counter 128 of the fifth through eighth pixels in the third line is “5” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). The output value of the modular 5-register counter 130 is “0” (it is assumed that the counting value is increased by “1” whenever the pixel is changed, and the counter 130 can count to “4”). The output value of the modular 4-register counter 132 is “1” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). The output value of the modular 3-register counter 134 is “2” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 5th bit from the left in the duty cycles of the dithering patterns for the gray level 3/7, from the 0th bit for the gray level 2/5, from the 1st bit for the gray level

1/3, and from the 2nd bit for the gray level 1/4. Thus, the data pattern value provided from the multiplexer for DP 3/7138 for the gray level 3/7 is “0010”. The data pattern value provided from the multiplexer for DP 2/5148 for the gray level 2/5 is “0011”. The data pattern value provided from the multiplexer for DP 1/3160 for the gray level 1/3 is “0010”. The data pattern value provided from the multiplexer for DP 1/4154 for the gray level 1/4 is “0010”. Thus, the last pixel data value of the fifth pixel for the gray level 3/7 is “0” of the third bit value from the right of “0010”. The last pixel data value of the sixth pixel for the gray level 2/5 is “0” of the second bit from the right of “0011”. The last pixel data value of the seventh pixel for the gray level 1/3 is “1” of the first bit from the right of “0010”. The last pixel data value of the eighth pixel for the gray level 1/4 is “0” of the 0th bit from the right of “0010”.

[0106] The output relation of the pixel data for the ninth through twelfth pixels in the third line is as follows.

[0107] The duty cycle values of the dithering pattern for the gray levels 1/5, 1/7, 6/7, and 4/5 stored in the dithering pattern register 40 are respectively “10000”, “0000001”, “0111111”, and “11101”. In the above Table 4, the output value of the modular 7-register counter 128 of the ninth through twelfth pixels in the third line is “6” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). The output value of the modular 5-register counter 130 is “1” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 1st bit from the left in the duty cycles of the dithering patterns for the gray levels 1/5, and from the 6th bit for the gray level 1/7. Thus, the data pattern value provided from the multiplexer for DP 1/5146 for the gray level 1/5 is “0000”. The data pattern value provided from the multiplexer for DP 1/7136 for the gray level 1/7 is “1000”. The data pattern value provided from the multiplexer for DP 6/7144 for the gray level 6/7 is “1011”. The data pattern value provided from the multiplexer for DP 4/5152 for the gray level 4/5 is “1101”. The last pixel data value of the ninth pixel for the gray level 1/5 is “0” of the third bit value from the right of “0000”. The last pixel data value of the tenth pixel for the gray level 1/7 is “0” of the second bit from the right of “1000”. The last pixel data value of the eleventh pixel for the gray level 6/7 is “1” of the first bit from the right of “1011”. The last pixel data value of the twelfth pixel for the gray level 4/5 is “1” of the 0th bit from the right of “1101”.

[0108] The output relation of the pixel data for the thirteenth through sixteenth pixels in the third line is as follows.

[0109] The duty cycle values of the dithering pattern for the gray levels 5/7, 3/4, 2/3, and 3/5 stored in the dithering pattern register 40 are respectively “1101101”, “0111”, “011”, and “01011”. In the above Table 4, the output value of the modular 7-register counter 128 of the thirteenth through sixteenth pixels in the third line is “0” (it is assumed that the counting value is increased by “1” whenever the pixel is changed, and the counter 128 can count to “6”). The output value of the modular 5-register counter 130 is “2” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). The output value of the modular 4-register counter 132 is “3” (it is assumed that the counting value is increased by “1” whenever the pixel is

changed). The output value of the modular 3-register counter **134** is “1” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in **FIGS. 2A and 2B** are four bits from the 0th bit from the left in the duty cycles of the dithering patterns for the gray level **5/7**, from the 3rd bit for the gray level **3/4**, from the 1st bit for the gray level **2/3**, and from the 3rd bit for the gray level **3/5**. Thus, the data pattern value provided from the multiplexer for DP **5/7142** for the gray level **5/7** is “1101”. The data pattern value provided from the multiplexer for DP **3/4158** for the gray level **3/4** is “1011”. The data pattern value provided from the multiplexer for DP **2/3162** for the gray level **2/3** is “1101”. The data pattern value provided from the multiplexer for DP **3/5150** for the gray level **3/5** is “0110.” Thus, the last pixel data value of the thirteenth pixel for the gray level **5/7** is “1” of the third bit value from the right of “1101”. The last pixel data value of the fourteenth pixel for the gray level **3/4** is “0” of the second bit from the right of “1011”. The last pixel data value of the fifteenth pixel for the gray level **2/3** is “0” of the first bit from the right of “1101”. The last pixel data value of the sixteenth pixel for the gray level **3/5** is “0” of the 0th bit from the right of “0110”.

[0110] Next, the output relation of the pixel data for the first through fourth pixels in the fourth line is as follows.

[0111] The duty cycle values of the dithering pattern for the gray levels **4/7**, **1/2**, **3/7**, and **2/5** stored in the dithering pattern register **40** are respectively “0101011”, “0110”, “1010100”, and “00110”. In the Table 4, the output value of the modular 7-register counter **128** of the first through fourth pixels in the fourth line is “6” (it is assumed that the counter is reset whenever the line is changed, and the counting value is increased by “2”). The output value of the modular 5-register counter **130** is “1” (it is assumed that the counter is reset whenever the line is changed, and the counting value is increased by “2”). And the output value of the modular 4-register counter **132** is “2” (it is assumed that the counter is reset whenever the line is changed, and the counting value is increased by “2”). Briefly, the data pattern values provided from the multiplexers shown in **FIGS. 2A and 2B** are four bits from the 6th bit from the left in the duty cycles of the dithering patterns for the gray level **4/7**, from the 2nd for the gray level **1/2**, from the 6th bit for the gray level **3/7**, and from the 1st bit for the gray level **2/5**. Thus, the data pattern value for the gray level **4/7** provided from the multiplexer for DP **4/7140** is “1010”. The data pattern value provided from the multiplexer for DP **1/2156** for the gray level **1/2** is “1001”. The data pattern value provided from the multiplexer for DP **3/7138** for the gray level **3/7** is “0101”. The data pattern value provided from the multiplexer for DP **2/5148** for the gray level **2/5** is “0110”.

[0112] Thus, the last pixel data value of the first pixel for the gray level **4/7** is “1” of the third bit value from the right of “1010”. The last pixel data value of the second pixel for the gray level **1/2** is “0” of the second bit from the right of “1001”. The last pixel data value of the third pixel for the gray level **3/7** is “0” of the first bit from the right of “0101”. The last pixel data value of the fourth pixel for the gray level **2/5** is “0” of the 0th bit from the right of “0110”.

[0113] The output relation of the pixel data for the fifth through eighth pixels in the fourth line is as follows.

[0114] The duty cycle values of the dithering patterns for the gray levels **1/3**, **1/4**, **1/5**, and **1/7** stored in the dithering

pattern register **40** are respectively “100”, “1000”, “10000”, and “0000001”. In the Table 4, the output value of the modular 7-register counter **128** of the fifth through eighth pixels in the fourth line is “0” (it is assumed that the counting value is increased by “1” whenever the pixel is changed, and the counter **128** can count to “6”). The output value of the modular 5-register counter **130** is “2” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). The output value of the modular 4-register counter **132** is “3” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). An output value of the modular 3-register counter **134** is “1” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in **FIGS. 2A and 2B** are four bits from the 1st bit from the left in the duty cycles of the dithering patterns for the gray level **1/3**, from the 3rd bit for the gray level **1/4**, from the 2nd bit for the gray level **1/5**, and from the 0th bit for the gray level **1/7**. Thus, the data pattern value provided from the multiplexer for DP **1/3160** for the gray level **1/3** is “0010”. The data pattern value provide from the multiplexer for DP **1/4154** for the gray level **1/4** is “0100”. The data pattern value provided from the multiplexer for DP **1/5146** for the gray level **1/5** is “0001”. The data pattern value provided from the multiplexer for DP **1/7136** for the gray level **1/7** is “0000”. Thus, the last pixel data value of the fifth pixel for the gray level **1/3** is “0” of the third bit value from the right of “0010”. The last pixel data value of the sixth pixel for the gray level **1/4** is “1” of the second bit from the right of “0100”. The last pixel data value of the seventh pixel for the gray level **1/5** is “0” of the first bit from the right of “0001”. The last pixel data value of the eighth pixel for the gray level **1/7** is “0” of the 0th bit from the right of “0000”.

[0115] The output relation of the pixel data for the ninth through twelfth pixels in the fourth line is as follows.

[0116] The duty cycle values of the dithering pattern for the gray levels **6/7**, **4/5**, **5/7**, and **3/4** stored in the dithering pattern register **40** are respectively “0111111”, “11101”, “1101101” and “0111”. In the Table 4, the output value of the modular 7-register counter **128** of the ninth through twelfth pixels in the fourth line is “1” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). An output value of the modular 5-register counter **130** is “3” (it is assumed that the counting value is increased by “1” whenever the pixel is increased). An output value of the modular 4-register counter **132** is “0” (it is assumed that the counting value is increased by “1”, and the counter **132** can count to “3”). Briefly, the data pattern values provided from the multiplexers shown in **FIGS. 2A and 2B** are four bits from the 1st bit from the left in the duty cycles of the dithering patterns for the gray level **6/7**, from the 3rd bit for the gray level **4/5**, from the 1st bit for the gray level **5/7**, and from the 0th bit for the gray level **3/4**. Thus, the data pattern value provided from the multiplexer for DP **6/7144** for the gray level **6/7** is “1111”. The data pattern value provided from the multiplexer for DP **4/5152** for the gray level **4/5** is “0111”. The data pattern value provided from the multiplexer for DP **5/7142** for the gray level **5/7** is “1011”. The data pattern value provided from the multiplexer for DP **3/4158** for the gray level **3/4** is “0111”. Thus, the last pixel data value of the ninth pixel for the gray level **6/7** is “1” of the third bit value from the right of “1111”. The last pixel data value of the tenth pixel for the gray level **4/5** is “1” of

the second bit from the right of "0111". The last pixel data value of the eleventh pixel for the gray level 5/7 is "1" of the first bit from the right of "1011". The last pixel data value of the twelfth pixel for the gray level 3/4 is "1" of the 0th bit from the right of "0111".

[0117] The output relation of the pixel data for the thirteenth through sixteenth pixels in the fourth line is as follows.

[0118] The duty cycle values of the dithering pattern for the gray levels 2/3, 3/5, 4/7, and 1/2 stored in the dithering pattern register 40 are respectively "011", "01011", "0101011", and "0110". In the Table 4, the output value of the modular 7-register counter 128 of the thirteenth through sixteenth pixels in the fourth line is "2" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). The output value of the modular 5-register counter 130 is "4" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). The output value of the modular 4-register counter 132 is "1" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). The output value of the modular 3-register counter 134 is "0" (it is assumed that the counting value is increased by "1" whenever the pixel is changed, and the counter 134 can count to "2"). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 0th bit from the left in the duty cycles of the dithering patterns for the gray level 2/3, from the 4th bit for the gray level 3/5, from the 2nd bit for the gray level 4/7, and from the 1st bit for the gray level 1/2. Thus, the data pattern value provided from the multiplexer for DP 2/3162 for the gray level 2/3 is "0110". The data pattern value provided from the multiplexer for DP 3/5150 for the gray level 3/5 is "1010". The data pattern value provided from the multiplexer for DP 4/7140 for the gray level 4/7 is "0101". The data pattern value provided from the multiplexer for DP 1/2156 for the gray level 1/2 is "1100". Thus, the last pixel data value of the thirteenth pixel for the gray level 2/3 is "0" of the third bit value from the right of "0110". The last pixel data value of the fourteenth pixel for the gray level 3/5 is "0" of the second bit from the right of "1010". The last pixel data value of the fifteenth pixel for the gray level 4/7 is "0" of the first bit from the right of "0101". The last pixel data value of the sixteenth pixel for the gray level 1/2 is "0" of the 0th bit from the right of "1100".

[0119] Next, the output relation of the pixel data for the first through fourth pixels in the fifth line is as follows.

[0120] The duty cycle values of the dithering pattern for the gray levels 3/7, 2/5, 1/3, and 1/4 stored in the dithering pattern register 40 are respectively "1010100", "00110", "100", and "1000". In the Table 4, the output value of the modular 7-register counter 128 of the first through fourth pixels in the fifth line is "1" (it is assumed that the counter which can count to "6" is reset whenever the line is changed, and counting value is increased by "2"). An output value of the modular 5-register counter 130 is "3" (it is assumed that the counter is reset whenever the line is changed, and counting value is increased by "2"). The output value of the modular 4-register counter 132 is "0" (it is assumed that the counter which can count to "3" is reset whenever the line is changed, and counting value is increased by "2"). The output value of the modular 3-register counter 134 is "2" (it is assumed that the counter is reset whenever the line is

changed, and counting value is increased by "2"). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 1st bit from the left in the duty cycles of the dithering patterns for the gray level 3/7, from the 3rd bit for the gray level 2/5, from the 0th bit for the gray level 1/3, and from the 2nd bit for the gray level 1/4. Thus, the data pattern value for the gray level 3/7 provided from the multiplexer for DP 3/7138 is "0101". The data pattern value provided from the multiplexer for DP 2/5148 for the gray level 2/5 is "1000". The data pattern value provided from the multiplexer for DP 1/3160 for the gray level 1/3 is "0100". The data pattern value provided from the multiplexer for DP 1/4154 for the gray level 1/4 is "1000". Thus, the last pixel data value of the first pixel for the gray level 3/7 is "0" of the third bit value from the right of "0101". The last pixel data value of the second pixel for the gray level 2/5 is "0" of the second bit from the right of "1000". The last pixel data value of the third pixel for the gray level 1/3 is "0" of the first bit from the right of "0100". The last pixel data value of the fourth pixel for the gray level 1/4 is "0" of the 0th bit from the right of "1000".

[0121] The output relation of the pixel data for the fifth through eighth pixels in the fifth line is as follows.

[0122] The duty cycle values of the dithering patterns for the gray levels 1/5, 1/7, 6/7, and 4/5 stored in the dithering pattern register 40 are respectively "10000", "0000001", "0111111", and "11101". In the Table 4, the output value of the modular 7-register counter 128 of the fifth through eighth pixels in the fifth line is "2" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). The output value of the modular 5-register counter 130 is "4" (it is assumed that the counting value is increased by "1" whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in FIGS. 2A and 2B are four bits from the 4th bit from the left in the duty cycles of the dithering patterns for the gray level 1/5, from the 2nd bit for the gray level 1/7, from the 2nd bit for the gray level 6/7, and from the 4th bit for the gray level 4/5. Thus, the data pattern value provided from the multiplexer for DP 1/5146 for the gray level 1/5 is "0100". The data pattern value provided from the multiplexer for DP 1/7136 for the gray level 1/7 is "0000". The data pattern value provided from the multiplexer for DP 6/7144 for the gray level 6/7 is "1111". The data pattern value provided from the multiplexer for DP 4/5152 for the gray level 4/5 is "111". Thus, the last pixel data value of the fifth pixel for the gray level 1/5 is "0" of the third bit value from the right of "0100". The last pixel data value of the sixth pixel for the gray level 1/7 is "0" of the second bit from the right of "0000". The last pixel data value of the seventh pixel for the gray level 6/7 is "1" of the first bit from the right of "1111". The last pixel data value of the eighth pixel for the gray level 4/5 is "1" of the 0th bit from the right of "1111".

[0123] The output relation of the pixel data for the ninth through twelfth pixels in the fifth line is as follows.

[0124] The duty cycle values of the dithering pattern for the gray levels 5/7, 3/4, 2/3, and 3/5 stored in the dithering pattern register 40 are respectively "1101101", "0111", "011", and "01011". In the Table 4, the output value of the modular 7-register counter 128 of the ninth through twelfth pixels in the fifth line is "3" (it is assumed that the counting value is increased by "1" whenever the pixel is changed).

The output value of the modular 5-register counter **130** is “0” (it is assumed that the counting value is increased by “1” whenever the pixel is increased, and the counter **130** can count to “4”). The output value of the modular 4-register counter **132** is “2” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in **FIGS. 2A and 2B** are four bits from the 3rd bit from the left in the duty cycles of the dithering patterns for the gray level **5/7**, from the 2nd bit for the gray level **3/4**, from the 1st bit for the gray level **2/3**, and from the 0th bit for the gray level **3/5**. Thus, the data pattern value provided from the multiplexer for DP **5/7142** for the gray level **5/7** is “1101”. The data pattern value provided from the multiplexer for DP **3/4158** for the gray level **3/4** is “1101”. The data pattern value provided from the multiplexer for DP **2/3162** for the

multiplexer for DP **1/2156** for the gray level **1/2** is “0011”. The data pattern value provided from the multiplexer for DP **3/7138** for the gray level **3/7** is “1001”. The data pattern value provided from the multiplexer for DP **2/5148** for the gray level **2/5** is “0110”. Thus, the last pixel data value of the thirteenth pixel for the gray level **4/7** is “0” of the third bit value from the right of “0110”. The last pixel data value of the fourteenth pixel for the gray level **1/2** is “0” of the second bit from the right of “0011”. The last pixel data value of the fifteenth pixel for the gray level **3/7** is “0” of the first bit from the right of “1001”. The last pixel data value of the sixteenth pixel for the gray level **2/5** is “0” of the 0th bit from the right of “0110”.

[0127] The foregoing output relation of the pixel data is summarized in Table 5 below:

TABLE 2

	1 st Pixel	2 nd Pixel	3 rd Pixel	4 th Pixel	5 th Pixel	6 th Pixel	7 th Pixel	8 th Pixel	9 th Pixel	10 th Pixel	11 th Pixel	12 th Pixel	13 th Pixel	14 th Pixel	15 th Pixel	16 th Pixel
1 st Line	0	1	0	1	1	0	1	0	1	1	0	0	0	0	1	1
2 nd Line	0	1	1	0	1	0	0	0	0	0	0	0	1	1	1	1
3 rd Line	1	0	1	0	0	0	1	0	0	0	1	1	1	0	0	0
4 th Line	1	0	0	0	0	1	0	0	1	1	1	1	0	0	0	0
5 th Line	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0

gray level **2/3** is “1101”. The data pattern value provided from the multiplexer for DP **3/5150** for the gray level **3/5** is “0101”. Thus, the last pixel data value of the ninth pixel for the gray level **5/7** is “1” of the third bit value from the right of “1101”. The last pixel data value of the tenth pixel for the gray level **3/4** is “1” of the second bit from the right of “1101”. The last pixel data value of the eleventh pixel for the gray level **2/3** is “0” of the first bit from the right of “1101”. The last pixel data value of the twelfth pixel for the gray level **3/5** is “1” of the 0th bit from the right of “0101”.

[0125] The output relation of the pixel data for the thirteenth through sixteenth pixels in the fifth line is as follows.

[0126] The duty cycle values of the dithering pattern for the gray levels **4/7**, **1/2**, **3/7**, and **2/5** stored in the dithering pattern register **40** are respectively “0101011”, “0110”, “1010100”, and “00110”. In the Table 4, the output value of the modular 7-register counter **128** of the thirteenth through sixteenth pixels in the fifth line is “4” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). The output value of the modular 5-register counter **130** is “1” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). The output value of the modular 4-register counter **132** is “3” (it is assumed that the counting value is increased by “1” whenever the pixel is changed). Briefly, the data pattern values provided from the multiplexers shown in **FIGS. 2A and 2B** are four bits from the 4th bit from the left in the duty cycles of the dithering patterns for the gray level **4/7**, from the 3rd bit for the gray level **1/2**, from the 4th bit for the gray level **3/7**, and from the 1st bit for the gray level **2/5**. Thus, the data pattern value provided from the multiplexer for DP **4/7140** for the gray level **4/7** is “0110”. The data pattern value provided from the

[0128] To sum up, the dithering pattern register for the respective gray levels is formed using the same bit number as a denominator value. Thus, the number of flip-flops required for dithering the gray levels can be reduced, so that the physical (hardware) size of the dithering pattern register can be minimized.

[0129] Further, an overall power consumption for the chip can be minimized. For 16 gray levels employed in the foregoing first and second examples, a required number of the flip-flops is 73 (7×5+5×4+4×3+3×2), which is ¼ of the flip-flops required in the conventional mechanism. The duty cycle is spatially maintained in one line or one frame by varying the bit field through the modular register counter. Moreover, the dithering can be temporally performed by maintaining the duty cycle between the frames.

[0130] As described above, mechanism of the present invention where a size of the dithering pattern register which stores plural gray levels is minimized is applicable to a picture data output system including an LCD controller, so that the physical (hardware) cost and power consumption thereof are reduced.

[0131] Although the preferred embodiments of the present invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as described in the accompanying claims.

What is claimed is:

1. A liquid crystal display (LCD) controller generating control signals for displaying in response to pixel data to

display pictures on a liquid crystal panel having a plurality of pixels, the liquid crystal display controller comprising:

- a dithering pattern register section for storing binary data of gray levels, wherein a certain number of gray levels have a same bit number as denominator values of the certain number of gray levels;

- modular register counters for performing counting operation to determine a binary value of most significant bit of each of the gray levels in response to a frame clock, a line clock, and a pixel clock;

- multiplexers for generating data patterns for the respective gray levels in accordance with an output of the respective modular register counters; and

- a selection means for selecting and generating a corresponding bit of a data pattern corresponding to the pixel data provided on a LCD panel among the data patterns.

2. The liquid crystal display controller of claim 1, wherein the dithering pattern register section forms dithering patterns by dividing the gray levels into groups each having a same denominator value.

3. The liquid crystal display controller of claim 1, wherein the dithering pattern register section is programmed to store the binary data as much as duty cycles for the respective gray levels using predetermined numbers as denominator values of the gray levels.

4. The liquid crystal display controller of claim 1, wherein each of the modular register counters comprises:

- a modular frame counter for performing counting operation whenever a frame is changed in response to the frame clock;

- a modular line counter for performing counting operation whenever a line of the frame is changed in response to the line clock;

- a modular pixel counter for performing counting operation whenever a pixel of the line is changed in response to the pixel clock;

- a next frame counter for generating a first update value to the modular frame counter in response to an output signal of the modular frame counter so that a current value in the modular frame counter is updated whenever the frame is changed;

- a next line counter for generating a second update value in response to an output signal of the modular line counter;

- a first multiplexer for selectively generating an initial value of the modular frame counter or the second update value provided from the next line counter to the modular line counter in response to a first selection signal;

- a next pixel counter for generating a third update value whenever the pixel is changed in response to an output signal of the modular pixel counter; and

- a second multiplexer for selectively generating the initial value of the modular frame counter, an initial value of the modular line counter, or the third update value provided from the next pixel counter to the modular pixel counter in response to a second selection signal.

5. The liquid crystal display controller of claim 4, wherein the modular frame counter, the modular line counter, and the modular pixel counter perform the counting operations in synchronization with the frame clock, the line clock, and the pixel clock, respectively.

6. The liquid crystal display controller of claim 4, wherein the next frame counter increases the first update value whenever the frame is changed, the next line counter increases the second update value whenever the line is changed, and the next pixel counter increases the third update value whenever the pixel is changed.

7. The liquid crystal display controller of claim 1, wherein the modular frame counter, the modular line counter, and the modular pixel counter are initialized to a predetermined value whenever the frame is changed, the line is changed, and the pixel is changed, respectively.

8. A method for performing a dithering and frame rate control in a liquid crystal display controller generating control signals for displaying in response to pixel data to display pictures on a liquid crystal panel having a plurality of pixels, the method comprising the steps of:

- storing binary data of gray levels in dithering pattern registers using a same bit number as denominator values of the gray levels;

- performing counting operation to determine a binary value of most significant bit of the respective gray levels;

- generating data patterns for the gray levels based on the binary value of most significant bit; and

- selecting and generating a corresponding bit of a data pattern corresponding to the pixel data.

9. The method of claim 8, wherein the step of performing counting operation comprises the steps of:

- performing counting operation whenever a frame is changed in response to a frame clock;

- performing counting operation whenever a line of the frame is changed in response to a line clock;

- performing counting operation whenever a pixel of the line is changed in response to a pixel clock;

- providing a first update value whenever the frame is changed to update a current value for the counting operation in response to the frame clock;

- providing a second update value whenever the line is changed in response to a result of the counting operation in response to the line clock;

- selectively providing an initial value for the counting operation in response to the frame clock or the second update value, to update a current value for the counting operation in response to the line clock;

- providing a third update value in response to a result of the counting operation in response to the pixel clock whenever the pixel is changed; and

- selectively providing the initial value for the counting operation in response to the frame clock, an initial value for the counting operation in response to the line clock, or the third update value, to update a current value for the counting operation in response to the pixel clock.

10. The method of claim 9, wherein the counting operations are performed in synchronization with the frame, line, and pixel clocks.

11. The method of claim 9, wherein the first update value is increased whenever the frame is changed, the second update value is increased whenever the line is changed, and the third update value is increased whenever the pixel is changed.

12. The method of claim 9, wherein the initial value for the counting operation in response to the frame clock is

initialized to a predetermined value whenever the frame is changed.

13. The method of claim 9, wherein the initial value for the counting operation in response to the line clock is initialized to a predetermined value whenever the line is changed.

14. The method of claim 9, wherein an initial value for the counting operation in response to the pixel clock is initialized to a predetermined value whenever the pixel is changed.

* * * * *

专利名称(译)	具有改进的抖动和帧速率控制的液晶显示控制器及其方法		
公开(公告)号	US20030030611A1	公开(公告)日	2003-02-13
申请号	US09/894062	申请日	2001-06-28
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	KIM HONG KYU LIM KYUNG MOOK		
发明人	KIM, HONG-KYU LIM, KYUNG-MOOK		
IPC分类号	G09G3/20 G09G3/36		
CPC分类号	G09G3/2025 G09G3/2051 G09G3/2077 G09G3/3611		
优先权	1020010016193 2001-03-28 KR		
其他公开文献	US6864870		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种液晶显示 (LCD) 控制器及其方法, 该控制器具有改进的抖动和帧速率控制以降低物理 (硬件) 成本和功耗。 LCD 控制器利用最小化抖动模式寄存器的大小的机制, 该抖动模式寄存器存储多个灰度级。通过使用与多个灰度级的分母值相同的比特数来确定各个灰度级的占空比值。 LCD 控制器包括用于存储多个灰度级的抖动模式寄存器部分, 用于执行计数操作以确定各个灰度级的最高有效位的二进制值的模块化寄存器计数器, 用于根据相应灰度级产生数据模式的多路复用器。具有相应模块寄存器计数器的输出; 选择装置, 用于选择和产生与 LCD 面板上提供的像素数据相对应的数据模式的相应位。

