



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
16.07.2014 Bulletin 2014/29

(51) Int Cl.:
G02F 1/1343 (2006.01)

(21) Application number: **12787344.6**

(86) International application number:
PCT/CN2012/081017

(22) Date of filing: **05.09.2012**

(87) International publication number:
WO 2013/034077 (14.03.2013 Gazette 2013/11)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(72) Inventor: **SUZUKI, Teruaki**
Beijing 100176 (CN)

(30) Priority: **06.09.2011 CN 201110262823**

(74) Representative: **Brötz, Helmut et al**
Rieder & Partner
Patentanwälte - Rechtsanwalt
Corneliusstrasse 45
42329 Wuppertal (DE)

(71) Applicant: **Boe Technology Group Co. Ltd.**
Beijing 100015 (CN)

(54) **LIQUID CRYSTAL DISPLAY PANEL AND LIQUID CRYSTAL DISPLAY**

(57) A liquid crystal display panel and a liquid crystal display are disclosed. The liquid crystal display panel comprises: a first substrate and a second substrate, disposed opposite to each other to form a cell, as well as a liquid crystal layer between the two substrates. On the first substrate, there is formed with a first common electrode and a pixel electrode, arranged at an interval; on

the second substrate, there is formed with a set of layers, the set of layers comprising: a second common electrode, and a dielectric layer covering one side of the second common electrode facing the first substrate; and the structure of the set of layers is different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode.

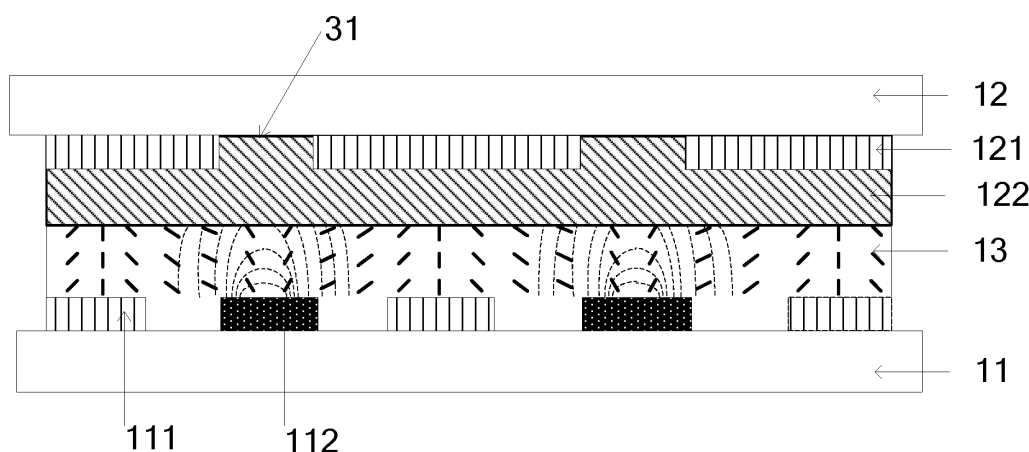


FIG.4

Description

TECHNICAL FIELD

[0001] The present disclosure relates to a liquid crystal display panel and a liquid crystal display.

BACKGROUND

[0002] As shown in FIG. 1, a vertical alignment (VA) liquid crystal display panel comprises: an array substrate 01 and a color-filter substrate 02, disposed opposite to each other to form a cell, as well as a liquid crystal layer 13 between the two substrates; the liquid crystal molecules in the liquid crystal layer 13 is arranged vertically.

[0003] With reference to the VA liquid crystal display panel shown in FIG. 1, on the array substrate 01, there are formed with a first common electrode 111 and a pixel electrode 112, and both the electrodes 111, 112 are arranged at an interval; on the color-filter substrate 02, there is formed with a second common electrode 121. When power is supplied, oblique electric fields are formed among the three electrodes, the liquid crystal molecules under the effect of the two electric fields deviate from their vertical positions to be in a tilted manner, so that the liquid crystal display panel is enabled to let light pass; however, a part of the liquid crystal molecules in the upper-layer (the liquid crystal layer near the color-filter substrate)-because the distance from the pixel electrode is large and thus the electric force is reduced-deviate from their vertical positions by smaller angles, and this will lead to a lower light-transmittance of the liquid crystal display panel.

[0004] In order to improve the light-transmittance of such liquid crystal display panel, as shown in FIG. 2, in the prior art, if the thickness of the liquid crystal display panel is unchanged, a transparent dielectric layer 122 is formed on the color-filter substrate to cover the second common electrode 121. The dielectric layer 122 can increase the proportion of the horizontal electric field with respect to the vertical electric field, so that the tilt degrees of the liquid crystal molecules are increased, thereby improving the light-transmittance of the panel to a certain extent. The present disclosure provides another scheme of a liquid crystal display panel.

SUMMARY

[0005] According to the embodiments of the present disclosure, there is provided a liquid crystal display panel, comprising: a first substrate and a second substrate, disposed opposite to each other to form a cell, as well as a liquid crystal layer between the two substrates. On the first substrate, there is formed with a first common electrode and a pixel electrode, arranged at an interval. On the second substrate, there is formed with a set of layers, the set of layers comprising: a second common electrode, and a dielectric layer covering one side of the sec-

ond common electrode facing the first substrate. The structure of the set of layers is different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode.

[0006] In some examples, the structure of the set of layers being different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode comprises the case in which:

[0007] the dielectric layer in the set of layers comprises: a first dielectric unit and a second dielectric unit, arranged at an interval and closely linked to each other; the first dielectric unit is located at a position directly opposite to the first common electrode, and the second dielectric unit is located at a position directly opposite to the pixel electrode; and the dielectric constant of the first dielectric unit is greater than that of the second dielectric unit.

[0008] Preferably, a width of the first dielectric unit is consistent with a width of the second dielectric unit.

[0009] In some other examples, the structure of the set of layers being different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode comprises the case in which:

[0010] on the second common electrode in the set of layers, there is formed with a slit, and the slit is located at a position directly opposite to the pixel electrode.

[0011] Preferably, a width of the slit is consistent with a width of the pixel electrode.

[0012] In some further examples, the structure of the set of layers being different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode comprises the case in which:

[0013] the second common electrode in the set of layers is in a concave-convex shape, the distance between a concave-shaped portion of the second common electrode and the first substrate is smaller than the distance between a convex-shaped portion of the second common electrode and the first substrate; and the concave-shaped portion of the second common electrode is located at a position directly opposite to the first common electrode, and the convex-shaped portion of the second common electrode is located at a position directly opposite to the pixel electrode.

[0014] Preferably, a width of the concave-shaped portion of the second common electrode is consistent with a width of the first common electrode.

[0015] Furthermore, the convex-shaped portion of the second common electrode may be formed with a slit, and the slit is located at a position directly opposite to the pixel electrode. Preferably, a width of the slit is consistent with a width of the pixel electrode.

[0016] According to some other embodiments of the present disclosure, there is provided a liquid crystal display comprising: a liquid crystal display panel as previously described, and a backlight source providing back-

light for the liquid crystal display panel.

[0017] In the liquid crystal display panel and the liquid crystal display provided by the embodiments of the present disclosure, the structure of the set of layers is different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode, so that the liquid crystal molecules in the liquid crystal layer-after being supplied with power-deviate from their vertical positions under the effect of electric fields, enabling the liquid crystal display panel to be light-transmissive, and thereby realizing the display function of the liquid crystal display panel.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] In order to clearly illustrate the technical solutions in the embodiments of the present disclosure or in the prior art, the drawings needed in describing the embodiments or the prior art will be briefly described in the following; it is obvious that the drawings described as follows are merely some embodiments of the present disclosure. Based on these accompany drawings, those ordinary skilled in the art can obtain other drawings, without any inventive work.

FIG. 1 is a schematic view of a liquid crystal display panel in the prior art;

FIG. 2 is a schematic view of another liquid crystal display panel in the prior art;

FIG. 3 is a schematic view of a liquid crystal display panel provided in the first embodiment;

FIG. 4 is a schematic view of a liquid crystal display panel provided in the second embodiment;

FIG. 5 is a schematic view of another liquid crystal display panel provided in the second embodiment;

FIG. 6 is a schematic view of a liquid crystal display panel provided in the third embodiment;

FIG. 7 is a schematic view of a liquid crystal display panel provided in the third embodiment in the first implementation;

FIG. 8 is a schematic view of a liquid crystal display panel provided in the third embodiment in the second implementation; and

FIG. 9 is a schematic view of another liquid crystal display panel provided in the third embodiment in the second implementation.

Reference numerals

[0019]

01 - Array substrate, 02 - Color-filter substrate;

11 - First substrate, 12 - Second substrate, 13 - Liquid crystal layer;

111 - First common electrode, 112 - Pixel electrode, 121 - Second common electrode, 122 - Dielectric layer;

31 - Slits on the second common electrode, 41 - Con-

cave-shaped portion of second common electrode, 42 - Convex-shaped portion of second common electrode, 43 - Slits on the convex-shaped portion of second common electrode, 61 - First dielectric unit, 62 - Second dielectric unit.

DETAILED DESCRIPTION

[0020] Below, the technical solutions in the embodiments of the present disclosure will be described in a clearly and fully understandable way, in connection with the accompanying drawings in the embodiments of the present disclosure. It is obvious that, the described embodiments are only a part but not all of the embodiments of the present disclosure. Based on the embodiments in the present disclosure, those ordinary skilled in the art can obtain all other embodiment(s), without any inventive work, which should belong to the protection scope as claimed.

[0021] The liquid crystal display panels in all embodiments of the present disclosure may be VA-IPF liquid crystal display panels. Among them, before a VA liquid crystal display panel being supplied with power, the liquid crystal molecules are arranged vertically. IPF (In-Plane Field) refers to the case in which a liquid crystal display panel mainly utilizes a horizontal electric field to drive liquid crystal molecules to deflect in a vertical plane so as to achieve the light-transmission of the panel and thus the display function of the panel. The present disclosure refers to a liquid crystal display panel with these two features of both VA and IPF as a VA-IPF liquid crystal display panel.

First Embodiment:

[0022] As shown in FIG. 3, this embodiment provides a liquid crystal display panel, which comprises: a first substrate 11 and a second substrate 12, disposed opposite to each other to form a cell, as well as a liquid crystal layer 13 between the two substrates. On the first substrate, there is formed with a first common electrode 111 and a pixel electrode 112, arranged at an interval. On the second substrate, there is formed with a set of layers, the set of layers comprising: a second common electrode 121 and a dielectric layer 122 covering the side of the second common electrode 121 facing the first substrate 11. The structure of the set of layers is different at a position directly opposite to the first common electrode 111 from that at a position directly opposite to the pixel electrode 112.

[0023] Typically, the first substrate is an array substrate, and the second substrate is a color-filter substrate.

[0024] Among them, in the case of the liquid crystal display panel being supplied with power, the voltage applied to the first common electrode 111 is consistent with the voltage applied to the second common electrode 121; and the pixel electrode 112 is typically connected with a drain of a thin film transistor in the pixel structure on the

first substrate.

[0025] Typically, the first common electrode 111, the second common electrode 121 and the pixel electrode 112 are all made of the material of indium-tin oxide (ITO).

[0026] Preferably, the structure of the set of layers being different at a position directly opposite to the first common electrode 111 from that at a position directly opposite to the pixel electrode 112, comprises the following cases.

[0027] The dielectric layer 122 in the set of layers comprises: a first dielectric unit 61 and a second dielectric unit 62, arranged at an interval and closely linked to each other; the first dielectric unit 61 is located at a position directly opposite to the first common electrode 111, and the second dielectric unit 62 is located at a position directly opposite to the pixel electrode 112; and the dielectric constant of the first dielectric unit 61 is greater than that of the second dielectric unit 62.

[0028] In this embodiment, the first dielectric unit 61 with a larger dielectric constant is located at a position directly opposite to the first common electrode 111, and the second dielectric unit 62 with a smaller dielectric constant is located at a position directly opposite to the pixel electrode 112. According to theoretical knowledge of physics, it can be known that: a dielectric will change the intensity of an electric field; thus, when a dielectric with a high dielectric constant is placed in an electric field, the electric field intensity will have a certain amount of decrease comparatively; the higher the dielectric constant of the dielectric is, more notable the effect on the electric field becomes. Therefore, electric field intensity at the location of the first dielectric unit 61 with a larger dielectric constant is less than that at the location of the second dielectric unit 62 with a smaller dielectric constant. Since the electric field intensity between the second common electrode 121 and the first common electrode 111 as well as between the second common electrode 121 and the pixel electrode 112 is constant, in the liquid crystal layer the electric field intensity corresponding to the location of the first dielectric unit 61 is greater than that of the second dielectric unit 62. Since an electric force is directly proportional to an electric field intensity, the electric force formed between the pixel electrode 112 and a portion of the second common electrode 121 corresponding to the first dielectric unit 61 is greater than the electric force formed between the pixel electrode 112 and a portion of the second common electrode 121 corresponding to the second dielectric unit 62. Thus an oblique electric field is formed in the liquid crystal layer, so that the liquid crystal molecules in the liquid crystal layer when power is supplied deviate from their vertical positions by a larger tilt angle with respect to the prior art, which further improves the light-transmittance of the liquid crystal display panel.

[0029] Further preferably, the width of the first dielectric unit 61 is consistent with the width of the second dielectric unit 62. In the present disclosure, "width" refers to a minimum profile dimension of a structural feature in a direction parallel to a substrate plane.

Second Embodiment:

[0030] As shown in FIG. 4, this embodiment provides a liquid crystal display panel, which comprises: a first substrate 11 and a second substrate 12, disposed opposite to each other to form a cell, as well as a liquid crystal layer 13 between the two substrates. On the first substrate, there is formed with a first common electrode 111 and a pixel electrode 112, arranged at an interval. On the second substrate, there is formed with a set of layers, the set of layers comprising: a second common electrode 121, and a dielectric layer 122 covering the side of the second common electrode 121 facing the first substrate 11. The structure of the set of layers is different at a position directly opposite to the first common electrode 111 from that at a position directly opposite to the pixel electrode 112.

[0031] Typically, the first substrate is an array substrate, and the second substrate is a color-filter substrate.

[0032] Among them, in the case of the liquid crystal display panel being supplied with power, the voltage applied to the first common electrode 111 is consistent with the voltage applied to the second common electrode 121; and moreover, each pixel electrode 112 is typically connected with a drain of a thin film transistor in the pixel structure on the first substrate.

[0033] The electric fields comprise: a horizontal electric field, formed between the first common electrode 111 and the second common electrode 121 as well as between the first common electrode 111 and the pixel electrode 112; and a vertical electric field, formed between the pixel electrode 112 and the second common electrode 121.

[0034] Typically, the first common electrode 111, the second common electrode 121 and the pixel electrode 112 are all made of the material of indium-tin oxide (ITO).

[0035] It should be noted that, in the drawings of all embodiments of the present disclosure, only the layer structures related to the technology of this disclosure are shown, whereas the layer structures unrelated to the technology of this disclosure are not shown; however, those skilled in the art can have a clear and unambiguous understanding of the technical solutions provided by the present disclosure, based on the description of the embodiments in the present disclosure and the prior art.

[0036] In the liquid crystal display panel provided by this embodiment, the structure of the set of layers is different at a position directly opposite to the first common electrode 111 from that at a position directly opposite to the pixel electrode 112, so that the liquid crystal molecules under the effect of electric fields deviate from their vertical positions, enabling the liquid crystal display panel to be light-transmissive, and thereby realizing the display function of the liquid crystal display panel.

[0037] Preferably, the structure of the set of layers being different at a position directly opposite to the first common electrode 111 from that at a position directly opposite to the pixel electrode 112, comprises the case in which:

on the second common electrode 121 in the set of layers, there is formed with a slit 31, and the slit 31 is located at a position directly opposite to the pixel electrode 112.

[0038] In the scheme provided by this embodiment, the second common electrode 121 is formed with a slit 31 at a position directly opposite to the pixel electrode 112, in such a way that in the case of power being supplied the electric force between the pixel electrode 112 and the slit 31 is reduced. Meanwhile, with respect to the liquid crystal display panel shown in FIG. 2, as the electric field formed between the pixel electrode 112 and the second common electrode 121 corresponding to the first common electrode 111 is not weakened, the oblique electric field formed between the pixel electrode 112 and the second common electrode 121 corresponding to the first common electrode 111 is therefore increased. This makes the alignment direction of the liquid crystal molecules in the liquid crystal layer under the effect of the two electric fields deviate from a vertical position by a larger tilt angle with respect to the prior art, which further improves the light-transmittance of the liquid crystal display panel, and thereby enhancing the display effect of the liquid crystal display panel.

[0039] Further preferably, the width of the slit is consistent with the width of the pixel electrode 112.

[0040] Further, this embodiment may incorporate the scheme in the first embodiment. As shown in FIG. 5, preferably the structure of the set of layers being different at a position directly opposite to the first common electrode 111 from that at a position directly opposite to the pixel electrode 112, comprises the case in which:

[0041] The dielectric layer 122 in the set of layers comprises: a first dielectric unit 61 and a second dielectric unit 62, arranged at an interval and closely linked to each other; wherein, the first dielectric unit 61 is located at a position directly opposite to the first common electrode 111, and the second dielectric unit 62 is located at a position directly opposite to the pixel electrode 112; and moreover, the dielectric constant of the first dielectric unit 61 is greater than that of the second dielectric unit 62.

[0042] In this way, on the basis of the liquid crystal display panel shown in FIG. 4, the light-transmittance of the liquid crystal display panel can be further improved.

Third Embodiment:

[0043] As shown in FIG. 6, this embodiment provides a liquid crystal display panel, which comprises: a first substrate 11 and a second substrate 12, disposed opposite to each other to form a cell, as well as a liquid crystal layer 13 between the two substrates. On the first substrate, there is formed with a first common electrode 111 and a pixel electrode 112, arranged at an interval. On the second substrate, there is formed with a set of layers, the set of layers comprising: a second common electrode 121, and a dielectric layer 122 covering the side of the second common electrode 121 facing the first substrate 11. The structure of the set of layers is different at a po-

sition directly opposite to the first common electrode 111 from that at a position directly opposite to the pixel electrode 112.

[0044] Typically, the first substrate is an array substrate, and the second substrate is a color-filter substrate.

[0045] Among them, in the case of the liquid crystal display panel being supplied with power, the voltage applied to the first common electrode 111 is consistent with the voltage applied to the second common electrode 121; and the pixel electrode 112 is typically connected with a drain of a thin film transistor in the pixel structure on the first substrate.

[0046] Typically, the first common electrode 111, the second common electrode 121 and the pixel electrode 112 are all made of the material of indium-tin oxide (ITO).

[0047] Preferably, the structure of the set of layers being different at a position directly opposite to the first common electrode 111 from that at a position directly opposite to the pixel electrode 112, comprises the case in which:

[0048] The second common electrode 121 in the set of layers is in a concave-convex shape, wherein the distance between a concave-shaped portion 41 of the second common electrode 121 and the first substrate is smaller than the distance between a convex-shaped portion 42 of the second common electrode 121 and the first substrate; and moreover, the concave-shaped portion 41 of the second common electrode 121 is located at a position directly opposite to the first common electrode 111, and the convex-shaped portion 42 of the second common electrode 121 is located at a position directly opposite to the pixel electrode 112.

[0049] Among them, the method for making the second common electrode in a concave-convex shape, may be as shown in FIG. 6, which can be done as below: at the locations of the concave-shaped portions of the second common electrode on the second substrate, firstly an insulating substance is used to form a stripe with a certain thickness (represented by the pure black blocks in FIG. 6), and then the second common electrode is formed thereon.

[0050] In this embodiment, the concave-shaped portion of the second common electrode is located at a position directly opposite to the first common electrode, and the convex-shaped portion of the second common electrode is located at a position directly opposite to the pixel electrode, which makes the distance between the pixel electrode 112 and the concave-shaped portion 41 on the second common electrode 121 less than the distance between the pixel electrode 112 and the convex-shaped portion 42. Thus, with respect to the liquid crystal display panel shown in FIG. 2, the oblique electric field formed by the second common electrode and the pixel electrode is increased, so that the alignment direction of the liquid crystal molecules in the liquid crystal layer deviate from a vertical position by a larger tilt angle with respect to the prior art, which further improves the light-transmittance of the liquid crystal display panel, and thereby enhancing the display effect of the liquid crystal display panel.

[0051] Further preferably, the width of the concave-shaped portion 41 of the second common electrode 121 is consistent with the width of the first common electrode 111.

[0052] On the basis of the liquid crystal display panel shown in FIG. 6, the light-transmittance of the liquid crystal display panel can be further improved by adopting the following two ways.

[0053] The first way: as shown in FIG. 7, based on the liquid crystal display panel shown in FIG. 6, the structure of the set of layers being different at a position directly opposite to the first common electrode 111 from that at a position directly opposite to the pixel electrode 112, further comprises the case in which:

[0054] The dielectric layer 122 in the set of layers comprises: a first dielectric unit 61 and a second dielectric unit 62, arranged at an interval and closely linked to each other; wherein, the first dielectric unit 61 is located at a position directly opposite to the first common electrode 111, and the second dielectric unit 62 is located at a position directly opposite to the pixel electrode 112; and the dielectric constant of the first dielectric unit 61 is greater than that of the second dielectric unit 62.

[0055] In this way, on the basis of the liquid crystal display panel shown in FIG. 6, the light-transmittance of the liquid crystal display panel can be further improved.

[0056] The second way: as shown in FIG. 8, based on the liquid crystal display panel shown in FIG. 6, the convex-shaped portion 42 of the second common electrode 121 is further formed with a slit 43, and the slit 43 is located at a position directly opposite to the pixel electrode 112. This scheme incorporates the scheme provided with a slit in the second embodiment, which makes the oblique electric field formed by the second common electrode 121 and the pixel electrode 112 further increased, so that the alignment direction of the liquid crystal molecules in the liquid crystal layer deviate from a vertical position by a larger tilt angle with respect to the prior art, which further improves the light-transmittance of the liquid crystal display panel.

[0057] Further preferably, the width of the slit 43 is consistent with the width of the pixel electrode 112.

[0058] In addition, for further improving the light-transmittance of the liquid crystal display panel, further preferably, as shown in FIG. 9, based on the liquid crystal display panel shown in FIG. 6, both the first way and the second way as described above can be adopted at the same time, so as to improve the light-transmittance of the liquid crystal display panel as much as possible. It should be noted that, the first implementation and the second implementation take the above description for reference, which is no more explained here.

[0059] An embodiment of the present disclosure further provides a liquid crystal display, which comprises a liquid crystal display panel, and a backlight source providing backlight for the liquid crystal display panel; the liquid crystal display panel may be any one of the liquid crystal display panels described above in accordance

with the embodiments of the present disclosure.

[0060] The above description is merely the specific implementation of the present disclosure, and the protection scope of the present disclosure is not limited thereto. In the technical range disclosed by the present disclosure, variations and replacement which can be easily conceived by any skilled who is familiar with the art, should be encompassed by the protection scope of the present disclosed technology. Therefore, the protection scope of the present disclosed technology should be defined by the protection scope of the claims.

Claims

1. A liquid crystal display panel, comprising: a first substrate and a second substrate, disposed opposite to each other to form a cell, as well as a liquid crystal layer between the two substrates;
wherein, on the first substrate, there is formed with a first common electrode and a pixel electrode, arranged at an interval; on the second substrate, there is formed with a set of layers, the set of layers comprising: a second common electrode, and a dielectric layer covering one side of the second common electrode facing the first substrate; and
wherein, the structure of the set of layers is different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode.
2. The liquid crystal display panel according to Claim 1, wherein the structure of the set of layers being different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode comprises a case in which:

the dielectric layer in the set of layers comprises a first dielectric unit and a second dielectric unit, arranged at an interval and closely linked, wherein the first dielectric unit is located at a position directly opposite to the first common electrode, and the second dielectric unit is located at a position directly opposite to the pixel electrode; and the dielectric constant of the first dielectric unit is greater than that of the second dielectric unit.
3. The liquid crystal display panel according to Claim 2, wherein, a width of the first dielectric unit is consistent with a width of the second dielectric unit.
4. The liquid crystal display panel according to any one of claims 1 to 3, wherein the structure of the set of layers being different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode comprises a

case in which:

on the second common electrode in the set of layers, there is formed with a slit, and the slit is located at a position directly opposite to the pixel electrode. 5

5. The liquid crystal display panel according to Claim 4, wherein a width of the slit is consistent with a width of the pixel electrode. 10

6. The liquid crystal display panel according to any one of claims 1 to 3, wherein the structure of the set of layers being different at a position directly opposite to the first common electrode from that at a position directly opposite to the pixel electrode comprises a case in which: 15

the second common electrode in the set of layers is in a concave-convex shape, wherein a distance between a concave-shaped portion of the second common electrode and the first substrate is smaller than a distance between a convex-shaped portion of the second common electrode and the first substrate; and the concave-shaped portion of the second common electrode is located at a position directly opposite to the first common electrode, and the convex-shaped portion of the second common electrode is located at a position directly opposite to the pixel electrode. 20 25 30

7. The liquid crystal display panel according to Claim 6, wherein a width of the concave-shaped portion of the second common electrode is consistent with a width of the first common electrode. 35

8. The liquid crystal display panel according to Claim 6, wherein the convex-shaped portion of the second common electrode is formed with a slit, and the slit is located at a position directly opposite to the pixel electrode. 40

9. The liquid crystal display panel according to Claim 8, wherein a width of the slit is consistent with a width of the pixel electrode. 45

10. A liquid crystal display comprising: a liquid crystal display panel, and a backlight source providing backlight for the liquid crystal display panel, wherein, the liquid crystal display panel is in accordance with any one of claims 1 to 9. 50

55

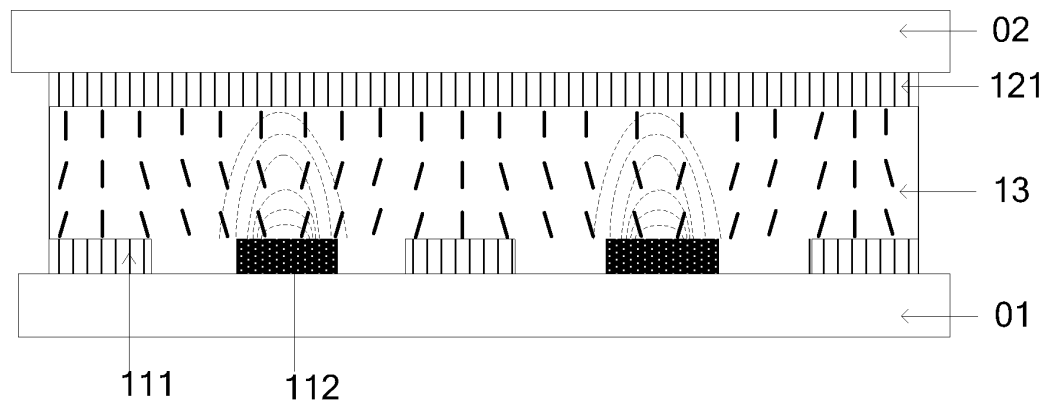


FIG.1

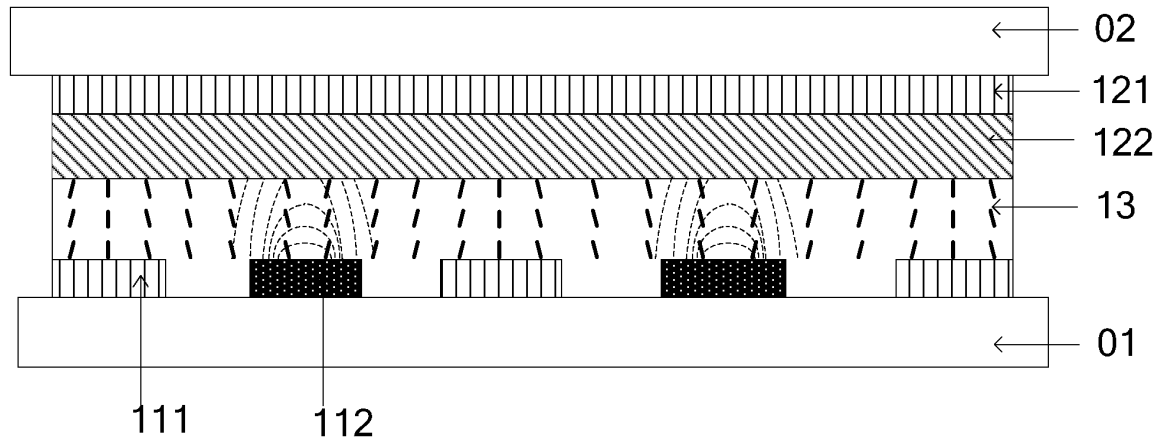


FIG.2

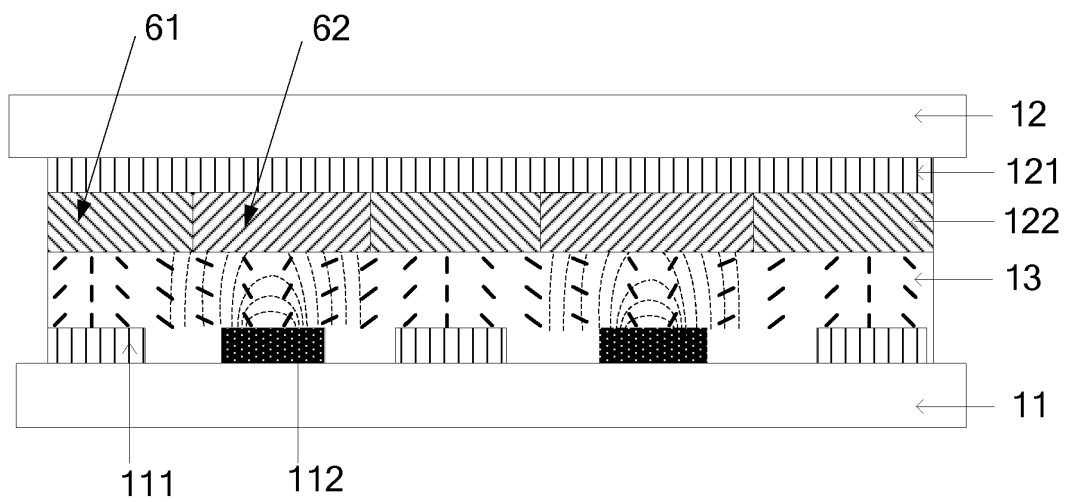


FIG.3

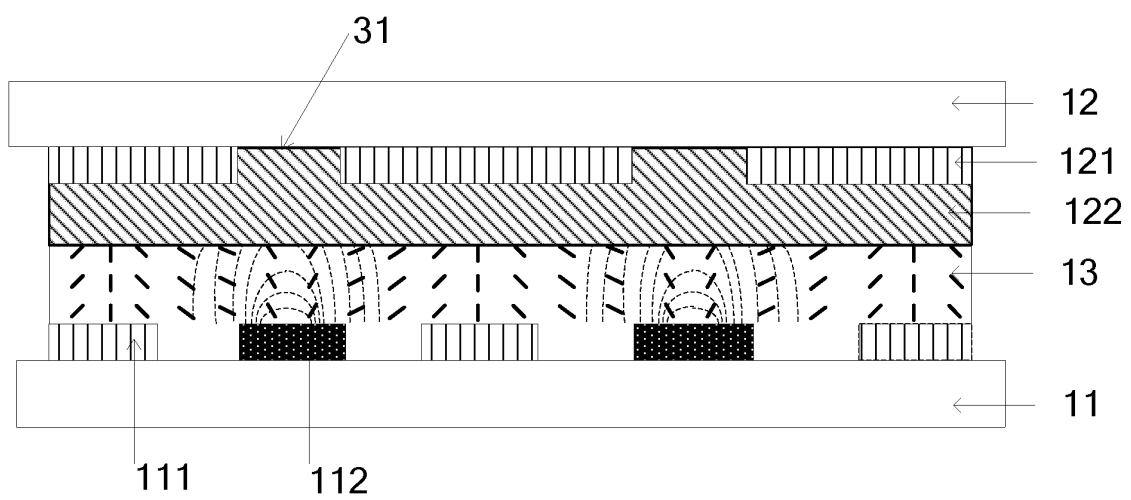


FIG.4

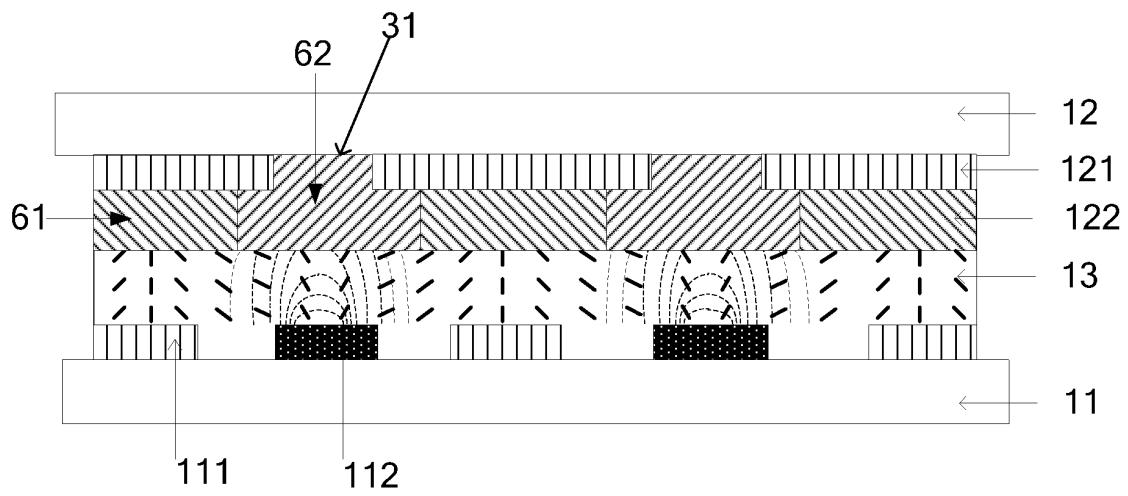


FIG.5

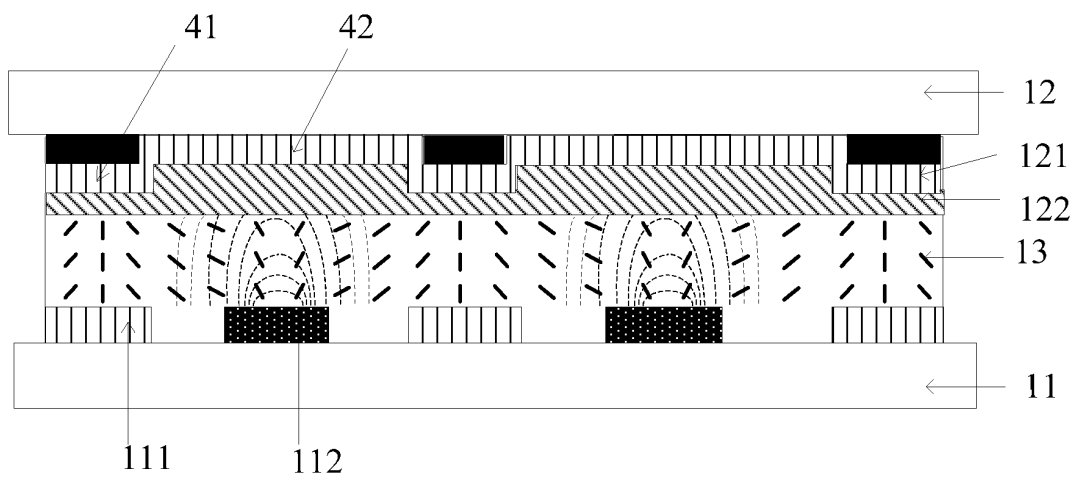


FIG.6

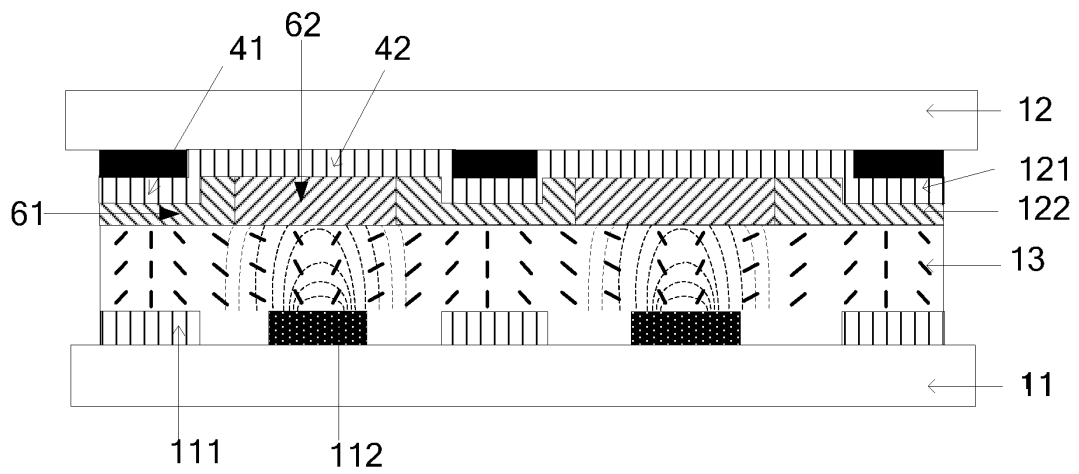


FIG. 7

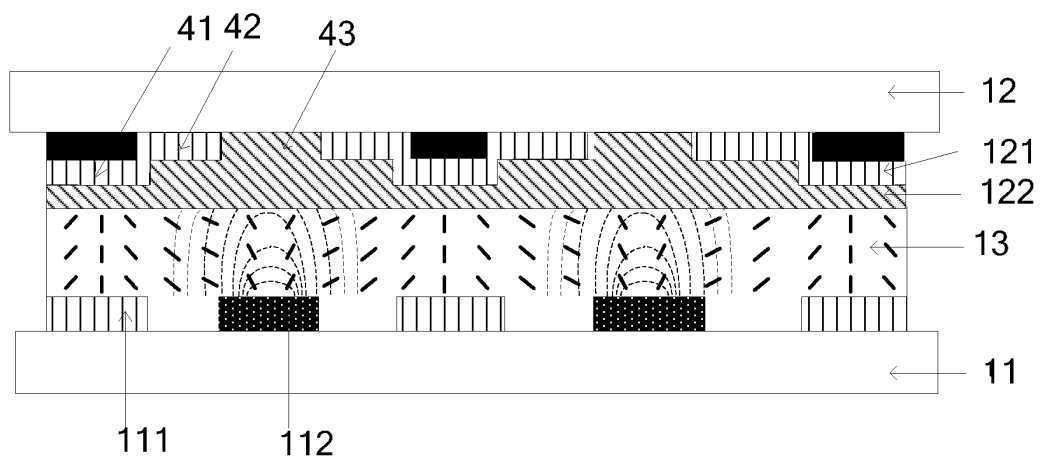


FIG. 8

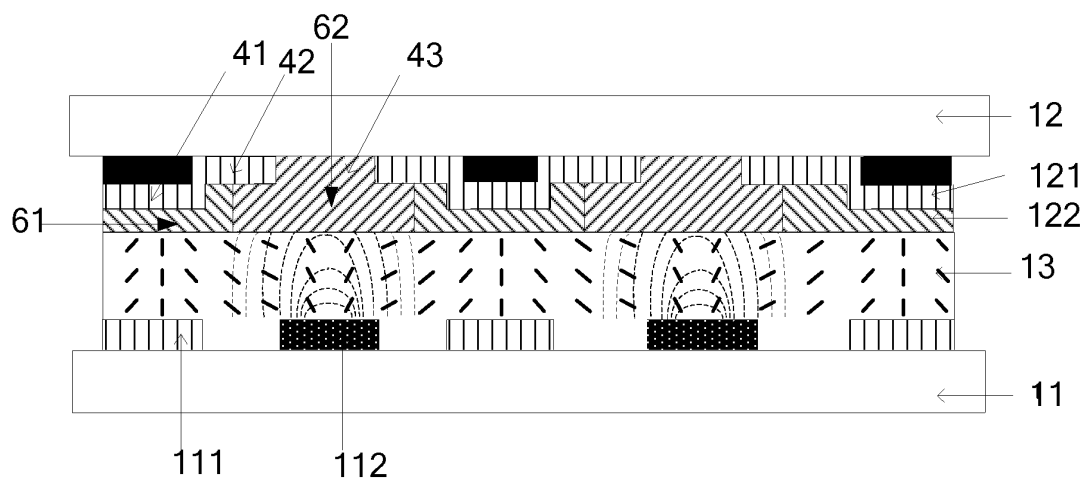


FIG.9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/081017

A. CLASSIFICATION OF SUBJECT MATTER

G02F 1/1343 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

VEN, CNABS, CNTXT: horizon in plane handover convert electrical field upright share opposite direction
 contraposition relative medium insulation slot opening concave-convex public common electrode dielectric vertical VA
 lateral transverse plane field parallel orthogonal hybrid switch picture element convex concave protrude protrusion project valley
 groove hollow slit

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2010137217 A1 (SHARP KK), 02 December 2010 (02.12.2010), description, paragraphs [0031] and [0170]-[0175], and figures 2 and 12	1, 4-5, 10
Y	CN 101424852 A (NEC LCD TECHNOLOGIES CO., LTD.), 06 May 2009 (06.05.2009), description, page 13, paragraph 3 to page 14, paragraph 2, and figures 14-15	1, 4-5, 10
Y	JP 2010015183 A (SHARP KK), 21 January 2010 (21.01.2010), description, paragraph 0117, and figure 80	1, 4-5, 10
Y	CN 1991466 A (LG PHILIPS LCD CO., LTD.), 04 July 2007 (04.07.2007), description, page 3, 3 rd to the last paragraph to page 4, paragraph 5, and figure 2	1, 4-5
A	CN 101487964 A (SAMSUNG ELECTRONICS CO., LTD.), 22 July 2009 (22.07.2009), the whole document	1-10

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
 05 November 2012 (05.11.2012)

Date of mailing of the international search report
 22 November 2012 (22.11.2012)

Name and mailing address of the ISA/CN:
 State Intellectual Property Office of the P. R. China
 No. 6, Xitucheng Road, Jimenqiao
 Haidian District, Beijing 100088, China
 Facsimile No.: (86-10) 62019451

Authorized officer

MA, Meijuan

Telephone No.: (86-10) 62085692

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/081017

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 101387806 A (CHIMEI INNOLUX CORP.; UNIVERSITY OF FLORIDA FOUNDATION, INC.), 18 March 2009 (18.03.2009), the whole document	1-10

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
 Information on patent family members

International application No.

PCT/CN2012/081017

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
WO 2010137217 A1	02.12.2010	CN 102414608 A	11.04.2012
		EP 2437110 A1	04.04.2012
		US 2012013594 A1	19.01.2012
CN 101424852 A	06.05.2009	JP 2009109657 A	21.05.2009
		US 2009109356 A1	30.04.2009
		US 7936405 B2	03.05.2011
JP 2010015183 A	21.01.2010	JP 4800416 B2	26.10.2011
CN 1991466 A	04.07.2007	JP 2007178907 A	12.07.2007
		US 7667808 B2	23.02.2010
		KR 20070070014 A	03.07.2007
		US 2007146606 A1	28.06.2007
		JP 2007178904 A	12.07.2007
		KR 20070070015 A	03.07.2007
CN 1014 87964 A	22.07.2009	WO 03044592 A1	30.05.2003
		AU 2002306059 A1	10.06.2003
		EP 1446697 A1	18.08.2004
		US 2008018844 A1	24.01.2008
		US 7460191 B2	02.12.2008
		US 2010265423 A1	21.10.2010
		JP 2009122714 A	04.06.2009
		CN 101487964 B	18.01.2012
		KR 20040023239 A	18.03.2004
		KR 20040043769 A	27.05.2004
		US 2004196427 A1	07.10.2004
		US 8031286 B2	04.10.2011
		JP 2003186038 A	03.07.2003
		US 7079210 B2	18.07.2006
		KR 100956337 B1	06.05.2010
		JP 4589595 B2	01.12.2010
		US 2003133055 A1	17.07.2003
		KR 20030042221 A	28.05.2003
		US 2006232721 A1	19.10.2006
		US 8248566 B2	21.08.2012
		US 6940573 B2	06.09.2005
		TW 200404186 A	16.03.2004
		WO 03044595 A1	30.05.2003

Form PCT/ISA/210 (patent family annex) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2012/081017

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 101387806 A	18.03.2009	US 2003095223 A1	22.05.2003
		AU 2002354321 A1	10.06.2003
		KR 100885014 B1	20.02.2009
		KR 929667 B1	03.12.2009
		EP 2241930 A2	20.10.2010
		KR 20040040816 A	13.05.2004
		US 7019806 B2	28.03.2006
		TWI 240103 B	21.09.2005
		TWI 289235 B	01.11.2007
		CN 101893800 A	24.11.2010
		EP 2241930 A3	06.04.2011
		US 2006007365 A1	12.01.2006
		JP 2010231244 A	14.10.2010
		CN 1491371 A	21.04.2004
		EP 1446697 A4	08.08.2007
		CN 1491371 B	18.07.2012
		US 2009021660 A1	22.01.2009
		US 7605897 B2	20.10.2009
		TW 200905303 A	01.02.2009
		CN 101387806 B	18.07.2012

Form PCT/ISA/210 (patent family annex) (July 2009)

专利名称(译)	液晶显示面板和液晶显示器		
公开(公告)号	EP2755081A4	公开(公告)日	2015-05-06
申请号	EP2012787344	申请日	2012-09-05
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团有限公司.		
当前申请(专利权)人(译)	京东方科技集团有限公司.		
[标]发明人	SUZUKI TERUAKI		
发明人	SUZUKI, TERUAKI		
IPC分类号	G02F1/1343 G02F1/1337		
CPC分类号	G02F1/1337 G02F1/133707 G02F1/1343 G02F1/134309 G02F1/134363 G02F2001/134318 G02F2001/134381 G02F2202/42		
优先权	201110262823.8 2011-09-06 CN		
其他公开文献	EP2755081A1 EP2755081B1		

摘要(译)

公开了一种液晶显示面板和液晶显示器。液晶显示面板包括：第一基板和第二基板，彼此相对设置以形成单元，以及在两个基板之间的液晶层。在第一基板上，形成有间隔排列的第一公共电极和像素电极；在所述第二基板上形成有一组层，所述一组层包括：第二公共电极，以及覆盖所述第二公共电极的面向所述第一基板的一侧的介电层；并且，该组层的结构在与第一公共电极直接相对的位置处与在像素电极正对的位置处的层的结构不同。