




US 20070263144A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2007/0263144 A1**
Lin et al. (43) **Pub. Date: Nov. 15, 2007**(54) **TRANSFLECTIVE LIQUID CRYSTAL
DISPLAY WITH GAMMA HARMONIZATION****Publication Classification**(75) Inventors: **Ching-Huan Lin**, Hsin Ying City
(TW); **Jenn-Jia Su**, Budai Township
(TW); **Chih-Ming Chang**, Jhongli City
(TW)(51) **Int. Cl.**
G02F 1/1335 (2006.01)
(52) **U.S. Cl.** **349/114**(57) **ABSTRACT**

In a transflective liquid crystal display having a transmission area and the reflection area, the transmissive electrode is connected to a switching element to control the liquid crystal layer in the transmission area, and the reflective electrode is connected to the switching element via a separate capacitor to control the liquid crystal layer in the reflection area. The separate capacitor is used to shift the reflectance in the reflection area toward a higher voltage end in order to avoid the reflectance inversion problem. In addition, an adjustment capacitor is connected between the reflective electrode and a different common line. The adjustment capacitor is used to reduce or eliminate the discrepancy between the gamma curve associated with the transmittance and the gamma curve associated with the reflectance.

Correspondence Address:
**WARE FRESSOLA VAN DER SLUYS &
ADOLPHSON, LLP**
BRADFORD GREEN, BUILDING 5
755 MAIN STREET, P O BOX 224
MONROE, CT 06468 (US)

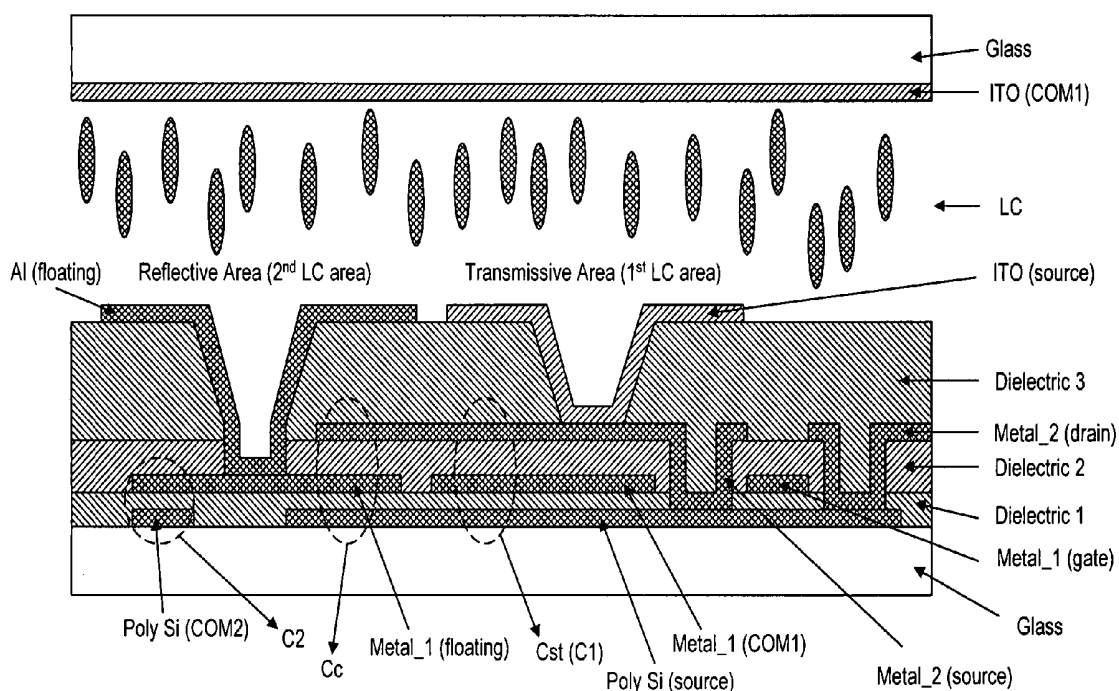(73) Assignee: **AU Optronics Corporation**(21) Appl. No.: **11/432,157**(22) Filed: **May 10, 2006**

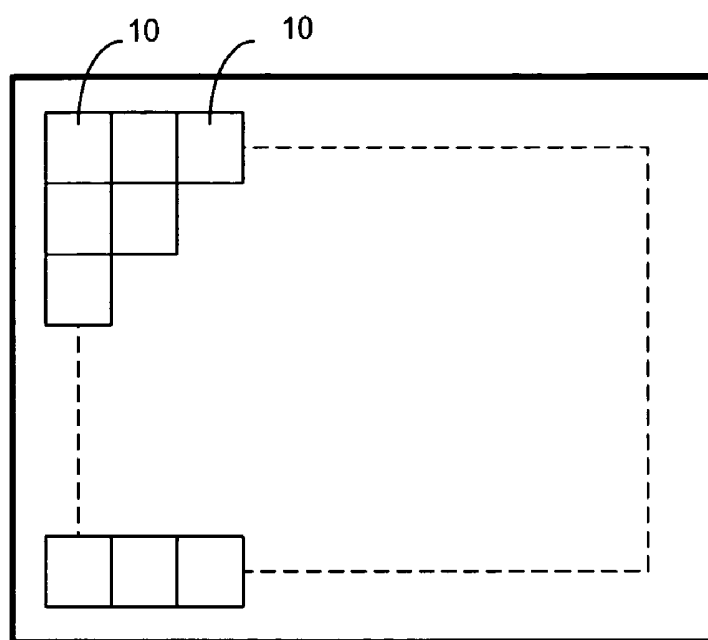


FIG. 1
(prior art)

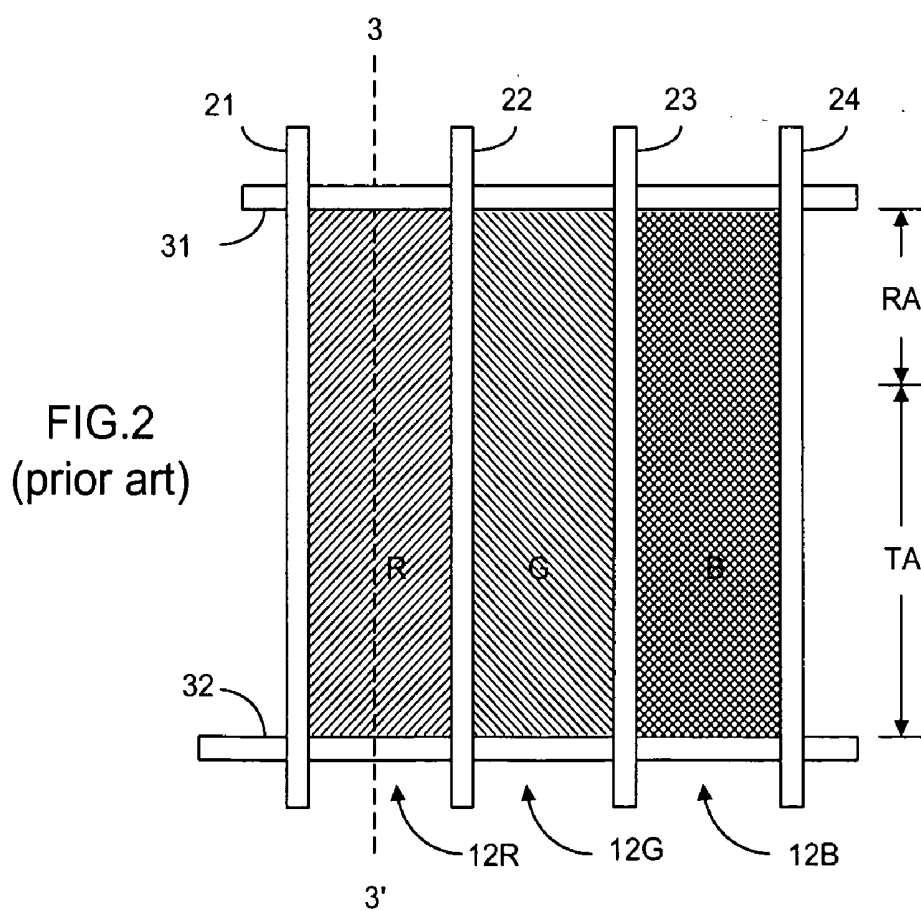


FIG. 2
(prior art)

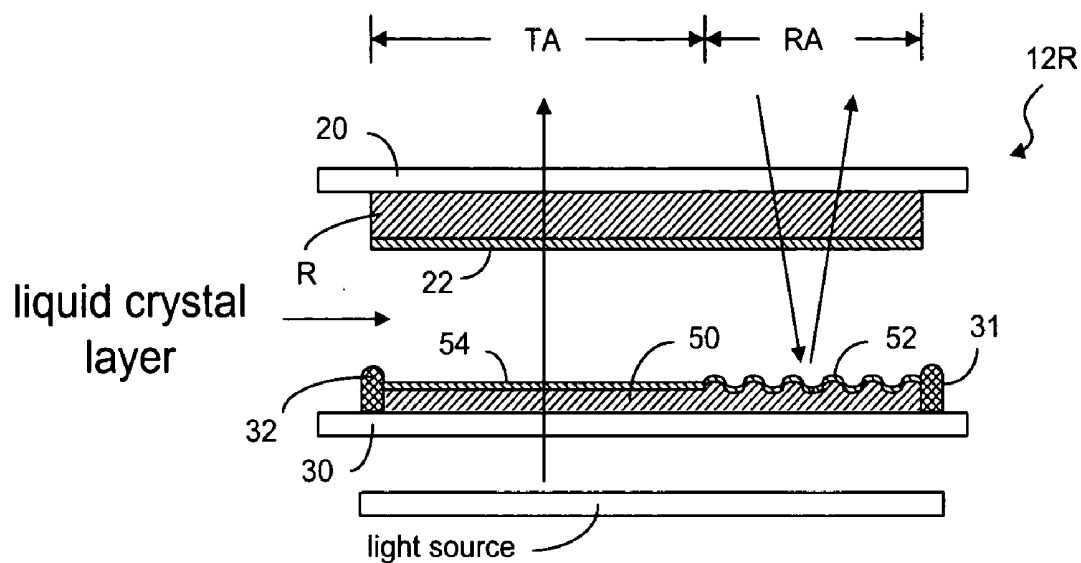


FIG.3a
(prior art)

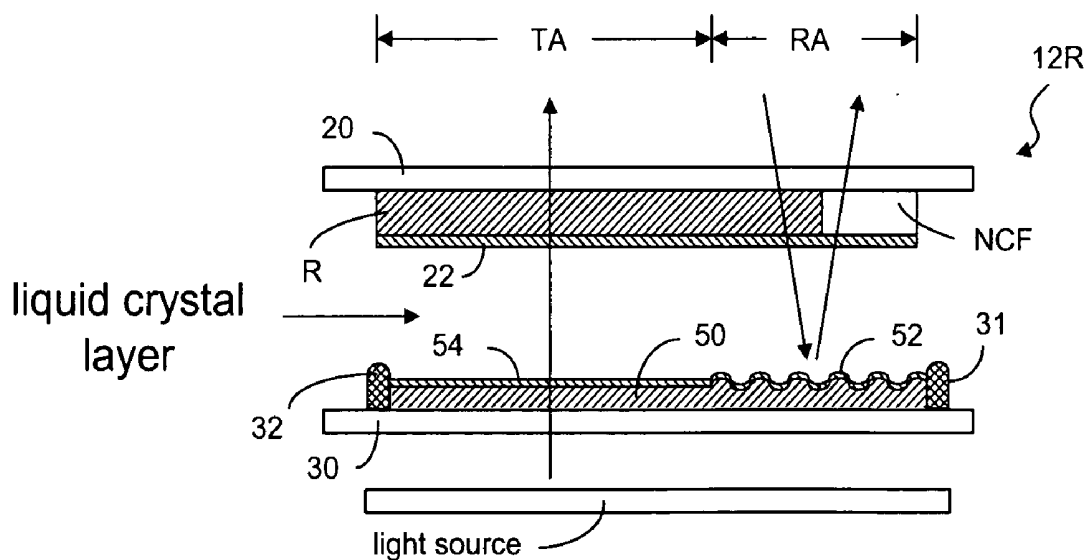


FIG.3b
(prior art)

FIG. 4

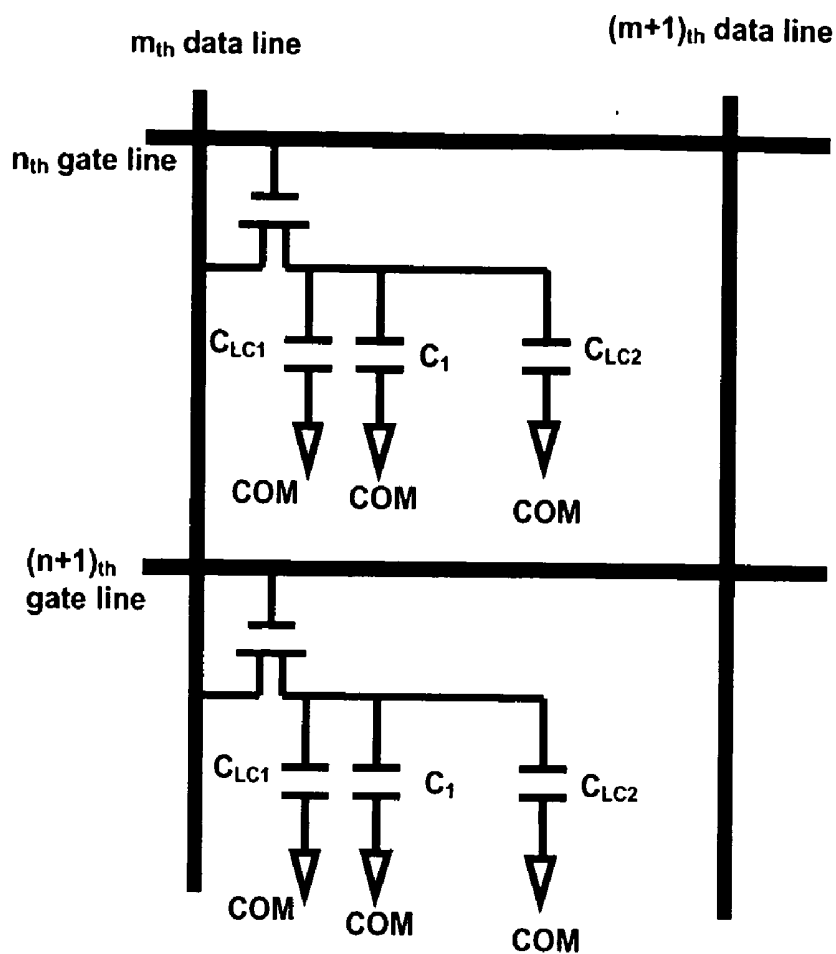
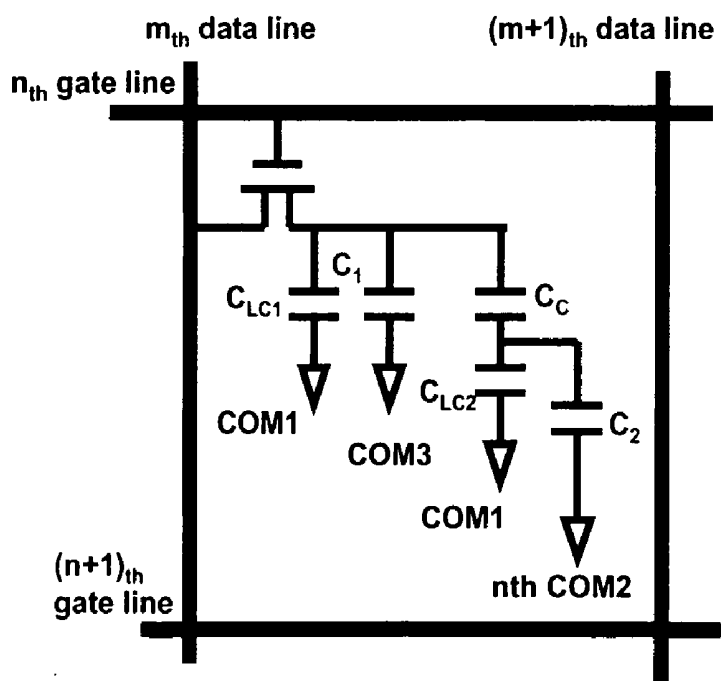


FIG. 8



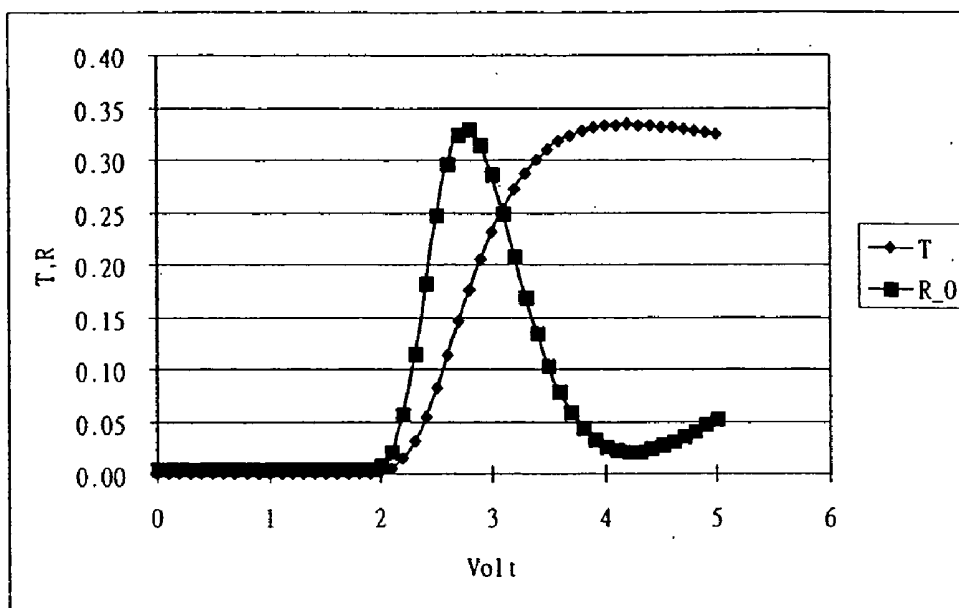


FIG. 5

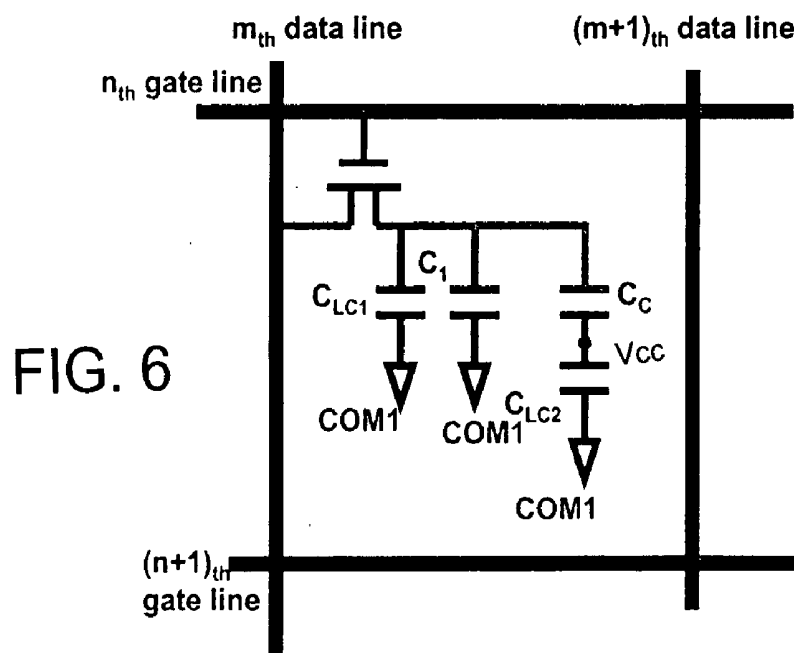


FIG. 6

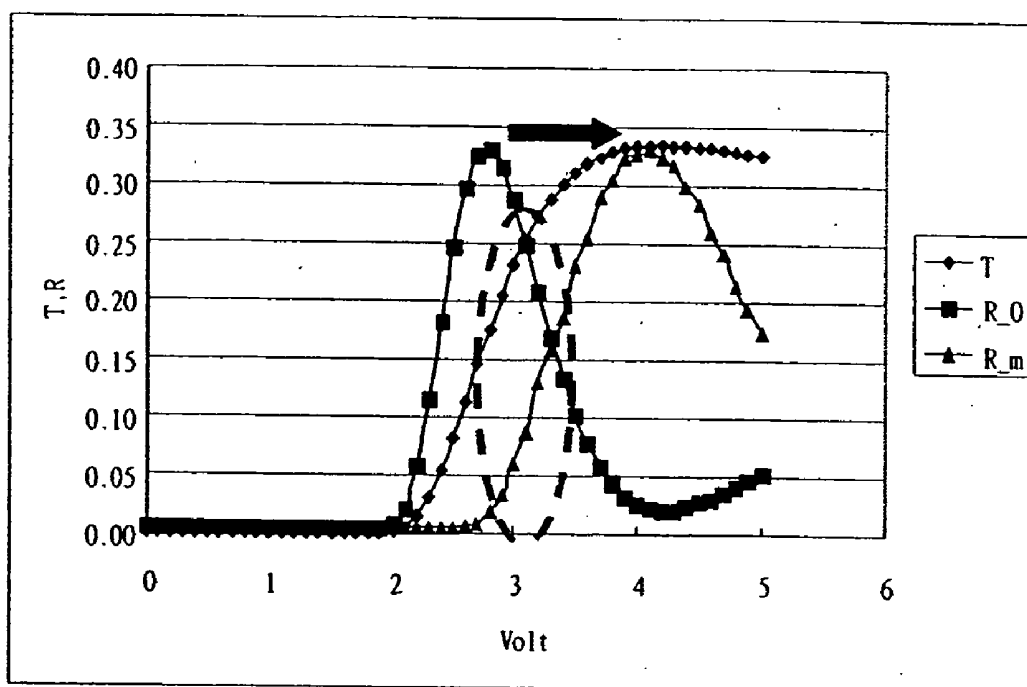


FIG. 7a

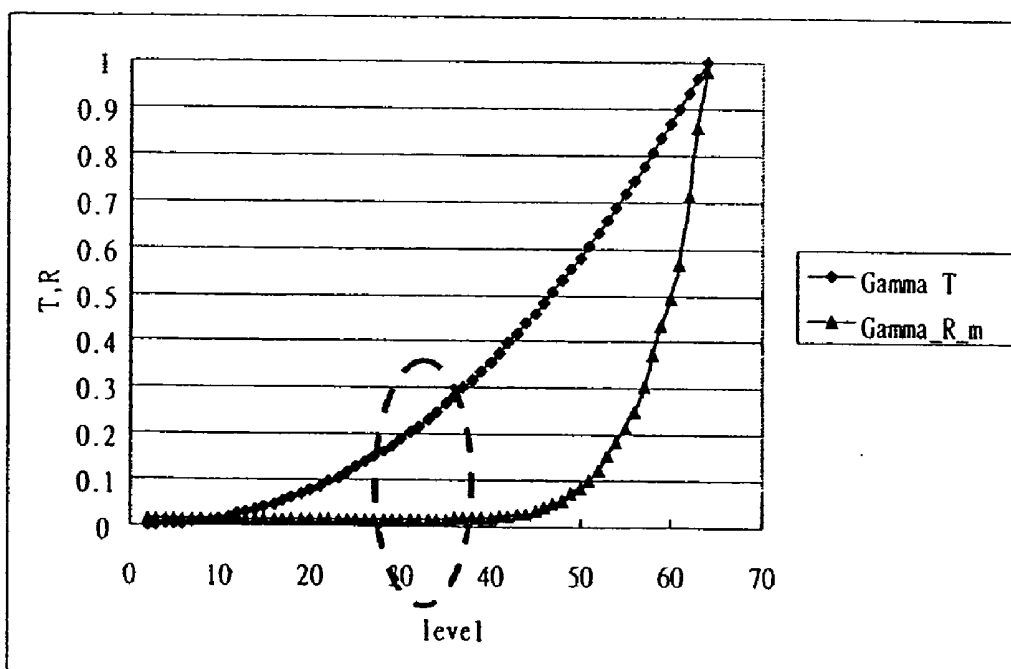


FIG. 7b

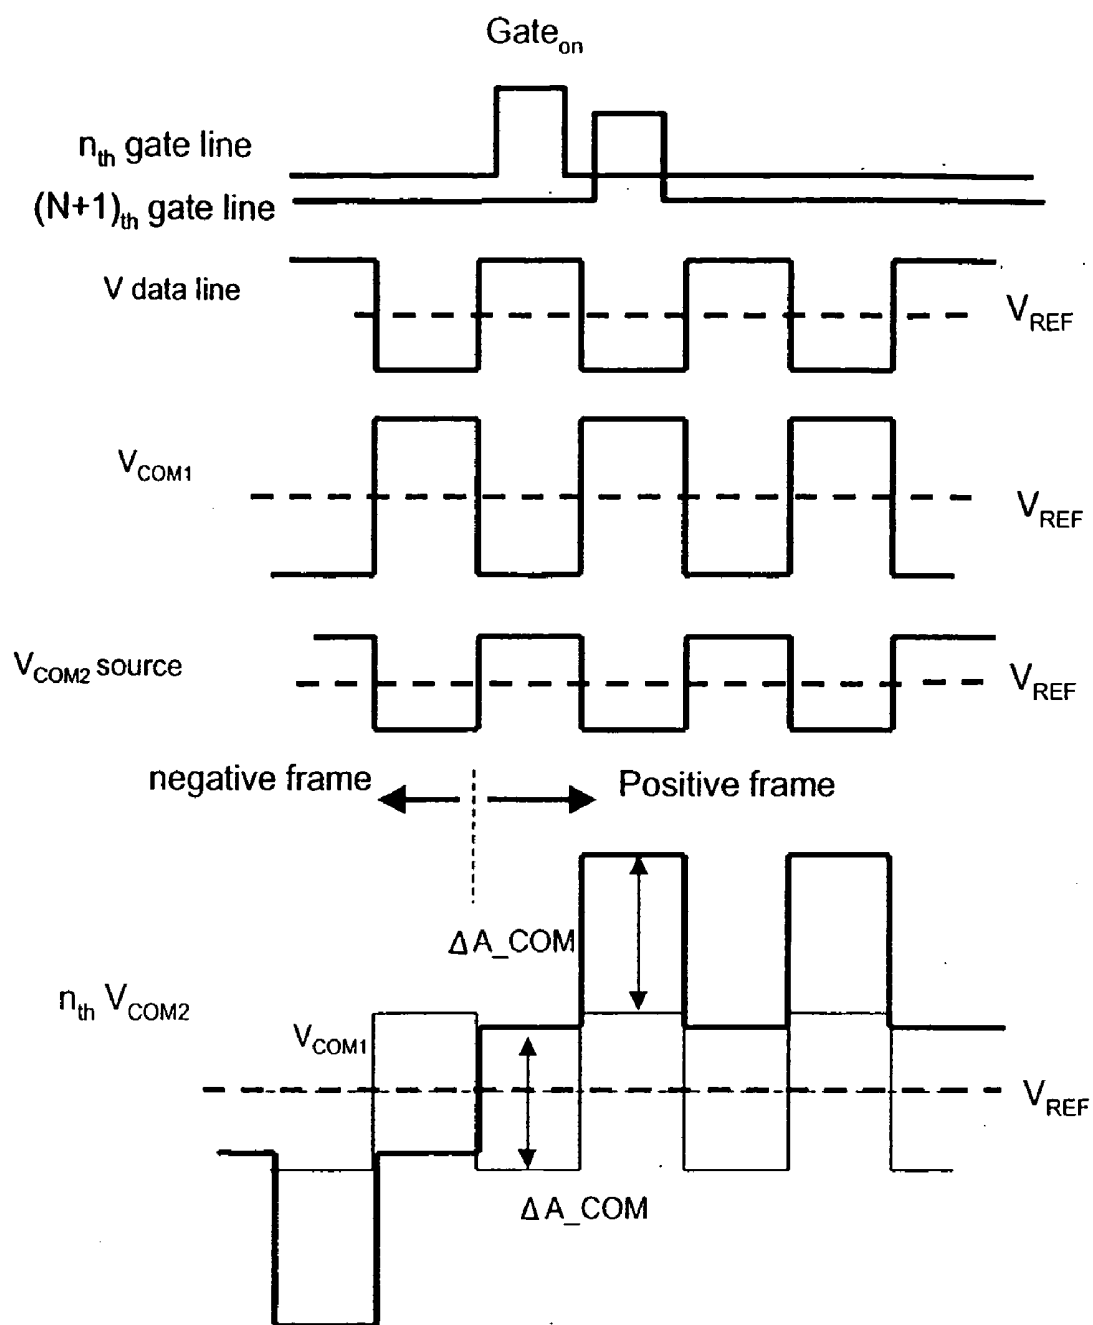


FIG. 9

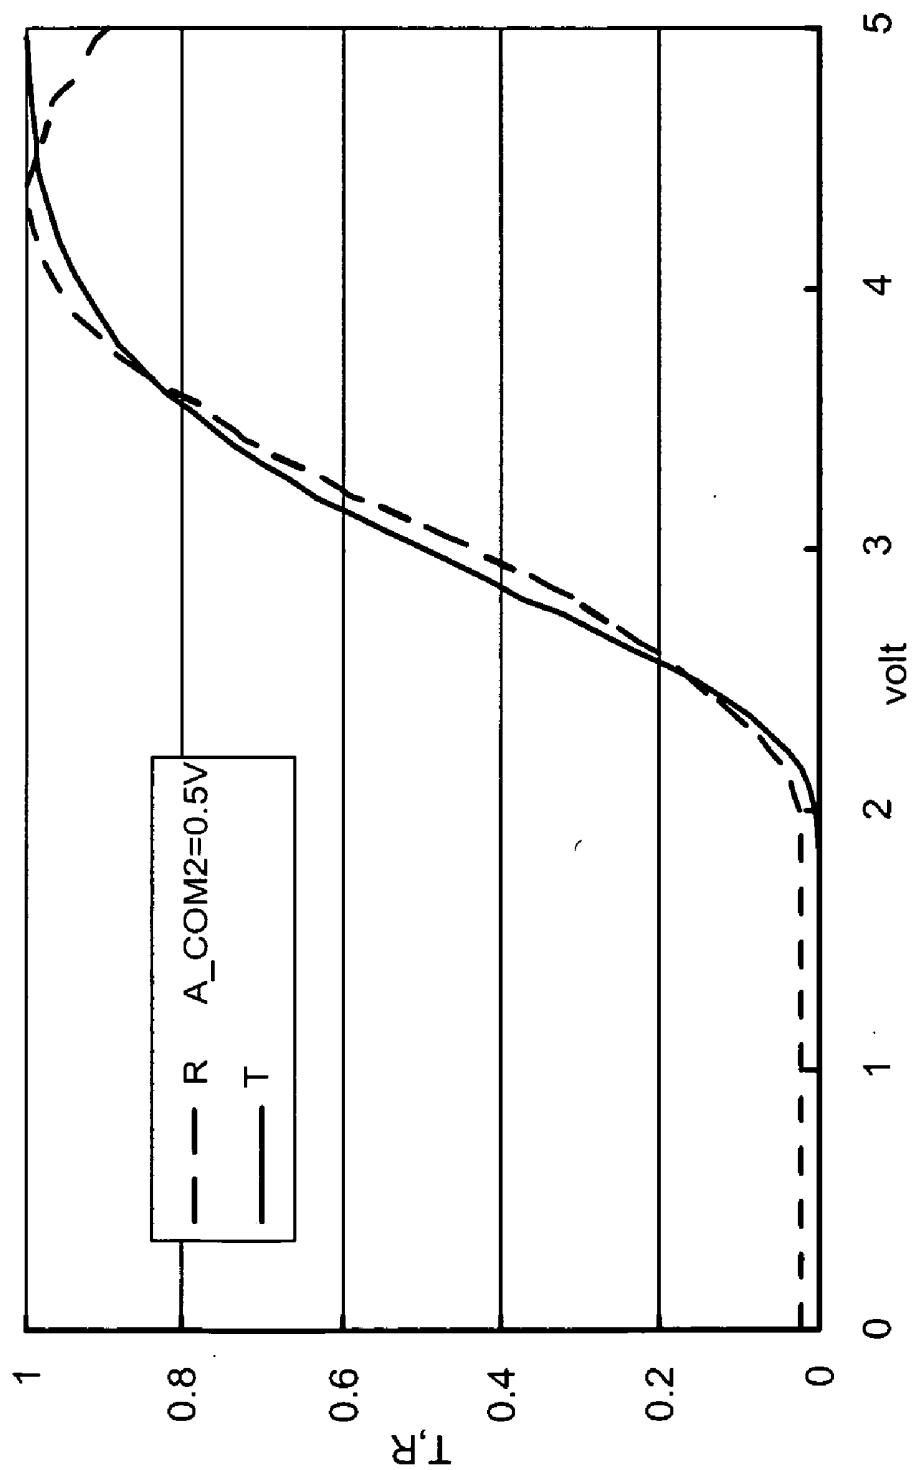


FIG. 10a

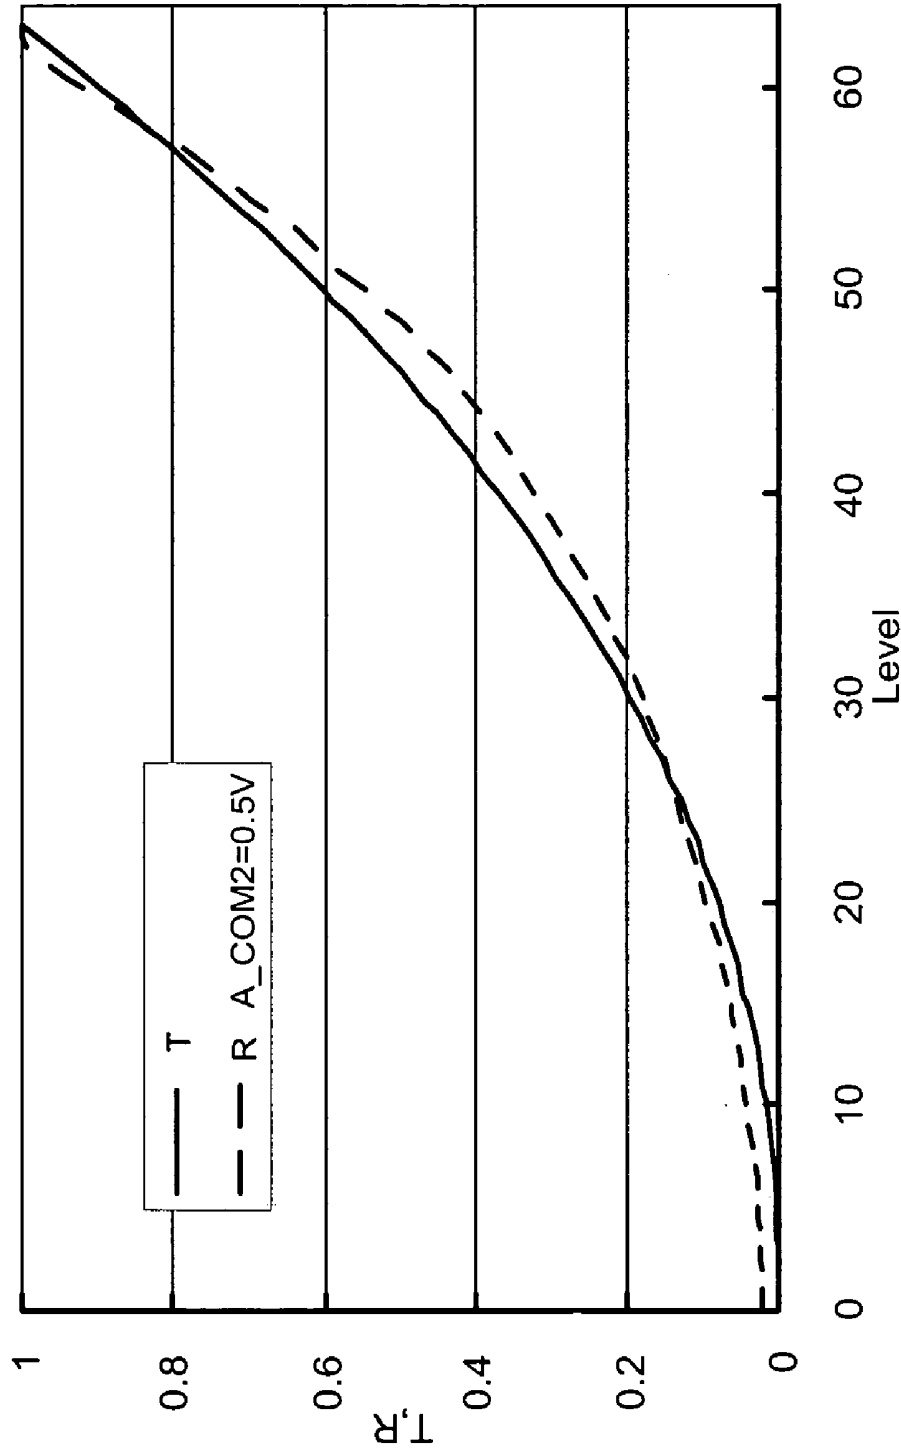
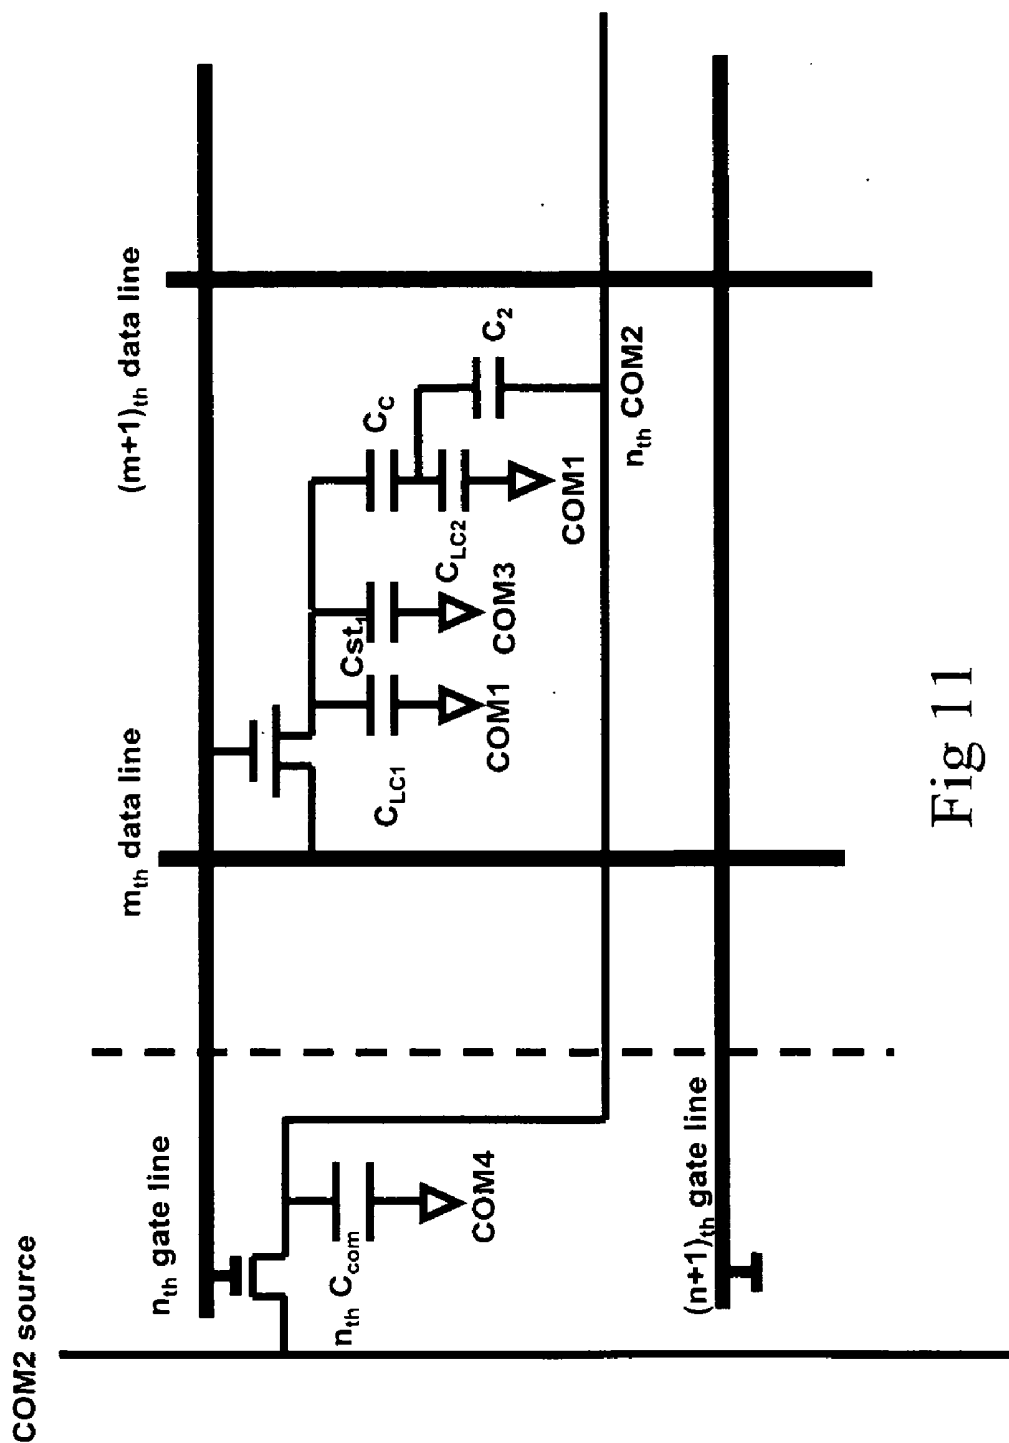


FIG. 10b



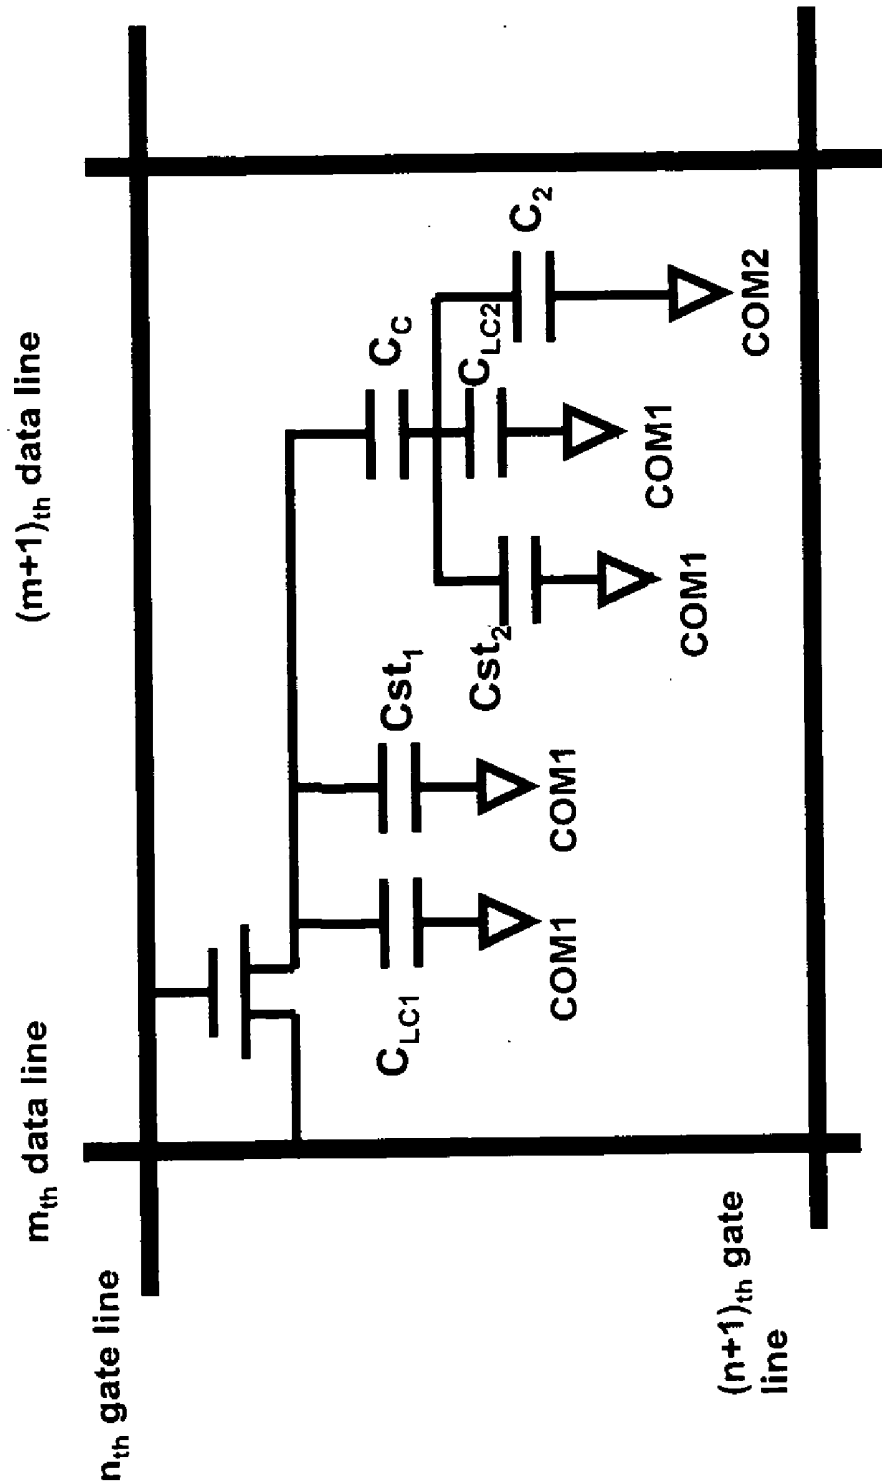


FIG. 12

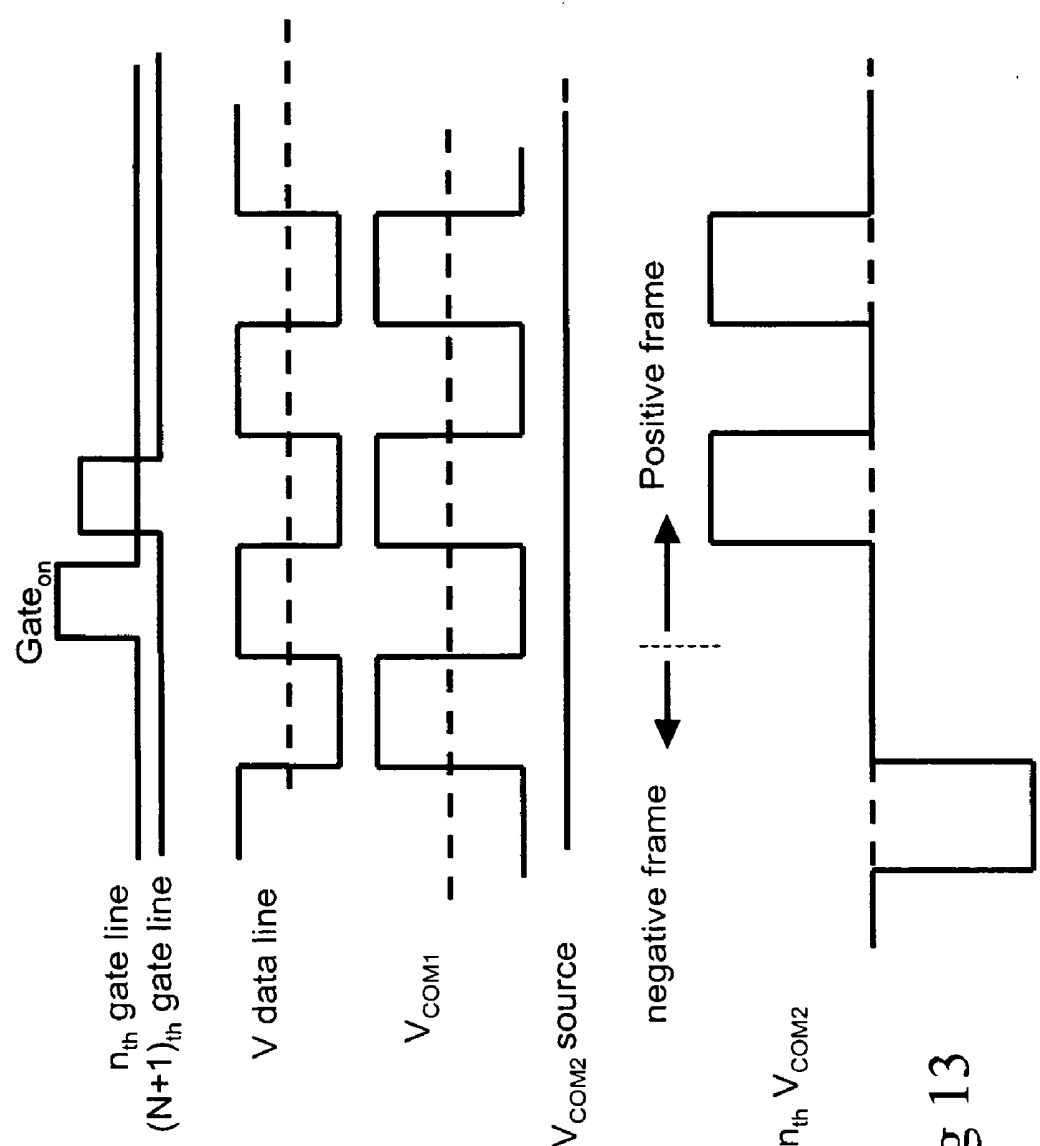


Fig 13

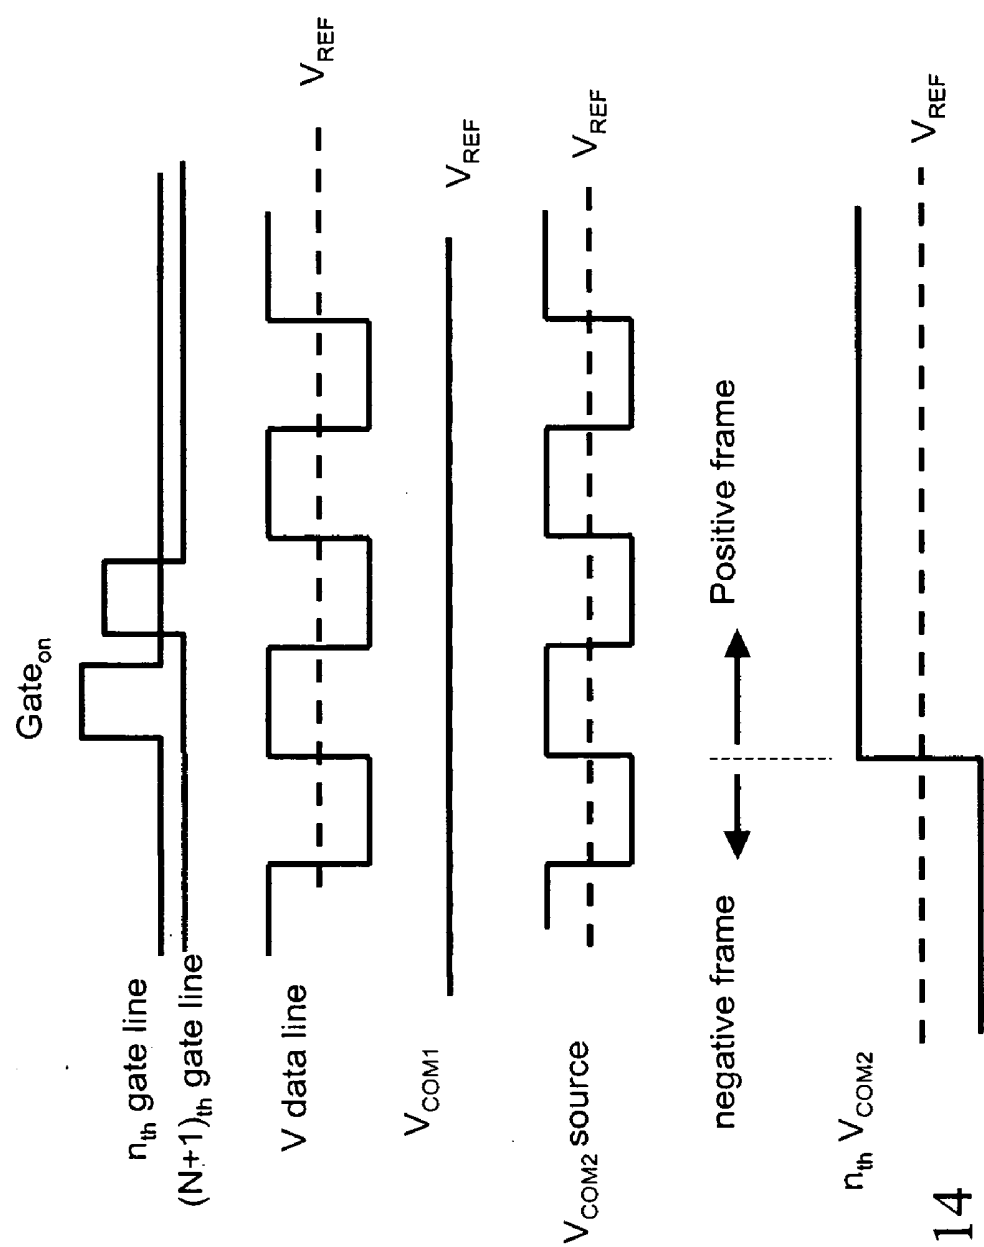
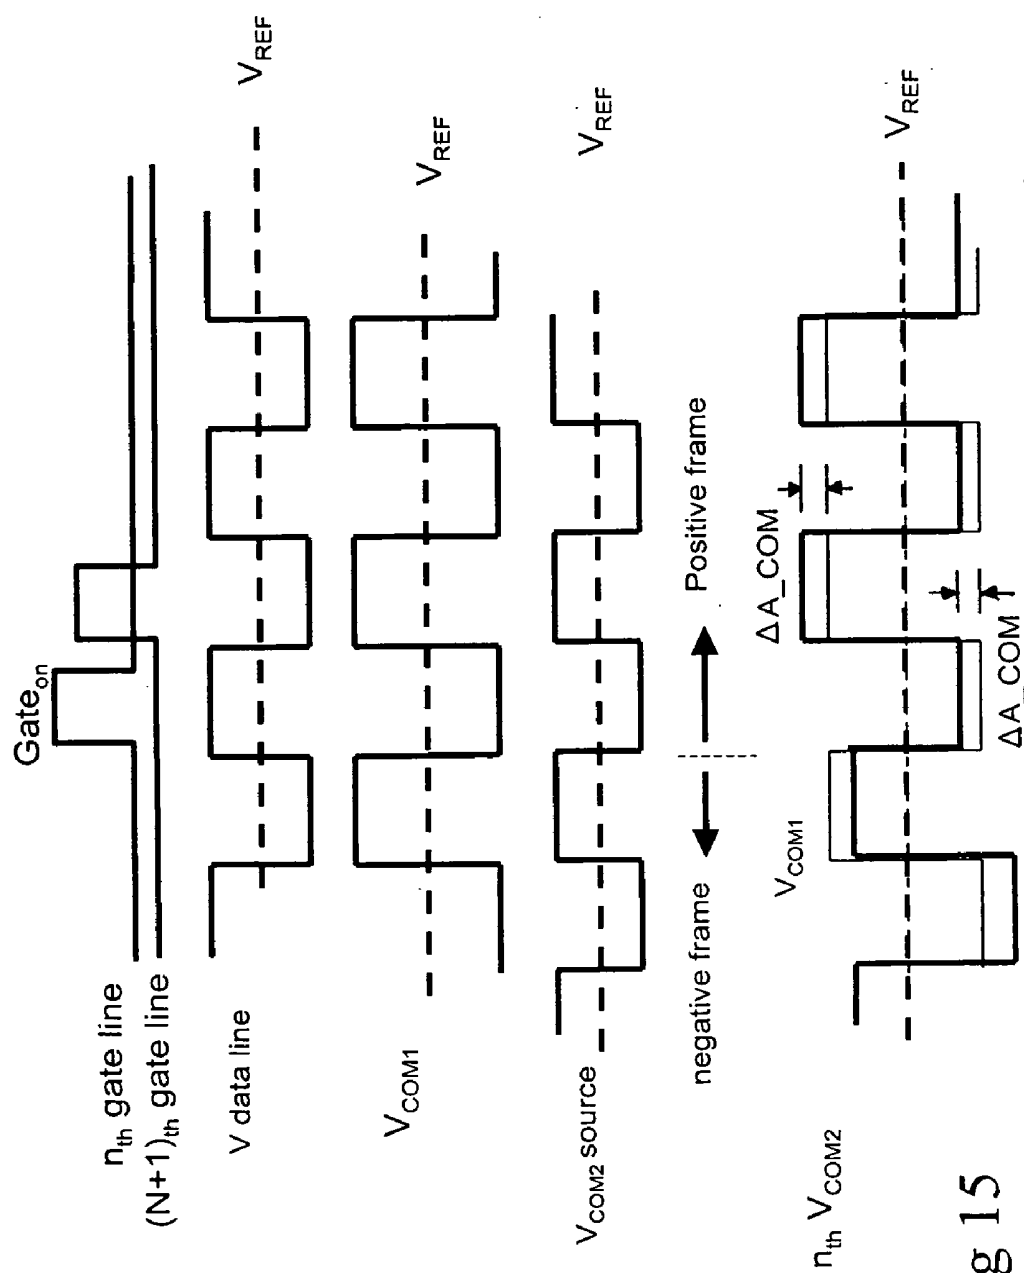


Fig 14



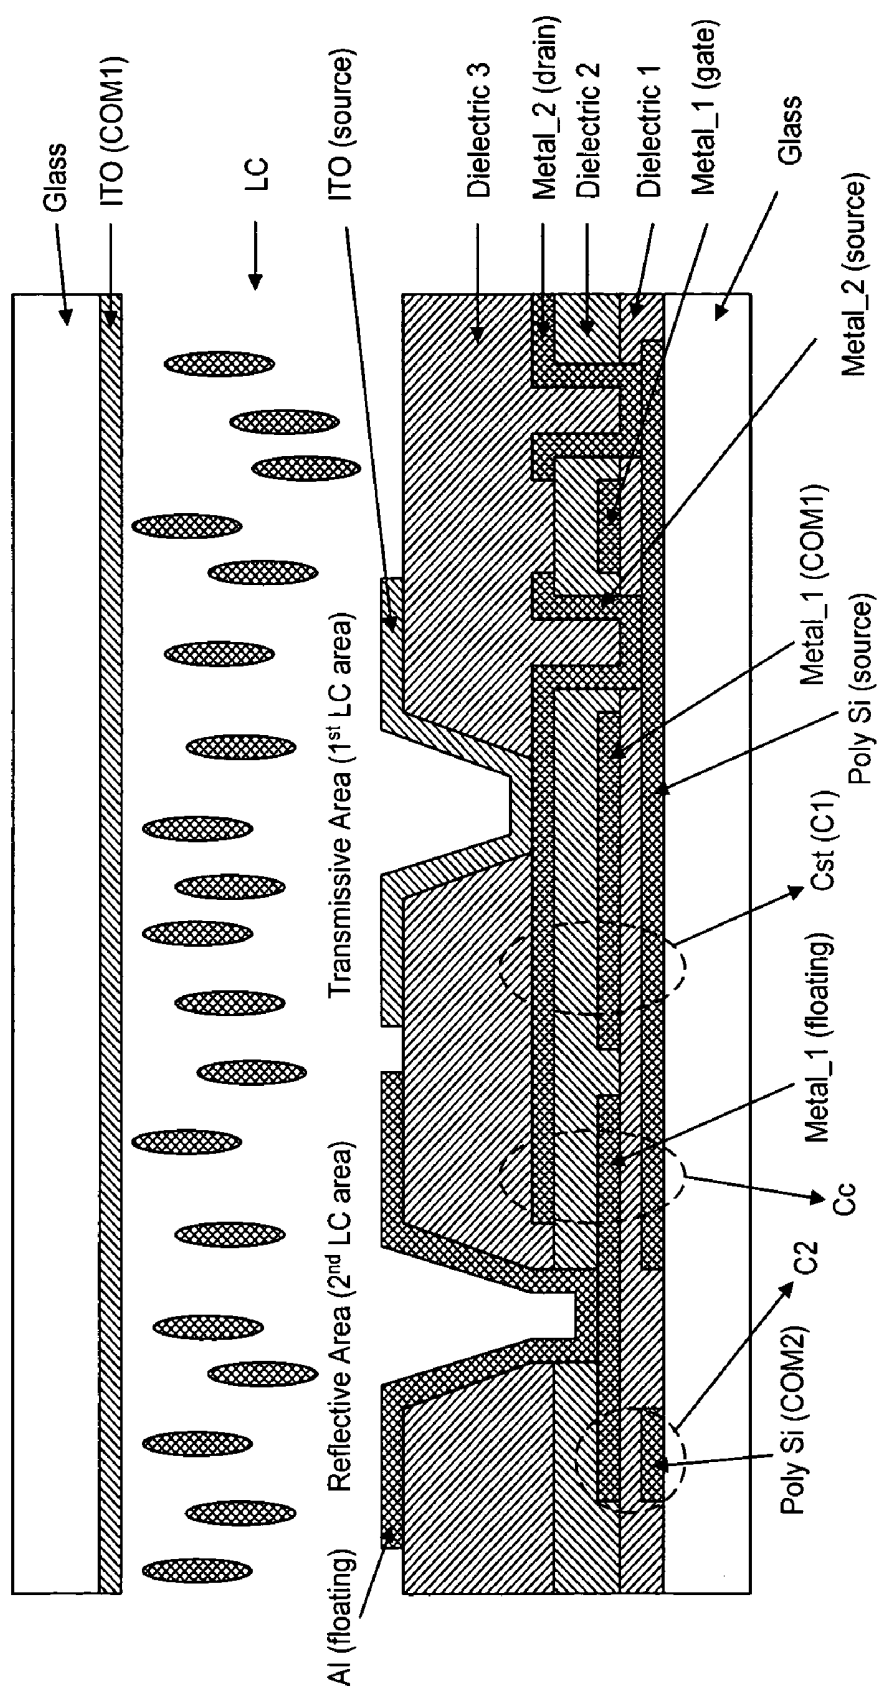


FIG. 16

TRANSFLECTIVE LIQUID CRYSTAL DISPLAY WITH GAMMA HARMONIZATION

FIELD OF THE INVENTION

[0001] The present invention relates generally to a liquid crystal display panel and, more particularly, to a transreflective-type liquid crystal display panel.

BACKGROUND OF THE INVENTION

[0002] Due to the characteristics of thin profile and low power consumption, liquid crystal displays (LCDs) are widely used in electronic products, such as portable personal computers, digital cameras, projectors, and the like. Generally, LCD panels are classified into transmissive, reflective, and transreflective types. A transmissive LCD panel uses a back-light module as its light source. A reflective LCD panel uses ambient light as its light source. A transreflective LCD panel makes use of both the back-light source and ambient light.

[0003] As known in the art, a color LCD panel **1** has a two-dimensional array of pixels **10**, as shown in FIG. **1**. Each of the pixels comprises a plurality of sub-pixels, usually in three primary colors of red (R), green (G) and blue (B). These RGB color components can be achieved by using respective color filters. FIG. **2** illustrates a plan view of the pixel structure in a conventional transreflective liquid crystal panel, and FIGS. **3a** and **3b** are cross sectional views of the pixel structure. As shown in FIG. **2**, a pixel can be divided into three sub-pixels **12R**, **12G** and **12B**, and each sub-pixel can be divided into a transmission area (TA) and a reflection area (RA). In the transmission area as shown in FIG. **3a**, light from a back-light source enters the pixel area through a lower substrate **30** and goes through a liquid crystal layer, a color filter R and the upper substrate **20**. In the reflection area, light from above an upper substrate **20** encountering the reflection area goes through the upper substrate **20**, the color filter R and the liquid crystal layer before it is reflected by a reflective layer or electrode **52**. Alternatively, a non-color filter (NCF) is formed on the upper substrate **20**, corresponding to part of the reflective area, as shown in FIG. **3b**.

[0004] As known in the art, there are many more layers in each pixel for controlling the optical behavior of the liquid crystal layer. These layers may include a device layer **50** and one or two electrode layers. For example, a transmissive electrode **54** on the device layer **50**, together with a common electrode **22** on the color filter, is used to control the optical behavior of the liquid crystal layer in the transmission area. Likewise, the optical behavior of the liquid crystal layer in the reflection area is controlled by the reflective electrode **52** and the common electrode **22**. The common electrode **22** is connected to a common line. The device layer is typically disposed on the lower substrate and comprises gate lines **31**, **32**, data lines **21-24** (FIG. **2**), transistors, and passivation layers (not shown). Furthermore, a storage capacitor is commonly disposed in the device layer **50** to retain the electrical charge in the sub-pixel after a signal pulse in the gate line has passed. An equivalent circuit of a typical sub-pixel (m, n) having a transmission area and a reflection area is shown in FIG. **4**. In FIG. **4**, C_{LC1} is the capacitance mainly attributable to the liquid crystal layer between the transmissive electrode **54** and the common electrode **22**, and

C_{LC2} is the capacitance mainly attributable to the liquid crystal layer between the reflective electrode **52** and the common electrode **22**. C_1 is the storage capacitor and COM denotes the common line.

[0005] As it is known in the art, an LCD panel also has quarter-wave plates and polarizers.

[0006] In a single-gap transreflective LCD, one of the major disadvantages is that the transmissivity of the transmission area (transmittance, the V-T curve) and the reflectivity in the reflection area (reflectance, the V-R curve) do not reach their peak values in the same voltage range. As shown in FIG. **5**, the V-R curve is peaked at about 2.8V, while the "flat" section of the V-T curve is between 3.7V and 5V. The reflectance experiences an inversion while the transmittance is approaching its higher values.

[0007] In prior art, this reflectivity inversion problem has been corrected by using a double-gap design wherein the gap at the reflection area is about half of the gap at the transmission area. While the double-gap design is effective in principle, it is difficult to achieve in practice mainly due to the complexity in the fabrication process. Other attempts, such as manipulating the voltage levels in the transmission and the reflection areas and coating the reflective electrode by a dielectric layer, have been proposed. For example, the voltage level in the reflection area relative to that in the transmission area is reduced by using capacitors. As shown in FIG. **6**, a separate capacitor C_C is connected in series to C_{LC2} . As such, the voltage level on the reflective electrode in reference to the common line voltage level V_{COM1} is given by:

$$V_{CL2} = V_{CC} - V_{com1} \\ = \frac{C_C}{(C_{LC2} + C_C)} * (V_{data} - V_{com1})$$

where V_{data} is the voltage level on the data line.

[0008] By adjusting the ratio $C_C/(C_{LC2}+C_C)$, it is possible to shift the peak of the reflectance curve toward the higher voltage end so as to match the flatter region of the transmittance curve, as shown in FIG. **7a**. As such, the inversion in the reflectance relative to the transmittance can be avoided.

[0009] However, while the transmittance starts to increase rapidly at about 2.2V, the reflectance remains low until about 2.8V. In this low brightness region, the discrepancy in the transmittance and reflectance also causes the discrepancy between the gamma curve associated with the transmittance and the gamma curve associated with the reflectance, as shown in FIG. **7b**. FIG. **7b** shows the transmittance and reflectance as a function of gamma level. Such discrepancy in the gamma curves degrades the view quality of a transreflective LCD panel.

[0010] It is thus advantageous and desirable to provide a method to reduce the discrepancy between the gamma curve associated with the transmittance and the gamma curve associated with the reflectance.

SUMMARY OF THE INVENTION

[0011] The present invention provides a method and a pixel structure to improve the viewing quality of a trans-

fective-type liquid crystal display. The pixel structure of a pixel in the liquid crystal display comprises a plurality of sub-pixel segments, each of which comprises a transmission area and a reflection area. In the sub-pixel segment, a data line, a gate line, a common line connected to a common electrode, and a switching element operatively connected to the data line and the gate line are used to control the operational voltage on the liquid crystal layer areas associated with the sub-segment. The transmission area has a transmissive electrode and the reflection area has a reflective electrode. The transmissive electrode is connected to the switching element to control the liquid crystal layer in the transmission area. The reflective electrode is connected to the switching element via a separate capacitor to control the liquid crystal layer in the reflection area. The separate capacitor is used to shift the reflectance in the reflection area toward a higher voltage end in order to avoid the reflectance inversion problem. In addition, an adjustment capacitor is connected between the reflective electrode and a different common line. The adjustment capacitor is used to reduce or eliminate the discrepancy between the gamma curve associated with the transmittance and the gamma curve associated with the reflectance.

[0012] The present invention will become apparent upon reading the description taken in conjunction of FIGS. 8 to 16.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIG. 1 is a schematic representation showing a typical LCD display.

[0014] FIG. 2 is a plan view showing the pixel structure of a conventional transfective color LCD display.

[0015] FIG. 3a is a cross sectional view showing the reflection and transmission of light beams in the pixel as shown in FIG. 2.

[0016] FIG. 3b is a cross sectional view showing the reflection and transmission of light beams in another prior art transfective display.

[0017] FIG. 4 is an equivalent circuit of a sub-pixel segment in a transfective LCD panel.

[0018] FIG. 5 is a plot of transmittance (T) and reflectance (R) against applied voltage (V) in a prior art single-gap transfective LCD.

[0019] FIG. 6 is an equivalent circuit of a sub-segment in a transfective LCD wherein a separate capacitor is connected to the reflective electrode to reduce the voltage level thereon.

[0020] FIG. 7a is a plot of transmittance (T) and reflectance (R) against applied voltage (V) showing the shifting of the R-V curve as a result of the separate capacitor in the reflection area.

[0021] FIG. 7b is a plot of transmittance and reflectance as a function of gamma level.

[0022] FIG. 8 is an equivalent circuit of a sub-pixel segment, according to the present invention.

[0023] FIG. 9 is a timing chart showing the signals at two common lines in relationship to the gateline signal and the data line signal.

[0024] FIG. 10a is a plot of transmittance and reflectance against applied voltage in a sub-pixel segment, according to the present invention.

[0025] FIG. 10b is a plot of transmittance and reflectance as a function of gamma level, according to the present invention.

[0026] FIG. 11 is an equivalent circuit of the transfective LCD display showing the driving scheme of COM2, according to the present invention.

[0027] FIG. 12 is an equivalent circuit of the sub-pixel segment, according to another embodiment of the present invention.

[0028] FIG. 13 is a timing chart showing the signal at COM2, according to a different embodiment of the present invention.

[0029] FIG. 14 is a timing chart showing the signals at COM1 and COM2, according to another embodiment of the present invention.

[0030] FIG. 15 is a timing chart showing the signals at COM1 and COM2, according to yet another embodiment of the present invention.

[0031] FIG. 16 is a cross sectional view showing the layer structure in the lower substrate in a transfective LCD sub-pixel segment, according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0032] A sub-pixel segment, according to one embodiment of the present invention, is illustrated in the equivalent circuit of FIG. 8. As with a sub-pixel segment in a prior art transfective LCD display, the sub-pixel segment (m, n), according to the present invention, has a transmission area and a reflection area jointly controlled by the nth gate line and the mth data line via a switching element. The sub-pixel segment has a common electrode connected to a common line COM1. The optical behavior of the liquid crystal layer in the reflection area is controlled by the reflective electrode and the common electrode. A storage capacitor C₁ is used to retain the electrical charge in the sub-pixel segment after a signal pulse in the gate line has passed.

[0033] In FIG. 8, C_{LC1} is the capacitance mainly attributable to the liquid crystal layer between the transmissive electrode and the common electrode, and C_{LC2} is the capacitance mainly attributable to the liquid crystal layer between the reflective electrode and the common electrode. In addition, a separate capacitor C_C is connected in series to C_{LC2} in order to shift the reflectance in the reflection area toward a higher voltage end in order to avoid the reflectance inversion problem. Furthermore, an adjustment capacitor C₂ is connected between the reflective electrode and a different common line nth COM2. The adjustment capacitor is used to reduce or eliminate the discrepancy between the gamma curve associated with the transmittance and the gamma curve associated with the reflectance. With such an adjustment capacitor C₂, the voltage level on the reflective electrode in reference to the common line voltage V_{COM1} is given by:

$$V_{CLC2} = V_{CC} - V_{COM1}$$

$$= \frac{C_c * (V_{data} - V_{COM1}) + (C_c + C_2) * (nth_V_{COM2} - V_{COM1})}{(C_{LC2} + C_c + C_2)}$$

In FIG. 8, COM3 can be the same as COM1 or different from COM1.

[0034] The nth V_{COM2} signal on the common line COM2 is shown in FIG. 9. In FIG. 9, the dashed line denotes a reference voltage level V_{REF} . As shown, both the V_{COM1} signal on the common line COM1 and the V_{COM2} source signal are AC signals. While the V_{COM1} signal is substantially 180° out of phase with the data signals on Data line n, the V_{COM2} source signal is substantially in phase with the Data line n. It should be noted that the common line COM2 is a floating electrode and, therefore, the shape of nth V_{COM2} signal is dependent upon V_{COM1} and upon the driving mode. For example, when the driving mode is in accordance with a line inversion scheme, the nth V_{COM2} signal has a step-like shape as shown in FIG. 9. In a negative frame, the nth V_{COM2} signal is, in general, is negative but its amplitude fluctuation follows the shape of V_{COM1} . When nth gate line is turned on again and the frame is positive, the nth V_{COM2} is refreshed and changes polarity from negative to positive in a pixel. The shape of the nth V_{COM2} remains the same until the next frame.

[0035] As seen in the above equation, it is possible to adjust the values of C_c and C_2 to improve the viewing quality of a transreflective LCD panel. For example, it is possible to select C_c and C_2 such that

$$C_c / (C_c + C_{LC2} + C_2) = 0.46,$$

and

$$C_2 / (C_c + C_{LC2} + C_2) = 0.32.$$

[0036] With $\Delta A_{COM} = 3V$ (ΔA_{COM} being the absolute value of the amplitude difference between nth V_{COM2} and V_{COM1}), the matching between the transmittance and reflectance is shown in FIG. 10a. As can be seen in FIG. 10a, not only the peak of the reflectance curve reasonably matches the flatter segment of the transmittance curve at about 4.0V, the slope of the transmittance curve and the slope of the reflectance curve from 2V to 4V region are reasonably close to each other. Based on a 64-level transmittance gamma curve with an index of 2.2, or $T = (n/64)^{2.2}$, a reflectance gamma curve is obtained as shown in FIG. 10b. As can be seen, the discrepancy between the transmittance gamma curve and the reflectance gamma curve is greatly reduced.

[0037] The nth V_{COM2} signal as shown in FIG. 9 is used for a swing type display in order to achieve a pixel inversion effect. Such a swing type nth V_{COM2} can be realized by using the driving scheme as shown in FIG. 11. As shown in FIG. 11, the adjustment capacitor C_2 is electrically connected to a common voltage source COM2 through another switching element for receiving nth V_{COM2} . In FIG. 11, V_{COM1} , V_{13} , COM3 and V_{COM4} can be the same or different. Conveniently, only one switching element outside the display area is used to provide the nth V_{COM2} signal for an entire line n. Furthermore, a common capacitor C_{COM} electrically connected to the switching element for stabilizing the voltage signal at the second common electrode nth COM2. In FIGS.

8 and 11, only a common storage capacitor C_1 is used for both the transmission area and the reflection area in a sub-pixel segment. However, it is possible to have two storage capacitors C_{ST1} and C_{ST2} in a sub-pixel segment, separately storing the electric charge in the transmission area and the reflection area, as shown in FIG. 12. Moreover, it is possible to use a constant V_{COM2} signal, as shown in FIG. 13, rather than the swing type signal of FIG. 9.

[0038] In a different embodiment of the present invention, while the swing type nth V_{COM2} is used, V_{COM1} is a constant voltage, as shown in FIG. 14. In yet another embodiment of the present invention, both V_{COM1} and nth V_{COM2} are 180° out of phase with Data line n. Thus, V_{COM1} is in phase with nth V_{COM2} , as shown in FIG. 15.

[0039] The use of adjustment capacitors to achieve harmonization between the transmittance gamma and the reflectance gamma can be implemented in an Active Matrix transreflective liquid crystal display (AM TRLCD) panel without significantly increasing the complexity in the fabrication process. As shown in FIG. 16, the adjustment capacitor can be realized by adding a common line COM2 on the lower substrate. By using a floating metal layer Metal_1, both C_c and C_2 can be achieved.

[0040] Thus, although the invention has been described with respect to one or more embodiments thereof, it will be understood by those skilled in the art that the foregoing and various other changes, omissions and deviations in the form and detail thereof may be made without departing from the scope of this invention.

What is claimed is:

1. A method for improving viewing quality of a liquid crystal display panel, the display panel comprising a liquid crystal layer having a first side and an opposing second side, and a common electrode disposed on the first side of the liquid crystal layer, wherein the common electrode is operatively applied with a common voltage, and wherein the display panel has a plurality of pixels, and at least some of the pixels have a first area and a second area, the first area comprising a first electrode disposed on the second side of the liquid crystal layer, the second area comprising a second electrode disposed on the second side of the liquid crystal layer adjacent to the first electrode, wherein the first electrode is operatively applied with a first voltage to achieve a first optical transmissivity through the liquid crystal layer in the first area as a function of the first voltage, and the second electrode is operatively applied with a second voltage to achieve a second optical transmissivity through the liquid crystal layer in the second area as a function of the second voltage, wherein the first optical transmissivity has a lower transmissivity section and a higher transmissivity section, and the second transmissivity has a lower transmissivity section and a higher transmissivity section, said method comprising:

adjusting the second voltage relative to the first voltage for substantially matching the higher transmissivity section of the second optical transmissivity to the higher transmissivity section of the first optical transmissivity, leaving a discrepancy between the lower transmissivity section of the second optical transmissivity and the lower transmissivity section of the first optical transmissivity; and

providing a voltage different from the common voltage to the second electrode via a charge storage device so as to reduce the discrepancy between the lower transmissivity section of the second optical transmissivity and the lower transmissivity section of the first optical transmissivity.

2. The method of claim 1, wherein the first electrode comprises a transmissive electrode and the second electrode comprises a reflective electrode.

3. The method of claim 2, wherein the first optical transmissivity is equal to the transmittance of the liquid crystal layer through the transmissive electrode in the first area and the second optical transmissivity is equal to the reflectance of the liquid crystal layer reflected from the reflective electrode in the second area.

4. The method of claim 2, wherein the first voltage is a data signal.

5. The method of claim 4, wherein the second area comprises a charge storage capacitor having a first end electrically connected to the data signal and a second end operatively connected to the reflective electrode, and the second voltage is a voltage signal at the second end of the charge capacitor.

6. A method to improve viewing quality of a liquid crystal display, the liquid crystal display comprising:

a plurality of data lines for conveying a data signal;

a plurality of gate lines for providing a driving signal; and

a plurality of pixels, wherein each pixel has a switching unit to admit the data signal from a data line responsive to the driving signal from a gate line, and wherein each pixel has a first liquid crystal capacitor and a second liquid crystal capacitor, wherein a first end of the first capacitor is coupled to the switching unit, said method comprising:

in said each pixel

electrically connecting a coupling capacitor between the switching unit and a first end of the second liquid crystal capacitor;

applying a first common voltage signal to a second end of the first liquid crystal capacitor and a second end of the second liquid crystal capacitor; and

electrically connecting an adjustment capacitor between the first end of the second liquid crystal capacitor and a second common voltage signal.

7. The method of claim 6, further comprising:

electrically connecting a storage capacitor in parallel to the first liquid crystal capacitor.

8. The method of claim 6, further comprising:

electrically connecting a storage capacitor in parallel to the second liquid crystal capacitor.

9. The method of claim 6, further comprising:

operatively connecting an additional switching unit between the adjustment capacitor and a voltage source so as to allow the voltage source to provide the second common voltage signal to the adjustment capacitor via the additional switching unit responsive to the driving signal from the gate line.

10. The method of claim 9, further comprising:

electrically connecting a further capacitor to additional switching unit for stabilizing a voltage at the second common electrode.

11. A liquid crystal display, comprising:

a plurality of data lines for conveying a data signal;

a plurality of gate lines for providing a driving signal; and

a plurality of pixels, each pixel comprising:

a switching unit, responsive to the driving signal from a gate line, for admitting the data signal from a data line;

a first common electrode for providing a first common voltage signal;

a second common electrode for providing a second common voltage signal;

a pixel electrode, electrically connected to the switching unit, for driving a liquid crystal layer within the pixel based on the admitted data signal and the first common voltage signal;

a first liquid crystal capacitor having a first end electrically connected to the first common electrode, and a second end electrically connected to the pixel electrode;

an coupling capacitor having a first end and a second end, wherein the first end is electrically connected to the pixel electrode;

an adjustment capacitor having a first end electrically connected to the second common electrode and a second end connected to the second end of the coupling capacitor; and

a second liquid crystal capacitor having a first end electrically connected to the first common electrode, and a second end electrically connected to the second end of the coupling capacitor, for driving the liquid crystal layer based on the admitted data signal, the first common voltage signal and the second common voltage signal.

12. The liquid crystal display of claim 11, further comprising

a storage capacitor connected in parallel to the first liquid crystal capacitor in said each pixel.

13. The liquid crystal display of claim 11, further comprising

a storage capacitor connected in parallel to the second liquid crystal capacitor in said each pixel.

14. The liquid crystal display of claim 11, wherein, in said each pixel,

the first liquid crystal capacitor has two electrode ends, each of which is made of substantially transparent material, and

the second liquid crystal capacitor has a first electrode end made of substantially transparent material and a second electrode end made of a reflective material.

15. The liquid crystal display of claim 11, wherein, in said each pixel,

the second liquid crystal capacitor has two electrode ends, each of which is made of substantially transparent material, and

the first liquid crystal capacitor has a first electrode end made of substantially transparent material and a second electrode end made of a reflective material.

16. The liquid crystal display of claim 11, further comprising:

a voltage source for providing the second common voltage signal; and

an additional switching unit, responsive to the driving signal from said gate line, for electrically connecting the second common electrode in said each pixel to the voltage source.

17. The liquid crystal display of claim 16, further comprising

a further capacitor electrically connected to the second common electrode in said each pixel for stabilizing a voltage at the second common electrode.

18. The liquid crystal display of claim 17, wherein the further capacitor has a first end electrically connected to the second common electrode and a second end electrically connected to the first common electrode.

19. The liquid crystal display of claim 16, wherein each of the first and second common voltage signals is a constant voltage signal or an AC voltage signal.

20. The liquid crystal display of claim 16, wherein the first common voltage signal and the second common voltage signal are AC signals 180 degrees out of phase with each other.

21. The liquid crystal display of claim 16, wherein the first common voltage signal and the second common voltage signal are AC signals in phase with each other.

22. The liquid crystal display of claim 16, wherein the second common voltage signal comprises a constant voltage signal.

23. The liquid crystal display of claim 11, wherein the first end of the first liquid crystal capacitor comprises a first transparent electrode and the second end of the first liquid crystal capacitor comprises a second transparent electrode, and wherein the first end of the second liquid crystal capacitor comprises a transparent electrode and the second end of the second liquid crystal capacitor comprises a reflective electrode.

24. The liquid crystal display of claim 23, further comprising:

a voltage source for providing the second common voltage signal;

an additional switching unit, responsive to the driving signal from said gate line, for electrically connecting the second common electrode in said each pixel to the voltage source; and

a further capacitor electrically connected to the second common electrode for stabilizing a voltage at the second common electrode.

* * * * *

专利名称(译)	具有伽马协调的半透半反液晶显示器		
公开(公告)号	US20070263144A1	公开(公告)日	2007-11-15
申请号	US11/432157	申请日	2006-05-10
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电股份有限公司		
当前申请(专利权)人(译)	友达光电股份有限公司		
[标]发明人	LIN CHING HUAN SU JENN JIA CHANG CHIH MING		
发明人	LIN, CHING-HUAN SU, JENN-JIA CHANG, CHIH-MING		
IPC分类号	G02F1/1335		
CPC分类号	G09G3/3648 G09G2320/0276 G09G2300/0876 G09G2300/0456		
其他公开文献	US7683988		
外部链接	Espacenet USPTO		

摘要(译)

在具有透射区域和反射区域的半透半反液晶显示器中，透射电极连接到开关元件以控制透射区域中的液晶层，并且反射电极通过单独的电容器连接到开关元件。控制反射区域中的液晶层。单独的电容器用于将反射区域中的反射率朝向较高电压端移动，以避免反射率反转问题。另外，调整电容器连接在反射电极和不同的公共线之间。调节电容器用于减少或消除与透射率相关的伽马曲线与与反射率相关的伽马曲线之间的差异。

