



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
27.05.2015 Bulletin 2015/22

(51) Int Cl.:
G02F 1/1335 (2006.01) G02F 1/137 (2006.01)

(21) Application number: **12852446.9**

(86) International application number:
PCT/CN2012/084117

(22) Date of filing: **06.11.2012**

(87) International publication number:
WO 2014/012307 (23.01.2014 Gazette 2014/04)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventor: **ZHAO, Weili**
Beijing 100176 (CN)

(74) Representative: **Brötz, Helmut et al**
Rieder & Partner
Patentanwälte - Rechtsanwalt
Corneliusstrasse 45
42329 Wuppertal (DE)

(30) Priority: **20.07.2012 CN 201210259507**

(71) Applicant: **BOE Technology Group Co., Ltd.**
Beijing 100015 (CN)

(54) **LIQUID CRYSTAL DISPLAY DEVICE**

(57) An embodiment of the present invention discloses a liquid crystal display device, which comprises: a backlight source; a first handedness cholesteric liquid crystal film layer, located at an upper side of the backlight source as a light emitting surface; an array substrate, located at an upper side of the first handedness cholesteric liquid crystal film layer; a color filter substrate, located at an upper side of the array substrate; and a second

handedness cholesteric liquid crystal layer, sandwiched between the array substrate and the color filter substrate, the first handedness being opposite to the second handedness. The liquid crystal display device greatly improves light efficiency and transmittance of the display and saves the processing steps and manufacturing costs.

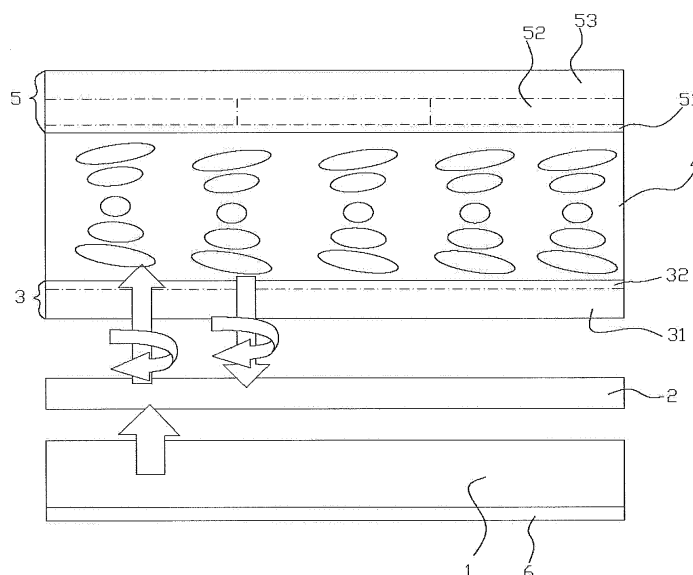


FIG.1

Description

TECHNICAL FIELD

[0001] Embodiments of the present invention relate to a liquid crystal display device.

BACKGROUND

[0002] Cholesteric liquid crystal comprises a plurality of layers. Molecules are arranged along a same direction in each of the layers, but the arrangement directions of molecules are rotated by an angle of about 15 minutes between any two adjacent layers, so that a spiral structure can be obtained in the stacked layers. When the arrangement of the molecules of an upper layer is rotated by 360 degrees with respect to a lower layer, the distance between the upper layer and the lower layer is a pitch p . According to the direction of the spiral structure, the cholesteric liquid crystal is divided into left-handed cholesteric liquid crystal and right-handed cholesteric liquid crystal, which can respectively reflect left circularly polarized light and right circularly polarized light. The reflection of the cholesteric liquid crystal follows the Bragg law: $\lambda = n \cdot p$ (wherein n is average refractivity of the cholesteric liquid crystal, and p is a pitch of the cholesteric liquid crystal). When the cholesteric liquid crystal is a mixture of a series of liquid crystals having different pitches, it may probably reflect the whole wavelength band of the visible light. The cholesteric liquid crystal may have bistable state characteristic, i.e., being in a planar alignment (after application of a high voltage) or a focal conic alignment (after application of a low voltage) when no power is supplied, while being vertically arranged when it is energized, and at this time, it become equivalent to the normal VA (Vertical Alignment) mode liquid crystal. With cholesteric liquid crystal's reflection performance, cholesteric liquid crystal may be used for manufacturing a reflective polarizer; by making use of its bistable state characteristic, cholesteric liquid crystal may realize reflective liquid crystal display and transparent display.

SUMMARY

[0003] Embodiments of the present invention are intended to provide a liquid crystal display device using cholesteric liquid crystal.

[0004] One aspect of the present invention provides a liquid crystal display device, comprising: a backlight source; a first handedness cholesteric liquid crystal film layer, located at an upper side of the backlight source as a light emitting surface; an array substrate, located at an upper side of the first handedness cholesteric liquid crystal film layer; a color filter substrate, located at an upper side of the array substrate; and a second handedness cholesteric liquid crystal layer, sandwiched between the array substrate and the color filter substrate, the first handedness being opposite to the second handedness.

[0005] In the liquid crystal display device, for example, a reflecting sheet, a reflecting surface of which faces toward the first handedness cholesteric liquid crystal film layer, is disposed at a lower side of the backlight source.

[0006] In the liquid crystal display device, for example, the first handedness cholesteric liquid crystal film layer is a left-handed cholesteric liquid crystal film layer; and the second handedness cholesteric liquid crystal layer is a right-handed cholesteric liquid crystal layer.

[0007] Or, in the liquid crystal display device, for example, the first handedness cholesteric liquid crystal film layer is a right-handed cholesteric liquid crystal film layer; and the second handedness cholesteric liquid crystal layer is a left-handed cholesteric liquid crystal layer.

[0008] In the liquid crystal display device, for example, the array substrate comprises: a lower substrate disposed adjacent to the first handedness cholesteric liquid crystal film layer, and a pixel electrode layer on an upper surface of the lower substrate.

[0009] In the liquid crystal display device, for example, the color filter substrate comprises: an upper substrate, and a color filter layer and a common electrode layer sequentially manufactured on a lower surface of the upper substrate.

[0010] The liquid crystal display device with the reflective performance and bistable state performance of cholesteric liquid crystal in an embodiment of the present invention has the following advantages: the transmittance of the display is greatly improved; with the provision of a reflective sheet, the light source efficiency is greatly improved, the panel has great brightness, and the energy can be saved; the processing steps and manufacturing costs are reduced.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] In order to clearly illustrate the technical solution of the embodiments of the invention, the drawings of the embodiments will be briefly described in the following; it is obvious that the described drawings are only related to some embodiments of the invention and thus are not limitative of the invention.

Fig. 1 is a schematic view of a liquid crystal display of the present invention in a dark state;

Fig. 2 is a schematic view of the liquid crystal display of the present invention in a bright state;

Reference signs:

[0012] 1 backlight source; 2 left-handed cholesteric liquid crystal film layer; 3 array substrate; 31 lower substrate; 32 pixel electrode layer; 4 right-handed cholesteric liquid crystal layer; 5 color filter substrate; 51 common electrode layer; 52 color filter layer; 53 upper substrate; 6 reflective sheet.

DETAILED DESCRIPTION

[0013] In order to make objects, technical details and advantages of the embodiments of the invention apparent, the technical solutions of the embodiments will be described in a clearly and fully understandable way in connection with the drawings related to the embodiments of the invention. Apparently, the described embodiments are just a part but not all of the embodiments of the invention. Based on the described embodiments herein, those skilled in the art can obtain other embodiment(s), without any inventive work, which should be within the scope of the invention.

[0014] Unless otherwise defined, the technical or scientific terms used herein shall have the general meanings understandable for those ordinarily skilled in the field of the present invention. The words such as "first", "second" or similar used in the description and claims of the present application shall not represent any order, number or importance, but are used for distinguishing between similar elements. The words such as "a", "an", "the" or the like shall not represent limitation of numbers, but mean existence of at least one. The words "include", "comprise" or similar intend to mean the elements or objects before such words cover or are equivalent to the elements or objects listed after such words, but other elements or objects are not exclusive. The words "joint", "connect" or similar are not limited to physical or chemical connection, but also include electrical connection, no matter directly or indirectly. The words "upper", "lower", "left", "right" and etc. shall be used only to represent relative positions, and when the absolute position of the described object is changed, the relative positions may be changed accordingly.

[0015] The array substrate in an embodiment of the present invention comprises a plurality of gate lines and a plurality of data lines which intersect each other to define a plurality of pixel units arranged in a matrix, each of the pixel units comprising a thin film transistor (TFT) as a switching element and a pixel electrode for controlling the arrangement of liquid crystal. For example, in each pixel, the gate electrode of the thin film transistor is electrically connected to or integrally formed with a corresponding gate line, a source electrode is electrically connected to or integrally formed with a corresponding data line, and a drain electrode is electrically connected to or integrally formed with a corresponding pixel electrode.

[0016] The color filter substrate for example comprises a black matrix and a plurality of color filters in the plurality of pixel units defined by the black matrix. These color filters of the pixel units for example comprise red, green and blue (RGB) filters, and these red, green and blue pixel units are arranged in such a way as to correspond to the pixel units on the array substrate. White light transmits through these color filters and then become corresponding these kinds of color light for color display. The color filter substrate may further comprise a common

electrode for cooperating with the pixel electrodes in the pixel units on the array substrate so as to apply an electric field to the liquid crystal.

[0017] Although a single pixel unit is described herein, other pixel units may operate similarly.

[0018] As shown in Figs. 1 and 2, the present embodiment discloses a liquid crystal display device, comprising: a backlight source 1; a first handedness cholesteric liquid crystal film layer 2, located at a side of a light emitting surface of the backlight source; a TFT substrate 3, located at an upper side of the first handedness cholesteric liquid crystal film layer 2; a color filter substrate 5, located at an upper side of the TFT substrate 3; and a second handedness cholesteric liquid crystal layer 4, sandwiched between the TFT substrate 3 and the color filter substrate 5. The TFT substrate 3 is an example of the array substrate.

[0019] In the present embodiment, "upper side" refers to the side toward the viewing face of the liquid crystal display device, and "lower side" refers to the side away from the liquid crystal display device, as shown in Figs. 1 and 2.

[0020] In the present embodiment, a reflective sheet 6, a reflecting surface of which faces toward the first handedness cholesteric liquid crystal film layer 2, is disposed at a lower side of the backlight source 1. That is, the backlight source 1 is sandwiched between the first handedness cholesteric liquid crystal film layer 2 and the reflective sheet 6, which are opposite to each other. In another embodiment of the present invention, the lower side of the backlight source 1 may not be provided with a reflective sheet, although the embodiment without a reflective sheet may have a lowered utilization efficiency of the light source. The reflective sheet 6, for example, may be a metal sheet or a plastic sheet plated with a metal reflective layer on the surface.

[0021] In the present embodiment, the first handedness cholesteric liquid crystal film layer 2 is a left-handed cholesteric liquid crystal film layer; the second handedness cholesteric liquid crystal layer 4 is a right-handed cholesteric liquid crystal layer. In another embodiment of the present invention, the first handedness cholesteric liquid crystal film layer 2 may be a right-handed cholesteric liquid crystal film layer; the second handedness cholesteric liquid crystal layer 4 may be a left-handed cholesteric liquid crystal layer. For example, these left-handed and right-handed cholesteric liquid crystals each may be made of known liquid crystal materials in the relevant technical field, and no more details are described herein for simplicity.

[0022] The backlight source 1 may be a direct lighting type or an edge lighting type backlight source, and, for example, it may adopt a cold cathode fluorescent lamp (CCFL) or light emitting diodes (LEDs) as a light source.

[0023] During operation, the light emitted from the backlight source 1 includes left-handed polarized light and right-handed polarized light. According to the reflective characteristics of the cholesteric liquid crystal, the

left-handed cholesteric liquid crystal film reflects left-handed polarized light and transmits right-handed polarized light therethrough; the right-handed cholesteric liquid crystal film reflects right-handed polarized light and transmits left-handed polarized light therethrough. As a result, for the embodiment shown in Fig. 1, only the right-handed light among the light emitted from the backlight source 1 is transmitted through the left-handed cholesteric liquid crystal film layer 2, while the left-handed polarized light are reflected. That is, only a half of the light is transmitted through and the other half is reflected by the left-handed cholesteric liquid crystal film layer 2. The reflected left-handed polarized light return to the left-handed cholesteric liquid crystal film layer 2 after being reflected at the reflective sheet 6. Since the left-handed polarized light is changed into right-handed polarized light after being reflected and can be transmitted through the left-handed cholesteric liquid crystal film layer 2. Therefore, where the reflective sheet 6 is provided, all the light emitted from the backlight source 1 may pass through the left-handed cholesteric liquid crystal film layer 2 in the form of right-handed polarized light.

[0024] An illustrative diagram of the liquid crystal display device in a dark state of the present embodiment is shown in Fig. 1.

[0025] In the dark state, the right-handed cholesteric liquid crystal layer 4 corresponding to a pixel unit is in planar alignment of the bistable state and will reflect the right-handed polarized light. As stated before, all of the light emitted from the backlight source 1 is changed into right-handed polarized light after passing through the left-handed cholesteric liquid crystal film layer 2, so all the light (right-handed polarized light) is reflected by the right-handed cholesteric liquid crystal layer and can not be transmitted therethrough, whereby the liquid crystal display device presents the dark state.

[0026] An illustrative diagram of the liquid crystal display device in a bright state of the present embodiment is shown in Fig. 2.

[0027] In the bright state, when the right-handed cholesteric liquid crystal layer 4 corresponding to a pixel unit is energized through for example the pixel electrode and the common electrode, the right-handed cholesteric liquid crystal is changed into vertical alignment, which is equivalent to the arrangement of the VA mode. As stated before, all of the light emitted from the backlight source 1 is changed into right-handed polarized light after passing through the left-handed cholesteric liquid crystal film layer 2, so all of the right-handed polarized light can be transmitted through the right-handed cholesteric liquid crystal layer 4, whereby the bright state is presented.

[0028] In the present embodiment, as shown in Figs. 1 and 2, the TFT substrate 3 may comprise: a lower substrate 31 disposed adjacent to the first handedness cholesteric liquid crystal film layer 2, and a pixel electrode layer 32 on an upper surface of the lower substrate 31.

[0029] The color filter substrate 5 may comprise: an upper substrate 53, and a color filter layer 52 and a com-

mon electrode layer 51 sequentially manufactured on a lower surface of the upper substrate 53.

[0030] In the present embodiment, "upper surface" refers to the surface of the side toward the viewing face of the liquid crystal display device, and "lower surface" refers to the surface of the side away from the liquid crystal display device, as shown in Figs. 1 and 2.

[0031] In other embodiment of the present invention, a film layer or structure having other function, e.g. an antireflection film and etc., may be added to the liquid crystal display device according to requirements.

[0032] The liquid crystal display devices in the above embodiments of the present invention do not need polarizers for display so that the transmittance of the display device is greatly improved. At the same time, with provision of the reflective sheet, the light emitted from the backlight source 1 may be reused after being reflected, so that the light source efficiency is greatly improved, the panel has great brightness, and the energy can be saved. During the process of manufacturing the liquid crystal display devices in the embodiments of the present invention, since there is no need of any alignment film or orientation process, the processing steps and manufacturing costs are reduced.

[0033] The above embodiments of the present invention are given by way of illustration only and thus are not limitative of the protection scope of the present invention, which is determined by the attached claims.

Claims

1. A liquid crystal display device, comprising:

a backlight source;
a first handedness cholesteric liquid crystal film layer, located at an upper side of the backlight source as a light emitting surface;
an array substrate, located at an upper side of the first handedness cholesteric liquid crystal film layer;
a color filter substrate, located at an upper side of the array substrate; and
a second handedness cholesteric liquid crystal layer, sandwiched between the array substrate and the color filter substrate, the first handedness being opposite to the second handedness.

2. The liquid crystal display device according to claim 1, wherein a reflecting sheet, a reflecting surface of which faces toward the first handedness cholesteric liquid crystal film layer, is disposed at a lower side of the backlight source.

3. The liquid crystal display device according to claim 1 or 2, wherein the first handedness cholesteric liquid crystal film layer is a left-handed cholesteric liquid crystal film layer; and the second handedness chol-

esteric liquid crystal layer is a right-handed cholesteric liquid crystal layer.

4. The liquid crystal display device according to claim 1 or 2, wherein the first handedness cholesteric liquid crystal film layer is a right-handed cholesteric liquid crystal film layer; and the second handedness cholesteric liquid crystal layer is a left-handed cholesteric liquid crystal layer. 5
10
5. The liquid crystal display device according to any one of claims 1-4, wherein the array substrate comprises a lower substrate disposed adjacent to the first handedness cholesteric liquid crystal film layer, and a pixel electrode layer on an upper surface of the lower substrate. 15
6. The liquid crystal display device according to any one of claims 1-5, wherein the color filter substrate comprises: an upper substrate, and a color filter layer and a common electrode layer sequentially manufactured on a lower surface of the upper substrate. 20

25

30

35

40

45

50

55

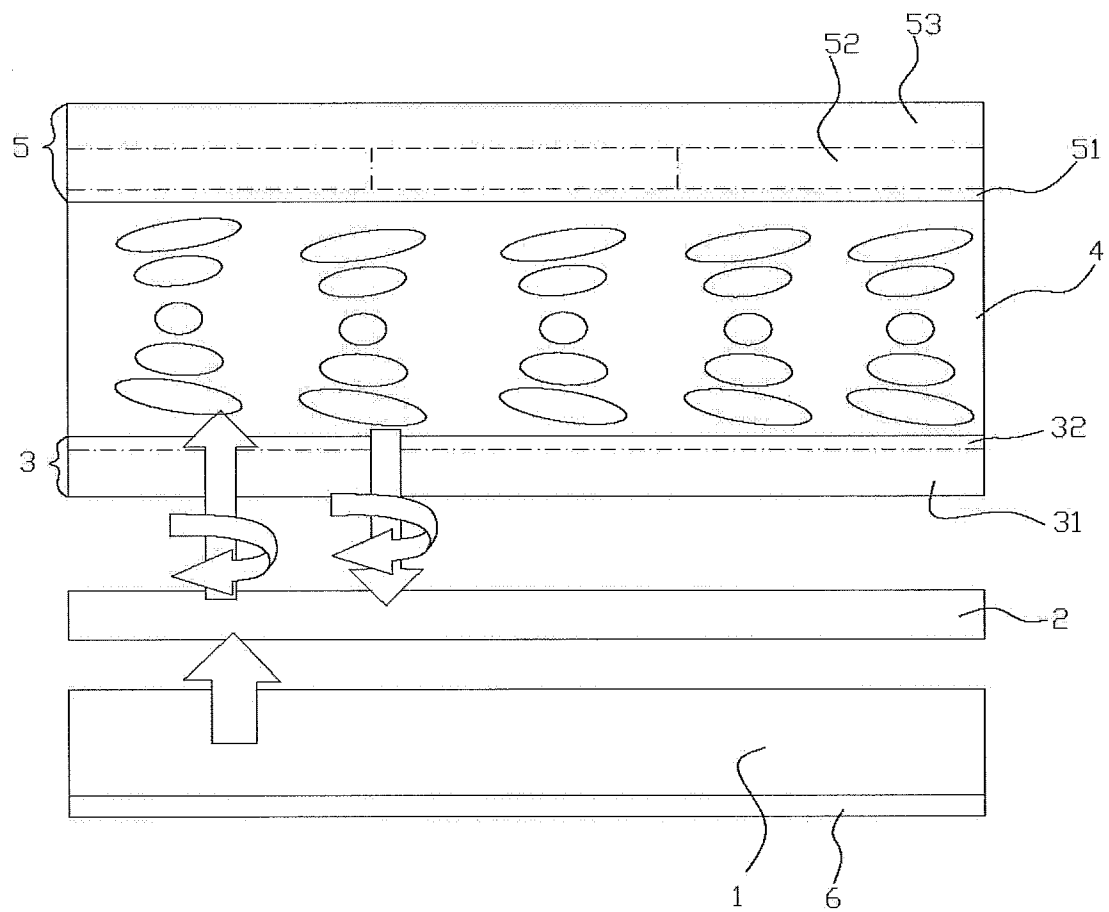


FIG.1

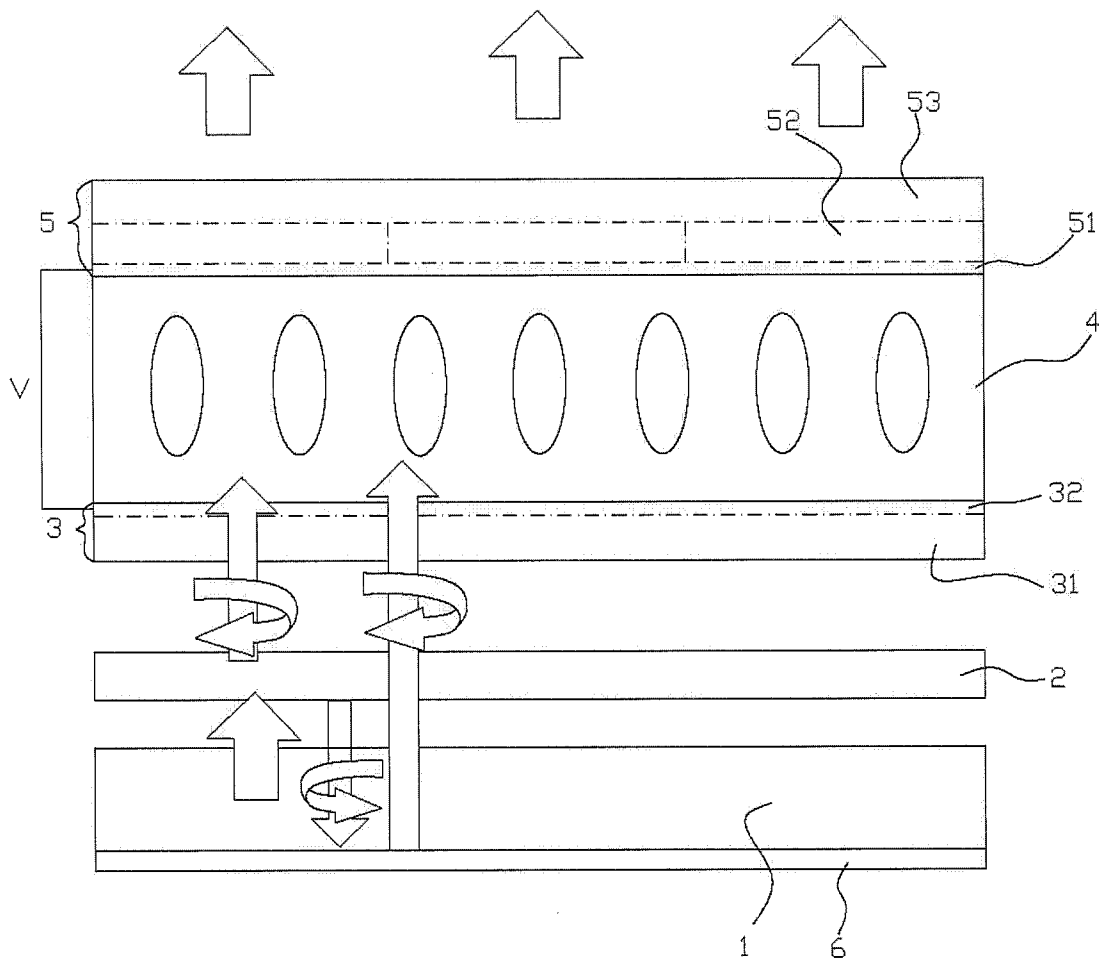


FIG.2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/084117

A. CLASSIFICATION OF SUBJECT MATTER

See the extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS; CNTXT; VEN: left rotary colour filter filtering colour film liquid w crystal lc cholest+ chloster+ rotary turn+ left right rotary cf colo?r backlight+ back 1w light light+ w source

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KR 20040058843 A (LG PHILIPS LCD CO., LTD.), 05 July 2004 (05.07.2004), description, page 6, paragraph 5 to page 8, paragraph 8, and figures 6-10	1-6
A	US 5877826 A (UNIVERSITY KENT STATE), 02 March 1999 (02.03.1999), the whole document	1-6
PX	CN 102759823 A (BOE TECHNOLOGY GROUP CO., LTD.), 31 October 2012 (31.10.2012), the whole document	1-6
A	CN 1916713 A (CHUNGHWA PICTURE TUBES, LTD.), 21 February 2007 (21.02.2007), the whole document	1-6
A	CN 101750784 A (INDUSTRIAL TECHNOLOGY RESEARCH INSTITUTE), 23 June 2010 (23.06.2010), the whole document	1-6
A	JP 2000122059 A (TOSHIBA KK), 28 April 2000 (28.04.2000), the whole document	1-6

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

18 April 2013 (18.04.2013)

Date of mailing of the international search report

02 May 2013 (02.05.2013)

Name and mailing address of the ISA/CN:
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No.: (86-10) 62019451

Authorized officer

ZHANG, Hua

Telephone No.: (86-10) 62085553

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/CN2012/084117

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
KR 20040058843 A	05.07.2004	KR 100887673 B1	11.03.2009
US 5877826 A	02.03.1999	None	
CN 102759823 A	31.10.2012	None	
CN 1916713 A	21.02.2007	CN 100432774 C	12.11.2008
CN 101750784 A	23.06.2010	CN 101750784 B	19.09.2012
JP 2000122059 A	28.04.2000	None	

Form PCT/ISA/210 (patent family annex) (July 2009)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/084117

5
10
15
20
25
30
35
40
45
50
55

A. CLASSIFICATION OF SUBJECT MATTER

G02F 1/1335 (2006.01) i

G02F1/137 (2006.01) i

专利名称(译)	液晶显示装置		
公开(公告)号	EP2876492A1	公开(公告)日	2015-05-27
申请号	EP2012852446	申请日	2012-11-06
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	ZHAO WEILI		
发明人	ZHAO, WEILI		
IPC分类号	G02F1/1335 G02F1/137 F21V9/14 G02F1/13357		
CPC分类号	G02F1/13718 G02F1/13362 G02F2001/133541 G02F2001/133543 G02F2001/133567 G02F2201/343		
优先权	201210259507.X 2012-07-20 CN		
其他公开文献	EP2876492A4		
外部链接	Espacenet		

摘要(译)

本发明实施例公开了一种液晶显示装置，包括：背光源；第一螺旋胆甾型液晶薄膜层，位于背光源的上侧作为发光表面；阵列基板，位于第一螺旋胆甾型液晶薄膜层的上侧；滤色器基板，位于阵列基板的下侧；第二螺旋胆甾型液晶层夹在阵列基板和滤色器基板之间，第一螺旋性与第二螺旋性相反。液晶显示装置大大提高了显示器的光效率和透射率，节省了加工步骤和制造成本。

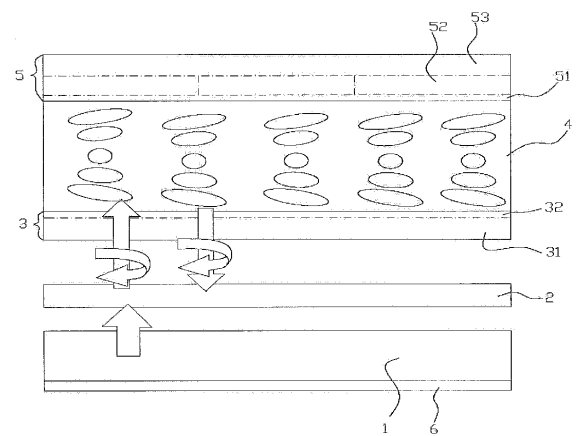


FIG.1