



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
03.06.2015 Bulletin 2015/23

(51) Int Cl.:
G02F 1/1343 ^(2006.01) **G02F 1/1335** ^(2006.01)

(21) Application number: **12881141.1**

(86) International application number:
PCT/CN2012/082805

(22) Date of filing: **11.10.2012**

(87) International publication number:
WO 2014/015565 (30.01.2014 Gazette 2014/05)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(71) Applicant: **BOE Technology Group Co., Ltd.**
Beijing 100015 (CN)

(72) Inventor: **XIE, Chang**
Beijing 100176 (CN)

(30) Priority: **27.07.2012 CN 201210265620**

(74) Representative: **Klunker . Schmitt-Nilson . Hirsch**
Patentanwälte
Destouchesstraße 68
80796 München (DE)

(54) **BLUE-PHASE LIQUID CRYSTAL PANEL AND DISPLAY DEVICE**

(57) A blue phase liquid crystal panel and a display device provide a transmissive mode blue phase liquid crystal panel with a single cell gap so as to simplify the process. The blue phase liquid crystal panel comprises: a first substrate (11) and a second substrate (12) that are disposed opposite to each other so as to form a liquid crystal cell; a blue phase liquid crystal layer (13) between the two substrates (11, 12); gate lines (300) and data lines (301) arranged to intersect the gate lines (300) to

define pixel regions on an inner side of the first substrate. The blue phase liquid crystal panel has a single cell gap, and the pixel regions are divided into transmission regions and reflection regions. The light for display in the transmission region and the light for display in the reflection region of a same pixel region generate the same phase retardation after passing through the blue phase liquid crystal layer (13).

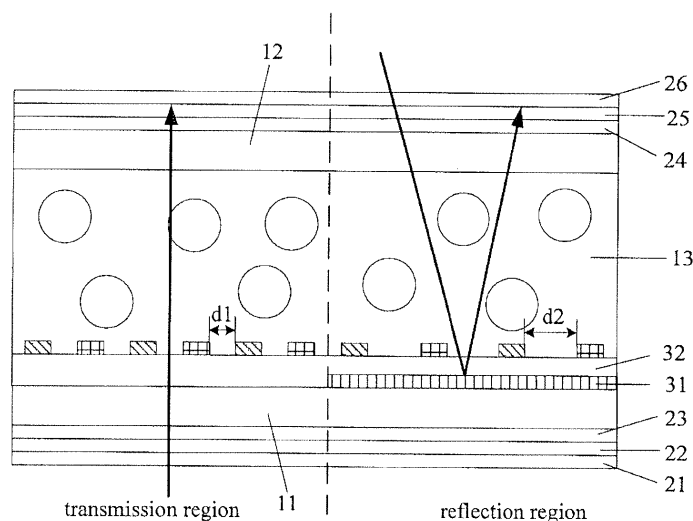


FIG.1

Description

TECHNICAL FIELD

[0001] Embodiments of the present invention relate to a transfective mode blue phase liquid crystal panel and a display device.

BACKGROUND

[0002] According to the light sources employed for display, liquid crystal display devices can be categorized into a transmissive mode, a reflective mode, and a transfective mode. Sharing the advantages of the transmissive mode and the reflective mode liquid crystal display devices, the transfective mode liquid crystal display devices have been widely used in the display apparatuses of electronic products.

[0003] In order to improve the display quality of liquid crystal display and realize a higher contrast ratio, quicker response duration, and a wider viewing angle, blue phase liquid crystal materials having quick response characteristics have gradually attracted more and more attention. Blue phase is a liquid crystal phase that is between the isotropic phase and the cholesteric phase, and it exists in a very narrow window of temperature, e.g., about 1 °C. But, it has been found in the recent years that the blue phase liquid crystal subjected to stabilization with polymers can exist in a much wider window of temperature, which can basically satisfy the requirement for serving as a liquid crystal display material.

[0004] Being the next generation display with greatest potential, the blue phase liquid crystal display has the following characteristics: (1) it has a wide viewing angle and a good display effect in a dark state; (2) it has very short theoretical response time, which may reach the level less than millisecond; (3) it does not need any alignment layer required by other liquid crystal displays, which can lower the production costs and simplify the manufacturing process.

[0005] However, the current transfective mode blue phase liquid crystal display usually adopts a double cell-gap structure to achieve consistent phase retardation in the transmission region and the reflection region, but there are greater difficulties in manufacturing the display with the double cell-gap structure.

SUMMARY

[0006] The embodiments of the present invention provide a blue phase liquid crystal panel and a display device, for providing a transfective mode blue phase liquid crystal panel with a single cell gap so as to simplify the process.

[0007] One aspect of the present invention provides a blue phase liquid crystal panel, comprising: a first substrate and a second substrate that are disposed opposite to each other so as to form a liquid crystal cell; a blue

phase liquid crystal layer between the two substrates; a gate line and a data line arranged to intersect the gate line to define a pixel region on an inner side of the first substrate; and stripe-shaped electrodes located in the pixel region defined by the gate line and the data line. The blue phase liquid crystal panel has a single cell gap, and the pixel region is divided into a transmission region and a reflection region; a distance between the adjacent stripe-shaped electrodes in the transmission region is smaller than a distance between the adjacent stripe-shaped electrodes in the reflection region in the same layer, such that the light for display in the transmission region and the light for display in the reflection region of a same pixel region generate the same phase retardation after passing through the blue phase liquid crystal layer.

[0008] For example, the blue phase liquid crystal panel further comprises: a first quarter wave plate, a first half wave plate, and a first polarizer disposed on an outer side of the first substrate; and a second quarter wave plate, a second half wave plate and a second polarizer disposed on an outer side of the second substrate.

[0009] For example, in the reflection region, a reflective layer is disposed on an inner side of the first substrate, and an insulating layer is disposed on the reflective layer, the insulating layer extending in both the transmission region and the reflection region.

[0010] For example, a thickness of the insulating layer in the transmission region is greater than a thickness of the insulating layer in the reflection region, and difference between the thicknesses of the insulating layer in the two regions is equal to the thickness of the reflective layer.

[0011] For example, the stripe-shaped electrodes in the pixel region defined by the gate lines and the data lines comprise: a pixel electrode and a common electrode disposed in the pixel region defined by the gate line and the data line and arranged in the same layer; the pixel electrode comprises a plurality of first stripe-shaped electrodes and the common electrode comprises a plurality of second stripe-shaped electrodes, and the first stripe-shaped electrodes and the second stripe-shaped electrodes are arranged at intervals.

[0012] For example, the stripe-shaped electrodes in the pixel region defined by the gate line and the data line comprise: an upper electrode and a lower electrode disposed in the pixel region defined by the gate line and the data line and arranged in different layers; the upper electrode comprises a plurality of stripe-shaped electrodes and the lower electrode is a planar electrode, or both the upper electrode and the lower electrode comprise a plurality of stripe-shaped electrodes.

[0013] Another aspect of the present invention provides a blue phase liquid crystal panel, comprising: a first substrate and a second substrate that are disposed opposite to each other so as to form a liquid crystal cell; a blue phase liquid crystal layer between the two substrates; a gate line, and a first data line and a second data line arranged to intersect the gate line to define a pixel region on an inner side of the first substrate, wherein

the pixel region defined by the gate line and the first and second data lines is divided into a transmission region and a reflection region; a common electrode disposed in the pixel region; a pixel electrode disposed in the pixel region, the pixel electrode comprising a first pixel electrode in the transmission region and a second pixel electrode in the reflective region that is arranged in a same layer as the first pixel electrode. The blue phase liquid crystal panel has a single cell gap. At least one of the common electrode and the pixel electrode comprises a plurality of stripe-shaped electrodes. With power being supplied, the first data line and the second data line apply different voltages to the first pixel electrode and the second pixel electrode respectively, such that a voltage difference between the first pixel electrode and the common electrode is greater than that between the second pixel electrode and the common electrode in the same pixel region, and the light for display in the transmission region and the light for display in the reflection region generate the same phase retardation after passing through the blue phase liquid crystal layer.

[0014] For example, the blue phase liquid crystal panel further comprises: a first quarter wave plate, a first half wave plate, and a first polarizer disposed on an outer side of the first substrate; and a second quarter wave plate, a second half wave plate and a second polarizer disposed on an outer side of the second substrate.

[0015] For example, the first data line and the second data line are disposed respectively on two sides of the pixel region.

[0016] For example, in the reflection region, a reflective layer is disposed on the inner side of the first substrate, and an insulating layer is disposed on the reflective layer, the insulating layer extending in both the transmission region and the reflection region.

[0017] For example, a thickness of the insulating layer in the transmission region is greater than a thickness of the insulating layer in the reflection region, and difference between the thicknesses of the insulating layer in the two regions is equal to the thickness of the reflective layer.

[0018] For example, the common electrode and the pixel electrode are disposed in the same layer and both comprise stripe-shaped electrodes, and a distance between adjacent stripe-shaped electrodes in the transmission regions is equal to a distance between the adjacent stripe-shaped electrodes in the reflection regions in the same layer, the stripe-shaped electrodes of the first pixel electrode and the stripe-shaped electrodes of the common electrode in the transmission region being arranged at intervals, the stripe-shaped electrodes of the second pixel electrode and the stripe-shaped electrodes of the common electrode in the reflection region being arranged at intervals.

[0019] For example, the common electrode and the pixel electrode are disposed in different layers, and one of the common electrode and the pixel electrode that is in an upper layer comprises a plurality of stripe-shaped electrode, and the other thereof that is in a lower layer is

a planar electrode; or, both of the common electrode and the pixel electrode comprise a plurality of stripe-shaped electrodes; a distance between adjacent stripe-shaped electrodes in the transmission regions is equal to a distance between the adjacent stripe-shaped electrodes in the reflection regions in the same layer.

[0020] A further aspect of the present invention provides a display device, comprising any one of the aforementioned blue phase liquid crystal panel.

[0021] The transfective mode blue phase liquid crystal panels provided in embodiments of the present invention have a single cell gap. By providing the adjacent stripe-shaped electrodes in the transmission regions with a distance smaller than that of the adjacent stripe-shaped electrodes in the reflection regions in the same layer, or applying a voltage difference between the first pixel electrode and the common electrode greater than that between the second pixel electrode and the common electrode in the same pixel region with power being supplied, the light for display in the transmission region and the light for display in the reflection region generate the same phase retardation after passing through the blue phase liquid crystal layer, thereby realizing the display effect of the transfective mode blue phase liquid crystal panel with a single cell gap. Since the embodiments of the present invention adopt the structure of a single cell gap, the manufacturing process can be simplified.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] In order to clearly illustrate the technical solution of the embodiments of the invention, the drawings of the embodiments will be briefly described in the following; it is obvious that the described drawings are only related to some embodiments of the invention and thus are not limitative of the invention.

Fig. 1 is a structural schematic view of a transfective mode blue phase liquid crystal panel provided in the present invention when no voltage is applied;

Fig. 2 is a structural schematic view of the transfective mode blue phase liquid crystal panel illustrated in Fig. 1 while voltages are applied;

Fig. 3 is a structural schematic view of the pixel structure in the transfective mode blue phase liquid crystal panel illustrated in Fig. 1;

Fig. 4 is a structural schematic view of another transfective mode blue phase liquid crystal panel provided in the present invention when no voltage is applied;

Fig. 5 is a structural schematic view of the transfective mode blue phase liquid crystal panel illustrated in Fig. 4 while voltages are applied;

Fig. 6 is a structural schematic view of the pixel structure in the transfective mode blue phase liquid crystal panel illustrated in Fig. 4;

Fig. 7 is a structural schematic view of another transfective mode blue phase liquid crystal panel provid-

ed in the present invention when no voltage is applied;

Fig. 8 is a structural schematic view of the transreflective mode blue phase liquid crystal panel illustrated in Fig. 7 while voltages are applied;

Fig. 9 is a structural schematic view of the pixel structure in the transreflective mode blue phase liquid crystal panel illustrated in Fig. 7;

Fig. 10 is a structural schematic view of a transreflective mode blue phase liquid crystal panel provided in the present invention when no voltage is applied;

Fig. 11 is a structural schematic view of the transreflective mode blue phase liquid crystal panel illustrated in Fig. 10 while voltages are applied; and

Fig. 12 is a structural schematic view of the pixel structure in the transreflective mode blue phase liquid crystal panel illustrated in Fig. 10;

DETAILED DESCRIPTION

[0023] In order to make objects, technical details and advantages of the embodiments of the invention apparent, the technical solutions of the embodiments will be described in a clearly and fully understandable way in connection with the drawings related to the embodiments of the invention. Apparently, the described embodiments are just a part but not all of the embodiments of the invention. Based on the described embodiments herein, those skilled in the art can obtain other embodiment(s), without any inventive work, which should be within the scope of the invention.

[0024] With reference to Figs. 1-3, and 7-9, the embodiments of the present invention each provide a blue phase liquid crystal panel, the liquid crystal panel comprising: a first substrate 11 and a second substrate 12 that are disposed opposite to each other so as to form a liquid crystal cell, and a blue phase liquid crystal layer 13 provided between the two substrates 11, 12. The liquid crystal panel further comprises: gate lines 300 on an inner side of the first substrate 11, and data lines 301 arranged to intersect the gate lines, and stripe-shaped electrodes located in pixel regions defined by the gate lines and the data lines. These gate lines and data lines intersect each other (e.g., perpendicularly intersect) so as to define a plurality of pixel regions, which pixel regions are arranged in an array. Each of the pixel regions may comprise a thin film transistor as a switch element and a pixel electrode for driving the liquid crystal to rotate. The following description is only in connection with one pixel region.

[0025] The blue phase liquid crystal panel has a single cell gap, and each pixel region is divided into a transmission region and a reflection region, i.e., the transmission region and the reflection region have the same cell gap. A distance between the adjacent stripe-shaped electrodes in the transmission region is smaller than a distance between the adjacent stripe-shaped electrodes in the reflection region in the same layer, such that the light for display in the transmission region and that in the re-

flexion region of a same pixel region generate the same phase retardation after passing through the blue phase liquid crystal layer. It should be noted that all illustrations shall not be construed as limiting the shape or size of the reflection region and the transmission region but serving as reference only.

[0026] Figs. 1-3 relate to an example of a liquid crystal panel of an In-plane Switch (IPS) type liquid crystal display. Figs. 7-9 relate to an example of a liquid crystal panel of an Advanced-super Dimensional Switching (ADS) type liquid crystal display.

[0027] With reference to Figs. 1-3, the stripe-shaped electrodes in the pixel region defined by the gate lines and the data lines comprise: a pixel electrode 304 and a common electrode 305 disposed in the pixel region defined by the gate lines and the data lines and arranged in the same layer. The pixel electrode 304 comprises a plurality of first stripe-shaped electrodes and the common electrode 305 comprises a plurality of second stripe-shaped electrodes, the first stripe-shaped electrodes and the second stripe-shaped electrodes being arranged at a predetermined interval. In this case, a distance between the adjacent stripe-shaped electrodes in the transmission region is smaller than a distance between the adjacent stripe-shaped electrodes in the reflection region.

[0028] In this disclosure, the phrase "arranged in a same layer" generally refers to at least two patterns. At least two patterns arranged in the same layer means that a same thin film is formed into the at least two patterns by a patterning process. For example, the aforesaid pixel electrode and common electrode arranged in the same layer refer to the case in which the pixel electrode and the common electrode are formed by a same transparent conductive thin film by a patterning process. The pixel electrode refers to an electrode connected to a data line via a switching unit (e.g., thin film transistor) and applied with a data signal voltage; the common electrode refers to an electrode connected to a common electrode line and applied with a common voltage.

[0029] Herein with reference to Fig. 3, the pixel structure disposed in the pixel region on the inner side of the first substrate 11 is described with more details. As illustrated in the figure, the pixel region is further provided with a thin film transistor. For example, a gate electrode 303a, a source electrode 303b and a drain electrode 303c of the thin film transistor are electrically connected to a gate line 303, a data line 301, and a pixel electrode 304, respectively. The common electrode 305 is connected to a common electrode line (not illustrated). With the power supplied, the data line 301 can apply a voltage to the pixel electrode 304 through the thin film transistor 303, and the common electrode line can apply a voltage to the common electrode 305, so as to generate a horizontal electric field between the pixel electrode 304 and the common electrode 305 for driving the blue phase liquid crystal panel.

[0030] Optionally, with reference to Figs. 7-9, the

stripe-shaped electrodes in the pixel region defined by a gate line and a data line comprise: an upper electrode and a lower electrode disposed in the pixel region defined by the gate line 300 and the data line 301 and arranged in different layers; the upper electrode comprises a plurality of stripe-shaped electrodes and the lower electrode is a planar electrode. In this case, a distance between the adjacent stripe-shaped electrodes of the upper electrode in the transmission region is smaller than a distance between the adjacent stripe-shaped electrodes of the upper electrode in the reflection region.

[0031] Or, the stripe-shaped electrodes in the pixel region defined by a gate line and a data line comprise: an upper electrode and a lower electrode disposed in the pixel region defined by the gate line and the data line and arranged in different layers; both the upper electrode and the lower electrode comprise a plurality of stripe-shaped electrodes. Although it is not illustrated in the drawings, the structure of the liquid crystal panel can be obtained directly and unambiguously by those skilled in the art with reference to Figs. 7-9. In this case, a distance between the adjacent stripe-shaped electrodes of the upper electrode in the transmission region is smaller than a distance between the adjacent stripe-shaped electrodes of the upper electrode in the reflection region, and a distance between the adjacent stripe-shaped electrodes of the lower electrode in the transmission region is also smaller than a distance between the adjacent stripe-shaped electrodes of the lower electrode in the reflection region.

[0032] In this disclosure, the phrase "arranged in different layers" also refers to at least two patterns. Two patterns arranged in different layers means that at least two layers of thin films are formed into the at least two patterns by patterning processes. For example, two patterns arranged in different layers means that each of two layers of thin films is formed into a pattern by a patterning process. For example, the aforesaid upper electrode and lower electrode arranged in different layers refer to a lower electrode formed by the first transparent conductive thin film by a patterning process, and an upper electrode formed by the second transparent conductive thin film by a patterning process.

[0033] In this disclosure, the upper layer and the lower layer are defined according to the order in the manufacturing process; the lower layer refers to the layer manufactured earlier while the upper layer refers to the layer manufactured later. What needs to be explained is that which one of the upper electrode and the lower electrode serves as the common electrode or the pixel electrode is related to the connection thereof. If the upper (lower) electrode is connected to a data line through the switching element, the upper (lower) electrode serves as the pixel electrode; if the upper (lower) electrode is connected to a common electrode line, the upper (lower) electrode serves as the common electrode. Figs. 7-9 show the example of the upper electrode serving as the pixel electrode 304 and the lower electrode serving as the common electrode 305.

[0034] Herein with reference to Fig. 9, the pixel structure disposed in the pixel region on the inner side of the first substrate is described with more details. The pixel region is further provided with a thin film transistor. For example, a gate electrode 303a, a source electrode 303b and a drain electrode 303c of the thin film transistor are electrically connected to a gate line 303, a data line 301 and a pixel electrode 304, respectively. The common electrode 305 is connected to a common electrode line (not illustrated). With the power supplied, the data line 301 can apply a voltage to the pixel electrode 304 through the thin film transistor 303, and the common electrode line can apply a voltage to the common electrode 305, so as to generate a horizontal electric field between the pixel electrode 304 and the common electrode 305 for driving the blue phase liquid crystal panel.

[0035] In this disclosure, the transmission region refers to a region in which the light from backlight source is emitted through the first substrate, the blue phase liquid crystal layer and the second substrate sequentially; the reflection region refers to a region in which a reflective layer 31 is provided, in which the environmental light from the outside of the display panel arrives the reflective layer through the second substrate and the blue phase liquid crystal layer, is reflected by the reflective layer, and then exists through the blue phase liquid crystal layer and the second substrate.

[0036] In the reflection region, a reflective layer 31 is provided on the inner side of the first substrate; and an insulating layer 32 is provided on the reflective layer 31, the insulating layer 32 extending within both the transmission region and the reflection region. Preferably, a thickness of the insulating layer 32 in the transmission region is greater than a thickness of the insulating layer 32 in the reflection region, and difference between the thicknesses of the insulating layer in the two regions is equal to the thickness of the reflective layer. Thus, it can be ensured that the blue phase liquid crystal panel provided with the insulating layer still has a single cell gap, i.e., the blue phase liquid crystal layer in the transmission region has the same thickness as that in the reflection region.

[0037] The aforementioned blue phase liquid crystal layer contains blue phase liquid crystal molecules, which have the characteristics that the blue phase liquid crystal molecules have isotropic property when no voltage is applied; and that the blue phase liquid crystal molecules have bi-refractive property along a direction when a voltage is applied, and the blue phase liquid crystal molecules are aligned along the direction of the electric field. Due to the above characteristics of the blue phase liquid crystal layer, the blue phase liquid crystal panel can be driven by the horizontal electric field generated by the pixel electrode and the common electrode in the embodiments of the present invention. The blue phase liquid crystal is for example polymer-stabilized-blue phase liquid crystal or the like.

[0038] In this disclosure, a patterning process is for

example a photolithography patterning process, for example comprising: coating a structural layer to be patterned with a photoresist layer, exposing the photoresist layer using a mask plate, developing the exposed photoresist layer to obtain a photoresist pattern, etching the structural layer using the photoresist pattern, and then selectively removing the photoresist pattern. The patterning process may also be a screen printing, an ink jet printing method, or the like.

[0039] A distance between the aforementioned adjacent stripe-shaped electrodes in the transmission regions is smaller than a distance between the adjacent stripe-shaped electrodes in the reflection regions, the ratio between them is dependent on the properties (such as birefringence, dielectric anisotropy, Kerr constant, and the like) of the adopted blue phase liquid crystal. For example, the following method may be adopted for testing the panel containing a particular blue phase liquid crystal so as to determine the ratio of the two distances. Firstly, different test panels are prepared according to several preset distance ratios, the test panels being filled with the particular blue phase liquid crystal. Secondly, V-T (voltage-transmittance) characteristics curve of the transmission region and the reflection region of the test panels are drawn. If the characteristics curve of the transmission region and the reflection region of a same test panel are consistent within a range of error, it means that the transmission region has a phase retardation substantially twice bigger than that of the reflection region, and thus the ratio of the test panel may serve as a reference value in the practical production. In the embodiments of the present invention, the ratio is not limited, as long as the light for display generates the same phase retardation after passing through the blue phase liquid crystal layer in the transmission region and the reflection region of one pixel region in the practical production.

[0040] In one example, the aforementioned blue phase liquid crystal panel may further comprise: a first quarter wave plate 23, a first half wave plate 22, and a first polarizer 21 disposed on an outer side of the first substrate 11; a second quarter wave plate 24, a second half wave plate 25 and a second polarizer 26 disposed on an outer side of the second substrate 12.

[0041] In the example, for example, the first quarter wave plate 23, the first half wave plate 22, and the first polarizer 21 are disposed on the outer side of the first substrate 11 sequentially from inside to outside; the second quarter wave plate 24, the second half wave plate 25 and the second polarizer 26 are disposed on the outer side of the second substrate 12 sequentially from inside to outside.

[0042] Herein, details are provided regarding how the aforementioned blue phase liquid panel of an IPS display realizes transfective display.

[0043] Fig. 1 is a structural schematic view of the blue phase liquid crystal panel when no voltage is applied. Since the blue phase liquid crystal molecules in the blue phase liquid crystal layer are isotropic when no voltage

is applied, the light for display will not generate phase retardation after passing the isotropic blue phase liquid crystal layer 13 in the transmission region and the reflection region. If the polarization direction of the first polarizer 21 is at an angle of 90 degrees to that of the second polarizer 26, the emitting light will be completely blocked by the second polarizer 26 so as to realize the display in a dark state.

[0044] Fig. 2 is a structural schematic view of the blue phase liquid crystal panel while voltages are applied. Under the action of the horizontal electric field, the blue phase liquid crystal molecules generate phase retardation in the horizontal direction, the distance d_1 between the adjacent stripe-shaped electrodes in the transmission region is different from the distance d_2 between the adjacent stripe-shaped electrodes in the reflection region, and $d_1 < d_2$. Since the distance d_1 between the adjacent stripe-shaped electrodes in the transmission region is smaller, greater electric field strength will be generated, and the blue phase liquid crystal molecules will generate greater phase retardation Δn_1 under the stronger electric field effect. On the contrary, since the distance d_2 between the adjacent stripe-shaped electrodes in the reflection region is bigger, less electric field strength will be generated, the blue phase liquid crystal molecules will generate smaller phase retardation Δn_2 under the weaker electric field effect. Due to the reflection effect of the reflective layer 31, the light of the reflection region will pass through the blue phase liquid crystal layer twice. So the propagation distance D_2 of the light in the reflection region passing through the blue phase liquid crystal layer is about twice greater than the propagation distance D_1 of the light in the transmission region passing through the blue phase liquid crystal layer, i.e., approximately $D_2 = 2 \cdot D_1$. Therefore, by optimizing the distances d_1 and d_2 between the adjacent stripe-shaped electrodes in the transmission region and the reflection region, light for display in the transmission region and the reflection region of one pixel region generate the same phase retardation after passing through the blue phase liquid crystal layer, i.e., $\Delta n_1 \cdot D_1 = \Delta n_2 \cdot D_2$, thus achieving the transfective display effect.

[0045] Regarding how the blue phase liquid panel of ADS display realizes transfective display, the aforementioned principle may be referenced and no more details are provided herein.

[0046] The transfective mode blue phase liquid crystal display provided in the embodiments of the present invention has a single cell gap. By providing the adjacent stripe-shaped electrodes in the transmission regions with a distance smaller than that of the adjacent stripe-shaped electrodes in the reflection regions in the pixel region, the light for display generate the same phase retardation after passing through the blue phase liquid crystal layer in the transmission region and the reflection region, thereby realizing the transfective mode blue phase liquid crystal panel with a single cell gap. Since the embodiments of the present invention adopt the structure of a

single cell gap, the manufacturing process can be simplified.

[0047] Referring to Figs. 4-6, and 10-12, the embodiments of the present invention further provide a blue phase liquid crystal display panel, the liquid crystal panel comprising: a first substrate 11 and a second substrate 12 that are disposed opposite to each other so as to form a liquid crystal cell, and a blue phase liquid crystal layer 13 between the two substrates. The blue phase liquid crystal panel further comprises: gate lines 600, and first data lines 601 and second data lines 602 arranged to intersect the gate lines to define pixel regions, on an inner side of the first substrate 11. These gate lines and the first and second data lines define a plurality of pixel regions arranged in array. Each of the pixel regions may be divided into a transmission region and a reflection region. The following description is only connected with one pixel region.

[0048] The blue phase liquid crystal panel of the present embodiment also has a single cell gap. The blue phase liquid crystal panel further comprises: a common electrode 607 in the entire pixel region (i.e., including the reflection region and the transmission region), a first pixel electrode 605 in the transmission region and a second pixel electrode 606 in the reflection region and arranged in the same layer as the first pixel electrode. At least one of the common electrode 607 and the pixel electrode (including the first pixel electrode 605 and the second pixel electrode 606) comprises a plurality of stripe-shaped electrodes. With power being supplied, a first data line 601 and a second data line 602 apply different voltages to the first pixel electrode 605 and the second pixel electrode 606 respectively, such that a voltage difference between the first pixel electrode 605 and the common electrode 607 is greater than that between the second pixel electrode 606 and the common electrode 607 in a same pixel region, and the light for display generate the same phase retardation after passing through the blue phase liquid crystal layer in the transmission region and the reflection region. For example, preferably, a distance between adjacent stripe-shaped electrodes in the transmission regions is equal to a distance between the adjacent stripe-shaped electrodes in the reflection regions in the same layer.

[0049] Figs. 4-6 relate to a liquid crystal panel of an IPS type liquid crystal display; Figs. 10-12 relate to a liquid crystal panel of an ADS type liquid crystal display.

[0050] As illustrated in Figs. 4-6, for example, the common electrode comprises a plurality of stripe-shaped electrodes, and the pixel electrode comprises a plurality of stripe-shaped electrodes. The common electrode 607 and the pixel electrode (including the first pixel electrode 605 and the second pixel electrode 606) are arranged in the same layer; the stripe-shaped electrodes of the first pixel electrode 605 and the stripe-shaped electrodes of the common electrode 607 in the transmission region are arranged at intervals, the stripe-shaped electrodes of the second pixel electrode 606 and the stripe-shaped elec-

trodes of the common electrode 607 in the reflection region are arranged at intervals.

[0051] Herein with reference to Fig. 6, the pixel structure provided on the inner side of the first substrate in the aforementioned liquid crystal panel is described in more details. The blue phase liquid crystal panel further comprises a first thin film transistor 603 and a second thin film transistor 604 in the pixel region. A first data line 601 and a second data lines 602 apply different voltages to the first pixel electrode 605 and the second pixel electrode 606 respectively for example in the following manner. The first data line 601 applies a first voltage to the first pixel electrode 605 through the first thin film transistor 603; the second data line 602 applies a second voltage to the second pixel electrode 606 through the second thin film transistor 604, and the first voltage and the second voltage are not equal to each other.

[0052] Specifically, a gate electrode 603a, a source electrode 603b and a drain electrode 603c of the first thin film transistor are electrically connected to the gate line 600, the first data line 601 and the first pixel electrode 605 respectively; a gate electrode 604a, a source electrode 604b and a drain electrode 604c of the second thin film transistor are electrically connected to the gate line 600, the second data lines 602 and the second pixel electrode 606 respectively. In this case, when power being supplied, the first data lines 601 can apply a first voltage to the first pixel electrode 605, and the second data lines 602 can apply a second voltage to the second pixel electrode 606. Preferably, the first data lines 601 and the second data lines 602 are disposed respectively on two sides of the pixel regions.

[0053] Optionally, referring to Figs. 10-12, at least one of the common electrode and the pixel electrode comprises a plurality of stripe-shaped electrodes. The common electrode and the pixel electrode are arranged in different layers. That is to say, the first pixel electrode 605 and the second pixel electrode 606 are arranged in the same layer, which is different from the layer where the common electrode is arranged. The electrode in the upper layer out of the common electrode and the pixel electrode comprises a plurality of stripe-shaped electrodes, and the electrode in the lower layer is a planar electrode. The figure shows the example in which the pixel electrode is in the upper layer while the common electrode is in the lower layer. Of course, the common electrode may be in the upper layer while the pixel electrode is in the lower layer.

[0054] The connecting relationship between the thin film transistor and the gate line, the first and the second data lines in the pixel structure illustrated in Fig. 12 is same as that illustrated in Fig. 6, so no more details are give here. The difference lies in that a distance between the adjacent stripe-shaped electrodes of the first pixel electrode in the transmission regions is equal to a distance between the adjacent stripe-shaped electrodes of the second pixel electrode in the reflection regions in Fig. 12. Similarly, preferably, the first data lines 601 and the

second data lines 602 are disposed respectively on two sides of the pixel regions.

[0055] Or, the common electrode and the pixel electrode are arranged in different layers, and both the common electrode and the pixel electrode comprise a plurality of stripe-shaped electrodes. Although not illustrated in the figures, the structure of such liquid crystal panel can be determined unambiguously by those skilled in the art with reference to Figs. 10-12. In such liquid crystal panel, a distance between the adjacent stripe-shaped electrodes of the first pixel electrode is equal to a distance between the adjacent stripe-shaped electrodes of the second pixel electrode, and a distance between the adjacent stripe-shaped electrodes of the common electrode in the transmission regions is equal to a distance between the adjacent stripe-shaped electrodes in the reflection regions.

[0056] In the reflection region of the liquid crystal display panel, a reflective layer 31 is further provided in the inner side of the first substrate; and an insulating layer 32 is provided on the reflective layer 31, and the insulating layer 32 extends into both the transmission region and the reflection region. Preferably, a thickness of the insulating layer 32 in the transmission region is greater than a thickness of the insulating layer 32 in the reflection region, and difference between the thicknesses of the insulating layer in the two regions is equal to the thickness of the reflective layer. Thus, it can be ensured that the blue phase liquid crystal panel provided with the insulating layer still has a single cell gap, i.e., the blue phase liquid crystal layer in the transmission region has the same thickness as that in the reflection region.

[0057] It should be noted is that all figures serve as reference only, and are not drawn in the practical scale. So the figures shall not be construed as limiting the shape or size of the reflection region and the transmission region. The first pixel electrode and the second pixel electrode may be set to have the same size or different sizes.

[0058] Electrode arranged in the same layer means that the first pixel electrode, the second pixel electrode and the common electrode are formed of a same transparent conductive thin film by a patterning process. The first pixel electrode and the second pixel electrode are not electrically connected to each other and are applied with different voltages via the first data line and the second data line. The common electrode refers to the electrode connected to the common electrode line.

[0059] With power being supplied, the first data line and the second data line respectively apply different voltages to the first pixel electrode and the second pixel electrode, the values of voltage are dependent on the natures (e.g., birefringence, dielectric anisotropy, Kerr constant, etc.) of the blue phase liquid crystal. For example, the following method may be adopted for testing the panel containing a particular blue phase liquid crystal so as to determine the ratio of the two kinds of voltage values. Firstly, a test panel is prepared according to the preset distance ratio, the test panel being filled with the particular

blue phase liquid crystal. Secondly, by applying voltages to the first pixel electrode in the transmission region via the first data line and applying voltages to the second pixel electrode in the reflection region via the second data line, the V-T (voltage-transmittance) characteristics curves of the transmission region and the reflection region of the test panel are drawn. The characteristics curves of the two regions are analyzed, and values of voltages over the first and the second data lines in each position with consistent transmittance are sequentially obtained. In the embodiment of the present invention, the values of voltage applied to the two pixel electrodes are not limited, as long as the light for display in the transmission region and the light for display in the reflection region of one pixel region generate the same phase retardation after passing through the blue phase liquid crystal layer. However, a voltage difference between the first pixel electrode and the common electrode must be greater than that between the second pixel electrode and the common electrode in the same pixel region, thus providing preconditions for the same phase retardation of the transmission region and the reflection region.

[0060] Furthermore, in one example, the blue phase liquid crystal panel may comprise: a first quarter wave plate 23, a first half wave plate 22, and a first polarizer 21 disposed on an outer side of the first substrate 11; a second quarter wave plate 24, a second half wave plate 25 and a second polarizer 26 disposed on an outer side of the second substrate 12.

[0061] In this example, for example, the first quarter wave plate 23, the first half wave plate 22, and the first polarizer 21 are disposed on the outer side of the first substrate 11 sequentially from inside to outside; the second quarter wave plate 24, the second half wave plate 25 and the second polarizer 26 are disposed on the outer side of the second substrate 12 sequentially from inside to outside.

[0062] Herein, details are provided to describe how the aforementioned blue phase liquid panel of an IPS type display to realize transfective display.

[0063] Fig. 4 is a structural schematic view of the blue phase liquid crystal panel when no voltage is applied. Since the blue phase liquid crystal molecules in the blue phase liquid crystal layer are isotropic when no voltage is applied, the light for display in both the transmission region and the reflection region will not generate phase retardation after passing the isotropic blue phase liquid crystal layer. If the polarization direction of the first polarizer 21 is at an angle of 90 degrees to that of the second polarizer 26, the emitting light will be completely blocked by the second polarizer 26 so as to realize the display in a dark state.

[0064] Fig. 5 is a structural schematic view of the blue phase liquid crystal panel when voltages are applied. Under the action of the horizontal electric field, the blue phase liquid crystal molecules generate phase retardation in the horizontal direction. By applying different voltages to the first pixel electrode and the second pixel elec-

trode, the voltage difference between the first pixel electrode and the common electrode is greater than that between the second pixel electrode and the common electrode in the same pixel region. Since a greater voltage difference generates a stronger electric field, the transmission region will generate greater electric field strength, and the blue phase liquid crystal molecules will generate greater phase retardation Δn_1 under the stronger electric field effect; and the reflection region will generate less electric field strength, and the blue phase liquid crystal molecules will generate smaller phase retardation Δn_2 under the weaker electric field effect. Since the light of the reflection region will pass through the blue phase liquid crystal layer twice, the propagation distance D_2 of the light of the reflection region passing through the blue phase liquid crystal layer is about twice greater than the propagation distance D_1 of the light of the transmission region passing through the blue phase liquid crystal layer, i.e., about $D_2=2*D_1$. Therefore, by applying different voltages to the first pixel electrode and the second pixel electrode, the light for display in the transmission region and the light for display in the reflection region of one pixel region generate the same phase retardation after passing through the blue phase liquid crystal layer, i.e., $\Delta n_1*D_1 = \Delta n_2*D_2$, thus achieving the transfective display effect. If a distance d_1 between the adjacent stripe-shaped electrodes in the transmission region is equal to a distance d_2 between the adjacent stripe-shaped electrodes in the reflection region, i.e., $d_1=d_2$, the effect of the distance between the adjacent stripe-shaped electrodes in the transmission region and the reflection region on the horizontal electric field will not be taken into consideration, but the effect of the different voltages, respectively applied to the first pixel electrode in the transmission region and to the second pixel electrode in the reflection region, on the electric field is employed.

[0065] About how the blue phase liquid panel of ADS display to realize transfective display, the aforementioned principle can be referenced and no more details are provided here.

[0066] The transfective mode blue phase liquid crystal display provided in the embodiment of the present invention has a single cell gap. With power being supplied, the voltage difference between the first pixel electrode and the common electrode is greater than that between the second pixel electrode and the common electrode in the same pixel region, so that the light for display in the transmission region and the light for display in the reflection region generate the same phase retardation after passing through the blue phase liquid crystal layer, thereby realizing the display function of the transfective mode blue phase liquid crystal panel with a single cell gap. Since the embodiment of the present invention adopts the structure of a single cell gap, the manufacturing process can be simplified. For example, preferably, the distance between the adjacent stripe-shaped electrodes in the transmission region may be equal to the distance between the adjacent stripe-shaped electrodes in the re-

flection region.

[0067] What needs to be explained is that, in order to clearly describe the claimed structure in the present invention, irrelevant structures are simplified or omitted in the embodiments and the accompanying drawings, which are easily obtained by those skilled in the art without any creative work.

[0068] In addition, the aforementioned two blue phase liquid crystal panels provided in the embodiments of the present invention belong to a single general inventive concept, i.e., with power being supplied, the transmission region generates greater electric field strength while the reflection region generates less electric field strength in a same pixel region, so the blue phase liquid crystal molecules in the transmission region generates greater phase retardation while those in the reflection region generates smaller phase retardation, so that the light for display in the transmission region and the light for display the reflection region in the same pixel region generate the same phase retardation after passing through the blue phase liquid crystal layer. There are two main factors affecting the electric field strength: one is the distance between adjacent stripe-shaped electrodes, the other is the voltage difference between the pixel electrode and the common electrode. In the blue phase liquid crystal panel illustrated in Figs. 1, 2, 7 and 8, there is only one pixel electrode in each pixel region, so the voltage differences between the two electrodes in the transmission region and the reflection region are same to each other. In this case, by setting different distances between adjacent stripe-shaped electrodes in the transmission region and the reflection region in the same layer, different electric field strengths may be generated. In the blue phase liquid crystal panel illustrated in Figs. 4, 5, 10 and 12, for example, in the case that the adjacent stripe-shaped electrodes have the same distance in the transmission region and the reflection region in the same layer, by applying different voltages to the first pixel electrode and the second pixel electrode, the voltage differences between the two electrodes (pixel electrode and common electrode) in the transmission region and the reflection region are different from each other, whereby different electric field strengths can be generated.

[0069] The present embodiment further provides a display device, which comprises any one of the aforementioned blue phase liquid crystal panel. The display device may be a liquid crystal display, a liquid crystal television, a digital photo frame, a mobile phone, a flat panel computer, and other products or components having display function.

[0070] The above embodiment of the present invention are given by way of illustration only and thus are not limitative of the protection scope of the present invention, which is determined by the attached claims.

Claims

1. A blue phase liquid crystal panel, comprising:

a first substrate and a second substrate that are disposed opposite to each other so as to form a liquid crystal cell;
 a blue phase liquid crystal layer between the two substrates;
 a gate line and a data line arranged to intersect the gate line to define a pixel region on an inner side of the first substrate; and
 stripe-shaped electrodes located in the pixel region defined by the gate line and the data line; wherein the blue phase liquid crystal panel has a single cell gap, and the pixel region is divided into a transmission region and a reflection region; a distance between the adjacent stripe-shaped electrodes in the transmission region is smaller than a distance between the adjacent stripe-shaped electrodes in the reflection region in the same layer, such that the light for display in the transmission region and the light for display in the reflection region of a same pixel region generate the same phase retardation after passing through the blue phase liquid crystal layer.

2. The blue phase liquid crystal panel according to claim 1, further comprising:

a first quarter wave plate, a first half wave plate, and a first polarizer disposed on an outer side of the first substrate; and
 a second quarter wave plate, a second half wave plate and a second polarizer disposed on an outer side of the second substrate.

3. The blue phase liquid crystal panel according to claim 1 or 2, wherein in the reflection region, a reflective layer is disposed on an inner side of the first substrate; and an insulating layer is disposed on the reflective layer, the insulating layer extending in both the transmission region and the reflection region.

4. The blue phase liquid crystal panel according to claim 3, wherein a thickness of the insulating layer in the transmission region is greater than a thickness of the insulating layer in the reflection region, and difference between the thicknesses of the insulating layer in the two regions is equal to the thickness of the reflective layer.

5. The blue phase liquid crystal panel according to any one of claims 1 to 4, wherein the stripe-shaped electrodes in the pixel region defined by the gate line and the data line comprise:

a pixel electrode and a common electrode disposed in the pixel region defined by the gate line and the data line and arranged in a same layer; wherein the pixel electrode comprises a plurality of first stripe-shaped electrodes and the common electrode comprises a plurality of second stripe-shaped electrodes, the first stripe-shaped electrodes and the second stripe-shaped electrodes being arranged at intervals.

6. The blue phase liquid crystal panel according to any one of claims 1 to 4, wherein the stripe-shaped electrodes in the pixel region defined by the gate line and the data line comprise:

an upper electrode and a lower electrode disposed in the pixel region defined by the gate line and the data line and arranged in different layers;
 wherein the upper electrode comprises a plurality of stripe-shaped electrodes and the lower electrode is a planar electrode, or both the upper electrode and the lower electrode comprise a plurality of stripe-shaped electrodes.

7. A blue phase liquid crystal panel, comprising:

a first substrate and a second substrate that are disposed opposite to each other so as to form a liquid crystal cell;
 a blue phase liquid crystal layer between the two substrates;
 a gate line, and a first data line and a second data line arranged to intersect the gate line to define a pixel region on an inner side of the first substrate, wherein the pixel region defined by the gate line and the first and second data lines is divided into a transmission region and a reflection region;
 a common electrode disposed in the pixel region;
 a pixel electrode disposed in the pixel region, the pixel electrode comprising a first pixel electrode in the transmission region and a second pixel electrode in the reflective region that is arranged in a same layer as the first pixel electrode wherein the blue phase liquid crystal panel has a single cell gap, at least one of the common electrode and the pixel electrode comprises a plurality of stripe-shaped electrodes, and with power being supplied, the first data line and the second data line apply different voltages to the first pixel electrode and the second pixel electrode respectively, such that a voltage difference between the first pixel electrode and the common electrode is greater than that between the second pixel electrode and the common electrode in the same pixel region, and the light for

display in the transmission region and the light for display in the reflection region generate the same phase retardation after passing through the blue phase liquid crystal layer.

8. The blue phase liquid crystal panel according to claim 7, further comprising:

a first quarter wave plate, a first half wave plate, and a first polarizer disposed on an outer side of the first substrate; and
a second quarter wave plate, a second half wave plate and a second polarizer disposed on an outer side of the second substrate.

9. The blue phase liquid crystal panel according to claim 7 or 8, wherein the first data line and the second data line are disposed respectively on two sides of the pixel region.

10. The blue phase liquid crystal panel according to any one of claims 7 to 9, wherein in the reflection region, a reflective layer is disposed on the inner side of the first substrate; and an insulating layer is disposed on the reflective layer, the insulating layer extending in both the transmission region and the reflection region.

11. The blue phase liquid crystal panel according to claim 10, wherein a thickness of the insulating layer in the transmission region is greater than a thickness of the insulating layer in the reflection region, and difference between the thicknesses of the insulating layer in the two regions is equal to the thickness of the reflective layer.

12. The blue phase liquid crystal panel according to any one of claims 7 to 11, wherein the common electrode and the pixel electrode are disposed in a same layer and both comprise stripe-shaped electrodes, and a distance between adjacent stripe-shaped electrodes in the transmission regions is equal to a distance between the adjacent stripe-shaped electrodes in the reflection regions in the same layer, the stripe-shaped electrodes of the first pixel electrode and the stripe-shaped electrodes of the common electrode in the transmission region are arranged at intervals, and the stripe-shaped electrodes of the second pixel electrode and the stripe-shaped electrodes of the common electrode in the reflection region are arranged at intervals.

13. The blue phase liquid crystal panel according to any one of claims 7 to 11, wherein the common electrode and the pixel electrode are disposed in different layers, one of the common electrode and the pixel electrode that is in an upper layer comprises a plurality of

stripe-shaped electrode, and the other that is in a lower layer is a planar electrode; or, both of the common electrode and the pixel electrode comprise a plurality of stripe-shaped electrodes; and
a distance between adjacent stripe-shaped electrodes in the transmission regions is equal to a distance between the adjacent stripe-shaped electrodes in the reflection regions in the same layer.

14. A display device, comprising a blue phase liquid crystal panel according to any one of claims 1 to 13.

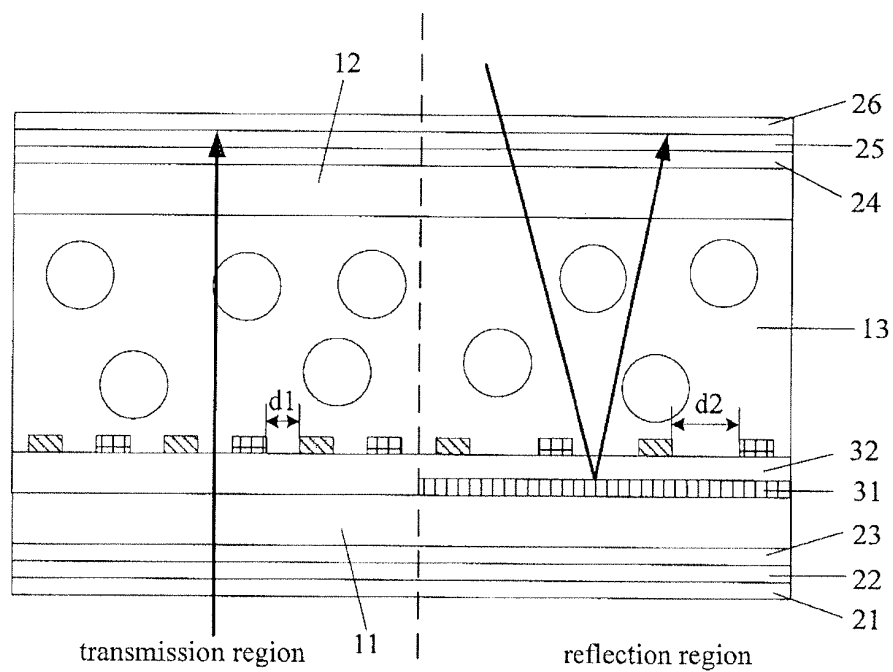


FIG.1

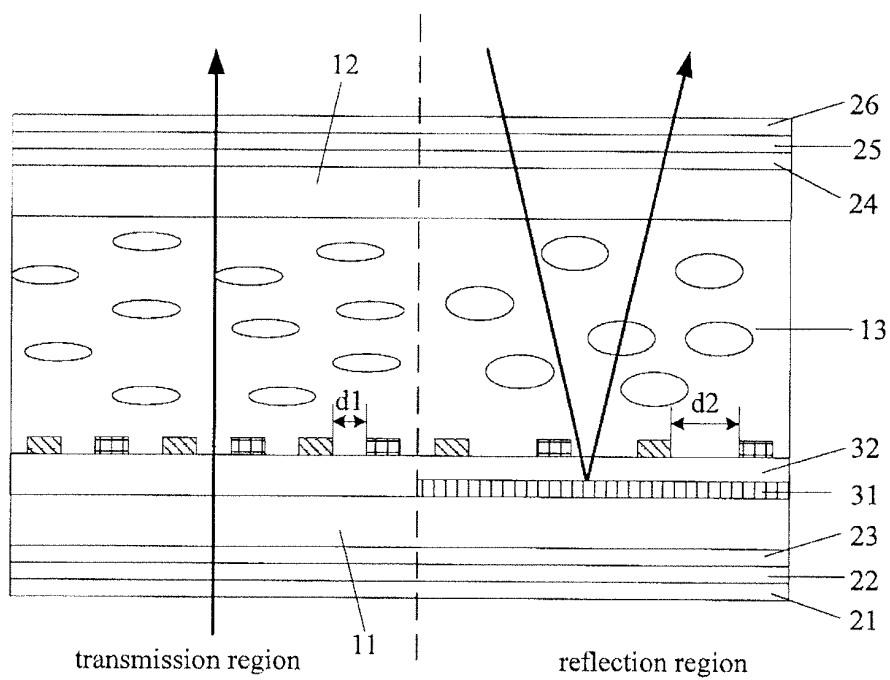


FIG.2

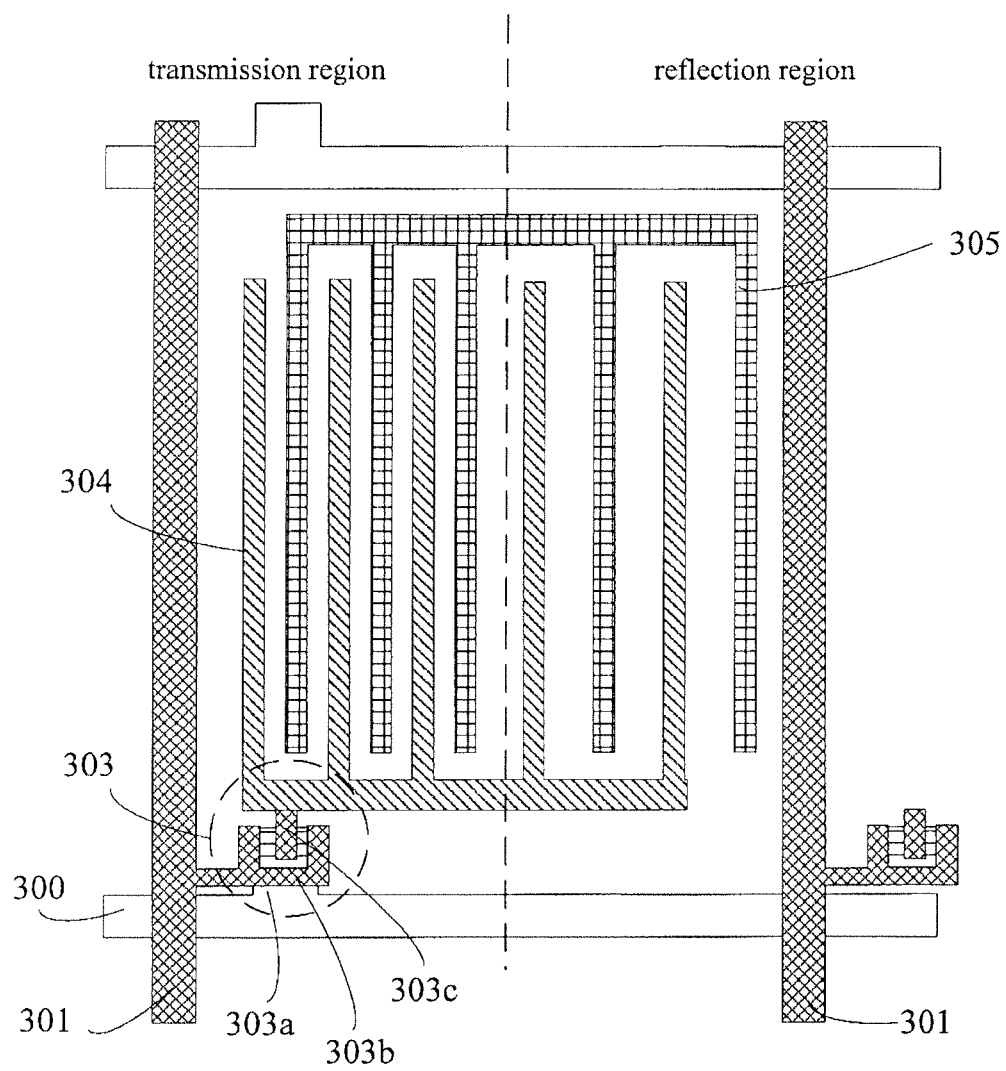


FIG.3

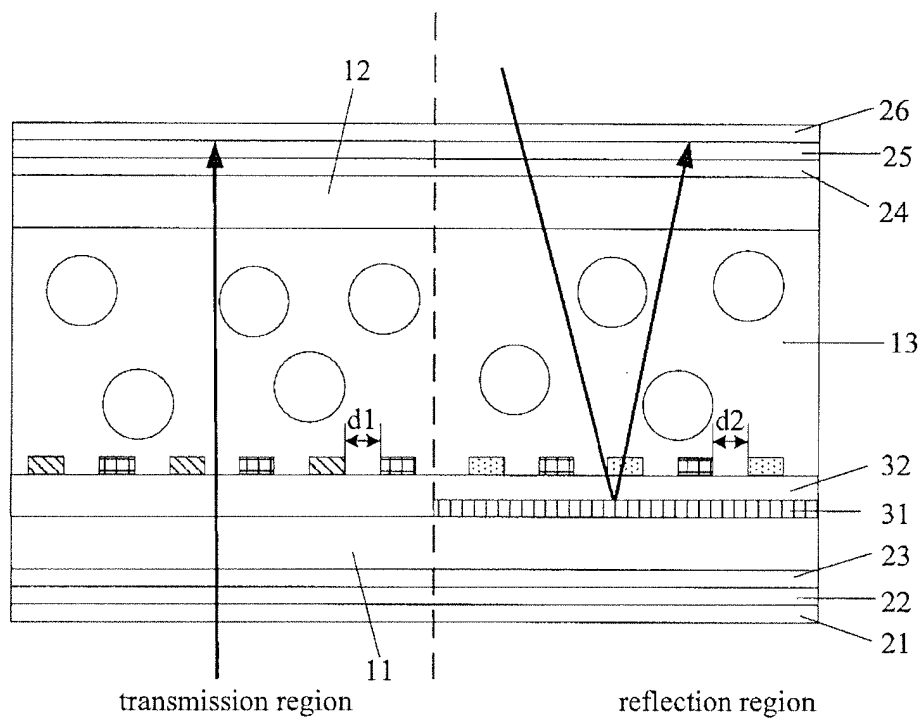


FIG. 4

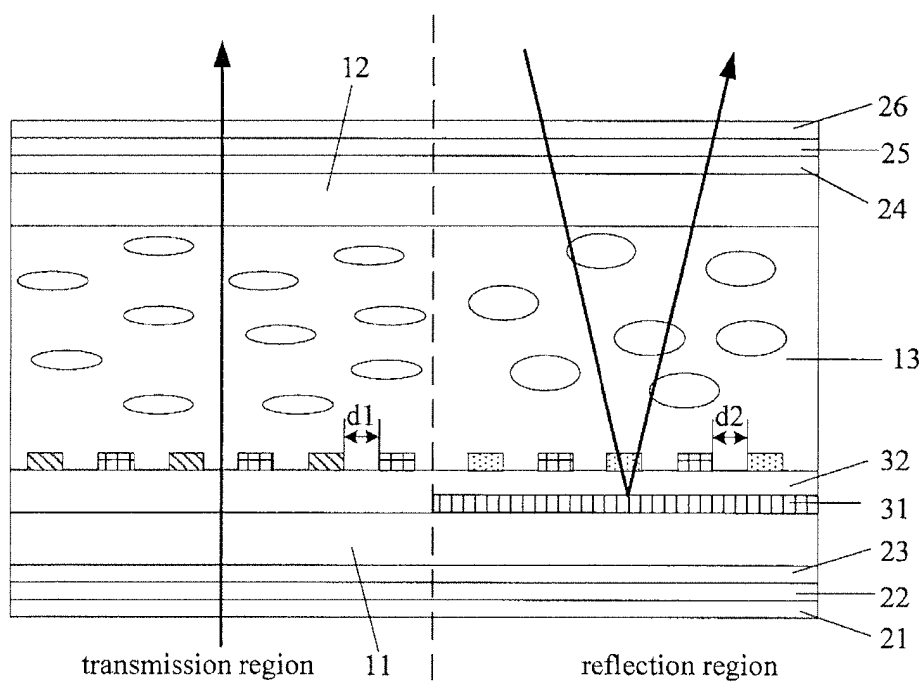


FIG. 5

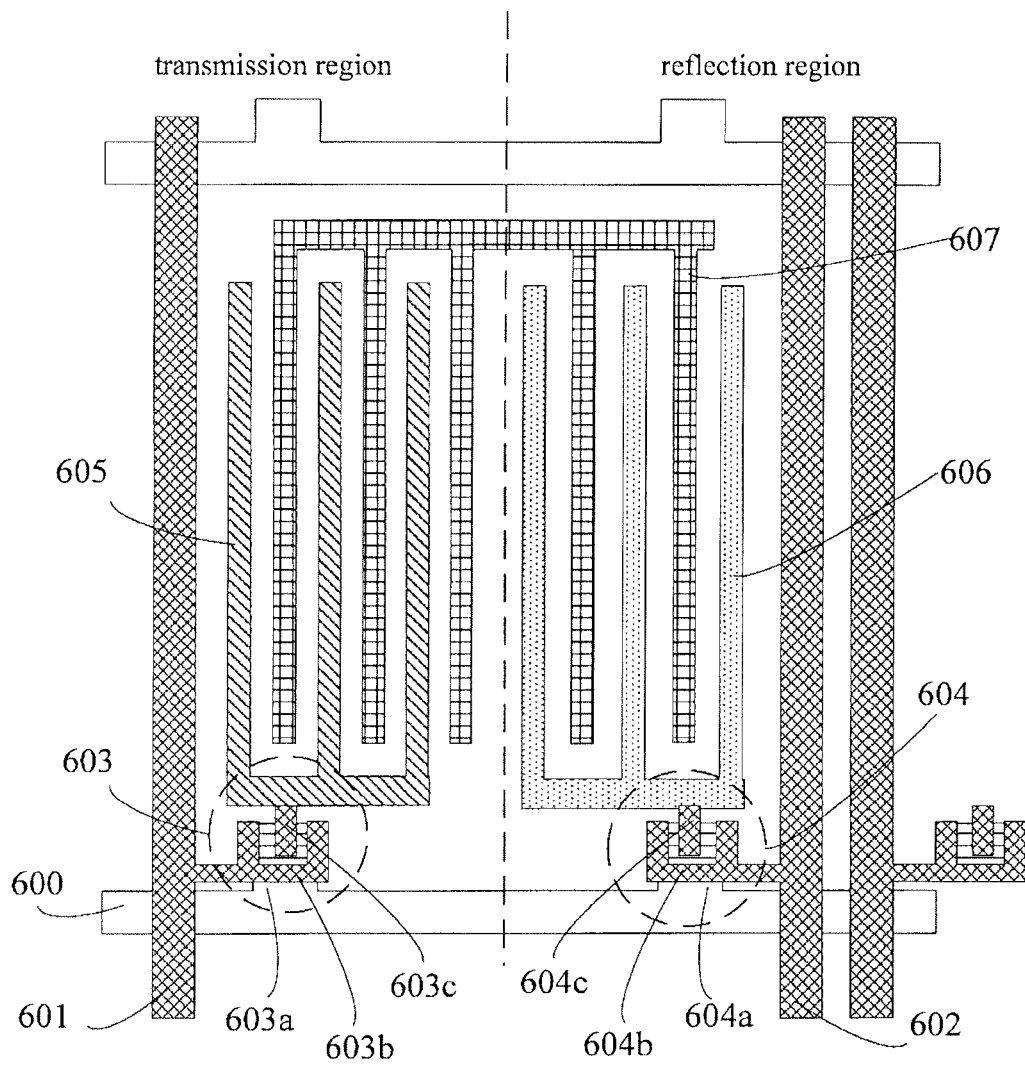


FIG.6

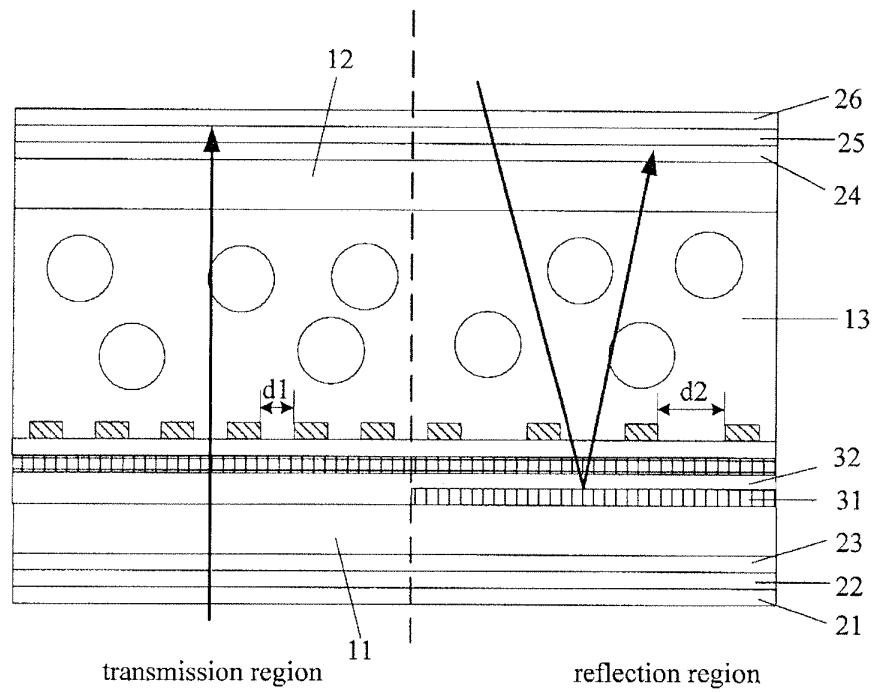


FIG.7

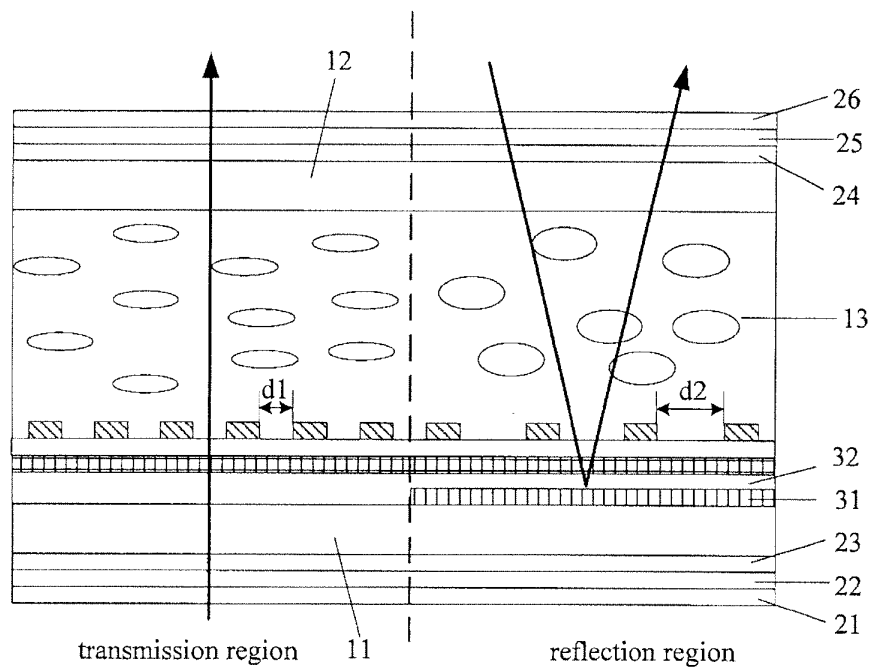


FIG.8

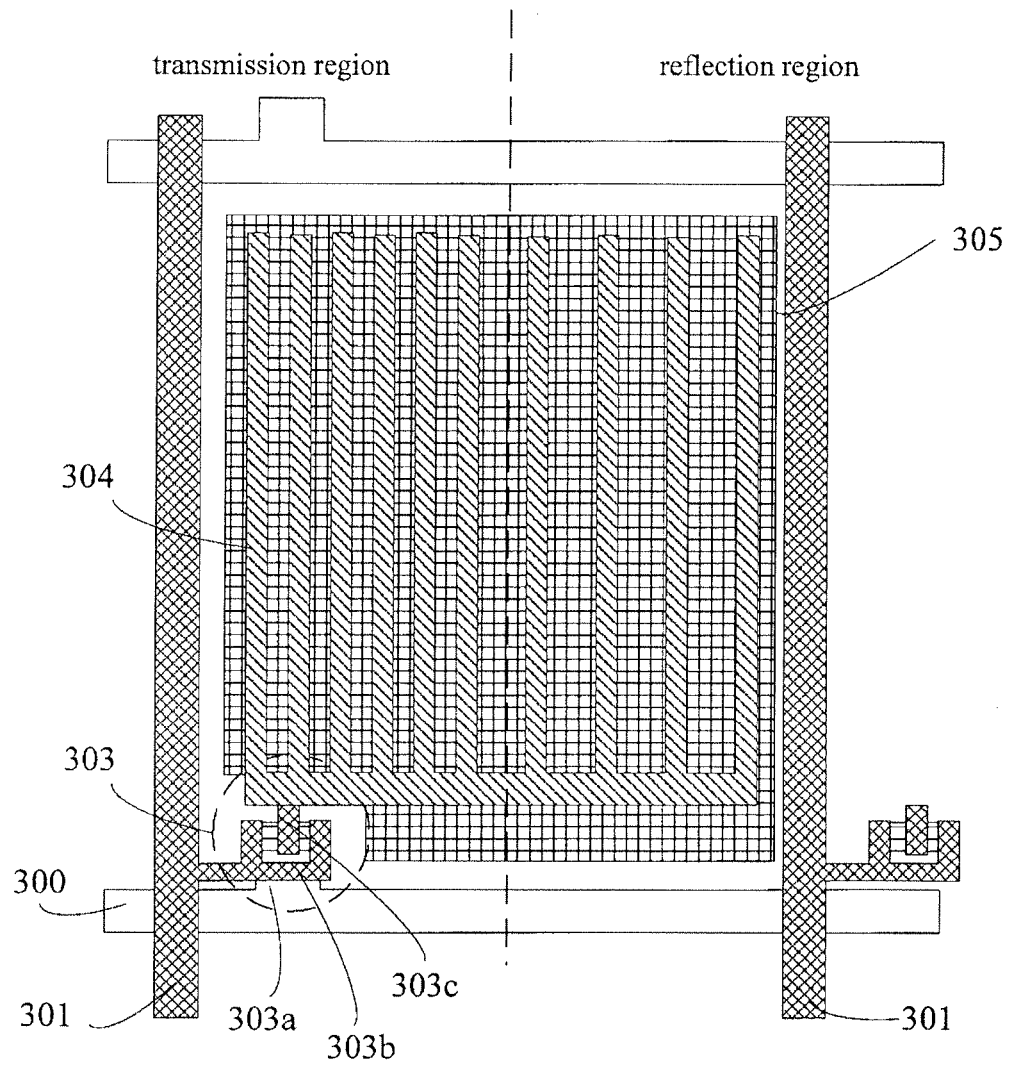


FIG.9

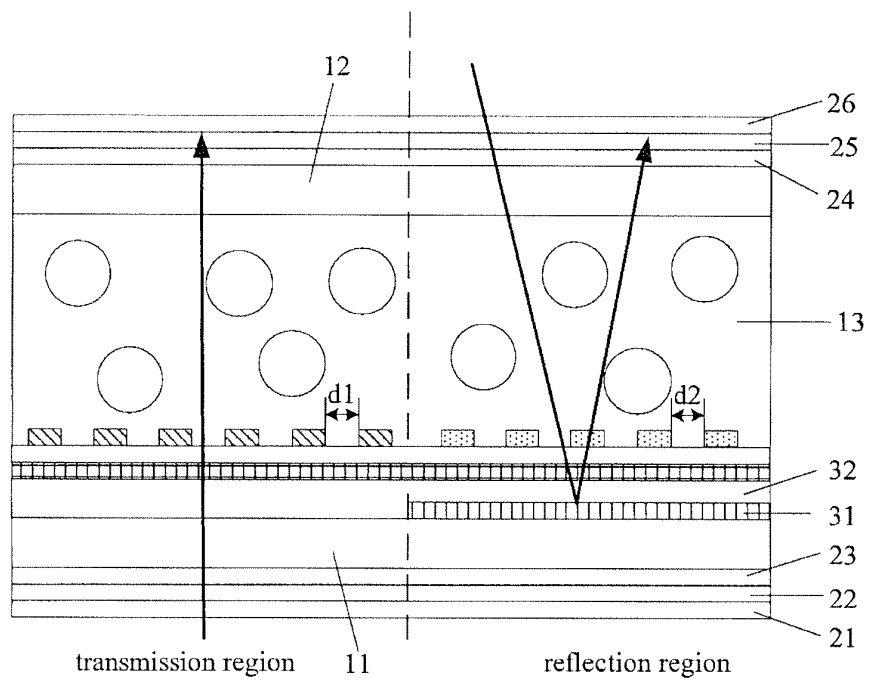


FIG.10

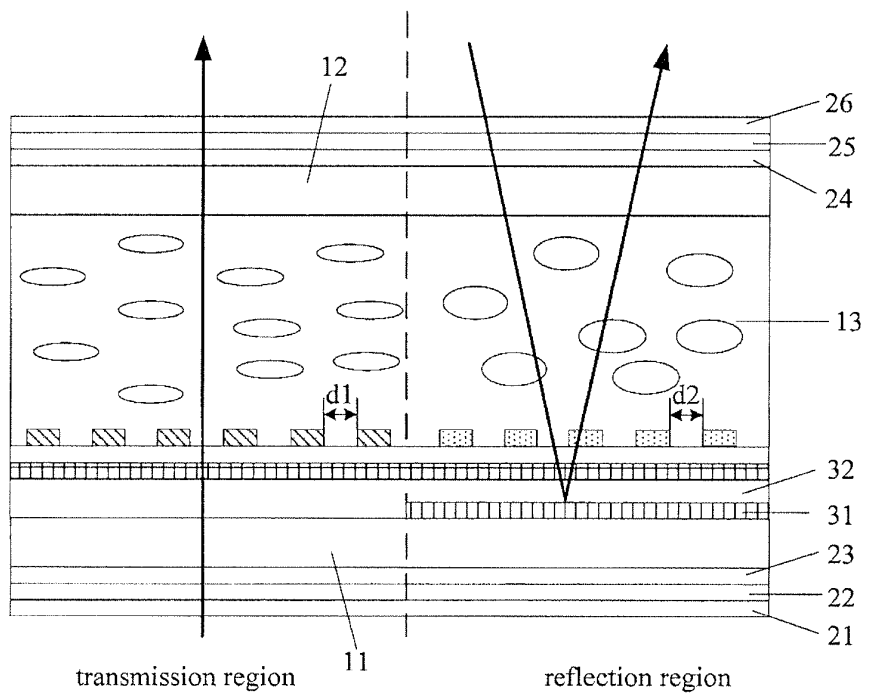


FIG.11

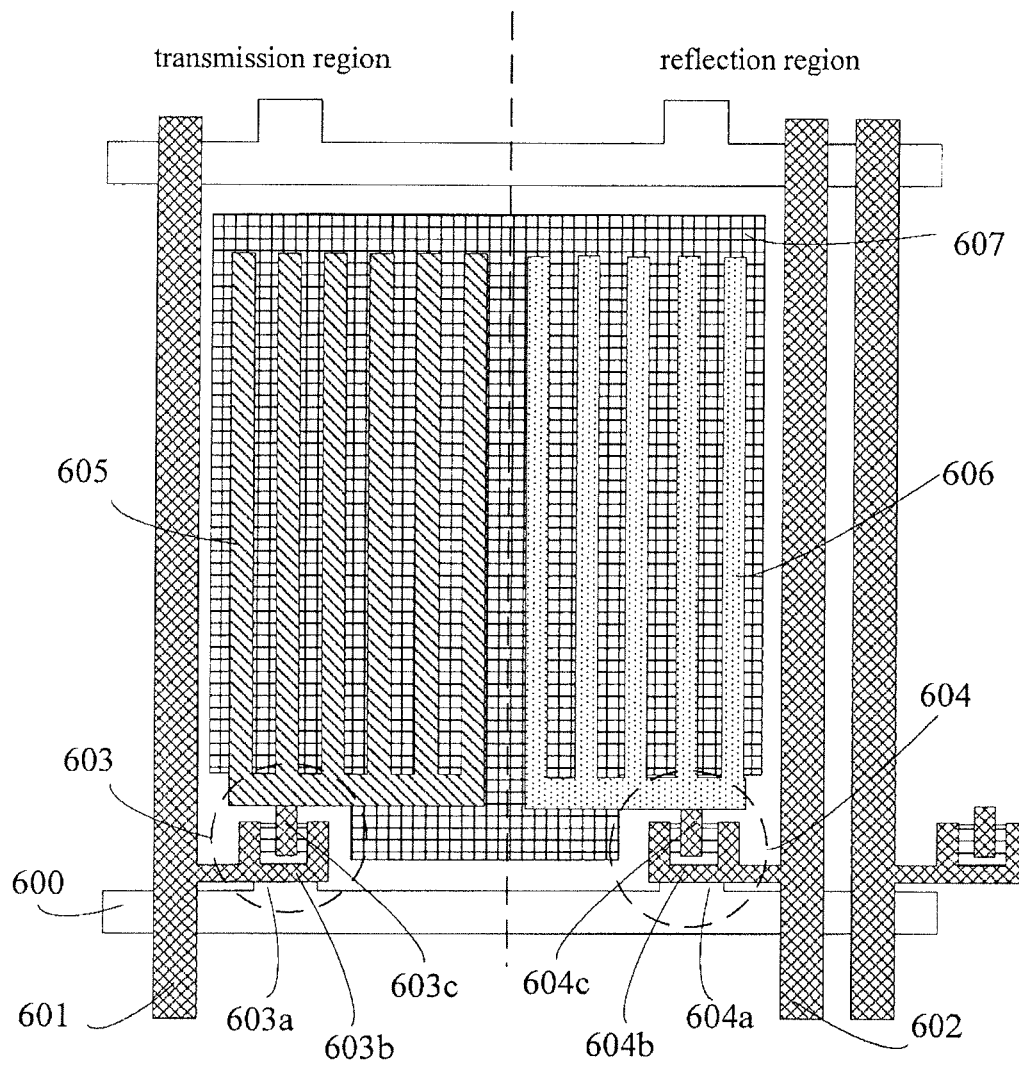


FIG.12

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/082805

A. CLASSIFICATION OF SUBJECT MATTER

See the extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

VEN, CNABS, OSA: semi-reflective, phase delay, phase difference, refractive index, striped electrode, distance, dropout voltage, voltage, electric field intensity, transmission-reflection electro-optical characteristic, Blue phase, BPLC, Semi-transmissive, transmissive, reflective, Transmission-reflection, Transflective, TR-LCD, cell gap, single cell gap, optical phase retardation, different electrode gap, space, OPTICAL PATH LENGTH DISPARITY, electric field, weaker, smaller

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	LI, Yan et al., Transflective display using a polymer-stabilized blue-phase liquid crystal, OPTICS EXPRESS, August 2010, vol. 18, no. 16, pages 16486-16491	1, 2, 6, 14
Y		3-14
Y	CN 102012588 A (SICHUAN UNIVERSITY), 13 April 2011 (13.04.2011), description, paragraph [0026], and figure 1	3-6, 10-14
Y	TW 594630 B (INDUSTRIAL TECHNOLOGY RESEARCH INSTITUTE), 21 June 2004 (21.06.2004), description, page 4, paragraph 1 to page 9, paragraph 4, and figures 1-4B	7-14

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

24 April 2013 (24.04.2013)

Date of mailing of the international search report

16 May 2013 (16.05.2013)

Name and mailing address of the ISA/CN:
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No.: (86-10) 62019451

Authorized officer

LIU, Yali

Telephone No.: (86-10) 62085548

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/082805

C (Continuation).	DOCUMENTS CONSIDERED TO BE RELEVANT	
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	CN 202693962 U (BOE TECHNOLOGY GROUP CO., LTD.), 23 January 2013 (23.01.2013), description, paragraphs [0028]-[0073], and figures 1-12	1-14
A	CN 101174069 A (SEIKO EPSON CORP.), 07 May 2008 (07.05.2008), the whole document	1-14
A	CN 101479656 A (SHARP KABUSHIKI KAISHA), 08 July 2009 (08.07.2009), the whole document	1-14

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2012/082805

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 102012588 A	13.04.2011	CN 102012588 B	12.12.2012
TW 594630 B	21.06.2004	US 2003184695 A1	02.10.2003
		JP 2003295159 A	15.10.2003
		JP 4340446 B2	07.10.2009
		US 6806929 B2	19.10.2004
CN 202693962 U	23.01.2013	None	
CN 101174069 A	07.05.2008	US 2008100764 A1	01.05.2008
		TW 200835987 A	01.09.2008
		US 7843541 B2	30.11.2010
		JP 2008112021 A	15.05.2008
		JP 4453694 B2	21.04.2010
		KR 20080039287 A	07.05.2008
CN 101479656 A	08.07.2009	WO 2008001507 A1	03.01.2008
		US 2009201449 A1	13.08.2009
		CN 101479656 B	11.01.2012

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2012/082805

5
10
15
20
25
30
35
40
45
50
55

A. CLASSIFICATION OF SUBJECT MATTER

G02F 1/1343 (2006.01) i

G02F 1/1335 (2006.01) n

专利名称(译)	蓝相液晶面板和显示装置		
公开(公告)号	EP2878995A4	公开(公告)日	2016-06-01
申请号	EP2012881141	申请日	2012-10-11
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	XIE CHANG		
发明人	XIE, CHANG		
IPC分类号	G02F1/1343 G02F1/1335		
CPC分类号	G02F1/134309 G02F1/133555 G02F1/134363 G02F1/13624 G02F2001/134372 G02F2001/13793 G02F2201/123		
优先权	201210265620.9 2012-07-27 CN		
其他公开文献	EP2878995A1		
外部链接	Espacenet		

摘要(译)

蓝相液晶面板和显示装置提供具有单个单元间隙的半反射模式蓝相液晶面板，以简化该过程。蓝相液晶面板包括：第一基板（11）和第二基板（12），所述第一基板和第二基板彼此相对设置以形成液晶单元；在两个基板（11,12）之间的蓝相液晶层（13）；栅极线（300）和数据线（301），布置成与栅极线（300）相交以在第一衬底的内侧上限定像素区域。蓝相液晶面板具有单个单元间隙，并且像素区域被分成透射区域和反射区域。用于显示在透射区域中的光和用于在相同像素区域的反射区域中显示的光在通过蓝相液晶层（13）之后产生相同的相位延迟。