



(11)

EP 3 214 489 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:

06.09.2017 Bulletin 2017/36

(51) Int Cl.:

G02F 1/1335 ^(2006.01) **G02F 1/1347** ^(2006.01)
G02F 1/1337 ^(2006.01)

(21) Application number: **15837075.9**

(86) International application number:

PCT/CN2015/093369

(22) Date of filing: **30.10.2015**

(87) International publication number:

WO 2016/066133 (06.05.2016 Gazette 2016/18)

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

Designated Validation States:

MA

• **Beijing BOE Display Technology Co., Ltd.**
Beijing 100176 (CN)

(72) Inventors:

• **WANG, Yongcan**
Beijing 100176 (CN)
• **ZHAN, Hongming**
Beijing 100176 (CN)
• **LIN, Lifeng**
Beijing 100176 (CN)

(30) Priority: **31.10.2014 CN 201410602634**

(71) Applicants:

• **BOE Technology Group Co., Ltd.**
Beijing 100015 (CN)

(74) Representative: **Lavoix**

Bayerstrasse 83
80335 München (DE)

(54) **OPTICAL COMPENSATION FILM AND MANUFACTURING METHOD THEREFOR, POLARIZER, LIQUID CRYSTAL DISPLAY PANEL AND DISPLAY APPARATUS**

(57) The present disclosure relates to the field of display technology, and provides an optical compensation film, its manufacturing method, a polarizer, a liquid crystal display panel and a display device. The optical compensation film includes a first substrate, a second substrate arranged opposite to the first substrate, a first alignment layer arranged at a side of the first substrate opposite to

the second substrate, a second alignment layer arranged at a side of the second substrate opposite to the first substrate, and a first liquid crystal layer arranged between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle.

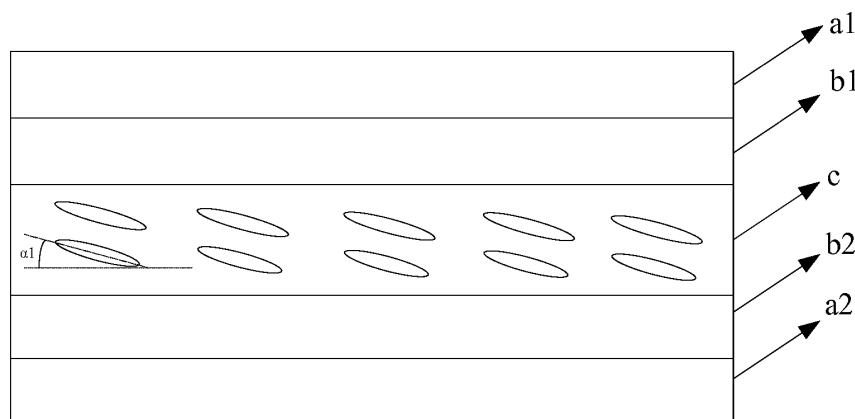


Fig. 2

EP 3 214 489 A1

Description

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application claims a priority of the Chinese patent application No.201410602634.4 filed on October 31, 2014, which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to the field of display technology, in particular to an optical compensation film and a method for manufacturing the same, a polarizer, a liquid crystal display panel and a display device.

BACKGROUND

[0003] Currently, thin film transistor liquid crystal display (TFT-LCD) is mainly used in a display product. An advanced super dimension switch (ADS) technique has been widely used in various display products due to its advantages such as high resolution, high light transmittance, low power consumption, wide viewing angle, high aperture ratio, low chromatic aberration, and being free of push Mura. Its core features may be described as forming a multi-dimensional electric field by means of electrical fields generated at edges of slit electrodes within an identical plane and an electrical field generated between a slit electrode layer and a plate electrode layer, so as to enable all the liquid crystal molecules between the slit electrodes and right above the electrodes within a liquid crystal cell to rotate, thereby to improve the operational efficiency of the liquid crystal molecules and enhance the light transmission efficiency.

[0004] Optical efficiency is one of the principal factors that may affect a LCD display effect. Depending on a phase delay of a liquid crystal unit, its display effect may be determined by the optical efficiency, which is expressed as $d \times \Delta n$, where d represents a thickness of a liquid crystal layer between an upper substrate and a lower substrate of a liquid crystal display panel, and Δn represents a birefringence difference of liquid crystals. At an initial white-light level, white light beams may be viewed by human eyes. When it is shifted gradually to a middle grayscale and the red-light transmittance increases, a color of the LCD viewed by the human eyes is not white any more, and instead, chromatic aberration slightly shifted toward yellow may occur. The so-called "yellowish" phenomenon is just one of the principal causes for the deterioration in the image quality of the display.

[0005] During the manufacture of the liquid crystal display panel, there is inevitably a certain pretilt angle of the liquid crystal layer relative to a surface of an alignment layer due to a rubbing alignment process (i.e., it is impossible for the pretilt angle of the liquid crystal layer to be 0°). At this time, when a left viewing angle is identical to a right viewing angle, liquid crystal axial directions

viewed at the left viewing angle and the right viewing angle are different from each other, thereby Δn for the left viewing angle is different from that for the right viewing angle. Because d is of an identical value when the left viewing angle is identical to the right viewing angle, the phase delay $\Delta n \times d$ for the left viewing angle is different from that for the right viewing angle, and different optical path differences may occur. At this time, the light beams transmitted through liquid crystal display panel may be of different wavelengths, resulting in the chromatic aberration, which is more apparent in a dark state. As a result, the display effect of the liquid crystal display panel will be adversely affected.

SUMMARY

[0006] An object of the present disclosure is to provide an optical compensation film and a method for manufacturing the same, a polarizer, a liquid crystal display panel, and a display device, so as to prevent the occurrence of chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle.

[0007] In one aspect, the present disclosure provides in some embodiments an optical compensation film, including a first substrate, a second substrate arranged opposite to the first substrate, a first alignment layer arranged at a side of the first substrate opposite to the second substrate, a second alignment layer arranged at a side of the second substrate opposite to the first substrate, and a first liquid crystal layer arranged between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle.

[0008] Further, the first liquid crystal layer includes positive uniaxial liquid crystals.

[0009] Further the predetermined pretilt angle is 2°.

[0010] In another aspect, the present disclosure provides in some embodiments a method for manufacturing an optical compensation film, including: providing a first substrate, providing a second substrate opposite to the first substrate, forming a first alignment layer at a side of the first substrate opposite to the second substrate, forming a second alignment layer at a side of the second substrate opposite to the first substrate, and forming a first liquid layer between the first alignment layer and the second alignment layer, wherein the first liquid layer is provided with a predetermined pretilt angle.

[0011] Further, the first liquid crystal layer includes positive uniaxial liquid crystals.

[0012] Further, the predetermined pretilt angle is 2°.

[0013] In yet another aspect, the present disclosure provides in some embodiments a polarizer including the above-mentioned optical compensation film.

[0014] In still yet another aspect, the present disclosure provides in some embodiments a liquid crystal display panel, including a lower polarizer, an array substrate, a second liquid crystal layer, a color filter substrate and an upper polarizer arranged sequentially in a first direction

perpendicular to the liquid crystal display panel, and optical compensation films.

[0015] Further, the optical compensation films include a first optical compensation film and a second optical compensation film. The first and the second optical compensation films each includes a first substrate, a second substrate arranged opposite to the first substrate, a first alignment layer arranged at a side of the first substrate opposite to the second substrate, a second alignment layer arranged at a side of the second substrate opposite to the first substrate, and a first liquid crystal layer arranged between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle. The lower polarizer, the first optical compensation film, the array substrate, the second liquid crystal layer, the color filter substrate, the second optical compensation film and the upper polarizer in the liquid crystal display panel are arranged sequentially in the first direction.

[0016] Further, a sum of the pretilt angle of the first liquid crystal layer and a pretilt angle of the second liquid crystal layer is 180° .

[0017] Further, the first liquid crystal layer includes positive uniaxial liquid crystals.

[0018] Further, the predetermined pretilt angle is 2° .

[0019] Further, the lower polarizer and the upper polarizer are each provided with the optical compensation film.

[0020] In still yet another aspect, the present disclosure provides in some embodiments a display device including the above-mentioned liquid crystal display panel.

[0021] According to the embodiments of the present disclosure, the liquid crystal display panel is provided with two optical compensation films, and a sum of the pretilt angle of the liquid crystal layer of each optical compensation film and the pretilt angle of the liquid crystal layer of the liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of each optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, so as to enable the final pretilt angle of the liquid crystal layers of the liquid crystal display panel to be 0° . As a result, it is able to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle, thereby to improve the display effect of liquid crystal display panel.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

Fig.1 is a schematic view showing an ADS liquid crystal display panel in the related art;

Fig.2 is a schematic view showing an optical compensation film according to at least one embodiment of the present disclosure;

Fig.3 is a schematic view showing an ADS liquid crystal display panel according to at least one em-

bodiment of the present disclosure;

Fig.4 is a schematic view showing a principle for the occurrence of chromatic aberration for the ADS liquid crystal display panel in the related art; and

Fig.5 is a schematic view showing a principle for the prevention of a chromatic aberration for the ADS liquid crystal display panel according to at least one embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0023] In order to make the objects, the technical solutions and the advantages of the present disclosure more apparent, the present disclosure will be described hereinafter in conjunction with the drawings and embodiments.

[0024] For the liquid crystal display panel in the related art, it is impossible for a pretilt angle of a liquid crystal layer to be 0° , so there is light leakage or a certain phase delay in a dark state, and a chromatic aberration may easily occur. In this regard, the present disclosure provides in some embodiments an optical compensation film and a method for manufacturing the same, a polarizer, a liquid crystal display panel and a display device, so as to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in the dark state or at a specific viewing angle.

[0025] The optical compensation film in some embodiments of the present disclosure includes a first substrate, a second substrate arranged opposite to the first substrate, a first alignment layer arranged at a side of the first substrate opposite to the second substrate, a second alignment layer arranged at a side of the second substrate opposite to the first substrate, and a first liquid crystal layer arranged between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle.

[0026] The optical compensation film may be applied to a liquid crystal display panel. A sum of the pretilt angle of the liquid crystal layer of the optical compensation film and the pretilt angle of the liquid crystal layer of the liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of the optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, such that a final pretilt angle of the liquid crystal layers of the liquid crystal display panel to be 0° . As a result, it is able to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle, thereby to improve the display effect of liquid crystal display panel.

[0027] Alternatively, the first liquid crystal layer includes positive uniaxial liquid crystals.

[0028] For the liquid crystal display panel, the smaller the pretilt angle of the liquid crystal layer, the better, and ideally, the pretilt angle is 0° . In an actual process, the pretilt angle of the liquid crystal layer is usually 2° . For the optical compensation film in the embodiments of the

present disclosure, the pretilt angle of the liquid crystal layer is 2° and in a direction opposite to the pretilt angle of the liquid crystal layer of the liquid crystal display panel.

[0029] The method for manufacturing the optical compensation film in some embodiments of the present disclosure includes steps of providing a first substrate, providing a second substrate opposite to the first substrate, forming a first alignment layer at a side of the first substrate opposite to the second substrate, forming a second alignment layer at a side of the second substrate opposite to the first substrate, and forming a first liquid layer between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle.

[0030] The optical compensation film manufactured herein may be applied to a liquid crystal display panel. A sum of the pretilt angle of the liquid crystal layer of the optical compensation film and the pretilt angle of the liquid crystal layer of the liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of the optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, such that the final pretilt angle of the liquid crystal layers of the liquid crystal display panel may be 0° . As a result, it is able to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle, thereby to improve the display effect of liquid crystal display panel.

[0031] Alternatively, the first liquid crystal layer includes positive uniaxial liquid crystals.

[0032] For the liquid crystal display panel, the smaller the pretilt angle of the liquid crystal layer, the better, and ideally, the pretilt angle is 0° . In an actual process, the pretilt angle of the liquid crystal layer is usually 2° . For the optical compensation film in the embodiments of the present disclosure, the pretilt angle of the liquid crystal layer is 2° and in a direction opposite to the pretilt angle of the liquid crystal layer of the liquid crystal display panel.

[0033] The polarizer in the embodiments of the present disclosure includes the above-mentioned optical compensation film.

[0034] The liquid crystal display panel in the embodiments of the present disclosure includes a lower polarizer, an array substrate, a second liquid crystal layer, a color filter substrate and an upper polarizer arranged sequentially from the bottom up, and the above-mentioned optical compensation films. A sum of the pretilt angle of the first liquid crystal layer and the pretilt angle of the second liquid crystal layer is 180° .

[0035] According to the embodiments of the present disclosure, the liquid crystal display panel is provided with two optical compensation films, and a sum of the pretilt angle of the liquid crystal layer of each optical compensation film and the pretilt angle of the liquid crystal layer of the liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of each optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, such that

the final pretilt angle of the liquid crystal layers of the liquid crystal display panel may be 0° . As a result, it is able to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle, thereby to improve the display effect of liquid crystal display panel.

[0036] To be specific, one of the optical compensation films is arranged between the color filter substrate and the upper polarizer, and the other optical compensation film is arranged between the array substrate and the lower polarizer.

[0037] The display device in the embodiments of the present disclosure includes the above-mentioned liquid crystal display panel. The display device may be any product or member having a display function, such as a liquid crystal television, a liquid crystal display, a digital photo frame, a mobile phone, or a flat-panel computer.

[0038] The present disclosure will be described hereinafter in conjunction with the drawings by taking an ADS liquid crystal display panel as an example.

[0039] As shown in Fig.1, which is a schematic view showing an existing ADS liquid crystal display panel, the ADS liquid crystal display panel includes a color filter substrate 2, an array substrate 4, and a liquid crystal layer 3 arranged between the color filter substrate 2 and the array substrate 4. An upper polarizer 1 is arranged at a side of the color filter substrate 2 away from the array substrate 4, and a lower polarizer 5 is arranged at a side of the array substrate 4 away from the color filter substrate 2.

[0040] During the manufacture of the liquid crystal display panel, there is inevitably a certain pretilt angle of the liquid crystal layer 3 relative to a surface of an alignment layer due to a rubbing alignment process (i.e., it is impossible for the pretilt angle of the liquid crystal layer 3 to be 0°). At this time, there is light leakage or a certain phase delay for the ADS product in the dark state. As a result, the chromatic aberration may easily occur, and the application of the ADS product will be adversely affected. For example, the chromaticity in the dark state is highly demanded in medical display, and when a scanned image of a patient is viewed, it is required to prevent the occurrence of chromatic aberration, so as to prevent the misjudgment. Hence, the application of the ADS liquid crystal display panel in the medical display will be adversely affected due to the chromatic aberration.

[0041] In order to improve the chromatic aberration of the ADS liquid crystal display panel, the present disclosure provides in one embodiment an optical compensation film which, as shown in Fig.2, includes a first substrate a1, a second substrate a2 arranged opposite to the first substrate a1, a first alignment layer b1 arranged at a side of the first substrate a1 opposite to the second substrate a2, a second alignment layer b2 arranged at a side of the second substrate a2 opposite to the first substrate a1, and a first liquid crystal layer c arranged between the first alignment layer b1 and the second align-

ment layer b2 and provided with a predetermined pretilt angle α_1 .

[0042] Through the optical compensation film in the embodiments of the present disclosure, it is able to prevent the occurrence of the chromatic aberration for the existing ADS liquid crystal display panel in the dark state or at a specific viewing angle. The existing optical compensation film is mainly used to improve contrast as well as a viewing angle. For the ADS liquid crystal display panel, its viewing angle and contrast are well enough, and it is able to provide a full viewing angle even without any improvement. The optical compensation film in the embodiments of the present disclosure may be used to prevent the occurrence of the chromatic aberration for the existing ADS liquid crystal display panel in the dark state or at a specific viewing angle.

[0043] Fig.3 shows an ADS liquid crystal display panel according to one embodiment of the present disclosure. As compared with the existing ADS liquid crystal display panel in Fig.1, a second optical compensation film 6b is arranged between the upper polarizer 1 and the color filter substrate 2, and a first optical compensation film 6a is arranged between the lower polarizer 5 and the array substrate 4. The optical compensation film 6a and 6b each includes two substrates arranged opposite to each other, and a liquid crystal layer arranged between the two substrates, wherein the liquid crystal layer is provided with a predetermined pretilt angle α_1 . As shown in Fig.3, the pretilt angle α_1 of the liquid crystal layer of each of the optical compensation films 6a and 6b is complementary to the pretilt angle of the liquid crystal layer of the ADS liquid crystal display panel, so that the final pretilt angle of the liquid crystal layers of the entire ADS liquid crystal display panel is 0° .

[0044] The liquid crystal layer of each of the optical compensation films 6a and 6b includes positive uniaxial liquid crystals. Because the liquid crystal layer of the ADS liquid crystal display panel also includes the positive uniaxial liquid crystals, Δn for the liquid layer of each optical compensation film is identical to that for the liquid crystal layer of the ADS liquid crystal display panel, and a resultant phase delay is the same too in the case of an identical viewing angle. When the pretilt angle α_1 of the liquid crystal layer of each optical compensation film is complementary to the pretilt angle α_2 of the liquid crystal layer of the ADS liquid crystal display panel, the resultant phase delay may be used to cancel out the chromatic aberration generated due to the phase delay. When the other kinds of liquid crystals are used, it is impossible to compensate for the chromatic aberration due to the different Δn .

[0045] Fig.4 shows the principle for the occurrence of the chromatic aberration for the existing ADS liquid crystal display panel. When a light beam is of a standard wavelength λ of 589nm, Δn of the liquid crystal layer is $n_e - n_o$, where n_e represents a refractive index of the liquid crystal in a long-axis direction, and n_o represents a refractive index of the liquid crystal in a short-axis direction.

Due to the pretilt angle of the liquid crystal layer, Δn changes along with the viewing angle. For the existing ADS liquid crystal display panel, when $\Delta n \times d = \lambda/2$ (d represents a thickness of the liquid crystal layer), a normal white color is displayed (at a center viewing angle), when $\Delta n \times d < \lambda/2$, the chromatic aberration shifted toward blue light occurs (Δn for the right viewing angle decreases), and when $\Delta n \times d > \lambda/2$, the chromatic aberration shifted toward yellow light occurs (Δn for the left viewing angle increases).

[0046] As shown in Fig.5, which is a schematic view showing the principle for the prevention of the chromatic aberration for the ADS liquid crystal display panel according to one embodiment of the present disclosure, after the ADS liquid crystal display panel is provided with optical compensation film, a sum of the pretilt angle of the liquid crystal layer of the optical compensation film and the pretilt angle of the liquid crystal layer of the ADS liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of the optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, so as to enable the final pretilt angle of the liquid crystal layers of the liquid crystal display panel to be 0° . At this time, Δn is of a constant value but does not change along with the viewing angle. As a result, it is able to prevent the occurrence of the chromatic aberration for the ADS Liquid crystal display panel in the dark state or at a specific viewing angle, thereby to improve the display effect of the ADS liquid crystal display panel.

[0047] In the actual process, the pretilt angle of the liquid crystal layer of the ADS liquid crystal display panel is usually 2° . Hence, for the optical compensation film in the embodiments of the present disclosure, the pretilt angle of its liquid crystal layer may also be set as 2° .

[0048] The existing polarizer may further be improved, e.g., the existing polarizer may also be provided with the optical compensation films 6a and 6b. In this way, when the novel polarizer is attached onto the color filter substrate and the array substrate of the ADS liquid crystal display panel, it is also able to prevent the occurrence of the chromatic aberration for the ADS liquid crystal display panel in the dark state or at a specific viewing angle.

[0049] The above are merely the preferred embodiments of the present disclosure. It should be appreciated that, a person skilled in the art may make further modifications and improvements without departing from the principle of the present disclosure, and these modifications and improvements shall also fall within the scope of the present disclosure.

Claims

1. An optical compensation film, comprising:

- a first substrate;
- a second substrate arranged opposite to the first

- substrate;
a first alignment layer arranged at a side of the first substrate opposite to the second substrate;
a second alignment layer arranged at a side of the second substrate opposite to the first substrate; and
a first liquid crystal layer arranged between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle.
2. The optical compensation film according to claim 1, wherein the first liquid crystal layer comprises positive uniaxial liquid crystals.
3. The optical compensation film according to claim 1, wherein the predetermined pretilt angle is 2°.
4. A method for manufacturing an optical compensation film, comprising:
providing a first substrate;
providing a second substrate opposite to the first substrate;
forming a first alignment layer at a side of the first substrate opposite to the second substrate;
forming a second alignment layer at a side of the second substrate opposite to the first substrate; and
forming a first liquid layer between the first alignment layer and the second alignment layer, wherein the first liquid layer is provided with a predetermined pretilt angle.
5. The method according to claim 4, wherein the first liquid crystal layer comprises positive uniaxial liquid crystals.
6. The method according to claim 4, wherein the predetermined pretilt angle is 2°.
7. A polarizer, comprising the optical compensation film according to any one of claims 1 to 3.
8. A liquid crystal display panel, comprising a lower polarizer, an array substrate, a second liquid crystal layer, a color filter substrate and an upper polarizer arranged sequentially in a first direction perpendicular to the liquid crystal display panel, and optical compensation films.
9. The liquid crystal display panel according to claim 8, wherein the optical compensation films comprise a first optical compensation film and a second optical compensation film, wherein the first and the second optical compensation films each comprises:
- a first substrate;
a second substrate arranged opposite to the first substrate;
a first alignment layer arranged at a side of the first substrate opposite to the second substrate;
a second alignment layer arranged at a side of the second substrate opposite to the first substrate; and
a first liquid crystal layer arranged between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle, wherein the lower polarizer, the first optical compensation film, the array substrate, the second liquid crystal layer, the color filter substrate, the second optical compensation film and the upper polarizer in the liquid crystal display panel are arranged sequentially in the first direction.
10. The liquid crystal display panel according to claim 9, wherein a sum of the pretilt angle of the first liquid crystal layer and a pretilt angle of the second liquid crystal layer is 180°.
11. The liquid crystal display panel according to claim 9, wherein the first liquid crystal layer comprises positive uniaxial liquid crystals.
12. The liquid crystal display panel according to claim 9, wherein the predetermined pretilt angle is 2°.
13. The liquid crystal display panel according to claim 8, wherein the lower polarizer and the upper polarizer are each provided with the optical compensation film.
14. A display device, comprising the liquid crystal display panel according to claim 8.

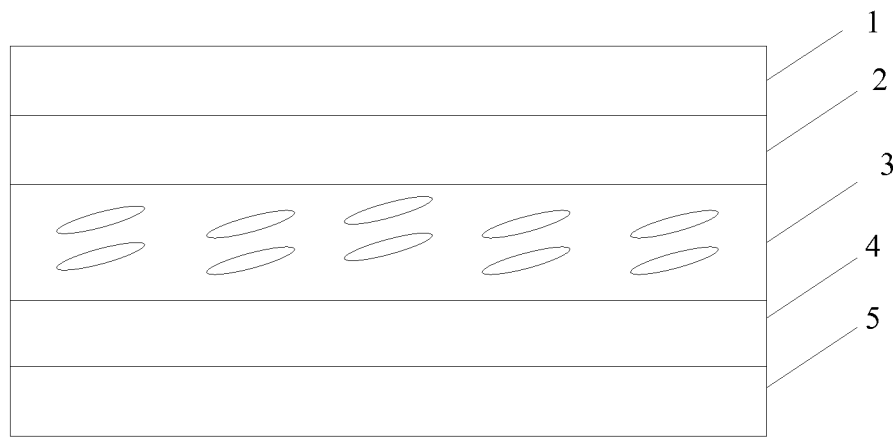


Fig. 1

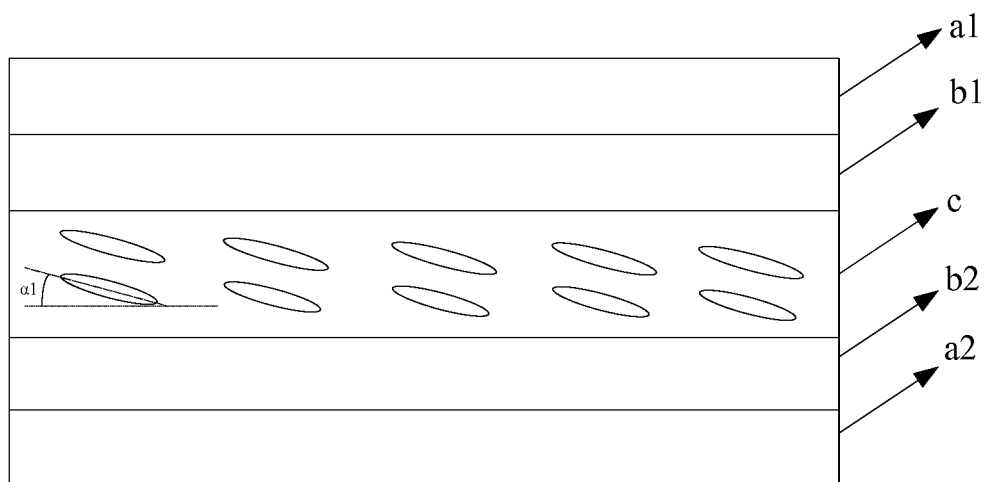


Fig. 2

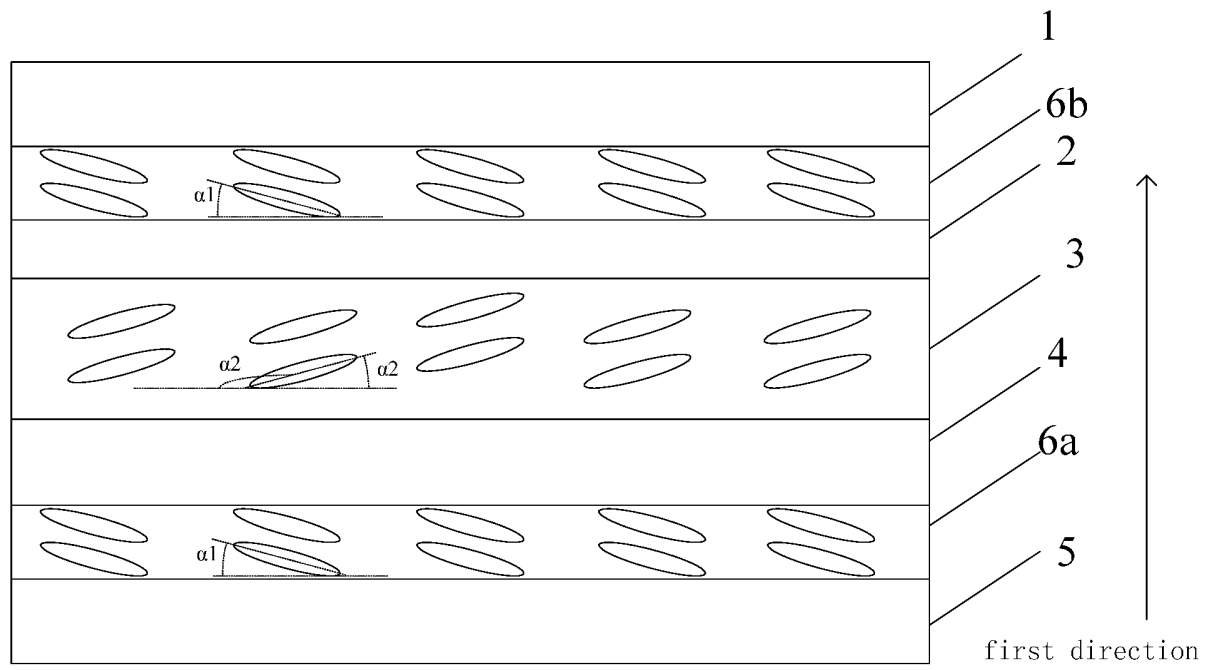


Fig. 3

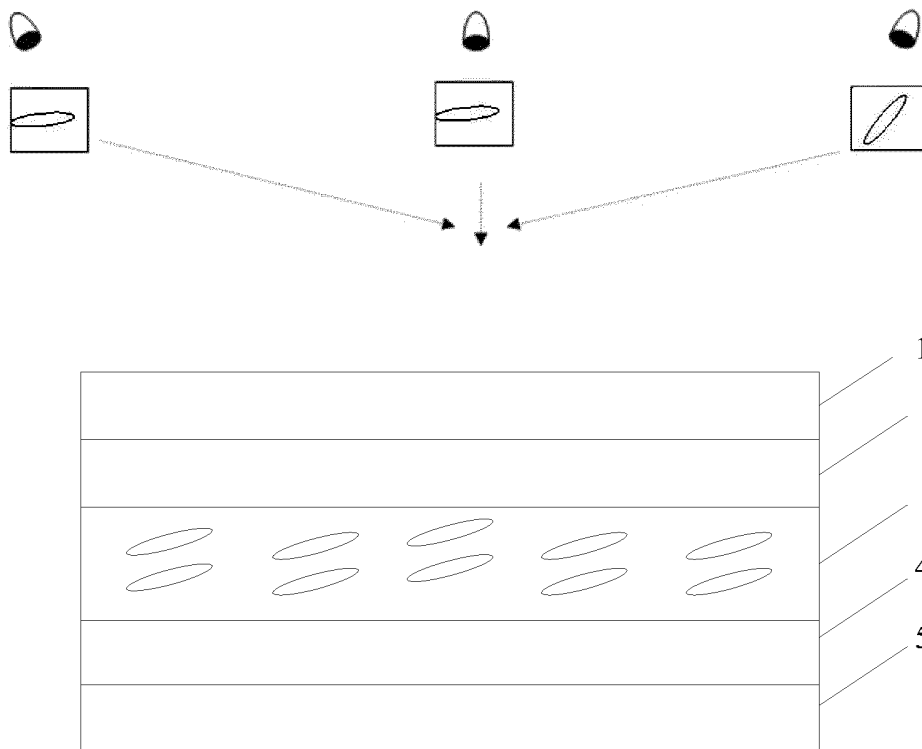


Fig. 4

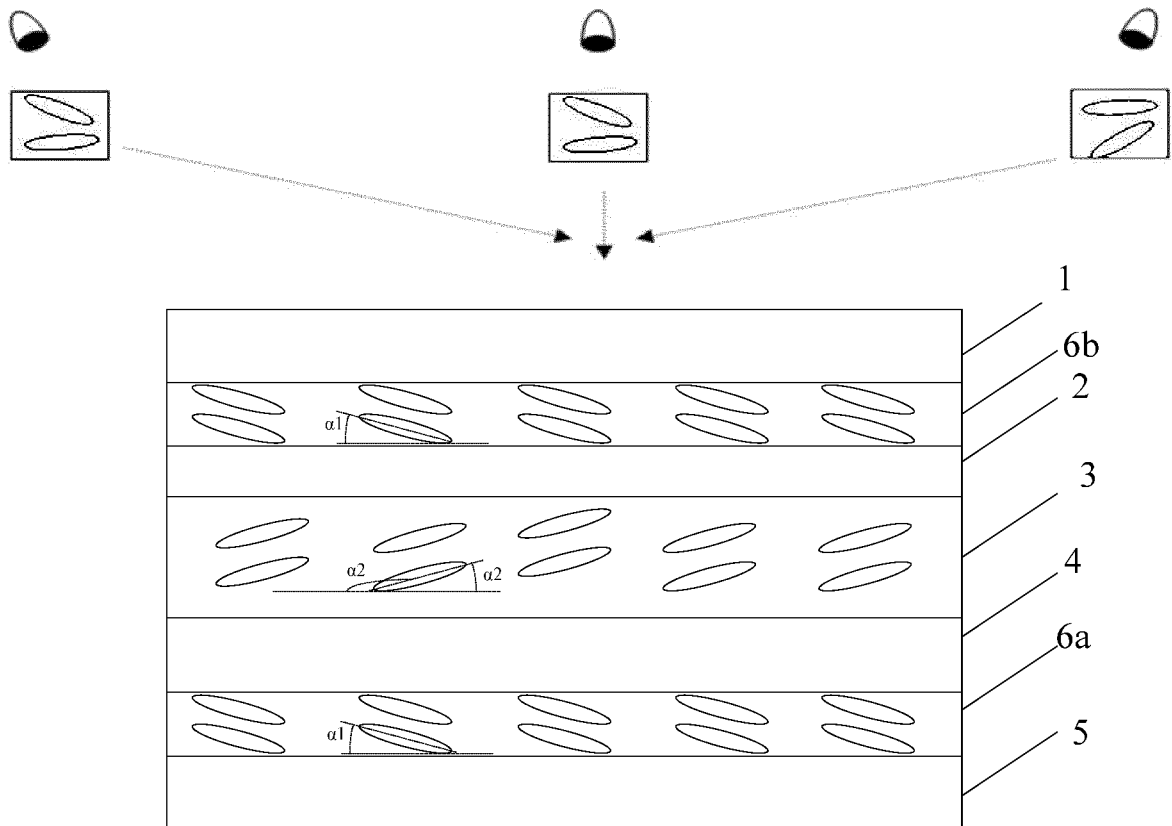


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/093369

A. CLASSIFICATION OF SUBJECT MATTER

G02F 1/1335 (2006.01) i; G02F 1/1347 (2006.01) i; G02F 1/1337 (2006.01) i
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT; EPODOC; WPI; CNKI: super dimension switch, orientation, optics, compensate, angle of inclination, ADS, liquid crystal, orientat+ 3d (layer or film) , compensat+ 3d (layer or film), angle

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 104297993 A (BOE TECHNOLOGY GROUP CO., LTD. et al.), 21 January 2015 (21.01.2015), description, paragraphs 0062-0067, figures 2 and 4, and claims 1-10	1-14
X	CN 102257428 A (TEXECOM LTD.), 23 November 2011 (23.11.2011), description, paragraphs 0087-0111, and figure 8	1-7
Y	CN 102257428 A (TEXECOM LTD.), 23 November 2011 (23.11.2011), description, paragraphs 0087-0111, and figure 8	9-12
X	CN 103018962 A (BOE TECHNOLOGY GROUP CO., LTD.), 03 April 2013 (03.04.2013), description, paragraphs 0030-0039, and figure 6	8, 13, 14
Y	CN 103018962 A (BOE TECHNOLOGY GROUP CO., LTD.), 03 April 2013 (03.04.2013), description, paragraphs 0030-0039, and figure 6	9-12
X	CN 103364993 A (HEFEI BOE OPTOELECTRONICS TECHNOLOGY CO., LTD. et al.), 23 October 2013 (23.10.2013), description, paragraphs 0034-0056, and figure 2	8, 13, 14

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search
04 January 2016 (04.01.2016)

Date of mailing of the international search report
15 January 2016 (15.01.2016)

Name and mailing address of the ISA/CN:
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No.: (86-10) 62019451

Authorized officer
CHEN, Xijie
Telephone No.: (86-10) **62413629**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/093369

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2008062375 A1 (NEC LCD TECHNOLOGIES LTD.), 13 March 2008 (13.03.2008), the whole document	1-14

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/093369

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 104297993 A	21 January 2015	None	
CN 102257428 A	23 November 2011	WO 2010064311 A1	10 June 2010
		CN 102257428 B	16 April 2014
		EP 2372444 A1	05 October 2011
		US 2012002140 A1	05 January 2012
		US 8610844 B2	17 December 2013
CN 103018962 A	03 April 2013	EP 2743758 A2	18 June 2014
		CN 103018962 B	01 April 2015
		US 2014168557 A1	19 June 2014
CN 103364993 A	23 October 2013	WO 2014146396 A1	25 September 2014
		US 2015261028 A1	17 September 2015
US 2008062375 A1	13 March 2008	US 7586570 B2	08 September 2009
		JP 4899153 B2	21 March 2012
		JP 2008064843 A	21 March 2008
		CN 101149535 A	26 March 2008
		CN 101149535 B	29 August 2012

Form PCT/ISA/210 (patent family annex) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201410602634 [0001]

专利名称(译)	光学补偿膜及其制造方法，偏振器，液晶显示板和显示装置		
公开(公告)号	EP3214489A4	公开(公告)日	2018-11-07
申请号	EP2015837075	申请日	2015-10-30
[标]申请(专利权)人(译)	京东方科技集团股份有限公司 北京京东方显示技术有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司. 北京京东方显示技术有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司. 北京京东方显示技术有限公司.		
[标]发明人	WANG YONGCAN ZHAN HONGMING LIN LIFENG		
发明人	WANG, YONGCAN ZHAN, HONGMING LIN, LIFENG		
IPC分类号	G02F1/1335 G02F1/1347 G02F1/1337		
CPC分类号	G02F1/133528 G02F1/133636 G02F1/1337 G02F2001/133746 G02B5/3016 G02B5/3083 G02F1/13363 G02F1/1347 G02F2001/133633 G02F2001/133749 G02F2001/134372 G02F2413/02 G02B5/3025 G02F1/1335		
代理机构(译)	LAVOIX		
优先权	201410602634.4 2014-10-31 CN		
其他公开文献	EP3214489A1 EP3214489B1		
外部链接	Espacenet		

摘要(译)

本发明涉及显示技术领域，提供一种光学补偿膜及其制造方法，偏光片，液晶显示面板和显示装置。光学补偿膜包括第一基板，与第一基板相对设置的第二基板，设置在第一基板的与第二基板相对的一侧的第一配向层，配置在第二基板的相对侧的第二配向层第一液晶层设置在第一基板和第一液晶层之间，第一液晶层设置在第一取向层和第二取向层之间，其中第一液晶层具有预定的预倾角。