



(11) **EP 3 214 489 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
06.05.2020 Bulletin 2020/19

(51) Int Cl.:
G02F 1/1335 ^(2006.01) **G02F 1/1347** ^(2006.01)
G02F 1/1337 ^(2006.01)

(21) Application number: **15837075.9**

(86) International application number:
PCT/CN2015/093369

(22) Date of filing: **30.10.2015**

(87) International publication number:
WO 2016/066133 (06.05.2016 Gazette 2016/18)

(54) **OPTICAL COMPENSATION FILM AND MANUFACTURING METHOD THEREFOR, POLARIZER, LIQUID CRYSTAL DISPLAY PANEL AND DISPLAY APPARATUS**

OPTISCHE KOMPENSATIONSFOLIE UND HERSTELLUNGSVERFAHREN DAFÜR,
POLARISATOR, FLÜSSIGKRISTALLANZEIGETADEL UND ANZEIGEVORRICHTUNG

FILM DE COMPENSATION OPTIQUE ET SON PROCÉDÉ DE FABRICATION, POLARISEUR,
PANNEAU D’AFFICHAGE À CRISTAUX LIQUIDES, ET APPAREIL D’AFFICHAGE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **31.10.2014 CN 201410602634**

(43) Date of publication of application:
06.09.2017 Bulletin 2017/36

(73) Proprietors:
• **BOE Technology Group Co., Ltd.
Beijing 100015 (CN)**
• **Beijing BOE Display Technology Co., Ltd.
Beijing 100176 (CN)**

(72) Inventors:
• **WANG, Yongcan
Beijing 100176 (CN)**
• **ZHAN, Hongming
Beijing 100176 (CN)**
• **LIN, Lifeng
Beijing 100176 (CN)**

(74) Representative: **Lavoix
Bayerstrasse 83
80335 München (DE)**

(56) References cited:
**CN-A- 102 257 428 CN-A- 103 018 962
CN-A- 103 364 993 CN-A- 104 297 993
US-A1- 2008 062 375 US-A1- 2012 002 140
US-A1- 2014 168 557**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 214 489 B1

Description

TECHNICAL FIELD

[0001] The present disclosure relates to the field of display technology, in particular to an optical compensation film and a method for manufacturing the same, a polarizer, a liquid crystal display panel and a display device.

BACKGROUND

[0002] Currently, thin film transistor liquid crystal display (TFT-LCD) is mainly used in a display product. An advanced super dimension switch (ADS) technique has been widely used in various display products due to its advantages such as high resolution, high light transmittance, low power consumption, wide viewing angle, high aperture ratio, low chromatic aberration, and being free of push Mura. Its core features may be described as forming a multi-dimensional electric field by means of electrical fields generated at edges of slit electrodes within an identical plane and an electrical field generated between a slit electrode layer and a plate electrode layer, so as to enable all the liquid crystal molecules between the slit electrodes and right above the electrodes within a liquid crystal cell to rotate, thereby to improve the operational efficiency of the liquid crystal molecules and enhance the light transmission efficiency.

[0003] Optical efficiency is one of the principal factors that may affect a LCD display effect. Depending on a phase delay of a liquid crystal unit, its display effect may be determined by the optical efficiency, which is expressed as $d \times \Delta n$, where d represents a thickness of a liquid crystal layer between an upper substrate and a lower substrate of a liquid crystal display panel, and Δn represents a birefringence difference of liquid crystals. At an initial white-light level, white light beams may be viewed by human eyes. When it is shifted gradually to a middle grayscale and the red-light transmittance increases, a color of the LCD viewed by the human eyes is not white any more, and instead, chromatic aberration slightly shifted toward yellow may occur. The so-called "yellowish" phenomenon is just one of the principal causes for the deterioration in the image quality of the display.

[0004] During the manufacture of the liquid crystal display panel, there is inevitably a certain pretilt angle of the liquid crystal layer relative to a surface of an alignment layer due to a rubbing alignment process (i.e., it is impossible for the pretilt angle of the liquid crystal layer to be 0°). At this time, when a left viewing angle is identical to a right viewing angle, liquid crystal axial directions viewed at the left viewing angle and the right viewing angle are different from each other, thereby Δn for the left viewing angle is different from that for the right viewing angle. Because d is of an identical value when the left viewing angle is identical to the right viewing angle, the phase delay $\Delta n \times d$ for the left viewing angle is different from that for the right viewing angle, and different optical

path differences may occur. At this time, the light beams transmitted through liquid crystal display panel may be of different wavelengths, resulting in the chromatic aberration, which is more apparent in a dark state. As a result, the display effect of the liquid crystal display panel will be adversely affected.

[0005] Reference document "US20120002140A1" relates to a liquid crystal display. A transparent electrode constituting a display liquid crystal cell has a plurality of patterns for forming a desired pattern in the outer circumferential part forming the whole display region, and transparent electrodes are sandwiching at least a part of liquid crystal molecules of a liquid crystal layer. When voltage application control of the plurality of patterns is performed, respectively, for the whole display region displayed by bright display or dark display, a desired pattern can be displayed by reversed bright/dark display of the bright/dark display of the whole display region.

SUMMARY

[0006] The invention is defined by the features of claim 1.

[0007] An object of the present disclosure is to provide a liquid crystal display panel, and a display device, so as to prevent the occurrence of chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle.

[0008] In one aspect, the present disclosure provides in some embodiments an optical compensation film, including a first substrate, a second substrate arranged opposite to the first substrate, a first alignment layer arranged at a side of the first substrate opposite to the second substrate, a second alignment layer arranged at a side of the second substrate opposite to the first substrate, and a first liquid crystal layer arranged between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle.

[0009] Further, the first liquid crystal layer includes positive uniaxial liquid crystals.

[0010] Further the predetermined pretilt angle is 2° .

[0011] In another aspect, the present disclosure provides in some embodiments a method for manufacturing an optical compensation film, including: providing a first substrate, providing a second substrate opposite to the first substrate, forming a first alignment layer at a side of the first substrate opposite to the second substrate, forming a second alignment layer at a side of the second substrate opposite to the first substrate, and forming a first liquid layer between the first alignment layer and the second alignment layer, wherein the first liquid layer is provided with a predetermined pretilt angle.

[0012] Further, the first liquid crystal layer includes positive uniaxial liquid crystals.

[0013] Further, the predetermined pretilt angle is 2° .

[0014] In yet another aspect, the present disclosure provides in some embodiments a polarizer including the

above-mentioned optical compensation film.

[0015] In still yet another aspect, the present disclosure provides in some embodiments a liquid crystal display panel, including a lower polarizer, an array substrate, a second liquid crystal layer, a color filter substrate and an upper polarizer arranged sequentially in a first direction perpendicular to the liquid crystal display panel, and optical compensation films.

[0016] Further, the optical compensation films include a first optical compensation film and a second optical compensation film. The first and the second optical compensation films each includes a first substrate, a second substrate arranged opposite to the first substrate, a first alignment layer arranged at a side of the first substrate opposite to the second substrate, a second alignment layer arranged at a side of the second substrate opposite to the first substrate, and a first liquid crystal layer arranged between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle. The lower polarizer, the first optical compensation film, the array substrate, the second liquid crystal layer, the color filter substrate, the second optical compensation film and the upper polarizer in the liquid crystal display panel are arranged sequentially in the first direction.

[0017] Further, a sum of the pretilt angle of the first liquid crystal layer and a pretilt angle of the second liquid crystal layer is 180° .

[0018] Further, the first liquid crystal layer includes positive uniaxial liquid crystals.

[0019] Further, the predetermined pretilt angle is 2° .

[0020] Further, the lower polarizer and the upper polarizer are each provided with the optical compensation film.

[0021] In still yet another aspect, the present disclosure provides in some embodiments a display device including the above-mentioned liquid crystal display panel.

[0022] According to the embodiments of the present disclosure, the liquid crystal display panel is provided with two optical compensation films, and a sum of the pretilt angle of the liquid crystal layer of each optical compensation film and the pretilt angle of the liquid crystal layer of the liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of each optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, so as to enable the final pretilt angle of the liquid crystal layers of the liquid crystal display panel to be 0° . As a result, it is able to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle, thereby to improve the display effect of liquid crystal display panel.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023]

Fig.1 is a schematic view showing an ADS liquid

crystal display panel in the related art;

Fig.2 is a schematic view showing an optical compensation film according to at least one embodiment of the present disclosure;

Fig.3 is a schematic view showing an ADS liquid crystal display panel according to at least one embodiment of the present disclosure;

Fig.4 is a schematic view showing a principle for the occurrence of chromatic aberration for the ADS liquid crystal display panel in the related art; and

Fig.5 is a schematic view showing a principle for the prevention of a chromatic aberration for the ADS liquid crystal display panel according to at least one embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0024] In order to make the objects, the technical solutions and the advantages of the present disclosure more apparent, the present disclosure will be described hereinafter in conjunction with the drawings and embodiments.

[0025] For the liquid crystal display panel in the related art, it is impossible for a pretilt angle of a liquid crystal layer to be 0° , so there is light leakage or a certain phase delay in a dark state, and a chromatic aberration may easily occur. In this regard, the present disclosure provides in some embodiments an optical compensation film and a method for manufacturing the same, a polarizer, a liquid crystal display panel and a display device, so as to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in the dark state or at a specific viewing angle.

[0026] The optical compensation film in some embodiments of the present disclosure includes a first substrate, a second substrate arranged opposite to the first substrate, a first alignment layer arranged at a side of the first substrate opposite to the second substrate, a second alignment layer arranged at a side of the second substrate opposite to the first substrate, and a first liquid crystal layer arranged between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle.

[0027] The optical compensation film may be applied to a liquid crystal display panel. A sum of the pretilt angle of the liquid crystal layer of the optical compensation film and the pretilt angle of the liquid crystal layer of the liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of the optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, such that a final pretilt angle of the liquid crystal layers of the liquid crystal display panel to be 0° . As a result, it is able to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle, thereby to improve the display effect of liquid crystal display panel.

[0028] Alternatively, the first liquid crystal layer in-

cludes positive uniaxial liquid crystals.

[0029] For the liquid crystal display panel, the smaller the pretilt angle of the liquid crystal layer, the better, and ideally, the pretilt angle is 0° . In an actual process, the pretilt angle of the liquid crystal layer is usually 2° . For the optical compensation film in the embodiments of the present disclosure, the pretilt angle of the liquid crystal layer is 2° and in a direction opposite to the pretilt angle of the liquid crystal layer of the liquid crystal display panel.

[0030] The method for manufacturing the optical compensation film in some embodiments of the present disclosure includes steps of providing a first substrate, providing a second substrate opposite to the first substrate, forming a first alignment layer at a side of the first substrate opposite to the second substrate, forming a second alignment layer at a side of the second substrate opposite to the first substrate, and forming a first liquid layer between the first alignment layer and the second alignment layer, wherein the first liquid crystal layer is provided with a predetermined pretilt angle.

[0031] The optical compensation film manufactured herein may be applied to a liquid crystal display panel. A sum of the pretilt angle of the liquid crystal layer of the optical compensation film and the pretilt angle of the liquid crystal layer of the liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of the optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, such that the final pretilt angle of the liquid crystal layers of the liquid crystal display panel may be 0° . As a result, it is able to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle, thereby to improve the display effect of liquid crystal display panel.

[0032] Alternatively, the first liquid crystal layer includes positive uniaxial liquid crystals.

[0033] For the liquid crystal display panel, the smaller the pretilt angle of the liquid crystal layer, the better, and ideally, the pretilt angle is 0° . In an actual process, the pretilt angle of the liquid crystal layer is usually 2° . For the optical compensation film in the embodiments of the present disclosure, the pretilt angle of the liquid crystal layer is 2° and in a direction opposite to the pretilt angle of the liquid crystal layer of the liquid crystal display panel.

[0034] The polarizer in the embodiments of the present disclosure includes the above-mentioned optical compensation film.

[0035] The liquid crystal display panel in the embodiments of the present disclosure includes a lower polarizer, an array substrate, a second liquid crystal layer, a color filter substrate and an upper polarizer arranged sequentially from the bottom up, and the above-mentioned optical compensation films. A sum of the pretilt angle of the first liquid crystal layer and the pretilt angle of the second liquid crystal layer is 180° .

[0036] According to the embodiments of the present disclosure, the liquid crystal display panel is provided with two optical compensation films, and a sum of the pretilt

angle of the liquid crystal layer of each optical compensation film and the pretilt angle of the liquid crystal layer of the liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of each optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, such that the final pretilt angle of the liquid crystal layers of the liquid crystal display panel may be 0° . As a result, it is able to prevent the occurrence of the chromatic aberration for the liquid crystal display panel in a dark state or at a specific viewing angle, thereby to improve the display effect of liquid crystal display panel.

[0037] To be specific, one of the optical compensation films is arranged between the color filter substrate and the upper polarizer, and the other optical compensation film is arranged between the array substrate and the lower polarizer.

[0038] The display device in the embodiments of the present disclosure includes the above-mentioned liquid crystal display panel. The display device may be any product or member having a display function, such as a liquid crystal television, a liquid crystal display, a digital photo frame, a mobile phone, or a flat-panel computer.

[0039] The present disclosure will be described hereinafter in conjunction with the drawings by taking an ADS liquid crystal display panel as an example.

[0040] As shown in Fig.1, which is a schematic view showing an existing ADS liquid crystal display panel, the ADS liquid crystal display panel includes a color filter substrate 2, an array substrate 4, and a liquid crystal layer 3 arranged between the color filter substrate 2 and the array substrate 4. An upper polarizer 1 is arranged at a side of the color filter substrate 2 away from the array substrate 4, and a lower polarizer 5 is arranged at a side of the array substrate 4 away from the color filter substrate 2.

[0041] During the manufacture of the liquid crystal display panel, there is inevitably a certain pretilt angle of the liquid crystal layer 3 relative to a surface of an alignment layer due to a rubbing alignment process (i.e., it is impossible for the pretilt angle of the liquid crystal layer 3 to be 0°). At this time, there is light leakage or a certain phase delay for the ADS product in the dark state. As a result, the chromatic aberration may easily occur, and the application of the ADS product will be adversely affected. For example, the chromaticity in the dark state is highly demanded in medical display, and when a scanned image of a patient is viewed, it is required to prevent the occurrence of chromatic aberration, so as to prevent the misjudgment. Hence, the application of the ADS liquid crystal display panel in the medical display will be adversely affected due to the chromatic aberration.

[0042] In order to improve the chromatic aberration of the ADS liquid crystal display panel, the present disclosure provides in one embodiment an optical compensation film which, as shown in Fig.2, includes a first substrate a1, a second substrate a2 arranged opposite to

the first substrate a1, a first alignment layer b1 arranged at a side of the first substrate a1 opposite to the second substrate a2, a second alignment layer b2 arranged at a side of the second substrate a2 opposite to the first substrate a1, and a first liquid crystal layer c arranged between the first alignment layer b1 and the second alignment layer b2 and provided with a predetermined pretilt angle α_1 .

[0043] Through the optical compensation film in the embodiments of the present disclosure, it is able to prevent the occurrence of the chromatic aberration for the existing ADS liquid crystal display panel in the dark state or at a specific viewing angle. The existing optical compensation film is mainly used to improve contrast as well as a viewing angle. For the ADS liquid crystal display panel, its viewing angle and contrast are well enough, and it is able to provide a full viewing angle even without any improvement. The optical compensation film in the embodiments of the present disclosure may be used to prevent the occurrence of the chromatic aberration for the existing ADS liquid crystal display panel in the dark state or at a specific viewing angle.

[0044] Fig.3 shows an ADS liquid crystal display panel according to one embodiment of the present disclosure. As compared with the existing ADS liquid crystal display panel in Fig.1, a second optical compensation film 6b is arranged between the upper polarizer 1 and the color filter substrate 2, and a first optical compensation film 6a is arranged between the lower polarizer 5 and the array substrate 4. The optical compensation film 6a and 6b each includes two substrates arranged opposite to each other, and a liquid crystal layer arranged between the two substrates, wherein the liquid crystal layer is provided with a predetermined pretilt angle α_1 . As shown in Fig.3, the pretilt angle α_1 of the liquid crystal layer of each of the optical compensation films 6a and 6b is complementary to the pretilt angle of the liquid crystal layer of the ADS liquid crystal display panel, so that the final pretilt angle of the liquid crystal layers of the entire ADS liquid crystal display panel is 0° .

[0045] The liquid crystal layer of each of the optical compensation films 6a and 6b includes positive uniaxial liquid crystals. Because the liquid crystal layer of the ADS liquid crystal display panel also includes the positive uniaxial liquid crystals, Δn for the liquid layer of each optical compensation film is identical to that for the liquid crystal layer of the ADS liquid crystal display panel, and a resultant phase delay is the same too in the case of an identical viewing angle. When the pretilt angle α_1 of the liquid crystal layer of each optical compensation film is complementary to the pretilt angle α_2 of the liquid crystal layer of the ADS liquid crystal display panel, the resultant phase delay may be used to cancel out the chromatic aberration generated due to the phase delay. When the other kinds of liquid crystals are used, it is impossible to compensate for the chromatic aberration due to the different Δn .

[0046] Fig.4 shows the principle for the occurrence of

the chromatic aberration for the existing ADS liquid crystal display panel. When a light beam is of a standard wavelength λ of 589nm, Δn of the liquid crystal layer is $n_e - n_o$, where n_e represents a refractive index of the liquid crystal in a long-axis direction, and n_o represents a refractive index of the liquid crystal in a short-axis direction. Due to the pretilt angle of the liquid crystal layer, Δn changes along with the viewing angle. For the existing ADS liquid crystal display panel, when $\Delta n \times d = \lambda/2$ (d represents a thickness of the liquid crystal layer), a normal white color is displayed (at a center viewing angle), when $\Delta n \times d < \lambda/2$, the chromatic aberration shifted toward blue light occurs (Δn for the right viewing angle decreases), and when $\Delta n \times d > \lambda/2$, the chromatic aberration shifted toward yellow light occurs (Δn for the left viewing angle increases).

[0047] As shown in Fig.5, which is a schematic view showing the principle for the prevention of the chromatic aberration for the ADS liquid crystal display panel according to one embodiment of the present disclosure, after the ADS liquid crystal display panel is provided with optical compensation film, a sum of the pretilt angle of the liquid crystal layer of the optical compensation film and the pretilt angle of the liquid crystal layer of the ADS liquid crystal display panel is 180° . In other words, the pretilt angle of the liquid crystal layer of the optical compensation film is complementary to that of the liquid crystal layer of the liquid crystal display panel, so as to enable the final pretilt angle of the liquid crystal layers of the liquid crystal display panel to be 0° . At this time, Δn is of a constant value but does not change along with the viewing angle. As a result, it is able to prevent the occurrence of the chromatic aberration for the ADS Liquid crystal display panel in the dark state or at a specific viewing angle, thereby to improve the display effect of the ADS liquid crystal display panel.

[0048] In the actual process, the pretilt angle of the liquid crystal layer of the ADS liquid crystal display panel is usually 2° . Hence, for the optical compensation film in the embodiments of the present disclosure, the pretilt angle of its liquid crystal layer may also be set as 2° .

[0049] The existing polarizer may further be improved, e.g., the existing polarizer may also be provided with the optical compensation films 6a and 6b. In this way, when the novel polarizer is attached onto the color filter substrate and the array substrate of the ADS liquid crystal display panel, it is also able to prevent the occurrence of the chromatic aberration for the ADS liquid crystal display panel in the dark state or at a specific viewing angle.

[0050] The above are merely the preferred embodiments of the present disclosure. It should be appreciated that, a person skilled in the art may make further modifications and improvements without departing from the principle of the present disclosure, and these modifications and improvements shall also fall within the scope of the present disclosure.

Claims

1. A liquid crystal display panel, comprising a lower polarizer (5), an array substrate (4), a liquid crystal layer (3), a color filter substrate (2) and an upper polarizer (1) arranged sequentially in a first direction perpendicular to the liquid crystal display panel, and optical compensation films;
wherein the optical compensation films comprise a first optical compensation film (6a) and a second optical compensation film (6b),
wherein the first compensation film (6a) and the second optical compensation film (6b) each comprises:
 - a first substrate (a1);
 - a second substrate (a2) arranged opposite to the first substrate (a1);
 - a first alignment layer (b1) arranged at a side of the first substrate (a1) opposite to the second substrate (a2);
 - a second alignment layer (b2) arranged at a side of the second substrate (a2) opposite to the first substrate (a1); and
 - a first liquid crystal layer (c) arranged between the first alignment layer (b1) and the second alignment layer (b2), wherein the first liquid crystal layer (c) is provided with a predetermined pretilt angle,
wherein the lower polarizer (5), the first optical compensation film (6a), the array substrate (4), the liquid crystal layer (3), the color filter substrate (2), the second optical compensation film (6b) and the upper polarizer (1) in the liquid crystal display panel are arranged sequentially in the first direction;
 - wherein the sum of the pretilt angle of the first liquid crystal layer (c) of each optical compensation film (6a,6b) and the pretilt angle of the liquid crystal layer (3) of the liquid crystal display panel is 180° ,
 - such that the final pretilt angle of the liquid crystal layers (3,c) of the liquid crystal display is 0°
2. The liquid crystal display panel according to claim 1, wherein the first liquid crystal layer (c) comprises positive uniaxial liquid crystals.
3. The liquid crystal display panel according to claim 1, wherein the predetermined pretilt angle is 2° .
4. The liquid crystal display panel according to claim 1, wherein the lower polarizer (5) and the upper polarizer (1) are each provided with the optical compensation film.
5. A display device, comprising the liquid crystal display panel according to claim 1.

Patentansprüche

1. LCD-Anzeige, umfassend einen unteren Polarisator (5), ein Arraysubstrat (4), eine Flüssigkristallschicht (3), ein Farbfiltersubstrat (2) und einen oberen Polarisator (1), die sequentiell in einer ersten Richtung senkrecht zur LCD-Anzeige angeordnet sind, sowie optische Kompensationsfilme,
wobei die optischen Kompensationsfilme einen ersten optischen Kompensationsfilm (6a) und einen zweiten optischen Kompensationsfilm (6b) umfassen,
wobei der erste Kompensationsfilm (6a) und der zweite optische Kompensationsfilm (6b) jeweils umfassen:
 - ein erstes Substrat (a1);
 - ein zweites Substrat (a2), das dem ersten Substrat (a1) gegenüberliegend angeordnet ist;
 - eine erste Ausrichtungsschicht (b1), die auf einer dem zweiten Substrat (a2) entgegengesetzten Seite des ersten Substrats (a1) angeordnet ist ;
 - eine zweite Ausrichtungsschicht (b2), die auf einer dem ersten Substrat (a1) entgegengesetzten Seite des zweiten Substrats (a2) angeordnet ist ; und
 - eine erste Flüssigkristallschicht (c), die zwischen der ersten Ausrichtungsschicht (b1) und der zweiten Ausrichtungsschicht (b2) angeordnet ist, wobei die erste Flüssigkristallschicht (c) mit einem vorgegebenen Vorkippwinkel versehen ist,
wobei der untere Polarisator (5), der erste optische Kompensationsfilm (6a), das Arraysubstrat (4), die Flüssigkristallschicht (3), das Farbfiltersubstrat (2), der zweite optische Kompensationsfilm (6b) und der obere Polarisator (1) in der LCD-Anzeige entlang der ersten Richtung sequentiell angeordnet sind;
 - wobei die Summe des Vorkippwinkels der ersten Flüssigkristallschicht (c) jedes optischen Kompensationsfilms (6a, 6b) und des Vorkippwinkels der Flüssigkristallschicht (3) der LCD-Anzeige 180° beträgt,
so dass der letztendliche Vorkippwinkel der Flüssigkristallschichten (3, c) der LCD-Anzeige 0° beträgt.
2. LCD-Anzeige nach Anspruch 1, wobei die erste Flüssigkristallschicht (c) positive uniaxiale Flüssigkristalle umfasst.
3. LCD-Anzeige nach Anspruch 1, wobei der vorgegebene Vorkippwinkel 2° beträgt.
4. LCD-Anzeige nach Anspruch 1, wobei der untere Polarisator (5) und der obere Polarisator (1) jeweils

mit dem optischen Kompensationsfilm versehen sind.

5. Anzeigevorrichtung, umfassend die LCD-Anzeige nach Anspruch 1.

Revendications

1. Panneau d'affichage à cristaux liquides, comprenant un polariseur inférieur (5), un substrat de réseau (4), une couche de cristaux liquides (3), un substrat de filtre couleur (2) et un polariseur supérieur (1) disposés séquentiellement selon une première direction perpendiculaire au panneau d'affichage à cristaux liquides, et des films de compensation optique ; dans lequel les films de compensation optique comprennent un premier film de compensation optique (6a) et un second film de compensation optique (6b), dans lequel le premier film de compensation optique (6a) et le second film de compensation optique (6b) comprennent chacun :
 - un premier substrat (a1) ;
 - un second substrat (a2) disposé en regard du premier substrat (a1) ;
 - une première couche d'alignement (b1) disposée au niveau d'un côté du premier substrat (a1) opposé au second substrat (a2) ;
 - une seconde couche d'alignement (b2) disposée au niveau d'un côté du second substrat (a2) opposé au premier substrat (a1) ; et
 - une première couche de cristaux liquides (c) disposée entre la première couche d'alignement (b1) et la seconde couche d'alignement (b2), dans lequel la première couche de cristaux liquides (c) présente un angle de pré-inclinaison prédéterminé, dans lequel le polariseur inférieur (5), le premier film de compensation optique (6a), le substrat de réseau (4), la couche de cristaux liquides (3), le substrat de filtre couleur (2), le second film de compensation optique (6b) et le polariseur supérieur (1) dans le panneau d'affichage à cristaux liquides sont disposés séquentiellement selon la première direction ;
 - dans lequel la somme de l'angle de pré-inclinaison de la première couche de cristaux liquides (c) de chaque film de compensation optique (6a, 6b) et de l'angle de pré-inclinaison de la couche de cristaux liquides (3) du panneau d'affichage à cristaux liquides est de 180°, de sorte que l'angle de pré-inclinaison final des couches de cristaux liquides (3c) de l'afficheur à cristaux liquides soit de 0°.
2. Panneau d'affichage à cristaux liquides selon la revendication 1, dans lequel la première couche de

cristaux liquides (c) comprend des cristaux liquides uniaxes positifs.

3. Panneau d'affichage à cristaux liquides selon la revendication 1, dans lequel l'angle de pré-inclinaison prédéterminé est de 2°.
4. Panneau d'affichage à cristaux liquides selon la revendication 1, dans lequel le polariseur inférieur (5) et le polariseur supérieur (1) sont chacun munis du film de compensation optique.
5. Dispositif d'affichage, comprenant le panneau d'affichage à cristaux liquides selon la revendication 1.

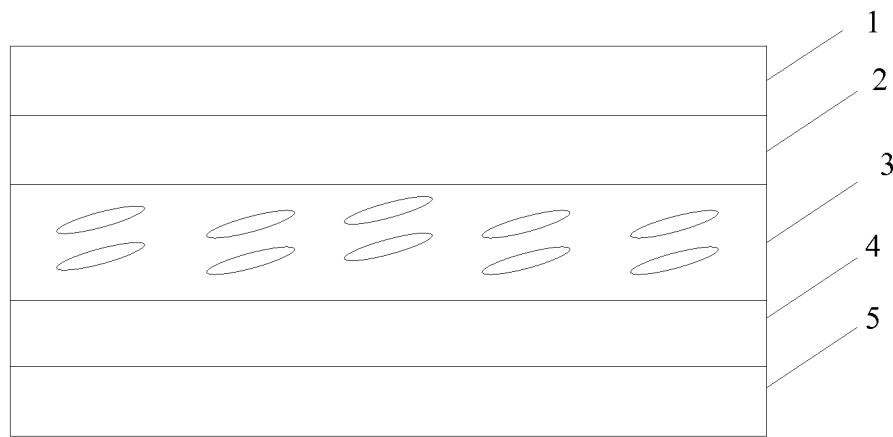


Fig. 1

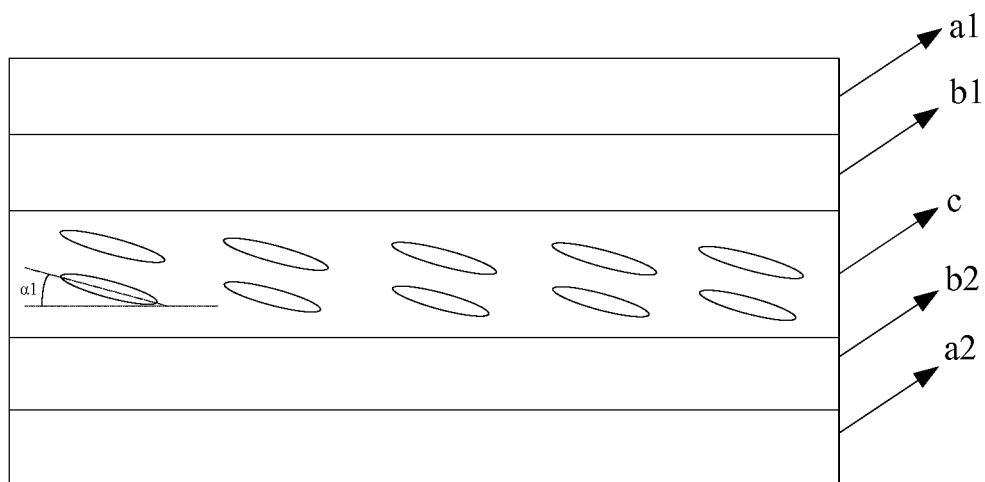


Fig. 2

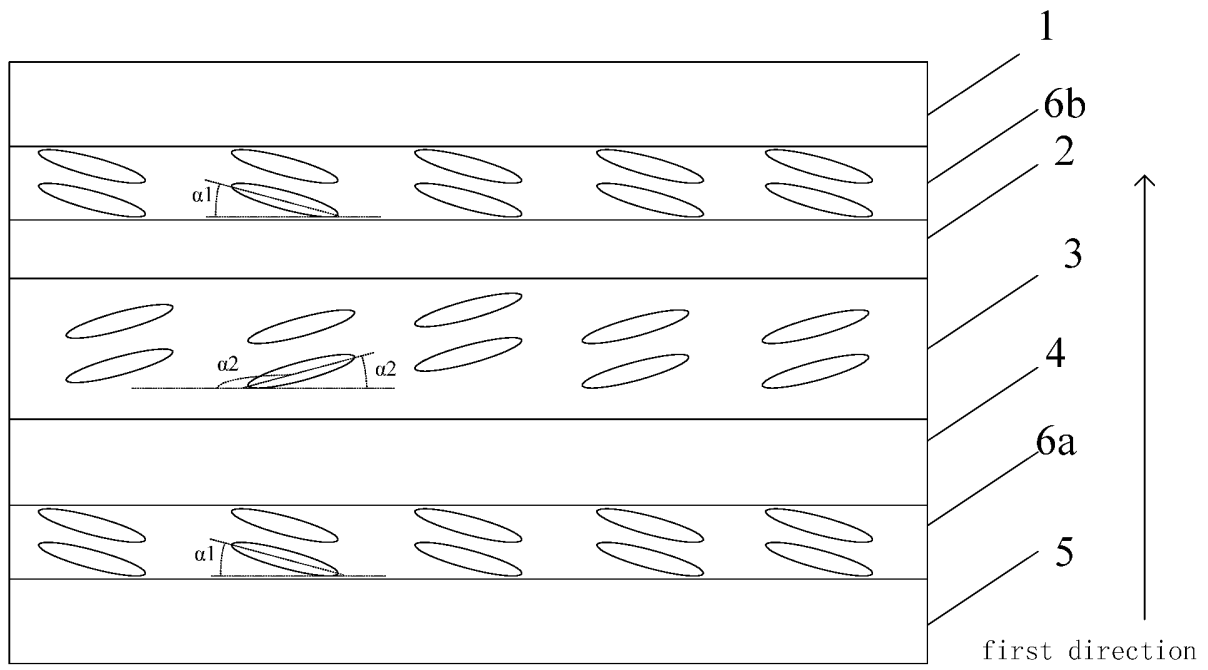


Fig. 3

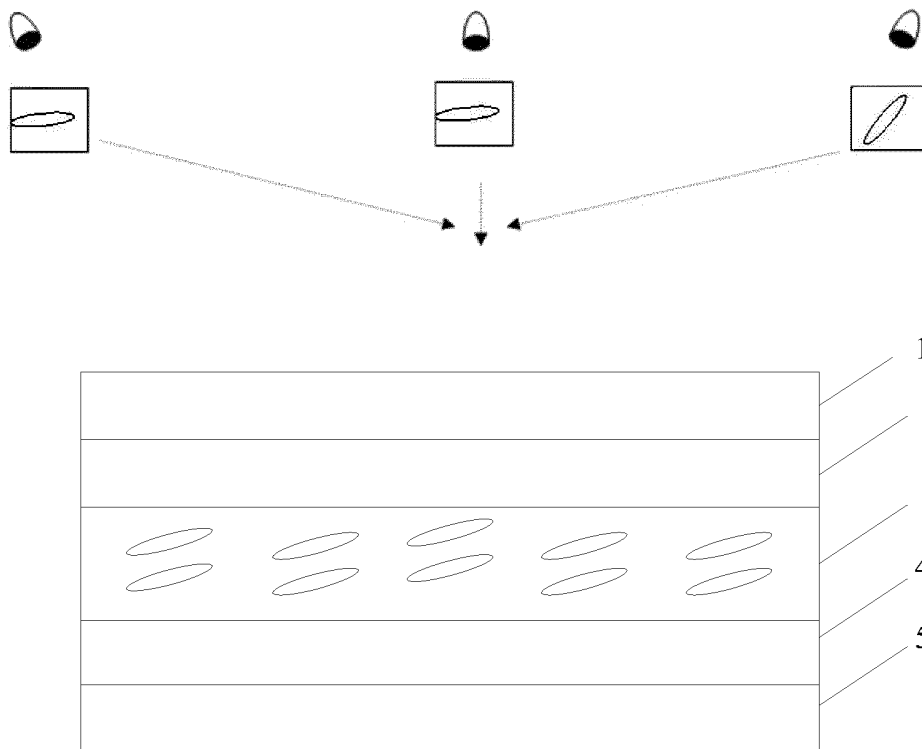


Fig. 4

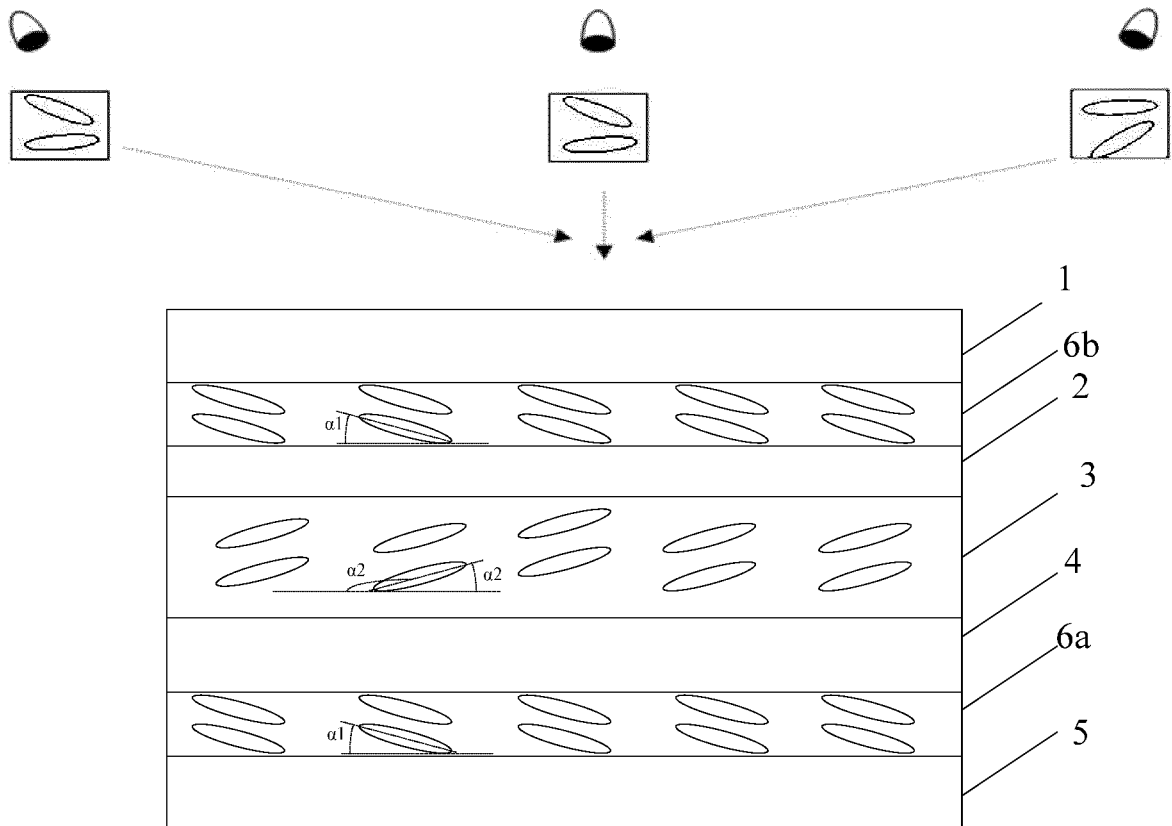


Fig. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20120002140 A1 [0005]

专利名称(译)	光学补偿膜及其制造方法，偏振器，液晶显示面板和显示装置		
公开(公告)号	EP3214489B1	公开(公告)日	2020-05-06
申请号	EP2015837075	申请日	2015-10-30
[标]申请(专利权)人(译)	京东方科技集团股份有限公司 北京京东方显示技术有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司. 北京京东方显示技术有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司. 北京京东方显示技术有限公司.		
[标]发明人	WANG YONGCAN ZHAN HONGMING LIN LIFENG		
发明人	WANG, YONGCAN ZHAN, HONGMING LIN, LIFENG		
IPC分类号	G02F1/1335 G02F1/1347 G02F1/1337		
CPC分类号	G02F1/133528 G02F1/133636 G02F1/1337 G02F2001/133746 G02B5/3016 G02B5/3083 G02F1/13363 G02F1/1347 G02F2001/133633 G02F2001/133749 G02F2001/134372 G02F2413/02 G02B5/3025 G02F1/1335		
代理机构(译)	LAVOIX		
优先权	201410602634.4 2014-10-31 CN		
其他公开文献	EP3214489A1 EP3214489A4		
外部链接	Espacenet		

摘要(译)

本发明涉及显示技术领域，提供一种光学补偿膜及其制造方法，偏振片，液晶显示面板和显示装置。光学补偿膜包括第一基板，与第一基板相对的第二基板，在第一基板的与第二基板相对的一侧的第一取向层，在第二基板的相对一侧的第二取向层。第一液晶层设置在第一取向层和第二取向层之间，其中第一液晶层具有预定的预倾角。



Fig. 1

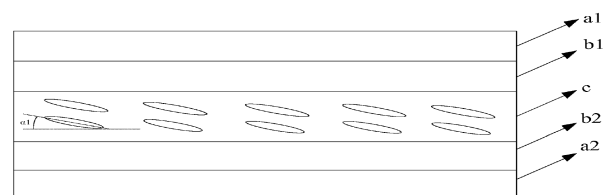


Fig. 2