



US007952555B2

(12) **United States Patent**
Sakai

(10) **Patent No.:** **US 7,952,555 B2**
(b4) **Date of Patent:** **May 31, 2011**

(54) **LUMINANCE CONTROL METHOD, LIQUID CRYSTAL DISPLAY DEVICE AND COMPUTER PROGRAM**

(75) Inventor: **Yoshikazu Sakai**, Hakusan (JP)

(73) Assignee: **Eizo Nanao Corporation**, Ishikawa (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1165 days.

(21) Appl. No.: **10/579,740**

(22) PCT Filed: **Nov. 12, 2004**

(86) PCT No.: **PCT/JP2004/017102**

§ 371 (c)(1),
(2), (4) Date: **May 18, 2006**

(87) PCT Pub. No.: **WO2005/050614**

PCT Pub. Date: **Jun. 2, 2005**

(65) **Prior Publication Data**

US 2007/0152949 A1 Jul. 5, 2007

(30) **Foreign Application Priority Data**

Nov. 19, 2003 (JP) 2003-389900

(51) **Int. Cl.**

G09G 3/36 (2006.01)
G09G 5/10 (2006.01)
G06F 3/038 (2006.01)

(52) **U.S. Cl.** **345/102; 345/207; 345/690**

(58) **Field of Classification Search** **345/102, 345/690, 207**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,406,305 A *	4/1995	Shimomura et al.	345/102
5,786,801 A *	7/1998	Ichise	345/102
6,188,380 B1 *	2/2001	Kawashima et al.	345/102
6,297,791 B1	10/2001	Naito et al.	
6,762,741 B2 *	7/2004	Weindorf	345/102
2001/0008395 A1 *	7/2001	Yamamoto et al.	345/102
2002/0036646 A1	3/2002	Tobiya	
2003/0174262 A1	9/2003	Sugawara et al.	
2003/0231158 A1 *	12/2003	Someya et al.	345/101
2003/0231161 A1 *	12/2003	Yamaguchi	345/102

FOREIGN PATENT DOCUMENTS

EP 0 861 017 A2 8/1998

(Continued)

OTHER PUBLICATIONS

Noriyuki Hashimoto, Japanese Journal of Radiological Technology, 2002, 1297-1302, 58-10.

Primary Examiner — Bipin Shalwala


Assistant Examiner — Benyam Ketema

(74) *Attorney, Agent, or Firm* — Birch, Stewart, Kolasch & Birch, LLP

(57) **ABSTRACT**

A luminance detected by a built-in photosensor and a luminance of light emitted from a backlight through a liquid crystal panel are measured in a plurality of states where the backlight has a different luminance, and are preliminarily stored in a storage unit. Moreover, a luminance of light emitted through the liquid crystal panel in each input level when the maximum luminance of light emitted through the liquid crystal panel is a predetermined value is measured and is preliminarily stored in the storage unit. The maximum luminance of light emitted through the liquid crystal panel is then accepted, the luminance of the backlight is controlled, the luminance in each input level and an ideal luminance in each gray level are calculated, and an input level which gives a luminance substantially equal to the ideal luminance in each gray level is obtained to update an LUT.

11 Claims, 20 Drawing Sheets

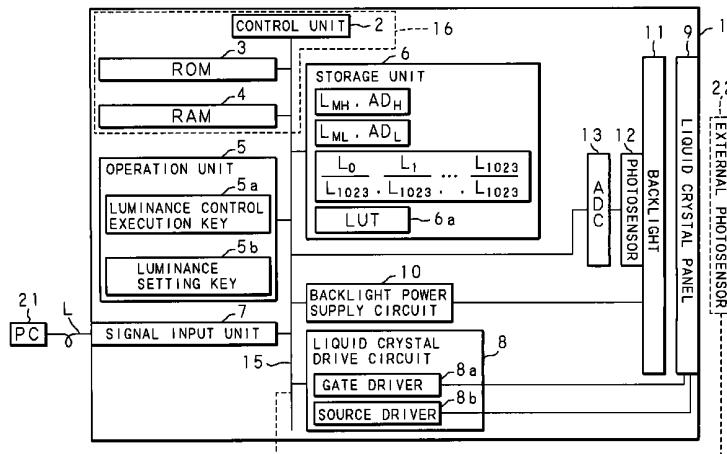

US 7,952,555 B2

Page 2

FOREIGN PATENT DOCUMENTS

EP	0 883 103 A1	12/1998	JP	2000-315594 A	11/2000
JP	5-8900 U	2/1997	JP	2002-99238 A	4/2002
JP	9-43569 A	2/1997	JP	2002-162937 A	6/2002
JP	10-222129 A	8/1998	* cited by examiner		

FIG. 1

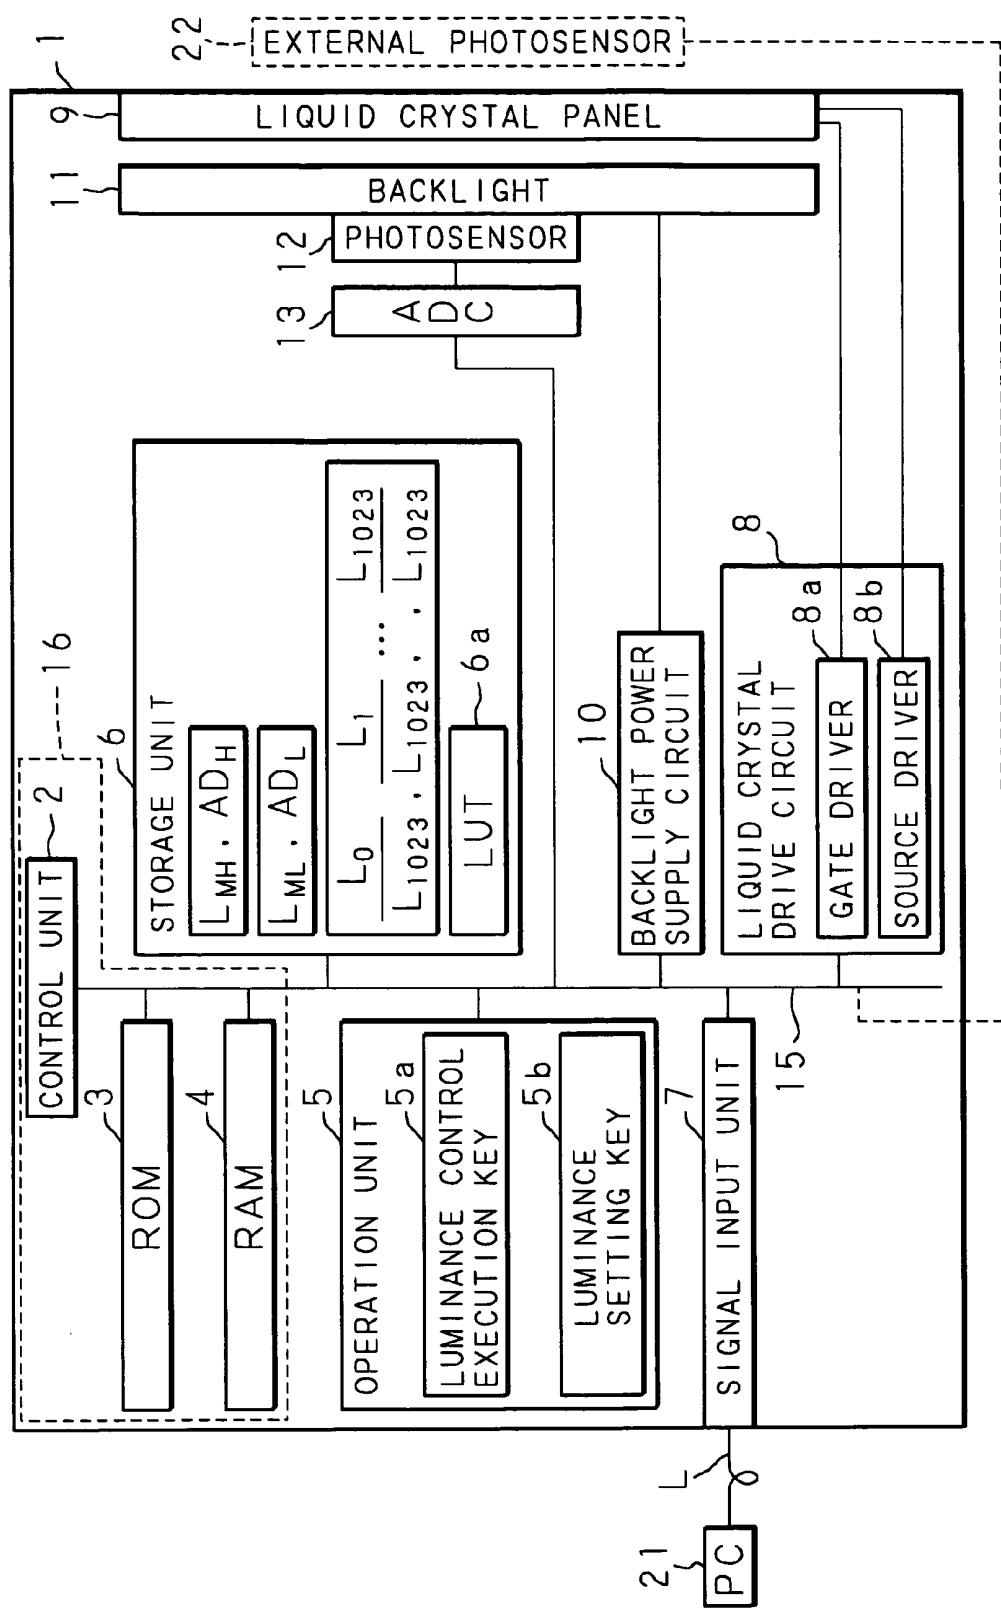


FIG. 2

INPUT LEVEL (-)	OUTPUT VOLTAGE (V)
0000000000 (0)	V_0
0000000001 (1)	V_1
0000000010 (2)	V_2
\vdots	\vdots
11111111111 (1023)	V_{1023}

FIG. 3

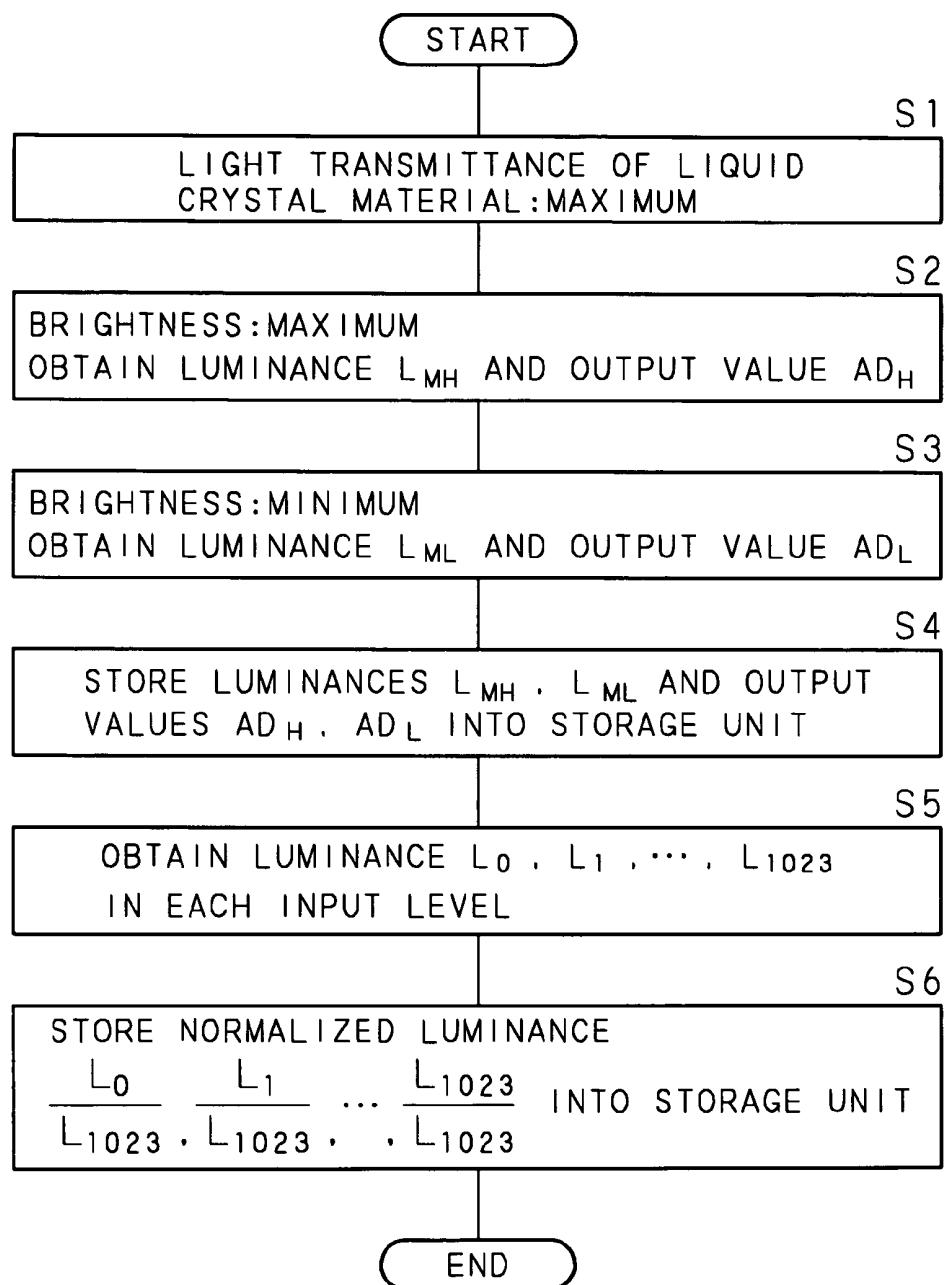


FIG. 4

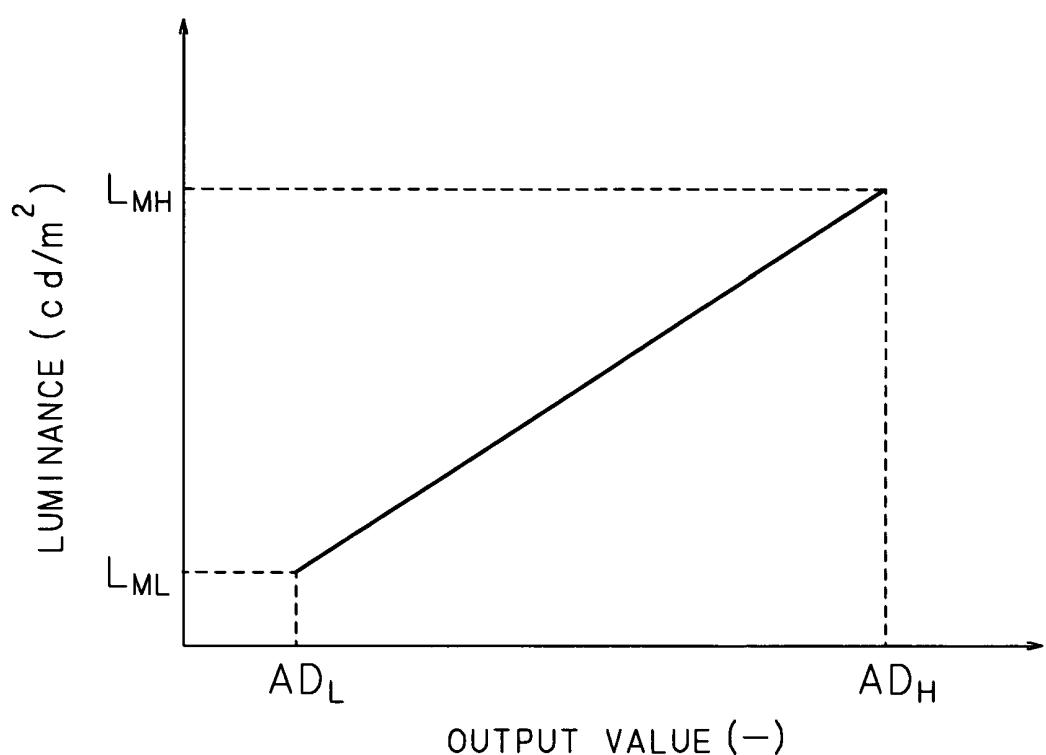


FIG. 5

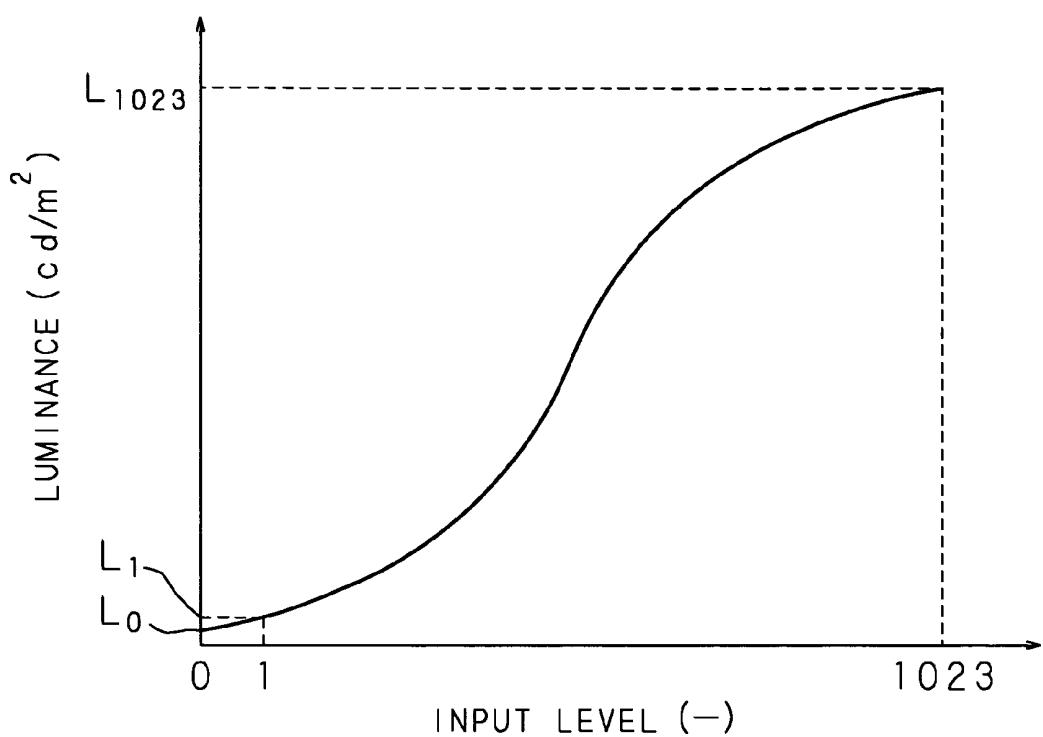


FIG. 6

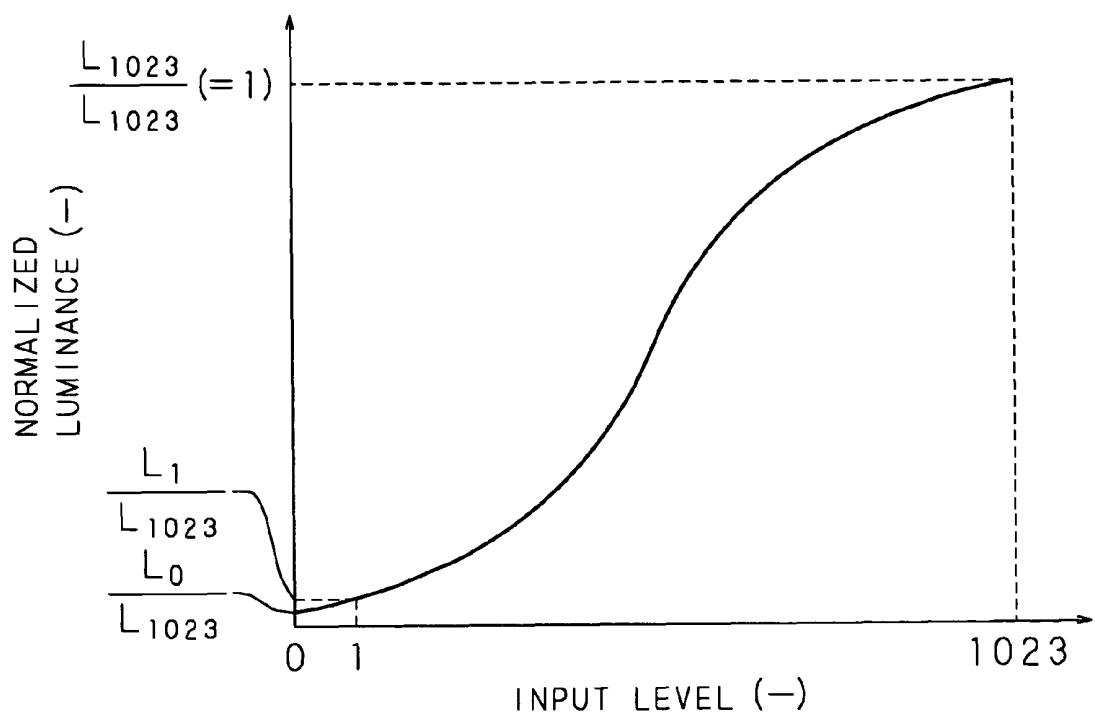


FIG. 7

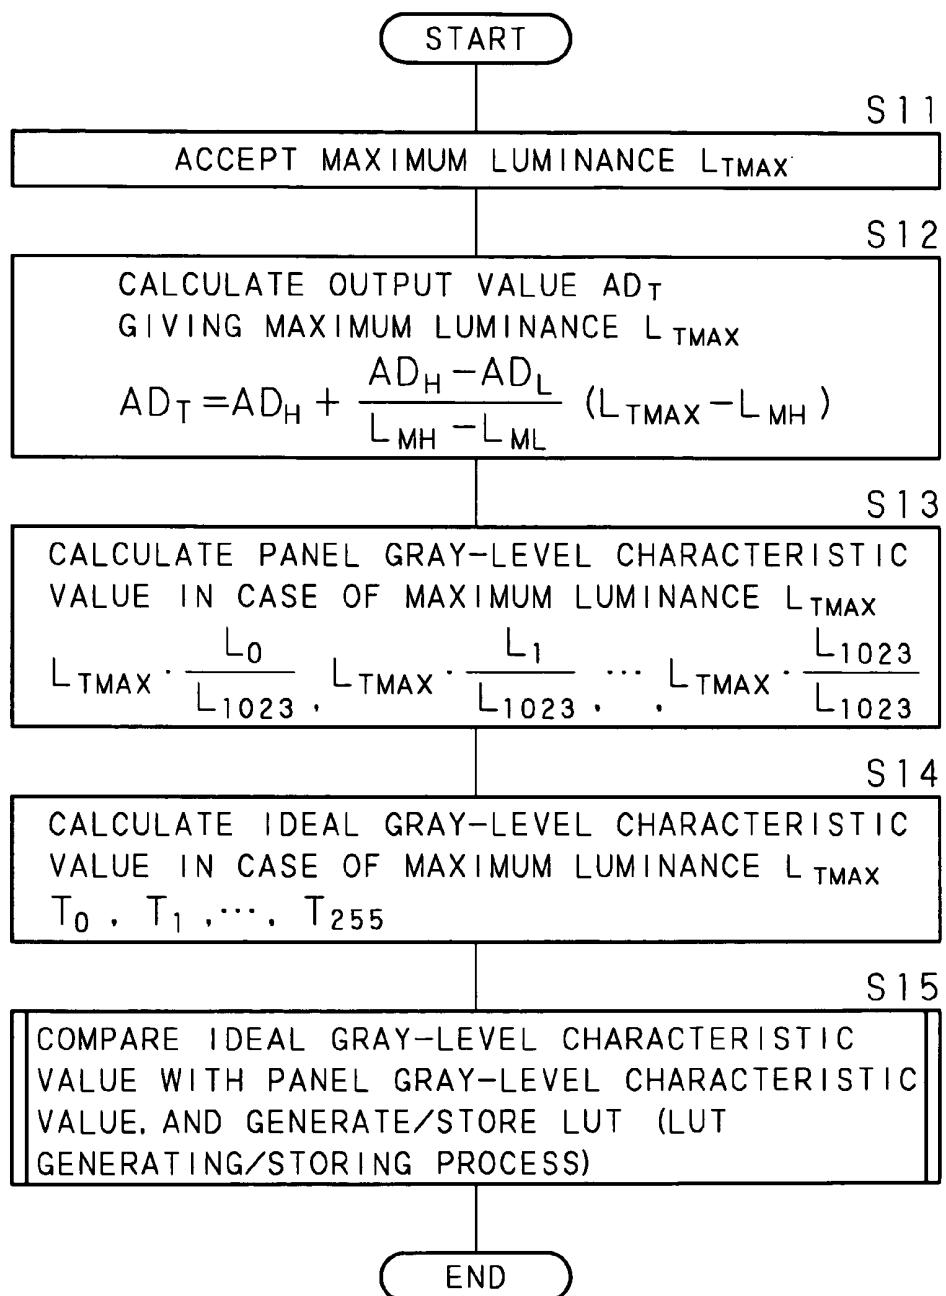


FIG. 8

LUMINANCE LEVEL(—)	MAXIMUM LUMINANCE L_{TMAX} (cd/m ²)
1	600
2	500
3	400
⋮	⋮

FIG. 9

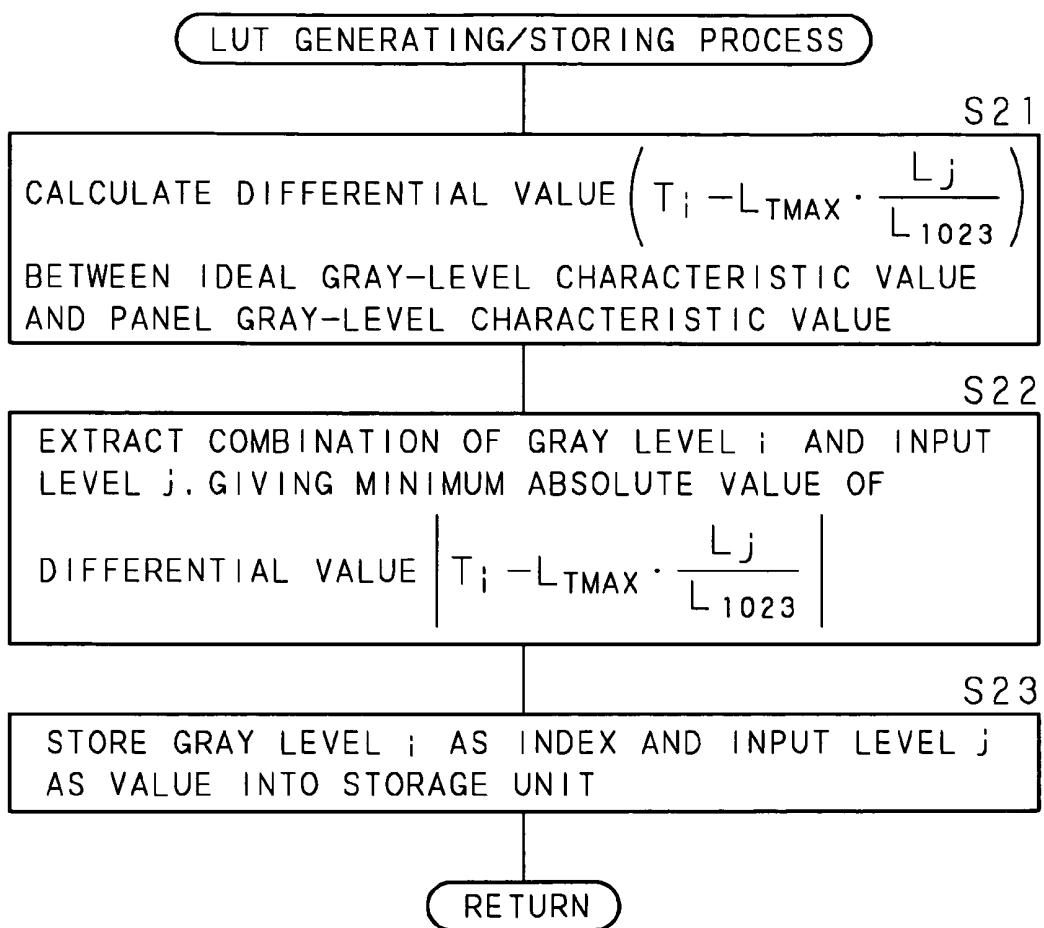


FIG. 10

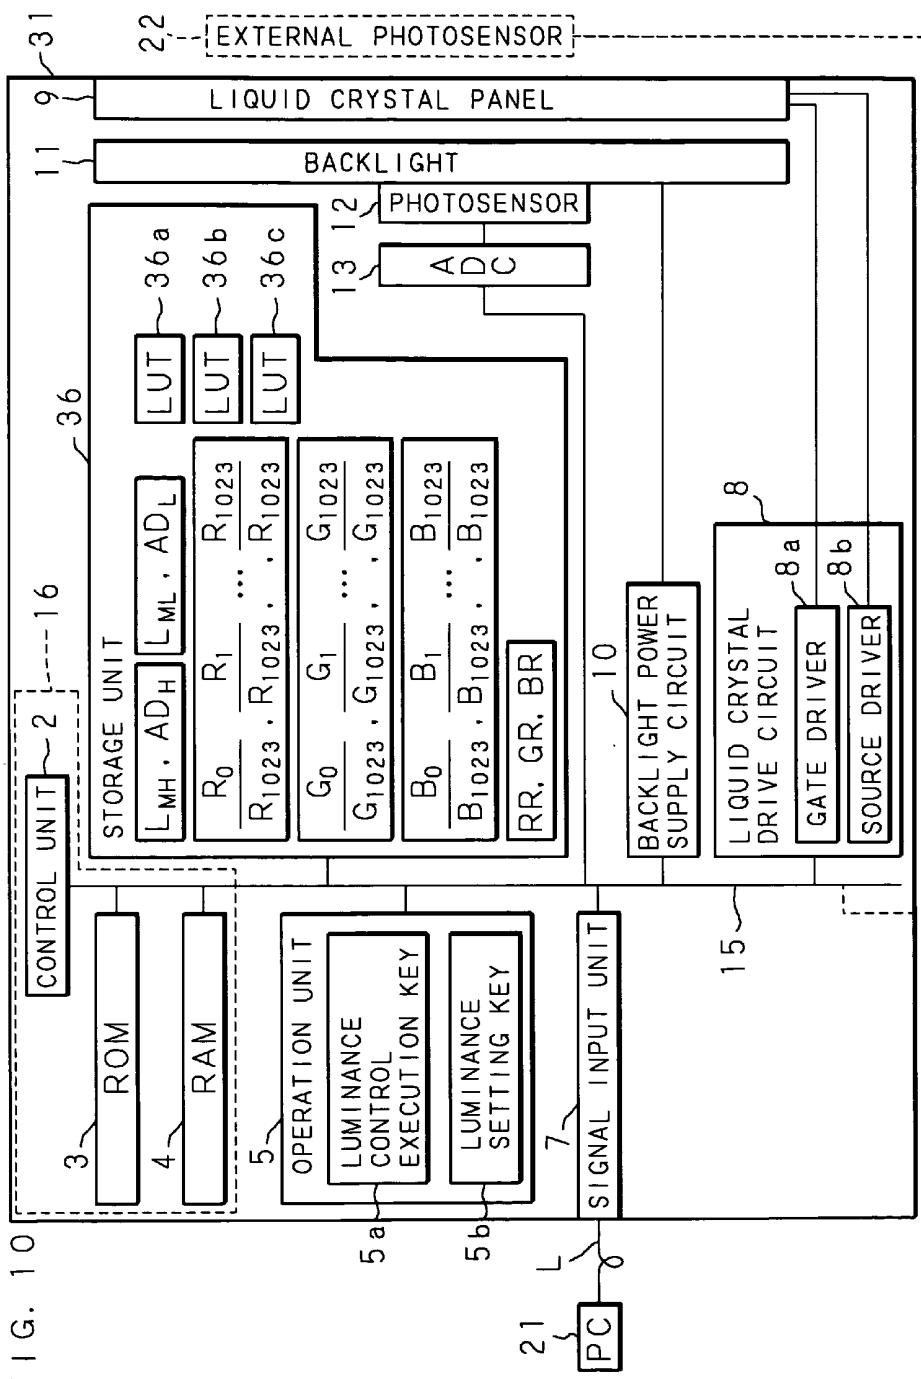


FIG. 11

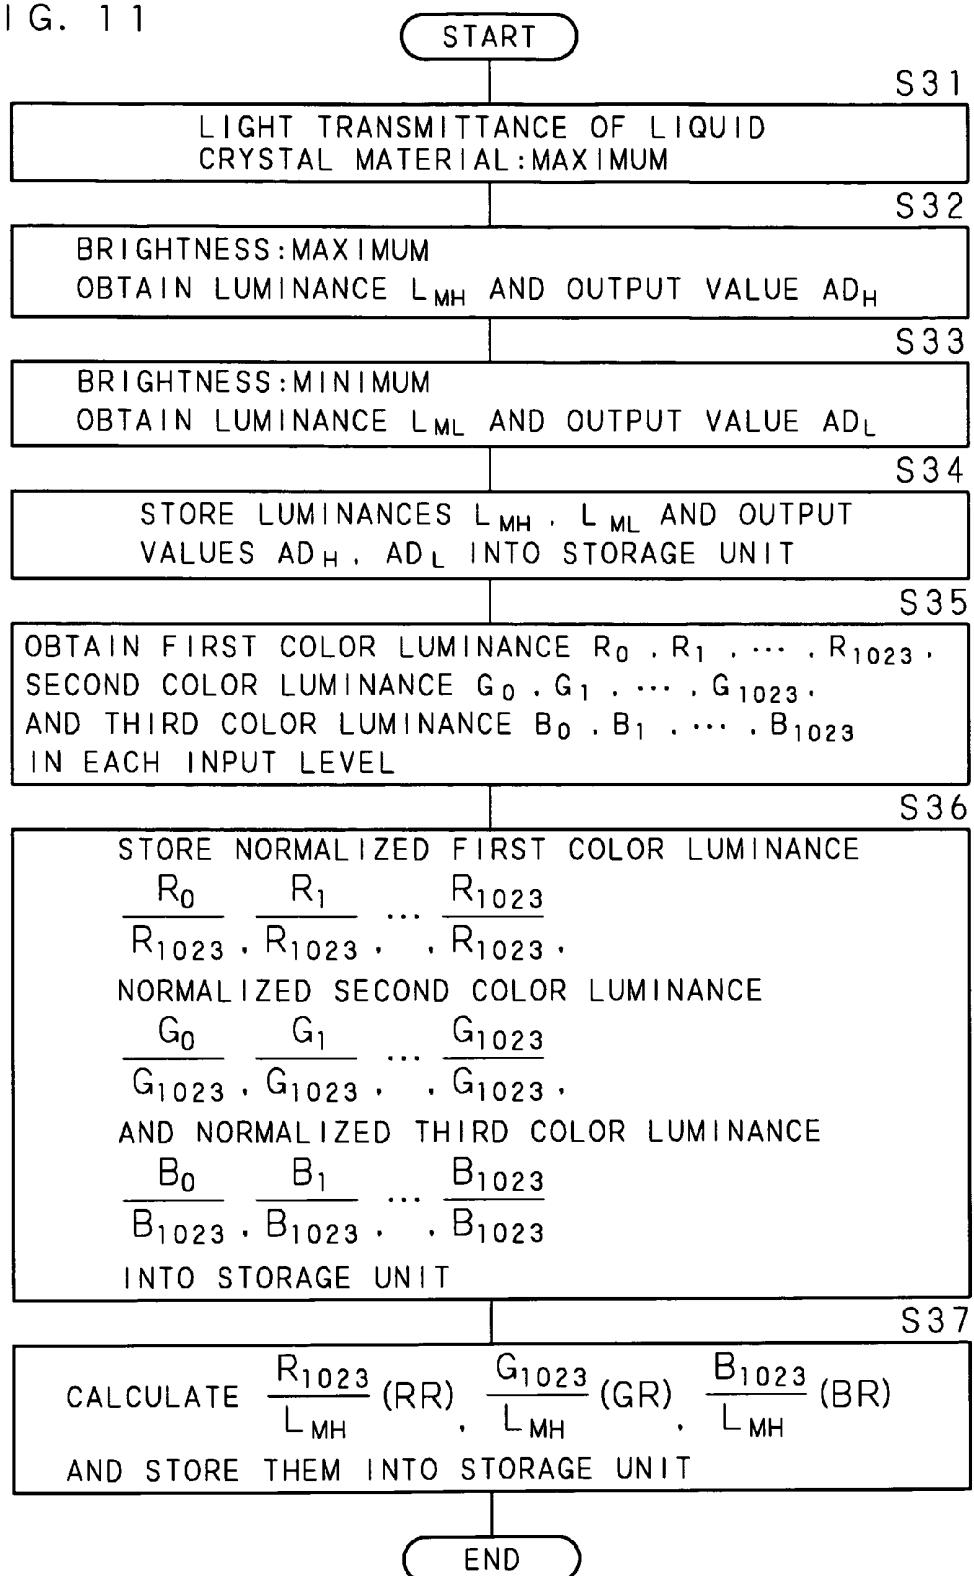


FIG. 12

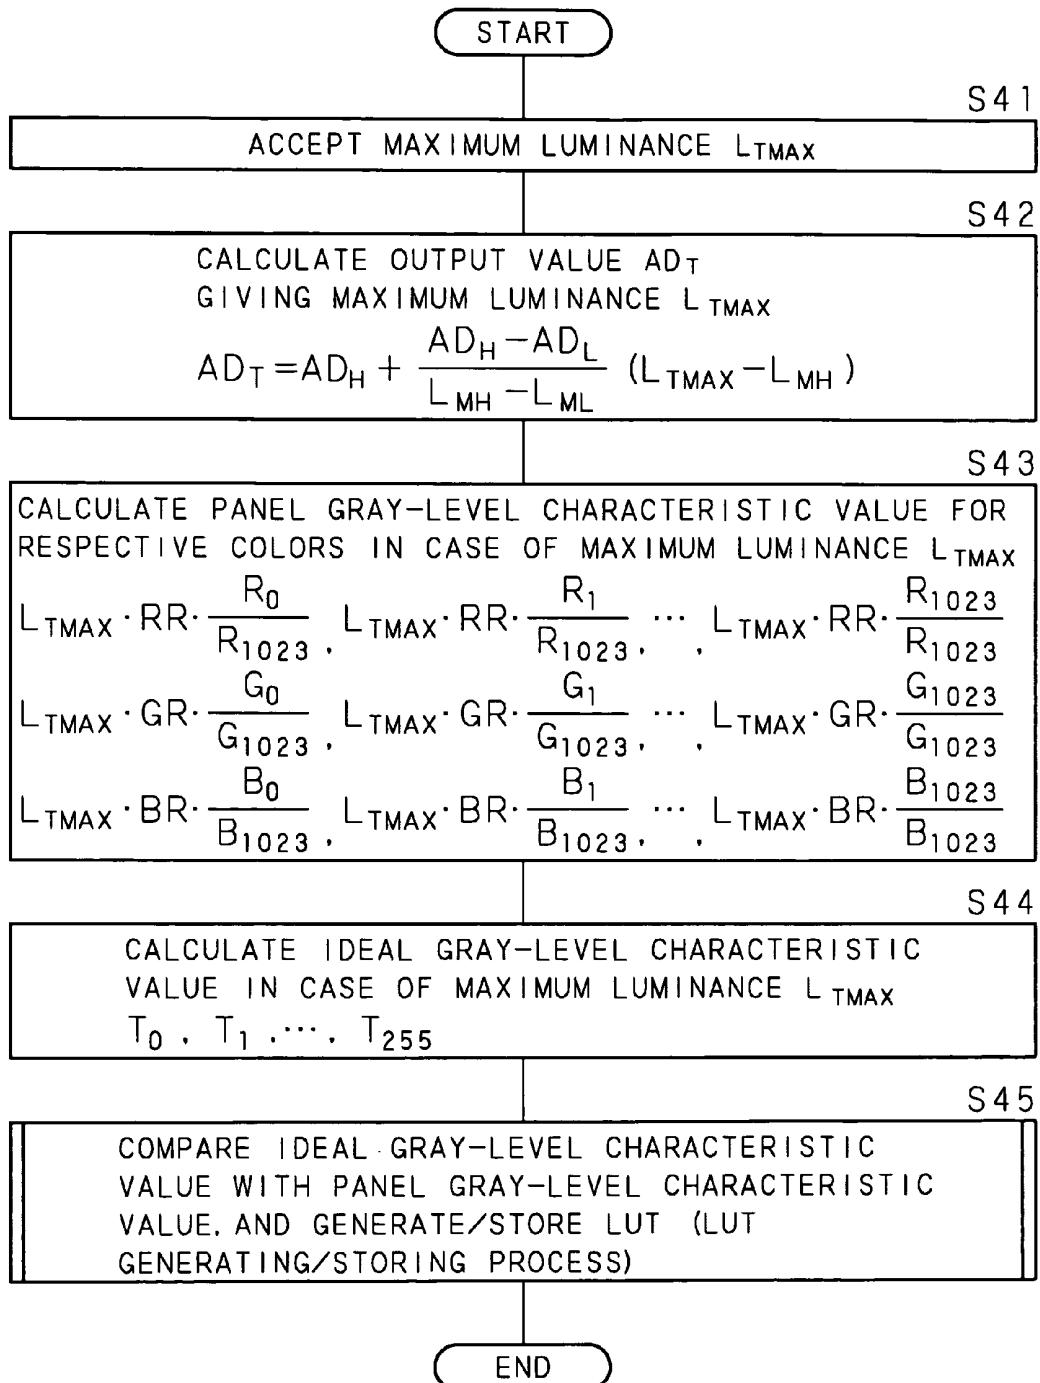


FIG. 13

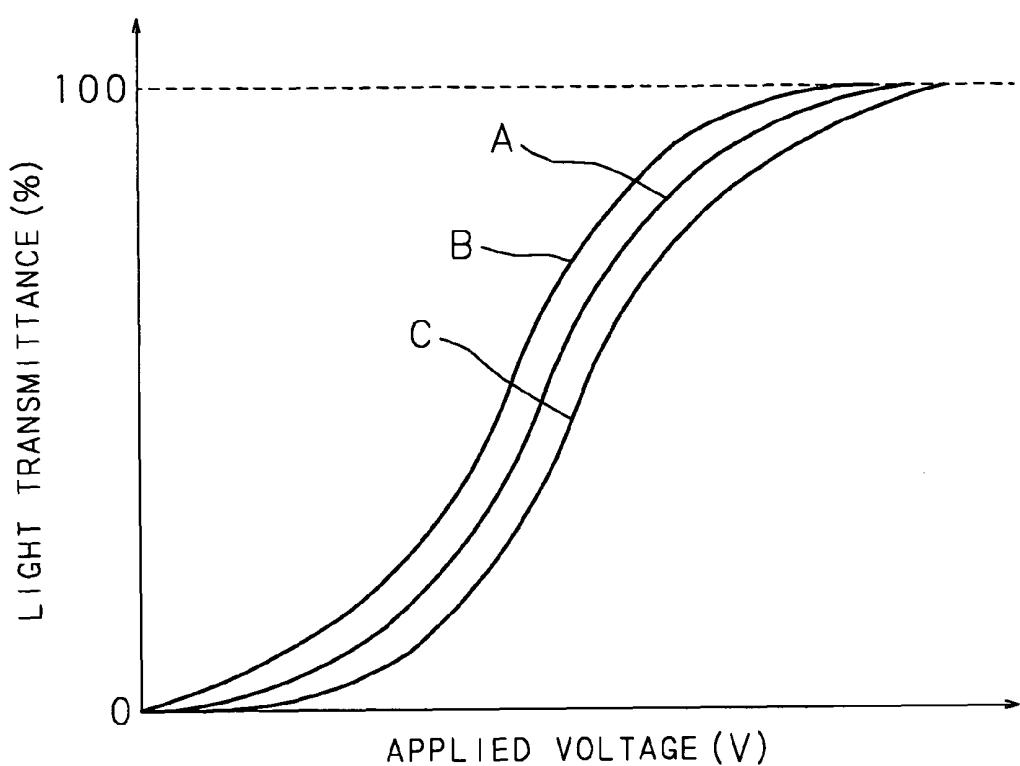


FIG. 14

GRAY LEVEL (INDEX)	INPUT LEVEL (VALUE)
00000000 (0)	0000000000 (0)
00000001 (1)	0000000101 (5)
00000010 (2)	0000001000 (8)
00000011 (3)	0000001001 (9)
⋮	⋮
11111111 (255)	1111111111 (1023)

FIG. 15

(a) DATA BEFORE CONVERSION

(b) DATA AFTER CONVERSION

0	1	2	1
0	2	3	2
0	1	1	1
1	1	0	0

→

0	5	8	5
0	8	9	8
0	5	5	5
5	5	0	0

FIG. 16

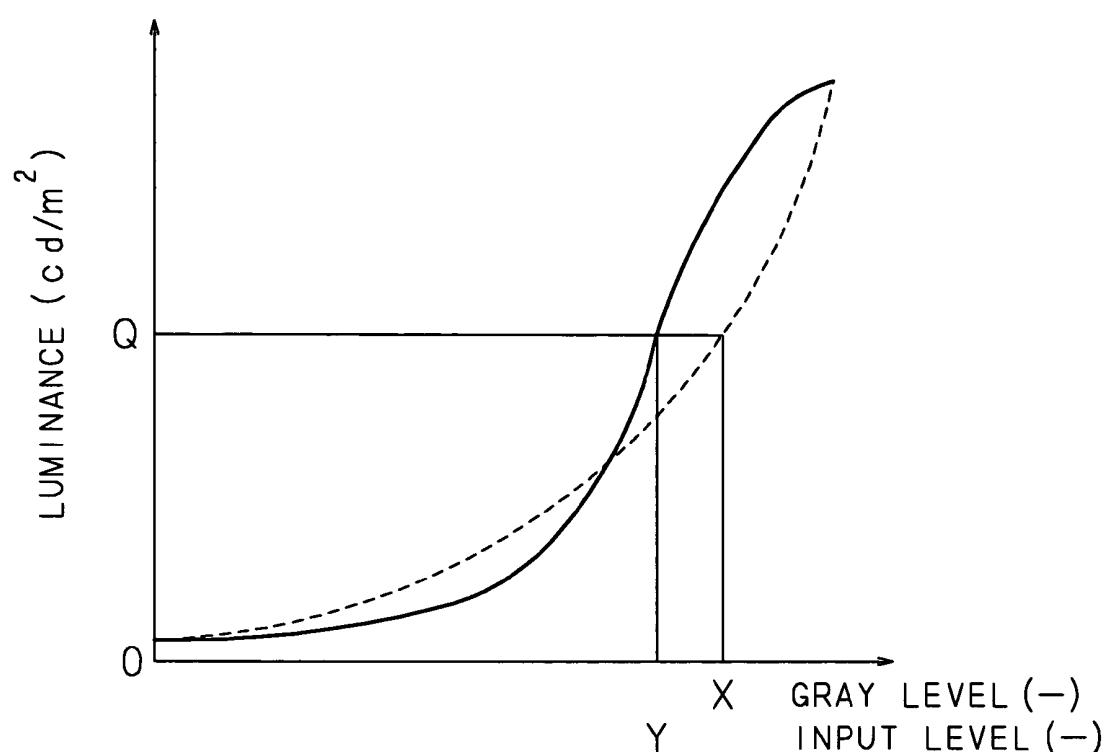


FIG. 17

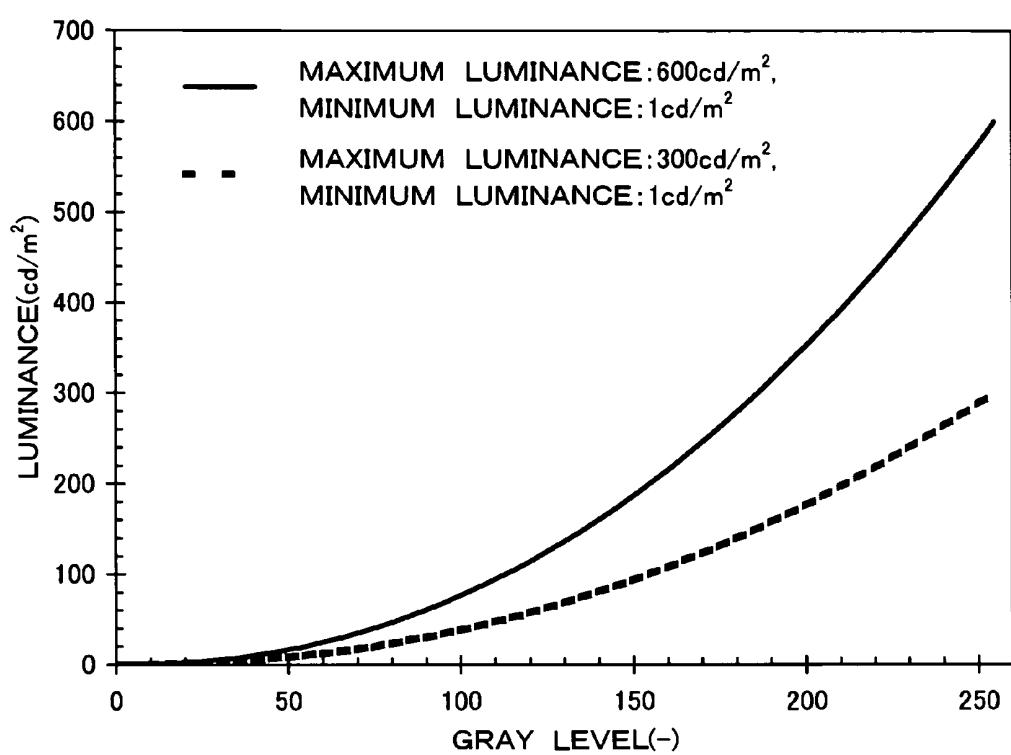


FIG. 18

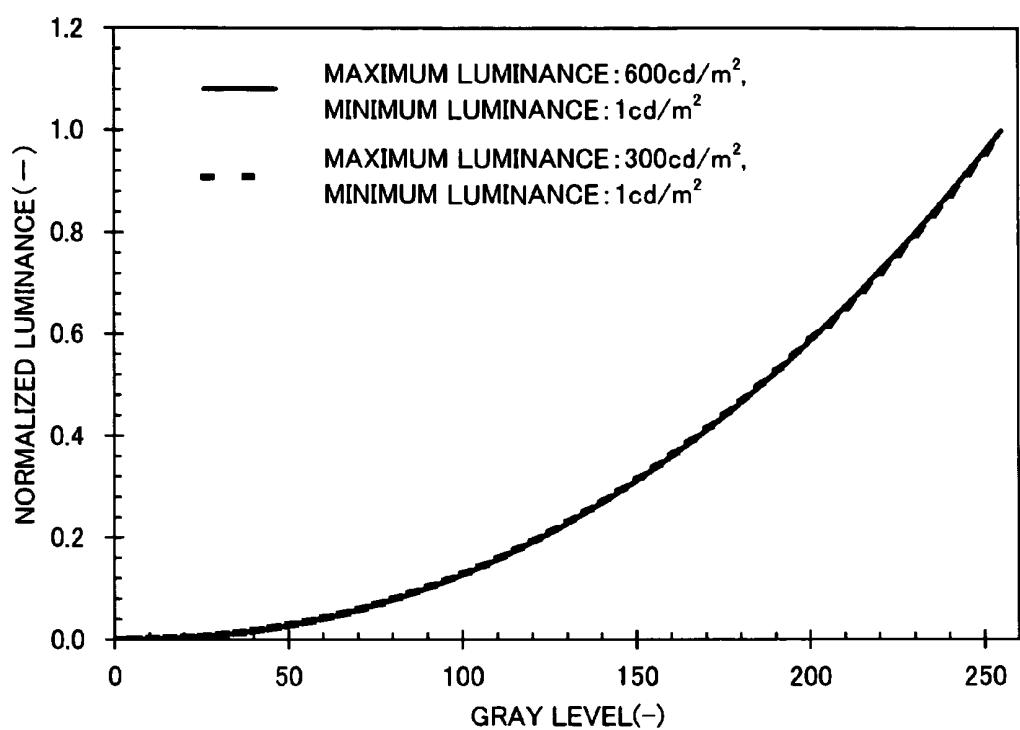


FIG. 19


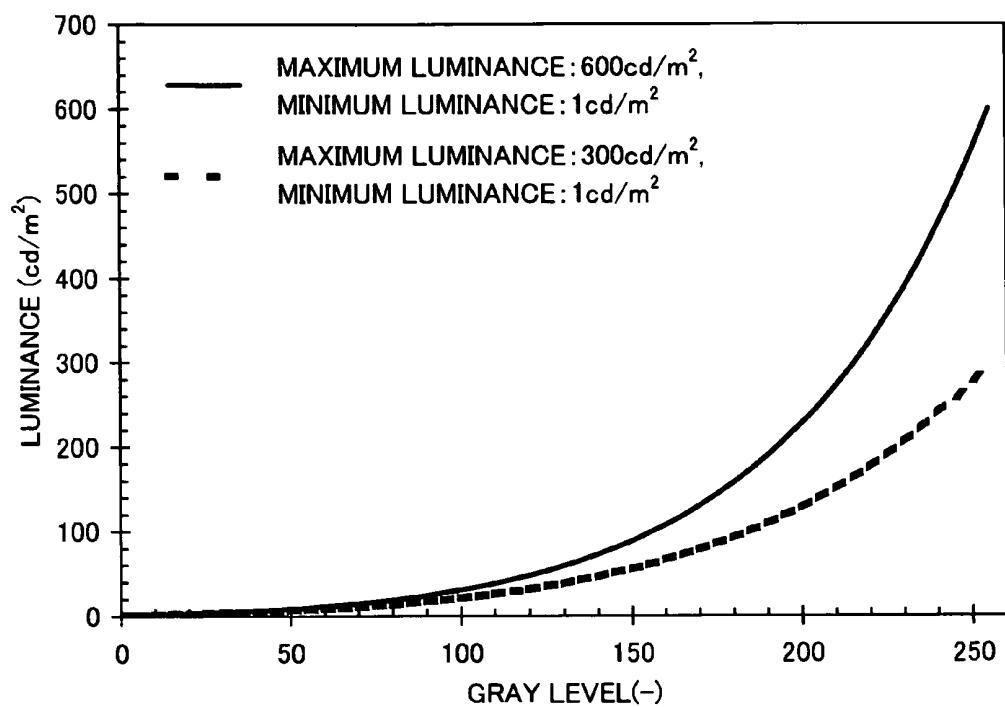


FIG. 20

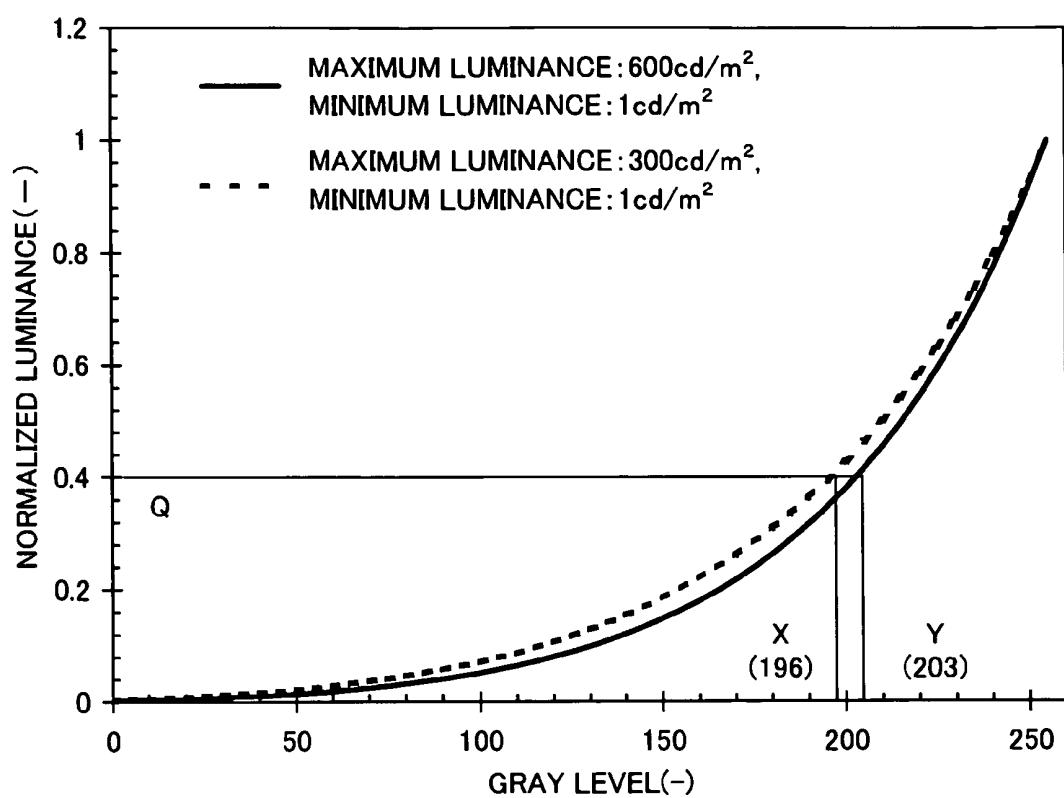

LUMINANCE CONTROL METHOD, LIQUID CRYSTAL DISPLAY DEVICE AND COMPUTER PROGRAM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is the national phase under 35 U.S.C. §371 of PCT International Application No. PCT/JP2004/17102 which has an International filing date of Nov. 17, 2004, which designated the United States of America.

TECHNICAL FIELD

The present invention relates to: a luminance control method for a liquid crystal display device comprising a liquid crystal panel and a backlight disposed at the back of the liquid crystal panel; a liquid crystal display device to which the luminance control method is applied; and a computer program for realizing the luminance control method with a computer.

BACKGROUND ART

A liquid crystal display device displays an image by controlling On/Off of each pixel in a liquid crystal panel on the basis of a video signal inputted from a personal computer (which will be hereinafter referred to as a PC) or the like and by applying to each pixel a data voltage according to the video signal with a built-in gate driver and a built-in source driver so as to control light transmittance determined by an electrooptical characteristic of a liquid crystal material.

The electrooptical characteristic of a liquid crystal material is determined by the distance between facing substrates, i.e. a liquid crystal gap, as well as the characteristics of the liquid crystal material itself (e.g. birefringent index). More specifically, in a case of a TN (Twisted Nematic) liquid crystal, for example, the transmission intensity I is determined by a per se known expression (1) using a parameter of a product of the birefringent index Δn and the liquid crystal gap d of the TN liquid crystal, i.e. the retardation $\Delta n \cdot d$. It should be noted that the liquid crystal gap d is generally designed to be the first local minimum point $((2 \cdot \Delta n \cdot d)/\lambda = \sqrt{3})$, λ : wavelength) of the expression (1).

$$I = I_0 \frac{\sin^2 \left(\frac{\pi}{2} \sqrt{1 + \left(\frac{2 \cdot \Delta n \cdot d}{\lambda} \right)^2} \right)}{1 + \left(\frac{2 \cdot \Delta n \cdot d}{\lambda} \right)^2} \quad \text{expression (1)}$$

FIG. 13 is a graph showing an example of the electrooptical characteristic of a liquid crystal material, wherein the abscissa axis denotes the voltage applied to the liquid crystal material while the ordinate axis denotes the light transmittance of the liquid crystal material. Referring to FIG. 13, a continuous line A denotes a characteristic obtained when the liquid crystal gap d satisfies $d = \lambda \cdot \sqrt{3} / (2 \cdot \Delta n)$, a continuous line B denotes a characteristic obtained when the liquid crystal gap d satisfies $d < \lambda \cdot \sqrt{3} / (2 \cdot \Delta n)$ and a continuous line C denotes a characteristic obtained when the liquid crystal gap d satisfies $d > \lambda \cdot \sqrt{3} / (2 \cdot \Delta n)$, and it is understood that the light transmittance, which is an important quality, changes as the liquid crystal gap d changes, as shown by the above expression (1). Thus, the liquid crystal gap d , which is a parameter for determining the light transmittance of a liquid crystal display

device, might be narrower or wider than a designed value due to a variation in manufacture, causing a problem that a desired light transmittance cannot be obtained and an intended gray-level display cannot be provided.

Known as a solution for this problem is a liquid crystal display device comprising a memory for storing a look-up table (which will be hereinafter referred to as an LUT) in which a gray level represented by the inputted video signal is associated with an input level to a liquid crystal panel corresponding to the gray level, whereby a desired gray-level characteristic can be realized by converting a gray level into an input level on the basis of the LUT and correcting specific characteristics of the device (see, for example, Patent Document 1).

The liquid crystal display device disclosed in the Patent Document 1 measures a luminance in each input level with an external photosensor (luminance meter) provided at the front of the liquid crystal panel and evaluates an actual panel gray-level characteristic of the liquid crystal panel. A gray level and an input level, which are to be written into the LUT, are calculated from the measured panel gray-level characteristic and the desired ideal gray-level characteristic, and stored in the LUT.

FIG. 14 is a concept view showing an example of the content of the LUT. The LUT stores a gray level as an index associated with an input level as a value. It should be noted that shown is an example wherein the number of gray levels is 8 bits (256) and the input level is 10 bits (1024), i.e. 2 bits larger than the number of gray levels. The LUT stores a gray level "0" associated with an input level "0", a gray level "1" associated with an input level "5", a gray level "2" associated with an input level "8", ..., and a gray level "255" associated with an input level "1023". As shown in FIG. 15, the liquid crystal display device converts an inputted gray level (FIG. 15(a)) of each pixel into an input level (FIG. 15(b)) associated with the gray level on the basis of the LUT, and outputs it.

FIG. 16 is an explanatory view showing the concept of luminance control using the LUT. Referring to FIG. 16, the continuous line denotes an actual gray-level characteristic of the liquid crystal panel and the broken line denotes an ideal gray-level characteristic to be set. The liquid crystal display device converts a gray level X represented by the inputted video signal into an input level Y to the liquid crystal panel on the basis of the LUT to obtain a luminance Q , which gives an ideal gray-level characteristic, so as to realize an ideal gray-level characteristic artificially.

[Patent Document 1] Japanese Patent Application Laid-Open No. 2002-99238

DISCLOSURE OF THE INVENTION

Ideal gray-level characteristics are divided into two groups: one changes relatively to the maximum luminance, and the other one does not change relatively to the maximum luminance. A specific example of the former is a gamma characteristic, and a specific example of the latter is the gray-scale display function (which will be hereinafter referred to as the GSDF) compatible with the DICOM (standard for a medical imaging device).

FIG. 17 is a graph showing the gamma characteristic ($\gamma=2.2$), wherein the abscissa axis denotes a gray level and the ordinate axis denotes a luminance. The continuous line denotes a characteristic obtained when the luminance at 255-gray level (maximum luminance) is 600 cd/m^2 and the luminance at 0-gray level (minimum luminance) is 1 cd/m^2 , and the broken line denotes a characteristic obtained when the maximum luminance is 300 cd/m^2 and the minimum lumi-

nance is 1 cd/m². The gamma characteristic is represented by a per se known expression (2). Each characteristic, when normalized by the maximum luminance, has a common characteristic (curve) despite a difference in the maximum luminance as shown in FIG. 18. Accordingly, conversion into a desired gray-scale characteristic can be performed without changing the LUT since the gray level for obtaining the same gray level does not change even when the luminance changes. That is, there is no need to change the LUT when the ideal gray-scale characteristic changes relatively to the maximum luminance.

$$L = (L_{\max} - L_{\min}) \left(\frac{i}{255} \right)^{\gamma} + L_{\min} \quad \text{expression (2)}$$

L: luminance

i: gray level (0, 1, ..., 255)

γ : gamma value

L_{\max} : maximum luminance

L_{\min} : minimum luminance

FIG. 19 is a graph showing the GSDF compatible with the DICOM, wherein the abscissa axis denotes the gray level and the ordinate axis denotes the luminance. The continuous line denotes a characteristic obtained when the maximum luminance is 600 cd/m² and the minimum luminance is 1 cd/m², and the broken line denotes a characteristic obtained when the maximum luminance is 300 cd/m² and the minimum luminance is 1 cd/m². As shown in FIG. 20, each GSDF, when normalized by the maximum luminance, has a different characteristic (curve) according to the maximum luminance, differently from the above gamma characteristic. Since the gray level for obtaining the same gray level changes as the luminance changes, deviation from a desired gray-level characteristic arises unless the LUT is changed. For example, a gray level which gives the same normalized luminance Q (0.4 cd/m²) is a gray level Y (203) when the maximum luminance is 600 cd/m², and is a gray level X (196) when the maximum luminance is 300 cd/m². The gray level thus differs (X ≠ Y). Accordingly, there arises a need to change the LUT when the ideal gray-level characteristic does not change relatively to the maximum luminance.

However, there is a problem that change of the LUT needs measurement of an actual panel gray-level characteristic with an external photosensor every time, since the information to be stored in the LUT is conventionally obtained by measurement with an external photosensor in the production process of the liquid crystal display device. Though it is conceivable to preliminarily measure a panel gray-level characteristic for each possible maximum luminance and store a plurality of LUTs corresponding to the respective maximum luminance to perform correction, there is a problem that a rise in the cost is inevitable in this manner since a required capacity of a storage unit increases and there arises a need to generate and store a plurality of LUTs.

The above problem is caused by the fact that the liquid crystal display device, which is not a selfluminous display device, needs a backlight as a light source and the luminance of the backlight generally changes as the backlight is used. Aspects of the change in the luminance of the backlight include a fact that time (aging time) is required until the luminance is stabilized and a fact that the luminance gradually decreases depending on cumulative operating time.

Though it is said that the luminance of a conventional liquid crystal display device can be controlled, controlled is only the brightness, i.e. the ratio of luminance, so that a user

cannot evaluate the luminance value during control (e.g. brightness 50%) and has to rely on his own sensitivity. That is, the brightness can be controlled only qualitatively, and there is no liquid crystal display device capable of controlling the luminance as desired, although it is desirable to control the luminance quantitatively according to conditions such as user preference, use environment and the type of a screen image to be displayed.

The present invention has been made with the aim of solving the above problems, and it is an object thereof to provide a luminance control method for a liquid crystal display device capable of controlling a luminance of a backlight and setting the luminance quantitatively by uniquely obtaining the relation between the luminance of the backlight and a luminance of light emitted from the backlight through a liquid crystal panel and by uniquely calculating the luminance of light emitted from the backlight through the liquid crystal panel on the basis of the luminance of the backlight.

Another object of the present invention is to provide a luminance control method for a liquid crystal display device capable of realizing a superior gray-level characteristic by obtaining an actual gray-level characteristic of a liquid crystal panel, by calculating a luminance to be set, i.e. a desired ideal gray-level characteristic, and by comparing both the gray-level characteristics to control the luminance.

Still further object of the present invention is to provide a liquid crystal display device to which the luminance control method is applied and a computer program for realizing the luminance control method with a computer.

A luminance control method according to the first aspect of the present invention is a luminance control method for a liquid crystal display device, which comprises a liquid crystal display panel and a backlight disposed at the back of the liquid crystal panel, for controlling an input level of a video signal to be inputted into the liquid crystal panel to control the transmittance of the liquid crystal panel and provide a gray-level display, wherein the liquid crystal display device further comprises luminance detecting means for detecting a luminance of the backlight, and the method comprises the steps of: measuring a luminance of light emitted from the backlight through the liquid crystal panel in a plurality of states where the liquid crystal panel has a predetermined transmittance and the backlight has a different luminance, and preliminarily storing the luminance measured in each state associated with the luminance detected by the luminance detecting means; setting a desired luminance set value of light emitted through the liquid crystal panel in a state where the liquid crystal panel has a predetermined transmittance; calculating a luminance to be detected by the luminance detecting means, which is to be the set luminance set value, on the basis of stored luminance in each state; and controlling the luminance of the backlight so as to be the calculated luminance.

A luminance control method according to the second aspect of the present invention, as set forth in the first aspect, further comprises the steps of: measuring a luminance of light emitted through the liquid crystal panel in each input level, and preliminarily storing the measured luminance associated with an input level which gives the luminance; calculating a luminance of light emitted through the liquid crystal panel in each input level and a luminance to be set in each gray level in a case of the luminance set value on the basis of the stored luminance and input level; extracting an input level which gives a luminance substantially equal to the luminance to be set in each gray level on the basis of the luminance in each calculated input level and the luminance to be set in each gray level, and storing the extracted input level associated with a

gray level; and controlling the transmittance of the liquid crystal panel in a gray level associated with the input level of the video signal.

A luminance control method according to the third aspect of the present invention, as set forth in the first aspect, further comprises the steps of: measuring a luminance of light emitted through the liquid crystal panel in each input level; normalizing each measured luminance; and preliminarily storing each normalized luminance associated with an input level which gives the luminance; calculating a luminance of light emitted through the liquid crystal panel in each input level and a luminance to be set in each gray level in a case of the luminance set value on the basis of the stored luminance and input level; extracting an input level which gives a luminance substantially equal to the luminance to be set in each gray level on the basis of the luminance in each calculated input level and the luminance to be set in each gray level, and storing the extracted input level associated with a gray level; and controlling the transmittance of the liquid crystal panel in a gray level associated with the input level of the video signal.

In a luminance control method according to the fourth aspect of the present invention, as set forth in any one of the first to the third aspects, the luminance set value is a luminance in a state where the transmittance of the liquid crystal panel is a controllable maximum transmittance.

In a luminance control method according to the fifth aspect of the present invention, as set forth in any one of the first to the fourth aspects, one state of the plurality of states is a state where the backlight has a controllable maximum luminance and another state of the plurality of states is a state where the backlight has a controllable minimum luminance.

A liquid crystal display device according to the sixth aspect of the present invention is a liquid crystal display device, which comprises a liquid crystal panel and a backlight disposed at the back of the liquid crystal panel, for controlling an input level of a video signal to be inputted to the liquid crystal panel to control the transmittance of the liquid crystal panel and provide a gray-level display, further comprising: luminance detecting means for detecting a luminance of the backlight; a storage unit for preliminarily storing information in which the luminance detected by the luminance detecting means in a plurality of states where the liquid crystal panel has a predetermined transmittance and the backlight has a different luminance is associated with a luminance of light emitted from the backlight through the liquid crystal panel; accepting means for accepting a desired luminance set value of light emitted through the liquid crystal panel in a state where the liquid crystal panel has a predetermined transmittance; calculating means for calculating a luminance to be detected by the luminance detecting means, which is to be the luminance set value accepted by the accepting means, on the basis of the information stored in the storage unit; and luminance control means for controlling the luminance of the backlight so as to be the luminance calculated by the calculating means.

In a liquid crystal display device according to the seventh aspect of the present invention, as set forth in the sixth aspect, the storage unit further stores second information on a luminance of light emitted through the liquid crystal panel in each input level, and the device further comprises: second calculating means for calculating a luminance of light emitted through the liquid crystal panel in each input level in a case of the luminance set value accepted by the accepting means on the basis of the second information; third calculating means for calculating a luminance to be set in each gray level in a case of the luminance set value accepted by the accepting means; fourth calculating means for calculating a luminance

difference between the luminance to be set in each gray level calculated by the third calculating means and the luminance in each input level calculated by the second calculating means; storage means for storing an input level, which gives a minimum luminance difference calculated by the fourth calculating means, associated with a gray level; and control means for controlling the transmittance of the liquid crystal panel in a gray level associated with the input level of the video signal.

In a liquid crystal display device according to the eighth aspect of the present invention, as set forth in the sixth or the seventh aspect, the luminance detecting means has: photoelectric conversion means for converting the luminance of the backlight into an analog-type electric signal having a voltage corresponding to the luminance of the backlight; and analog-digital conversion means for converting the converted analog-type electric signal into a digital-type electric signal.

A computer program according to the ninth aspect of the present invention is a computer program for causing a computer to output control information to a liquid crystal display device comprising a liquid crystal panel and a backlight disposed at the back of the liquid crystal panel and causing the computer to control an input level of a video signal to be inputted into the liquid crystal panel to control the transmittance of the liquid crystal panel and provide a gray-level display, comprising the steps of: causing the computer to store in a storage unit a luminance of the backlight, in a plurality of states where the backlight has a different luminance, associated with a luminance of light emitted from the backlight through the liquid crystal panel; causing the computer to set a desired luminance set value of light emitted through the liquid crystal panel; causing the computer to calculate control information for controlling a luminance of the backlight, which is to be the set luminance set value, on the basis of information stored in the storage unit; and causing the computer to output the calculated control information to the liquid crystal display device.

A computer program according to the tenth aspect of the present invention, as set forth in the ninth aspect, further comprises the steps of: causing the computer to store in a storage unit second information on a luminance of light emitted through the liquid crystal panel in each input level; causing the computer to calculate a luminance of light emitted through the liquid crystal panel in each input level in a case of the inputted luminance set value on the basis of the stored second information; causing the computer to calculate a luminance to be set in each gray level in a case of the inputted luminance set value; causing the computer to calculate a luminance difference between the calculated luminance to be set in each gray level and the calculated luminance in each input level; and causing the computer to store in the storage unit an input level, which gives a minimum calculated luminance difference, associated with a gray level.

With the first aspect, the sixth aspect and the ninth aspect, the luminance detected by the luminance detecting means and the luminance of light emitted from the backlight through the liquid crystal panel are measured in each of a plurality of states where the liquid crystal panel has a predetermined transmittance and the backlight has a different luminance, and both the luminances in each state are stored associated with each other. Since the relation between the luminance of the backlight and the luminance of light emitted from the backlight through the liquid crystal panel can be obtained uniquely, the luminance of light emitted from the backlight through the liquid crystal panel can be calculated based on the luminance of the backlight detected by the luminance detecting means. A desired luminance set value of light emitted

through the liquid crystal panel is then set and the luminance of the backlight to be detected by the luminance detecting means in a case of the set luminance set value is calculated to control the luminance of the backlight. Accordingly, the luminance can be controlled so as to be a desired luminance set value, differently from conventional brightness control by which the luminance can be controlled only qualitatively. Moreover, when the luminance detected by the luminance detecting means and the luminance of light emitted from the backlight through the liquid crystal panel in a plurality of states where the backlight has a different luminance are measured in the production process of the liquid crystal display device and both the luminances in each state are preliminary stored associated with each other, there is no need to measure the luminance of light emitted through the liquid crystal panel using an external photosensor after shipment, the burden imposed on the user of the liquid crystal display device is decreased, highly accurate measurement is enabled as a series of processes, and it becomes possible to control the luminance so as to be a desired luminance with a high degree of accuracy. Furthermore, since quantitative luminance setting is enabled, the invention can be utilized as a self-diagnosis function such as notification to the user of the present luminance or notification to the user of a fact that the luminance falls below a predetermined luminance, when it occurs.

With the second aspect, the seventh aspect and the tenth aspect, the luminance of light emitted through the liquid crystal panel in each input level is measured and the measured luminance is stored associated with an input level which gives the luminance. In this manner, an actual gray-level characteristic of the liquid crystal panel can be obtained. The luminance of light emitted through the liquid crystal panel in each input level in a case where the luminance of light emitted through the liquid crystal panel is a luminance set value and the luminance (ideal luminance) to be set in each gray level is then calculated and an input level which gives a luminance substantially equal to the ideal luminance in each gray level is extracted. Since the input level can be set so as to give a luminance substantially equal to the ideal luminance in each gray level, it becomes possible to realize a superior gray-level characteristic.

With the third aspect, the seventh aspect and the tenth aspect, the luminance of light emitted through the liquid crystal panel in each input level is measured, each luminance of each measured input level is divided and normalized by the maximum luminance of the measured luminances, and each normalized luminance is stored associated with an input level which gives the luminance. In this manner, it is possible to obtain an actual gray-level characteristic of the liquid crystal panel. The luminance of light emitted through the liquid crystal panel in each input level in a case where the luminance of light emitted through the liquid crystal panel is the luminance set value and a luminance (ideal luminance) to be set in each gray level is then calculated and an input level which gives a luminance substantially equal to the ideal luminance in each gray level is extracted. Since the input level can be set so as to give a luminance substantially equal to the ideal luminance in each gray level, it is possible to realize a superior gray-level characteristic.

Moreover, regarding the above measurement of the luminance of light emitted through the liquid crystal panel, when the luminance in a predetermined wavelength band and the luminance in a plurality of wavelength bands in the predetermined wavelength band are measured, the input level for each

wavelength band can be set individually so as to give a luminance substantially equal to the ideal luminance in each gray level. Since luminance control can be performed individually even when each wavelength band has a different gray-level characteristic, a superior gray-level characteristic can be realized. For example, by measuring the luminance of a wavelength band corresponding to visible light as the predetermined wavelength band and measuring the luminances of wavelength bands corresponding to the three primary colors as a plurality of wavelength bands, input level can be set individually for the three primary colors so as to give a luminance substantially equal to the ideal luminance in each gray level. Though the wavelength distribution of light emitted from the backlight might change generally due to aged deterioration, a gray-level characteristic having superior color reproducibility and superior white balance can be realized since luminance control can be performed individually for the three primary colors.

With the fourth aspect, by making a luminance in a state where the transmittance of the liquid crystal panel is a controllable maximum transmittance a luminance set value, the maximum luminance of light emitted through the liquid crystal panel can be set quantitatively.

With the fifth aspect, by increasing the luminance difference between a plurality of states of different luminance of the backlight, the relation between the luminance of the backlight and the luminance of light emitted from the backlight through the liquid crystal panel can be obtained with a high degree of accuracy.

With the eighth aspect, conversion of the luminance of the backlight into an analog-type electric signal having a voltage corresponding to the luminance of the backlight is performed by the photoelectric conversion means and the converted analog-type electric signal is converted into a digital-type electric signal by the analog-digital conversion means. Accordingly, the luminance detecting means can be constructed at low cost using general-purpose photoelectric conversion means and analog-digital conversion means.

With the present invention, since the relation between the luminance of the backlight and the luminance of light emitted from the backlight through the liquid crystal panel can be obtained uniquely and the luminance of light emitted from the backlight through the liquid crystal panel can be uniquely calculated based on the luminance of the backlight, the luminance of the backlight can be controlled and the luminance can be set quantitatively.

Moreover, with the present invention, since an actual gray-level characteristic of the liquid crystal panel can be obtained, a gray-level characteristic to be set can be calculated and both the gray-level characteristics are compared to control the luminance, and a superior gray-level characteristic can be realized.

Furthermore, with the present invention, when the luminance of the backlight (luminance detected by the luminance detecting means) and the luminance of light emitted from the backlight through the liquid crystal panel are measured in the production process of the liquid crystal display device, since there is no need to measure the luminance of light emitted through the liquid crystal panel using an external photosensor after shipment, the burden imposed on the user of the liquid crystal display device is decreased, highly accurate measurement is enabled as a series of processes, and it becomes possible to control the luminance so as to be a desired luminance with a high degree of accuracy. Moreover, even when

the gray-level characteristic does not change relatively to a change in the maximum luminance, a desired gray-level characteristic can be realized with a high degree of accuracy without using an external photosensor.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram showing a structure example of a liquid crystal display device according to Embodiment 1 of the present invention;

FIG. 2 is a diagram showing an input-output characteristic of a source driver;

FIG. 3 is a flow chart showing an example of a first process procedure of a luminance control method for a liquid crystal display device according to Embodiment 1 of the present invention;

FIG. 4 is a graph showing a luminance-output value characteristic;

FIG. 5 is a graph showing an actual gray-level characteristic of the liquid crystal panel;

FIG. 6 is a graph showing a normalized gray-scale characteristic of the liquid crystal panel;

FIG. 7 is a flow chart showing an example of a second process procedure of a luminance control method for a liquid crystal display device according to Embodiment 1 of the present invention;

FIG. 8 is a table view composed of a luminance level and the maximum luminance L_{TMAX} ;

FIG. 9 is a flow chart showing an example of an LUT generating/storing process;

FIG. 10 is a block diagram showing a structure example of a liquid crystal display device according to Embodiment 2 of the present invention;

FIG. 11 is a flow chart showing an example of a first process procedure of a luminance control method for a liquid crystal display device according to Embodiment 2 of the present invention; and

FIG. 12 is a flow chart showing an example of a second process procedure of a luminance control method for a liquid crystal display device according to Embodiment 2 of the present invention.

FIG. 13 is a graph showing an example of the electrooptical characteristic of a liquid crystal material;

FIG. 14 is a concept view showing an example of the content of an LUT;

FIG. 15 is an explanatory view showing each pixel level before and after luminance control using the LUT;

FIG. 16 is an explanatory view showing the concept of luminance control using the LUT;

FIG. 17 is a graph showing a gamma characteristic;

FIG. 18 is a graph of a normalized gamma characteristic;

FIG. 19 is a graph showing the GSDF compatible with the DICOM;

FIG. 20 is a graph of a normalized GSDF;

EXPLANATION OF REFERENCE NUMERALS

-continued

8	Liquid crystal drive circuit
9	Liquid crystal panel
10	Backlight power supply circuit
11	Backlight
12	Photosensor
13	ADC
22, 42	External photosensor

DETAILED DESCRIPTION OF THE INVENTION

The following description will explain the present invention in detail with reference to the drawings illustrating some embodiments thereof.

Embodiment 1

FIG. 1 is a block diagram showing a structure example of a liquid crystal display device according to Embodiment 1 of the present invention. The liquid crystal display device 1 according to this embodiment comprises a control unit 2, a ROM 3, a RAM 4, an operation unit 5, a storage unit 6, a signal input unit 7, a liquid crystal drive circuit 8, a liquid crystal panel 9, a backlight power supply circuit 10, a backlight 11, a photosensor 12, and an ADC (A/D converter) 13. The liquid crystal display device 1 has a function of displaying a screen image on a display screen of the liquid crystal panel 9 on the basis of a video signal inputted through the signal input unit 7. Though the video signal might be of an analog type, the following description will explain a digital-type video signal. It should be noted that an external photosensor 22 is a device for measuring the luminance of light emitted through the liquid crystal panel 9, and is additionally used when the following first process procedure is performed.

The control unit 2, which is specifically composed of a CPU connected with each hardware unit mentioned above through a bus 15, controls each hardware unit and performs a variety of software functions according to a control program stored in the ROM 3. The ROM 3 preliminarily stores a variety of software programs necessary for operations of the liquid crystal device as mentioned above. The RAM 4, which is composed of a SRAM, stores temporal data which is generated when the software is executed. It should be noted that the control unit 2, the ROM 3, the RAM 4 and the like may be realized by an electronic circuit 16 such as a microcomputer so as to execute a variety of processes as hardware.

The operation unit 5 comprises various function keys for operating the liquid crystal display device 1. The function keys include a luminance control execution key 5a for setting whether a luminance control process is to be performed or not and a luminance setting key 5b for setting the luminance of the liquid crystal display device. It should be noted that an On Screen Display (OSD) may be displayed on the liquid crystal panel 9 so as to operate various settings of the liquid crystal display device, or the liquid crystal panel 9 may be of a touch panel type so that a part of, or all of, various function keys of the operation unit 5 can be substituted.

The storage unit 6, which is a device rewritable as software, stores: an output value AD_H of the ADC 13 and a luminance L_{MH} of a substantially center part of the display surface of the liquid crystal panel 9 obtained when the brightness is the maximum (100%); an output value AD_L of the ADC 13 and a luminance L_{ML} of a substantially center part of the display surface of the liquid crystal panel obtained when the brightness is the minimum (0%); and luminance L_0/L_{1023} , L_1/L_{1023} , \dots , L_{1023}/L_{1023} which is obtained by normalizing the

1, 31	Liquid crystal display device
2	Control unit
3	ROM
4	RAM
5	Operation unit
6, 36	Storage unit
6a, 36a, 36b, 36c	LUT
7	Signal input unit

luminance $L_0, L_1, \dots, L_{1023}$ of a substantially center part of the display surface obtained when a source driver (mentioned later) outputs an output voltage for each input level (e.g. 10 bit: 0~1023) to the liquid crystal panel. The storage unit **6** further has a function of timely updating and storing an LUT **6a** in which a gray level is associated with an input level to the liquid crystal panel corresponding to the gray level. The content of the LUT **6a** is the same as the conventional LUT illustrated in FIG. 14.

The signal input unit **7**, which is connected to an external PC **21** through a video signal line **L**, receives a video signal outputted from the PC **21**, and the control unit **2** corrects the received video signal on the basis of the LUT **6a** stored in the storage unit **6** and outputs it to the liquid crystal drive circuit **8**. The liquid crystal drive circuit **8**, which is composed chiefly of a gate driver **8a** and a source driver **8b**, drives the liquid crystal panel **9** on the basis of a video signal (corrected signal) inputted from the control unit **2**. In this manner, the control unit **2** can control the transmittance of the liquid crystal panel **9** in a gray level associated with an input level of the video signal outputted from the PC **21**.

Supplied to the source driver **8b**, which has an input-output characteristic shown in FIG. 2, is a reference voltage (when 10 bit: VREF1, VREF2, ..., VREF10), and the source driver **8b** has a function of generating an output voltage according to an input level inputted from the control unit **2** and outputting it in each output stage. That is, the source driver **8b** outputs the output voltage (data voltage) $V_0, V_1, \dots, V_{1023}$ to a source line of the liquid crystal panel according to the inputted input level 0, 1, ..., 1023 in each output stage so as to supply data voltage.

The liquid crystal panel **9** is constructed by disposing a pair of glass substrates opposite to each other and forming a liquid crystal layer made of liquid crystal materials in a gap between them. A plurality of pixel electrodes and a TFT whose drain is connected to the respective pixel electrodes are formed on one glass substrate and a common electrode is formed on the other glass substrate. The gate and the source of the TFT are connected sequentially with each output stage of the gate driver **8a** and the source driver **8b**, respectively. The liquid crystal panel **9** is fitted between a pair of polarizing plates, and the backlight **11** is disposed at the back thereof.

The backlight power supply circuit **10** has a function of controlling an output voltage thereof and functions as luminance control means for controlling the luminance of light emitted from the backlight **11** by outputting a controlled voltage to the backlight **11**. The liquid crystal panel **9** controls the light transmittance determined by an electrooptical characteristic of a liquid crystal material and displays a screen image by controlling On/Off of each pixel by a gate signal inputted from the gate driver **8a** and by applying an output voltage (data voltage) inputted from the source driver **8b** to each pixel during the On period.

Disposed near the backlight **11** is a general purpose photosensor **12**, such as a photodiode or a phototransistor, which converts incident light from the backlight **11** into an analog-type electric signal (which will be hereinafter referred to as an analog signal) having a voltage according to the luminance (e.g. the luminance in the wavelength band of the visible light) of the incident light. The ADC **13** converts the analog signal outputted from the photosensor **12** into a digital-type electric signal (which will be hereinafter referred to as a digital signal). That is, the photosensor **12** and the ADC **13** cooperate to function as luminance detecting means according to the present invention.

Now, the following description will explain a luminance control method for a liquid crystal display device according to

the present invention, using a flow chart. The luminance control method for a liquid crystal display device according to the present invention includes a first process procedure, which uses an external photosensor **22**, and a second process procedure, which does not use the external photosensor **22**. It should be noted that the first process procedure is generally processed by a manufacturer of the liquid crystal device, i.e. processed in manufacturing process, and the second process procedure is processed by the user of the liquid crystal display device.

FIG. 3 is a flow chart showing an example of the first process procedure of the luminance control method for a liquid crystal display device according to Embodiment 1 of the present invention.

First, the control unit **2** controls the liquid crystal drive circuit **8** to give the maximum light transmittance of the liquid crystal material (step S1). In particular, when the liquid crystal panel **9** is in a normally black mode, the control unit **2** outputs a scanning signal to the gate driver **8a** and outputs to the source driver **8b** an input level (e.g. "1111111111(1023)" in a case of 10-bit input) which gives the maximum voltage to be applied to the liquid crystal material. The gate driver **8a** outputs a scanning voltage for controlling On/Off of the TFT sequentially to each output stage in synchronization with the scanning signal inputted from the control unit **2** so as to supply the scanning voltage to the gate line of the liquid crystal panel. The source driver **8b** outputs an output voltage (data voltage) V_{1023} corresponding to the inputted input level (1023) to each output stage and to the source line of the liquid crystal panel. In this manner, each TFT applies the data voltage V_{1023} to a pixel electrode and controls the light transmittance of the liquid crystal material determined by the electrooptical characteristic. It should be noted that, when the liquid crystal panel **9** is in a normally white mode, the light transmittance of the liquid crystal material can be maximum by outputting to the source driver **8b** an input level (e.g. "0000000000(0)" in a case of 10-bit input) which gives the minimum voltage to be applied to the liquid crystal material. A signal of an input level which gives the maximum light transmittance of the liquid crystal material may be inputted externally from a PC or the like.

The control unit **2** then controls the backlight power supply circuit **10** to give the maximum brightness value (100%), obtains a luminance L_{MH} of a substantially center part of the display surface of the liquid crystal panel **9** with the external photosensor **22** and obtains an output value AD_H of the ADC **13** (step S2). Similarly, the control unit **2** controls the backlight power supply circuit **10** to give the minimum brightness value (0%), obtains a luminance L_{ML} of a substantially center part of the display surface of the liquid crystal panel **9** and obtains an output value AD_L of the ADC **13** (step S3). It should be noted that the brightness control can be performed by controlling the voltage value to be supplied to the backlight.

The control unit **2** stores in the storage unit **6** the luminances L_{MH}, L_{ML} and the output values AD_H, AD_L obtained in the steps S2 and S3 (step S4). Since the luminance L is proportional to the output value AD , a luminance-output value characteristic as shown in FIG. 4 can be obtained uniquely by obtaining two points of brightness, namely 100% and 0%, and the luminance L can be calculated (interpolated) based on an expression (3) from the output value AD of the ADC **13**, the luminances L_{MH}, L_{ML} and the output values AD_H, AD_L , without using the external photosensor **22**. That is, the output value AD of the ADC **13**, which gives the luminance L , can be calculated based on an expression (4). It should be noted that, though two points of 100% and 0% of

the brightness are obtained in this example to determine the luminance-output value characteristic, the present invention is not limited to this, and the luminances and the output values of two arbitrary points of the different brightness may be obtained and the obtained luminances and output values may be stored in the storage unit 6 to obtain the luminance-output value characteristic by forward extrapolation or backward extrapolation, or the luminances and the output values of more than two arbitrary points of the different brightness may be obtained and linearization may be applied to obtain the luminance-output value characteristic.

$$L = L_{MH} + \frac{L_{MH} - L_{ML}}{AD_H - AD_L} (AD - AD_H) \quad \text{expression (3)}$$

$$AD = AD_H + \frac{AD_H - AD_L}{L_{MH} - L_{ML}} (L - L_{MH}) \quad \text{expression (4)}$$

The control unit 2 then outputs to the source driver 8b a signal, which gives the input level of 0, 1, ..., 1023, to output the output voltage $V_0, V_1, \dots, V_{1023}$ to the liquid crystal panel 9 and change the light transmittance of the liquid crystal material, and obtains the luminance $L_0, L_1, \dots, L_{1023}$ of a substantially center part of the liquid crystal panel 9 in each case with the external photosensor 22 (step S5). In this manner, an actual gray-level characteristic of the liquid crystal panel 9 as shown in FIG. 5 can be obtained. A signal which gives the input level of 0, 1, ..., 1023 may be inputted externally from a PC or the like.

The obtained luminance $L_0, L_1, \dots, L_{1023}$ is then normalized by dividing it by the maximum luminance L_{1023} and the normalized luminance $L_0/L_{1023}, L_1/L_{1023}, \dots, L_{1023}/L_{1023}$ is stored in the storage unit 6 (step S6). In this manner, a normalized gray-level characteristic of the liquid crystal panel 9 as shown in FIG. 8 can be obtained. It is needless to say that an actual gray-level characteristic obtained in the step S5 may be stored in the storage unit 6 instead of the normalized gray-level characteristic, and there is no limitation as long as a correlation between luminances for respective input levels inputted to the source driver is defined. Furthermore, 256 points of the luminance to give input levels of 0, 4, 8, ..., 1023, for example, of the input levels of 0, 1, ..., 1023 may be measured, and the luminance of 1024 points may be calculated by linear interpolation, normalized and then stored in the storage unit 6. In this manner, reduction of process time can be realized. It is needless to say that the 256 points of input levels to be measured actually may be arbitrary, and the number of the levels to be measured actually is not limited to 256.

FIG. 7 is a flow chart showing an example of the second process procedure of the luminance control method for a liquid crystal display device according to Embodiment 1 of the present invention.

First, an input of a desired luminance set value (which will be hereinafter referred to as the maximum luminance L_{TMAX}) by a user of the liquid crystal display device 1 is accepted through the operation unit 5 (step S11). It should be noted that the maximum luminance L_{TMAX} may be inputted directly as a value itself, or accepted in a manner that a table in which a luminance level is associated with the maximum luminance L_{TMAX} as shown in FIG. 8 is stored in the storage unit 6 and the user selects a luminance level after reading the table in a suitable manner.

The control unit 2 reads the luminances L_{MH}, L_{ML} and the output values AD_H, AD_L stored in the storage unit 6 and calculates an output value AD_T which gives the maximum luminance L_{TMAX} based on the expression (4) from the read luminances L_{MH}, L_{ML} and output values AD_H, AD_L and the maximum luminance L_{TMAX} accepted in the step S11 (step S12). In this manner, the luminance of the display screen of the liquid crystal panel can be controlled so as to be the maximum luminance L_{TMAX} by controlling the backlight power supply circuit 10 so as to give the output value AD_T .

The control unit 2 then reads the normalized luminance $L_0/L_{1023}, L_1/L_{1023}, \dots, L_{1023}/L_{1023}$ stored in the storage unit 6 and multiplies the read luminance $L_0/L_{1023}, L_1/L_{1023}, \dots, L_{1023}/L_{1023}$ by the maximum luminance L_{TMAX} accepted in the step S11 to calculate the actual luminance (which will be hereinafter referred to as a panel gray-level characteristic value) $L_{TMAX}L_0/L_{1023}, L_{TMAX}L_1/L_{1023}, \dots, L_{TMAX}L_{1023}/L_{1023}$ in a case of the maximum luminance L_{TMAX} (step S13).

The control unit 2 then calculates luminance (which will be hereinafter referred to as an ideal gray-level characteristic value) T_0, T_1, \dots, T_{255} to be set in a case of the maximum luminance L_{TMAX} based on a display function preliminarily stored in the storage unit 6 (step S14). Now, the following description will explain an example where the display function is the GSDF. The GSDF defines that the minimum luminance difference of a given target identifiable by a normal man is 1 JND (Just-Noticeable Difference) under a given observation conditions, and is a function obtained by plotting JNDs up to 1023-step assuming that the minimum luminance is 0.05 cd/m^2 .

The control unit 2 calculates JND_{TMAX} and JND_{TMIN} respectively for the maximum luminance L_{TMAX} and minimum luminance L_{TMIN} accepted in the step S11 based on an expression (5). It should be noted that the minimum luminance L_{TMIN} is $L_{TMAX}L_0/L_{1023}$ so that the luminance difference between each JND (each gray level) becomes the maximum, i.e. the maximum dynamic range. It is needless to say that the minimum luminance L_{TMIN} may be an arbitrary luminance of the $L_{TMAX}L_1/L_{1023}, L_{TMAX}L_2/L_{1023}, \dots, L_{TMAX}L_{1023}/L_{1023}$, or may be obtained in a manner that input of a desired minimum luminance L_{TMIN} by the user of the liquid crystal display device 1 is accepted through the operation unit 5.

$$\begin{aligned} JND = & A + B \cdot \log_{10}(L) + C \cdot (\log_{10}(L))^2 + D \cdot (\log_{10}(L))^3 + E \cdot \\ & (\log_{10}(L))^4 + F \cdot (\log_{10}(L))^5 + G \cdot (\log_{10}(L))^6 + H \cdot \\ & (\log_{10}(L))^7 + I \cdot (\log_{10}(L))^8 \end{aligned} \quad \text{expression (5)}$$

$$A=71.498068, B=94.593053, C=41.912053$$

$$D=9.8247004, E=0.28175407, F=-1.1878455$$

$$G=-0.18014349, H=0.14710899, I=-0.017046845$$

In order to allocate a resolution n (e.g. 8 bit=256) a JND difference ($JND_{TMAX} - JND_{TMIN}$) between the maximum luminance L_{TMAX} and the minimum luminance L_{TMIN} , which is divided equally into the number of the gray levels $2^n - 1$ (255 in this example), the control unit 2 calculates an ideal gray-level characteristic value T_1, T_2, \dots, T_{255} in each gray level based on an expression (6). It should be noted that, though the above description explained an example where the display function is the GSDF, it is needless to say that the display function may be any function.

$$T_i = 10L \left(\frac{JND_{TMAX} - JND_{TMIN}}{255} \right) i + JND_{TMIN} \quad \text{expression (6)}$$

i: gray level (0, 1, ..., 255)

$$L(k) = \frac{a + c \cdot \ln(k) + e \cdot (\ln(k))^2 + g \cdot (\ln(k))^3 + q \cdot (\ln(k))^4}{1 + b \cdot \ln(k) + d \cdot (\ln(k))^2 + f \cdot (\ln(k))^3 + h \cdot (\ln(k))^4 + p \cdot (\ln(k))^5}$$

$$a = -1.3011877, b = -2.5840191E-2, c = 8.0242636E-2$$

$$d = -1.0320229E-1, e = 1.3646699E-1,$$

$$f = 2.8745620E-2$$

$$g = -2.5468404E-2, h = -3.1978977E-3$$

$$p = 1.2992634E-4, q = 1.3635334E-3$$

The control unit **2** then compares the ideal gray-level characteristic value T_0, T_1, \dots, T_{255} calculated in the step **S14** with the panel gray-level characteristic value $L_{TMAX} \cdot L_0 / L_{1023}, L_{TMAX} \cdot L_1 / L_{1023}, \dots, L_{TMAX} \cdot L_{1023} / L_{1023}$ calculated in the step **S13** to generate the LUT **6a** and stores the LUT **6a** in the storage unit **6** (step **S15**).

Now, the following description will explain the LUT generating/storing process mentioned above in the step **S15** more concretely. FIG. 9 is a flow chart showing an example of the LUT generating/storing process.

The control unit **2** calculates a differential value ($T_i - L_{TMAX} \cdot L_j / L_{1023}$) between an ideal gray-level characteristic value T_i ($i = 0, 1, \dots, 255$) and a panel gray-level characteristic value $L_{TMAX} \cdot L_j / L_{1023}$ ($j = 0, 1, \dots, 1023$) (step **S21**), and extracts a combination of a gray level i and an input level j , which gives the minimum absolute value of the calculated differential value $|T_i - L_{TMAX} \cdot L_j / L_{1023}|$, for each gray level i (step **S22**).

The calculated gray level i is then stored in the storage unit **6** as an index of the LUT **6a** and the input level j is stored in the storage unit **6** as a value of the LUT **6a** (step **S23**). It should be noted that, though described is a manner in that the LUT **6a** is composed of a combination of a gray level i and an input level j which gives the minimum absolute value of the differential value ($T_i - L_{TMAX} \cdot L_j / L_{1023}$) in the step **S22**, the present invention is not limited to this, and the LUT **6a** may be composed of a combination of a gray level i and an input level j which gives the smallest positive number (or negative number) of the differential value ($T_i - L_{TMAX} \cdot L_j / L_{1023}$).

Embodiment 2

Though described in Embodiment 1 is an embodiment suitable mainly for a monochrome liquid crystal display device which uses one LUT for luminance control, it is preferable to prepare an LUT for luminance control for each color in a case of a color liquid crystal display device since the transmittance of light in the liquid crystal material differs according to the wavelength of the light as shown in the expression (1). Such construction is described in Embodiment 2.

FIG. 10 is a block diagram showing a structure example of a liquid crystal display device according to Embodiment 2 of the present invention. A liquid crystal display device **31** according to this embodiment comprises a control unit **2**, a ROM **3**, a RAM **4**, an operation unit **5**, a storage unit **36**, a signal input unit **7**, a liquid crystal drive circuit **8**, a liquid crystal panel **9**, a backlight power supply circuit **10**, a backlight **11**, a photosensor **12**, and an ADC **13**.

The storage unit **36**, which is a device rewritable as software, stores: an output value AD_H of the ADC **13** and a luminance L_{MH} of a substantially center part of the display surface of the liquid crystal panel **9** in a case of the maximum brightness (100%); an output value AD_L of the ADC **13** and a luminance L_{ML} of a substantially center part of the display surface of the liquid crystal panel **9** in a case of the minimum brightness (0%); and a first color luminance $R_0 / R_{1023}, R_1 / R_{1023}, \dots, R_{1023} / R_{1023}$, a second color luminance $G_0 / G_{1023}, G_1 / G_{1023}, \dots, G_{1023} / G_{1023}$, and a third color luminance $B_0 / B_{1023}, B_1 / B_{1023}, \dots, B_{1023} / B_{1023}$ which are obtained by normalizing a first color luminance $R_0, R_1, \dots, R_{1023}$, a second color luminance $G_0, G_1, \dots, G_{1023}$, and a third color luminance $B_0, B_1, \dots, B_{1023}$ corresponding to the three primary colors of a substantially center part of the display surface obtained when the source driver **8b** outputs an output voltage corresponding to each input level to the liquid crystal panel **9**. The storage unit **36** further has a function of timely updating and storing an LUT **36a, 36b, 36c** for each color in which a gray level is associated with an input level to the liquid crystal panel **9** according to the gray level. The content of the LUTs **36a, 36b** and **36c** are respectively the same as the conventional LUT illustrated in FIG. 14. Since other structures are the same as those of Embodiment 1, like codes are used to refer to like parts and the explanation thereof is omitted.

It should be noted that an external photosensor **42** is a device for measuring the luminance in a wavelength band corresponding to visible light of light emitted through the liquid crystal panel **9** and the luminance in wavelength bands corresponding respectively to the three primary colors, and is additionally used when a first process procedure (mentioned later) is performed. It should be also noted that the primary three colors include a color mixing system composed of red, green and blue, and a subtractive color system composed of yellow, cyan and magenta, and any one of the color systems may be employed.

FIG. 11 is a flow chart showing an example of the first process procedure of a luminance control method for a liquid crystal display device according to Embodiment 2 of the present invention.

First, the control unit **2** controls the liquid crystal drive circuit **8** to give the maximum light transmittance of the liquid crystal material (input level: 1023) (step **S31**). The control unit **2** then controls the backlight power supply circuit **10** to give the maximum brightness value (100%), obtains a luminance L_{MH} of a substantially center part of the display surface of the liquid crystal panel **9** with the external photosensor **42** and obtains an output value AD_H of the ADC **13** (step **S32**). Similarly, the control unit **2** controls the backlight power supply circuit **10** to give the minimum brightness value (0%), obtains a luminance L_{ML} of a substantially center part of the display surface of the liquid crystal panel **9** with the external photosensor **42** and obtains an output value AD_L of the ADC **13** (step **S33**). The control unit **2** stores in the storage unit **36** the luminances L_{MH}, L_{ML} and the output values AD_H, AD_L obtained in the steps **S32** and **S33** (step **S34**).

The control unit **2** then outputs a signal, which gives an input level 0, 1, ..., 1023, to the source driver **8b**, outputs an output voltage $V_0, V_1, \dots, V_{1023}$ to the liquid crystal panel **9** to change the light transmittance of the liquid crystal material, and obtains a first color luminance $R_0, R_1, \dots, R_{1023}$, a second color luminance $G_0, G_1, \dots, G_{1023}$, and a third color luminance $B_0, B_1, \dots, B_{1023}$ of a substantially center part of the display surface of the liquid crystal panel **9** in each case with the external photosensor **42** (step **S35**). The obtained first color luminance $R_0, R_1, \dots, R_{1023}$, second color luminance

$G_0, G_1, \dots, G_{1023}$, and third color luminance $B_0, B_1, \dots, B_{1023}$ are then normalized by dividing them respectively by the maximum luminance R_{1023}, G_{1023} and B_{1023} , and the normalized first color luminance $R_0/R_{1023}, R_1/R_{1023}, \dots, R_{1023}/R_{1023}$, second color luminance $G_0/G_{1023}, G_1/G_{1023}, \dots, G_{1023}/G_{1023}$, and third color luminance $B_0/B_{1023}, B_1/B_{1023}, \dots, B_{1023}/B_{1023}$ are stored in the storage unit 36 (step S36). A signal which gives an input level of 0, 1, ..., 1023 may be inputted externally from a PC or the like.

The control unit 2 then divides the first color luminance R_{1023} , the second color luminance G_{1023} and the third color luminance B_{1023} respectively by the luminance L_{MH} and stores in the storage unit 36 R_{1023}/L_{MH} (which will be hereinafter referred to as RR), G_{1023}/L_{MH} (which will be hereinafter referred to as GR) and B_{1023}/L_{MH} (which will be hereinafter referred to as BR) (step S37). That is, a ratio of the luminance of the three primary colors RR:GR:BR is calculated. It should be noted that, though a ratio of the luminance is calculated in this example where the luminance liquid crystal material has the controllable maximum transmittance, a ratio of the luminance in a case where the liquid crystal material has a predetermined transmittance may be calculated.

FIG. 12 is a flow chart showing an example of a second process procedure of the luminance control method for a liquid crystal display device according to Embodiment 2 of the present invention.

First, input of a desired maximum luminance L_{TMAX} by the user of the liquid crystal display device 1 is accepted through the operation unit 5 (step S41). The control unit 2 then reads the luminances L_{MH}, L_{ML} and output values AD_H, AD_L stored in the storage unit 36 and calculates an output value AD_T which gives the maximum luminance L_{TMAX} based on the expression (4) from the read luminances L_{MH}, L_{ML} and output values AD_H, AD_L and the maximum luminance L_{TMAX} accepted in the step S41 (step S42).

The control unit 2 then reads the normalized first color luminance $R_0/R_{1023}, R_1/R_{1023}, \dots, R_{1023}/R_{1023}$, second color luminance $G_0/G_{1023}, G_1/G_{1023}, \dots, G_{1023}/G_{1023}$, and third color luminance $B_0/B_{1023}, B_1/B_{1023}, \dots, B_{1023}/B_{1023}$ stored in the storage unit 36 and calculates panel gray-level characteristic values for the respective colors $L_{TMAX} \cdot RR \cdot R_0/R_{1023}, L_{TMAX} \cdot RR \cdot R_1/R_{1023}, \dots, L_{TMAX} \cdot RR \cdot R_{1023}/R_{1023}, L_{TMAX} \cdot GR \cdot G_0/G_{1023}, L_{TMAX} \cdot GR \cdot G_1/G_{1023}, \dots, L_{TMAX} \cdot GR \cdot G_{1023}/G_{1023}$, and $L_{TMAX} \cdot BR \cdot B_0/B_{1023}, L_{TMAX} \cdot BR \cdot B_1/B_{1023}, \dots, L_{TMAX} \cdot BR \cdot B_{1023}/B_{1023}$ in a case of the maximum luminance L_{TMAX} by multiplying the read first color luminance $R_0/R_{1023}, R_1/R_{1023}, \dots, R_{1023}/R_{1023}$, second color luminance $G_0/G_{1023}, G_1/G_{1023}, \dots, G_{1023}/G_{1023}$, and third color luminance $B_0/B_{1023}, B_1/B_{1023}, \dots, B_{1023}/B_{1023}$ by RR, GR and BR normalized in the step S37 and the maximum value L_{TMAX} accepted in the step S41 (step S43).

The control unit 2 then calculates ideal gray-level characteristic values for the respective colors $TR_0, TR_1, \dots, TR_{255}, TG_0, TG_1, \dots, TG_{255}$, and $TB_0, TB_1, \dots, TB_{255}$ in a case of the maximum luminance L_{TMAX} based on the display function preliminarily stored in the storage unit 36 (step S44), compares the ideal gray-level characteristic values for the respective colors calculated in the step S44 with the panel gray-level characteristics for respective colors calculated in the step S43 to generate LUTs 36a, 36b and 36c, and stores them in the storage unit 36 (step S45). Since the LUT generating/storing process is the same as that of Embodiment 1, the explanation thereof is omitted.

It should be noted that, though a white screen is displayed by making the transmittance of all the pixels equal in order to obtain the first color luminance, the second color luminance and the third color luminance with the external photosensor

42 in this embodiment, a first color raster screen may be displayed by setting a voltage to be applied to pixels of the first color as V_{1023} and setting a voltage to be applied to pixels of the other colors as V_0 in order to obtain the first color luminance with the external photosensor 42. In this manner, a gray-level characteristic having superior accuracy can be realized since the effect of the luminance of the second color and the third color on the luminance of the first color can be removed even when the wavelength bands of the respective colors are broad and overlap with each other (the same for the second color luminance and the third color luminance).

Moreover, though the photosensor 12 converts the luminance in the wavelength band of visible light into an analog signal in the above description, the luminance-output value characteristic for each color may be obtained using a photosensor for converting the luminance in the wavelength band of each of the three primary colors into an analog signal having a voltage according to the luminance. It should be understood that in this case, the analog signal is converted into a digital signal by connecting an ADC corresponding to each color with the photosensor. It is needless to say that a plurality of photosensors for converting the luminance of each of wavelength bands into an analog signal may be used.

The above-mentioned process procedure may be executed for color temperatures, e.g. a blue base (12500K) and a clear base (7500K) respectively. In this case, the storage unit 36 stores in the first process procedure the luminances L_{MH}, L_{ML} and the output values AD_H, AD_L for each color temperature and the normalized first color luminance $R_0/R_{1023}, R_1/R_{1023}, \dots, R_{1023}/R_{1023}$, second color luminance $G_0/G_{1023}, G_1/G_{1023}, \dots, G_{1023}/G_{1023}$, and third color luminance $B_0/B_{1023}, B_1/B_{1023}, \dots, B_{1023}/B_{1023}$, selection of a desired color temperature by the user of the liquid crystal display device 1 is accepted through the operation unit 5 in the second process procedure, and a process is executed for the selected color temperature. It is needless to say that the color temperature is not limited to these two, and may be any color temperature.

Furthermore, though described in Embodiment 1 and Embodiment 2 is a manner that the control unit 2 in the liquid crystal display device executes the above software process to control luminance, a PC 21 connected with the liquid crystal device via a communication line compatible with the USB standard may perform a process similar to that of the above control unit 2. In this case, a necessary process may be executed by reading a recording medium such as a CD-ROM or a flexible disk (FD) in which the above process content is recorded as a computer program with a CD-ROM drive or a FD drive and by loading the read computer program to a memory. It is needless to say that the PC 21 may execute the process by downloading a computer program from a recording medium composed of a server device connected with a communication network such as a LAN via the communication network. Moreover, the PC 21 may comprise a storage unit for storing the above LUT 6a (36a, 36b, 36c), or the PC 21 may cause a storage unit in the liquid crystal display device to store the LUT 6a (36a, 36b, 36c).

The invention claimed is:

1. A luminance control method for a liquid crystal display device, which comprises a liquid crystal panel, a backlight disposed at the back of the liquid crystal panel and a luminance detecting unit for detecting a luminance of the backlight, for controlling an input level of a video signal to be inputted into the liquid crystal panel to control transmittance of the liquid crystal panel and provide a gray-level display, comprising

19

performing, at a time before actually displaying an image, the steps of:

measuring a luminance of light emitted from the backlight through the liquid crystal panel in a plurality of states where the liquid crystal panel has a predetermined transmittance and the backlight has a different luminance, and preliminarily storing the measured luminance of light emitted through the liquid crystal panel as associated with the luminance of the backlight detected by the luminance detecting unit for each of the plurality of states, respectively; and

measuring a luminance of light emitted through the liquid crystal panel in each input level, and preliminarily storing the measured luminance associated with an input level which gives the luminance; and

subsequently performing, at a time of actually displaying the image, the steps of:

setting a desired luminance set value of light emitted through the liquid crystal panel in a state where the liquid crystal panel has a predetermined transmittance, calculating a luminance of the backlight to be detected by the luminance detecting unit which results in the set desired luminance set value of light emitted through the liquid crystal panel, on the basis of the preliminarily stored luminance association in each state;

controlling the luminance of the backlight so as to be the calculated luminance;

calculating a luminance of light emitted through the liquid crystal panel in each input level and a luminance to be set in each gray level in a case of the luminance set value, on the basis of the stored luminance and input level;

extracting an input level, which gives a luminance substantially equal to the luminance to be set in each gray level, on the basis of the luminance in each calculated input level and the luminance to be set in each gray level, and storing the extracted input level associated with a gray level; and

controlling the transmittance of the liquid crystal panel in a gray level associated with the input level of the video signal.

2. The luminance control method according to claim 1, wherein the luminance set value is a luminance in a state where the transmittance of the liquid crystal panel is a controllable maximum transmittance.

3. The luminance control method according to claim 1, wherein one state of the plurality of states is a state where the backlight has a controllable maximum luminance and another state of the plurality of states is a state where the backlight has a controllable minimum luminance.

4. The luminance control method according to claim 2, wherein one state of the plurality of states is a state where the backlight has a controllable maximum luminance and another state of the plurality of states is a state where the backlight has a controllable minimum luminance.

5. A luminance control method for a liquid crystal display device, which comprises a liquid crystal panel, a backlight disposed at the back of the liquid crystal panel and a luminance detecting unit for detecting a luminance of the backlight, for controlling an input level of a video signal to be inputted into the liquid crystal panel to control transmittance of the liquid crystal panel and provide a gray-level display, comprising

performing, at a time before actually displaying an image, the steps of:

measuring a luminance of light emitted from the backlight through the liquid crystal panel in a plurality of states where the liquid crystal panel has a predetermined trans-

20

mittance and the backlight has a different luminance, and preliminarily storing the measured luminance of light emitted through the liquid crystal panel as associated with the luminance of the backlight detected by the luminance detecting unit for each of the plurality of states, respectively; and

subsequently performing, at a time of actually displaying the image, the steps of:

setting a desired luminance set value of light emitted through the liquid crystal panel in a state where the liquid crystal panel has a predetermined transmittance; calculating a luminance of the backlight to be detected by the luminance detecting unit which results in the set desired luminance set value of light emitted through the liquid crystal panel, on the basis of the preliminarily stored luminance association in each state; and

controlling the luminance of the backlight so as to be the calculated luminance, the method further comprising the steps of:

measuring a luminance of light emitted through the liquid crystal panel in each input level;

normalizing each measured luminance, and preliminarily storing each normalized luminance associated with an input level which gives the luminance;

calculating a luminance of light emitted through the liquid crystal panel in each input level and a luminance to be set in each gray level in a case of the luminance set value, on the basis of the stored luminance and input level;

extracting an input level, which gives a luminance substantially equal to a luminance to be set in each gray level, on the basis of the luminance in each calculated input level and the luminance to be set in each gray level, and storing the extracted input level associated with a gray level; and

controlling the transmittance of the liquid crystal panel in a gray level associated with the input level of the video signal.

6. The luminance control method according to claim 5, wherein the luminance set value is a luminance in a state where the transmittance of the liquid crystal panel is a controllable maximum transmittance.

7. The luminance control method according to claim 5, wherein one state of the plurality of states is a state where the backlight has a controllable maximum luminance and another state of the plurality of states is a state where the backlight has a controllable minimum luminance.

8. The luminance control method according to claim 6, wherein one state of the plurality of states is a state where the backlight has a controllable maximum luminance and another state of the plurality of states is a state where the backlight has a controllable minimum luminance.

9. A liquid crystal display device, which comprises a liquid crystal panel and a backlight disposed at the back of the liquid crystal panel, for controlling an input level of a video signal to be inputted to the liquid crystal panel to control transmittance of the liquid crystal panel and provide a gray-level display, comprising:

a luminance detecting unit for detecting a luminance of the backlight;

a first storage unit for preliminarily storing, at a time before actually displaying an image, first information in which the luminance detected by the luminance detecting unit, in a plurality of states where the liquid crystal panel has a predetermined transmittance and the backlight has a different luminance, is associated with a luminance of light emitted from the backlight through the liquid crystal panel;

an accepting unit for accepting, at a time of actually displaying the image, a desired luminance set value of light emitted through the liquid crystal panel in a state where the liquid crystal panel has a predetermined transmittance;

a first calculating unit for calculating, at a time of actually displaying the image, a luminance of the backlight to be detected by the luminance detecting unit which results in the desired luminance set value of light emitted through the liquid crystal panel accepted by the accepting unit, on the basis of the first information preliminarily stored in the first storage unit; and

a luminance control unit for controlling, at a time of actually displaying the image, the luminance of the backlight so as to be the luminance calculated by the first calculating unit, wherein

the first storage unit further stores second information on a luminance of light emitted through the liquid crystal panel in each input level, and

the liquid crystal device further comprises:

a second calculating unit for calculating a luminance of light emitted through the liquid crystal panel in each input level in a case of the luminance set value accepted by the accepting unit, on the basis of the second information;

a third calculating unit for calculating a luminance to be set in each gray level in a case of the luminance set value accepted by the accepting unit;

a fourth calculating unit for calculating a luminance difference between the luminance to be set in each gray level calculated by the third calculating unit and the luminance in each input level calculated by the second calculating unit;

a second storage unit for storing an input level, which gives a minimum luminance difference calculated by the fourth calculating unit, associated with a gray level; and a control unit for controlling the transmittance of the liquid crystal panel in a gray level associated with the input level of the video signal.

10. The liquid crystal display device according to claim 9, wherein the luminance detecting unit has: a photoelectric converter for converting the luminance of the backlight into an analog-type electric signal having a voltage corresponding to the luminance of the backlight; and an analog-digital converter for converting the converted analog-type electric signal into a digital-type electric signal.

11. A recording medium on which a computer program for causing a computer to output control information to a liquid crystal display device comprising a liquid crystal panel and a backlight disposed at the back of the liquid crystal panel and causing the computer to control an input level of a video signal to be inputted into the liquid crystal panel to control transmittance of the liquid crystal panel and provide a gray-level display is recorded, said computer program comprising performing, at a time before actually displaying an image, the step of:

causing the computer to preliminarily store in a storage unit a luminance of the backlight, in a plurality of states where the backlight has a different luminance, as associated with a luminance of light emitted from the backlight through the liquid crystal panel in each of the plurality of states, respectively; and

subsequently performing, at a time of actually displaying the image, the steps of:

causing the computer to set a desired luminance set value of light emitted through the liquid crystal panel;

causing the computer to calculate control information for controlling a luminance of the backlight which results in the set luminance set value of light being emitted through the liquid crystal panel, on the basis of first information preliminarily stored in the storage unit; and

causing the computer to output the calculated control information to the liquid crystal display device, wherein said computer program further comprises the steps of:

causing the computer to store in a storage unit second information on a luminance of light emitted through the liquid crystal panel in each input level;

causing the computer to calculate a luminance of light emitted through the liquid crystal panel in each input level in a case of the inputted luminance set value, on the basis of the stored second information;

causing the computer to calculate a luminance to be set in each gray level in a case of the inputted luminance set value;

causing the computer to calculate a luminance difference between the calculated luminance to be set in each gray level and the calculated luminance in each input level; and

causing the computer to store in the storage unit an input level, which gives a minimum calculated luminance difference, associated with a gray level.

* * * * *

专利名称(译)	亮度控制方法，液晶显示装置和计算机程序		
公开(公告)号	US7952555	公开(公告)日	2011-05-31
申请号	US10/579740	申请日	2004-11-12
[标]申请(专利权)人(译)	酒井 美一		
申请(专利权)人(译)	酒井YOSHIKAZU		
当前申请(专利权)人(译)	EIZO NANAO CORPORATION		
[标]发明人	SAKAI YOSHIKAZU		
发明人	SAKAI, YOSHIKAZU		
IPC分类号	G09G3/36 G06F3/038 G09G5/10 G02F1/133 G09G3/34		
CPC分类号	G09G3/3406 G09G3/3607 G09G3/3611 G09G2320/0606 G09G2360/145 G09G2320/0666 G09G2320/0673 G09G2320/0693 G09G2320/0626		
优先权	2003389900 2003-11-19 JP		
其他公开文献	US20070152949A1		
外部链接	Espacenet USPTO		

摘要(译)

通过内置光电传感器检测的亮度和从背光通过液晶面板发出的光的亮度在背光具有不同亮度的多个状态下测量，并且预先存储在存储单元中。此外，测量当通过液晶面板发射的光的最大亮度是预定值时在每个输入电平中通过液晶面板发射的光的亮度，并将其预先存储在存储单元中。然后接受通过液晶面板发射的光的最大亮度，控制背光的亮度，计算每个输入电平的亮度和每个灰度级中的理想亮度，以及给出亮度基本相等的输入电平。获得每个灰度级中的理想亮度以更新LUT。

