



US 20100007810A1

(19) **United States**(12) **Patent Application Publication**  
**NAKAMURA**(10) **Pub. No.: US 2010/0007810 A1**(43) **Pub. Date: Jan. 14, 2010**(54) **LIQUID CRYSTAL DISPLAY DEVICE**(52) **U.S. Cl. .... 349/38**(75) **Inventor: Yayoi NAKAMURA, Tokyo (JP)**(57) **ABSTRACT**

Correspondence Address:

**MASAO YOSHIMURA, CHEN YOSHIMURA  
LLP****333 W. El Camino Real, Suite 380  
Sunnyvale, CA 94087 (US)**(73) **Assignee: CASIO COMPUTER CO., LTD.,  
Tokyo (JP)**(21) **Appl. No.: 12/500,278**(22) **Filed: Jul. 9, 2009**(30) **Foreign Application Priority Data**

Jul. 14, 2008 (JP) ..... 2008-183219

**Publication Classification**(51) **Int. Cl.**  
**G02F 1/1343 (2006.01)**

A liquid crystal display device with multiple pixels provided therein is disclosed comprising: a first sub-pixel provided for each of said pixels and including, a first liquid crystal capacitance formed with a liquid crystal sandwiched between a common electrode and a first pixel electrode, and a first auxiliary capacitance formed with a solid dielectric material sandwiched between said first pixel electrode and a first auxiliary capacitance electrode; a second sub-pixel disposed adjacent to said first sub-pixel for each of said pixels and including, a second liquid crystal capacitance formed with a liquid crystal sandwiched between said common electrode and a second pixel electrode, a second auxiliary capacitance formed with a solid dielectric material sandwiched between said second pixel electrode and a second auxiliary capacitance electrode, and a step-up capacitance formed with a solid dielectric material sandwiched between said second pixel electrode and a step-up capacitance electrode; a first voltage application means for applying a common first voltage to said common electrode, said first auxiliary capacitance electrode, and said second auxiliary capacitance electrode; and a second voltage application means for applying a second voltage, which is different from said first voltage, to said step-up capacitance electrode.

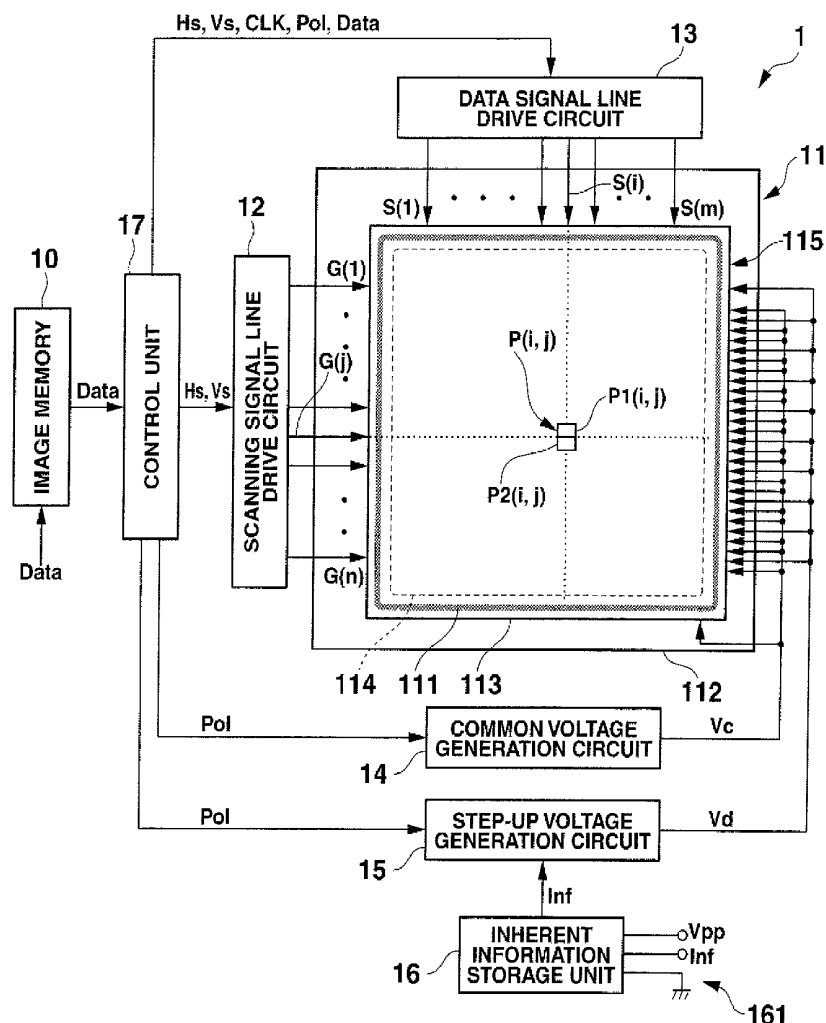


FIG.1


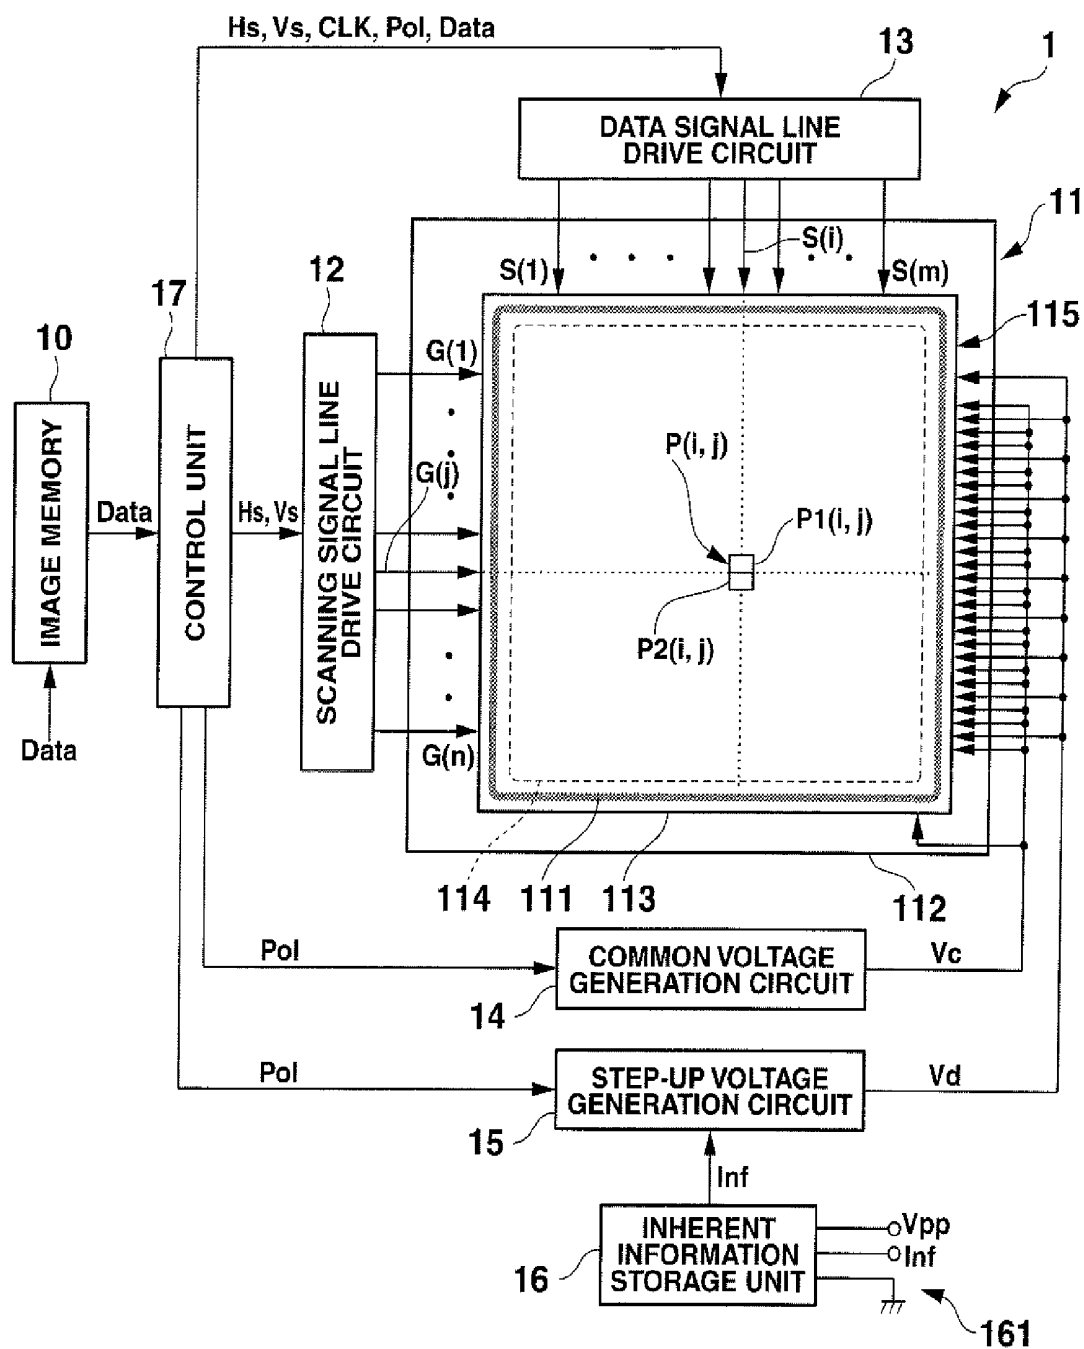


FIG.2






**FIG.3**

FIG. 4

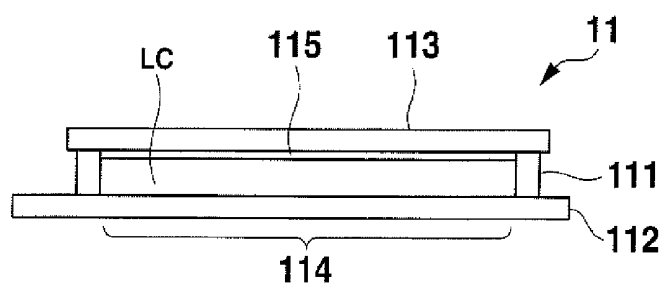



**FIG.6**

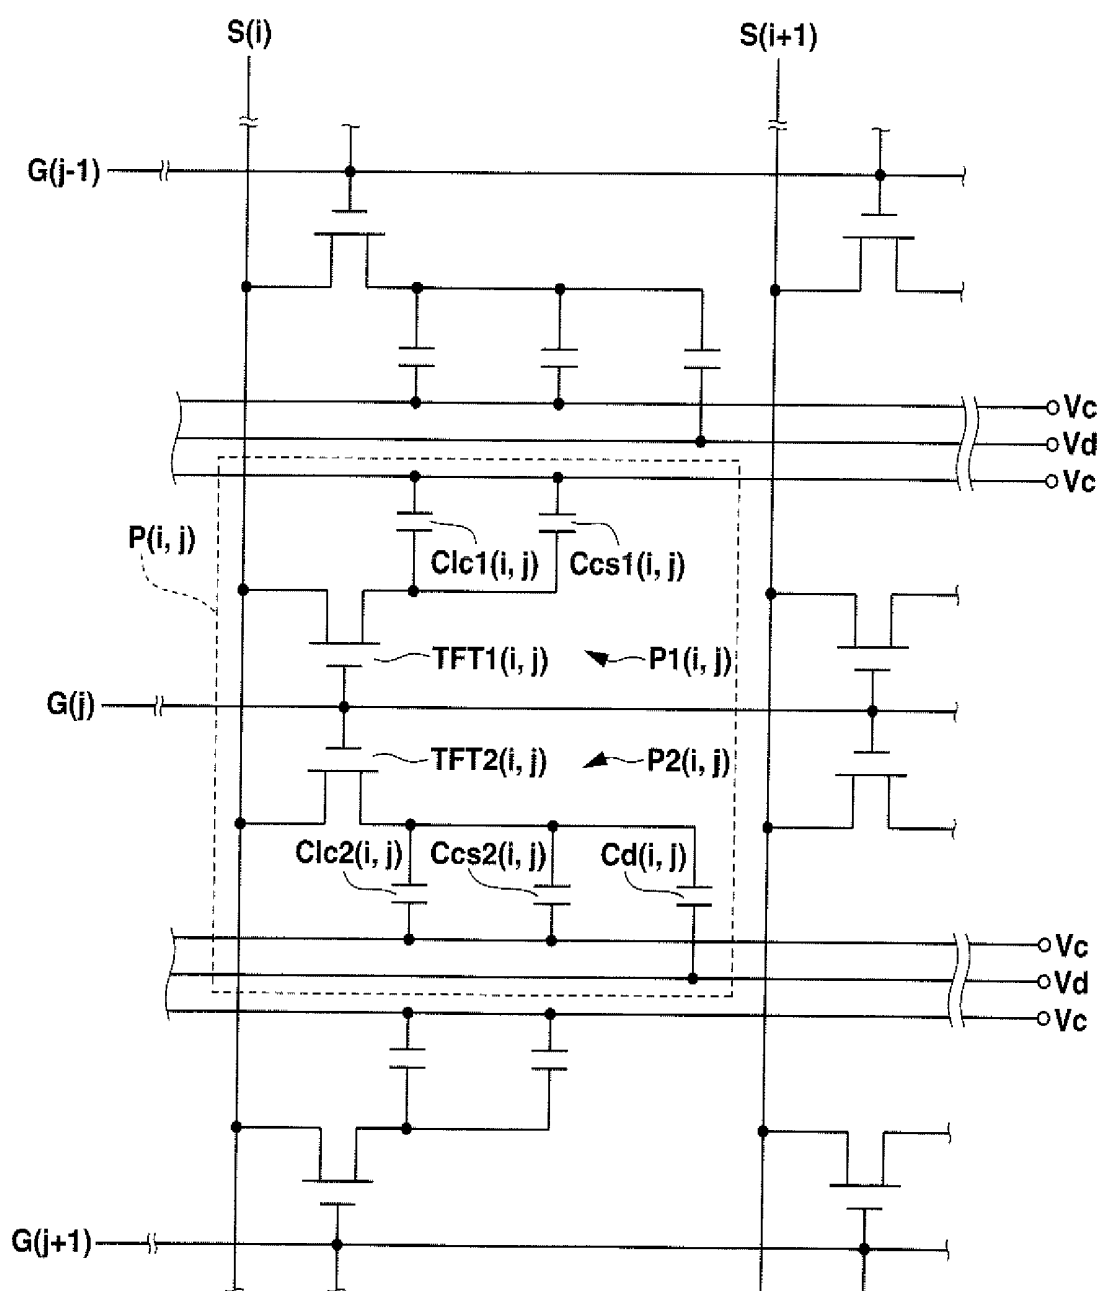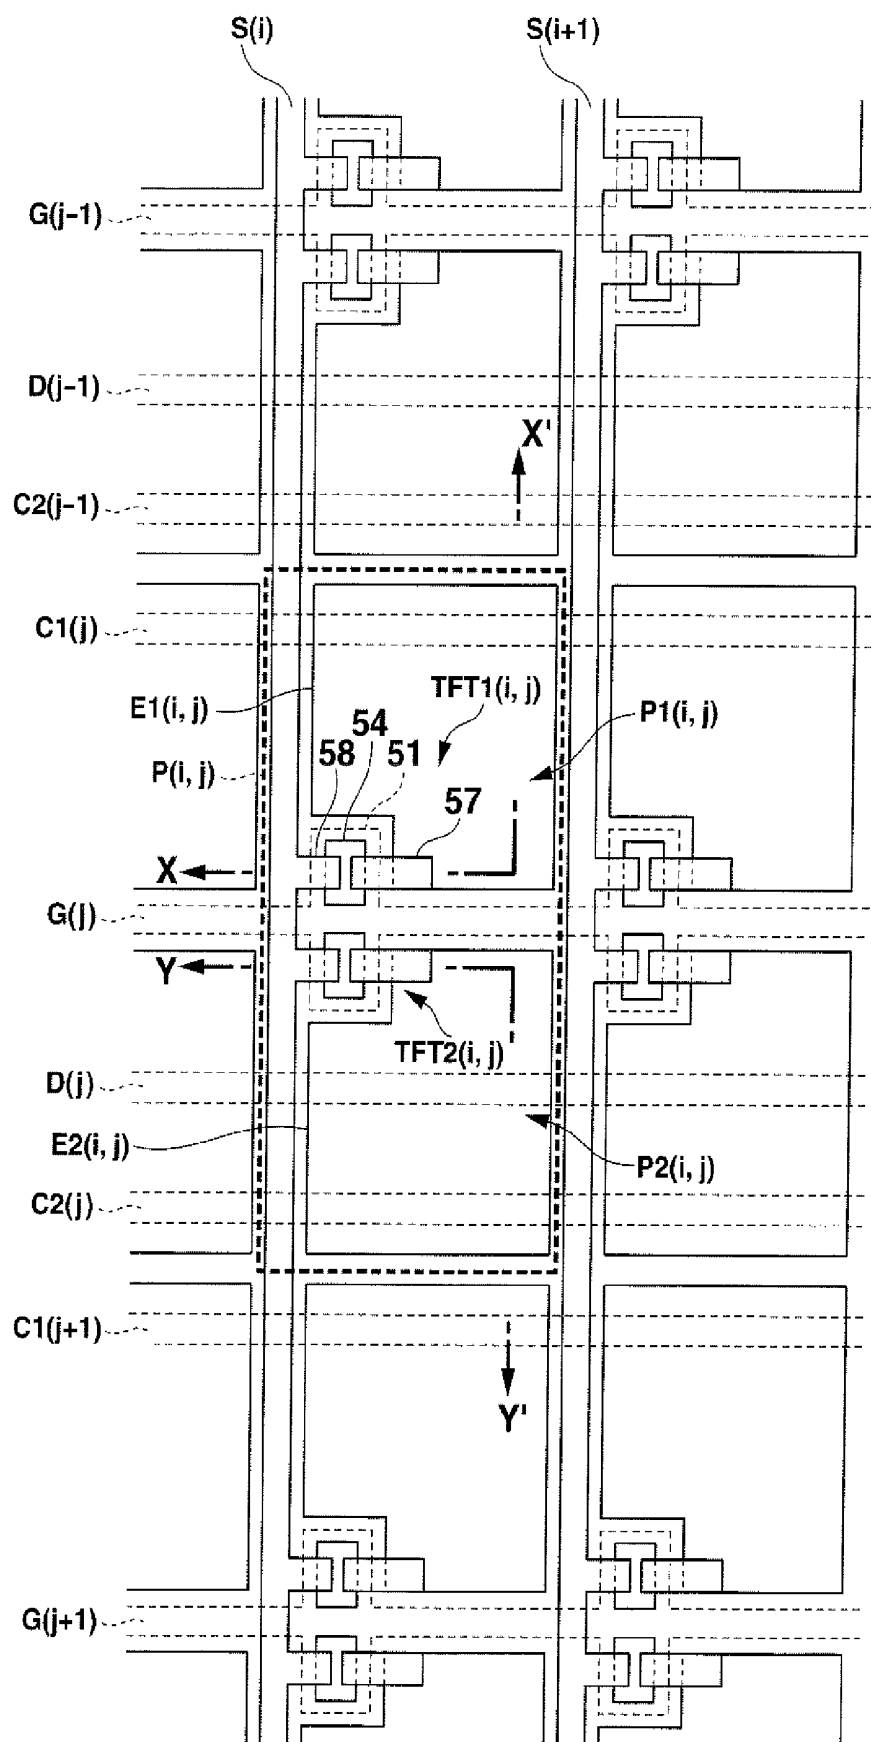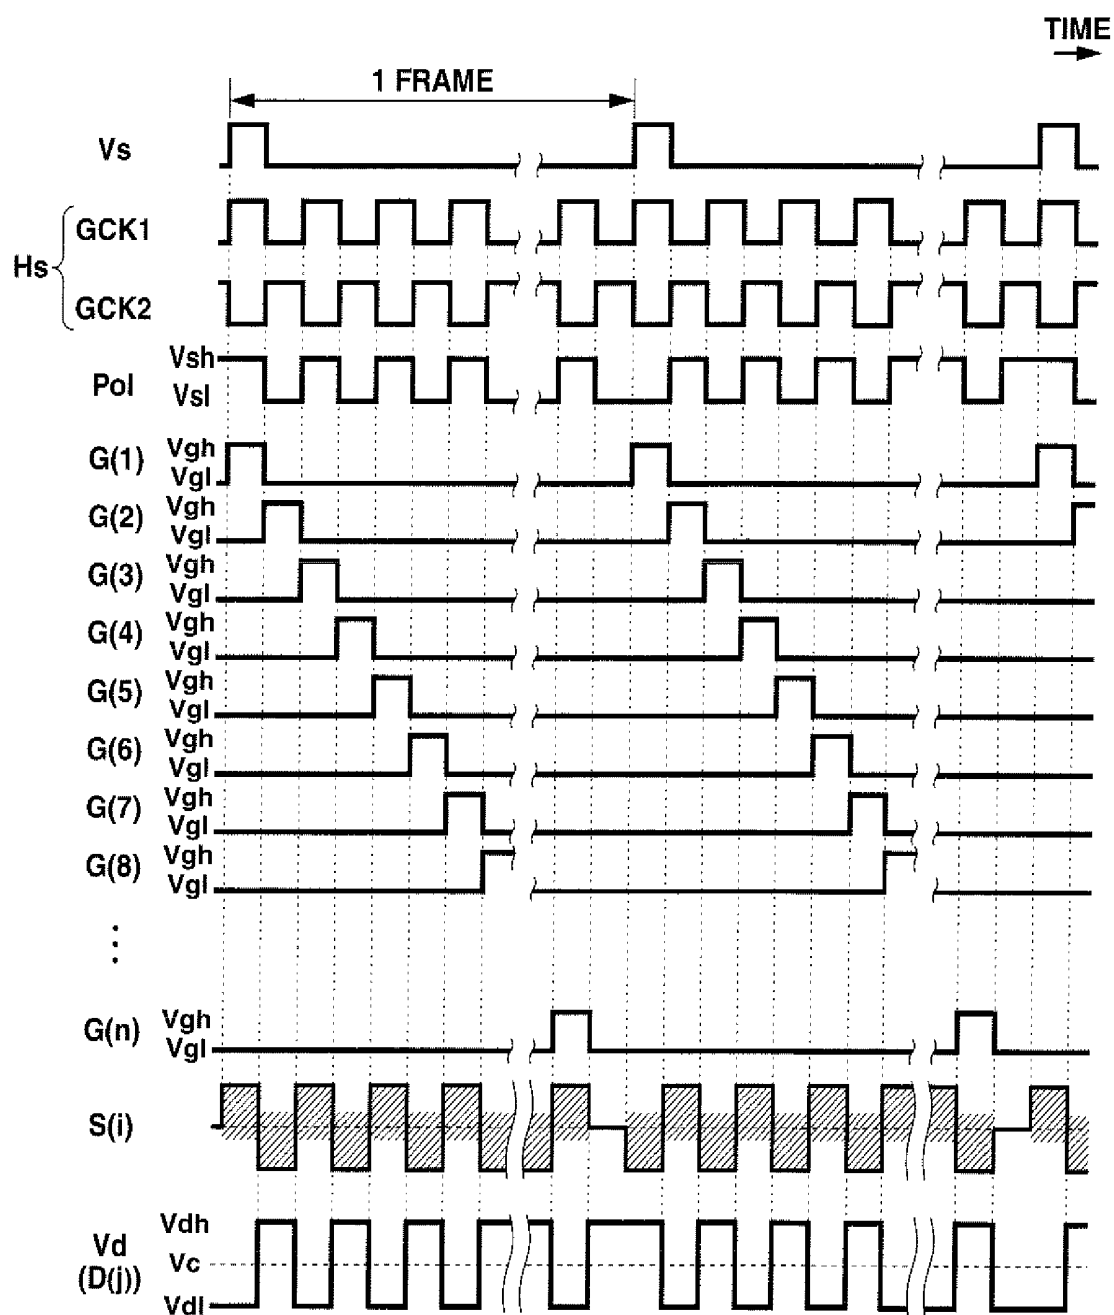

**FIG. 7**

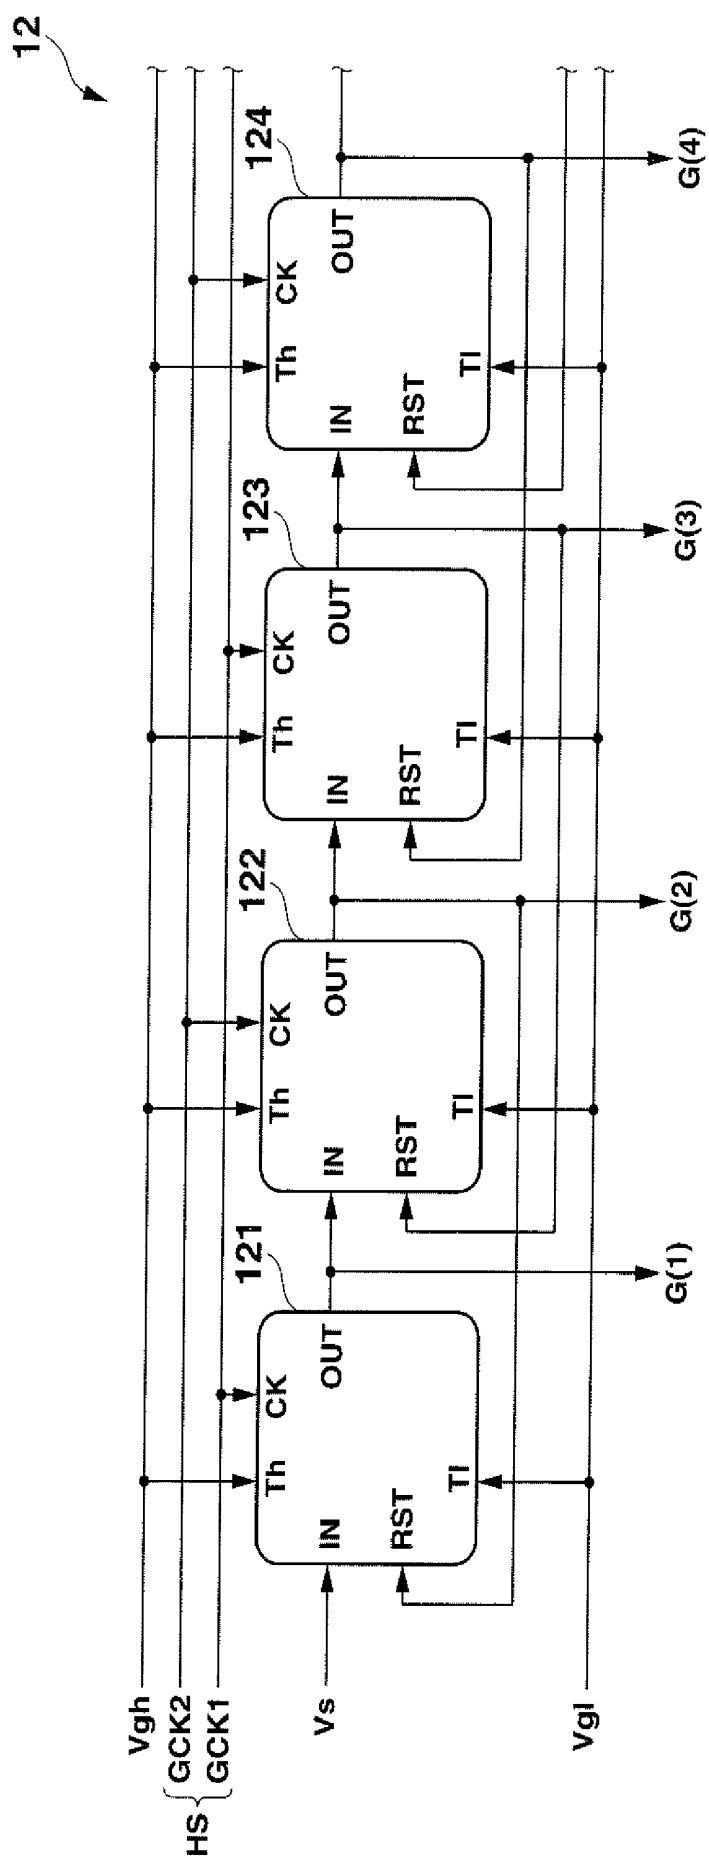


FIG.8



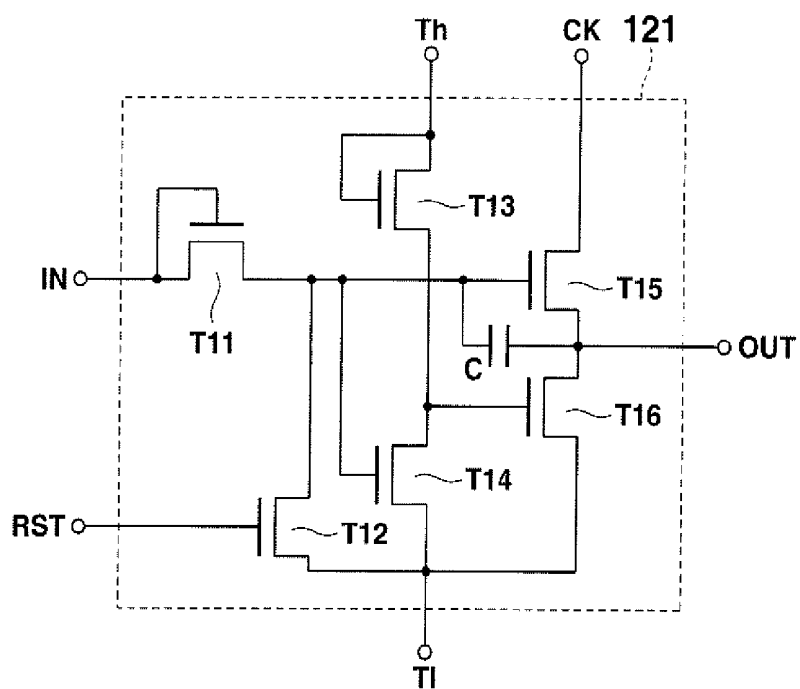


FIG.9




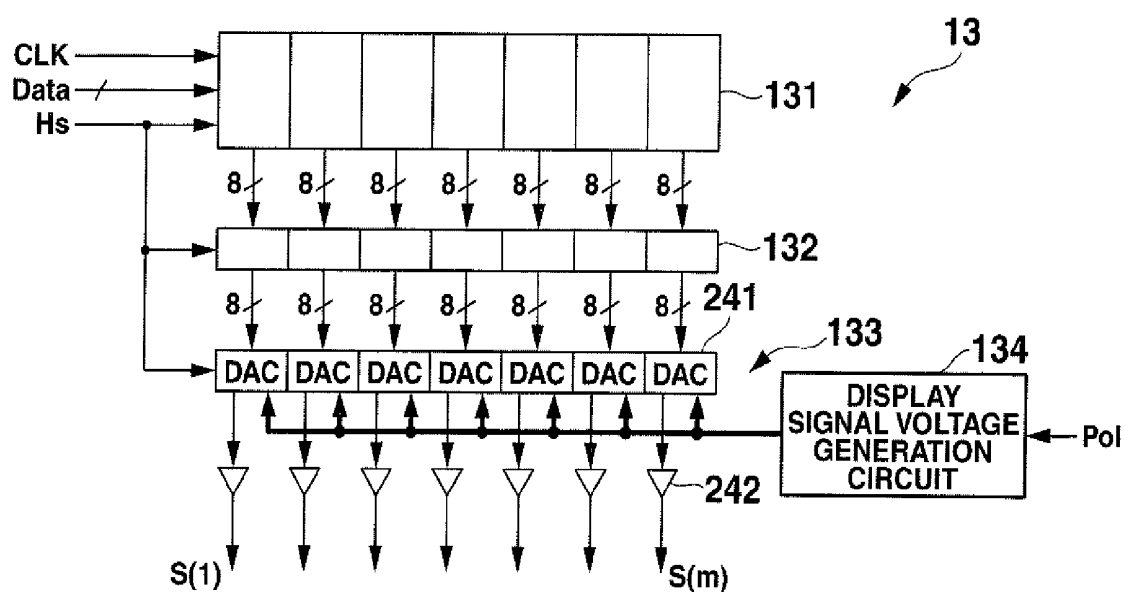


**FIG.11**

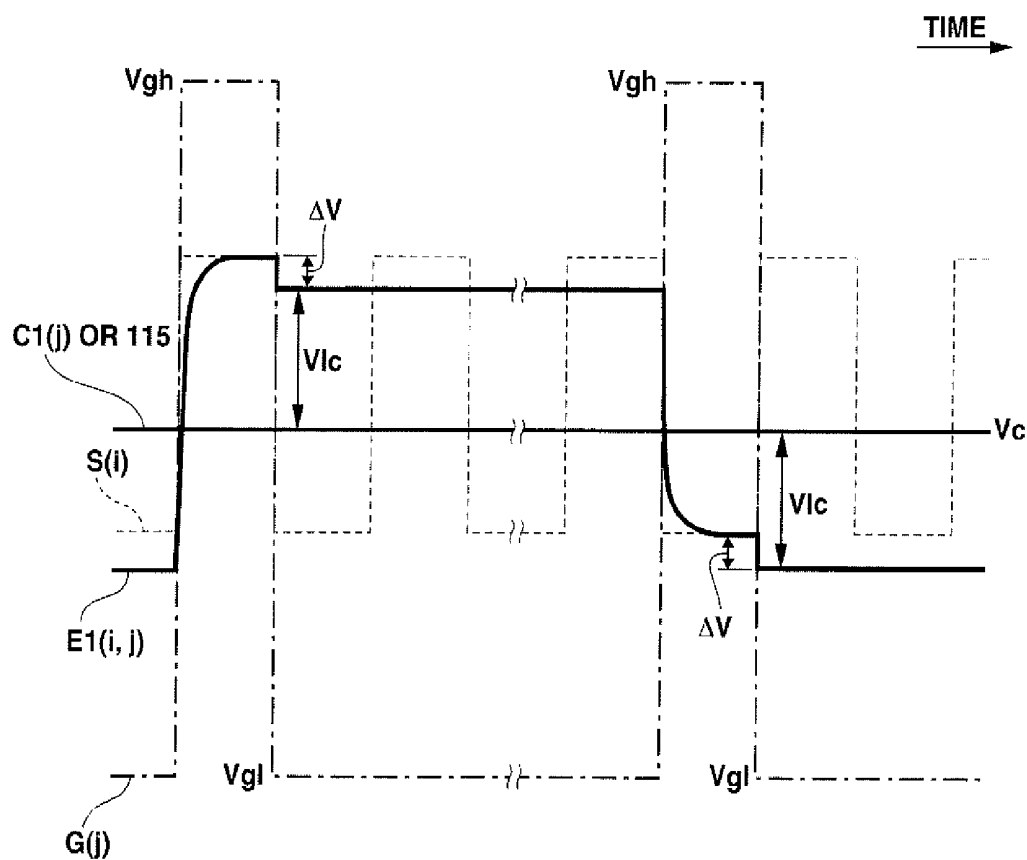


**FIG.12**

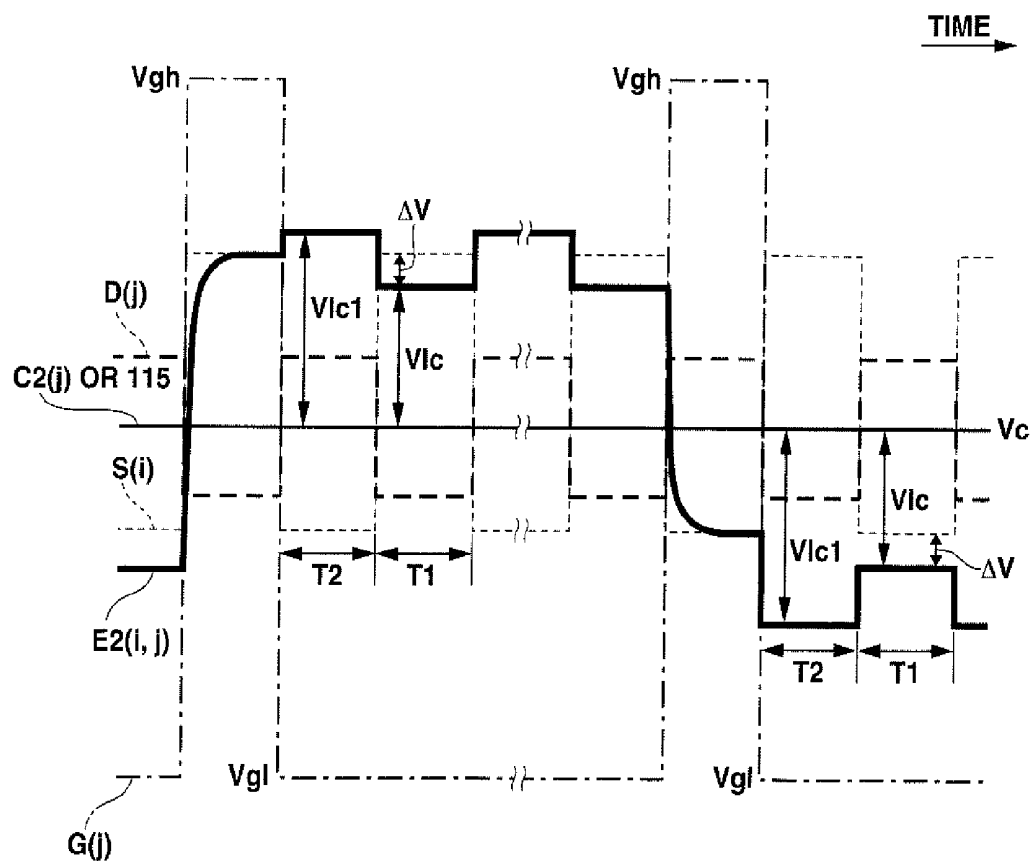


**FIG.13**

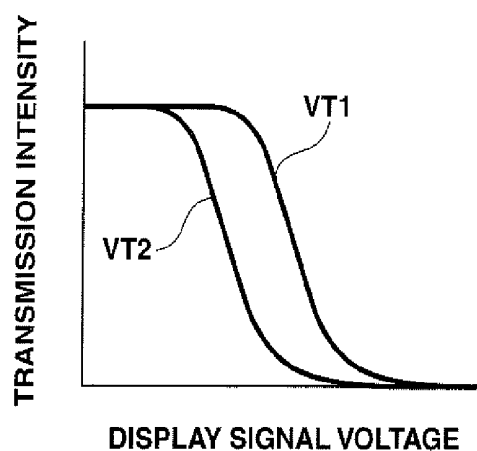



**FIG.14A**

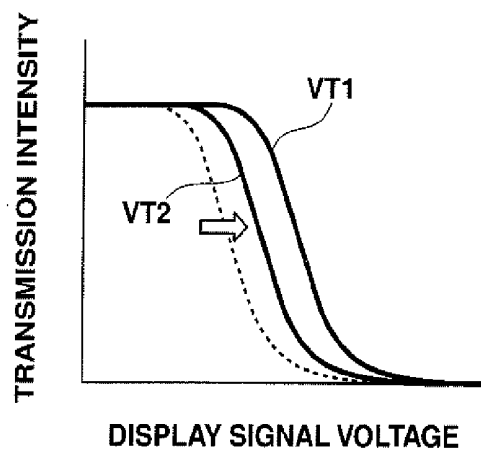



**FIG.14B**

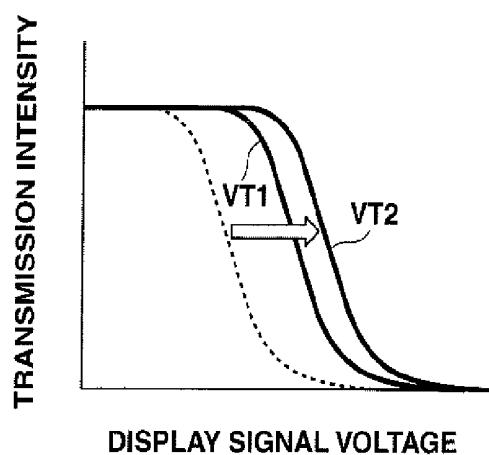

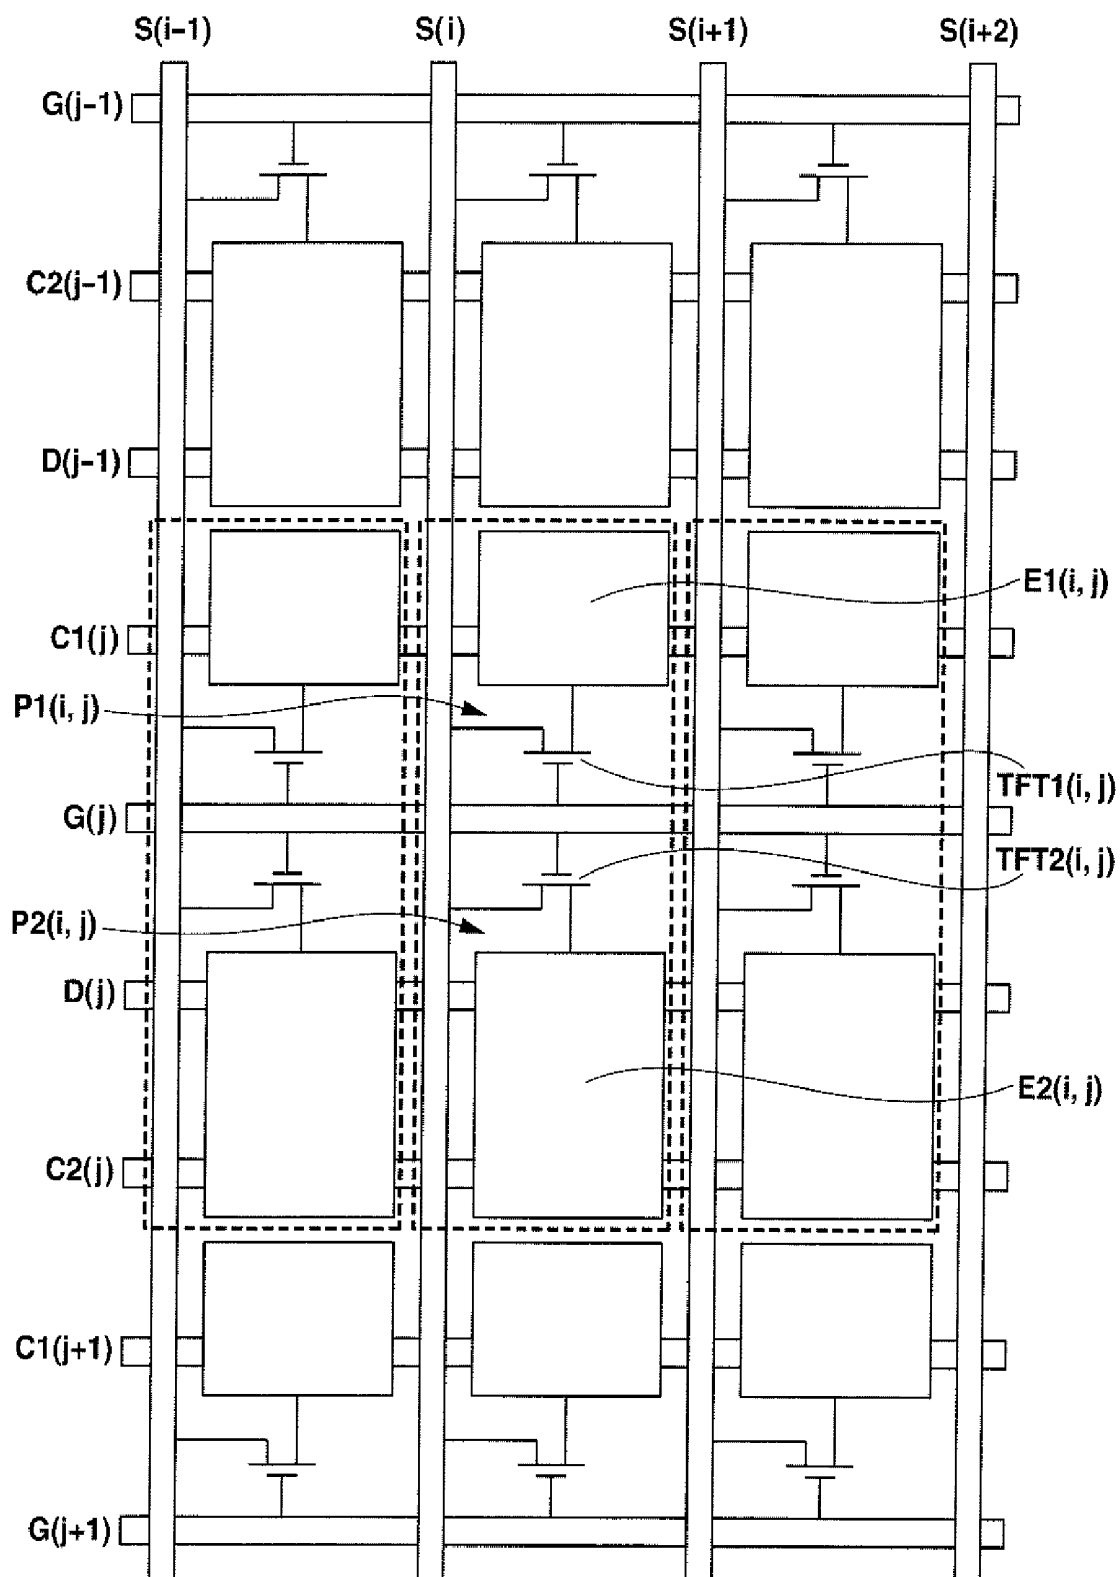
**FIG.15**

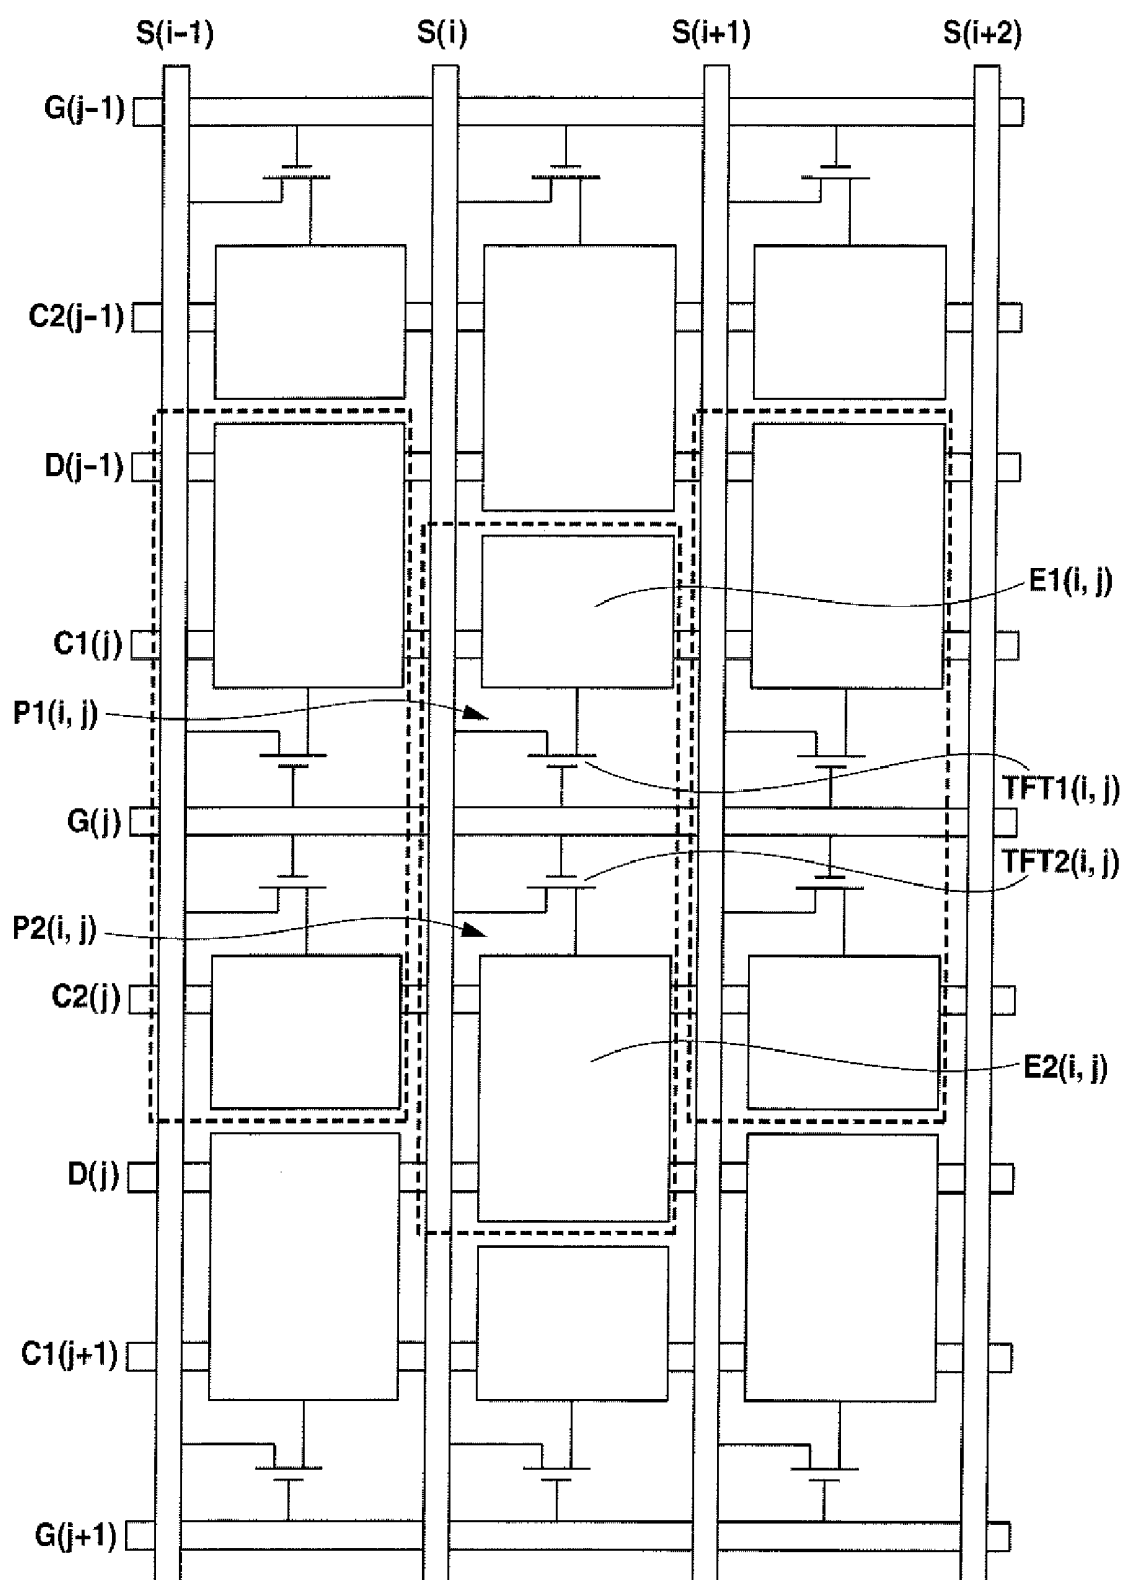**FIG.16**

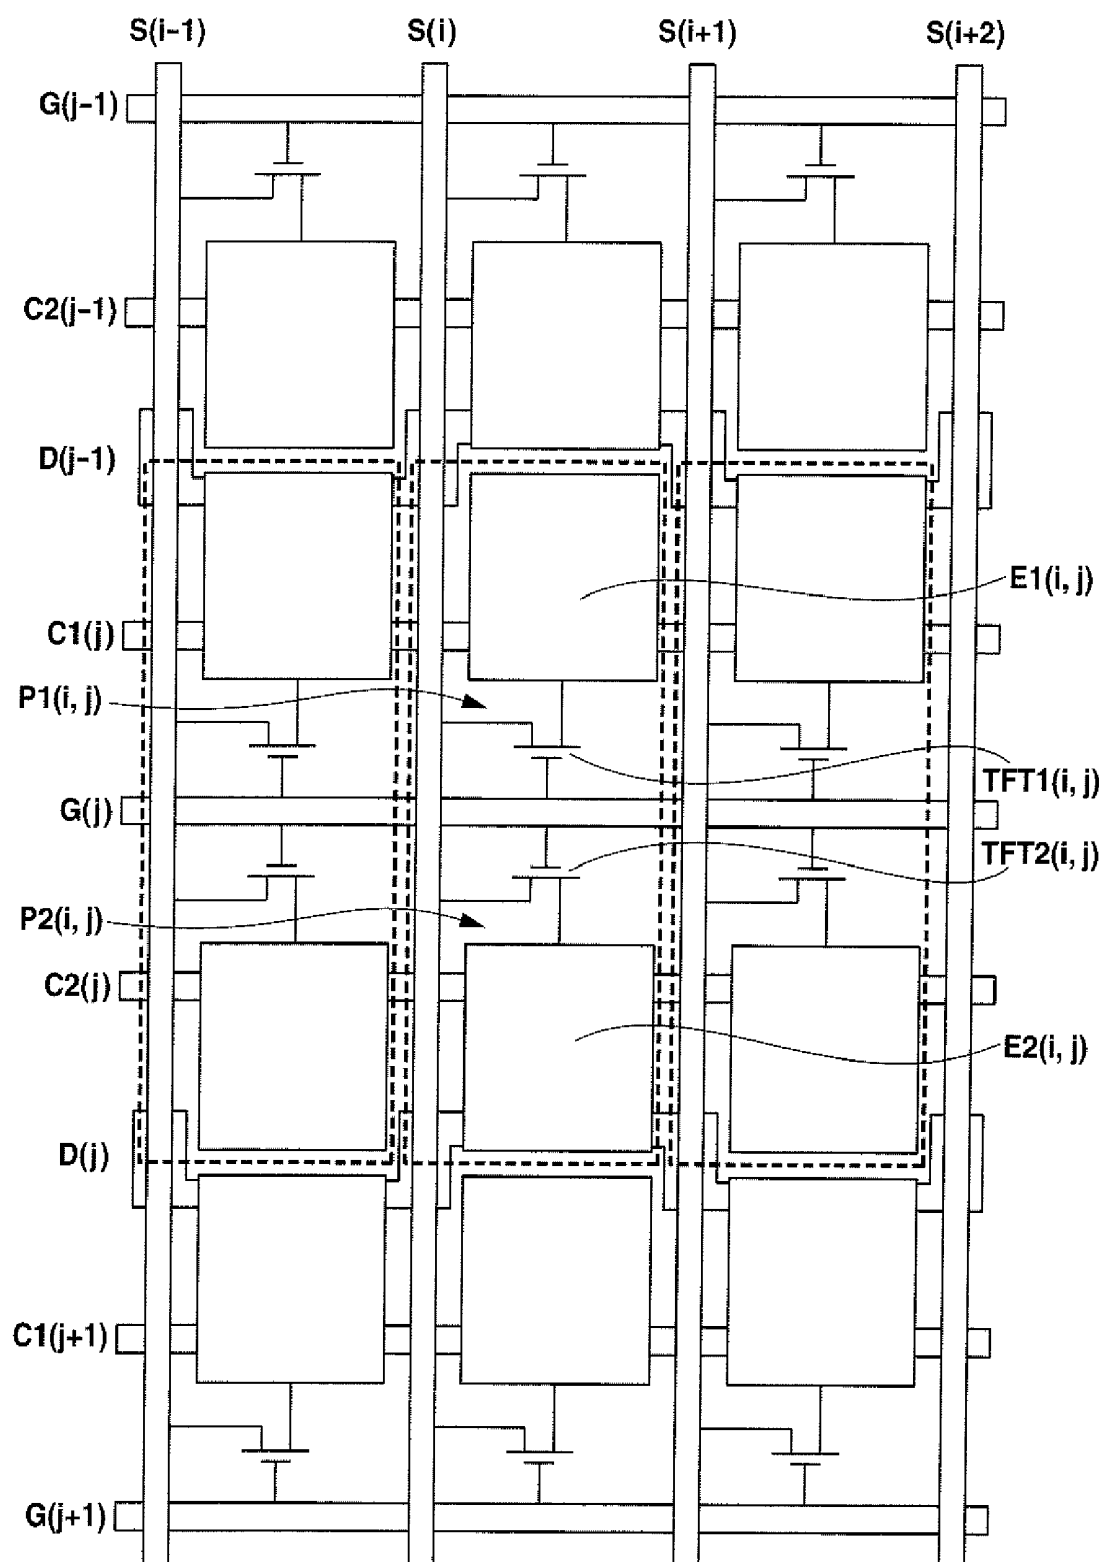**FIG.17**

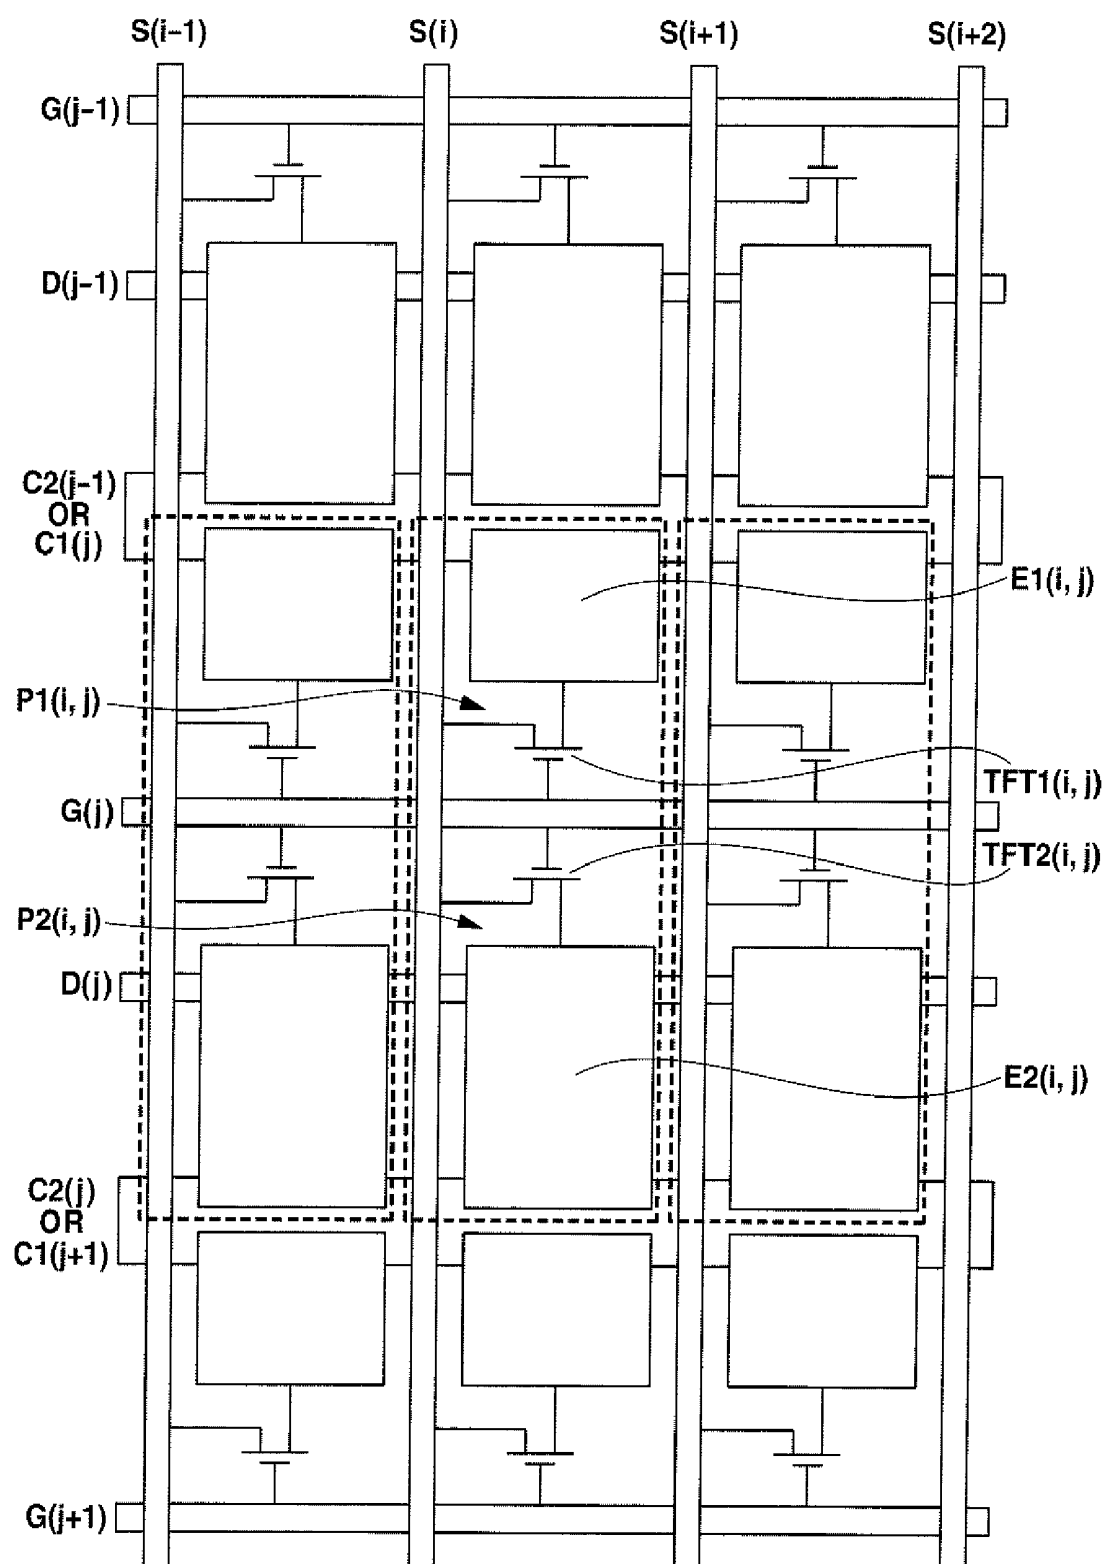**FIG.18**

**FIG.19**

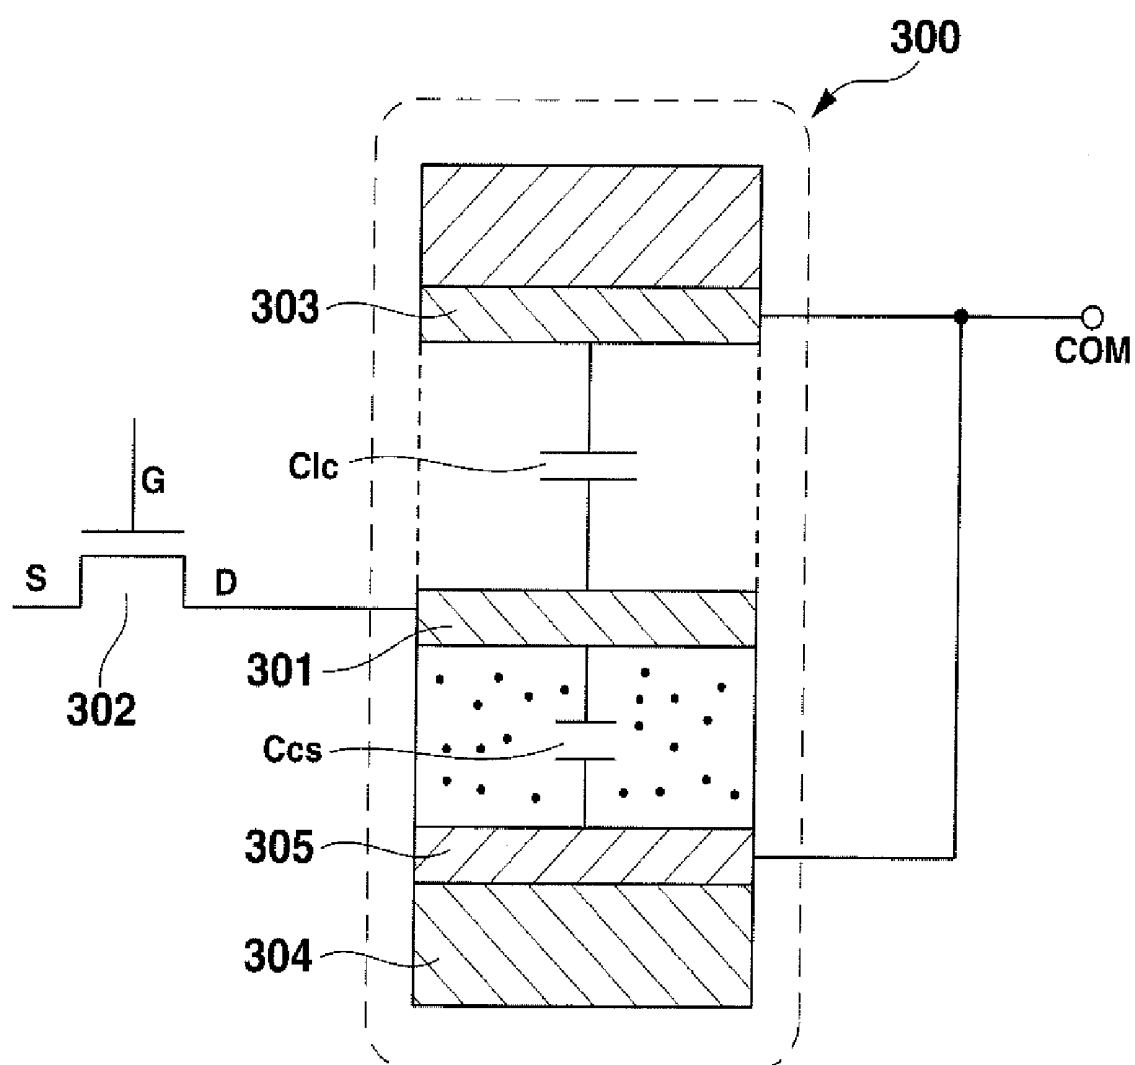

## LIQUID CRYSTAL DISPLAY DEVICE

[0001] This application is based upon and claims the benefit of priority from the prior Japanese Patent Application No. 2008-183219, filed Jul. 14, 2008, the entire contents of which are incorporated herein by reference.

### BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display device having pixels equipped with first sub-pixels and second sub-pixels whose pixel electrodes are separated from each other.

[0004] 2. Description of the Related Art

[0005] With conventional liquid crystal display devices, a voltage is applied to a liquid crystal through switching devices such as thin film transistors (TFT) and others disposed in pixels.

[0006] FIG. 19 is a view schematically showing a pixel 300 of a conventional liquid crystal display device. A pixel electrode (Pix) 301 is charged to a source potential via a transistor 302. A common voltage (Vcom) is applied to a common electrode (COM) 303, and the potential difference between the common electrode 303 and the pixel electrode 301 is applied to the liquid crystal as a voltage (Vlc). In this case, the liquid crystal sandwiched by the common electrode 303 and the pixel electrode 301 forms a liquid crystal capacitance Clc, whereas a solid dielectric material sandwiched by the pixel electrode 301 and an auxiliary capacitance line 305 forms an auxiliary capacitance Ccs.

[0007] Fig The auxiliary capacitance Ccs is formed in parallel with the liquid crystal capacitance Clc. At the same time, since the auxiliary capacitance line 305 is connected in a way that allows the same potential as the common electrode 303 to be applied, the potential fluctuation that occur at the pixel electrode 301 due to a gate potential fluctuation or the leak current at off state of the transistor 302 is reduced. To prevent an image burn-in and electrolysis of the liquid crystal, the liquid crystal display device is ac-driven that the polarity of the voltage is applied to the liquid crystal to be switched at specified intervals.

[0008] There is a well-known technique, for example, that a pixel of a liquid crystal device is divided into multiple regions and different voltages are applied to each region to decrease the dependence of display status on viewing angles, as disclosed by Japanese Patent Laid Open Applications, JP H7-028091A (1995) and JP H8-015723A (1996).

[0009] Specifically, JP H7-028091A discloses a liquid crystal display device that a TFT is connected to any one of the divided pixel electrodes, and effective voltages at various levels are applied to multiple regions within the pixels of the liquid crystal by applying the voltage to the pixel electrode connected to the TFT to other pixel electrodes via a capacitance formed between the relevant pixel electrode.

[0010] JP H8-015723A discloses an active matrix liquid crystal display that its common electrode is disposed opposite to a pixel electrode connected to a TFT and is divided into multiple regions. By applying different voltages to each region, effective voltages at various levels are applied to the liquid crystal of a plural region in a pixel.

[0011] However, in the liquid crystal display device disclosed by JP H7-028091A, if the capacitances formed between the pixel electrode connected to the TFT and other

pixel electrodes vary due to the difference in thickness of dielectric material (insulation film) for example, a problem arises that the viewing-angle dependences vary among plural liquid crystal display device from device.

[0012] On the other hand, in the active matrix liquid crystal display disclosed by JP H8-015723A, since electrode patterning on the pixel size level must be performed on both substrates constituting a liquid crystal panel, it increases the number of manufacturing processes. Furthermore, since high laminating accuracy is required in laminating two substrates, thus inducing a problem that the yielding was lowered.

### SUMMARY OF THE INVENTION

[0013] Accordingly, an object of the present invention is directed to provide a liquid crystal display device whose viewing-angle dependence, which varies from device to device, can be corrected easily without increasing the number of manufacturing processes, and even after liquid crystal panels have been manufactured, thus solving the problems of conventional liquid crystal display devices.

[0014] One of the preferable embodiments of the present invention provides a liquid crystal display device with multiple pixels provided therein, comprising: a first sub-pixel provided for each of said pixels and including, a first liquid crystal capacitance formed with a liquid crystal sandwiched between a common electrode and a first pixel electrode, and a first auxiliary capacitance formed with a solid dielectric material sandwiched between said first pixel electrode and a first auxiliary capacitance electrode; a second sub-pixel disposed adjacent to said first sub-pixel for each of said pixels and including, a second liquid crystal capacitance formed with a liquid crystal sandwiched between said common electrode and a second pixel electrode, a second auxiliary capacitance formed with a solid dielectric material sandwiched between said second pixel electrode and a second auxiliary capacitance electrode, and a step-up capacitance formed with a solid dielectric material sandwiched between said second pixel electrode and a step-up capacitance electrode; a first voltage application means for applying a common first voltage to said common electrode, said first auxiliary capacitance electrode, and said second auxiliary capacitance electrode; and a second voltage application means for applying a second voltage, which is different from said first voltage, to said step-up capacitance electrode.

[0015] In another aspect, the present invention provides a liquid crystal display device with multiple pixels provided therein, comprising: a first sub-pixel disposed for each of said pixel and including, a first pixel electrode disposed opposite to a common electrode via a liquid crystal layer, and a first auxiliary capacitance electrode disposed opposite to the first pixel electrode via an insulating layer; a second sub-pixel disposed adjacent to said first sub-pixel for each of said pixels and including, a second pixel electrode disposed opposite to said common electrode via a liquid crystal layer, a second auxiliary capacitance electrode disposed opposite to said second pixel electrode, and a step-up capacitance electrode, a first voltage application means for applying a common first voltage to said common electrode, said first auxiliary capacitance electrode, and said second auxiliary capacitance electrode; and a second voltage application means for applying a second voltage, which is different from said first voltage, to said step-up capacitance electrode.

[0016] According to the present invention, the viewing-angle dependence, which varies from device to device, can be

corrected easily without increasing the number of manufacturing processes of a liquid crystal display device, and even after liquid crystal panels have been manufactured.

[0017] Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out hereinafter.

#### BRIEF DESCRIPTION OF THE DRAWING

[0018] The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention, and together with the general description given above and the detailed description of the embodiments given below, serve to explain the principles of the invention.

[0019] In the drawings:

[0020] FIG. 1 is a block diagram illustrating a structure of a liquid crystal display device according to an embodiment of the present invention;

[0021] FIG. 2 is a drawing illustrating a cross-sectional area of a liquid crystal display device according to an embodiment of the present invention;

[0022] FIG. 3 is a drawing illustrating an equivalent circuit of a pixel;

[0023] FIG. 4 is a magnified plan view of a pixel;

[0024] FIG. 5A is a cross-sectional view of the pixel in FIG. 4 taken along a line X-X';

[0025] FIG. 5B is a cross-sectional view of the pixel in FIG. 4 taken along a line Y-Y';

[0026] FIG. 6 is a chart illustrating scanning signals and a common voltage;

[0027] FIG. 7 is a block diagram illustrating a configuration of a scanning signal line drive circuit;

[0028] FIG. 8 is a block diagram illustrating a configuration of a holding circuit;

[0029] FIG. 9 is a block diagram illustrating a configuration of a data signal line drive circuit;

[0030] FIG. 10 is a block diagram illustrating a configuration of a display signal voltage generation circuit;

[0031] FIG. 11 is a drawing illustrating a voltage to be applied to the liquid crystal at a first sub-pixel;

[0032] FIG. 12 is a drawing illustrating a voltage to be applied to the liquid crystal at a second sub-pixel;

[0033] FIG. 13 is a drawing illustrating the relationship between display signal voltage and transmission intensity between sub-pixels in each pixel;

[0034] FIG. 14A is a drawing illustrating the change of relationship between display signal voltage and transmission intensity between sub-pixels in each pixel, with the step-up voltage of small oscillation amplitude;

[0035] FIG. 14B is a drawing illustrating the change of relationship between display signal voltage and transmission intensity between sub-pixels in each pixel, with the inversed phase of step-up voltage;

[0036] FIG. 15 is a partially magnified plan view illustrating a first example of the layout of first and second sub-pixels in a pixel;

[0037] FIG. 16 is a partially magnified plan view illustrating a second example of the layout of first and second sub-pixels in a pixel;

[0038] FIG. 17 is a partially magnified plan view illustrating a third example of the layout of first and second sub-pixels in a pixel;

[0039] FIG. 18 is a partially magnified plan view illustrating a fourth example of the layout of first and second sub-pixels in a pixel;

[0040] FIG. 19 is a drawing schematically illustrating a structure of a pixel of a conventional liquid crystal display device.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0041] Hereinafter, various embodiments of the present invention will be described in detail with reference to the figures in which like reference characters are used to designate like or corresponding components.

[0042] As shown in FIG. 1, a liquid crystal display device 1 according to the present invention comprises, for example, an image memory 10 for temporarily storing image data input from outside, a display panel 11 for displaying an image based on the image data stored in the image memory 10, a scanning signal line drive circuit 12 for scanning signal lines of the display panel 11, a data signal line drive circuit 13 for providing a display signal voltage to the data signal lines of the display panel 11 based on an image data, a common voltage generation circuit 14 for applying a specified voltage to a common electrode and auxiliary capacitance lines of the display panel 11, a step-up voltage generation circuit 15 for applying voltage for increasing pixel voltage to step-up capacitance lines of the display panel 11, an inherent information storage unit 16 in which a value of the voltage to be applied by the step-up voltage generation circuit 15 has been stored, and a control unit 17 that outputs various control signals to synchronize each drive unit, whose operation will be described in detail later.

[0043] As shown in FIG. 2, the display panel 11 is comprised of a pair of substrates 112 and 113 which are disposed opposite to each other and adhered with a sealing agent 111, and a liquid crystal LC is sandwiched between the substrates 112 and 113. One of the substrates 112 comprises multiple scanning signal lines extending in the horizontal direction ("n" scanning signal lines, for example), multiple auxiliary capacitance lines also extending in the horizontal direction ("nx2" auxiliary capacitance lines, for example), multiple step-up capacitance lines also extending in the horizontal direction ("n" step-up capacitance lines, for example), and multiple data signal lines extending in the vertical direction ("m" data signal lines, for example) and a pixel P (i, j) as shown in FIGS. 3 and 4 is disposed on the substrate 112 adjacent at each intersections of a scanning signal line G (j) and a data signal line S (i) (i=1, 2, 3, . . . , m, and j=1, 2, 3, . . . , n). A common electrode 115 having a common electric potential at each pixel P (i, j) is disposed on the other substrate 113 that faces substrate 112. For example, a transparent electrode is disposed on a surface of the substrate 113 opposing to substrate 112 to cover the entire surface.

[0044] At each pixel P (i, j), a first sub-pixel P1 (i, j) and a second sub-pixel P2 (i, j) are disposed.

[0045] At the first sub-pixel P1 (i, j), a first pixel electrode El (i, j) and a TFT1 (i, j) as a first switching device, etc. are disposed. The first pixel electrode El (i, j) is connected to a drain electrode of TFT1 (i, j), the data signal line S (i) is connected to a source electrode of TFT1 (i, j), and a scanning signal line G (j) is connected to a gate electrode of TFT1 (i, j).

A first liquid crystal capacitance  $C_{lc1}(i, j)$  is formed by the common electrode **115**, the first pixel electrode  $E1(i, j)$ , and the liquid crystal filled between them. An auxiliary capacitance line  $C1(j)$  is disposed on the lower side of the first pixel electrode  $E1(i, j)$  via a solid dielectric material so that a first auxiliary capacitance  $C_{cs1}(i, j)$  is formed by the first pixel electrode  $E1(i, j)$ , the dielectric material, and the auxiliary capacitance line  $C1(j)$ .

**[0046]** Meanwhile, in the second sub-pixel  $P2(i, j)$ , a second pixel electrode  $E2(i, j)$  separated from the first pixel electrode  $E1(i, j)$ , TFT2  $(i, j)$  as a second switching device etc. are disposed. The second pixel electrode  $E2(i, j)$  is connected to a drain electrode of TFT2  $(i, j)$ , the data signal line  $S(i)$  is connected to the source electrode of TFT2  $(i, j)$ , and the scanning signal line  $G(j)$  is connected to a gate electrode of TFT2  $(i, j)$ . A second liquid crystal capacitance  $C_{lc2}(i, j)$  is formed by the common electrode **115**, the second pixel electrode  $E2(i, j)$ , and the liquid crystal filled between them. An auxiliary capacitance line  $C2(j)$  and a step-up capacitance line  $D(j)$  are disposed on the lower side of the second pixel electrode  $E2(i, j)$  via a solid dielectric material. A second auxiliary capacitance  $C_{cs2}(i, j)$  is formed by the second pixel electrode  $E2(i, j)$ , the dielectric material, and the auxiliary capacitance line  $C2(j)$ . Also, a step-up capacitance  $C_d(i, j)$  is formed by the second pixel electrode  $E2(i, j)$ , the dielectric material, and the step-up capacitance line  $D(j)$ .

**[0047]** Each pixel  $P(i, j)$  is configured to allow display status to be controlled by changing the orientation of the liquid crystal disposed between the pixel electrode and the common electrode **115** of each sub-pixel,  $P1(i, j)$  and  $P2(i, j)$ , based on the potential difference between the pixel electrode and the common electrode **115**.

**[0048]** The common electrode **115** and the auxiliary capacitance lines  $C1(j)$  and  $C2(j)$  are electrically connected outside the display area **114**, which allows an applying a common voltage  $V_c$ . A step-up voltage  $V_d$ , which is different from the common voltage  $V_c$ , is applied to the step-up capacitance lines  $D(j)$ .

**[0049]** Hereinafter, specific configuration of the cross-sectional area of each pixel  $P(i, j)$  will be described by referring to FIGS. **6A** and **6B**.

**[0050]** The scanning signal line  $G(j)$  including a gate electrode **51** is disposed on one of the substrates **112**. The auxiliary capacitance lines  $C1(j)$  and  $C2(j)$  and step-up capacitance line  $D(j)$  are disposed on the same layer as the scanning signal line  $G(j)$ . In other words, the scanning signal line  $G(j)$ , auxiliary capacitance lines  $C1(j)$  and  $C2(j)$ , and step-up capacitance line  $D(j)$  are formed at a same time. A gate insulating film **52** is disposed on the whole surfaces of these lines. An intrinsic amorphous silicon semiconducting thin film **53** is disposed on the gate insulating film **52**. A channel protective film **54** is disposed on the upper surface of approximately center of semiconducting thin film **53**. An n-type amorphous silicon contact layers **55** and **56** are disposed on both sides of the channel protective film **54** and the semiconducting film **53** covering the upper face of the channel protective film **54** on both sides.

**[0051]** A drain electrode **57** is disposed on an upper face of one of the contact layers **55**. The data signal line  $S(i)$  including a source electrode **58** is disposed on an upper face of the other contact layer **56** and an upper face of the gate insulating film **52**.

**[0052]** Thus, the TFT1  $(i, j)$  is configured with the gate electrode **51**, the gate insulating film **52**, the semiconducting

thin film **53**, the channel protective film **54**, the contact layers **55** and **56**, the drain electrode **57**, and the source electrode **58**. TFT2  $(i, j)$  is configured in the same way as the TFT1  $(i, j)$ .

**[0053]** A planarizing film **59** made of an insulating material is disposed over the entire surface of the gate insulating film **52** including TFT1  $(i, j)$ , TFT2  $(i, j)$ , etc. A contact hole **60** is formed in the specified portion of the planarizing film **59** corresponding to the drain electrode **57**. The pixel electrodes  $E1(i, j)$  and  $E2(i, j)$  both of which are consisting of ITO are disposed on the specified portions of the planarizing film **59**. The pixel electrodes  $E1(i, j)$  and  $E2(i, j)$  are connected to the drain electrodes **57** of the relevant TFT via the contact hole **60**.

**[0054]** A portion of the auxiliary capacitance line  $C1(j)$  that overlaps with the first pixel electrode  $E1(i, j)$  serves as an auxiliary capacitance electrode. This overlapping portion forms the first auxiliary capacitance  $C_{cs1}(i, j)$  as described previously. Meanwhile, a portion of the auxiliary capacitance line  $C2(j)$  that overlaps with the second pixel electrode  $E2(i, j)$  serves as an auxiliary capacitance electrode. As described previously, this overlapping area forms the second auxiliary capacitance  $C_{cs2}(i, j)$ . Furthermore, a portion of the step-up capacitance line  $D(j)$  that overlaps with the second pixel electrode  $E2(i, j)$  serves as a step-up capacitance electrode. This overlapping portion forms a step-up capacitance  $C_d(i, j)$  as described previously. Each pixel  $P(i, j)$  is configured to ensure that a size of the first auxiliary capacitance  $C_{cs1}(i, j)$  is equal to that of the second auxiliary capacitance  $C_{cs2}(i, j)$ .

**[0055]** As shown in FIG. **6**, the scanning signal line drive circuit **12** outputs scanning signals to each scanning signal line  $G(j)$  according to vertical synchronizing signal  $V_s$  output from a control unit **17** and horizontal synchronizing signal  $H_s$  based on a first gate clock signals  $GCK1$  and a second gate clock signals  $GCK2$ . The first gate clock signals  $GCK1$  and the second gate clock signals  $GCK2$  are rectangular signals having an opposite phase to each other.

**[0056]** As shown in FIG. **7**, the main part of the scanning signal line drive circuit **12** is roughly configured with holding circuits **121**, **122**, **123**, **124**, . . . connected in series of the number equivalent to the number of the scanning signal lines ("n" stages). Each holding circuit **121**, etc. comprises: an input terminal IN, an output terminal OUT, a reset terminal RST, a clock signal input terminal CK, a high potential power input terminal Th, and a low potential power input terminal Tl. The vertical synchronizing signal  $V_s$  is supplied to the input terminal IN of the holding circuit **121** as the first stage input signal. The output signals from the holding circuit in the previous stage are supplied to the input terminal IN of the holding circuit in the second and subsequent stages. The output signals from the holding circuit in the next stage are supplied to the reset terminal RST of each holding circuit. Here, separate reset signals END or the output signals from the holding circuit **121** in the first stage may be supplied to the reset terminal RST of the holding circuit in the final stage (not shown, "y"th stage, for example).

**[0057]** Furthermore, the first gate clock signal  $GCK1$  is supplied to clock signal input terminals CK of the holding circuit in the odd-numbered stages. The second gate clock signal  $GCK2$  having opposite phase to the first gate clock signal  $GCK1$  is supplied to the clock signal input terminals CK of the holding circuit in the even-numbered stages. A predetermined high voltage  $V_{gh}$  is supplied to the high-potential power input terminal Th of each holding circuits,

whereas a predetermined low voltage  $V_{gl}$  is supplied to the low-potential power input terminal T1 of each holding circuit.

[0058] As shown in FIG. 8, each holding circuit 121, 122, 123, 124, . . . is provided with six MOS type Field Effect Transistors (hereinafter referred to as MOS transistors) T11 to T16 and a capacitance C.

[0059] As shown in FIG. 6, such scanning signal line drive circuit 12 starts scanning in the relevant frame in response to the vertical synchronizing signal  $V_s$ , and performs voltage output, which is based on the first gate clock signals GCK1 and the second gate clock signals GCK2, from a low-level voltage  $V_{gl}$  to a high-level voltage  $V_{gh}$  for a specified period of time starting from the scanning signal line in each of the first stage G (1) up to final stage G (n).

[0060] Specifically, the scanning signal line drive circuit 12 sequentially sets TFT1 (i, j) and TFT2 (i, j) corresponding to the relevant scanning signal line G (j) to ON, and writes the display signal voltage that is output to the data signal line S (i) at that time to the first sub-pixel P1 (i, j) and the second sub-pixel P2 (i, j).

[0061] The data signal line drive circuit 13 outputs display signal voltage corresponding to each data signal line S (i) disposed on the display panel 11 at predetermined timing according to the horizontal synchronizing signal  $H_s$ , the vertical synchronizing signal  $V_s$ , the image data Data, a reference clock signal CLK, and a polarity reversal signal Pol among of which output from the control unit 17.

[0062] As shown in FIG. 9, the functional block of the data signal line drive circuit 13 comprises sampling memories 131, data latch units 132, D/A conversion circuits (DAC) 133, and a display signal voltage generation circuit 134.

[0063] The sampling memories 131 have data storage areas as many as the number of data signal lines S (i). In synchronization with the horizontal synchronizing signal  $H_s$  output from the control unit 17 and the reference clock signal CLK, the sampling memory 131 fetches image data corresponding to each pixel from the image memory 10 sequentially, starting from the data corresponding to the scanning signal line in the previous stage, in units of image data corresponding to the pixel for one scanning signal line (image data for one horizontal period). Specifically, each sampling memory 131 fetches image data corresponding to the relevant scanning signal line, and stores each of the image data fetched in the data storage area corresponding to the relevant scanning signal line S (i). In this case, the image data includes gradation levels to be displayed in each pixel. This gradation levels are displayed by each pixel as 8-bit digital data, for example. This 8-bit digital data is stored in each data storage area.

[0064] The image data of one horizontal period fetched by the sampling memory 131 is transferred from the sampling memory 131 to the data latch unit 132 in response to a request from the data latch unit 132 in the subsequent stage. After a completion of transferring the image data to the data latch unit 132, the sampling memory 131 starts to fetch the image data corresponding to the scanning signal line of the next row for the next horizontal period. This is performed in synchronization with horizontal synchronizing signal  $H_s$ .

[0065] The data latch units 132 obtain image data for one horizontal period collectively from the sampling memories 131 according to horizontal synchronizing signal  $H_s$ , and output the obtained image data to the D/A conversion circuits 133 in the subsequent stage.

[0066] The D/A conversion circuit 133 comprises multiple DAC units 241 and output amplification circuits 242. The display signal voltage supplied from the display signal voltage generation circuit 134 is selected by the DAC units 241, which allows each image data output from the data latch units 132 to be converted into display signal voltages as corresponding analog signals, and then output to the data signal lines S (i) via the output amplification circuits 242.

[0067] At this time, the D/A conversion circuits 133 convert digital image data output from the data latch units 132 into an analog display signal voltage, in response to the polarity reversal signals Pol output from the control unit 17. Specifically, when the polarity reversal signal Pol is in high state  $V_{sh}$ , the D/A conversion circuits 133 perform D/A conversion to allow the image data output from the data latch units 132 to become display signal voltage having positive polarity. On the contrary, when the polarity reversal signal Pol is in low state  $V_{sl}$ , the D/A conversion circuits 133 perform D/A conversion to allow the image data output from the data latch units 132 to become display signal voltage having negative polarity. In other words, the D/A conversion circuits 133 perform D/A conversion to allow the voltage applied to the liquid crystal to have positive polarity when the polarity reversal signal Pol is in high state  $V_{sh}$ , and allow the voltage applied to the liquid crystal to have negative polarity when the polarity reversal signal Pol is in low state  $V_{sl}$ .

[0068] As shown in FIG. 10, the display signal voltage generation circuit 134 comprises: a pair of ladder resistors 31 and 32, multiple switches SY0, SY1, . . . , SY255, and switches SYa and SYb etc. Each pair of ladder resistors 31 and 32 divides the voltage between terminal 255 (voltage  $V_H$ ) and terminal 256 (voltage  $V_L$ ) using multiple resistors suitable for the bit count p of the image data (8 bits in the embodiment of the present invention). The multiple switches SY0, SY1, . . . , SY255 serves for selecting a desired ladder resistor of the pair. The switches SYa and SYb serve for switching the polarity of the voltage to be applied to the ladder resistors in response to the ladder resistor selected. The display signal voltage generation circuit 134 selects desired ladder resistors by the operation of each switch SY0, SY1, . . . , SY255 based on the polarity reversal signal Pol output from the control unit 17. At the same time, the display signal voltage generation circuit 134 switches the polarity of the voltage to be applied to the ladder resistors by the operation of the switches SYa and SYb, and applies each voltage divided by the ladder resistors to the voltage application lines V0, V1, . . . , V255 as display signal voltage at a corresponding gradation level.

[0069] Specifically, when the polarity reversal signal Pol from the control unit 17 is at high level  $V_{sh}$ , the ladder resistor 31 is selected by the operation of each switch SY0, SY1, . . . , SY255. In addition, when the terminal 255a (voltage  $V_H$ ) and the terminal 256b (voltage  $V_L$ ) are selected by the operation of the switches SYa and SYb, the voltage between the terminals 255a (voltage  $V_H$ ) and 256b (voltage  $V_L$ ) is divided by multiple resistors RA1, RA2, . . . , RA254 suitable for the bit count of the image data (8 bits in the embodiment of the present invention). Each voltage is applied to the voltage application lines V0, V1, . . . , V255 as display signal voltage that allows a voltage having positive polarity to be applied to the liquid crystal, for example.

[0070] When the polarity reversal signal Pol from the control unit 17 is at low level  $V_{sl}$ , the ladder resistor 32 is selected by the operation of each switch SY0, SY1, . . . , SY255. In

addition, when the terminals **256a** (voltage VL) and **255b** (voltage VH) are selected by the operation of the switches SYa and SYb, the voltage between the terminals **256a** (voltage VL) and the terminal **255b** (voltage VH) is divided by multiple resistors RB1, RB2, . . . , RB254 suitable for the bit count of the image data (8 bits in the embodiment of the present invention), and each voltage is applied to voltage application lines V0, V1, . . . , V255 as display signal voltage that allows a voltage having negative polarity to be applied to the liquid crystal, for example.

[0071] Each DAC unit **241** comprises: a decoder **243** and, selector switches SW0, SW1, . . . , SW255 which are connected to voltage application lines V0, V1, . . . , V255. In the decoder **243**, the image data output from the data latch units **152** are input and decoded, and data signals that satisfy the number of gradation levels (i.e. bit count) are output. Each selector switch SW0, SW1, . . . , SW255 is set to ON/OFF according to the data signals output from the decoder **243**. The selected voltage application lines V0, V1, . . . , V255 and a voltage output line SL are connected, and the display signal voltage which is applied to the selected voltage application lines V0, V1, . . . , V255 is supplied to the voltage output line SL. The display signal voltage applied to the voltage output line SL is then supplied to the data signal lines S (i) via the output amplification circuit **242**.

[0072] The common voltage generation circuit **14** applies identical common voltage Vc to the common electrode **115** and each auxiliary capacitance line C1 (j) and C2 (j). Common voltage Vc can be direct voltage, for example.

[0073] The control unit **17** outputs the polarity reversal signal Pol to allow the voltage to be applied to the liquid crystal to have opposite polarities between the pixels corresponding to adjacent scanning signal lines, namely, between the adjacent pixels in the pixel row direction. Thus, the voltage Vlc1 as shown in FIG. **11** is applied to the liquid crystal in the first sub-pixel P1 (i, j) of each pixel P (i, j) over an approximately entire period in one frame. In FIG. **11**,  $\Delta V$  shows a pull-in voltage that is generated when write of display signal voltage into a pixel is completed due to the effect of parasitic capacitance between scanning signal lines and pixel electrodes. It is desirable that a center of amplitude of the common voltage Vc is set to a value shifting the center of amplitude of the display signal voltage by  $\Delta V$  in the direction of generation of  $\Delta V$ .

[0074] The step-up voltage generation circuit **15** applies a step-up voltage Vd to the step-up capacitance lines D (j) based on the polarity reversal signal Pol output from the control unit **17** and the inherent information Inf stored in the inherent information storage unit **16**. A step-up voltage Vd may be a rectangular alternate voltage of the pre-determined frequency. The step-up voltage Vd may be generated according to the polarity reversal signal Pol output from the control unit **17**.

[0075] Specifically, the step-up voltage generation circuit **15** applies step-up voltage Vdl, as shown in FIG. **6**, as the voltage on the negative side with respect to the common voltage Vc when the polarity reversal signal Pol is high level Vsh, and step-up voltage Vdh as the voltage on the positive side with respect to the common voltage Vc when the polarity reversal signal Pol is low level Vsl. That is, the step-up voltage generation circuit **15** applies step-up voltage Vd to the step-up capacitance line D (j) with the rectangular alternate current signal synchronizing to the polarity reversal signal Pol so that its common voltage Vc becomes center voltage.

[0076] FIG. **12** illustrates the voltage applied to a liquid crystal in the second sub-pixel P2 (i,j). During the period T2, the above-mentioned polarity of the voltage applied to the step-up capacitance line D (j) is equal to the polarity of a display signal voltage written in said pixel. In this period T2, the voltage applied to a liquid crystal in the second sub-pixel P2 (i,j) becomes the applied voltage Vc1 higher than the voltage Vc1 applied to a liquid crystal in the first sub-pixel P1 (i,j). On the other hand, during the period T1, in which the above-mentioned polarity of the voltage applied to the step-up capacitance line D (j) differs from the polarity of a display signal voltage written in said pixel, the voltage applied to a liquid crystal in the second sub-pixel P2 (i,j) becomes the applied voltage Vc1, equal to the voltage applied to a liquid crystal in the first sub-pixel P1 (i,j).

[0077] Thus, in each frame, the effective voltage applied to a liquid crystal of the second sub-pixel P2 (i,j) can be made higher than the effective voltage applied to a liquid crystal of the first sub-pixel P1 (i,j) by about  $|V_{lc1} - V_{lc}|/2$ .

[0078] According to the present embodiment, the relationship VT2 between the display signal voltage and transmission intensity in the second sub-pixel P2 (i,j) can be shifted as shown in FIG. **13** with regard to the relationship VT1 between the display signal voltage and transmission intensity in the first sub-pixel P1 (i,j), allowing to obtain the relationship between multiple display signal voltages and transmission intensity in each pixel (i,j), and to improve the viewing-angle dependence in the liquid crystal display device **1**.

[0079] In the meantime, as shown in FIG. **14A**, when the relationship VT2 between the display signal voltage and transmission intensity in the second sub-pixel P1 (i,j) is made approaching closer to the relationship VT1 between the display signal voltage and transmission intensity in the first sub-pixel P1 (i,j), the amplitude width of the step-up voltage Vd may be controlled to be smaller with its center voltage coinciding to common voltage Vc. When the step-up voltage Vd is made direct voltage equal to common voltage Vc, VT1 and VT2 can be made equal. Furthermore, by making the amplitude of the step-up voltage Vd a reverse phase from the beginning, and by controlling its amplitude width to be larger, as shown in FIG. **14B**, the effective voltage in the second sub-pixel P2 (i,j) can be made lower than the effective voltage in the first sub-pixel P1 (i,j).

[0080] Thus, according to the present embodiment, since the relationship between the display signal voltage and transmission intensity can be shifted easily by adjusting the step-up voltage Vd applied to the step-up capacitance lines D (j), the viewing-angle dependence can be improved by simple circuit configuration. Furthermore, the degree of viewing-angle dependence of it can be adjusted.

[0081] For example, after a display panel **11** has been manufactured, differences of viewing-angle dependence among a plural display panels **11** can be minimized by followings configurations. The inherent information storage unit **16** is made to store the value of step-up voltage Vd which can be controlled to the similar extent as the control of viewing-angle dependence of other display panels **11** as the inherent information Inf, and a step-up voltage generation circuit **15** is configured to apply step-up voltage Vd having an amplitude based on the inherent information Inf stored in the relevant inherent information storage unit **16** to the step-up capacitance line D (j).

[0082] In addition, since the step-up voltage generation circuit **15** needs to adjust the amplitude of step-up voltage Vd

only, a simple step-up voltage generation circuit **15** can be configured. If sub-pixels have different data signal lines, and different display signal voltages are applied to each sub-pixel via corresponding data signal lines and TFTs, for example, multiple display signal voltage generation circuits relatively large in size are required to apply different display signal voltages to each sub-pixel as described above. However, according to the embodiment of the present invention, it does not need complex configuration, and the viewing-angle dependence can be adjusted with a simpler circuit configuration compared with configuration mentioned above.

**[0083]** Moreover, since the common electrode **115** need not be separated for each region within a pixel, the number of manufacturing processes does not increase. In addition, since display signal voltage is applied directly to the pixel electrodes of each sub-pixel via corresponding TFTs in the present embodiment, the voltage is applied to the liquid crystal more stably compared with the one in which voltage is applied to the pixel electrodes only via capacitances.

**[0084]** Meanwhile, an EEPROM (Electrically Erasable Programmable Read Only Memory), which is one of non-volatile memories, can be used for an inherent information storage unit **16**. The EEPROM has the state that no information has been written in it i.e. "white" state at the start of manufacturing of a display device **1**. After the completion of manufacturing of liquid crystal display device **1**, predetermined information can be stored in the inherent information storage unit **16** by connecting a system device for writing in an EEPROM to a signal terminal for writing **161** in accordance with the finishing state of the relevant liquid crystal display device **1**.

**[0085]** It is preferable to set the writing voltage  $V_{pp}$  into the inherent information storage unit **16** at a level higher than the reference supply voltage  $V_{cc}$  to be input to the power control circuit for the relevant liquid crystal display device **1** so that the information stored in the inherent information storage unit **16** can be prevented to be erased carelessly by the influence of the reference supply voltage  $V_{cc}$ .

**[0086]** The above embodiment explains a case that the common voltage generating circuit **14** applies direct voltage to the common electrode **115** and each of the auxiliary capacitance lines  $C1(j)$  and  $C2(j)$  as equal common voltage  $V_c$ , but the common voltage  $V_c$  may be a rectangular alternate signal oscillating synchronously with the step-up voltage  $V_d$ . In this case, the amplitude center voltages of the common voltage  $V_c$  and of the step-up voltage  $V_d$  are preferably set to be at an equal voltage level. Furthermore, it is preferable to set this amplitude center voltage to the voltage shifted by  $\Delta V$  in the generation direction of said  $\Delta V$  to the amplitude center voltage of the display signal voltage. In this case, the common voltage  $V_c$  and of the step-up voltage  $V_d$  are preferably in the same phase, and the amplitude of the common voltage  $V_c$  is preferably set to be smaller than that of the step-up voltage  $V_d$ . Thereby, the state can be maintained in which the effective voltage applied to a liquid crystal in the second sub-pixel  $P2(i,j)$  is higher than the effective voltage applied to a liquid crystal in the first sub-pixel  $P1(i,j)$ .

**[0087]** The above embodiment explains a case that the shape and the area of the first pixel electrodes  $E1(i,j)$  in the first sub-pixels  $P1(i,j)$  are the same as those of the second pixel electrodes  $E2(i,j)$  of the second sub-pixels  $P2(i,j)$ . Hereinafter, a typical modification of the first sub-pixels  $P1(i,j)$  in a pixel  $P(i,j)$  and the layout of the first sub-pixels  $P1(i,j)$  will be described.

**[0088]** FIG. **15** is a partially magnified plan view showing the first example of the layout of first and second sub-pixels in pixels  $P(i,j)$ ,  $P1(i,j)$  and  $P2(i,j)$ , respectively. As shown in FIG. **15**, a shape and an area of a first pixel electrode  $E1(i,j)$  and a second pixel electrode  $E2(i,j)$  may differ. In this case, however, the size and shape of each of the first sub-pixels  $P1(i,j)$  are identical, and the size and shape of each of the second sub-pixels  $P2(i,j)$  are also identical. Consequently, two sub-pixels, the first sub-pixel  $P1(i,j)$  disposed on the side of the previous row of the scanning line  $G(j)$ , namely on the side of the  $j-1$  row, and the second sub-pixel  $P2(i,j)$  disposed on the side of the following row of the scanning line  $G(j)$ , namely on the side of the  $j+1$  row, constitute a pixel pattern. This pixel pattern is disposed on all of the intersections between each row and column.

**[0089]** The region enclosed in the broken line represents pixels for one row and three columns. The first sub-pixels  $P1(i,j)$  are disposed on the upper side of the scanning line  $G(j)$  via the first switching devices TFT1( $i,j$ ). The second sub-pixels  $P2(i,j)$  are disposed on the lower side of the scanning line  $G(j)$  via the second switching devices TFT2( $i,j$ ).

**[0090]** In FIG. **15**, each of the first sub-pixels  $P1(i,j)$  is disposed adjacent to the second sub-pixels  $P2(i,j)$ , which are disposed on the lower side of the scanning line  $G(j-1)$  of the pixels  $P(i,j)$  in the previous row. Each of the second sub-pixels  $P2(i,j)$  is disposed adjacent to the first sub-pixels  $P1(i,j)$ , which are disposed on the upper side of the scanning line  $G(j+1)$  of the pixels  $P(i,j)$  in the following row, namely on the upper side of the scanning line  $G(j+1)$  of the following row.

**[0091]** The auxiliary capacitance line  $C1(j)$  for the first pixel  $P1(i,j)$  is disposed on the upper side of the scanning line  $G(j)$  in parallel to the scanning line  $G(j)$ .

**[0092]** The auxiliary capacitance line  $C2(j)$  for the second sub-pixel  $P2(i,j)$  is disposed on the lower side of the scanning line  $G(j)$  in parallel to the scanning line  $G(j)$ . The step-up capacitance line  $D(j)$  of the second sub-pixel  $P2(i,j)$  is disposed on the upper side of the auxiliary capacitance line  $C2(j)$  in parallel to the scanning line  $C2(j)$ .

**[0093]** The above embodiment is a case that the step-up capacitance line  $D(j)$  is disposed on the upper side of the auxiliary capacitance line  $C2(j)$  in the second sub-pixels  $P2(i,j)$  closer to the scanning signal line  $G(j)$ . Unlike the embodiment in FIG. **15**, the auxiliary capacitance line  $C2(j)$  may be disposed on the upper side of the step-up capacitance line  $D(j)$  closer to the scanning line signal  $G(j)$ .

**[0094]** The above embodiment is a case that the layout of the first sub-pixels  $P1(i,j)$  and the second sub-pixels  $P2(i,j)$  is identical between the pixels adjacent to each other in the direction of the length of the scanning signal lines  $G(j)$  and step-up capacitance lines  $D(j)$ . However, as shown in FIGS. **16** and **17** later, the layout of the first sub-pixels  $P1(i,j)$  and the second sub-pixels  $P2(i,j)$  may be reversed between the pixels adjacent to each other in the direction of the length of the scanning signal lines  $G(j)$  and step-up capacitance lines  $D(j)$ .

**[0095]** FIG. **16** is a partially magnified plan view showing the second example of the layout of first and second sub-pixels  $P1(i,j)$  and  $P2(i,j)$ , respectively, in pixels  $P(i,j)$ .

**[0096]** As shown in FIG. **16**, a pixel  $P(i,j)$  comprises a first sub-pixel  $P1(i,j)$ , which has smaller area, and a second sub-pixel  $P2(i,j)$ , which has larger area. The layout of the pixels in the same column as the pixel display  $P(i,j)$ , the layout of  $P(i,j-1)$  and  $P(i,j+1)$  for example, is identical to that of the pixel  $P(i,j)$ . Meanwhile, the layout of the pixels in

the same row as the pixel display  $P(i, j)$ , the layout of  $P(i-1, j)$  and  $P(i+1, j)$  for example, is reversed from that of the pixel  $P(i, j)$ . Specifically, in  $P(i-1, j)$  and  $P(i+1, j)$ , the second sub-pixels  $P2(i-1, j)$  are disposed on the upper side of the scanning line  $G(j)$  via the second switching device TFT2 ( $i-1, j$ ), while the first sub-pixels  $P1(i-1, j)$  are disposed on the lower side of the scanning line  $G(j)$  via the first switching device TFT1 ( $i-1, j$ ).

**[0097]** The auxiliary capacitance line  $C1(j)$  for the first sub-pixel  $P1(i, j)$  and the auxiliary capacitance line  $C2(j)$  for the second sub-pixels  $P2(i-1, j)$  and  $P2(i+1, j)$ , which are disposed on other columns that are adjacent to row  $j$ , are formed to be a common line, and this common line is arranged in parallel to the scanning line  $G(j)$ .

**[0098]** The auxiliary capacitance line  $C2(j)$  for the second sub-pixel  $P2(i, j)$  and the auxiliary capacitance lines  $C1(j)$  for the first sub-pixels  $P1(i-1, j)$  and  $P1(i+1, j)$  disposed on other columns that are adjacent to row  $j$  are formed to be a common line, and this common line is arranged in parallel to the scanning line  $G(j)$ .

**[0099]** The step-up capacitance line  $D(j)$  for the second sub-pixel  $P2(i, j)$  and the step-up capacitance lines  $D(j)$  for the second sub-pixel  $P2(i-1, j)$  and  $P2(i+1, j)$  disposed on other columns that are adjacent to row  $j$  are formed to be a common line, and this common line is arranged in parallel to the scanning line  $G(j)$ .

**[0100]** FIG. 17 is a partially magnified plan view showing the third example of the layout of first and second sub-pixels  $P1(i, j)$  and  $P2(i, j)$ , respectively, in pixels  $P(i, j)$ .

**[0101]** As shown in FIG. 17, the pixel layout is the same as that shown in FIG. 16, except that an area of the first sub-pixels  $P1(i, j)$  and that of the second sub-pixels  $P2(i, j)$  are approximately equal, and that the interconnection wiring of the step-up capacitance line  $D(j)$  is different in the second sub-pixel  $P2(i, j)$ .

**[0102]** The step-up capacitance line  $D(j)$  for the second sub-pixel  $P2(i, j)$  includes the step-up capacitance line  $D(j+1)$ , which is in the columns at left and right (columns  $i-1$  and  $i+1$ ) and in the following row as well as the interconnection wiring portion for the following row of the scanning line  $G(j)$ . In the figure, the interconnection wiring portion is in the shape of a staggered clamp. Consequently, the step-up capacitance line  $D(j)$  of the second sub-pixel  $P2(i, j)$  extends along the second sub-pixel  $P2(i, j)$  of the relevant row and the second sub-pixel  $P2(i, j+1)$  of the following row alternately in the shape of polygonal line in the direction of the scanning line 21 and in the shape of waves by column.

**[0103]** The above embodiment is a case that two auxiliary capacitance lines are disposed for each pixel  $P(i, j)$ . However, as shown in FIG. 18 later, an auxiliary capacitance line can be shared by the pre-determined sub-pixels.

**[0104]** FIG. 18 is a partially magnified plan view showing the fourth example of the layout of first and second sub-pixels  $P1(i, j)$  and  $P2(i, j)$ , respectively, in pixels  $P(i, j)$ . The pixel 15 in FIG. 18 differs from the pixel 15 in FIG. 15 in that the auxiliary capacitance line  $C1(j)$  for the first sub-pixel  $P1(i, j)$  and the auxiliary capacitance line  $C2(j-1)$  for the second sub-pixel  $P2(i, j-1)$  disposed on the side of the scanning line  $G(j-1)$  of the previous row are formed to be a common line.

**[0105]** Similarly, the auxiliary capacitance line  $C2(j)$  for the second sub-pixel  $P1(i, j)$  disposed on the subsequent row of the scanning line  $G(j)$  and the auxiliary capacitance line  $C1(j+1)$  for the first sub-pixel  $P1(i, j+1)$  disposed on the side of the subsequent row of the scanning line  $G(j)$ , namely scan-

ning line  $G(j+1)$ , are formed to be a common interconnection wiring, and this common interconnection wiring is disposed in parallel to the scanning line  $G(j)$ .

**[0106]** The electrode and interconnection wiring structures described above simplifies mask patterns for fabrication of auxiliary capacitance lines  $C1$  and  $C2$ , thus reducing cost.

**[0107]** According to the pixel layouts as shown in FIGS. 15 to 18, it is preferable that two regions having different relationships between display signal voltage and transmission intensity can be disposed so as to realize a higher uniformity.

**[0108]** The present invention allows the difference in viewing-angle dependence between liquid crystal panels to be corrected easily without increasing the number of manufacturing processes even after the manufacturing is completed.

What is claimed is:

1. A liquid crystal display device with multiple pixels provided therein, comprising:

- a first sub-pixel provided for each of said pixels and including,
- a first liquid crystal capacitance formed with a liquid crystal sandwiched between a common electrode and a first pixel electrode, and
- a first auxiliary capacitance formed with a solid dielectric material sandwiched between said first pixel electrode and a first auxiliary capacitance electrode;
- a second sub-pixel disposed adjacent to said first sub-pixel for each of said pixels and including,
- a second liquid crystal capacitance formed with a liquid crystal sandwiched between said common electrode and a second pixel electrode,
- a second auxiliary capacitance formed with a solid dielectric material sandwiched between said second pixel electrode and a second auxiliary capacitance electrode, and
- a step-up capacitance formed with a solid dielectric material sandwiched between said second pixel electrode and a step-up capacitance electrode;
- a first voltage application means for applying a common first voltage to said common electrode, said first auxiliary capacitance electrode, and said second auxiliary capacitance electrode; and
- a second voltage application means for applying a second voltage, which is different from said first voltage, to said step-up capacitance electrode.

2. The liquid crystal display device as set forth in claim 1, wherein said second voltage is a rectangular AC voltage that oscillates at specified frequency and said first voltage is a direct voltage whose voltage level is a specified value.

3. The liquid crystal display device as set forth in claim 2, wherein said first voltage is a direct voltage whose value is equal to that of the amplitude center voltage of said rectangular AC voltage oscillating by a specified amplitude.

4. The liquid crystal display device as set forth in claim 1, wherein said second voltage is a rectangular AC voltage oscillating by a specified amplitude, and said first voltage is a rectangular AC voltage oscillating by the amplitude smaller than that of said rectangular AC voltage.

5. The liquid crystal display device as set forth in claim 4, wherein the rectangular AC voltage as said first voltage and the rectangular AC voltage as said second voltage are in the same phase.

6. The liquid crystal display device as set forth in claim 1, wherein said first sub-pixel has a first switching device that is connected to said first pixel electrode, said second sub-pixel

has a second switching device that is connected to said second pixel electrode, and said first and said second switching devices are connected to the same data signal lines and scanning signal lines.

7. The liquid crystal display device as set forth in claim 6, wherein said step-up capacitance electrode is disposed on the same layer as said scanning signal lines.

8. The liquid crystal display device as set forth in claim 6, wherein said first pixel electrode and said second pixel electrode are disposed in different directions with respect to said scanning signal lines.

9. The liquid crystal display device as set forth in claim 6, wherein said first switching device and said second switching device are both thin-film transistors.

10. The liquid crystal display device as set forth in claim 1, wherein an area of said first pixel electrode differs from an area of said second pixel electrode.

11. The liquid crystal display device as set forth in claim 1, wherein an area of said first sub-pixel electrode differs from an area of said second sub-pixel electrode.

12. The liquid crystal display device as set forth in claim 1, wherein said first auxiliary capacitance electrode, said second auxiliary capacitance electrode, and said step-up capacitance electrode are disposed on the same layer.

13. A liquid crystal display device with multiple pixels provided therein, comprising:

a first sub-pixel provided for each of said pixels and including,

a first pixel electrode disposed opposite to a common electrode via a liquid crystal layer, and a first auxiliary capacitance electrode disposed opposite to said first pixel electrode;

a second sub-pixel disposed adjacent to said first sub-pixel for each of said pixels and including,

a second pixel electrode disposed opposite to said common electrode via a liquid crystal layer, and a second auxiliary capacitance electrode disposed opposite to said second pixel electrode via said insulating layer, and a step-up capacitance electrode;

a first voltage application means for applying a common first voltage to said common electrode, said first auxiliary capacitance electrode, and said second auxiliary capacitance electrode; and

a second voltage application means for applying a second voltage, which is different from said first voltage, to said step-up capacitance electrode.

14. The liquid crystal display device as set forth in claim 13, wherein said second voltage is a rectangular AC voltage that oscillates at a specified frequency, and said first voltage is a direct voltage whose voltage level is a specified value.

15. The liquid crystal display device as set forth in claim 14, wherein said first voltage is a direct voltage whose value is equal to that of the amplitude center voltage of said rectangular AC voltage oscillating by a specified amplitude.

16. The liquid crystal display device as set forth in claim 13, wherein said second voltage is a rectangular AC voltage oscillating by a specified amplitude, and said first voltage is a rectangular AC voltage oscillating by the amplitude smaller than that of said rectangular AC voltage.

17. The liquid crystal display device as set forth in claim 16, wherein the rectangular AC voltage as said first voltage and the rectangular AC voltage as said second voltage are in the same phase.

18. The liquid crystal display device as set forth in claim 13, wherein said first sub-pixel has a first switching device that is connected to said first pixel electrode, said second sub-pixel has a second switching device that is connected to said second pixel electrode, and said first and said second switching devices are connected to the same data signal lines and scanning signal lines.

19. The liquid crystal display device as set forth in claim 18, wherein said step-up capacitance electrode is disposed on the same layer as said scanning signal lines.

20. The liquid crystal display device as set forth in claim 18, wherein said first pixel electrode and said second pixel electrode are disposed in different directions with respect to said scanning signal lines.

\* \* \* \* \*

|                |                                                                                                                                                                            |         |            |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 液晶显示装置                                                                                                                                                                     |         |            |
| 公开(公告)号        | <a href="#">US20100007810A1</a>                                                                                                                                            | 公开(公告)日 | 2010-01-14 |
| 申请号            | US12/500278                                                                                                                                                                | 申请日     | 2009-07-09 |
| [标]申请(专利权)人(译) | 卡西欧计算机株式会社                                                                                                                                                                 |         |            |
| 申请(专利权)人(译)    | CASIO COMPUTER CO., LTD.                                                                                                                                                   |         |            |
| 当前申请(专利权)人(译)  | CASIO COMPUTER CO., LTD.                                                                                                                                                   |         |            |
| [标]发明人         | NAKAMURA YAYOI                                                                                                                                                             |         |            |
| 发明人            | NAKAMURA, YAYOI                                                                                                                                                            |         |            |
| IPC分类号         | G02F1/1343                                                                                                                                                                 |         |            |
| CPC分类号         | G02F1/134309 G02F1/136213 G02F1/13624 G02F2201/123 G09G3/3614 G09G3/3648 G09G2320/028 G09G3/3677 G09G3/3688 G09G3/3696 G09G2300/0443 G09G2300/0876 G09G2310/027 G09G3/3655 |         |            |
| 优先权            | 2008183219 2008-07-14 JP                                                                                                                                                   |         |            |
| 其他公开文献         | US8379161                                                                                                                                                                  |         |            |
| 外部链接           | <a href="#">Espacenet</a> <a href="#">USPTO</a>                                                                                                                            |         |            |

#### 摘要(译)

公开了一种其中设置有多像素的液晶显示装置，包括：为每个所述像素提供的第一子像素，包括由夹在公共电极和第一像素电极之间的液晶形成的第一液晶电容，以及第一辅助电容，由夹在所述第一像素电极和第一辅助电容电极之间的固体介电材料形成；用于每个所述像素的与所述第一子像素相邻设置的第二子像素，包括由夹在所述公共电极和第二像素电极之间的液晶形成的第二液晶电容，由固体形成的第二辅助电容介电材料夹在所述第二像素电极和第二辅助电容电极之间，以及由夹在所述第二像素电极和升压电容电极之间的固体介电材料形成的升压电容；第一电压施加装置，用于向所述公共电极，所述第一辅助电容电极和所述第二辅助电容电极施加共同的第一电压；第二电压施加装置，用于向所述升压电容电极施加与所述第一电压不同的第二电压。

