



US 20110012823A1

(19) **United States**(12) **Patent Application Publication**
Tsai et al.(10) **Pub. No.: US 2011/0012823 A1**(43) **Pub. Date: Jan. 20, 2011**(54) **LIQUID CRYSTAL DISPLAY AND SHIFT REGISTER DEVICE THEREOF****Publication Classification**(75) Inventors: **Tung-Chang Tsai**, Miaoli County (TW); **I-Chun Chen**, Taoyuan County (TW)(51) **Int. Cl.**
G09G 3/36 (2006.01)
G11C 19/00 (2006.01)(52) **U.S. Cl. 345/100; 377/79**


Correspondence Address:


JIANQ CHYUN INTELLECTUAL PROPERTY OFFICE
7 FLOOR-1, NO. 100, ROOSEVELT ROAD, SECTION 2
TAIPEI 100 (TW)(57) **ABSTRACT**

A liquid crystal display and a shift register device thereof are provided. The shift register device includes a plurality of shift registers connected in series. In the invention, the channel lengths of the transistors, which are responsible to stop outputting scan signal, in the shift register are manufactured greater than the channel lengths of the transistors, which are responsible to output the scan signal, in the shift register. As a result, the degree of influence that the leakage currents of the N-type transistors being responsible to stop outputting the scan signal in the shift register affect the transistors being responsible to output the scan signal when the transistors being responsible to stop outputting the scan signal are in the sub-threshold region is reduced. And thus each of the shift registers is able to output the scan signal normally.

(73) Assignee: **AU OPTRONICS CORPORATION**, Hsinchu (TW)(21) Appl. No.: **12/542,707**(22) Filed: **Aug. 18, 2009**(30) **Foreign Application Priority Data**

Jul. 14, 2009 (TW) 98123733

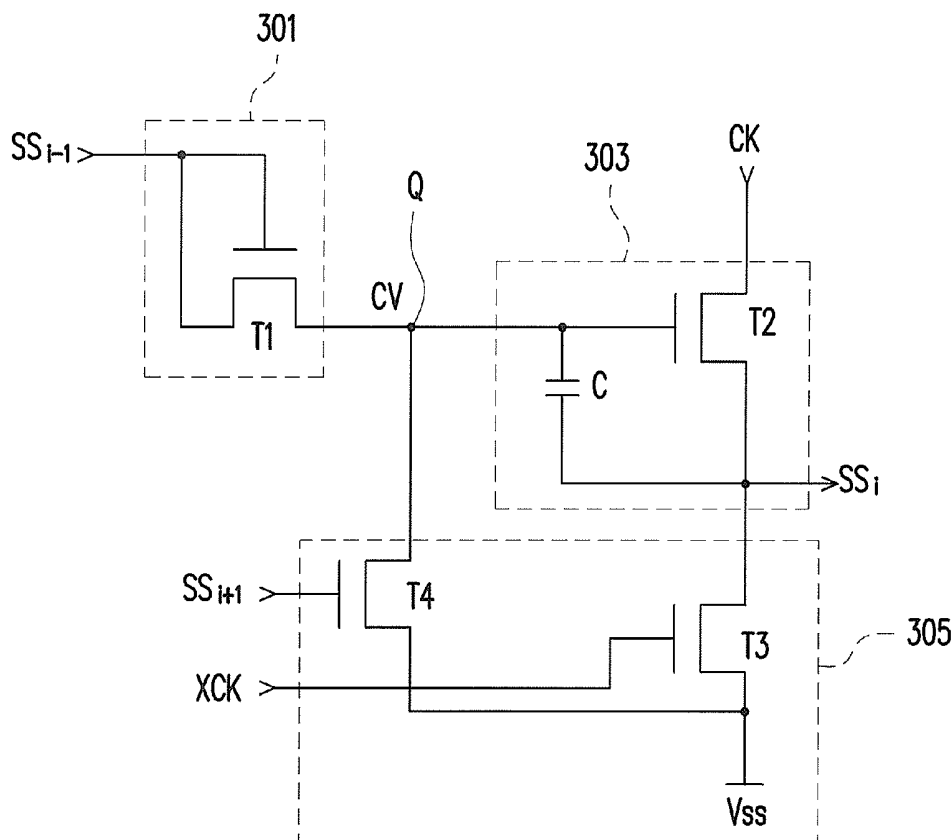SR_i

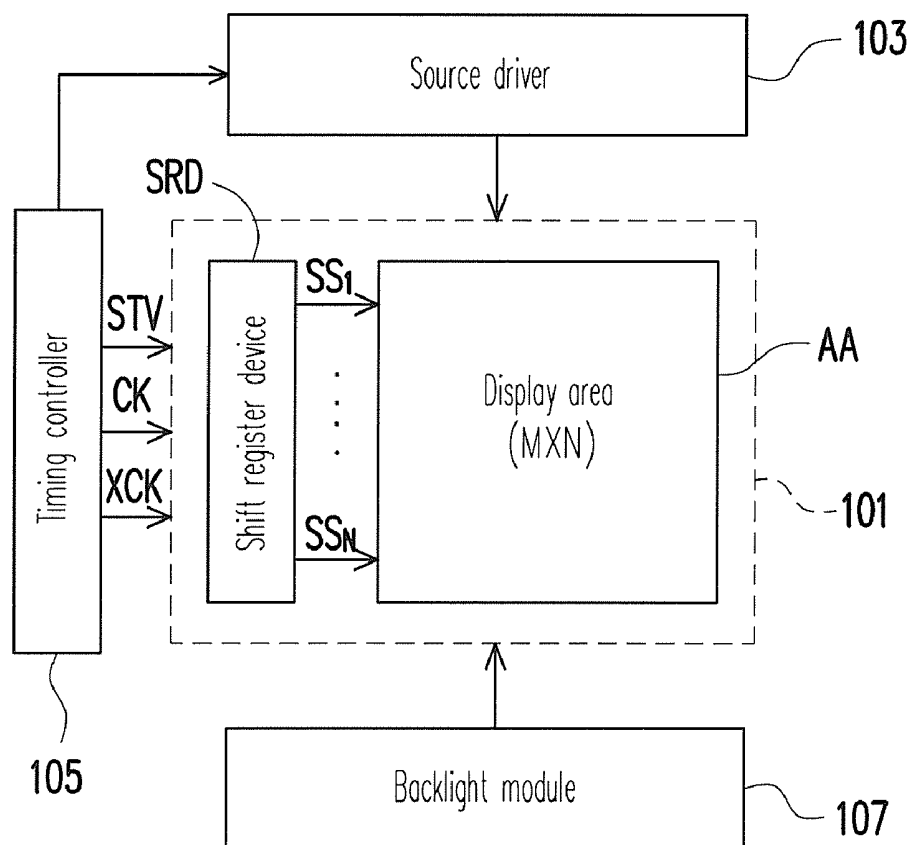

100

FIG. 1

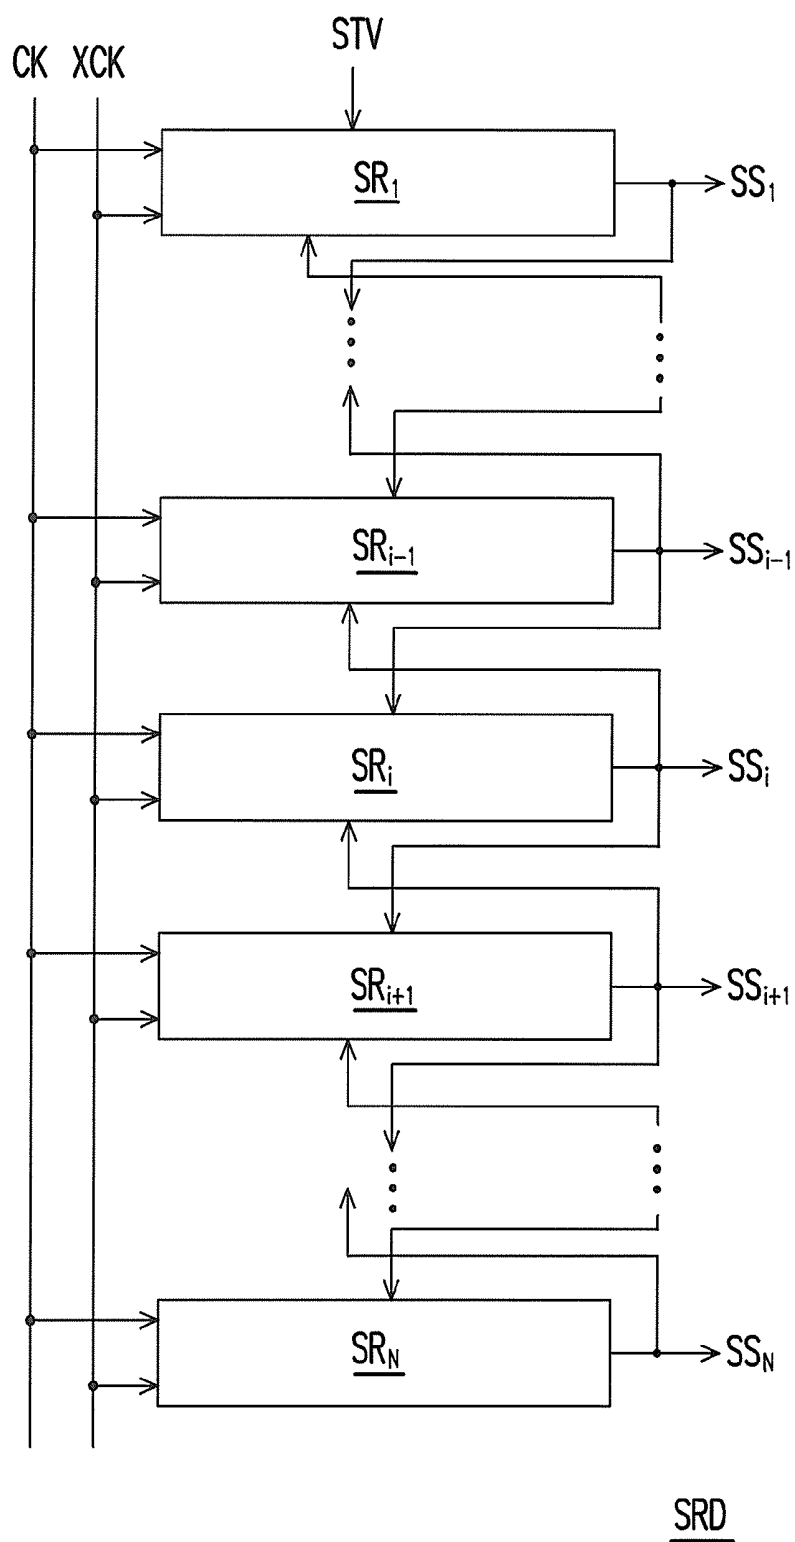


FIG. 2

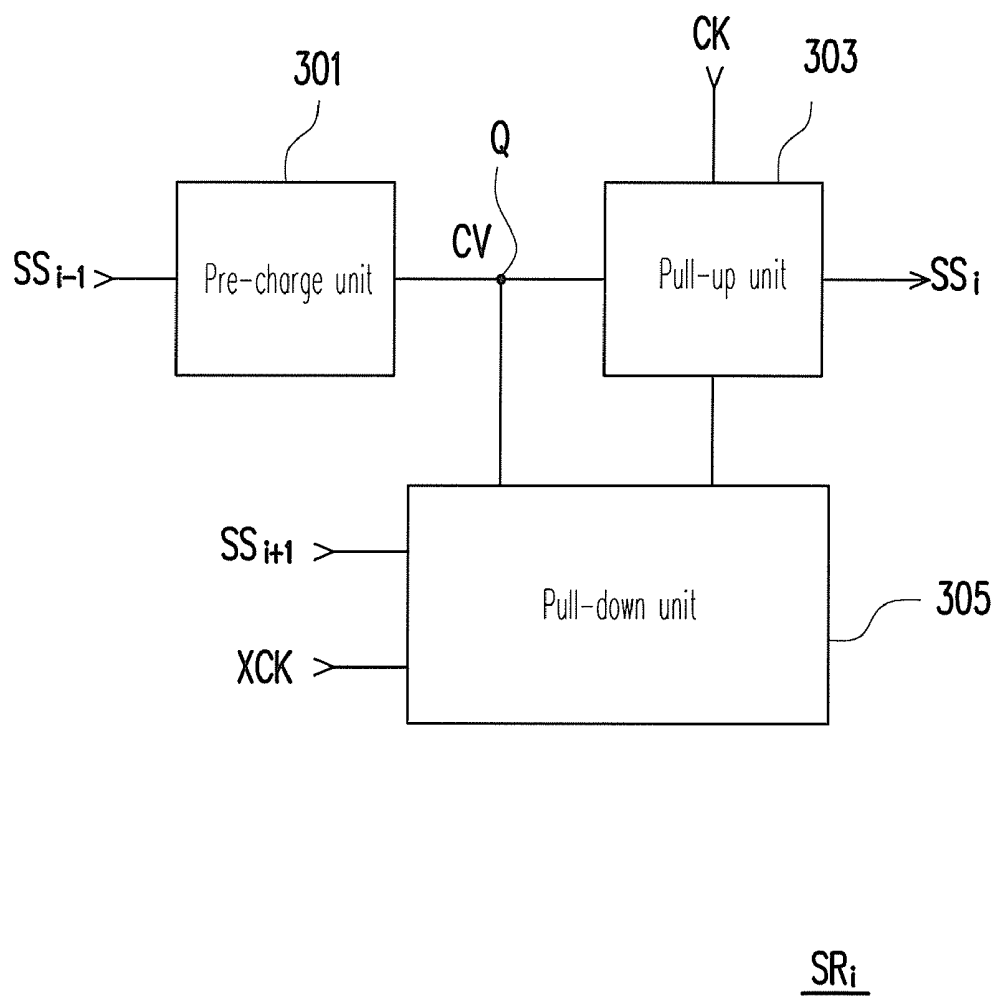


FIG. 3A



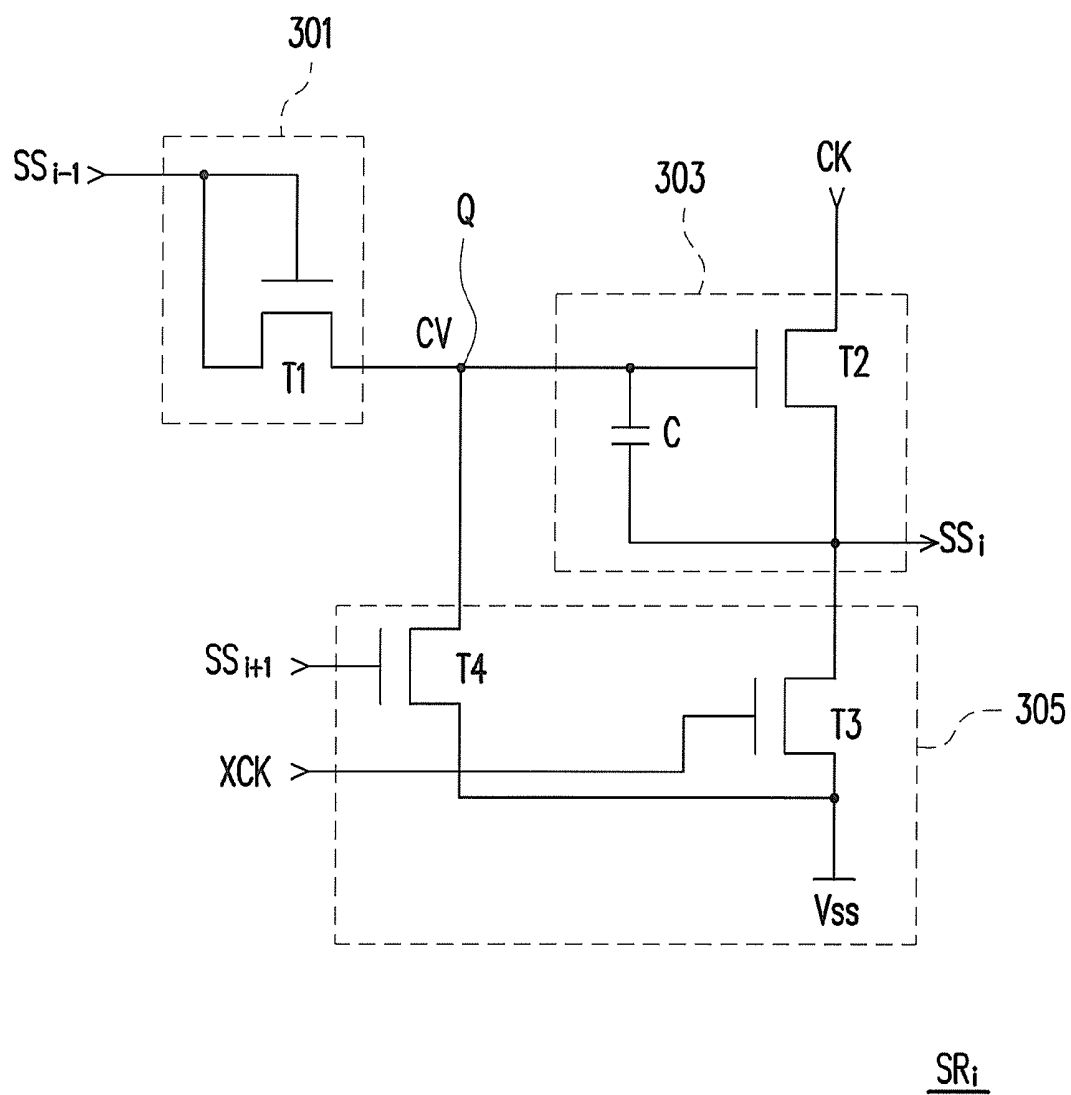


FIG. 3B

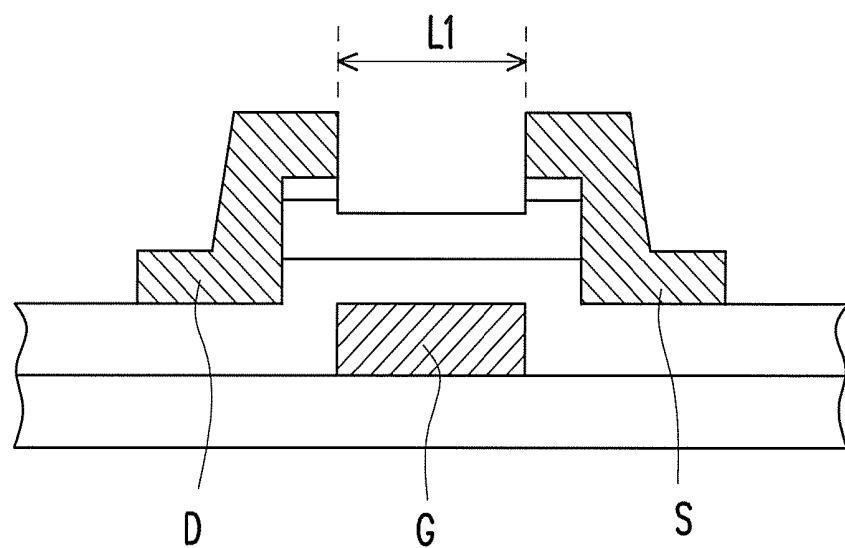

T3/T4

FIG. 4A

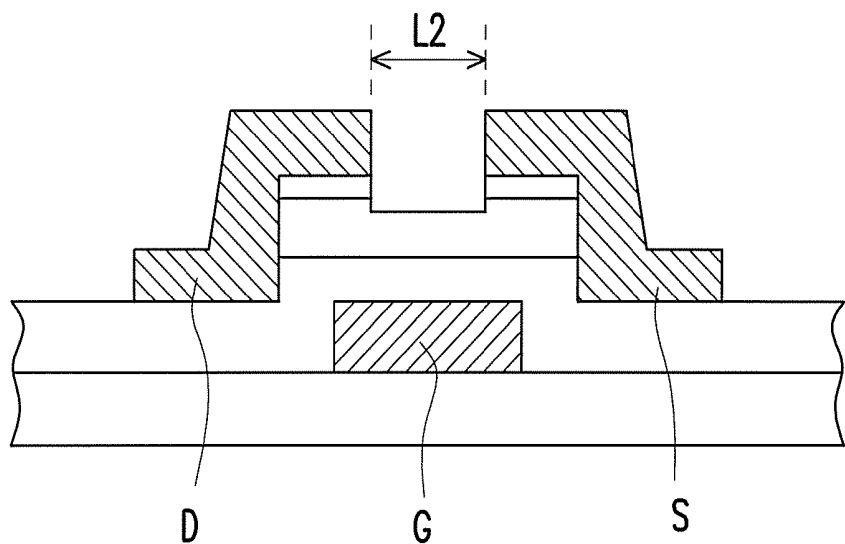

T1/T2

FIG. 4B

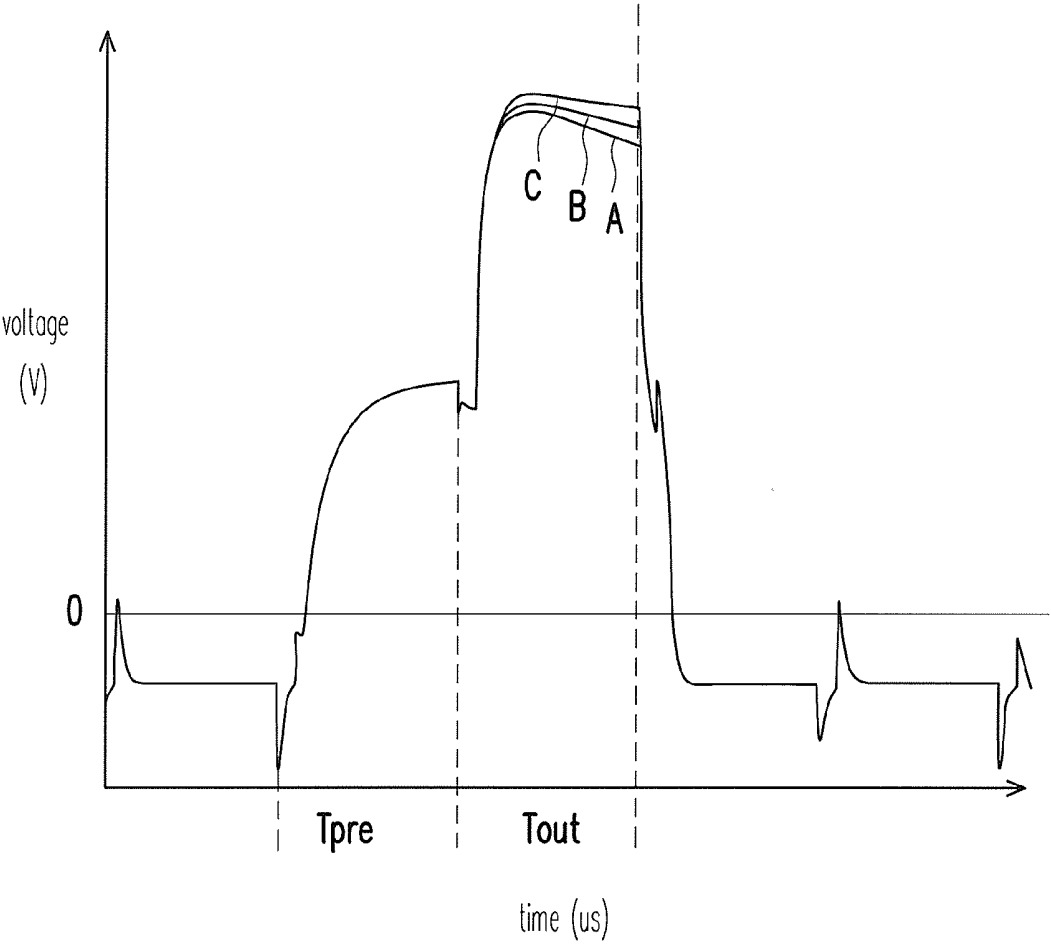


FIG. 5

LIQUID CRYSTAL DISPLAY AND SHIFT REGISTER DEVICE THEREOF

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the priority benefit of Taiwan application serial no. 98123733, filed on Jul. 14, 2009. The entirety of the above-mentioned patent application is hereby incorporated by reference herein and made a part of specification.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The invention relates to a flat panel display, and more particularly, to a liquid crystal display (LCD) and a shift register device thereof.

[0004] 2. Description of Related Art

[0005] In recent years, with great advance in the semiconductor technique, portable electronic devices and flat panel displays (FDPs) have been rapidly developed. Among various types of FDP, liquid crystal displays (LCDs) have gradually become the mainstream display products due to the advantages such as a low operating voltage, free of harmful radiation, light weight and small and compact size. As a consequence, a fabricating method is developed towards miniature and low cost by manufacturers in this field. In order to lower down the fabricating cost of LCDs, instead of disposing shift registers of a scan driver IC on a scan side of an LCD, parts of manufacturers can directly dispose the shift registers of the scan driver IC on a glass substrate of the LCD under an amorphous silicon (a-Si) process. Hence, the scan driver IC originally disposed on the scan side of the LCD can be omitted such that the fabricating cost of the LCD is reduced.

[0006] In general, each of the shift registers directly disposed on the glass substrate of the LCD includes a plurality of N-type transistors. Parts of the N-type transistors are responsible to output scan signal during operation period of the shift register so as to turn on the corresponding pixel row in the LCD panel. And other N-type transistors are responsible to stop outputting the scan signal during non-operation period of shift registers.

[0007] However, in practice, the channel lengths of the N-type transistors responsible to output the scan signal and the channel lengths of the N-type transistors responsible to stop outputting the scan signal are the same. Hence, under this condition, the N-type transistors responsible to output the scan signal may not output the scan signal normally due to the leakage currents of the N-type transistors responsible to stop outputting the scan signal when the N-type transistors being responsible to stop outputting the scan signal are in the sub-threshold region. As a result, the shift register malfunctions and the LCD is not able to display a display image normally.

SUMMARY OF THE INVENTION

[0008] Accordingly, the invention provides a shift register device which includes a plurality of shift registers connected in series. An i^{th} shift register of the plurality of shift registers includes a pre-charge unit, a pull-up unit and a pull-down unit, where i is positive integer. The pre-charge unit is configured to receive a first scan signal output by an $(i-1)^{th}$ shift register of the plurality of shift registers and output a charge signal according to the first scan signal. The pull-up unit is coupled to the pre-charge unit and configured to receive the

charge signal and a first clock signal and output a second scan signal according to the charge signal and the first clock signal. The pull-down unit is coupled to the pre-charge unit and the pull-up unit. Besides, the pull-down unit is configured to receive a second clock signal and a third scan signal output by an $(i+1)^{th}$ shift register of the plurality of shift registers and determine whether pulling down the second scan signal to a reference voltage or not according to the second clock signal and the third scan signal.

[0009] In an exemplary embodiment of the invention, the pre-charge unit, the pull-up unit and the pull-down unit respectively have at least a transistor. In addition, the transistor in the pull-down unit has a first channel length; and the transistors in the pre-charge unit and the pull-up unit respectively have a second channel length. Besides, the first channel length is greater than the second channel length.

[0010] In an exemplary embodiment of the invention, the first channel length is substantially 1.01 to 4 times the second channel length.

[0011] The invention further provides a liquid crystal display (LCD) which includes an LCD panel and a backlight module. The backlight module is configured to provide a backlight source to the LCD panel. Furthermore, the LCD panel includes a substrate and the shift register device provided by the aforementioned invention. And the shift register device is directly disposed on the substrate of the LCD panel.

[0012] It should be noted that the above described general descriptions and following embodiments are only taken as examples and used for illustrating, not for limiting the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

[0014] FIG. 1 is a block diagram illustrating a system of an LCD 100 according to an exemplary embodiment of the invention.

[0015] FIG. 2 is a block diagram of a shift register device SRD according to an exemplary embodiment of the invention.

[0016] FIG. 3A is a block diagram of an i^{th} shift register SR_i according to an exemplary embodiment of the invention.

[0017] FIG. 3B is a circuit diagram of an i^{th} shift register SR_i according to an exemplary embodiment of the invention.

[0018] FIG. 4A is a schematic cross-sectional view of N-type transistors T3 and T4.

[0019] FIG. 4B is a schematic cross-sectional view of N-type transistors T1 and T2.

[0020] FIG. 5 is an experimental waveform of a node Q of an i^{th} shift register SR_i according to an exemplary embodiment of the invention.

DESCRIPTION OF EMBODIMENTS

[0021] Descriptions of the invention are given with reference to the exemplary embodiments illustrated with accompanied drawings, wherein same or similar parts are denoted with same reference numerals.

[0022] FIG. 1 is a block diagram illustrating a system of a liquid crystal display (LCD) 100 according to an exemplary

embodiment of the invention. Referring to FIG. 1, the LCD 100 includes a display panel 101, a source driver 103, a timing controller 105 and a backlight module 107 configured to provide a backlight source required by the display panel 101. A display region AA of the display pane 101 has a plurality of pixels arranged in array, which is represented in M*N in FIG. 1 and both M, N are positive integers. Besides, a shift register device SRD is directly disposed on a side of a substrate (not shown, and for example, a glass substrate) of the display panel 101. The shift register device SRD is controlled by the timing controller 105, and configured to output scan signals $SS_1 \sim SS_N$ sequentially, such that the pixel rows in the display area AA are turned on one by one, i.e. from the first pixel row to the last pixel row in the display region AA.

[0023] In detail, FIG. 2 is a block diagram of a shift register device SRD according to an exemplary embodiment of the invention. Referring to FIG. 1 and FIG. 2, the shift register device SRD includes N shift registers $SR_1 \sim SR_N$ having substantially the same circuit configurations. And the shift registers $SR_1 \sim SR_N$ are connected in series. In the exemplary embodiment, since the circuit configurations and the operation of the shift registers $SR_1 \sim SR_N$ are substantially the same, only the i^{th} shift register SR_i is described as following.

[0024] FIG. 3A is a block diagram of the i^{th} shift register SR_i according to an exemplary embodiment of the invention. FIG. 3B is a circuit diagram of the i^{th} shift register SR_i according to an exemplary embodiment of the invention. Referring FIG. 1 to FIG. 3B, the i^{th} shift register includes a pre-charge unit 301, a pull-up unit 303 and a pull-down unit 305. The pre-charge unit 301 is configured to receive a scan signal SS_{i-1} output by the $(i-1)^{th}$ shift register SR_{i-1} and output a charge signal CV according to the scan signal SS_{i-1} . In the exemplary embodiment, except the pre-charge unit 301 of the 1st shift register SR_1 receives an initial signal STV provided by the timing controller 105, the pre-charge unit 301 of rest of shift registers receives the scan signal output by the previous shift register.

[0025] For example, the pre-charge unit 301 of the 2nd shift register SR_2 receives the scan signal SS_1 output by the 1st shift register SR_1 , and the pre-charge unit 301 of the 3rd shift register SR_3 receives the scan signal SS_2 output by the 2nd shift register SR_2 , and so on, the pre-charge unit 301 of the Nth shift register SR_N receives the scan signal SS_{N-1} output by the $(N-1)^{th}$ shift register SR_{N-1} .

[0026] Referring to FIG. 3A, the pull-up unit 303 is coupled to the pre-charge unit 301. And the pull-up unit 303 is configured to receive the charge signal CV output by the pre-charge unit 301 and a clock signal CK provided by the timing controller 105, and output the scan signal SS_i according to the charge signal CV and the clock signal CK. The pull-down unit 305 is coupled to the pre-charge unit 301 and the pull-up unit 303. And the pull-down unit 305 is configured to receive a clock signal XCK provided by the timing controller 105 and the scan signal SS_{i+1} output by the $(i+1)^{th}$ shift register SR_{i+1} . Then, the pull-down unit 305 determines whether pulling down the scan signal SS_{i+1} to a reference voltage Vss according to the clock signal XCK and the scan signal SS_{i+1} . In addition, the reference voltage Vss is a ground voltage, but not limited thereto. Furthermore, the phase difference between the clock signals CK XCK provided by the timing controller 105 is 180-degree.

[0027] Referring to FIG. 3B, in the exemplary embodiment, the pre-charge unit 301 has an N-type transistor T1. A gate and a source of the N-type transistor T1 are connected

with each other so as to receive the scan signal SS_{i-1} output by the $(i-1)^{th}$ shift register SR_{i-1} , and a drain of the N-type transistor T1 is configured to output the charge signal CV.

[0028] Besides, the pull-up unit 303 has an N-type transistor T2 and a capacitor C. A gate of the N-type transistor T2 is connected with the drain of the N-type transistor T1, a source of the N-type transistor T2 is configured to receive the clock signal CK provided by the timing controller 105, and a drain of the N-type transistor T2 is configured to output the scan signal SR_i . The capacitor C is coupled between the gate and the drain of the N-type transistor T2.

[0029] Besides, the pull-down unit 305 has N-type transistors T3 and T4. A gate of the N-type transistor T3 is configured to receive the clock signal XCK provided by the timing controller 105. As shown in FIG. 3B, a source of the N-type transistor T3 is coupled to the drain of the N-type transistor T2, and a drain of the N-type transistor T3 is coupled to the reference voltage Vss. A gate of the N-type transistor T4 is configured to receive the scan signal SS_{i+1} output by the $(i+1)^{th}$ shift register SR_{i+1} . A source of the N-type transistor T4 is coupled to the gate of the N-type transistor T2, and a drain of the N-type transistor T4 is coupled to the reference voltage Vss. In the exemplary embodiment, the N-type transistors T1 and T2 have the same channel length, and the N-type transistors T3 and T4 have the same channel lengths. But the channel length of the N-type transistors T3 and T4 is greater than the channel length of the N-type transistors T1 and T2.

[0030] In detail, FIG. 4A is a schematic cross-sectional view of the N-type transistors T3 and T4, and FIG. 4B is a schematic cross-sectional view of the N-type transistors T1 and T2. Referring to FIG. 4A and FIG. 4B, it can be clearly seen that a reference number D represents the drain of the N-type transistors T1~T4, a reference number S represents the source of the N-type transistors T1~T4, and a reference number G represents the gate of the N-type transistors T1~T4. In addition, a reference number L1 represents the channel length of the N-type transistors T3 and T4, and a reference number L2 represents the channel length of the N-type transistors T1 and T2.

[0031] Herein, the so-called "channel length" means a distance between the drain and the gate of the N-type transistor. Preferably, the channel length L1 of the N-type transistors T3 and T4 is substantially 1.01 to 4 times the channel length L2 of the N-type transistor T1 and the N-type transistor T2, but not limited thereto. That is to say, a multiple of the channel length L1 of the N-type transistors T3 and T4 relative to the channel length L2 of the N-type transistors T1 and T2 varies depending on the design requirements. More details are to be followed hereunder.

[0032] Based on the above, when the pre-charge unit 301 of the i^{th} shift register SR_i receives the scan signal SS_{i-1} output by the $(i-1)^{th}$ shift register SR_{i-1} , the N-type transistor T1 is turned on so as to pre-charge a node Q. Hence, when the clock signal CK provided by the timing controller 105 is enable, the voltage of the node Q is pulled up due to a coupling effect of the clock signal CK, such that the N-type transistor T2 of pull-up unit 303 is turned on. Then, the scan signal SS_i is output to turn on the corresponding i^{th} pixel row in the display region AA.

[0033] Next, after the pre-charge unit 301 and the pull-up unit 303 responsible to output the scan signal SS_i , the N-type transistor T3 of the pull-down unit 305 is turned on because the clock signal XCK provided by the timing controller 105 is

enable. Hence, the scan signal SS_i is pulled down to the reference voltage V_{ss} such that the corresponding i^{th} pixel row in the display region AA is turned off.

[0034] Besides, when the N-type transistor T3 of the pull-down unit 305 pulls down the scan signal SS_i to the reference voltage V_{ss} , the SR_{i+1} output by the $(i+1)^{th}$ shift register is fed back to the N-type transistor T4 in the pull-down unit 305 of the i^{th} shift register SR_i . As a result, the N-type transistor T4 in the pull-down unit 305 of the i^{th} shift register SR_i is turned on so as to discharge the node Q. And the coupling effect on the node Q between the pre-charge unit 301 and the pull-up unit 303 due to the clock signal CK is prevented after the scan signal SS_i is output. Therefore, after the pre-charge unit 301 and the pull-up unit 303 responsible to output the scan signal SS_i , the pull-down unit 305 stops outputting the scan signal SS_i .

[0035] Accordingly, when the timing controller 105 provides the initial signal STV for the pre-charge unit 301 of the 1st shift register SR_1 , and respectively provides the clock signals CK and XCK for the pull-up unit 303 and the pull-down unit 305 of each of the shift registers $SR_1 \sim SR_N$, the shift registers $SR_1 \sim SR_N$ in the shift register device SRD sequentially output the scan signal $SR_1 \sim SR_N$, such that the pixel rows in the display area AA are turned on one by one, i.e. from the first pixel row to the last pixel row in the display region AA. Besides, the source driver 103 provides corresponding display data for the pixel row which is turned on by the shift register device SRD. Accordingly, together with the backlight source provided by the backlight module 107, the display panel 101 is able to display a display image.

[0036] According to the related art, the channel length of N-type transistors responsible to output the scan signal and the channel length of N-type transistors responsible to stop outputting the scan signal are the same. Hence, under this condition, the N-type transistor responsible to output the scan signal may not output the scan signal normally due to the leakage currents of the N-type transistors responsible to stop outputting the scan signal when the N-type transistors responsible to stop outputting the scan signal are in the sub-threshold region. As a result, the shift registers malfunction and the LCD is not able to display a display image normally.

[0037] As such, when the channel length of the N-type transistors T1~T4 in the shift registers $SR_1 \sim SR_N$ is the same (i.e. $L1=L2$), the N-type transistors T1 and T2 responsible to output the scan signals $SS_1 \sim SS_N$ may not output the scan signals $SS_1 \sim SS_N$ normally due to the leakage currents of the N-type transistors T3 and T4 responsible to stop outputting the scan signals $SS_1 \sim SS_N$ when the N-type transistors T3 and T4 responsible to stop outputting the scan signals $SS_1 \sim SS_N$ are in the sub-threshold region. As a result, the shift registers $SR_1 \sim SR_N$ malfunction and the LCD 100 is not able to display a display image normally.

[0038] Accordingly, the channel length L1 of the N-type transistors T3 and T4 in the pull-down unit 305 designed in the exemplary embodiment is greater than the channel length L2 of the N-type transistors T1 and T2 in the pull-up unit 303, i.e. $L1>L2$. And the channel length L1 of the N-type transistors T3 and T4 in the pull-down unit 305 is substantially 1.01 to 4 times the channel length L2 of the N-type transistors T1 and T2 in the pull-up unit 303. Specifically, FIG. 5 is an experimental waveform of the node Q of the i^{th} shift register SR_i according to an exemplary embodiment of the invention. Referring to FIG. 3 and FIG. 5, it can be clearly seen that the node Q is pre-charged during a period Tpre. As shown in FIG.

5, three curves A, B and C are respectively depicted within the period Tout. The curve A shows the degree of influence that the leakage currents of the N-type transistors T3 and T4 affect the N-type transistors T1 and T2 as the N-type transistors T3 and T4 are in the sub-threshold region when the channel length L1 of the N-type transistors T3 and T4 in the pull-down unit 305 is equal to the channel length L2 of the N-type transistors T1 and T2 in the pull-up unit 303 (i.e. $L1=L2$). The curve B shows the degree of influence that the leakage currents of the N-type transistors T3 and T4 affect the N-type transistors T1 and T2 as the N-type transistors T3 and T4 are in the sub-threshold region when the channel length L1 of the N-type transistors T3 and T4 in the pull-down unit 305 is slightly greater than the channel length L2 of the N-type transistors T1 and T2 in the pull-up unit 303 (i.e. $L1>L2$), such as $L1=1.1L2$. The curve C shows the degree of influence that the leakage currents of the N-type transistors T3 and T4 affect the N-type transistors T1 and T2 as the N-type transistors T3 and T4 are in the sub-threshold region when the channel length L1 of the N-type transistors T3 and T4 in the pull-down unit 305 is far greater than the channel length L2 of the N-type transistors T1 and T2 in the pull-up unit 303 (i.e. $L1>>L2$), such as $L1=4L2$. Based on the above, when the channel length L1 of the N-type transistors T3 and T4 in the pull-down unit 305 is equal to the channel length L2 of the N-type transistors T1 and T2 in the pull-up unit 303, the degree of influence that the leakage currents of the N-type transistors T3 and T4 affect the N-type transistors T1 and T2 as the N-type transistors T3 and T4 are in the sub-threshold region is more serious. That is, the voltage drop of the curve A is greatest during a period Tout. Hence, the i^{th} shift register SR_i may not output the scan signal SS_i normally.

[0039] In addition, the more the length difference between channel lengths L1 of the N-type transistors T3 and T4 in the pull-down unit 305 and channel lengths L2 of the N-type transistors T1 and T2 in the pull-up unit 303, the less the degree of influence that the leakage currents of the N-type transistors T3 and T4 affect the N-type transistors T1 and T2 as the N-type transistors T3 and T4 are in the sub-threshold region. That is, the voltage drop of the curves B and C during the period Tout is gradually reduced relative to that of the curve A. As a result, the i^{th} shift register SR_i is ensured being able to output the scan signal SS_i normally.

[0040] In summary, since the channel length of the N-type transistors responsible to output the scan signal in the shift register device of the invention is greater than the channel length of the N-type transistors responsible to stop outputting the scan signal, the degree of influence that the leakage currents of the N-type transistors responsible to stop outputting the scan signal affect the N-type transistor responsible to output the scan signal is reduced when the N-type transistors responsible to stop outputting the scan signal are in the sub-threshold region. Hence, the shift register is ensured being able to output the scan signal normally.

[0041] In addition, although a certain circuit implementation form of the pre-charge unit, the pull-up unit and the pull-down unit is provided in the above-mentioned exemplary embodiment, but the invention is not limited thereto. That is to say, as long as the shift register is capable of being divided into other circuit implementation form of the pre-charge unit, the pull-up unit and the pull-down unit, the channel lengths of all or parts of the N-type transistors in the pull-down unit are able to be increased according to the invention. As a result, the degree of influence that the leakage currents of the N-type

transistors responsible to stop outputting the scan signal in the shift register affect the N-type transistors responsible to output the scan signal when the N-type transistors responsible to stop outputting the scan signal are in the sub-threshold region is reduced.

[0042] Although the present invention has been described with reference to the above embodiments, it will be apparent to one of the ordinary skill in the art that modifications to the described embodiment may be made without departing from the spirit of the invention. Accordingly, the scope of the invention will be defined by the attached claims not by the above detailed descriptions.

What is claimed is:

1. A shift register device comprising: a plurality of shift registers connected in series, an i^{th} shift register of the plurality of shift registers comprising:

- a pre-charge unit receiving a first scan signal output by an $(i-1)^{th}$ shift register of the plurality of shift registers, and outputting a charge signal according to the first scan signal, where i is a positive integer;
- a pull-up unit coupled to the pre-charge unit, receiving the charge signal and a first clock signal, and outputting a second scan signal according to the charge signal and the first clock signal; and
- a pull-down unit coupled to the pre-charge unit and the pull-up unit, receiving a second clock signal and a third scan signal output by an $(i+1)^{th}$ shift register of the plurality of shift registers, and determining whether pulling down the second scan signal to a reference voltage according to the second clock signal and the third scan signal,

wherein the pre-charge unit, the pull-up unit and the pull-down unit respectively have at least a transistor, the transistor in the pull-down unit has a first channel length, the transistors in the pre-charge unit and the pull-up unit respectively have a second channel length, and the first channel length is greater than the second channel length.

2. The shift register device of claim 1, wherein the transistor in the pre-charge unit is a first N-type transistor,

wherein, a gate and a source of the first N-type transistor are connected with each other, and a drain of the first N-type transistor is configured to output the charge signal.

3. The shift register device of claim 2, wherein the transistor in the pull-up unit is a second N-type transistor,

wherein a gate of the second N-type transistor is connected with the drain of the first N-type transistor, a source of the second N-type transistor is configured to receive the first clock signal, and a drain of the second N-type transistor is configured to output the second scan signal.

4. The shift register device of claim 3, wherein the pull-up unit further has a capacitor coupled between the gate and the drain of the second N-type transistor.

5. The shift register device of claim 3, wherein the transistor in the pull-down unit is a third N-type transistor,

wherein a gate of the third N-type transistor is configured to receive the second clock signal, a source of the third N-type transistor is coupled to the drain of the second N-type transistor, and a drain of the third N-type transistor is coupled to the reference voltage.

6. The shift register device of claim 5, wherein the pull-down unit further has another transistor which is a fourth N-type transistor,

wherein a gate of the fourth N-type transistor is configured to receive the third scan signal, a source of the fourth N-type transistor is coupled to the gate of the second N-type transistor, and a drain of the fourth N-type transistor is coupled to the reference voltage.

7. The shift register device of claim 6, wherein the first N-type transistor and the second N-type transistor respectively have the second channel length, and the third N-type transistor and the fourth N-type transistor respectively have the first channel length.

8. The shift register device of claim 7, wherein the first channel length of the third N-type transistor and the fourth N-type transistor is greater than the second channel length of the first N-type transistor and the second N-type transistor.

9. The shift register device of claim 8, wherein the first channel length of the third N-type transistor and the fourth N-type transistor is substantially 1.01 to 4 times the second channel length of the first N-type transistor and the second N-type transistor.

10. The shift register device of claim 1, wherein a phase difference between the first clock signal and the second clock signal is 180-degree.

11. A liquid crystal display (LCD) comprising:

an LCD panel comprising a substrate and a shift register device, the shift register device being directly disposed on the substrate and has a plurality of shift registers connected in series, an i^{th} shift register of the plurality of shift registers comprising:

- a pre-charge unit receiving a first scan signal output by an $(i-1)^{th}$ shift register of the plurality of shift registers, and outputting a charge signal according to the first scan signal, where i is a positive integer;
- a pull-up unit coupled to the pre-charge unit, receiving the charge signal and a first clock signal, and outputting a second scan signal according to the charge signal and the first clock signal; and
- a pull-down unit coupled to the pre-charge unit and the pull-up unit, receiving a second clock signal and a third scan signal output by an $(i+1)^{th}$ shift register of the plurality of shift registers, and determining whether pulling down the second scan signal to a reference voltage according to the second clock signal and the third scan signal,

wherein the pre-charge unit, the pull-up unit and the pull-down unit respectively have at least a transistor, the transistor in the pull-down unit has a first channel length, the transistors in the pre-charge unit and the pull-up unit respectively have a second channel length, and the first channel length is greater than the second channel length; and

a backlight module providing a backlight source to the LCD panel.

12. The LCD of claim 11, wherein the transistor in the pre-charge unit is a first N-type transistor,

wherein a gate and a source of the first N-type transistor are connected with each other, and a drain of the first N-type transistor is configured to output the charge signal.

13. The LCD of claim 12, wherein the transistor in the pull-up unit is a second N-type transistor,

wherein a gate of the second N-type transistor is connected with the drain of the first N-type transistor, a source of the second N-type transistor is configured to receive the first clock signal, and a drain of the second N-type transistor is configured to output the second scan signal.

14. The LCD of claim **13**, wherein the pull-up unit further has a capacitor coupled between the gate and the drain of the second N-type transistor.

15. The LCD of claim **13**, wherein the transistor in the pull-down unit is a third N-type transistor,

wherein a gate of the third N-type transistor is configured to receive the second clock signal, a source of the third N-type transistor is coupled to the drain of the second N-type transistor, and a drain of the third N-type transistor is coupled to the reference voltage.

16. The LCD of claim **15**, wherein the pull-down unit further has another transistor which is a fourth N-type transistor,

wherein a gate of the fourth N-type transistor is configured to receive the third scan signal, a source of the fourth N-type transistor is coupled to the gate of the second N-type transistor, and a drain of the fourth N-type transistor is coupled to the reference voltage.

17. The LCD of claim **16**, wherein the first N-type transistor and the second N-type transistor respectively have the second channel length, and the third N-type transistor and the fourth N-type transistor respectively have the first channel length.

18. The LCD of claim **17**, wherein the first channel length of the third N-type transistor and the fourth N-type transistor is greater than the second channel length of the first N-type transistor and the N-type second transistor.

19. The LCD of claim **18**, wherein the first channel length of the third N-type transistor and the fourth N-type transistor is substantially 1.01 to 4 times the second channel length of the first N-type transistor and the N-type second transistor.


20. The LCD of claim **11**, wherein a phase difference between the first clock signal and the second clock signal is 180-degree.

* * * * *

专利名称(译)	液晶显示器及其移位寄存器装置		
公开(公告)号	US20110012823A1	公开(公告)日	2011-01-20
申请号	US12/542707	申请日	2009-08-18
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电股份有限公司		
当前申请(专利权)人(译)	友达光电股份有限公司		
[标]发明人	TSAI TUNG CHANG CHEN I CHUN		
发明人	TSAI, TUNG-CHANG CHEN, I-CHUN		
IPC分类号	G09G3/36 G11C19/00		
CPC分类号	G11C19/28 G09G3/3677		
优先权	098123733 2009-07-14 TW		
其他公开文献	US8289262		
外部链接	Espacenet USPTO		

摘要(译)

提供一种液晶显示器及其移位寄存器装置。移位寄存器装置包括串联连接的多个移位寄存器。在本发明中，制造移位寄存器中负责停止输出扫描信号的晶体管的沟道长度大于在移位寄存器中负责输出扫描信号的晶体管的沟道长度。结果，当晶体管负责停止输出扫描时，负责停止输出移位寄存器中的扫描信号的N型晶体管的漏电流影响晶体管负责输出扫描信号的影响程度。信号在亚阈值区域中减小。因此，每个移位寄存器能够正常输出扫描信号。

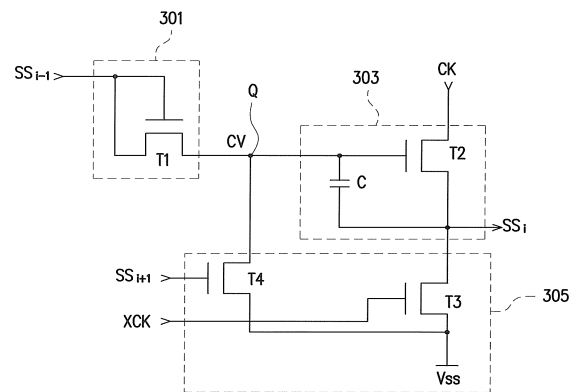

SR_i