

(43) **Pub. Date:** **Oct. 2, 2003**

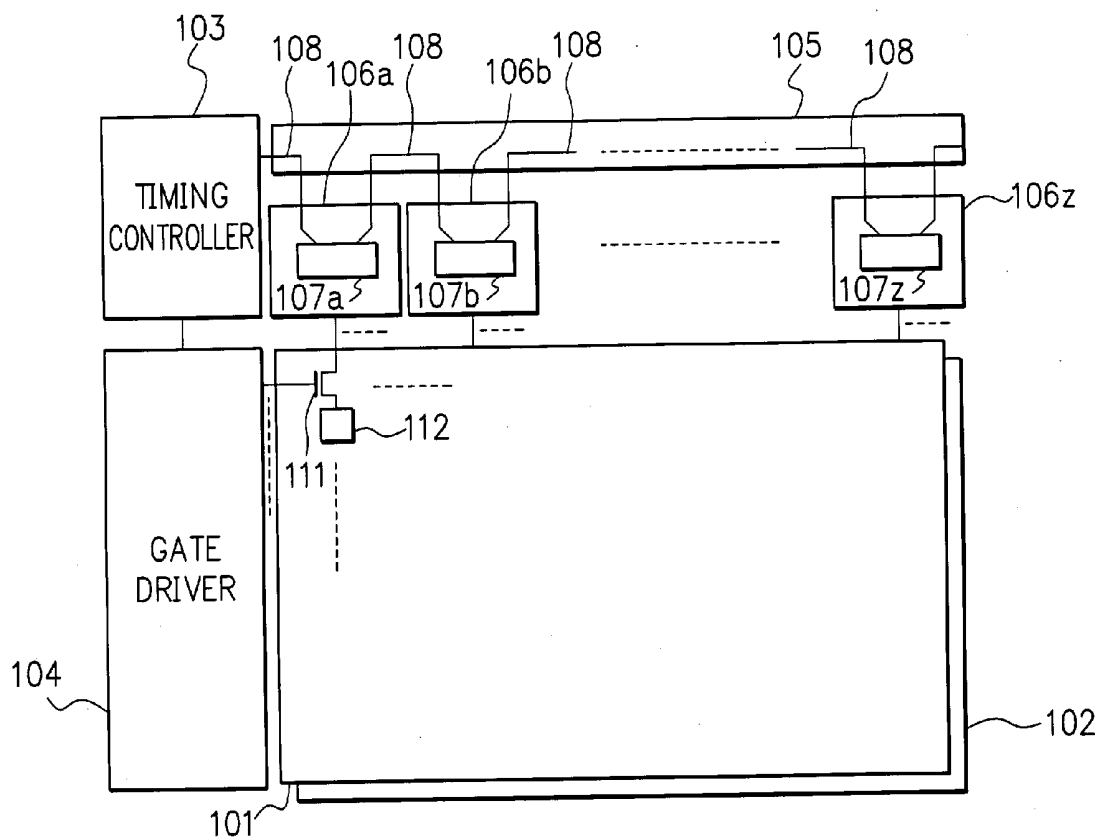


FIG. 1



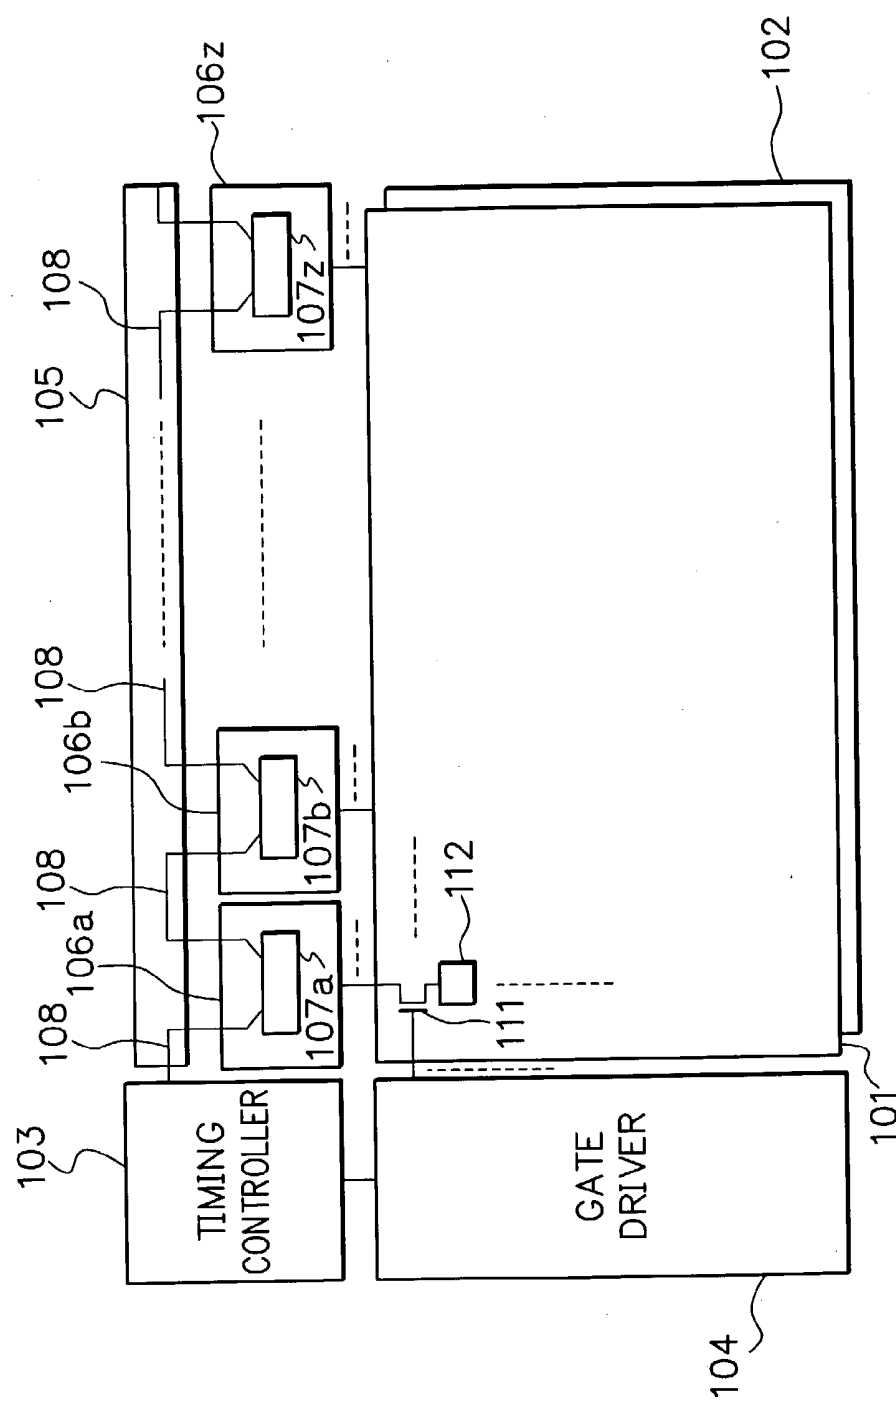



FIG. 2

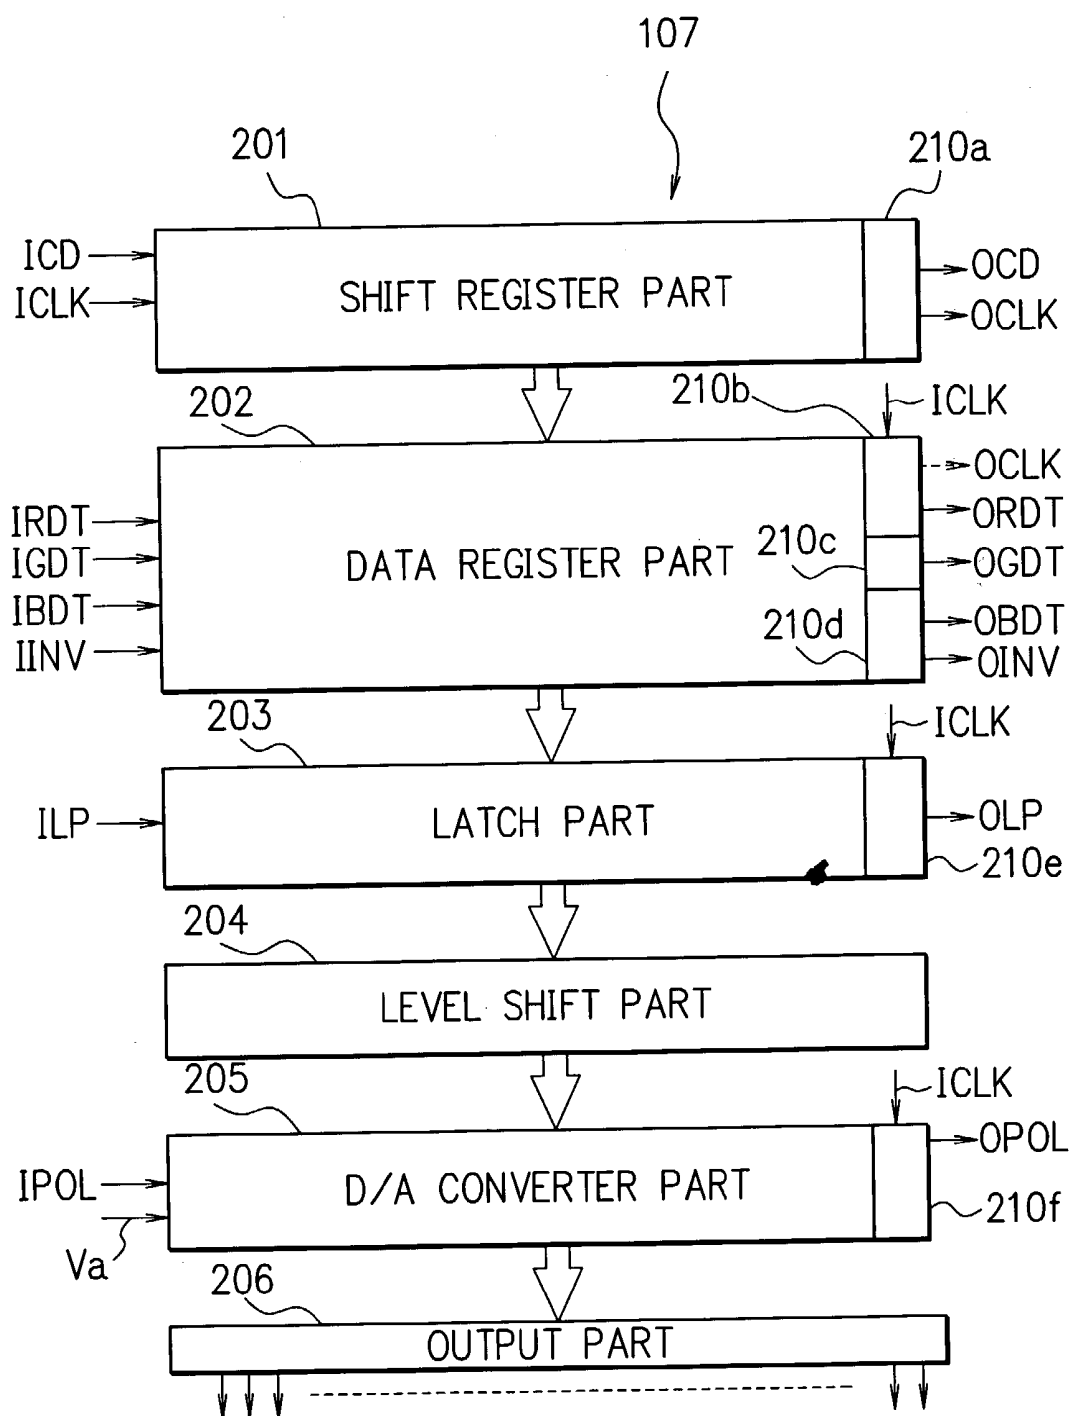


F I G. 3A

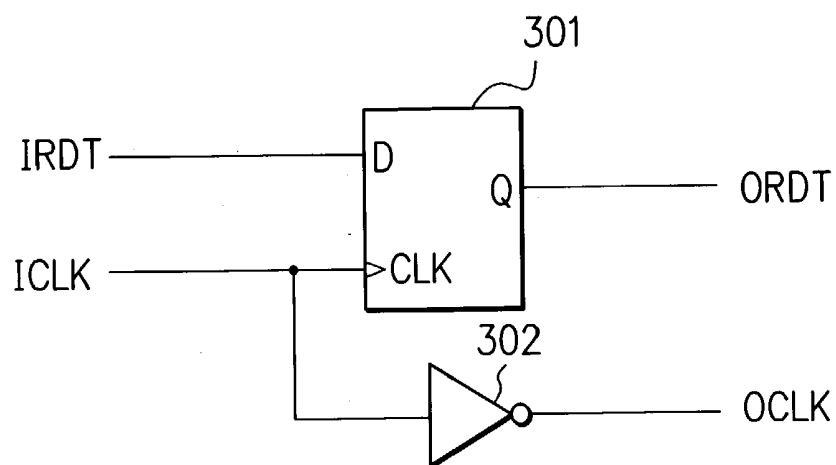


F I G. 3B

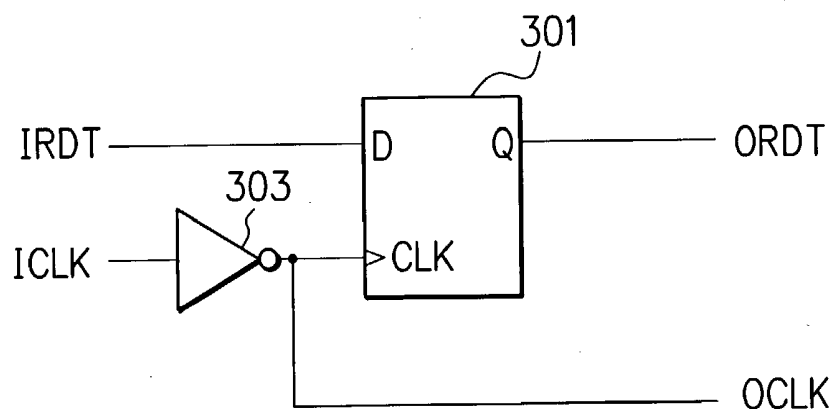


F I G. 3C

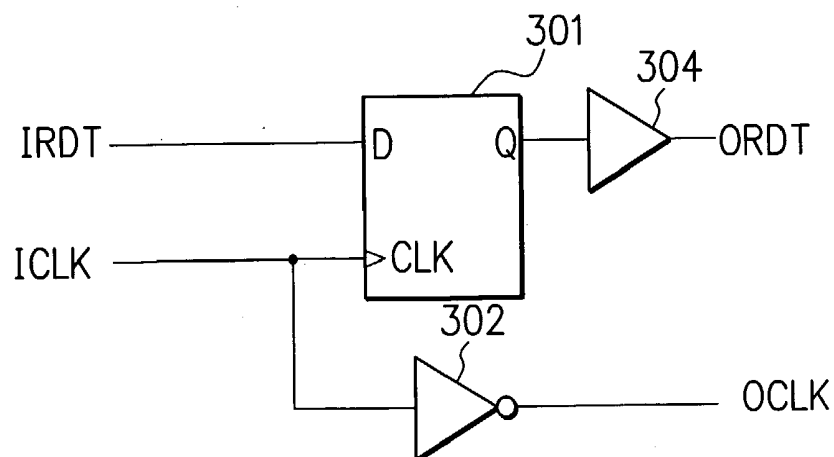


F I G. 4

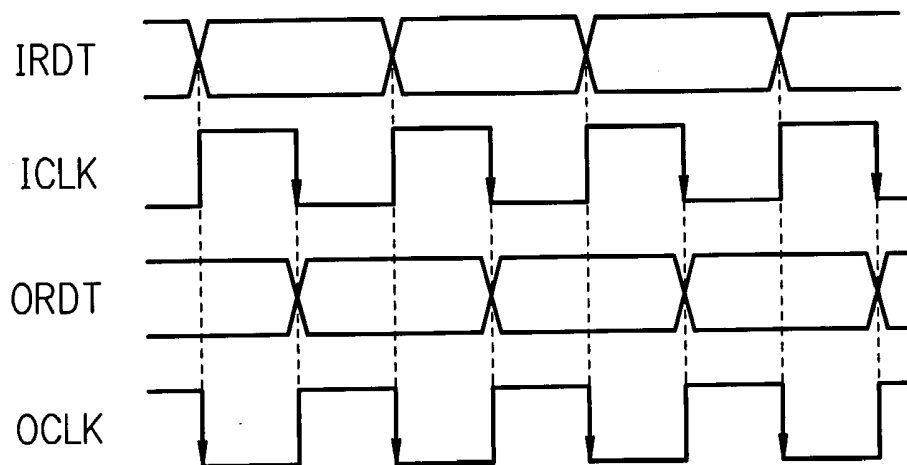


F I G. 5

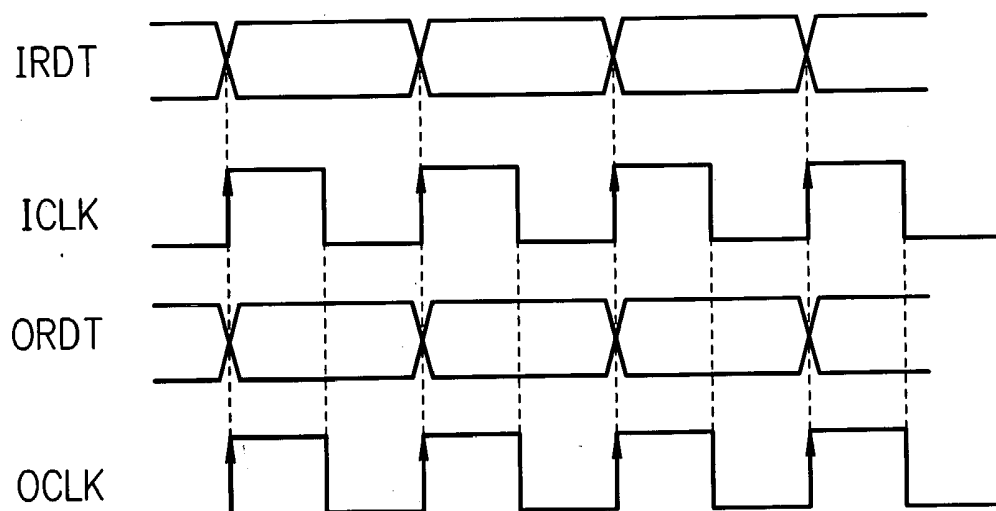


F I G. 6A

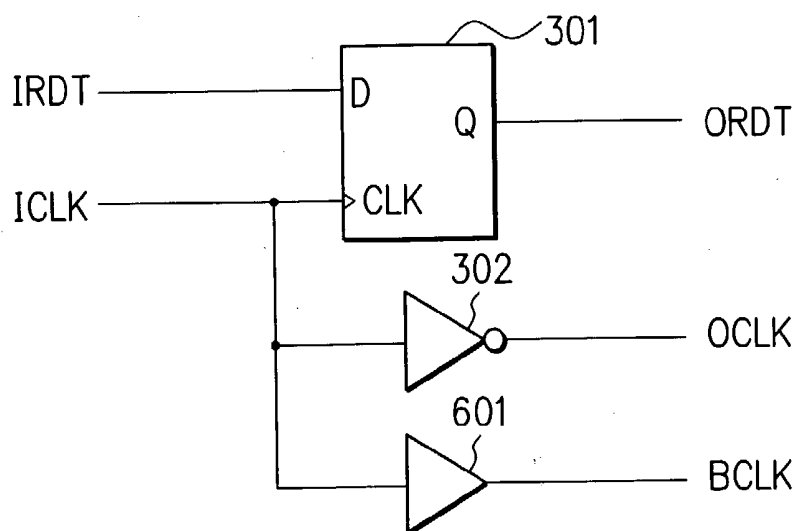


F I G. 6B

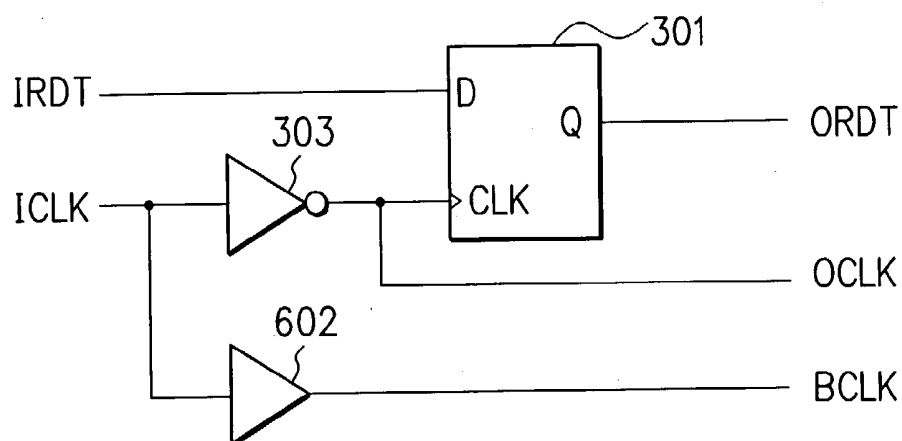


F I G. 7

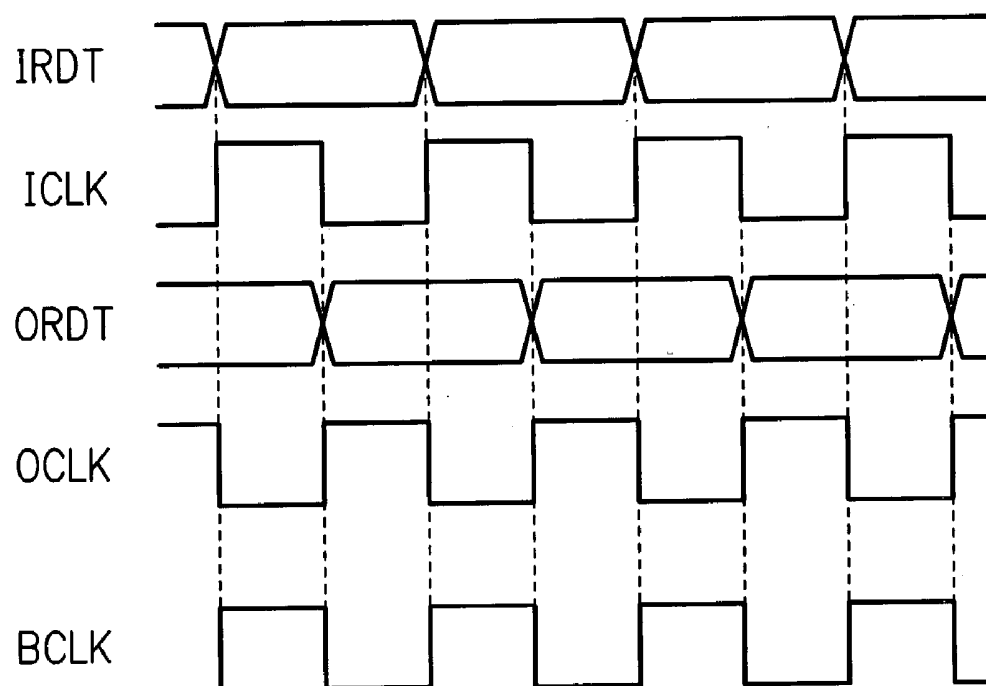


F I G. 8A

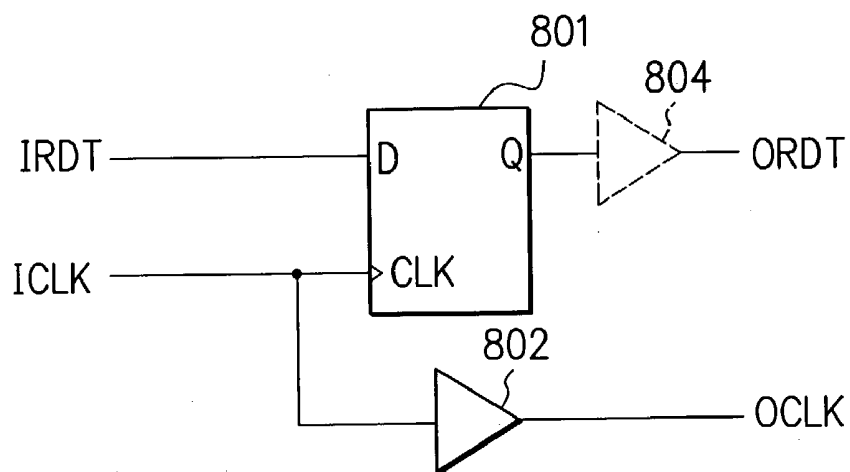


F I G. 8B

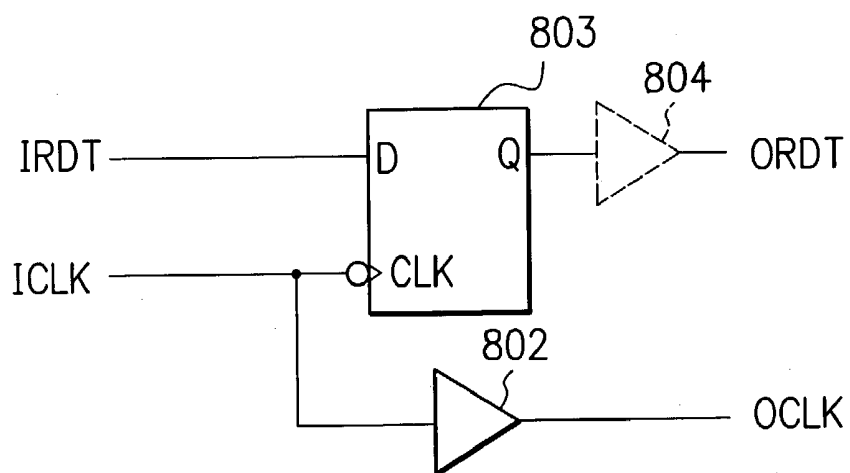

F I G. 9A

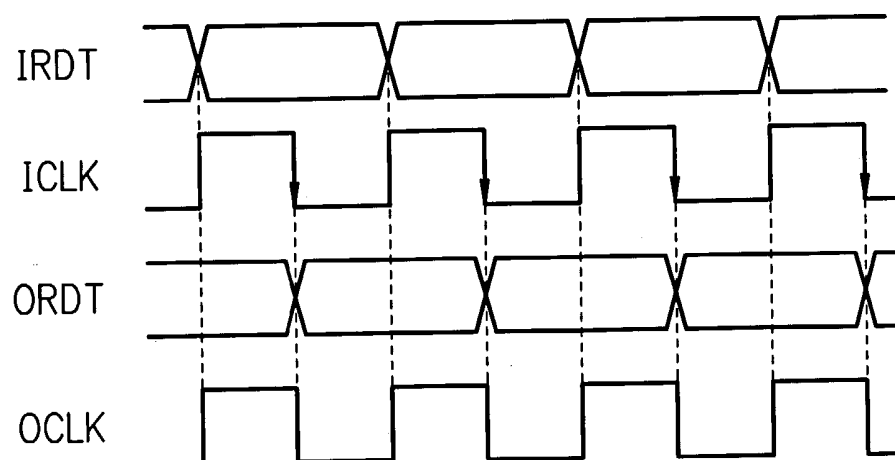

F I G. 9B

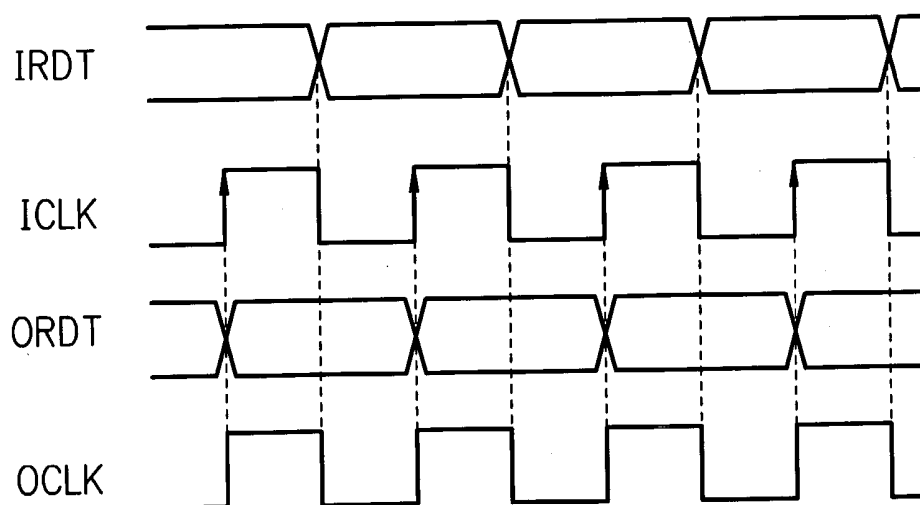

LIQUID CRYSTAL DISPLAY AND DRIVER THEREOF

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is based upon and claims the benefit of priority from the prior Japanese Patent Application No. 2002-096903, filed on Mar. 29, 2002, the entire contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display and a driver thereof, and particularly relates to a driver in which a plurality of driver units are cascaded.

[0004] 2. Description of the Related Art

[0005] In addition to space saving of monitors of personal computers, increases in the number of pixels and display size are required. A liquid crystal display has a structure in which a thin-film transistor (TFT) board and a common board are bonded together to oppose each other and hold liquid crystal therebetween. The liquid crystal is given gradation according to a transmission amount of light corresponding to a potential difference between pixel electrodes of the TFT board and a common electrode of the common substrate.

[0006] A driver of the liquid crystal display performs the above-described gradation display by driving the above-described TFT. On this occasion, if signals on a plurality of signal wires change at the same time, influences of the individual signals become large and have an adverse effect on crosstalk and electromagnetic interference (EMI).

SUMMARY OF THE INVENTION

[0007] An object of the present invention is to provide a liquid crystal display and a driver thereof to prevent adverse effects by crosstalk and/or EMI.

[0008] According to an aspect of the present invention, a liquid crystal display having a transistor board having a plurality of transistors each including a gate, a source and a drain, a common board including a common electrode and provided to oppose the transistor substrate via liquid crystal, a gate driver for driving the gates of the plurality of transistors, and a source driver in which a plurality of source driver units are cascaded to drive the sources of the plurality of transistors is provided. Each of the source driver units has flip-flops, inverters, and an output circuit. In each of the flip-flops, a wire of a clock signal inputted from the source driver unit in a previous stage or an outside is connected to a clock terminal, a wire of an input signal inputted from the source driver unit in the previous stage or the outside is connected to an input terminal, and a wire for outputting an output signal to the source driver unit in a next stage or the outside is connected to an output terminal. In each of the inverters, the wire of the clock signal inputted from the source driver unit in the previous stage or the outside is connected to an input terminal and the wire for outputting the clock signal to the source driver unit in the next stage or the outside is connected to an output terminal. The output circuit outputs a signal to the source of the transistor of the

transistor board corresponding to the input signal inputted from the source driver unit in the previous stage or the outside.

[0009] The inverter inverts the inputted clock signal, and outputs it to the source driver unit in the next stage. As a result, in the even-numbered source driver units and the odd-numbered source driver units, the clock signals are inverted from each other. These non-inverting clock signal and inverting clock signal cancel out each other, and adverse effects of crosstalk and/or EMI can be prevented. In the even-numbered source driver units and the odd-numbered source driver units, the flip-flops are operated in synchronism with the clock signals inverted from each other, and therefore the points of change of the output signals differ from each other. As a result, the time points of change of the output signals are distributed, and the adverse effects of crosstalk and/or EMI can be prevented.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a block diagram showing a constitution of a liquid crystal display according to a first embodiment of the present invention;

[0011] FIG. 2 is a block diagram showing a constitution of a source driver unit;

[0012] FIGS. 3A to 3C are circuit diagrams showing constitution examples of a timing adjusting circuit according to the first embodiment;

[0013] FIG. 4 is a timing chart to explain an operation of the timing adjusting circuit in FIG. 3A;

[0014] FIG. 5 is a reference timing chart to explain an effect of the timing adjusting circuit in FIG. 3A;

[0015] FIGS. 6A and 6B are circuit diagrams showing constitution examples of a timing adjusting circuit according to a second embodiment of the present invention;

[0016] FIG. 7 is a timing chart to explain an operation of the timing adjusting circuit in FIG. 6A;

[0017] FIGS. 8A and 8B are circuit diagrams showing constitution examples of a timing adjusting circuit according to a third embodiment of the present invention; and

[0018] FIGS. 9A and 9B are timing charts to explain operations of the timing adjusting circuits in FIGS. 8A and 8B.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0019] First Embodiment

[0020] FIG. 1 is a view showing a constitution of a liquid crystal display according to a first embodiment of the present invention. A thin-film transistor (TFT) board 101 has a plurality of n-channel MOS transistors 111, which are arranged in a two-dimensional matrix form. Each of the transistors has a gate, a source and a drain. A common board 102 includes a common electrode formed on an entire surface of the board, and is provided to oppose the TFT board 101 via liquid crystal. The common electrode is connected to a ground potential. In the transistor 111, the gate is connected to a gate driver 104, the source is connected to a source driver unit 107a and the like, and the drain

is connected to a pixel electrode **112**. A transmission amount of light of the liquid crystal changes according to potential differences between the pixel electrodes **112** and the common electrode of the common board **102**, and thereby gradation display can be performed. A timing controller **103** supplies a gate clock signal, gate start pulse and the like to the gate driver **104**. The gate driver **104** drives the gates of the transistors **111** according to the gate clock signal and the like.

[0021] A source driver has a plurality of source driver units **107a**, **107b**, . . . , and **107z** cascaded with wires **108**, and drives the sources of a plurality of transistors (drive elements) **111**. The source driver units **107a**, **107b**, . . . , and **107z** have the same constitutions, and they are formed on TABs (tape automated bondings) **106a**, **106b**, . . . , and **106z**, respectively. A printed board **105** is a board to form the wire **108** between the timing controller **103** and the TAB **106a**, and the wires **108** to cascade a plurality of source driver units **107a** to **107z**.

[0022] Hereinafter, all or each of the TABs **106a**, **106b**, and **106z** will be called a TAB **106**. Each of the source driver units **107a**, **107b**, . . . , and **107z** will be called a source driver unit **107**.

[0023] The timing controller **103** supplies clock signals, display data, and control signals to a plurality of source driver units **107** via the wires **108**. Each of the source driver units **107** performs timing adjustment of the inputted signals and outputs them to the source driver unit **107** in the next stage. Each of the source driver units **107** drives the sources of, for example, 384 transistors **111** based on the above-described inputted signals.

[0024] FIG. 2 shows a constitution of each of the source driver units **107**. A shift resistor part **201** inputs a cascade signal ICD and a clock signal ICLK from the timing controller **103** or the source driver unit **107** in the previous stage, shifts the cascade signal ICD, and supplies storage timing pulse to a data register part **202**. The data register part **202** inputs red display data IRDT, green display data IGDT, and blue display data IBDT from the timing controller **103** or the source driver unit **107** in the previous stage, and stores the display data IRDT, IGDT, and IBDT according to the above-described storage timing pulse. As for the transistors **111** (FIG. 1), for example, the transistors for red, green and blue are arranged in this order repeatedly in the horizontal direction in the drawing. Correspondingly to this, registers inside the data register part **202** are also arranged repeatedly in the order of the registers for red, green, and blue. The registers store the display data in the order of the registers from the left side of the drawing to the right side. When the storing is finished, a cascade signal OCD which is a result of the cascade signal ICD being shifted is outputted to the source driver unit **107** in the next stage, and in the source driver unit **107** in the next stage, the display data are stored in sequence. Display data ORDT, OGDT and OBDT are the display data IRDT, IGDT and IBDT with timing adjustment being performed, and are supplied to the source driver unit **107** in the next stage. A data inverting signal IINV is also inputted into the data register part **202**.

[0025] When the data register parts **202** of all the source driver units **107** finish storing the display data IRDT and the like, a latch part **203** inputs therein latch pulse LP from the timing controller **103** or the source driver unit **107** in the

previous stage, and latches the display data IRDT and the like which are stored in the data register part **202**. A level shift part **204** converts, for example, 8 bits of the display data IRDT and the like, which the latch part **203** latches, into gradation data.

[0026] A D/A converter part **205** inputs therein a polarity inverting signal IPOL and a reference power supply Va from the timing controller **103** or the source driver unit **107** in the previous stage, and converts the gradation data in a digital form, which is outputted by the level shift part **204**, into an analogue form based on the reference power supply Va. The D/A converter part **205** outputs gradation data at either a positive potential or a negative potential correspondingly to the polarity inverting signal IPOL. In FIG. 1, the common electrode of the common board **102** is at a ground potential, and the gradation data at a positive potential and the gradation data at a negative potential are alternately supplied to the sources of the transistors **111** for each frame or field. As a result, the life of the liquid crystal can be elongated. An output part **206**, which has an operational amplifier, amplifies the gradation data which is outputted by the D/A converter part **205**, and outputs it to the source of the transistor **111** in FIG. 1.

[0027] Next, timing adjusting circuits **210a** to **210f** will be explained. The timing adjusting circuit **210a** adjusts a timing of the clock signal ICLK to output the clock signal OCLK, and performs timing adjustment of the signal which is the cascade signal ICD shifted by the shift register part **201** to output it as the cascade signal OCD. The cascade signal OCD and the clock signal OCLK are inputted into the source driver unit **107** in the next stage as the cascade signal ICD and the clock signal ICLK.

[0028] In synchronization with the clock signal ICLK, the timing adjusting circuits **210b**, **210c** and **210d** perform timing adjustment of the respective display data IRDT, IGDT and IBDT and output them as the display data ORDT, OGDT and OBDT. Instead of the timing adjusting circuit **210a**, the timing adjusting circuit **210b** or the like may output the clock signal OCLK. The display data ORDT, OGDT and OBDT are inputted into the source driver unit **107** in the next stage as the display data IRDT, IGDT and IBDT. The timing adjusting circuit **210d** may perform timing adjustment of the data inverting signal IINV other than the display data OBDT and may output it as a data inverting signal OINV, in synchronism with the clock signal ICLK, or some other timing adjusting circuit may output the data inverting signal OINV.

[0029] Similarly, the timing adjusting circuits **210e** and **210f** perform timing adjustment of latch pulse ILP and the polarity inverting signal IPOL and output them as latch pulse OLP and a polarity inverting signal OPOL, respectively, in synchronism with the clock signal ICLK. The latch pulse OLP and the polarity inverting signal OPOL are inputted into the source driver unit **107** in the next stage as the latch pulse ILP and the polarity inverting signal IPOL, respectively.

[0030] As described above, the timing adjusting circuits **210a** to **210f** perform timing adjustment of the display data or the control signals and outputs them to the source driver unit **107** in the next stage, in synchronism with the clock signal ICLK. Here, the control signals include the above-described cascade signal ICD, latch pulse ILP, data inverting

signal IINV and polarity inverting signal IPOL. It is sufficient if any one of the timing adjusting circuits **210a** to **210f** outputs the clock signal OCLK. All the timing adjusting circuits **210a** to **210f** have the same circuit constitutions, and therefore, the explanation will be made below with the timing adjusting circuit **210b** as an example. On this occasion, the explanation is made with the timing adjusting circuit **210b** outputting the clock signal OCLK other than the display data ORDT.

[0031] FIG. 3A shows a constitution example of the timing adjusting circuit **210b**. In a D-type flip-flop **301**, a wire of the clock signal ICLK is connected to a clock terminal CLK, a wire of the input signal (display data) IRDT is connected to an input terminal D, and a wire for outputting an output signal (display data) ORDT is connected to an output terminal Q. In an inverter **302**, the wire of the clock signal ICLK is connected to an input terminal, and a wire for outputting the clock signal OCLK is connected to an output terminal.

[0032] FIG. 4 is a timing chart to explain an operation of FIG. 3A. The flip-flop **301** outputs the input signal IRDT as the output signal ORDT in synchronism with a falling edge of the clock signal ICLK. The inverter **302** performs logical inversion (phase inversion) of the clock signal ICLK to output the clock signal OCLK. As a result, the clock signals ICLK and OCLK have their phases inverted from each other, and therefore they cancel out the effects of crosstalk and EMI on each other. The signals IRDT and ORDT have the points of change deviated with respect to time, and therefore the peaks of crosstalk and EMI can be distributed with respect to time and relieved. By the above-described operation, adverse effects by crosstalk and EMI can be prevented as a whole.

[0033] FIG. 5 is a timing chart when the inverter **302** in FIG. 3A does not exist, and it will be explained as compared with FIG. 4. It can be actually considered to remove the inverter **302**, or provide a buffer instead of the inverter **302**. To make the drawing simple and plain, the explanation will be made with the case in which the flip-flop is operated in synchronism with a rising edge as an example, but the explanation is the same in the case in which it is operated in synchronism with a falling edge. In this case, the clock signal OCLK has the same phase as the clock signal ICLK. The signals IRDT and ORDT have the same points of change. As a result, the clock signals ICLK and OCLK have the same phase, and therefore the peaks of crosstalk and EMI increase at the rising edge and the falling edge. Since the signals IRDT and ORDT have the same point of change, the peaks of crosstalk and EMI increase at the point of change.

[0034] According to this embodiment, by providing the inverter **302**, the phases of the clock signals ICLK and OCLK are inverted, and the points of change of the signals IRDT and ORDT are deviated from each other, as shown in FIG. 4, and therefore crosstalk and EMI can be prevented.

[0035] FIG. 3B shows another constitution example of the timing adjusting circuit **210b**. Here, an inverter **303** is connected instead of the inverter **302** in FIG. 3A. In the inverter **303**, the wire of the clock signal ICLK is connected to an input terminal, and the wire for outputting the clock signal OCLK is connected to an output terminal. In the flip-flop **301**, the output terminal of the inverter **303** is

connected to the clock terminal CLK, the wire of the input signal IRDT is connected to the input terminal D, and the wire for outputting the output signal ORDT is connected to the output terminal Q. While in the circuit in FIG. 3A, the inverter **302** is provided in an output stage, the inverter **303** is provided in an input stage in FIG. 3B. The operation of the circuit in FIG. 3B is the same as FIG. 4.

[0036] FIG. 3C shows still another constitution example of the timing adjusting circuit **210b**. This circuit is the circuit in FIG. 3A provided with a buffer **304**. In the buffer **304**, the output terminal Q of the flip-flop **301** is connected to an input terminal thereof, and the wire for outputting the output signal ORDT is connected to an output signal thereof. The buffer **304** corresponds to the inverter **302**, and is for adjusting a delay time of the output signal ORDT. Similarly, the buffer **304** may be added to the circuit in FIG. 3B.

[0037] Second Embodiment

[0038] A liquid crystal display according to a second embodiment of the present invention is basically the same as the constitutions shown in FIG. 1 and FIG. 2, and it differs only in an internal constitution of the timing adjusting circuits **210a** to **210f**. The explanation will be made below with the timing adjusting circuit as an example.

[0039] FIG. 6A shows a constitution example of the timing adjusting circuit **210b** according to this embodiment. This circuit is the circuit in FIG. 3A to which a buffer **601** is added. In the buffer **601**, the wire of the clock signal ICLK is connected to an input terminal, and a wire of a clock signal BCLK is connected to an output terminal. The buffer **601** amplifies the clock signal ICLK and outputs it as the clock signal BCLK.

[0040] As shown in FIG. 7, with the input clock signal ICLK being made a reference, the clock signal OCLK is the inverting clock signal, and the clock signal BCLK is a non-inverting signal. The clock signals OCLK and BCLK are the signals with their phase being inverted from each other. The wires of the clock signals OCLK and BCLK are laid on the TAB **106** and the printed board **105** in FIG. 1 in close vicinity to each other, whereby the action by crosstalk and EMI on both of them are cancelled out by each other, and adverse effects by the crosstalk and EMI can be further prevented. The clock signal BCLK has a dummy wire, which is not used in the circuit operation.

[0041] The wire of the clock signal OCLK of the source driver unit **107** in the previous stage is connected to the clock terminal CLK of the flip-flop **301** of the source driver unit **107** in the next stage. It is sufficient if only the clock signal BCLK is inverted in phase with respect to the clock signal OCLK, and therefore the buffer **601** is not necessarily required. In this case, the wire of the signal ICLK is directly connected to the wire of the signal BCLK.

[0042] FIG. 6B shows another constitution example of the timing adjusting circuit **210b** according to this embodiment. The circuit is the circuit in FIG. 3B provided with the buffer **602** as in FIG. 6A. In the buffer **602**, the wire of the clock signal ICLK is connected to an input terminal, and the wire of the clock signal BCLK is connected to an output terminal. The buffer **602** amplifies the clock signal ICLK and outputs it as the clock signal BCLK. The operation of this circuit is the same as the timing chart in FIG. 7. Since the clock

signals OCLK and BCLK have their phases inverted from each other, adverse effects by crosstalk and EMI can be further prevented.

[0043] Third Embodiment

[0044] liquid crystal display according to a third embodiment of the present invention is basically the same as the constitution shown in **FIG. 1** and **FIG. 2**, and it differs only in the internal constitution of the timing adjusting circuits **210a** to **210f**. The explanation will be made below with the timing adjusting circuit **210b** as an example.

[0045] **FIGS. 8A** and **8B** show constitution examples of the timing adjusting circuit **210b** according to this embodiment. Of the source driver, the even-numbered source driver units **107** have the constitutions in **FIG. 8A**, and the odd-numbered source driver units **107** have the constitutions in **FIG. 8B**.

[0046] First, a constitution example of the timing adjusting circuit **210b** of the even-numbered source driver unit **107** in **FIG. 8A** will be explained. In a flip-flop **801**, the wire of the clock signal ICLK is connected to a clock terminal CLK, the wire of the input signal IRDT is connected to an input terminal D, and the wire of the output signal ORDT is connected to an output terminal Q. Here, the flip-flop **801** is operated in synchronism with falling of the clock signal ICLK, which is inputted into the clock terminal CLK. In a buffer **802**, the wire of the clock signal ICLK is connected to an input terminal, and the wire of the clock signal OCLK is connected to an output terminal.

[0047] **FIG. 9A** is a timing chart to explain an operation of the circuit in **FIG. 8A**. The flip-flop **801** outputs the input signal IRDT as the output signal ORDT, in synchronism with the falling edge of the clock signal ICLK. The buffer **802** amplifies the clock signal ICLK in the same phase as it and outputs the clock signal ICLK as the clock signal OCLK.

[0048] Next, a constitution example of the timing adjusting circuit **210b** of the odd-numbered source driver unit **107** in **FIG. 8B** will be explained. The circuit in **FIG. 8B** is provided with a flip-flop **803** instead of the flip-flop **801** in **FIG. 8A**. The flip-flop **803** is operated in synchronism with the rising edge of the clock signal ICLK which is inputted into the clock terminal CLK.

[0049] **FIG. 9B** is a timing chart to explain the operation of the circuit in **FIG. 8B**. The flip-flop **803** outputs the input signal IRDT as the output signal ORDT in synchronism with the rising edge of the clock signal ICLK. The buffer **802** amplifies the clock signal ICLK in the same phase as it and outputs the clock signal ICLK as the clock signal OCLK.

[0050] The even-numbered source driver units **107** and the odd-numbered source driver units **107** are alternately cascaded. The even-numbered circuit in **FIG. 8A** is operated in synchronism with the falling edge of the clock signal ICLK as shown in **FIG. 9A**, and the odd-numbered circuit in **FIG. 8B** is operated in synchronism with the rising edge of the clock signal ICLK as shown in **FIG. 9B**. As a result, the points of change of the output signal ORDT of the even-numbered circuit (**FIG. 9A**) and the output signal ORDT of the odd-numbered circuit (**FIG. 9B**) are deviated from each other. Thus, the peaks of crosstalk and EMI are distributed, and adverse effects by the crosstalk and EMI can be prevented.

[0051] As shown in **FIGS. 8A** and **8B**, a buffer **804** to adjust delay time of the output signal ORDT may be provided as in **FIG. 3C**. In the buffers **804**, the output terminals Q of the flip-flops **801** and **803** are connected to the input terminals thereof, and the wires of the output signal ORDT are connected to the output terminals. Both of the buffers **802** and **804** may be deleted. In this case, the wire of the clock signal ICLK is directly connected to the wire of the clock signal OCLK. The flip-flop **801** of the even-numbered circuit in **FIG. 8A** may be operated in synchronism with rising of the clock signal ICLK, and the flip-flop **803** of the odd-numbered circuit in **FIG. 8B** may be operated in synchronism with falling of the clock signal ICLK. It may be sufficient if both the flip-flops are operated in synchronism with the edges in the different directions.

[0052] When the source driver unit **107** is formed on the TAB **106**, it is necessary to make all the source driver units **107** have the same constitutions. Thus, a pin to switch the circuit in **FIG. 8A** and the circuit in **FIG. 8B** is provided. A control signal at a high level or a low level is supplied according to the position of the pin, and it may be suitable to switch to the circuit in **FIG. 8A** or the circuit in **FIG. 8B** correspondingly to the control signal. In concrete, the flip-flop is switched to operate in synchronism with either the rising edge or the falling edge, correspondingly to the control signal. It is not limited to the case in which the source driver unit **107** is formed on the TAB **106**. The source driver unit **107** may be formed on the TFT board **101** according to COG (chip on glass). The source driver unit **107** is a semiconductor chip, and the TFT board is a glass board.

[0053] As described above, according to the first and the second embodiments, the inverter inverts the input clock signal ICLK and outputs it to the source driver unit in the next stage as the output clock signal OCLK. As a result, the clock signals in the even-numbered source driver unit and the odd-numbered source driver unit are inverted from each other. The non-inverting clock signal and inverting clock signal cancel out each other, and adverse effects of crosstalk and/or EMI can be prevented. The time points of change of the output signal ORDT differ in the even-numbered source driver unit and the odd-numbered source driver unit. Consequently, the points of change of the output signals are distributed with respect to time, and the adverse effects of crosstalk and/or EMI can be prevented.

[0054] According to the third embodiment, the even-numbered source driver unit is operated in synchronism with either the falling edge or the rising edge of the clock signal ICLK, and the odd-numbered source driver unit is operated in synchronism with either the rising edge or the falling edge of the clock signal ICLK which is different from the even-numbered source driver unit. As a result, the points of change of the output signals ORDT of the even-numbered and the odd-numbered source driver units are deviated from each other. Thus, the peaks of crosstalk and EMI are distributed, and the adverse effects by the crosstalk and EMI can be prevented.

[0055] The present embodiments are to be considered in all respects as illustrative and no restrictive, and all changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein.

The invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof.

[0056] As explained above, the inverter inverts the input clock signal and outputs it to the source driver unit in the next stage. As a result, the clock signals in the even-numbered source driver unit and the odd-numbered source driver unit are inverted from each other. The non-inverting clock signal and inverting clock signal cancel out each other, and adverse effects of crosstalk and/or EMI can be prevented. The points of change of the output signal differ in the even-numbered source driver unit and the odd-numbered source driver unit, because the flip-flops are operated in synchronism with the clock signals inverted from each other. Consequently, the time points of change of the output signals are distributed, and the adverse effects of crosstalk and/or EMI can be prevented.

What is claimed is:

1. A liquid crystal display, comprising:

- a transistor board having a plurality of transistors each including a gate, a source and a drain;
- a common board including a common electrode and provided to oppose said transistor board via liquid crystal;
- a gate driver for driving the gates of said plurality of transistors; and
- a source driver with a plurality of source driver units being cascaded, for driving the sources of said plurality of transistors,

wherein each of said source driver units comprises:

flip-flops each with a wire of a clock signal inputted from the source driver unit in a previous stage or an outside being connected to a clock terminal, a wire of an input signal inputted from the source driver unit in the previous stage or the outside being connected to an input terminal, and a wire for outputting an output signal to the source driver unit in a next stage or the outside being connected to an output terminal;

inverters each with the wire of the clock signal inputted from said source driver unit in the previous stage or the outside being connected to an input terminal, and the wire for outputting the clock signal to the source driver unit in the next stage or the outside being connected to an output terminal; and

an output circuit for outputting a signal to the source of the transistor of said transistor board correspondingly to the input signal inputted from said source driver unit in the previous stage or the outside.

2. The liquid crystal display according to claim 1, further comprising:

buffers for delay time adjustment each with the output terminal of said flip-flop being connected to an input terminal and the wire for outputting the output signal to the source driver unit in the next stage or the outside being connected to an output terminal.

3. The liquid crystal display according to claim 1, further comprising:

a first output wire for outputting an inverting clock signal outputted by said inverter to the source driver unit in the next stage or the outside; and

a second output wire for outputting a non-inverting clock signal of the clock signal inputted from said source driver unit in the previous stage or the outside to the source driver unit in the next stage or the outside,

wherein in said flip-flop, the first output wire of the source driver unit in the previous stage or the wire of the clock signal inputted from the outside is connected to the clock terminal.

4. The liquid crystal display according to claim 1, wherein display data or a control signal is inputted into the input terminal of said flip-flop.

5. A driver of a liquid crystal display in which a plurality of driver units are cascaded,

wherein each of said driver units comprises:

flip-flops each with a wire of a clock signal inputted from the driver unit in a previous stage or an outside being connected to a clock terminal, a wire of an input signal inputted from the driver unit in the previous stage or the outside being connected to an input terminal, and a wire for outputting an output signal to the driver unit in a next stage or the outside being connected to an output terminal;

inverters each with the wire of the clock signal inputted from said driver unit in the previous stage or the outside being connected to an input terminal, and the wire for outputting the clock signal to the driver unit in the next stage or the outside being connected to an output terminal; and

an output circuit for outputting a signal to a drive element of the liquid crystal display correspondingly to the input signal inputted from said driver unit in the previous stage or the outside.

6. The driver of the liquid crystal display according to claim 5, further comprising:

buffers for delay time adjustment, each with the output terminal of said flip-flop being connected to an input terminal and a wire for outputting the output signal to the driver unit in the next stage or the outside being connected to an output terminal.

7. The driver of the liquid crystal display according to claim 5, further comprising:

a first output wire for outputting an inverting clock signal outputted by said inverter to the driver unit in the next stage or the outside; and

a second output wire for outputting a non-inverting clock signal of the clock signal inputted from said driver unit in the previous stage or the outside to the driver unit in the next stage or the outside,

wherein in said flip-flop, the first output wire of the driver unit in the previous stage or the wire of the clock signal inputted from the outside is connected to the clock terminal.

8. The driver of the liquid crystal display according to claim 5, wherein display data or a control signal is inputted into the input terminal of said flip-flop.

9. A liquid crystal display, comprising:

- a transistor board having a plurality of transistors each including a gate, a source and a drain;
- a common board including a common electrode and provided to oppose said transistor board via liquid crystal;
- a gate driver for driving the gates of said plurality of transistors; and
- a source driver with a plurality of source driver units being cascaded, for driving the sources of said plurality of transistors,

wherein each of said source driver units comprising:

inverters each with a wire of a clock signal inputted from said source driver unit in a previous stage or an outside being connected to an input terminal, and a wire for outputting the clock signal to the source driver unit in a next stage or the outside being connected to an output terminal;

flip-flops each with the output terminal of said inverter being connected to a clock terminal, a wire of an input signal inputted from the source driver unit in the previous stage or the outside being connected to an input terminal, and a wire for outputting an output signal to the source driver unit in the next stage or the outside being connected to an output terminal; and

an output circuit for outputting a signal to the source of the transistor of said transistor board correspondingly to the input signal inputted from said source driver unit in the previous stage or the outside.

10. The liquid crystal display according to claim 9, further comprising:

buffers for delay time adjustment each with the output terminal of said flip-flop being connected to an input terminal, and the wire for outputting the output signal to the source driver unit in the next stage or the outside being connected to an output terminal.

11. The liquid crystal display according to claim 9, further comprising:

a first output wire for outputting an inverting clock signal outputted by said inverter to the source driver unit in the next stage or the outside; and

a second output wire for outputting a non-inverting clock signal of the clock signal inputted from said source driver unit in the previous stage or the outside to the source drive unit in the next stage or the outside,

wherein in said flip-flop, the first output wire of the source driver unit in the previous stage or the wire of the clock signal inputted from the outside is connected to the clock terminal.

12. The liquid crystal display according to claim 9, wherein display data or a control signal is inputted into the input terminal of said flip-flop.**13.** A driver of a liquid crystal display with a plurality of driver units being cascaded,

wherein each of said driver units comprises:

inverters each with a wire of a clock signal inputted from said driver unit in a previous stage or an outside

being connected to an input terminal and a wire for outputting the clock signal to the driver unit in a next stage or the outside being connected to an output terminal;

flip-flops each with the output terminal of said inverter being connected to a clock terminal, a wire of an input signal inputted from the driver unit in the previous stage or the outside being connected to an input terminal, and a wire for outputting an output signal to the driver unit in the next stage or the outside being connected to an output terminal; and

an output circuit for outputting a signal to a drive element of the liquid crystal display correspondingly to the input signal inputted from said driver unit in the previous stage or the outside.

14. The driver of the liquid crystal display according to claim 13, further comprising:

buffers for delay time adjustment each with the output terminal of said flip-flop being connected to an input terminal, and a wire for outputting the output signal to the driver unit in the next stage or the outside being connected to an output terminal.

15. The driver of the liquid crystal display according to claim 13, further comprising:

a first output wire for outputting an inverting clock signal outputted by said inverter to the driver unit in the next stage or the outside; and

a second output wire for outputting a non-inverting clock signal of the clock signal inputted from said driver unit in the previous stage or the outside to the driver unit in the next stage or the outside,

wherein in said flip-flop, the first output wire of the driver unit in the previous stage or the wire of the clock signal inputted from the outside is connected to the clock terminal.

16. The driver of the liquid crystal display according to claim 13, wherein display data or a control signal is inputted into the input terminal of said flip-flop.**17.** A liquid crystal display, comprising:

a transistor board having a plurality of transistors each including a gate, a source and a drain;

a common board including a common electrode and provided to oppose said transistor board via liquid crystal;

a gate driver for driving the gates of said plurality of transistors; and

a source driver with a plurality of source driver units being cascaded, for driving the sources of said plurality of transistors,

wherein each of even-numbered source driver units in said source driver comprising:

flip-flops for outputting an output signal to the source driver unit in a next stage or an outside correspondingly to an input signal inputted from the source driver unit in a previous stage or the outside, in synchronism with either edge of a rising edge or a

falling edge of a clock signal inputted from the source driver unit in the previous stage or the outside; and

an output circuit for outputting a signal to the source of the transistor of said transistor board correspondingly to the input signal inputted from said source driver unit in the previous stage or the outside, and

wherein each of odd-numbered source driver units in said source driver comprising:

flip-flops for outputting the output signal to the source driver unit in the next stage or the outside correspondingly to the input signal inputted from the source driver unit in the previous stage or the outside, in synchronism with an edge being either edge of a falling edge or a rising edge of the clock signal inputted from the source driver unit in the previous stage or the outside and being different from that of the flip-flops of said even-numbered source driver units; and

an output circuit for outputting a signal to the source of the transistor of said transistor board correspondingly to the input signal inputted from said source driver unit in the previous stage or the outside.

18. The liquid crystal display according to claim 17, further comprising:

a buffer for amplification with a wire of the clock signal inputted from said source driver unit in the previous stage or the outside being connected to an input terminal, and a wire for outputting the clock signal to the source driver unit in the next stage or the outside being connected to an output terminal.

19. The liquid crystal display according to claim 18, further comprising:

a buffer for delay time adjustment, with the output terminal of said flip-flop being connected to an input terminal, and the wire for outputting an output signal to the source driver unit in the next stage or the outside being connected to an output terminal.

20. The liquid crystal display according to claim 17, wherein display data or a control signal is inputted into an input terminal of said flip-flop.

21. A driver of a liquid crystal display with even-numbered and odd-numbered driver units being alternately cascaded,

wherein each of said even-numbered driver units comprising:

flip-flops for outputting an output signal to the driver unit in a next stage or an outside correspondingly to an input signal inputted from the driver unit in a previous stage or the outside, in synchronism with either edge of a rising edge or a falling edge of a clock signal inputted from the driver unit in the previous stage or the outside; and

an output circuit for outputting a signal to a drive element of the liquid crystal device correspondingly to the input signal inputted from said driver unit in the previous stage or the outside, and

wherein each of said odd-numbered driver units comprising:

flip-flops for outputting the output signal to the driver unit in the next stage or the outside correspondingly to the input signal inputted from the driver unit in the previous stage or the outside, in synchronism with an edge being either edge of a falling edge or a rising edge of the clock signal inputted from the driver unit in the previous stage or the outside and being different from that of the flip-flop of said even-numbered driver unit; and

an output circuit for outputting a signal to the drive element of the liquid crystal display correspondingly to the input signal inputted from the driver unit in the previous stage or the outside.

22. The driver of the liquid crystal display according to claim 21, further comprising:

a buffer for amplification with a wire of the clock signal inputted from said driver unit in the previous stage or the outside being connected to an input terminal, and a wire for outputting the clock signal to the driver unit in the next step or the outside being connected to an output terminal.

23. The driver of the liquid crystal display according to claim 22, further comprising:

a buffer for delay time adjustment with the output terminal of said flip-flop being connected to an input terminal, and the wire for outputting an output signal to the driver unit in the next stage or the outside being connected to an output terminal.

24. The driver of the liquid crystal display according to claim 21, wherein display data or a control signal is inputted into an input terminal of said flip-flop.

* * * * *

专利名称(译)	液晶显示器及其驱动器		
公开(公告)号	US20030184511A1	公开(公告)日	2003-10-02
申请号	US10/386788	申请日	2003-03-12
[标]申请(专利权)人(译)	富士通显示技术股份有限公司		
申请(专利权)人(译)	富士通显示器科技股份有限公司		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	SEKIDO SATOSHI FUKUTOKU SYOICHI HIRAKI KATSUYOSHI		
发明人	SEKIDO, SATOSHI FUKUTOKU, SYOICHI HIRAKI, KATSUYOSHI		
IPC分类号	G02F1/133 G09G3/20 G09G3/36		
CPC分类号	G09G3/20 G09G3/3688 G09G2300/0426 G09G2330/06 G09G2310/08 G09G2320/0209 G09G2310/027		
优先权	2002096903 2002-03-29 JP		
其他公开文献	US7064739		
外部链接	Espacenet USPTO		

摘要(译)

本发明的目的是提供一种液晶显示器，以防止由串扰和/或EMI引起的不利影响。一种液晶显示器，具有：晶体管板，具有多个晶体管，每个晶体管包括栅极，源极和漏极；公共板，包括公共电极，设置为通过液晶与上述晶体管板相对；栅极驱动器，用于驱动提供了多个晶体管的栅极，以及具有级联的多个源极驱动器单元的源极驱动器，用于驱动多个晶体管的源极。每个源极驱动器单元具有与时钟信号同步操作的触发器，以及用于反转时钟信号以在下一级将其输出到源极驱动器单元的反相器。

