



(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2002/0125535 A1**

Ueda

(43) **Pub. Date:**

Sep. 12, 2002

(54) **THIN-FILM TRANSISTOR, METHOD FOR FABRICATING THE SAME, AND LIQUID CRYSTAL DISPLAY DEVICE**

(52) **U.S. Cl.** 257/347

(76) **Inventor: Tohru Ueda, Fukuyama-shi (JP)**

(57) **ABSTRACT**

Correspondence Address:
NIXON & VANDERHYE P.C.
8th Floor
1100 North Glebe Rd.
Arlington, VA 22201-4714 (US)

A thin-film transistor includes: a pair of n-type heavily doped regions that are horizontally spaced apart from each other; p-type channel regions that are located between the n-type heavily doped regions so as to face their associated gate electrodes, respectively; an n-type intermediate region provided between two adjacent ones of the channel regions; and two pairs of lightly doped regions. The lightly doped regions in one of the two pairs have mutually different carrier concentrations and are located between one of the heavily doped regions and one of the channel regions that is closer to the heavily doped region than any other channel region is. The lightly doped regions in the other pair also have mutually different carrier concentrations and are located between the other heavily doped region and another one of the channel regions that is closer to the heavily doped region than any other channel region is.

(21) **Appl. No.: 10/020,440**

(22) **Filed: Dec. 18, 2001**

(30) **Foreign Application Priority Data**

Dec. 19, 2000 (JP) 2000-385523

Publication Classification

(51) **Int. Cl.⁷** **H01L 29/04**; H01L 27/01;
H01L 27/12; H01L 31/0376;
H01L 31/0392; H01L 31/036;
H01L 31/20

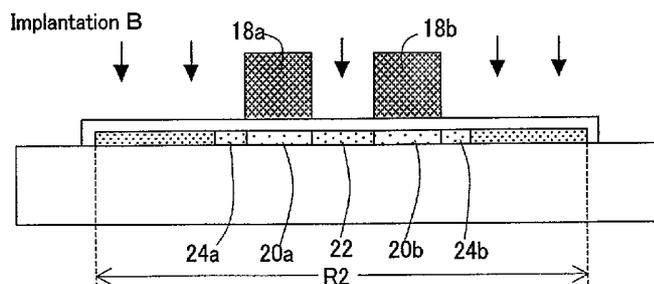
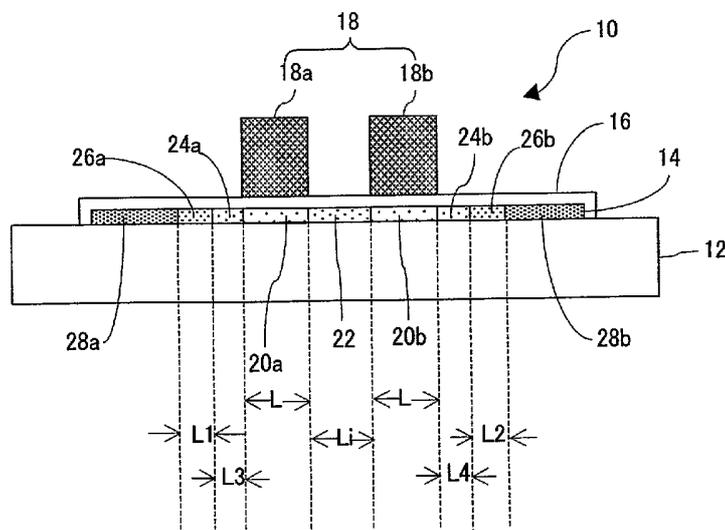


FIG. 1

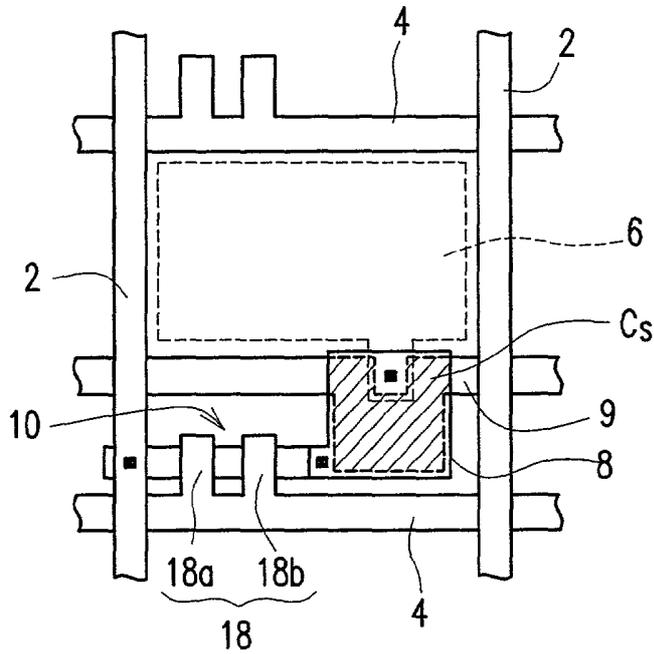


FIG. 2

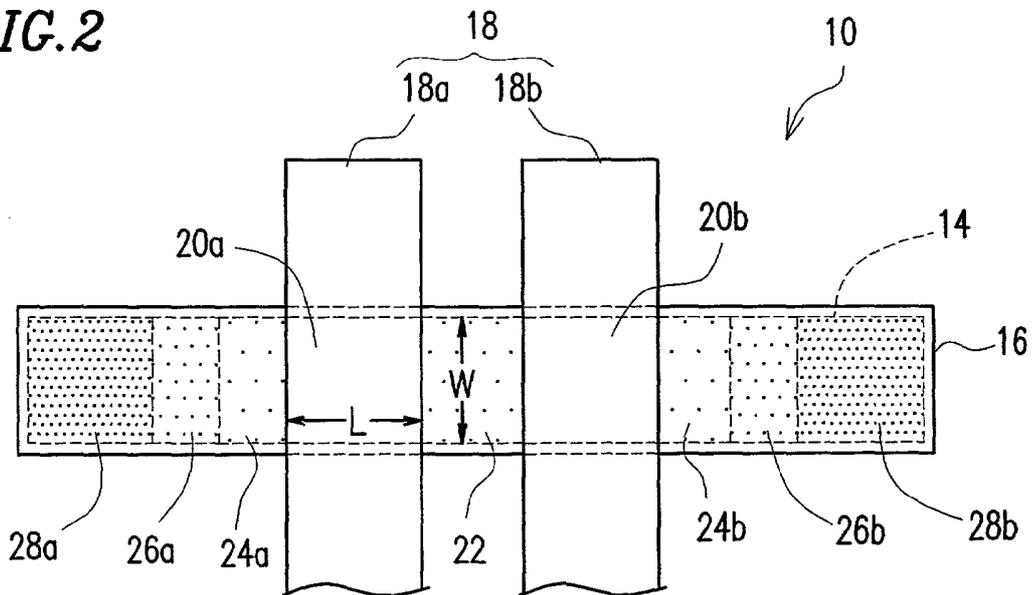


FIG. 3

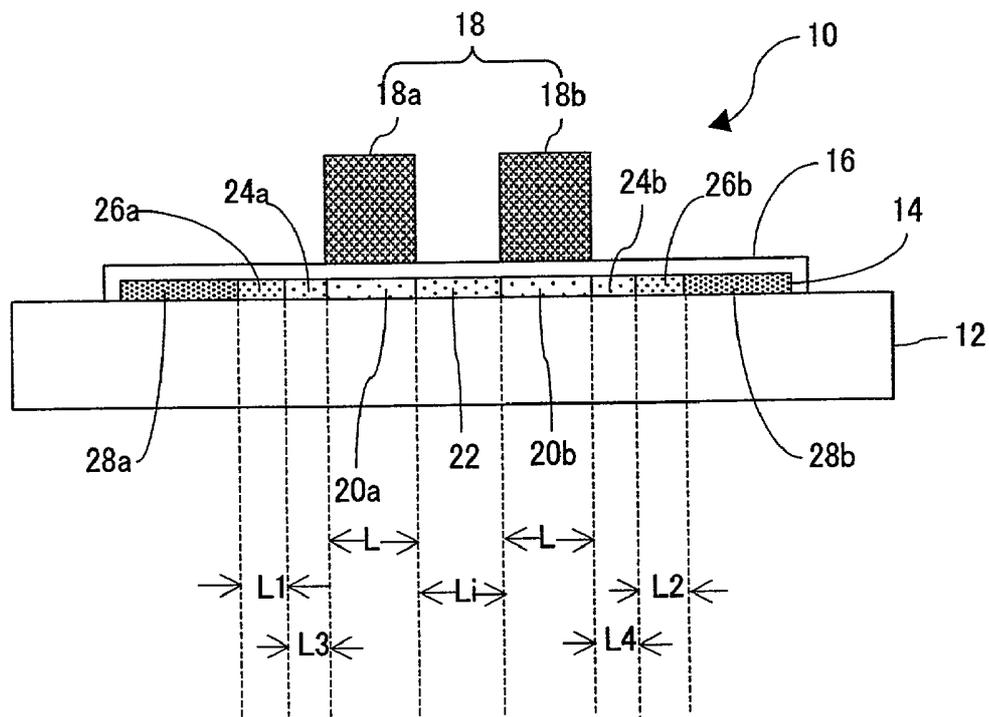


FIG. 4A

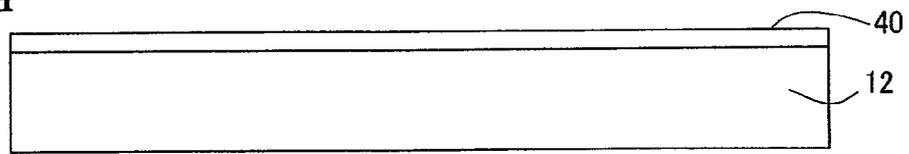


FIG. 4B

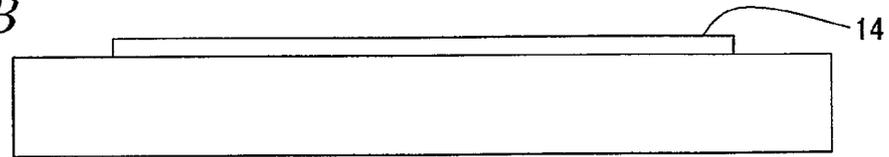


FIG. 4C

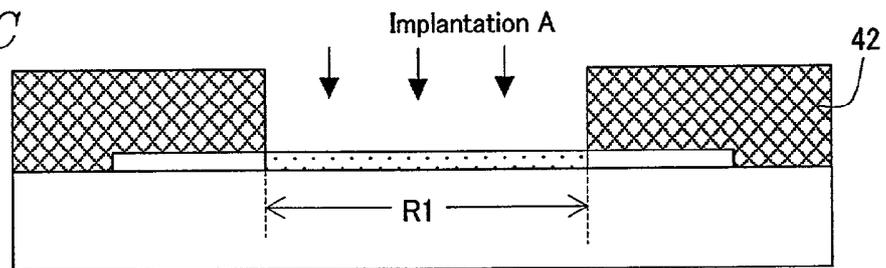


FIG. 4D

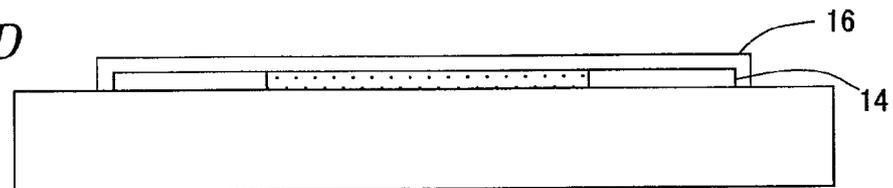


FIG. 4E

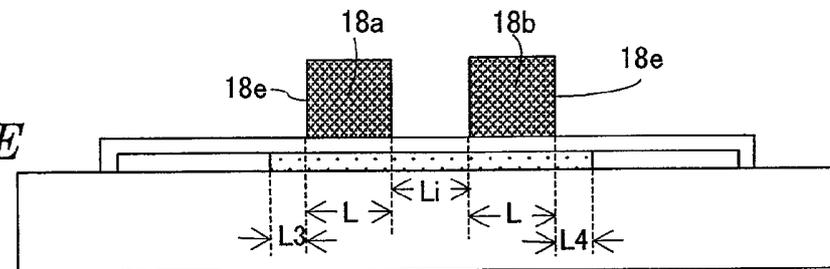


FIG. 4F

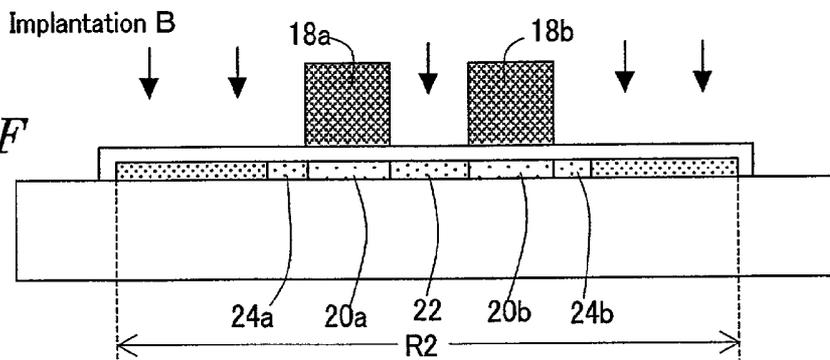


FIG. 4G

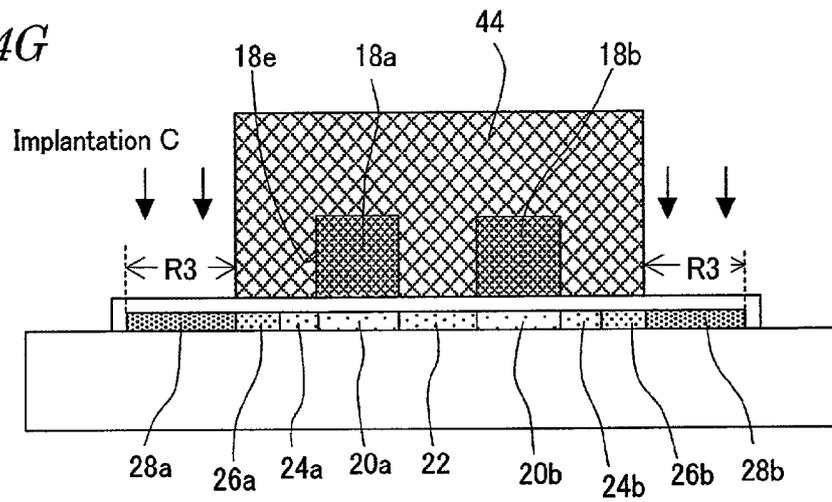


FIG. 4H

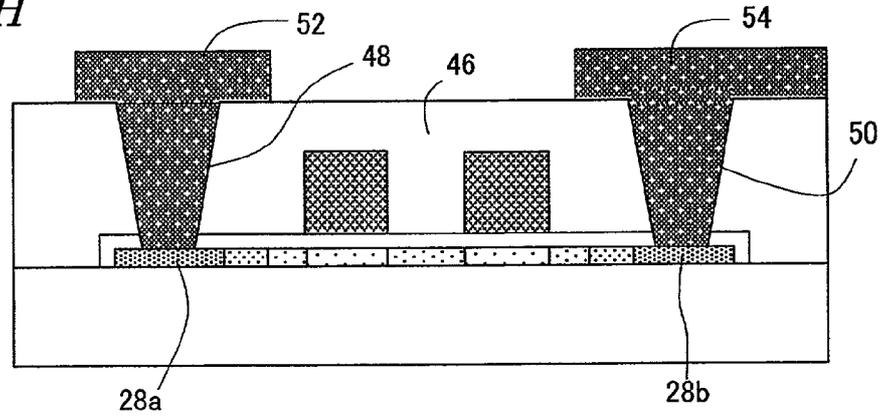
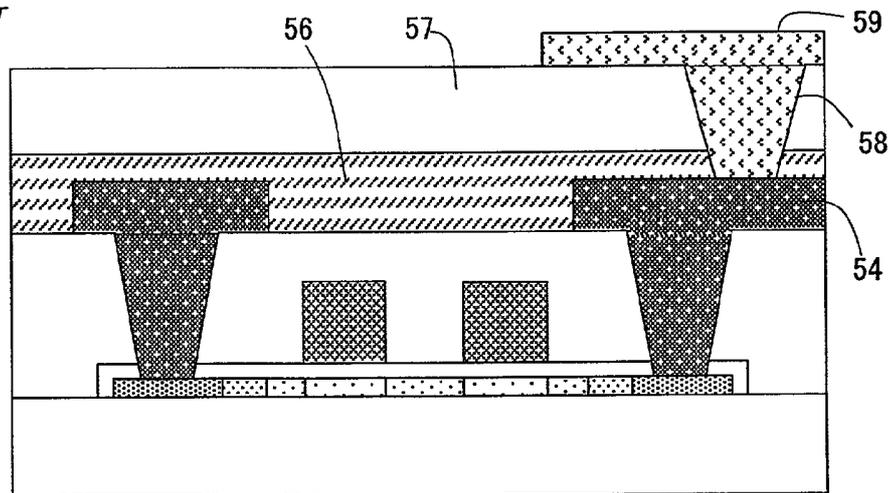


FIG. 4I



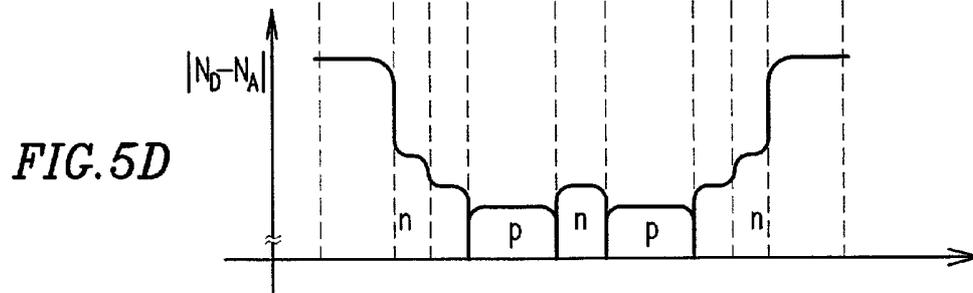
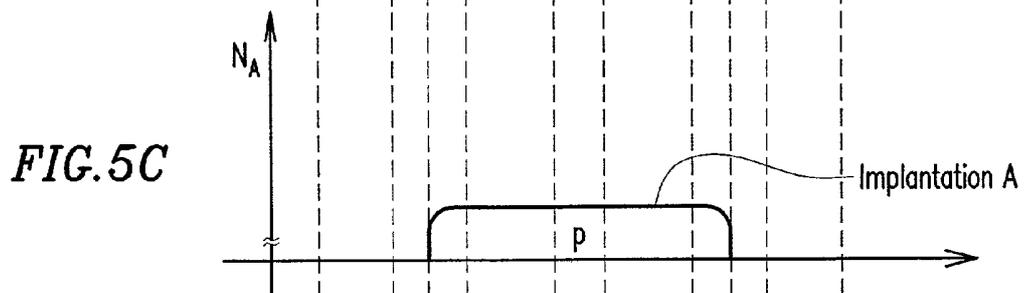
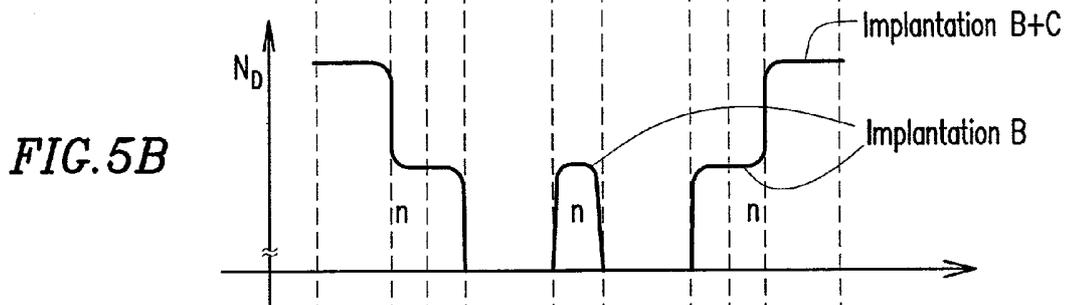
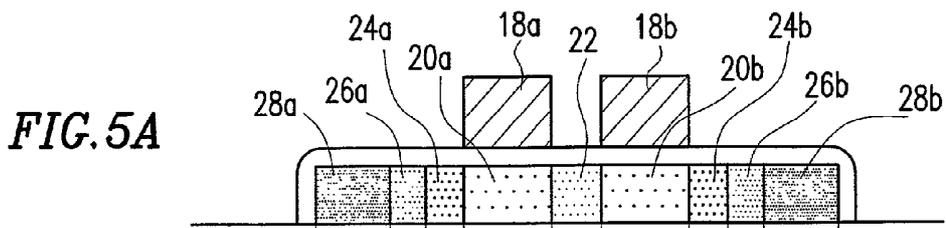


FIG. 6

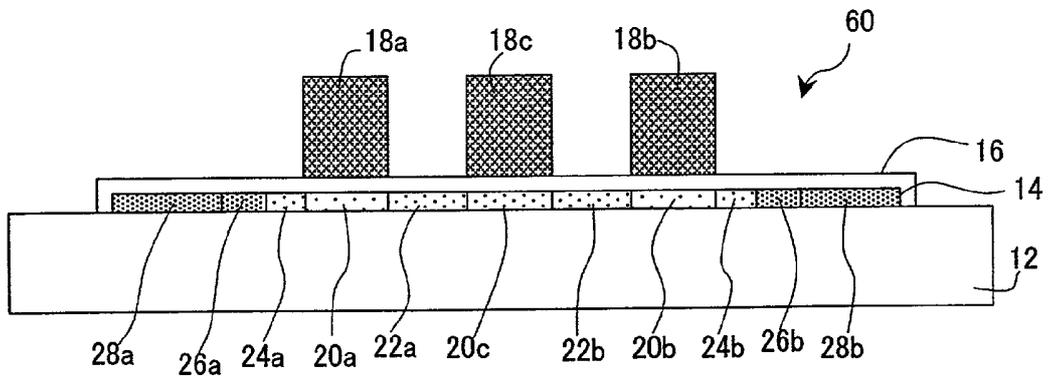


FIG. 7

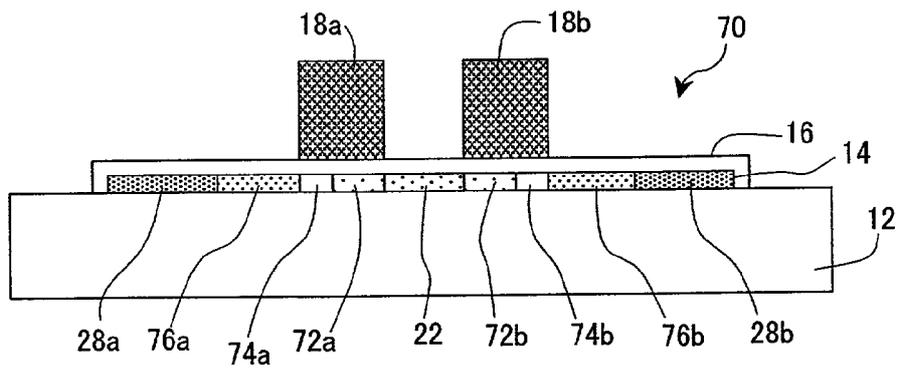


FIG. 8A

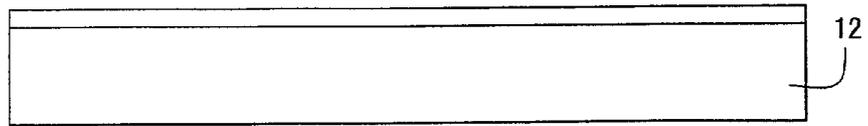


FIG. 8B

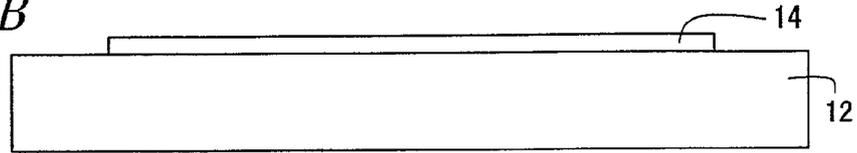


FIG. 8C

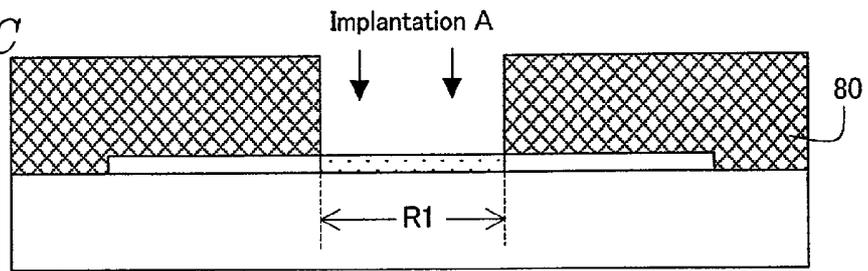


FIG. 8D

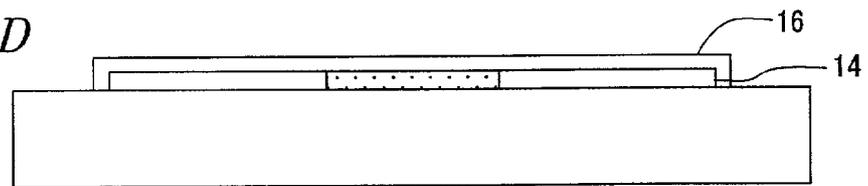


FIG. 8E

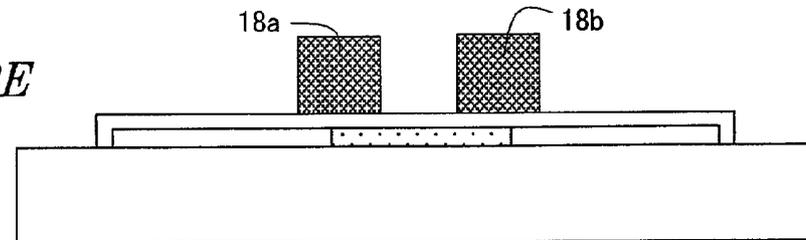


FIG. 8F

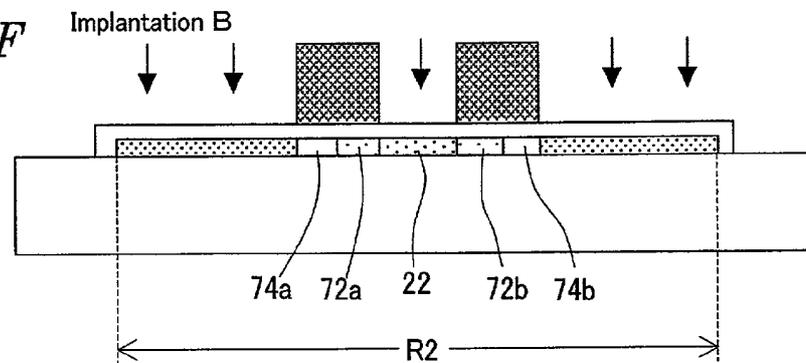


FIG. 8G

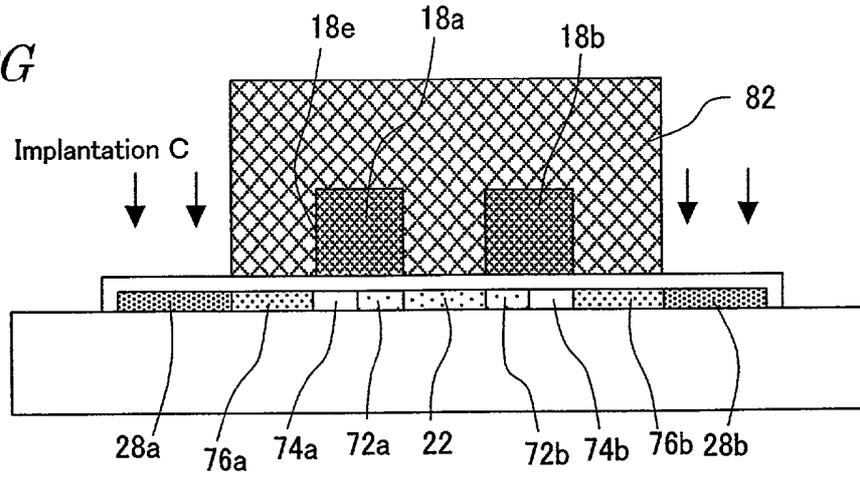


FIG. 8H

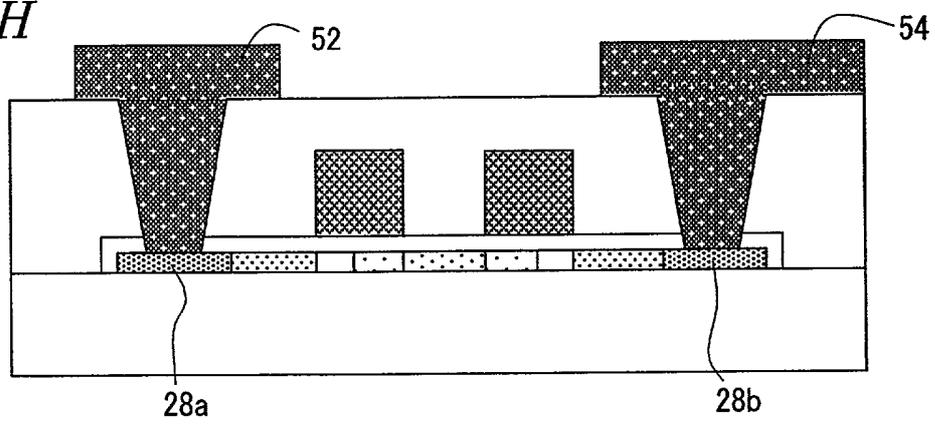
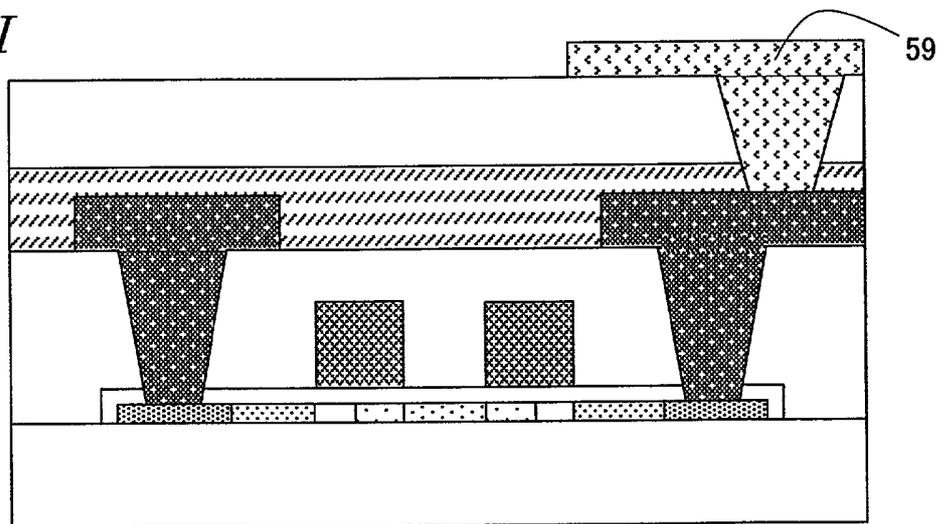


FIG. 8I



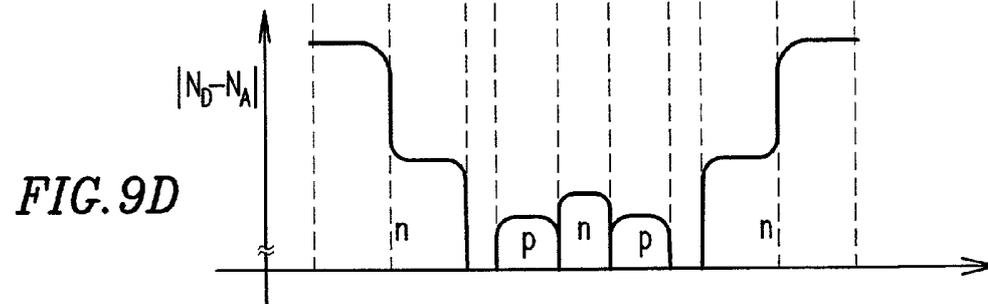
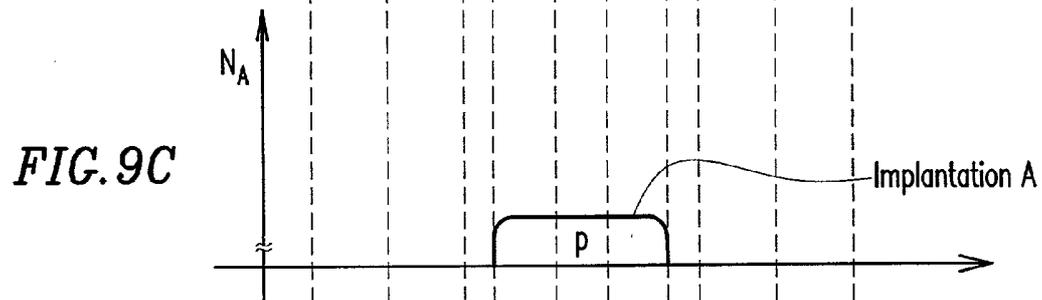
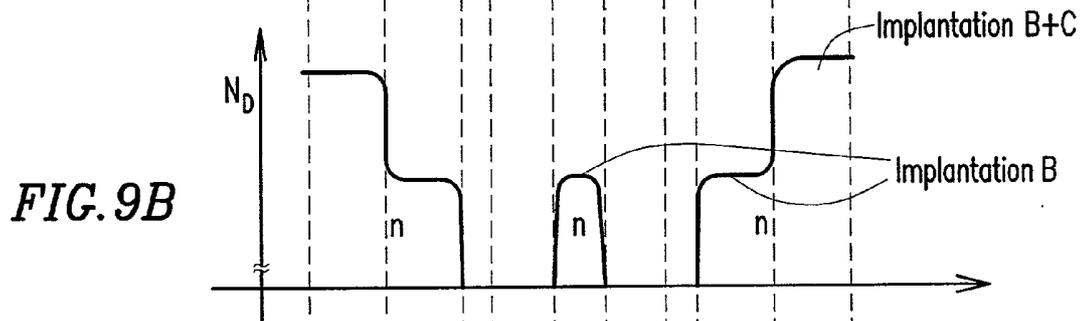
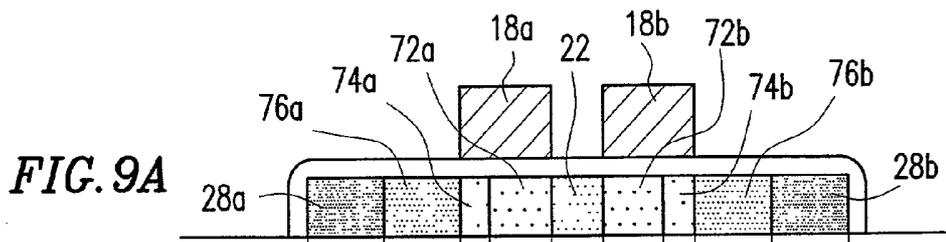


FIG. 10

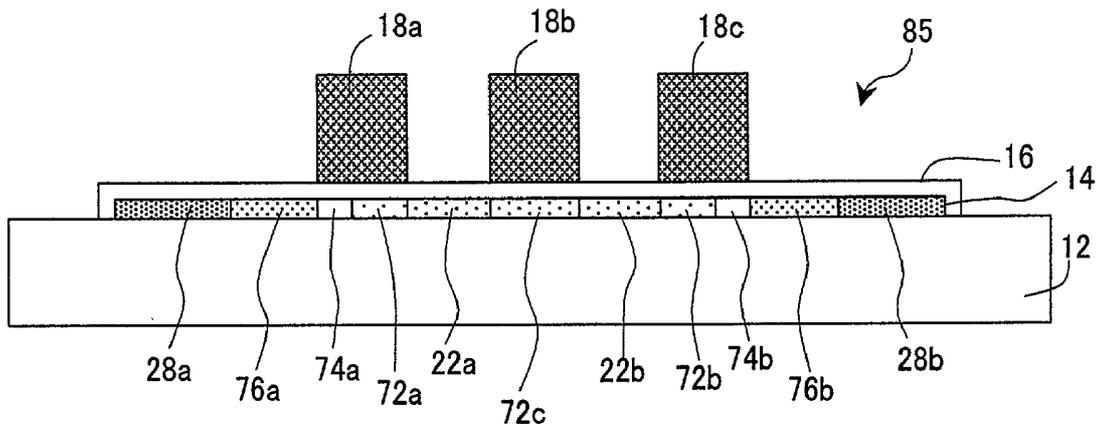


FIG. 11

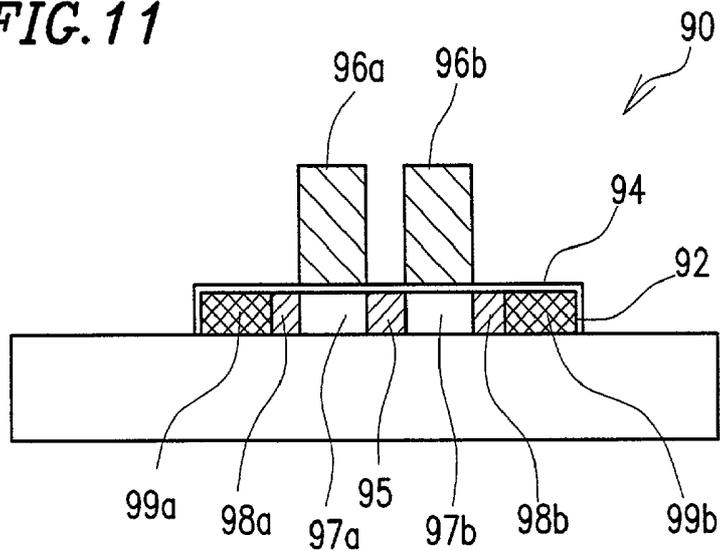


FIG. 12A

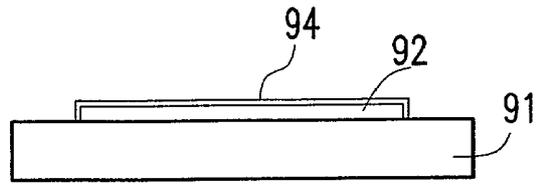


FIG. 12B

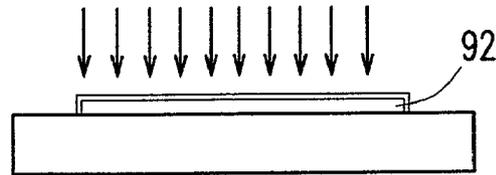


FIG. 12C

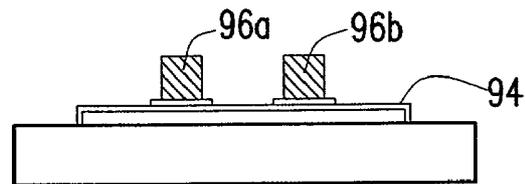


FIG. 12D

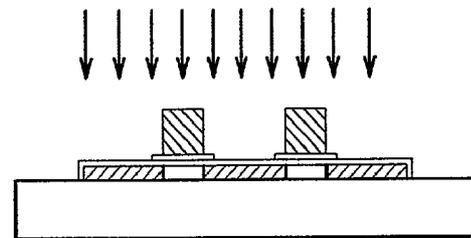


FIG. 12E

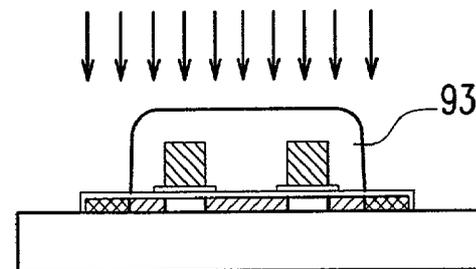


FIG. 12F

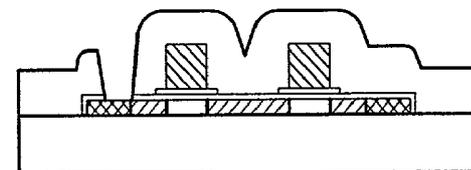


FIG. 12G


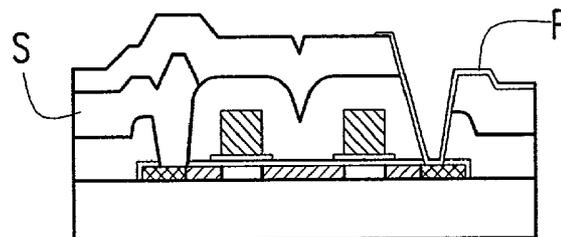


FIG. 13

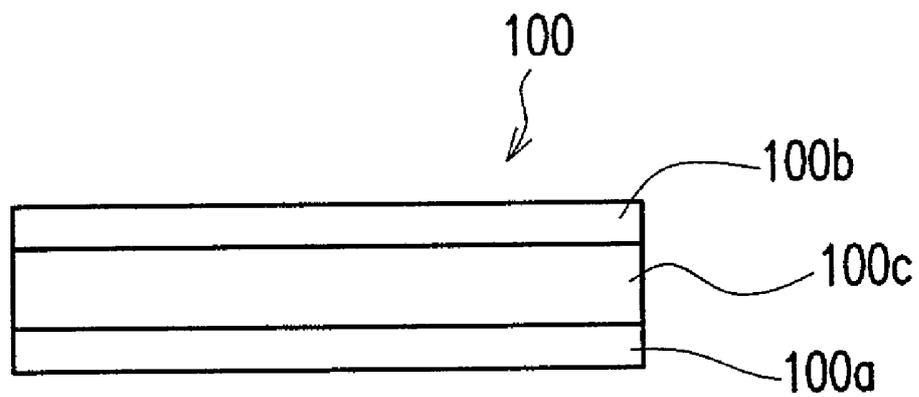

THIN-FILM TRANSISTOR, METHOD FOR FABRICATING THE SAME, AND LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a thin-film transistor preferably for use in an active-matrix-addressed liquid crystal display device, contact image sensor and other suitable devices and also relates to a method for fabricating such a transistor.

[0002] Recently, an active-matrix-addressed liquid crystal display device has been used as a display device for personal computers, TV sets of a reduced thickness, camcorders and so on. In an active-matrix-addressed liquid crystal display device, a thin-film transistor (TFT) is extensively used as a switching element that selectively turns a pixel ON or OFF. A TFT is provided for each of a huge number of pixels so that each of those pixels has its ON/OFF states controlled by its associated TFT.

[0003] When a TFT turns ON responsive a scanning signal that has been applied to the gate of the TFT, a predetermined signal voltage is applied to a pixel electrode, which is connected to the drain of the TFT, by way of a data bus line connected to the source of the TFT. In a liquid crystal display device, the orientation state of its liquid crystal layer changes in accordance with the level of a signal voltage applied to a pixel electrode. And by utilizing this change in orientation, an image is displayed thereon.

[0004] In an interval after a predetermined signal voltage has been applied to a pixel electrode and before another signal voltage is newly applied to this pixel electrode (i.e., one frame interval), no scanning signal is applied to the gate of a TFT associated with the pixel electrode. That is to say, the TFT is kept OFF to maintain a predetermined display state by keeping the potential level at the pixel electrode constant during this interval. While the TFT is OFF, the amount of current flowing through the TFT (i.e., leakage current or OFF-state current) is preferably as small as possible. This is because if an excessive amount of OFF-state current flows through the TFT, then the liquid crystal layer cannot maintain its desired orientation state and the resultant display quality deteriorates.

[0005] Particularly in a TFT including a polysilicon layer as its semiconductor layer, a greater amount of OFF-state current tends to flow through the TFT as compared to a TFT including an amorphous silicon layer as its semiconductor. This is because field-effect mobility is higher in a polysilicon layer than in an amorphous silicon layer. Accordingly, it is even more difficult to maintain the potential level of a pixel electrode associated with such a TFT.

[0006] Also, the higher the definition of a display device, the greater the number of pixels the display device should include. If the number of pixels included in a display device is increased, then each of those pixels should be driven in a shorter period of time. In that case, a greater amount of ON-state current should flow through each TFT.

[0007] Furthermore, in a small-sized high-definition liquid crystal display for a liquid crystal projector, for example, the size of each pixel has been further reduced. To increase the brightness of an image presented on such a display, the aperture ratio needs to be increased for each pixel region and

each TFT needs to be further downsized. On the other hand, to mass-produce an enormous number of display devices at a high yield, measures should be taken against TFT leakage failures resulting from various types of defects.

[0008] In summary, a TFT, particularly one for use to drive its associated pixel in a small-sized high-definition liquid crystal display, preferably has:

[0009] 1) small leakage current;

[0010] 2) large ON-state current;

[0011] 3) small size; and

[0012] 4) no leakage failures.

[0013] A TFT having these advantageous features is disclosed in Japanese Laid-Open Publication No. 7-263705, for example. The TFT has a so-called "multi-gate structure" and a so-called "LDD (lightly doped drain) structure" in combination. Hereinafter, the TFT disclosed in this publication will be described with reference to **FIG. 11**.

[0014] In the TFT **90** shown in **FIG. 11**, a pair of gate electrodes **96a** and **96b** is formed over a semiconductor thin film **92** with an insulating film **94** interposed therebetween. Channel regions **97a** and **97b** are defined in parts of the semiconductor thin film **92** that are located under the gate electrodes **96a** and **96b**, respectively. And the channel regions **97a** and **97b** are interposed or surrounded by lightly doped regions **98a** and **98b** and heavily doped regions (i.e., source/drain regions) **99a** and **99b**. Also, another lightly doped region (intermediate region) **95** is defined between the channel regions **97a** and **97b**.

[0015] By interposing the lightly-doped region (LDD region) **98b** between the drain region (i.e., the heavily doped region) **99b** and channel region **97b**, the intensity of an electric field is weakened at the end of the drain region **99b**, thus reducing the leakage current. Also, this TFT has a multi-gate structure having an equivalent circuit configuration in which two single-gate TFTs are connected in series together. Thus, even if a leakage failure has been caused in one of the two TFTs, the other TFT still serves as a switching element. In this manner, redundancy is ensured for leakage failures.

[0016] In addition, in the TFT **90** disclosed in the publication identified above, the length of the intermediate region **95** is smaller than the total length of the lightly doped regions **98a** and **98b**, thereby increasing the amount of ON-state current. Furthermore, the TFT **90** includes no heavily doped region between the gate electrodes **96a** and **96b**. Thus, the space between the gate electrodes **96a** and **96b** may be narrowed, and therefore the TFT **90** may be downsized.

[0017] Hereinafter, it will be described with reference to **FIGS. 12A through 12G** how to fabricate a TFT substrate (including the TFT **90**) for a liquid crystal display device.

[0018] First, in the process step shown in **FIG. 12A**, a semiconductor thin film **92** of polysilicon (poly-Si), for example, is deposited on an active region on an insulating substrate **91**. Then, a surface portion of the semiconductor thin film **92** is oxidized, for example, thereby forming an insulating film **94** thereon.

[0019] Next, in the process step shown in FIG. 12B, dopant ions (e.g., B⁺ ions) may be implanted at a predetermined dose (of e.g., about $1 \times 10^{12}/\text{cm}^2$ to about $8 \times 10^{12}/\text{cm}^2$) into the entire semiconductor thin film 92 if necessary. In this process step, the characteristic of a channel region for the TFT is determined and the threshold voltage of the TFT is controlled.

[0020] Thereafter, in the process step shown in FIG. 12C, gate electrodes 96a and 96b are formed over the semiconductor thin film 92 that has been covered with the insulating film 94. Specifically, the gate electrodes 96a and 96b may be formed by depositing a low-resistivity poly-Si thin film doped with phosphorus on the insulating film 94 and then by patterning the poly-Si thin film into a desired shape. It should be noted that if necessary, a silicon nitride film or any other suitable undercoat film may be formed on the insulating film 94 as shown in FIG. 12C before the gate electrodes 96a and 96b are formed thereon.

[0021] Then, in the process step shown in FIG. 12D, dopant ions (e.g., P⁺ ions) are implanted at a relatively low dose into selected parts of the semiconductor thin film 92 using the gate electrodes 96a and 96b as a mask. In this manner, lightly doped regions are defined in those parts of the semiconductor thin film 92, which are not covered with the gate electrodes 96a and 96b, so as to be self-aligned with the gate electrodes 96a and 96b.

[0022] Subsequently, in the process step shown in FIG. 12E, a resist pattern 93 is defined so as to cover the gate electrodes 96a and 96b entirely and the surface of the insulating film 94 partially. The resist pattern 93 should be formed in such a manner that the right- and left-hand-side edges thereof are spaced apart from the associated side faces of the gate electrodes 96a and 96b by a predetermined distance. Using this resist pattern 93 as a mask, dopant ions (e.g., As⁺ ions) are implanted at a relatively high dose into the non-masked parts of the lightly doped regions. In this manner, those parts of the lightly doped regions are changed into heavily doped regions, which will be source/drain regions for the TFT.

[0023] Thereafter, in the process step shown in FIG. 12F, the TFT formed in this manner is covered with an interlevel dielectric film, the dopants introduced are activated through annealing, and then a contact hole is formed through a part of the interlevel dielectric film that is located over the source region.

[0024] Subsequently, in the process step shown in FIG. 12G, a data bus line S made of a conductor is formed so as to make electrical contact with the source region via the contact hole. Next, another insulating film is deposited over the entire surface of the substrate and then another contact hole is formed through a part of the insulating films that is located over the drain region. Then, a transparent electrode (i.e., pixel electrode) P of ITO, for example, is formed inside the contact hole so as to make electrical contact with the drain region. In this manner, a TFT substrate for use in an active-matrix-addressed liquid crystal display device is completed.

[0025] As described above, the conventional TFT 90 has the multi-gate structure and can reduce the probability of leakage failures. Also, since the intermediate region is a lightly doped region, the space between the gate electrodes can be narrowed and the TFT can be downsized.

[0026] However, the TFT 90 cannot reduce the leakage current and increase the ON-state current at the same time. Specifically, if the dopant concentration of the LDD regions is increased, then the ON-state current of the TFT 90 can be increased but the amount of leakage current flowing there-through also increases. On the other hand, if the dopant concentration of the LDD regions is decreased, then a decreased amount of leakage current will flow through the TFT 90 but the ON-state current thereof also decreases.

SUMMARY OF THE INVENTION

[0027] In order to overcome the problems described above, preferred embodiments of the present invention provide (1) a thin-film transistor through which a decreased amount of leakage current and an increased amount of ON-state current flow, (2) a method for fabricating such a transistor and (3) a liquid crystal display device that includes the thin-film transistor of the present invention and that realizes higher display quality.

[0028] A thin-film transistor according to the present invention includes a semiconductor layer and multiple gate electrodes that have been formed over the semiconductor layer. The semiconductor layer includes: first and second heavily doped regions, which have a first conductivity type, are spaced apart from each other and serve as source/drain regions; and a plurality of channel regions, which have a second conductivity type, are located between the first and second heavily doped regions so as to face the gate electrodes, and include first and second channel regions. The first channel region is closer to the first heavily doped region than any other one of the channel regions is, while the second channel region is closer to the second heavily doped region than any other one of the channel regions is. The semiconductor layer further includes: an intermediate region, which has the first conductivity type and is located between two mutually adjacent ones of the channel regions; a first lightly doped region, which has the first conductivity type and is located between the first channel region and the first heavily doped region; a second lightly doped region, which has the first conductivity type and is located between the second channel region and the second heavily doped region; a third lightly doped region, which has the first conductivity type, has a carrier concentration different from that of the first lightly doped region and is located between the first lightly doped region and the first channel region; and a fourth lightly doped region, which has the first conductivity type, has a carrier concentration different from that of the second lightly doped region and is located between the second lightly doped region and the second channel region.

[0029] In a preferred embodiment of the present invention, the first and second heavily doped regions have substantially the same carrier concentration; the first and second lightly doped regions also have substantially the same carrier concentration; the third and fourth lightly doped regions and the intermediate region also have substantially the same carrier concentration; the carrier concentration of the first heavily doped region is substantially higher than that of the first lightly doped region; and the carrier concentration of the first lightly doped region is substantially higher than that of the third lightly doped region.

[0030] In another preferred embodiment, the channel regions, the intermediate region and the third and fourth

lightly doped regions of the semiconductor layer have been doped with a dopant of the second conductivity type at substantially the same dose.

[0031] In this particular embodiment, the third and fourth lightly doped regions have been doped not only with the dopant of the second conductivity type but also the same dopant of the first conductivity type as a dopant that has been introduced into the first and second lightly doped regions.

[0032] More particularly, a difference between the carrier concentration of the third lightly doped region and that of the first lightly doped region may be caused by the dopant of the second conductivity type that has been introduced into the third lightly doped region.

[0033] Alternatively, a difference between the carrier concentration of the fourth lightly doped region and that of the second lightly doped region may be caused by the dopant of the second conductivity type that has been introduced into the fourth lightly doped region.

[0034] In still another embodiment, the first and second lightly doped regions may have substantially the same length.

[0035] In yet another embodiment, the third and fourth lightly doped regions may have substantially the same length.

[0036] In yet another embodiment, the intermediate region may have a length smaller than a total length of the first and third lightly doped regions.

[0037] In yet another embodiment, the intermediate region may have a length smaller than a total length of the second and fourth lightly doped regions.

[0038] An inventive method for fabricating a thin-film transistor includes the steps of: forming a semiconductor thin film on an insulating substrate; doping a first region of the semiconductor thin film, which includes a part that will serve as a channel region, with a first dopant of a first conductivity type; forming at least one gate electrode on the semiconductor thin film so that the part of the semiconductor thin film that will serve as the channel region is covered with the gate electrode; selectively doping a second region of the semiconductor thin film with a second dopant of a second conductivity type using the gate electrode as a mask, the second region including other parts of the first region, except the part that will serve as the channel region, and other parts of the semiconductor thin film that surround the first region; and doping a third region of the semiconductor thin film with a third dopant of the second conductivity type, thereby defining regions that will serve as source/drain regions, the third region being so defined as to be spaced apart, by a predetermined distance, from an outer edge of parts of the semiconductor thin film where the first and second region overlap with each other.

[0039] In a preferred embodiment of the present invention, the second and third regions overlap with each other at least partially.

[0040] In another preferred embodiment of the present invention, an implant dose of the second dopant is smaller than an implant dose of the third dopant.

[0041] A thin-film transistor according to the present invention includes a semiconductor layer and multiple gate

electrodes that have been formed over the semiconductor layer. The semiconductor layer includes: first and second heavily doped regions, which are spaced apart from each other and serve as source/drain regions; and a plurality of channel regions, which are located between the first and second heavily doped regions so as to face the gate electrodes and which include first and second channel regions. The first channel region is closer to the first heavily doped region than any other one of the channel regions is, while the second channel region is closer to the second heavily doped region than any other one of the channel regions is. The semiconductor layer further includes: an intermediate region located between two mutually adjacent ones of the channel regions; a first lightly doped region located between the first channel region and the first heavily doped region; and a second lightly doped region located between the second channel region and the second heavily doped region. The first channel region includes a first intrinsic channel region and the second channel region includes a second intrinsic channel region.

[0042] In a preferred embodiment of the present invention, the first and second intrinsic channel regions are substantially covered with associated ones of the gate electrodes.

[0043] In another preferred embodiment of the present invention, the first channel region includes a doped channel region between the first intrinsic channel region and the intermediate region, while the second channel region includes a doped channel region between the second intrinsic channel region and the intermediate region.

[0044] In this particular embodiment, the respective doped channel regions of the first and second channel regions and the intermediate region have preferably been doped with a dopant of a first conductivity type at a predetermined dose.

[0045] In still another embodiment, the first and second lightly doped regions may have substantially the same length.

[0046] In yet another embodiment, the first and second intrinsic channel regions may have substantially the same length.

[0047] In yet another embodiment, the first and second intrinsic channel regions may be each shorter than any of the intermediate region, the first lightly doped region and the second lightly doped region.

[0048] An inventive method for fabricating a thin-film transistor includes the steps of: forming a semiconductor thin film on an insulating substrate; doping a first region of the semiconductor thin film with a first dopant of a first conductivity type; forming at least one gate electrode on the semiconductor thin film so that a part of the first region and a part of the semiconductor thin film that surrounds the first region are covered with the gate electrode; selectively doping a second region of the semiconductor thin film with a second dopant of a second conductivity type using the gate electrode as a mask, the second region including at least a part of the first region and other parts of the semiconductor thin film that surround the first region and that are not covered with the gate electrode; and doping a fourth region of the semiconductor thin film with a third dopant of the second conductivity type, the fourth region being so defined as to be spaced apart from a third region of the semiconductor thin film by a predetermined distance, the third region

including at least the part of the first region and the part of the semiconductor thin film that is covered with the gate electrode.

[0049] In a preferred embodiment of the present invention, the second and fourth regions overlap with each other at least partially.

[0050] An active-matrix-addressed liquid crystal display device according to the present invention includes: a substrate, on which the thin-film transistor according to any of the preferred embodiments of the present invention; a data bus line electrically connected to the first heavily doped region of the thin-film transistor; a gate bus line electrically connected to at least one of the gate electrodes of the thin-film transistor; and a pixel electrode electrically connected to the second heavily doped region of the thin-film transistor have been formed; and a liquid crystal layer, which has an optical state changeable with a potential level at the pixel electrode.

[0051] It should be noted that the terms "first conductivity type" and "second conductivity type" are herein used to identify n-type and p-type from each other. In other words, one of n- and p-types will be herein referred to as the "first conductivity type" and the other will be herein referred to as the "second conductivity type". That is to say, the first conductivity type is n- or p-type and the second conductivity type is p- or n-type.

[0052] Other features, elements, processes, steps, characteristics and advantages of the present invention will become more apparent from the following detailed description of preferred embodiments of the present invention with reference to the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0053] FIG. 1 is a plan view schematically illustrating an active matrix substrate including a TFT according to a first specific preferred embodiment of the present invention.

[0054] FIG. 2 is a plan view schematically illustrating the TFT of the first embodiment.

[0055] FIG. 3 is a cross-sectional view schematically illustrating the TFT of the first embodiment.

[0056] FIGS. 4A through 4I are cross-sectional views illustrating respective process steps for fabricating the TFT of the first embodiment.

[0057] FIG. 5A is a cross-sectional view illustrating the TFT of the first embodiment;

[0058] FIG. 5B illustrates a concentration profile of an n-type dopant that has been introduced into the TFT shown in FIG. 5A;

[0059] FIG. 5C illustrates a concentration profile of a p-type dopant that has been introduced into the TFT shown in FIG. 5A; and

[0060] FIG. 5D illustrates an overall carrier concentration profile of the TFT shown in FIG. 5A.

[0061] FIG. 6 is a cross-sectional view schematically illustrating a TFT according to a second specific preferred embodiment of the present invention.

[0062] FIG. 7 is a cross-sectional view schematically illustrating a TFT according to a third specific preferred embodiment of the present invention.

[0063] FIGS. 8A through 8I are cross-sectional views illustrating respective process steps for fabricating the TFT of the third embodiment.

[0064] FIG. 9A is a cross-sectional view illustrating the TFT of the third embodiment;

[0065] FIG. 9B illustrates a concentration profile of an n-type dopant that has been introduced into the TFT shown in FIG. 9A;

[0066] FIG. 9C illustrates a concentration profile of a p-type dopant that has been introduced into the TFT shown in FIG. 9A; and

[0067] FIG. 9D illustrates an overall carrier concentration profile of the TFT shown in FIG. 9A.

[0068] FIG. 10 is a cross-sectional view schematically illustrating a TFT according to a fourth specific preferred embodiment of the present invention.

[0069] FIG. 11 is a cross-sectional view schematically illustrating a conventional TFT.

[0070] FIGS. 12A through 12G are cross-sectional views illustrating respective process steps for fabricating the TFT shown in FIG. 11.

[0071] FIG. 13 is a cross-sectional view schematically illustrating an active-matrix-addressed liquid crystal display device according to a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0072] Hereinafter, preferred embodiments of the present invention will be described with reference to the accompanying drawings.

[0073] Embodiment 1

[0074] FIG. 1 illustrates part of a TFT substrate (or active matrix substrate) for use in an active-matrix-addressed liquid crystal display device. The part illustrated in FIG. 1 includes a thin-film transistor 10 according to a first specific preferred embodiment of the present invention and corresponds to one pixel region of the TFT substrate. As shown in FIG. 1, the pixel region is surrounded by data bus lines 2, each of which supplies a data signal to its associated pixel electrode 6, and by gate bus lines 4, each of which supplies a scanning signal to its associated gate electrodes 18.

[0075] The TFT 10 of a multi-gate type has been formed as a switching element for driving the pixel near the intersection between the data bus line 2 and gate bus line 4. The source of the TFT 10 is electrically connected to its associated data bus line 2. A pair of gate electrodes 18a and 18b of the TFT 10 extends from its associated gate bus line 4. The drain of the TFT 10 is electrically connected to its associated pixel electrode 6.

[0076] In the preferred embodiment illustrated in FIG. 1, a storage capacitance C_s is formed between a drain electrode 8 connected to the drain of the TFT 10 and a storage capacitance line 9 that has an electrode section facing the

drain electrode **8** as indicated by the hatching in **FIG. 1**. However, the storage capacitance may be formed in any other form. Also, in the embodiment illustrated in **FIG. 1**, the drain of the TFT **10** is electrically connected to the pixel electrode **6** by way of the drain electrode **8**. Alternatively, the drain of the TFT **10** may be directly connected to the pixel electrode **6**.

[0077] Hereinafter, an exemplary configuration for the TFT **10** of this first specific embodiment will be described with reference to **FIGS. 2 and 3**. In the following description, the TFT **10** of this illustrative embodiment is of n-channel type. However, the present invention is not limited to this specific embodiment but may naturally be applicable to a p-channel TFT.

[0078] As shown in **FIG. 3**, the TFT **10** has been formed on an insulating substrate **12** of quartz, for example, so as to include a semiconductor layer **14** of polysilicon, for example, and a pair of gate electrodes **18a** and **18b** that has been formed over the semiconductor layer **14** with a gate insulating film **16** interposed between them. As shown in **FIG. 2**, the pair of gate electrodes **18a** and **18b** is located around the center of the semiconductor layer **14** so as to be horizontally spaced apart from each other in the direction in which the semiconductor layer **14** extends and to cross the semiconductor layer **14**.

[0079] In the semiconductor layer **14**, channel regions **20a** and **20b** have been defined so as to be located right under, and self-aligned with, the gate electrodes **18a** and **18b**, respectively. To control the threshold voltage of the TFT **10** at a desired value, ions of a p-type dopant (e.g., boron (B) ions) have been implanted into these channel regions **20a** and **20b**. As shown in **FIG. 2**, the channel length *L* may be determined by the shape of each of the gate electrodes **18a** and **18b**, while the channel width *W* may be determined by the shape of the semiconductor layer **14**.

[0080] At both ends of the semiconductor layer **14**, first and second n-type heavily doped regions **28a** and **28b** have been defined so as to sandwich the channel regions **20a** and **20b** between them. The first and second heavily doped regions **28a** and **28b** serve as the source/drain regions of the TFT **10**, respectively.

[0081] Two types of n-type lightly doped regions **24a** and **26a** with mutually different carrier concentrations have been defined between the first n-type heavily doped region (i.e., source region) **28a** and the first channel region **20a** closer to the first heavily doped region **28a**, thereby forming an LDD structure. In the following description, these lightly doped regions **24a** and **26a** will be referred to as third and first lightly doped regions, respectively, for convenience sake. The third lightly doped region **24a** adjacent to the channel region **20a** has a carrier concentration lower than that of the first lightly doped region **26a** adjacent to the source region **28a**.

[0082] In the same way, two types of n-type lightly doped regions **24b** and **26b** with mutually different carrier concentrations have been defined between the second n-type heavily doped region (i.e., drain region) **28b** and the second channel region **20b** closer to the second heavily doped region **28b**, thereby forming an LDD structure. In the following description, these lightly doped regions **24b** and **26b** will be referred to as fourth and second lightly doped

regions, respectively, for convenience sake. The fourth lightly doped region **24b** adjacent to the channel region **20b** has a carrier concentration lower than that of the second lightly doped region **26b** adjacent to the drain region **28b**.

[0083] Furthermore, an n-type intermediate region **22** has been defined between the channel regions **20a** and **20b**.

[0084] The carrier concentrations of the respective regions formed in the semiconductor layer **14** are determined by the concentration(s) of n- and/or p-type dopant(s) introduced into those regions. The carrier concentration of each of these regions is represented as the absolute value of a difference ($N_D - N_A$) between the concentrations N_D and N_A of the n- and p-type dopants introduced thereto. The carrier concentrations of the respective regions are represented by the concentration profile illustrated in **FIG. 5D**. That is to say, the carrier concentrations of these regions are preferably defined so as to satisfy the following relationships:

[0085] 1) the source and drain regions **28a** and **28b** have the same carrier concentration;

[0086] 2) the first and second lightly doped regions **26a** and **26b** also have the same carrier concentration;

[0087] 3) the third and fourth lightly doped regions **24a** and **24b** and the intermediate region **22** also have the same carrier concentration;

[0088] 4) the carrier concentration of the source and drain regions **28a** and **28b** is higher than that of the first and second lightly doped regions **26a** and **26b**; and

[0089] 5) the carrier concentration of the first and second lightly doped regions **26a** and **26b** is higher than that of the third and fourth lightly doped regions **24a** and **24b** or that of the intermediate region **22**.

[0090] In this manner, the TFT **10** of this illustrative embodiment has the lightly doped regions **24b** and **26b** with mutually different carrier concentrations between the drain region **28b** and the channel region **20b**, thereby realizing a gentler carrier concentration profile. As a result, the intensity of the electric field at the end of the drain is weakened and the amount of leakage current flowing through the TFT **10** is reduced.

[0091] In addition, in this preferred embodiment, the fourth lightly doped region **24b** is provided adjacently to the channel region **20b**. Accordingly, even if the second lightly doped region **26b** adjacent to the drain region **28b** has a relatively high carrier concentration, the amount of leakage current is minimized. That is to say, in a structure like this, the carrier concentration of the second lightly doped region **26b** may be higher than that of the conventional single LDD region.

[0092] By providing the lightly doped regions **24b** and **26b** and by controlling the carrier concentrations of these regions appropriately, it is easier to reduce the amount of leakage current and increase the amount of ON-state current at the same time as compared to the conventional TFT having the single LDD structure. That is to say, the amount of leakage current of the TFT **10** is minimized appropriately and yet the amount of ON-state current thereof is increased substantially.

[0093] Next, the lengths of the respective regions included in the semiconductor layer 14 will be described with reference to FIG. 3. As used herein, the "length" of each of those regions means the length thereof as measured in the direction in which the carriers move from the drain region toward the source region or vice versa (i.e., in the channel length direction). FIG. 3 illustrates not only the channel length L but also the respective lengths L1, L2, L3, and L4 of the first, second, third and fourth lightly doped regions 26a, 26b, 24a and 24b and the length Li of the intermediate region 22.

[0094] In an active-matrix-addressed liquid crystal display device, liquid crystal capacitor and storage capacitor that are connected to the drain of a TFT are charged and discharged. Accordingly, a current can flow bidirectionally between the drain and source of the TFT. In this case, the TFT preferably has symmetrical electrical characteristics. For that purpose, the length L1 of the first lightly doped region 26a is preferably equal to the length L2 of the second lightly doped region 26b. Also, the length L3 of the third lightly doped region 24a is preferably equal to the length L4 of the fourth lightly doped region 24b.

[0095] As described above, in the TFT of this preferred embodiment, the carrier concentration and length of the first lightly doped region are preferably equal to those of the second lightly doped region. That is to say, symmetrical carrier concentration profile (see FIG. 5D) and symmetrical source/drain structure are preferably established in the horizontal direction for the first and second lightly doped regions. Also, the carrier concentration and length of the third lightly doped region are preferably equal to those of the fourth lightly doped region. That is to say, symmetrical carrier concentration profile and symmetrical source/drain structure are preferably established in the horizontal direction for the third and fourth lightly doped regions.

[0096] Furthermore, to increase the amount of the ON-state current, the length Li of the intermediate region is preferably relatively small and smaller than the combined length of any pair of LDD regions. That is to say, $L1+L3>Li$ and $L2+L4>Li$ are preferably satisfied.

[0097] Hereinafter, it will be described with reference to FIGS. 4A through 4I how a TFT substrate, including the TFT 10, for an active-matrix-addressed liquid crystal display device may be fabricated in this preferred embodiment of the present invention.

[0098] First, as shown in FIG. 4A, an amorphous silicon (a-Si) thin film is deposited to a thickness of about 45 nm over the entire surface of an insulating substrate 12 of quartz, for example, by a low-pressure CVD (LPCVD) process. A source gas for use to deposit the a-Si thin film may be Si_2H_6 gas, for example. Alternatively, the a-Si thin film may also be deposited by a plasma CVD process at a temperature of about 150° C. to about 250° C.

[0099] Then, the a-Si thin film is annealed for about 24 hours within a nitrogen ambient at a temperature of about 600° C., thereby forming a polysilicon (poly-Si) thin film 40 that has an increased crystal grain size.

[0100] Alternatively, the poly-Si thin film 40 may also be deposited over the substrate 12 by an LPCVD process. In that case, the poly-Si thin film 40 may be once amorphized by implanting Si ions thereto and then annealed at about 600° C. in a furnace so as to have its crystal grain size

increased. Optionally, the poly-Si thin film 40 formed by any of these techniques may be further subjected to laser annealing so as to have its crystallinity improved.

[0101] Next, as shown in FIG. 4B, the poly-Si thin film 40 is patterned in such a manner as to leave selected parts thereof corresponding to active regions for respective pixels. In this manner, a semiconductor layer 14 for TFTs is formed. It should be noted that the semiconductor layer 14 does not have to be made of polysilicon.

[0102] Then, as shown in FIG. 4C, a photoresist pattern 42 is defined on the semiconductor layer 14 so as to selectively cover the horizontal ends of the semiconductor layer 14. Using this resist pattern 42 as a mask, B^+ ions are implanted at a dose of about $1 \times 10^{11} \text{ cm}^{-2}$ to about $5 \times 10^{12} \text{ cm}^{-2}$ into a predetermined region R1 (which ion implantation process step will be herein identified by "A"). In this manner, in this preferred embodiment, the p-type dopant is introduced into only the predetermined region R1 that has been selected from the semiconductor layer 14 so as to include the channel region of the TFT. Optionally, BF_2^+ ions may be implanted instead of the B^+ ions.

[0103] Subsequently, as shown in FIG. 4D, after the photoresist pattern 42 has been removed, a high temperature oxide (HTO) film is deposited to a thickness of about 80 nm over the entire surface of the semiconductor layer 14, thereby forming a gate insulating film 16. Alternatively, the gate insulating film 16 may also be formed by oxidizing the surface of the semiconductor layer 14.

[0104] Thereafter, as shown in FIG. 4E, a pair of gate electrodes 18a and 18b is formed over the region R1, into which the B^+ ions have been implanted in the process step shown in FIG. 4C, so as to be horizontally spaced apart from each other. Each of the gate electrodes 18a and 18b is formed so as to cover its associated portion of the boron (or any other p-type dopant) doped region R1. Also, each of the gate electrodes 18a and 18b is formed in such a manner that the outer edge 18e of the gate electrode 18a or 18b is spaced apart from, and located inside, the boundary of the p-type doped region R1 by a prescribed distance in a predetermined direction (i.e., the channel length direction). The gate electrodes 18a and 18b extend substantially in the direction coming out of the paper of FIG. 4E and preferably cross the semiconductor layer 14.

[0105] These gate electrodes 18a and 18b may be formed in the following manner. First, a poly-Si thin film may be deposited to a thickness of about 400 nm over the gate insulating film 16 by an LPCVD process. Next, the poly-Si thin film may be doped with phosphorus from $POCl_3$ gas, thereby forming a low-resistivity poly-Si thin film as a conductor film. Then, the conductor film may be patterned into the desired shape of the gate electrodes 18a and 18b. It should be noted that in the process step of patterning the conductor film, the gate bus lines 4 and storage capacitor lines 9 shown in FIG. 1 may also be made of the conductor film along with the gate electrodes 18a and 18b.

[0106] As will be described later, in those portions of the p-type doped region R1 that are covered with the pair of gate electrodes 18a and 18b, channel regions for the TFT will be defined. The channel length L of these channel regions may be determined by the shape of the gate electrodes 18a and 18b. The channel length L may be about 1.5 μm , for example, while the channel width W (see FIG. 2) may be about 1 μm , for example.

[0107] The distance between the gate electrodes **18a** and **18b** substantially defines the length of the intermediate region, which is the region located between the channel regions in the semiconductor layer **14**. The length L_i of the intermediate region may be about $1\ \mu\text{m}$, for example. Also, the distance L_3 or L_4 between the boundary of the p-type doped region **R1** in the semiconductor layer **14** and the outer edge **18e** of the gate electrode **18a** or **18b** corresponds to the length of the third or fourth lightly doped region **24a** or **24b** as will be described later. These lengths L_3 and L_4 are preferably equal to each other and may be about $0.75\ \mu\text{m}$, for example.

[0108] Next, as shown in FIG. 4F, P^+ ions are implanted at a dose of about $5 \times 10^{12}\ \text{cm}^{-2}$ to about $5 \times 10^{13}\ \text{cm}^{-2}$ into selected parts of the semiconductor layer **14** using the gate electrodes **18a** and **18b** as a mask. This ion implantation process step will be herein identified by "B". Alternatively, As^+ ions may be implanted instead of the P^+ ions. In this manner, n-type doped regions are defined in those parts of the semiconductor layer **14**, except the regions under the gate electrodes **18a** and **18b**, and self-aligned with the gate electrodes **18a** and **18b**.

[0109] Thus, after the gate electrodes **18a** and **18b** have been formed, a second region **R2** of the semiconductor layer **14**, including the p-type doped region **R1** and regions surrounding the p-type doped region **R1**, is subjected to the n-type dopant ion implantation. In this preferred embodiment, the entire semiconductor layer **14**, except the regions under the gate electrodes **18a** and **18b**, is doped with the n-type dopant. The implant dose of this n-type dopant is substantially greater than that of the p-type dopant. Accordingly, n-type doped regions, of which the majority carriers are electrons, are formed in the entire semiconductor layer **14** other than those parts covered with the gate electrodes **18a** and **18b** (i.e., the channel regions **20a** and **20b**). In the regions that have been implanted with both of the p- and n-type dopant ions, three n-type doped regions with a relatively low carrier concentration are formed. Two of these three n-type lightly doped regions, which are located outside of the channel regions **20a** and **20b**, will be the third and fourth lightly doped regions **24a** and **24b**, respectively. The other n-type lightly doped region formed between the channel regions **20a** and **20b** will be the intermediate region **22**.

[0110] Subsequently, as shown in FIG. 4G, a resist pattern **44** is defined over the substrate so as to cover the gate electrodes **18a** and **18b**, the intermediate region **22**, the third and fourth lightly doped regions **24a** and **24b** and regions surrounding the third and fourth lightly doped regions **24a** and **24b** and not to cover both ends of the semiconductor layer **14**. The distance between the outer end of the resist pattern **44** and the edge **18e** of the gate electrode **18a** or **18b** may be about $1.5\ \mu\text{m}$, for example. Thereafter, using this resist pattern **44** as a mask, P^+ ions are implanted at a dose of about $5 \times 10^{14}\ \text{cm}^{-2}$ to about $5 \times 10^{15}\ \text{cm}^{-2}$ into non-covered parts of the semiconductor layer **14**, thereby defining heavily doped regions **28a** and **28b**. This ion implantation process step will be herein identified by "C". The implant dose of this ion implantation process step C is substantially greater than that of the ion implantation process step B. Alternatively, As^+ ions may be implanted instead of the P^+ ions.

[0111] In this manner, according to this preferred embodiment, the region **R3**, which is located outside of, and spaced

apart from, the third and fourth lightly doped regions **24a** and **24b** (i.e., the regions that have been doped with both of the p- and n-type dopants, or the regions where the regions **R1** and **R2** overlap with each other), is selectively doped with the n-type dopant at a relatively high implant dose. The heavily doped regions **28a** and **28b** formed in this manner serve as source/drain regions for the TFT.

[0112] Also, first and second lightly doped regions **26a** and **26b**, of which the carrier concentration is determined by the dopant introduced in the ion implantation process step B, are formed between the heavily doped region **28a** and the lightly doped region **24a** and between the heavily doped region **28b** and the lightly doped region **24b**, respectively.

[0113] In this manner, a multi-gate type TFT **10**, having an LDD structure made up of two pairs of lightly doped regions with mutually different carrier concentrations between the source and channel regions and between the drain and channel regions, is completed.

[0114] Thereafter, the resist pattern **44** that has been used in the ion implantation process step C is removed and then an interlevel dielectric film **46** of BPSG, for example, is deposited to a thickness of about $600\ \text{nm}$ over the substrate by an atmospheric CVD process as shown in FIG. 4H. Then, the semiconductor layer **14** is annealed for about thirty minutes within a nitrogen ambient at a temperature of about $950^\circ\ \text{C}$., thereby activating the dopants introduced into the semiconductor layer **14**. Next, first and second contact holes **48** and **50** are opened over the source/drain regions **28a** and **28b** of the semiconductor layer **14**, respectively. Thereafter, a conductor film of AlSi, for example, is deposited to a thickness of about $600\ \text{nm}$ over the substrate and then patterned into a predetermined shape. In this manner, a source electrode (or source bus line) **52** and drain electrode **54** are formed so as to make electrical contact with the source/drain regions **28a** and **28b** by way of the contact holes **48** and **50**, respectively.

[0115] Thereafter, as shown in FIG. 4I, a p-SiNO film **56** is deposited to a thickness of about $200\ \text{nm}$ over the entire surface of the substrate by a plasma CVD process, for example, and then a p-SiO film **57** is deposited thereon to a thickness of $700\ \text{nm}$, for example. Subsequently, the substrate is annealed to diffuse hydrogen from the p-SiNO film **56** into the poly-Si thin film and thereby hydrogenate the poly-Si film. Next, after a third contact hole **58** has been formed over the drain electrode **54**, a transparent conductor film of indium tin oxide (ITO), for example, is deposited to a thickness of about $150\ \text{nm}$ over the substrate and then patterned into a desired shape, thereby forming a pixel electrode **59**.

[0116] In the fabrication process described above, the respective process steps, including film-deposition, patterning and ion implantation, may be carried out by known methods.

[0117] In this manner, the TFT **10** can be formed by a relatively simple fabrication process including the ion implantation process step A (carried out to control the threshold voltage before the gate electrodes are formed), the ion implantation process step B (carried out at a relatively low dose after the gate electrodes have been formed) and the ion implantation process step C (carried out at a relatively high dose after the gate electrodes have been formed). The

following Table 1 summarizes the dopants that are introduced into the respective regions of the semiconductor layer **14** of the TFT **10** through the ion implantation process steps A, B and C:

TABLE 1

Region	Implantation A B ⁺ or BF ₂ ⁺	Implantation B P ⁺ or As ⁺	Implantation C P ⁺ or As ⁺
Channel	YES	NO	NO
Intermediate	YES	YES	NO
1 st and 2 nd LDD	NO	YES	NO
3 rd and 4 th LDD	YES	YES	NO
1 st and 2 nd HDD	NO	YES	YES

[0118] As described above, the implant doses A, B and C of the respective ion implantation process steps A, B and C are preferably as follows:

[0119] Implant dose A: about 1×10^{11} cm⁻² to about 5×10^{12} cm⁻²;

[0120] Implant dose B: about 5×10^{12} cm⁻² to about 5×10^{13} cm⁻²; and

[0121] Implant dose C: about 5×10^{14} cm⁻² to about 5×10^{15} cm⁻².

[0122] Preferably, implant dose C > implant dose B > implant dose A.

[0123] FIGS. 5B through 5D illustrate the concentration profiles of the dopants introduced into the respective regions. Specifically, FIG. 5A illustrates a cross section of the TFT. FIG. 5B illustrates the concentration N_D profile of the n-type dopant introduced into the respective regions. FIG. 5C illustrates the concentration N_A profile of the p-type dopant introduced into the respective regions. And FIG. 5D illustrates the carrier concentrations of the respective regions, i.e., the absolute values of the differences (N_D-N_A) between the concentrations of the n- and p-type dopants introduced into the respective regions.

[0124] As shown in FIG. 5B, the n-type dopant has been introduced into the respective regions other than the channel regions **20a** and **20b**. The dopant concentrations N_D of the first through fourth lightly doped regions **26a**, **26b**, **24a** and **24b** and intermediate region **22** are substantially equal to each other. The dopant concentrations N_D of the first and second heavily doped regions **28a** and **28b** are higher than the dopant concentrations N_D of these regions **26a**, **26b**, **24a**, **24b** and **22**. Also, as shown in FIG. 5C, the p-type dopant has been introduced selectively into the third and fourth lightly doped regions **24a** and **24b**, channel regions **20a** and **20b** and intermediate region **22**, the dopant concentrations N_A of which are substantially equal to each other. Accordingly, the overall carrier concentration |N_D-N_A| of the semiconductor layer **14** decreases at two steps between the heavily doped region **28a** or **28b** and the channel region **20a** or **20b**.

[0125] In the preferred embodiment described above, the present invention is supposed to be applied to an n-channel TFT. However, the present invention is naturally implementable as a p-channel TFT. In making a p-channel TFT, P⁺ or As⁺ ions may be implanted in the ion implantation process step A, and B⁺ or BF₂⁺ ions may be implanted in the ion implantation process steps B and C.

[0126] FIG. 13 illustrates an active-matrix-addressed liquid crystal display device (LCD) **100** that has been formed using a TFT substrate **100a** including the TFT **10**. As shown in FIG. 13, the LCD **100** includes the TFT substrate **100a**, a counter substrate **100b**, and a liquid crystal layer **100c** sandwiched between the TFT and counter substrates **100a** and **100b**. Although not shown, the counter substrate **100b** includes an insulating substrate and a counter electrode (or common electrode) formed on the insulating substrate.

[0127] In a typical TN-mode liquid crystal display device, an alignment film (not shown) is formed on the surface of the TFT substrate **100a** that faces the liquid crystal layer **100c** and another alignment film (not shown) is formed on the surface of the counter substrate **100b** that faces the liquid crystal layer **100c**. A polarizer (not shown) is formed on each of the opposite surfaces of the TFT and counter substrates **100a** and **100b**. However, the alignment films or polarizers may be omitted depending on the display mode adopted. Optionally, to conduct a color display, color filters (not shown) may be provided for the counter substrate **100b**, for example.

[0128] Embodiment 2

[0129] Hereinafter, a TFT **60** according to a second specific preferred embodiment of the present invention will be described with reference to FIG. 6. The TFT **60** of the second embodiment is different from the TFT **10** of the first embodiment in that the TFT **60** includes three gate electrodes **18a**, **18b** and **18c** and three channel regions **20a**, **20b** and **20c** associated with the gate electrodes **18a**, **18b** and **18c**, respectively. Accordingly, two intermediate regions **22a** and **22b** are defined between the channel regions **20a** and **20c** and between the channel regions **20c** and **20b**, respectively. In FIG. 6, each component having substantially the same function as the counterpart of the TFT **10** of the first embodiment is identified by the same reference numeral and the description thereof will be omitted herein.

[0130] In the TFT **60**, a pair of lightly doped regions **24a** and **26a** with mutually different carrier concentrations is defined between the first heavily doped region (or source region) **28a** and the channel region **20a** closer to the source region **28a** than any other channel region is. In addition, another pair of lightly doped regions **24b** and **26b** with mutually different carrier concentrations is defined between the second heavily doped region (or drain region) **28b** and the channel region **20b** closer to the drain region **28b** than any other channel region is.

[0131] The intermediate regions **22a** and **22b** are located between the channel region **20c** associated with the central gate electrode **18c** and the channel region **20a** and between the channel regions **20c** and **20b**, respectively. The intermediate regions **22a** and **22b** have a dopant concentration profile similar to that of the lightly doped regions **24a** and **24b**. Neither of these intermediate regions **22a** and **22b** has to include two types of lightly doped regions with mutually different carrier concentrations.

[0132] The TFT **60** may also be fabricated by a process similar to that of the TFT **10** of the first embodiment.

[0133] Embodiment 3

[0134] Hereinafter, an exemplary configuration for a TFT **70** according to a third specific preferred embodiment of the

present invention will be described with reference to **FIG. 7**. In **FIG. 7**, each component having substantially the same function as the counterpart of the TFT **10** of the first embodiment is identified by the same reference numeral and the description thereof will be omitted herein. In the following description of the third embodiment, the present invention is supposed to be implemented as an n-channel TFT. However, the present invention is not limited thereto but may naturally be applicable to a p-channel TFT.

[0135] In the semiconductor layer **14** of the TFT **70**, a first doped channel region **72a** and a first intrinsic channel region **74a** are formed under the gate electrode **18a**. The first intrinsic channel region **74a** is a part of the channel region closer to the source region (or first n-type heavily doped region) **28a**. In the same way, a second doped channel region **72b** and a second intrinsic channel region **74b** are formed under the gate electrode **18b**. The second intrinsic channel region **74b** is a part of the channel region closer to the drain region (or second n-type heavily doped region) **28b**. Furthermore, the n-type intermediate region **22** is defined between the first and second doped channel regions **72a** and **72b**.

[0136] Each of these doped channel regions **72a** and **72b** has been implanted with ions of a p-type dopant such as boron to control the threshold voltage of the TFT **70** at a desired value. On the other hand, neither the intrinsic channel region **74a** or **74b** has been doped with such a dopant. However, some inevitable impurities may be present in the intrinsic channel regions **74a** and **74b** in the process step of forming a semiconductor layer or diffusing a dopant.

[0137] Also, a first n-type lightly doped region **76a** is defined between the source region **28a** and the first intrinsic channel region **74a** closer to the source region **28a**. On the other hand, a second n-type lightly doped region **76b** is defined between the drain region **28b** and the second intrinsic channel region **74b** closer to the drain region **28b**. The carrier concentration of the first lightly doped region **76a** is set lower than that of the source region **28a**, and the carrier concentration of the second lightly doped region **76b** is set lower than that of the drain region **28b**.

[0138] In this manner, the TFT **70** includes the second lightly doped region **76b** and the second intrinsic channel region **74b** between the drain region **28b** and the doped channel region **72b**, thereby realizing a less steep carrier concentration profile. As a result, the intensity of the electric field is weakened at the end of the drain and the amount of leakage current is reduced. Also, since the intrinsic channel region **74b** is provided adjacently to the second doped channel region **72b** to minimize the leakage current, the second lightly doped region **76b** adjacent to the drain region **28b** may have a relatively high carrier concentration. In this manner, the TFT **70** minimizes the amount of leakage current appropriately and increases the amount of ON-state current substantially just like the TFT **10** of the first embodiment.

[0139] In the TFT **70** of this third preferred embodiment, a current may also flow bidirectionally between the source/drain regions. In this case, the TFT **70** preferably has symmetrical electrical characteristics. For that purpose, the length of the first lightly doped region **76a** is preferably substantially equal to that of the second lightly doped region

76b. Also, the length of the first intrinsic channel region **74a** is preferably substantially equal to that of the second intrinsic channel region **74b**.

[0140] To increase the ON-state current, the first and second intrinsic channel regions **74a** and **74b** with a high resistivity are preferably relatively short. For that purpose, the first and second intrinsic channel regions **74a** and **74b** are preferably shorter than any of the first and second lightly doped regions **76a** and **76b** and the intermediate region **22**.

[0141] Hereinafter, it will be described with reference to **FIGS. 8A through 8I** how a TFT substrate, including the TFT **70**, for use in an active-matrix-addressed liquid crystal display device may be fabricated in this preferred embodiment. It should be noted that any process step substantially the same as the counterpart of the process for fabricating the TFT **10** of the first embodiment as shown in **FIGS. 4A through 4I** will not be described in detail again.

[0142] First, as shown in **FIGS. 8A and 8B**, a semiconductor layer **14** is formed on an insulating substrate **12** by performing process steps similar to those of the first embodiment.

[0143] Next, as shown in **FIG. 8C**, a photoresist pattern **80** is defined on the semiconductor layer **14** so as to selectively cover parts of the semiconductor layer **14** near both ends thereof. Using this resist pattern **80** as a mask, B⁺ ions are implanted at a dose of about $1 \times 10^{11} \text{ cm}^{-2}$ to about $5 \times 10^{12} \text{ cm}^{-2}$ into a predetermined region R1. This ion implantation process step will be herein identified by "A". In this manner, according to this preferred embodiment, ions of a p-type dopant are implanted into only the predetermined region R1 selected from the semiconductor layer **14**.

[0144] Then, as shown in **FIG. 8D**, a gate insulating film **16** covering the semiconductor layer **14** is formed by performing a process step similar to that of the first embodiment.

[0145] Thereafter, as shown in **FIG. 8E**, a pair of gate electrodes **18a** and **18b** is formed over the semiconductor layer **14** so as to be horizontally spaced apart from each other. Each of these gate electrodes **18a** and **18b** is formed so as to cover the boundary of the p-type doped region R1 (i.e., to cover not only part of the region R1 but also a region outside of the region R1).

[0146] Those parts of the region R1, covered with the pair of gate electrodes **18a** and **18b**, will be doped channel regions for the TFT. On the other hand, those regions covered with the pair of gate electrodes **18a** and **18b** outside of the region R1 will be intrinsic channel regions for the TFT. The lengths of the doped channel regions and intrinsic channel regions may be determined by the length of the gate electrodes (i.e., the sizes thereof as measured in the channel length direction) and by the positional relationship between the gate electrodes and the region R1. For example, where each of the gate electrodes has a length of about $1.5 \mu\text{m}$, the positional relationship between the gate electrodes and the region R1 is controlled so that each doped channel region has a length of about $0.75 \mu\text{m}$. Also, the length of the intermediate region is determined by the distance between the gate electrodes **18a** and **18b**. In this preferred embodiment, the intermediate region has a length of about $1 \mu\text{m}$.

[0147] Next, as shown in **FIG. 8F**, P⁺ ions are implanted at a dose of about $5 \times 10^{12} \text{ cm}^{-2}$ to about $5 \times 10^{13} \text{ cm}^{-2}$ into

selected parts of the semiconductor layer **14** using the gate electrodes **18a** and **18b** as a mask. This ion implantation process step will be herein identified by "B". In this ion implantation process step B, a second region **R2** of the semiconductor layer **14**, including the p-type doped region **R1** and regions surrounding the p-type doped region **R1**, is subjected to the P⁺ ion implantation. In this preferred embodiment, the entire semiconductor layer **14**, except the regions under the gate electrodes **18a** and **18b**, is implanted with the P⁺ ions. Alternatively, As⁺ ions may be implanted instead of the P⁺ ions.

[0148] In this manner, an n-type intermediate region **22** is formed between the p-type-doped channel regions **72a** and **72b** so as to be self-aligned with the gate electrodes **18a** and **18b**. Also, n-type lightly doped regions are formed outside of the intrinsic channel regions **74a** and **74b** so as to be self-aligned with the gate electrodes **18a** and **18b**, too.

[0149] Subsequently, as shown in FIG. 8G, a resist pattern **82** is defined over the substrate so as to cover the gate electrodes **18a** and **18b**, the intermediate region **22**, and the n-type lightly doped regions **76a** and **76b** located outside of the intrinsic channel regions **74a** and **74b**. The distance between the right or left end of the resist pattern **82** and the edge **18e** of the gate electrode **18a** or **18b** may be about 1.5 μm, for example. Thereafter, using this resist pattern **82** as a mask, P⁺ ions are implanted at a dose of about 5×10¹⁴ cm⁻² to about 5×10¹⁵ cm⁻² into non-covered parts of the semiconductor layer **14**, thereby defining first and second heavily doped regions (i.e., source/drain regions) **28a** and **28b**. This ion implantation process step will be herein identified by "C".

[0150] In this manner, a multi-gate type TFT **70**, including two pairs of lightly doped and intrinsic channel regions between the source region and the first doped channel region and between the drain region and the second doped channel region, is completed.

[0151] It should be noted that the fabrication process of the TFT **70** of this third embodiment may be carried out in the same way as that of the TFT **10** of the first embodiment except that the mask **80** is used instead of the mask **42** (see FIG. 4C) in the ion implantation process step A shown in FIG. 8C.

[0152] Thereafter, as shown in FIG. 8H, a source electrode (or source bus line) **52** and a drain electrode **54** that make electrical contact with the source/drain regions **28a** and **28b**, respectively, are formed by performing a process step similar to that of the first embodiment. Subsequently, as shown in FIG. 8I, a pixel electrode **59** made of ITO (indium tin oxide) is formed by performing a process step similar to that of the first embodiment.

[0153] In this manner, the TFT **70** may be formed by a relatively simple fabrication process including the ion implantation process steps A, B and C. The following Table 2 summarizes the dopants that are introduced into the respective regions of the semiconductor layer **14** of the TFT **70** through these ion implantation process steps A, B and C:

TABLE 2

Region	Implantation A B ⁺ or BF ₂ ⁺	Implantation B P ⁺ or As ⁺	Implantation C P ⁺ or As ⁺
1 st and 2 nd doped channel	YES	NO	NO
Intermediate	YES	YES	NO
1 st and 2 nd LDD	NO	YES	NO
1 st and 2 nd intrinsic channel	NO	NO	NO
1 st and 2 nd HDD	NO	YES	YES

[0154] As described above, the implant doses A, B and C of the respective ion implantation process steps A, B and C are preferably as follows:

[0155] Implant dose A: about 1×10¹¹ cm⁻² to about 5×10¹² cm⁻²;

[0156] Implant dose B: about 5×10¹² cm⁻² to about 5×10¹³ cm⁻²; and

[0157] Implant dose C: about 5×10¹⁴ cm⁻² to about 5×10¹⁵ cm⁻².

[0158] Preferably, implant dose C>implant dose B>implant dose A.

[0159] FIGS. 9B through 9D illustrate the concentration profiles of the dopants introduced into the respective regions. Specifically, FIG. 9A illustrates a cross section of the TFT **70**. FIG. 9B illustrates the concentration N_D profile of the n-type dopant introduced into the respective regions. FIG. 9C illustrates the concentration N_A profile of the p-type dopant introduced into the respective regions. And FIG. 9D illustrates the carrier concentrations of the respective regions, i.e., the absolute values of the differences |N_D-N_A| between the concentrations of the n- and p-type dopants introduced into the respective regions.

[0160] As shown in FIG. 9B, the n-type dopant has been introduced into the respective regions other than the doped channel regions **72a** and **72b** and the intrinsic channel regions **74a** and **74b**. The dopant concentrations N_D of the first and second lightly doped regions **76a** and **76b** and intermediate region **22** are substantially equal to each other. The dopant concentrations N_D of the first and second heavily doped regions **28a** and **28b** are higher than the dopant concentrations N_D of these regions **76a**, **76b** and **22**. Also, as shown in FIG. 9C, the p-type dopant has been introduced selectively into the doped channel regions **72a** and **72b** and intermediate region **22**, the dopant concentrations N_A of which are substantially equal to each other. Thus, the carrier concentration |N_D-N_A| of the semiconductor layer **14** decreases at two steps between the heavily doped region **28a** or **28b** and the doped channel region **72a** or **72b**.

[0161] In the preferred embodiment described above, the present invention is supposed to be applied to an n-channel TFT. However, the present invention is naturally implementable as a p-channel TFT. In making a p-channel TFT, P⁺ or As⁺ ions may be implanted in the ion implantation process step A, and B⁺ or BF₂⁺ ions may be implanted in the ion implantation process steps B and C.

[0162] Embodiment 4

[0163] Hereinafter, a TFT **85** according to a fourth specific preferred embodiment of the present invention will be described with reference to **FIG. 10**. The TFT **85** of the fourth embodiment is different from the TFT **70** of the third embodiment in that the TFT **85** includes three gate electrodes **18a**, **18b** and **18c**. In **FIG. 10**, each component having substantially the same function as the counterpart of the TFT **70** of the third embodiment is identified by the same reference numeral and the description thereof will be omitted herein.

[0164] In the TFT **85**, the doped channel region **72a** and intrinsic channel region **74a** are defined in the channel region, which is closer to the first heavily doped region (i.e., source region) **28a** than any other channel region is and which is located under the first gate electrode **18a**. Also, the doped channel region **72b** and intrinsic channel region **74b** are defined in the channel region, which is closer to the second heavily doped region (i.e., drain region) **28b** than any other channel region is and which is located under the second gate electrode **18b**.

[0165] The other channel region **72c** associated with the central gate electrode **18c** includes no intrinsic channel region. The channel region **72c** may have a dopant concentration profile similar to those of the doped channel regions **72a** and **72b**.

[0166] The TFT **85** may also be fabricated by a process similar to that of the TFT **70** of the third embodiment.

[0167] According to preferred embodiments of the present invention, at least two types of regions with mutually different carrier concentrations are provided both between the source and channel of the TFT and between the drain and channel thereof. In this manner, the leakage current is reduced and the ON-state current is increased. Also, as compared to a TFT having the conventional multi-gate LDD structure, the TFT does not have to have its sizes increased and the redundancy thereof against the leakage failure is not sacrificed.

[0168] The present invention is applicable particularly effectively to a small-sized, high-density and high-definition TFT liquid crystal display device including a semiconductor layer of polysilicon.

[0169] While the present invention has been described with respect to preferred embodiments thereof, it will be apparent to those skilled in the art that the disclosed invention may be modified in numerous ways and may assume many embodiments other than those specifically described above. Accordingly, it is intended by the appended claims to cover all modifications of the invention that fall within the true spirit and scope of the invention.

What is claimed is:

1. A thin-film transistor comprising a semiconductor layer and multiple gate electrodes that have been formed over the semiconductor layer,

wherein the semiconductor layer includes:

first and second heavily doped regions, which have a first conductivity type, are spaced apart from each other and serve as source/drain regions;

a plurality of channel regions, which have a second conductivity type, are located between the first and

second heavily doped regions so as to face the gate electrodes, and include first and second channel regions, wherein the first channel region is closer to the first heavily doped region than any other one of the channel regions is, while the second channel region is closer to the second heavily doped region than any other one of the channel regions is;

an intermediate region, which has the first conductivity type and is located between two mutually adjacent ones of the channel regions;

a first lightly doped region, which has the first conductivity type and is located between the first channel region and the first heavily doped region;

a second lightly doped region, which has the first conductivity type and is located between the second channel region and the second heavily doped region;

a third lightly doped region, which has the first conductivity type, has a carrier concentration different from that of the first lightly doped region and is located between the first lightly doped region and the first channel region; and

a fourth lightly doped region, which has the first conductivity type, has a carrier concentration different from that of the second lightly doped region and is located between the second lightly doped region and the second channel region.

2. The transistor of claim 1, wherein the first and second heavily doped regions have substantially the same carrier concentration;

the first and second lightly doped regions also have substantially the same carrier concentration;

the third and fourth lightly doped regions and the intermediate region also have substantially the same carrier concentration;

the carrier concentration of the first heavily doped region is substantially higher than that of the first lightly doped region; and

the carrier concentration of the first lightly doped region is substantially higher than that of the third lightly doped region.

3. The transistor of claim 1, wherein the channel regions, the intermediate region and the third and fourth lightly doped regions of the semiconductor layer have been doped with a dopant of the second conductivity type at substantially the same dose.

4. The transistor of claim 3, wherein the third and fourth lightly doped regions have been doped not only with the dopant of the second conductivity type but also the same dopant of the first conductivity type as a dopant that has been introduced into the first and second lightly doped regions.

5. The transistor of claim 4, wherein a difference between the carrier concentration of the third lightly doped region and that of the first lightly doped region is caused by the dopant of the second conductivity type that has been introduced into the third lightly doped region.

6. The transistor of claim 4, wherein a difference between the carrier concentration of the fourth lightly doped region and that of the second lightly doped region is caused by the dopant of the second conductivity type that has been introduced into the fourth lightly doped region.

7. The transistor of claim 1, wherein the first and second lightly doped regions have substantially the same length.

8. The transistor of claim 1, wherein the third and fourth lightly doped regions have substantially the same length.

9. The transistor of claim 1, wherein the intermediate region has a length smaller than a total length of the first and third lightly doped regions.

10. The transistor of claim 1, wherein the intermediate region has a length smaller than a total length of the second and fourth lightly doped regions.

11. A method for fabricating a thin-film transistor, comprising the steps of:

forming a semiconductor thin film on an insulating substrate;

doping a first region of the semiconductor thin film, which includes a part that will serve as a channel region, with a first dopant of a first conductivity type;

forming at least one gate electrode on the semiconductor thin film so that the part of the semiconductor thin film that will serve as the channel region is covered with the gate electrode;

selectively doping a second region of the semiconductor thin film with a second dopant of a second conductivity type using the gate electrode as a mask, the second region including other parts of the first region, except the part that will serve as the channel region, and other parts of the semiconductor thin film that surround the first region; and

doping a third region of the semiconductor thin film with a third dopant of the second conductivity type, thereby defining regions that will serve as source/drain regions, the third region being so defined as to be spaced apart, by a predetermined distance, from an outer edge of parts of the semiconductor thin film where the first and second region overlap with each other.

12. The method of claim 11, wherein the second and third regions overlap with each other at least partially.

13. The method of claim 11, wherein an implant dose of the second dopant is smaller than an implant dose of the third dopant.

14. A thin-film transistor comprising a semiconductor layer and multiple gate electrodes that have been formed over the semiconductor layer,

wherein the semiconductor layer includes:

first and second heavily doped regions, which are spaced apart from each other and serve as source/drain regions;

a plurality of channel regions, which are located between the first and second heavily doped regions so as to face the gate electrodes and which include first and second channel regions, wherein the first channel region is closer to the first heavily doped region than any other one of the channel regions is, while the second channel region is closer to the second heavily doped region than any other one of the channel regions is;

an intermediate region located between two mutually adjacent ones of the channel regions;

a first lightly doped region located between the first channel region and the first heavily doped region; and

a second lightly doped region located between the second channel region and the second heavily doped region, and

wherein the first channel region includes a first intrinsic channel region and the second channel region includes a second intrinsic channel region.

15. The transistor of claim 14, wherein the first and second intrinsic channel regions are substantially covered with associated ones of the gate electrodes.

16. The transistor of claim 14, wherein the first channel region includes a doped channel region between the first intrinsic channel region and the intermediate region, while the second channel region includes a doped channel region between the second intrinsic channel region and the intermediate region.

17. The transistor of claim 16, wherein the respective doped channel regions of the first and second channel regions and the intermediate region have been doped with a dopant of a first conductivity type at a predetermined dose.

18. The transistor of claim 14, wherein the first and second lightly doped regions have substantially the same length.

19. The transistor of claim 14, wherein the first and second intrinsic channel regions have substantially the same length.

20. The transistor of claim 14, wherein the first and second intrinsic channel regions are each shorter than any of the intermediate region, the first lightly doped region and the second lightly doped region.

21. A method for fabricating a thin-film transistor, comprising the steps of:

forming a semiconductor thin film on an insulating substrate;

doping a first region of the semiconductor thin film with a first dopant of a first conductivity type;

forming at least one gate electrode on the semiconductor thin film so that a part of the first region and a part of the semiconductor thin film that surrounds the first region are covered with the gate electrode;

selectively doping a second region of the semiconductor thin film with a second dopant of a second conductivity type using the gate electrode as a mask, the second region including at least a part of the first region and other parts of the semiconductor thin film that surround the first region and that are not covered with the gate electrode; and

doping a fourth region of the semiconductor thin film with a third dopant of the second conductivity type, the fourth region being so defined as to be spaced apart from a third region of the semiconductor thin film by a predetermined distance, the third region including at least the part of the first region and the part of the semiconductor thin film that is covered with the gate electrode.

22. The method of claim 21, wherein the second and fourth regions overlap with each other at least partially.

23. An active-matrix-addressed liquid crystal display device comprising:

a substrate, on which the thin-film transistor according to claim 1 or 14; a data bus line electrically connected to the first heavily doped region of the thin-film transistor; a gate bus line electrically connected to at least one of the gate electrodes of the thin-film transistor; and a pixel electrode electrically connected to the second

heavily doped region of the thin-film transistor have been formed, and

a liquid crystal layer, which has an optical state changeable with a potential level at the pixel electrode.

* * * * *

专利名称(译)	薄膜晶体管，其制造方法以及液晶显示装置		
公开(公告)号	US20020125535A1	公开(公告)日	2002-09-12
申请号	US10/020440	申请日	2001-12-18
[标]申请(专利权)人(译)	上田彻		
申请(专利权)人(译)	上田彻		
当前申请(专利权)人(译)	上田彻		
[标]发明人	UEDA TOHRU		
发明人	UEDA, TOHRU		
IPC分类号	G02F1/1368 G02F1/136 H01L21/336 H01L21/77 H01L21/84 H01L27/12 H01L29/786 H01L29/04 H01L27/01 H01L31/0376 H01L31/0392 H01L31/036 H01L31/20		
CPC分类号	H01L29/66757 H01L29/78609 H01L29/78621 H01L29/78645 H01L2029/7863		
优先权	2000385523 2000-12-19 JP		
其他公开文献	US6828585		
外部链接	Espacenet USPTO		

摘要(译)

薄膜晶体管包括：一对彼此水平间隔开的n型重掺杂区域；p型沟道区分别位于n型重掺杂区之间，以便面对它们相关的栅电极；n型中间区域设置在两个相邻的沟道区域之间；和两对轻掺杂区域。两对中的一对中的轻掺杂区域具有相互不同的载流子浓度，并且位于重掺杂区域之一和比任何其他沟道区域更靠近重掺杂区域的沟道区域之一之间。另一对中的轻掺杂区域也具有彼此不同的载流子浓度，并且位于另一个重掺杂区域和另一个沟道区域之间，该沟道区域比任何其他沟道区域更靠近重掺杂区域。

