



US007742030B2

(12) **United States Patent**  
**Tsai et al.**

(10) **Patent No.:** **US 7,742,030 B2**  
(b5) **Date of Patent:** **Jun. 22, 2010**

(54) **LIQUID CRYSTAL DISPLAY DRIVING APPARATUS AND METHOD THEREOF**

(75) Inventors: **Chung-Kuang Tsai**, Jhudong Township, Hsinchu County (TW); **Li-Ru Lyu**, Jhubei (TW)

(73) Assignee: **AU Optronics Corp.**, Hsinchu (TW)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 925 days.

(21) Appl. No.: **11/525,085**

(22) Filed: **Sep. 22, 2006**

(65) **Prior Publication Data**

US 2007/0013630 A1 Jan. 18, 2007

**Related U.S. Application Data**

(63) Continuation-in-part of application No. 10/848,234, filed on May 19, 2004, now Pat. No. 7,532,186.

(30) **Foreign Application Priority Data**

May 22, 2003 (TW) ..... 92113907 A  
Apr. 27, 2005 (TW) ..... 93111798 A

(51) **Int. Cl.**

**G09G 3/36** (2006.01)

(52) **U.S. Cl.** ..... **345/94; 345/92; 345/96; 345/100; 345/103**

(58) **Field of Classification Search** ..... 345/89, 345/87, 92, 96, 100, 101, 103, 204, 212, 345/690, 691, 98; 349/33, 173, 3, 102, 117; 365/189.15, 185.22

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,661,401 B1 \* 12/2003 Sekine ..... 345/92  
6,784,898 B2 8/2004 Lee et al.  
6,836,269 B2 \* 12/2004 Maeda et al. ..... 345/212

6,850,218 B2 \* 2/2005 Waterman ..... 345/103  
7,084,845 B2 \* 8/2006 Hong ..... 345/89  
7,173,609 B2 \* 2/2007 Sato et al. ..... 345/204  
7,362,300 B2 \* 4/2008 Hirama ..... 345/98  
7,532,186 B2 \* 5/2009 Tsai et al. ..... 345/89  
2002/0044115 A1 4/2002 Jinda et al.  
2002/0109654 A1 8/2002 Kwon  
2002/0140691 A1 \* 10/2002 Sato et al. ..... 345/212

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1122711 8/2001

(Continued)


*Primary Examiner*—Prabodh M Dharia

(74) *Attorney, Agent, or Firm*—Rabin & Berdo, P.C.

(57) **ABSTRACT**

A pixel of the LCD is driven according to a precharge pixel value and a compensation pixel value both being generated from a pixel value during a precharge field and a compensation field respectively. A precharge driving voltage corresponding to the precharge pixel value, and a compensation driving voltage corresponding to the compensation pixel value is then determined and used to drive the pixel. The lightness of the pixel driven according to the precharge pixel value and the compensation pixel value is substantially the same as the lightness of the pixel if driven according to the pixel value. The precharge field comes before the compensation field when the precharge pixel value is larger than the compensation pixel value, and the compensation field comes before the precharge field when the compensation pixel value is larger than the precharge pixel value.

**2 Claims, 19 Drawing Sheets**

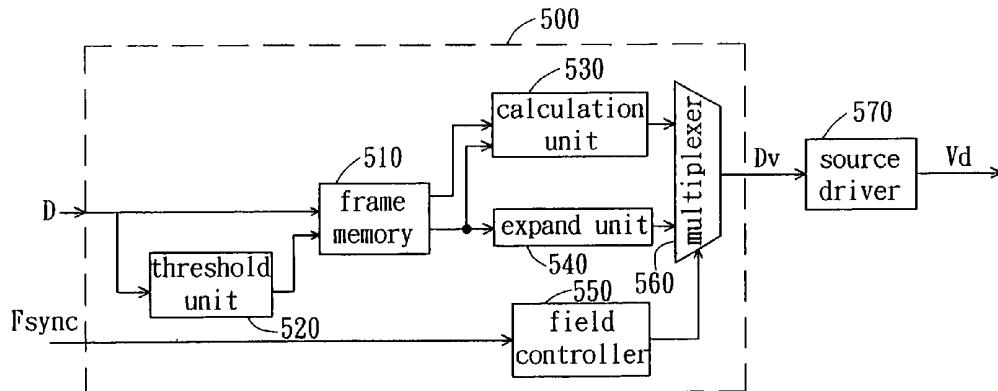

**US 7,742,030 B2**

Page 2

---

U.S. PATENT DOCUMENTS

2003/0006952 A1 1/2003 Hong  
2003/0048246 A1 3/2003 Ham  
2003/0048247 A1 3/2003 Ham  
2003/0179175 A1\* 9/2003 Shigeta et al. .... 345/101  
2004/0246224 A1\* 12/2004 Tsai et al. .... 345/100  
2005/0200590 A1\* 9/2005 Kumekawa .... 345/100  
2007/0063944 A1\* 3/2007 Sato et al. .... 345/87

2008/0211753 A1\* 9/2008 Tsai et al. .... 345/87  
2009/0189886 A1\* 7/2009 Tsai et al. .... 345/214

FOREIGN PATENT DOCUMENTS

JP 3-251818 11/1991  
JP 2002-108294 4/2002  
JP 2002-116743 4/2002

\* cited by examiner

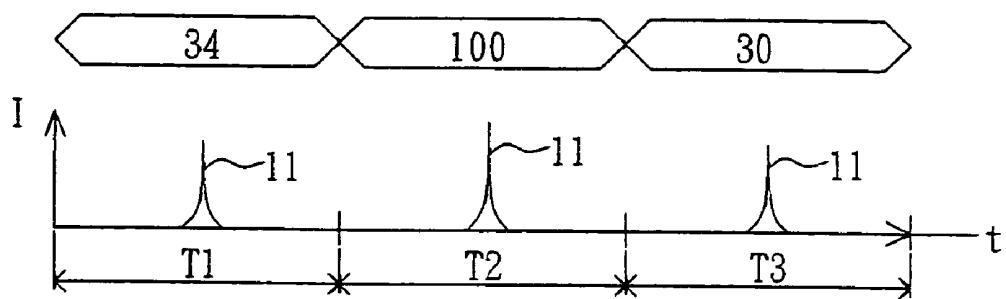


FIG. 1 (PRIOR ART)

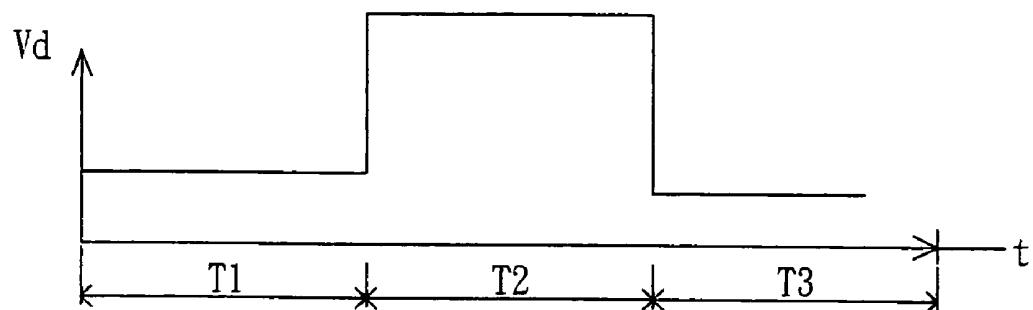


FIG. 2A (PRIOR ART)

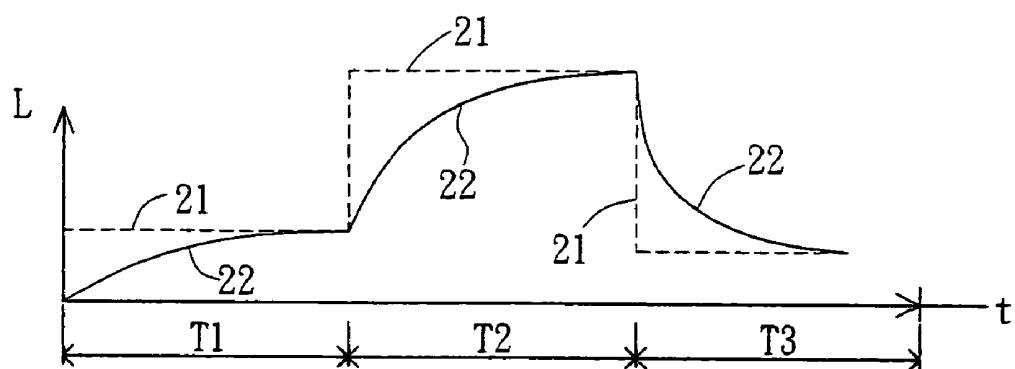


FIG. 2B (PRIOR ART)

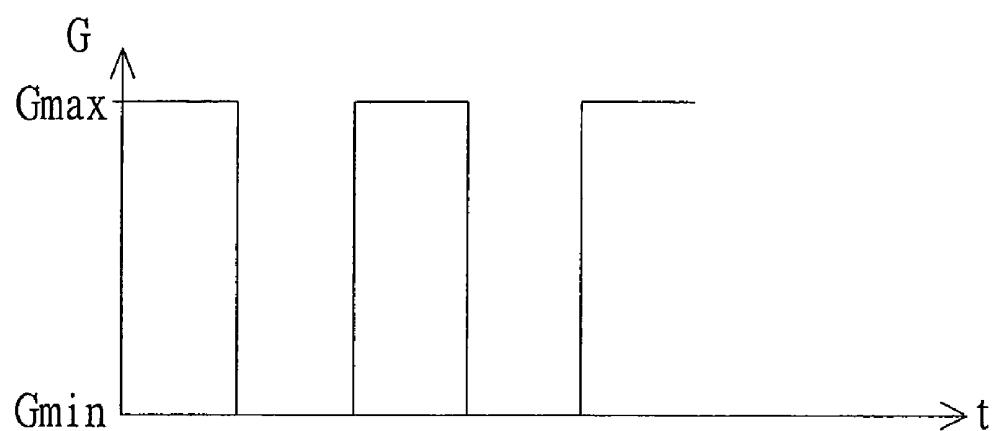


FIG. 3A

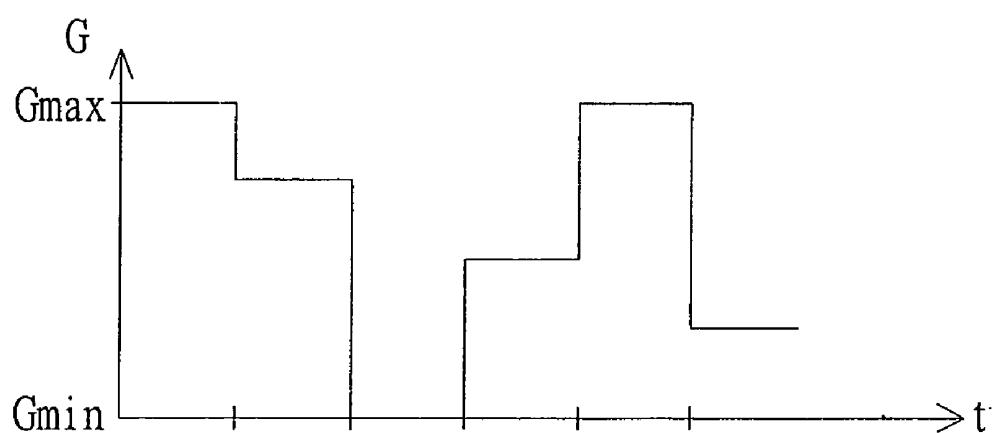


FIG. 3B

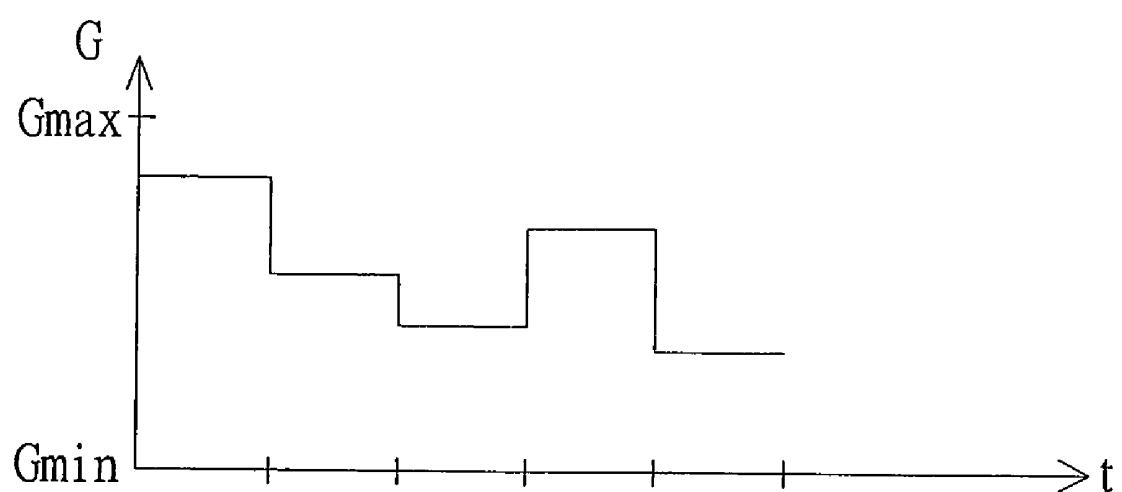


FIG. 3C

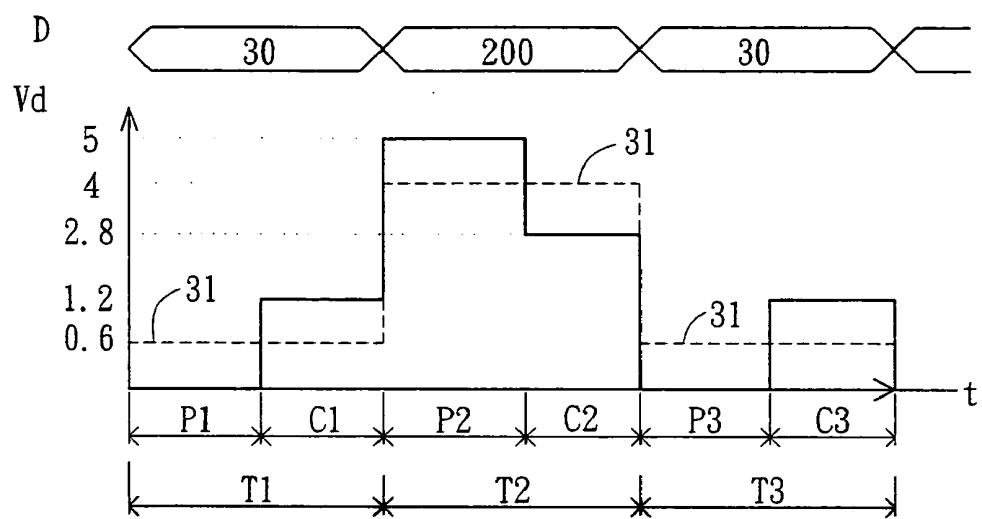


FIG. 4A

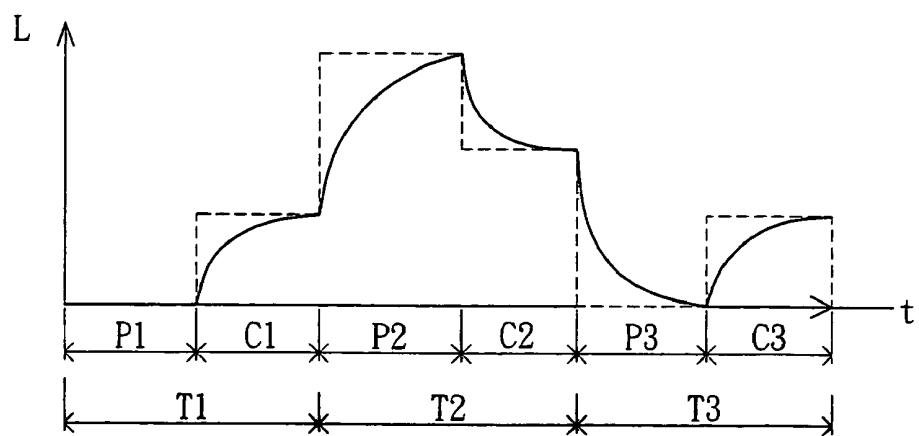


FIG. 4B

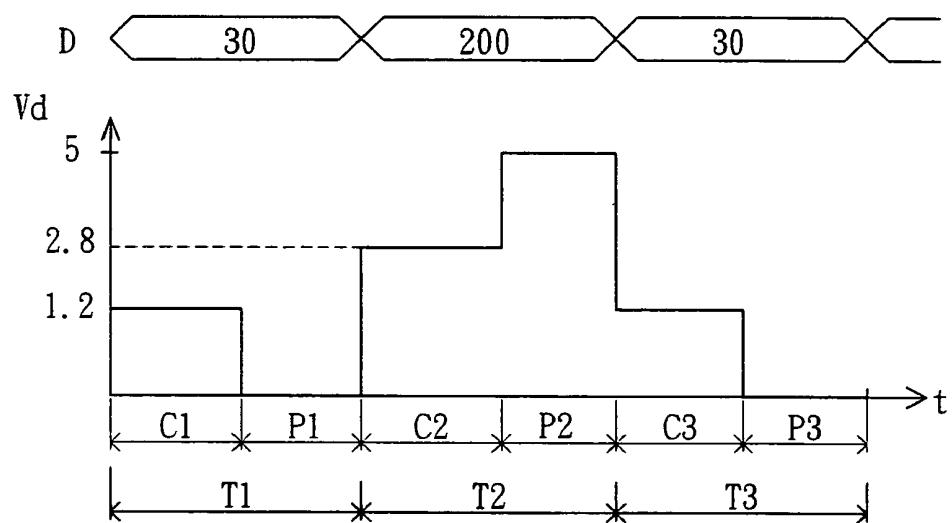


FIG. 5A

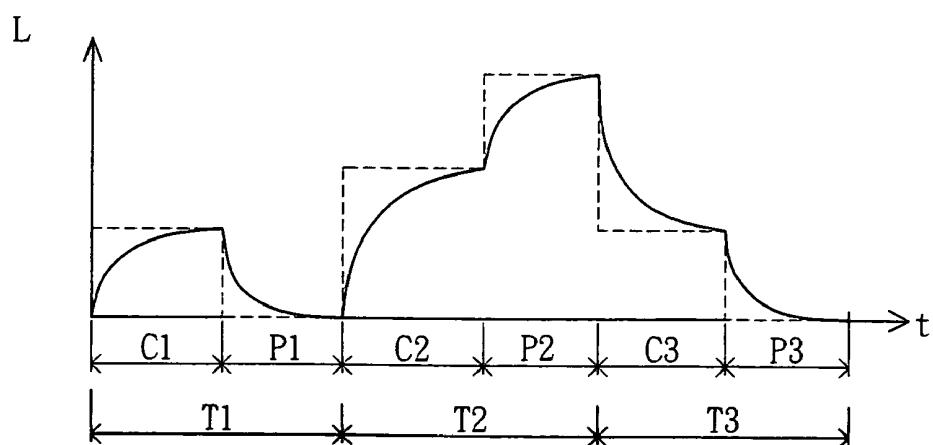


FIG. 5B

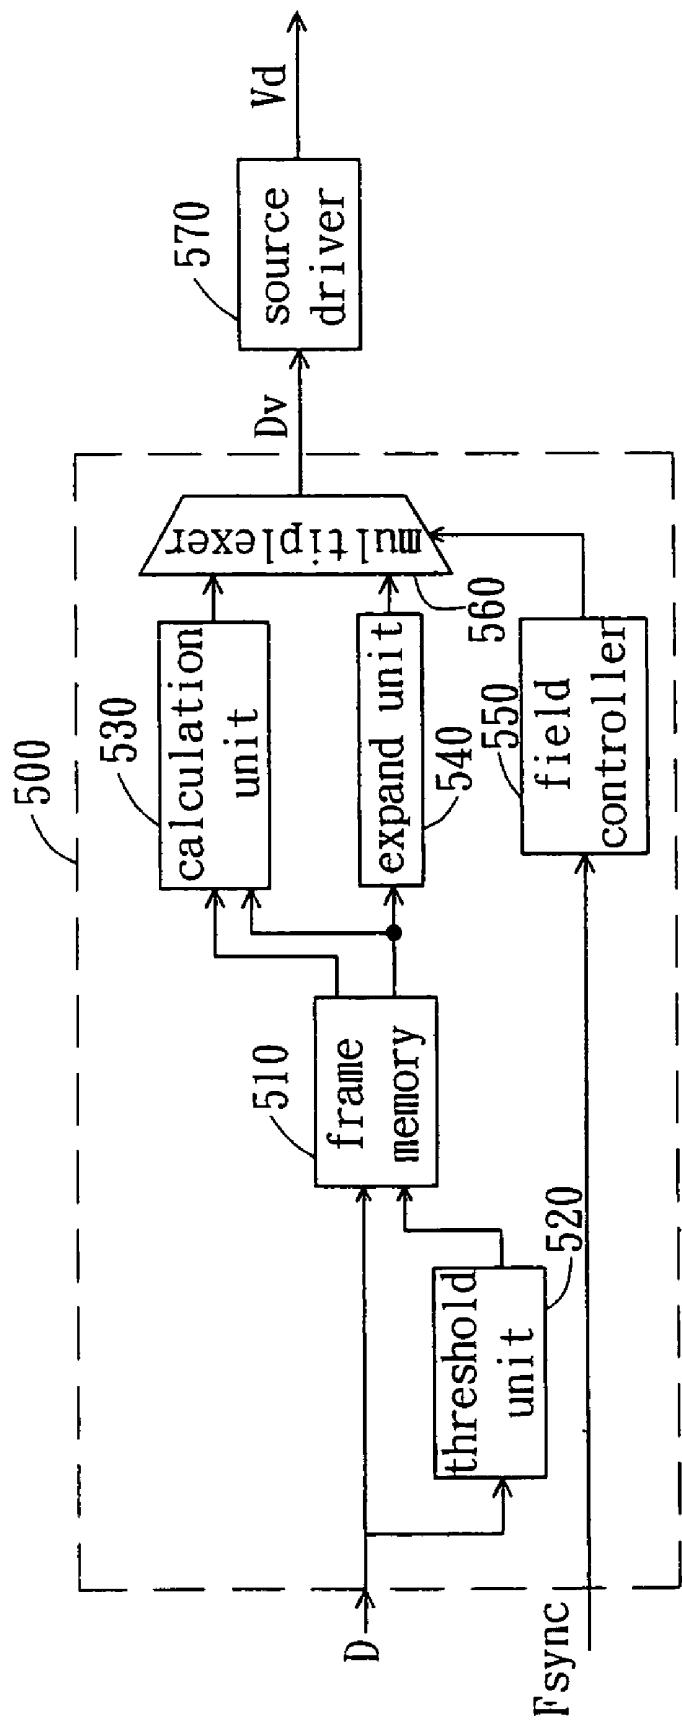


FIG. 6

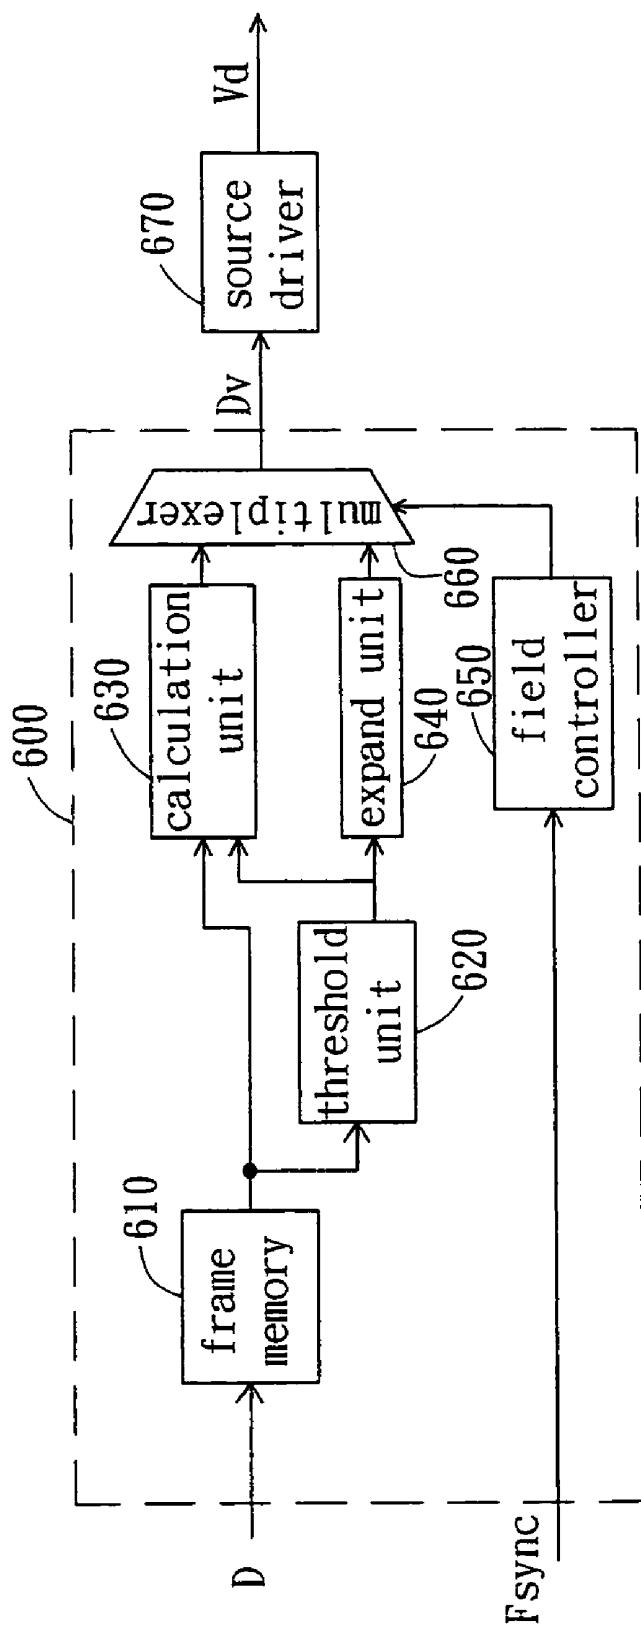


FIG. 7

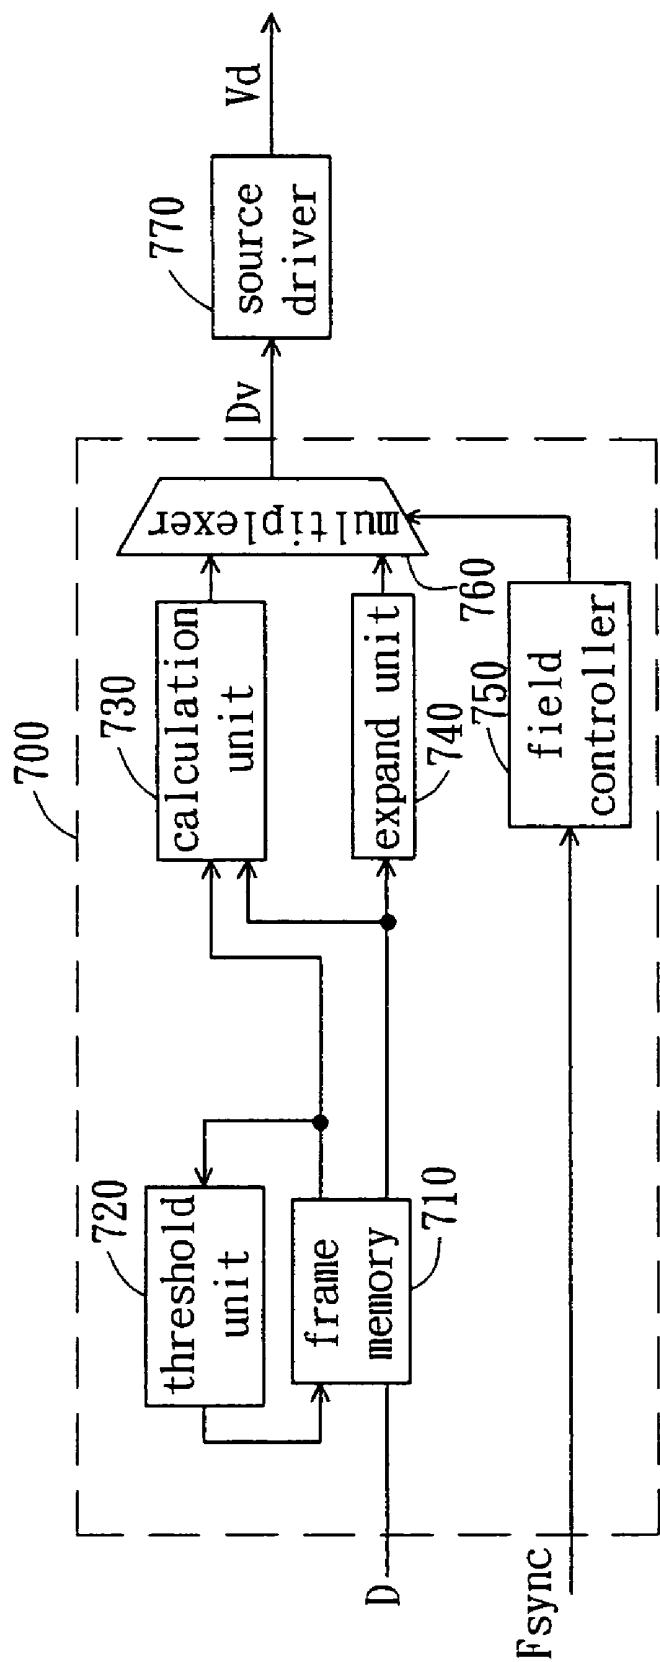


FIG. 8

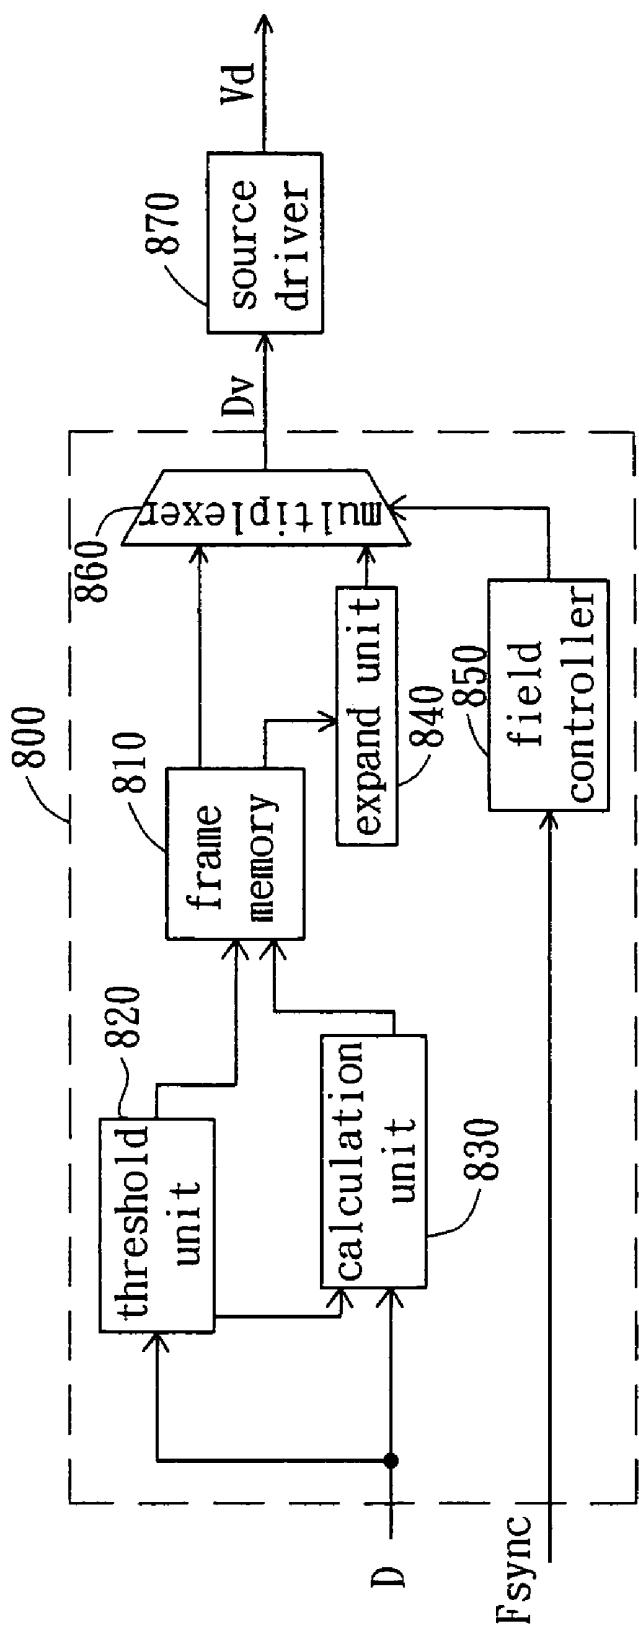


FIG. 9

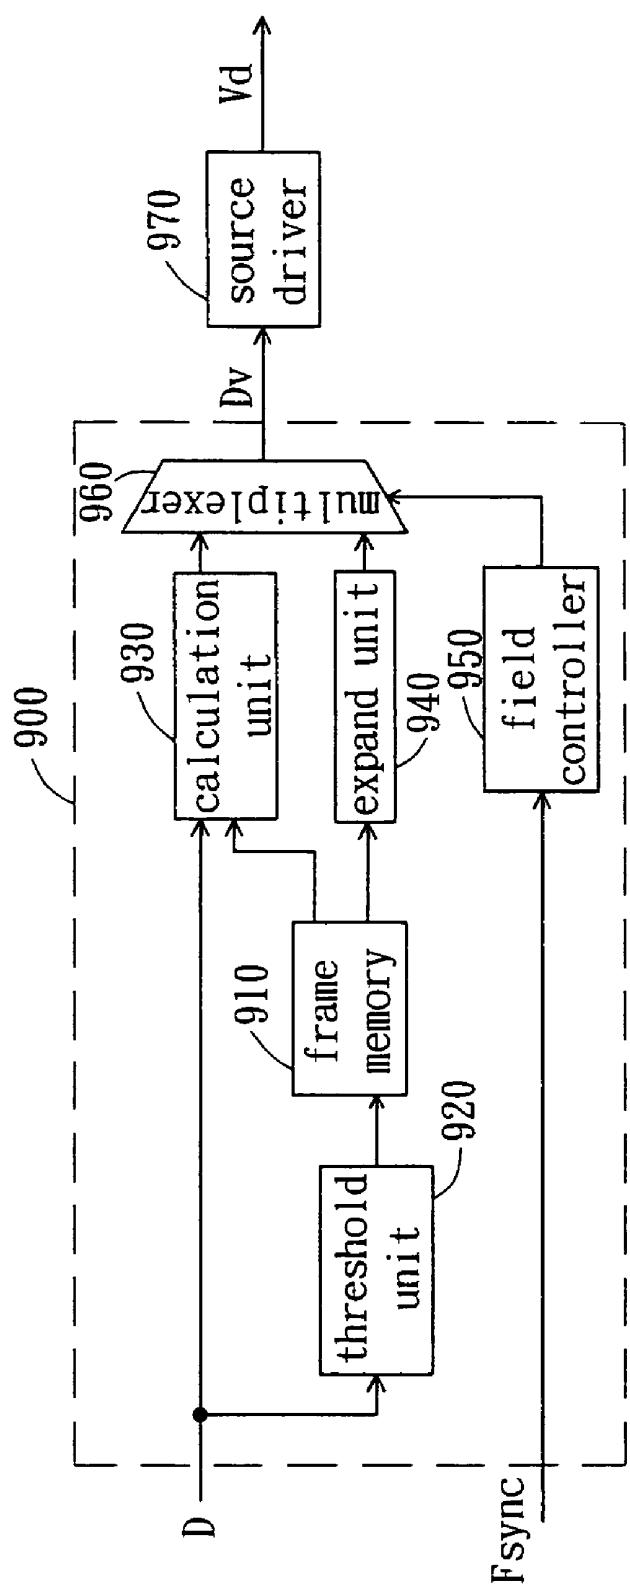


FIG. 10

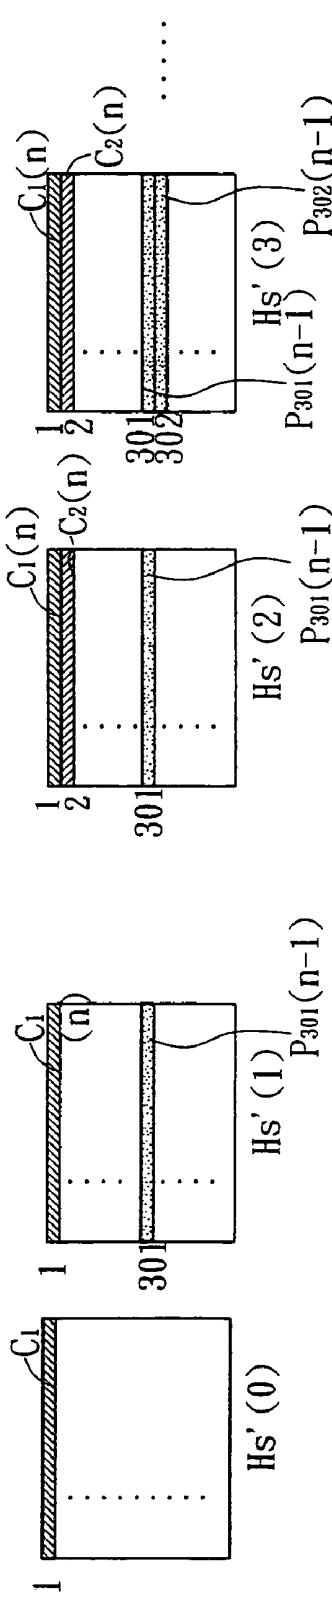


FIG. 11A

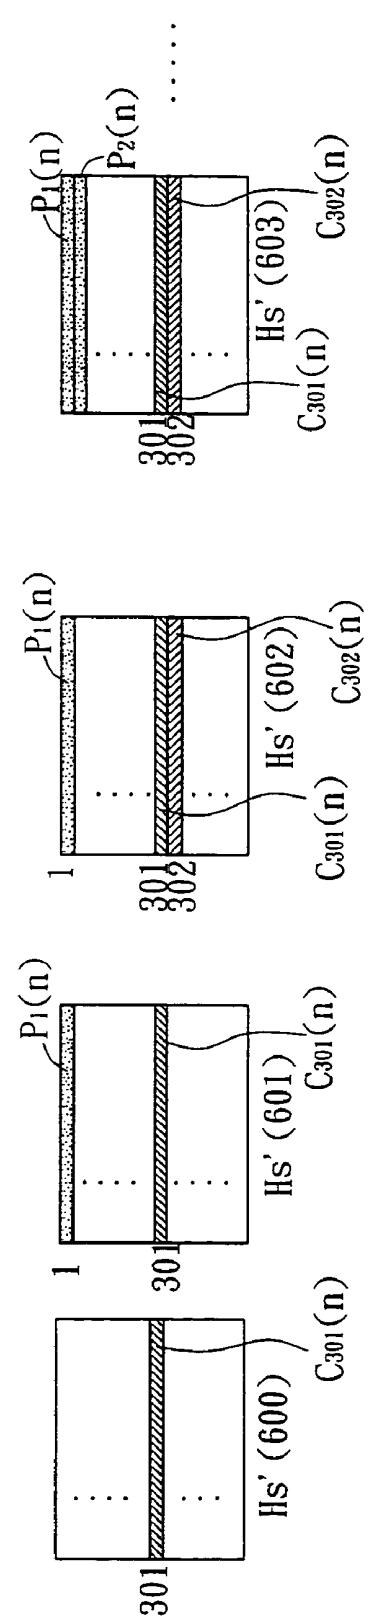


FIG. 11B

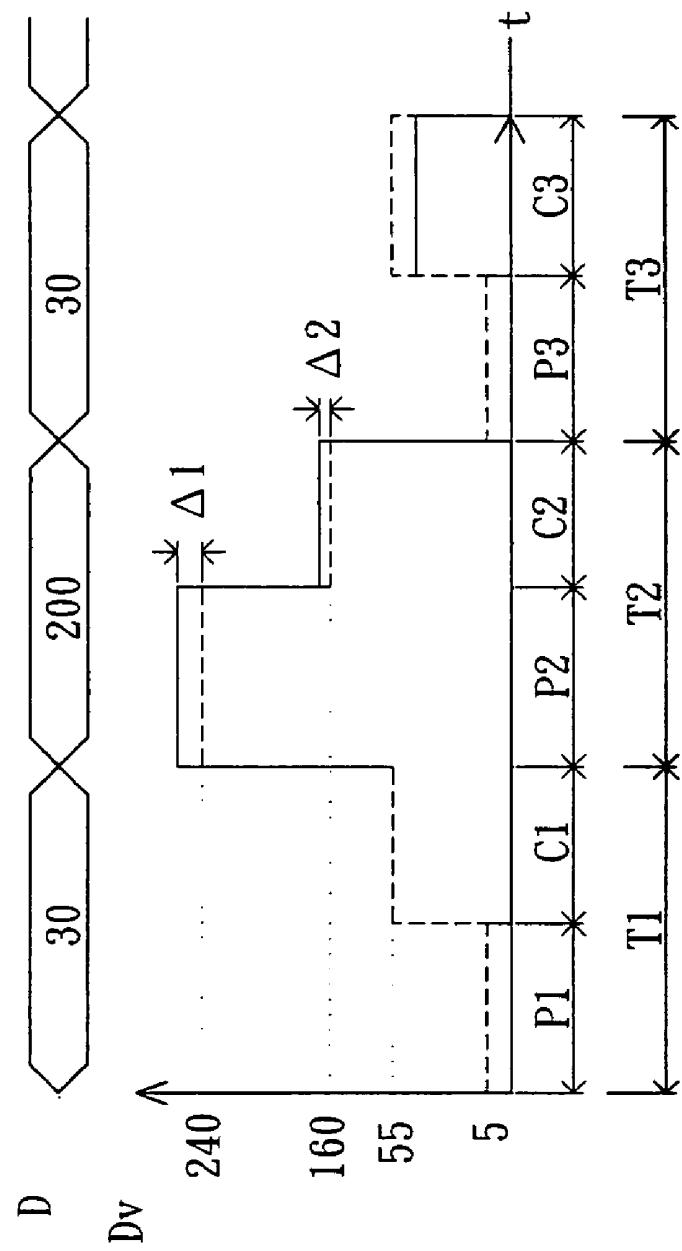


FIG. 12

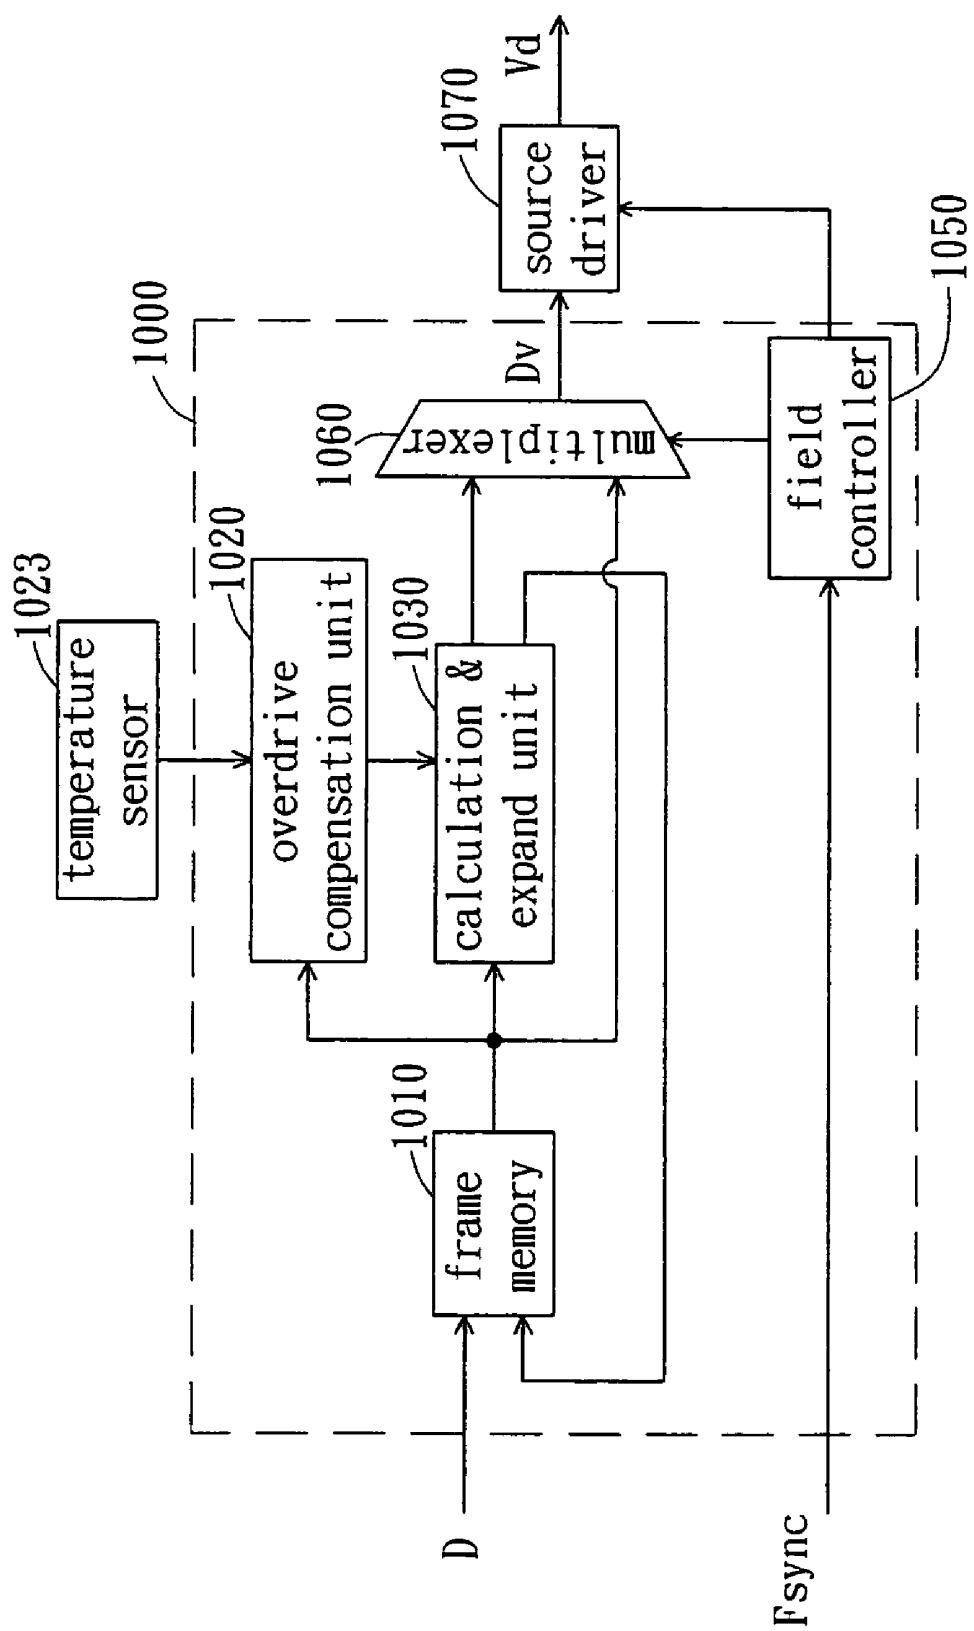


FIG. 13

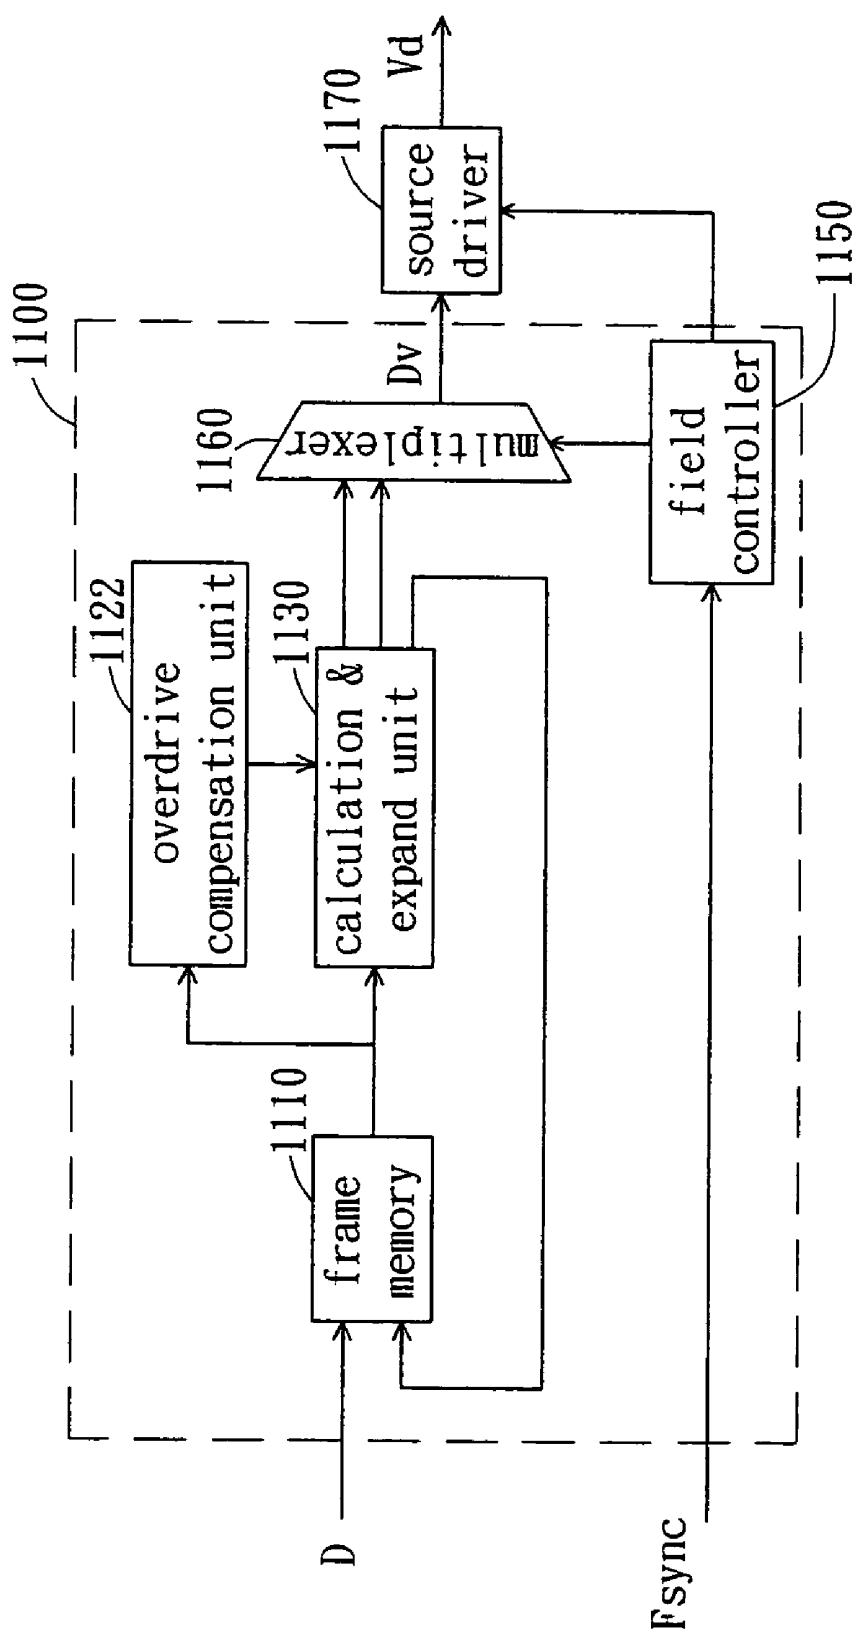


FIG. 14

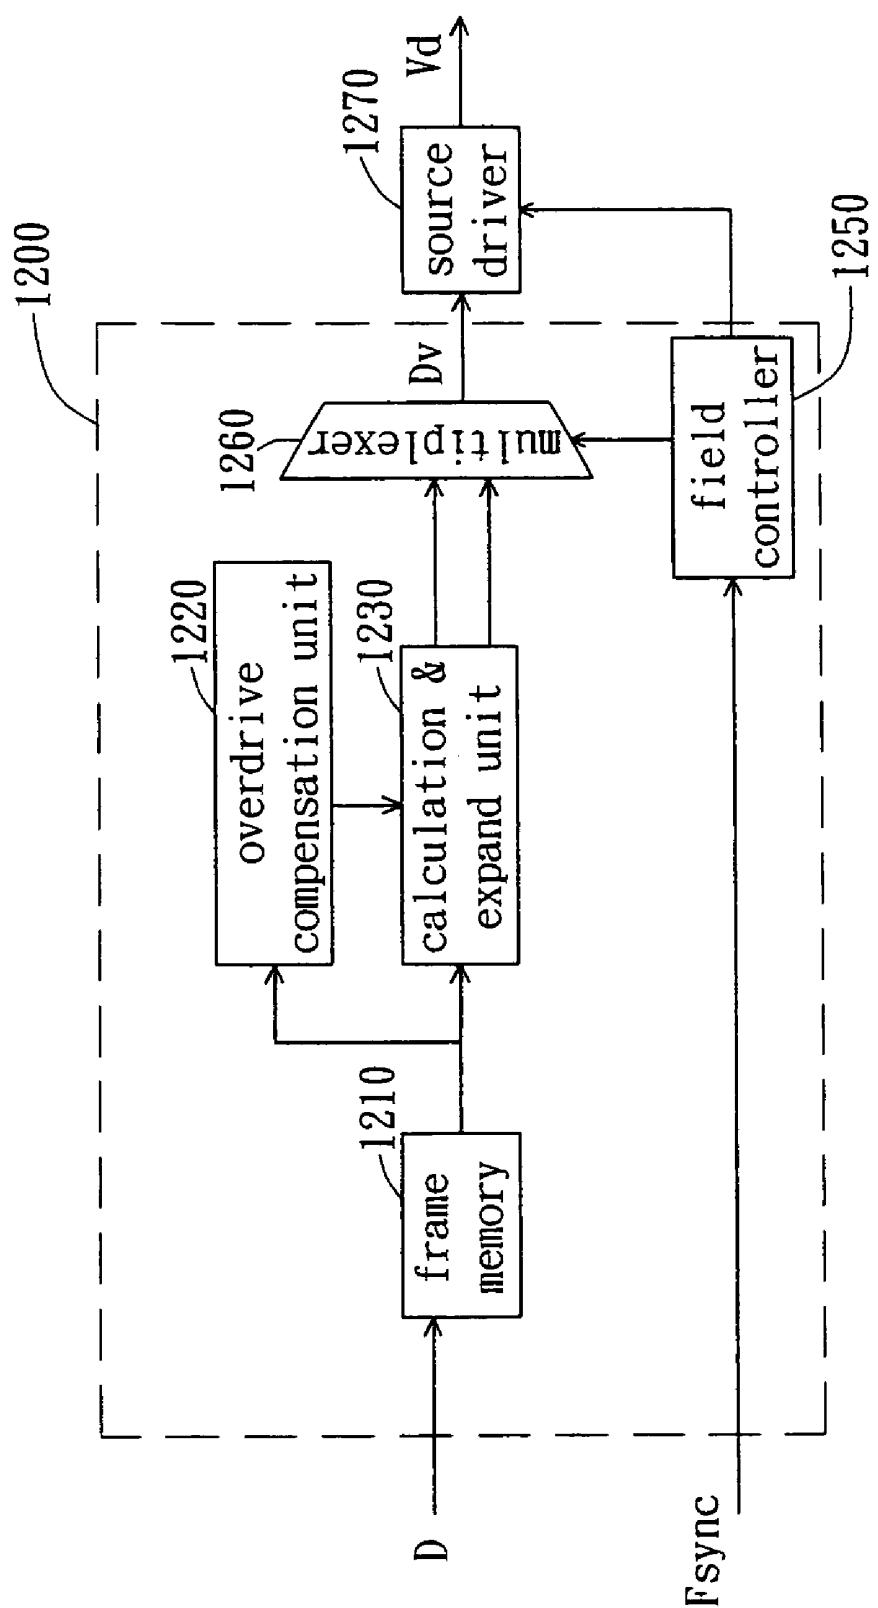


FIG. 15

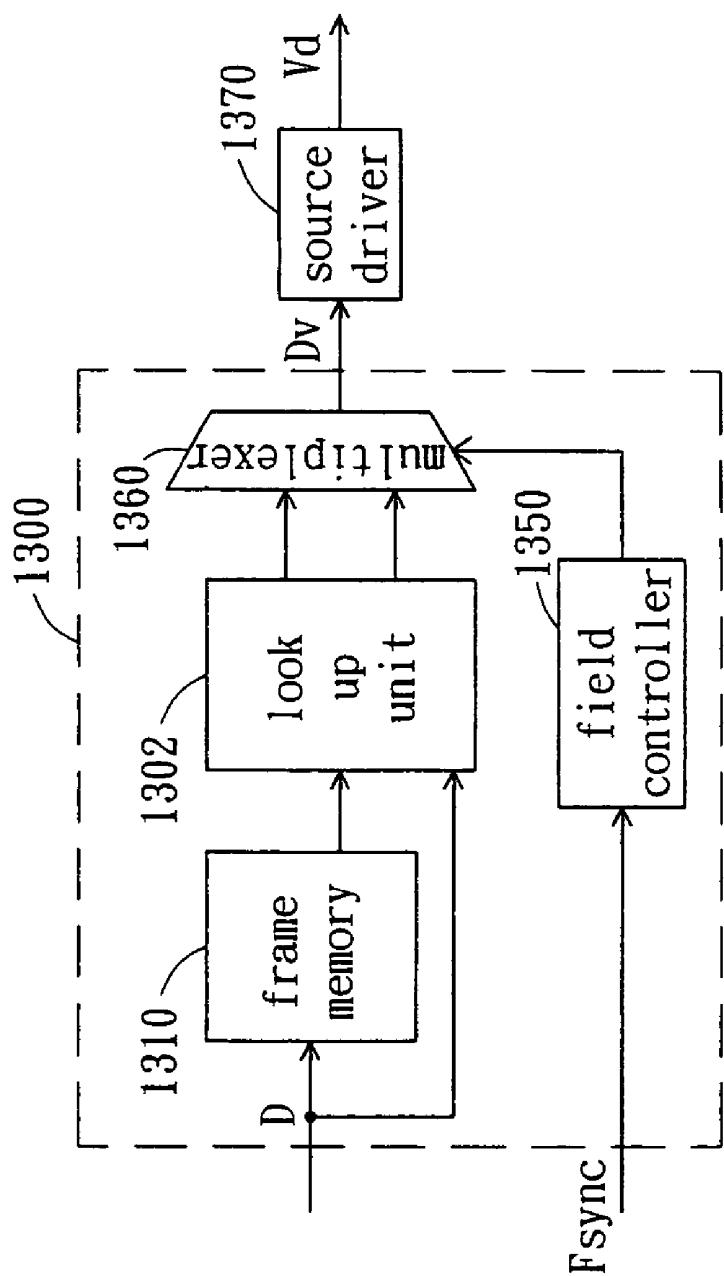


FIG. 16A

input pixel value	output	
	precharge pixel value	compensation pixel value
0	0	0
1	0	0
2	0	1
3	0	3
4	0	9
...	...	...
...	...	...
251	250	255
252	252	255
253	253	255
254	254	255
255	255	255

FIG. 16B

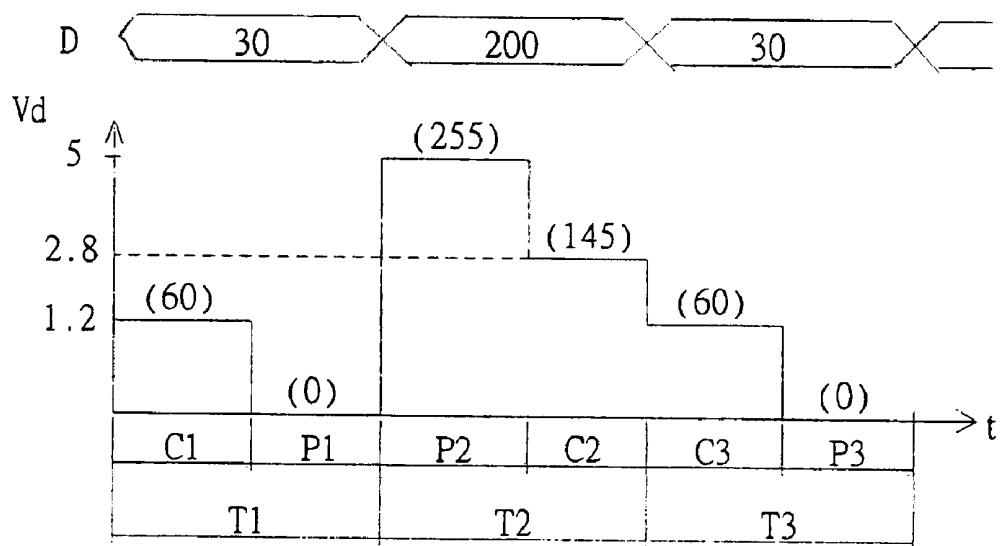


FIG. 17

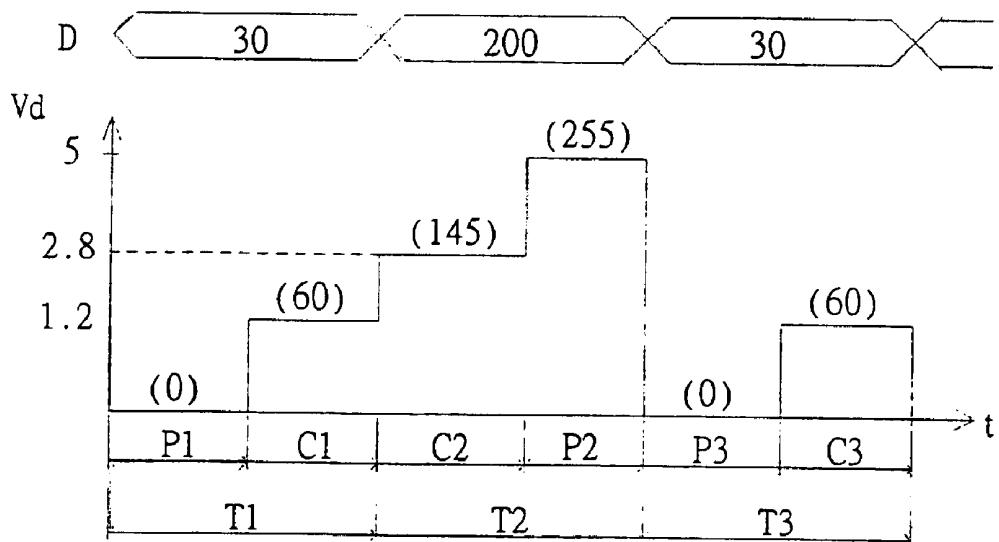


FIG. 18

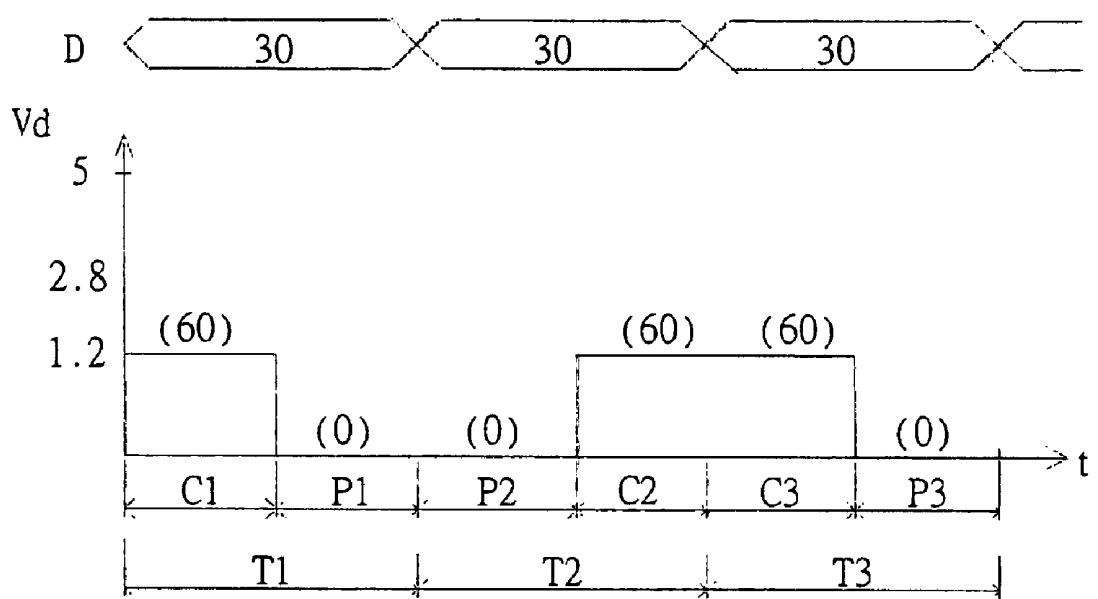


FIG. 19

# LIQUID CRYSTAL DISPLAY DRIVING APPARATUS AND METHOD THEREOF

## CROSS REFERENCE TO RELATED APPLICATION

This is a continuation-in-part of parent application Ser. No. 10/848,234, filed May 19, 2004 (now U.S. Pat. No. 7,532,186, issued May 12, 2009) and claims the benefit of Taiwan Patent Applications, Serial No. 092113907, filed May 22, 2003, and Serial No. 093111798, filed Apr. 27, 2004, the subject matter of which is incorporated herein by reference.

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The invention relates in general to a liquid crystal display (LCD) driving apparatus and the method thereof, and in particular to an LCD driving apparatus and the method thereof having improved displaying quality.

### 2. Description of the Related Art

Liquid crystal displays (LCDs) have been widely used for their characteristics of lightness and thinness. However, the LCDs have slow speed of responding, as compared with the traditional cathode ray tube (CRT) monitor. The LCD tends to have image residue as the dynamic images are displayed, while the CRT monitor does not.

The way that the CRT monitor displays the frames is called an impulse type. Each pixel only emits light at an instant during each frame period. Referring to FIG. 1, it shows the relation of lightness **1** for one pixel vs. time **t** of the CRT monitor. The pixel values **D** of this pixel at frame period **T<sub>1</sub>**, **T<sub>2</sub>**, and **T<sub>3</sub>** are supposed to be respectively 34, 100, and 30. The illumination intensities of pluses **11** are controlled according to the pixel values **D**. The lightness of the present frame period will not affect that of the next frame period as a consequence of the impulse type, and thus the image residue is not existed and the response time is short.

The way that the LCD displays the frames is called a hold type. Each pixel value **D** emits constant light in one frame period. Referring to FIG. 2A, it shows the relation of time **t** and driving voltage **V<sub>d</sub>** applied to the pixel according to the display of LCD. The pixel values **D** of the pixel at frame periods **T<sub>1</sub>**, **T<sub>2</sub>**, and **T<sub>3</sub>** are supposed to be respectively 34, 100, and 30. The driving voltages **V<sub>d</sub>** at frame period **T<sub>1</sub>**, **T<sub>2</sub>**, and **T<sub>3</sub>** are respectively determined according to those pixel values **D**.

Referring to FIG. 2B, it shows the diagram of the lightness **L** of the pixel vs. time **t**. The lightness line **21** is the ideal lightness of the pixel according to the driving voltage **V<sub>d</sub>** of FIG. 2A. In reality, the response speed of the liquid crystal molecule is slower than that of the electric field, and thus a response time is required for the pixel to reach the proposed lightness. The lightness line **22** is the actual lightness of the pixel according to the driving voltage **V<sub>d</sub>** of FIG. 2A. The quality of image is lowered with the image residue caused by the slow response.

The above problem can be improved, for example, by over-driving method. If the pixel value of the present frame period to be displayed is larger than that of the previous one, the driving voltage larger than that to be displayed is applied to the pixel. If the pixel value of the present frame period to be displayed is smaller than that of the previous one, the driving voltage smaller than that to be displayed is applied to the pixel.

However, the display quality of LCD is still not as satisfying as the CRT even if the liquid crystal molecule responds to

the applied driving voltage in real time due to the hold type. For example, the image at the beginning of the frame period **T<sub>3</sub>** will overlaps with the image of the frame period **T<sub>2</sub>** by human's eye, when the responding is supposed to be real time according to the lightness lines **21** of FIG. 2B. Therefore, not only the low speed of responding, but the hold type also decreases the displaying quality of the LCD.

## SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide a liquid crystal display (LCD) driving apparatus and the method thereof having improved displaying quality.

According to the object of the present invention, a method for driving a liquid crystal display (LCD) is provided. The LCD is adapted to receive a pixel value and to drive a pixel of the LCD according to the pixel value during a frame period. The frame period is divided into a precharge field and a compensation field. The method includes the following steps. First, decide a precharge pixel value to be either a predetermined first pixel value or a predetermined second pixel value according to the pixel value. Then, decide a compensation pixel value. After that, drive the pixel according to the precharge value and the compensation pixel value, including: determining a precharge driving voltage corresponding to the precharge pixel value; determining a compensation driving voltage corresponding to the compensation pixel value; driving the pixel according to the precharge driving voltage during the precharge field; and driving the pixel according to the compensation driving voltage during the compensation field. At the driving step, the lightness of the pixel driven according to the precharge pixel value and the compensation pixel value is substantially the same as the lightness of the pixel if driven according to the pixel value. The precharge field comes before the compensation field when the precharge pixel value is larger than the compensation pixel value, and the compensation field comes before the precharge field when the compensation pixel value is larger than the precharge pixel value.

According to the object of the present invention, a method for driving a liquid crystal display (LCD) is provided. The LCD is adapted to receive a pixel value and to drive a pixel of the LCD according to the pixel value during a frame period. The frame period is divided into a precharge field and a compensation field. The method includes the following steps. First, decide a precharge pixel value to be either a predetermined first pixel value or a predetermined second pixel value according to the pixel value. Then, decide a compensation pixel value. After that, drive the pixel according to the precharge value and the compensation pixel value, including: determining a precharge driving voltage corresponding to the precharge pixel value; determining a compensation driving voltage corresponding to the compensation pixel value; driving the pixel according to the precharge driving voltage during the precharge field; and driving the pixel according to the compensation driving voltage during the compensation field. At the driving step, the lightness of the pixel driven according to the precharge pixel value and the compensation pixel value is substantially the same as the lightness of the pixel if driven according to the pixel value. The precharge field comes before the compensation field when the precharge pixel value is smaller than the compensation pixel value, and the com-

pensation field comes before the precharge field when the compensation pixel value is smaller than the precharge pixel value.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features, and advantages of the invention will become apparent from the following detailed description of the preferred but non-limiting embodiments. The description is made with reference to the accompanying drawings in which:

FIG. 1 shows the relation of lightness 1 for one pixel and time t according to the display of a CRT.

FIG. 2A shows the relation of time t and driving voltage Vd applied to the pixel according to the display of LCD.

FIG. 2B shows the relation of time t and the lightness L for pixel provided with the voltages of FIG. 2A.

FIG. 3A shows the situation wherein the liquid crystal molecules have the shortest response time.

FIG. 3B shows the situation wherein the liquid crystal molecules have the intermediate response time.

FIG. 3C shows the situation wherein the liquid crystal molecules have the longest response time.

FIG. 4A shows the driving voltage according to a first embodiment of the driving method for an LCD.

FIG. 4B shows the lightness of the pixel, to which the driving voltages of FIG. 4A are applied.

FIG. 5A shows the driving voltage of the other driving method for an LCD, wherein the compensation field is prior to the precharge field.

FIG. 5B shows the lightness of the pixel, to which the driving voltages of FIG. 5A are applied.

FIG. 6 shows the block diagram of an LCD driving apparatus according to a second embodiment of the present invention.

FIG. 7 shows the block diagram of an LCD driving apparatus according to a third embodiment of the present invention.

FIG. 8 shows the block diagram of an LCD driving apparatus according to a fourth embodiment of the present invention.

FIG. 9 shows the block diagram of an LCD driving apparatus according to a fifth embodiment of the present invention.

FIG. 10 shows the block diagram of an LCD driving apparatus according to a sixth embodiment of the present invention.

FIG. 11A shows the scanning process while receiving the pixel values for the upper part of the nth frame.

FIG. 11B shows the scanning process while receiving the pixel values for the lower part of the nth frame.

FIG. 12 shows the driving voltage of the driving method for an LCD according to a seventh embodiment of the invention.

FIG. 13 shows the block diagram of an LCD driving apparatus according to an eighth embodiment of the present invention.

FIG. 14 shows the block diagram of an LCD driving apparatus according to a ninth embodiment of the present invention.

FIG. 15 shows the block diagram of an LCD driving apparatus according to a tenth embodiment of the present invention.

FIG. 16A shows the block diagram of an LCD driving apparatus according to an eleventh embodiment of the present invention.

FIG. 16B shows the table used by the look up unit.

FIG. 17 shows the driving voltage according to one example of sequence of the precharge field P and the compensation field C.

FIG. 18 shows the driving voltage according to another example of sequence of the precharge field P and the compensation field C.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

The responding speed of the liquid crystal molecule is related to the present state and the target state of the liquid crystal molecule. Referring to FIG. 3A, it shows the situation wherein the liquid crystal molecules have the shortest response time. When the pixel value G rises from the minimum pixel value Gmin to the maximum pixel value Gmax, or descends from the maximum pixel value Gmax to the minimum pixel value Gmin, the liquid crystal molecules have the shortest response time.

Referring to FIG. 3B, it shows the situation wherein the liquid crystal molecules have the intermediate response time. When the pixel value G rises from the minimum pixel value Gmin to the intermediate pixel value, or from the intermediate pixel value to the maximum pixel value Gmax, or falls from the maximum pixel value Gmax to the intermediate pixel value, or from the intermediate pixel value to the minimum pixel value Gmin, the liquid crystal molecules have a moderate response time.

Referring to FIG. 3C, it shows the situation where the liquid crystal molecules have the longest response time. When the pixel value G changes from one intermediate pixel value to the other intermediate pixel value, the liquid crystal molecules have the longest response time. The situation of FIG. 3C should be avoided to enhance the display quality.

In the following embodiment, the refresh rate of the LCD is assumed to be 60 Hz, and the resolution is assumed to be 800×600. The displaying process of a traditional liquid crystal display (LCD) is controlled by a vertical synchronization signal Vs and a horizontal synchronization signal Hs. There are 60 frames to be displayed in one second according to the vertical synchronization signal Vs having the frequency of 60 Hz, which is denoted as f(Vs), and thus the corresponding frame period is  $\frac{1}{60}=16.7$  ms. Each frame has 600 horizontal lines, which are scanned orderly by the control of Hs signal, and thus the frequency of the Hs signal is  $f(Hs)=600*f(Vs)=36,000$  Hz. Each horizontal line has 800 points, and each point includes a red, blue, and a green pixel. So that, each horizontal line has  $800*3=2400$  pixels. The frequency of the pixel clock signal Cp, for controlling the input of the pixel bit stream into the LCD, is  $f(Cp)=2400*f(Hs)=86,400,000$  Hz. The pixel value is supposed to have 8 bits, 0~255 gray levels, and the corresponding driving voltage is 0~5V. The relation of the pixel value and the driving voltage is not necessarily linear, and is obtained by looking up a table, for example.

Referring to FIG. 4A, it shows the driving voltage of the driving method for an LCD according to a first embodiment of the invention. The pixel values D in the frame periods T1, T2, and T3 are supposed to be respectively 30, 200, and 30. By conventional driving method, the corresponding driving voltages in the frame period T1, T2, and T3 are, for instance, 0.6V, 4V, and 0.6V, as shown by dash line 31 in FIG. 4A. However, the conventional method has the disadvantage of long response time.

The first embodiment of the present invention divides a frame period into a compensation field C and a precharge field P prior to the compensation field. The precharge pixel value of the precharge field P is either a predetermined high pixel

value  $G_{max}$ , which is for example the maximum pixel value in the first embodiment, or a predetermined low pixel value  $G_{min}$ , which is for example the minimum pixel value in the first embodiment. The compensation pixel value corresponding to the compensation field is determined according to the pixel value and the precharge pixel value. In the first embodiment, the pixel value is approximately the average of the precharge field  $P$  and the corresponding compensation field  $C$ .

The frame period  $T_1$  is divided into a precharge field  $P_1$  and a compensation field  $C_1$ ; the frame period  $T_2$  is divided into a precharge field  $P_2$  and a compensation field  $C_2$ ; the frame period  $T_3$  is divided into a precharge field  $P_3$  and a compensation field  $C_3$ .

First, a precharge pixel value of the precharge field  $P$  is determined. If the pixel value of the frame period is larger than a reference value, the precharge pixel value will be the predetermined high pixel value  $G_{max}$ . If the pixel value of the frame period is smaller than the reference value, the precharge pixel value will be the predetermined low pixel value  $G_{min}$ . The reference value is adjusted according to the characteristic of the LCD. Here, the reference value is supposed to be 128.

The pixel value of the frame period  $T_1$  is 30, being smaller than the reference value of 128, so the precharge pixel value of the precharge field  $P_1$  is the predetermined low pixel value  $G_{min}$  of 0. Hence, the compensation pixel value of the compensation field  $C_1$  is determined to be 60 so that the average of the compensation pixel value and the precharge pixel value is substantially the pixel value of frame period  $T_1$ .

The pixel value of the frame period  $T_2$  is 200, being larger than the reference value of 128, so that the precharge pixel value of the precharge field  $P_2$  is the predetermined high pixel value  $G_{max}$  of 255. The compensation pixel value of the compensation field  $C_2$  is accordingly determined to be 145, so that the pixel value of the frame period  $T_2$ , being 200, is the average of the precharge pixel value of the precharge field  $P_2$  and the compensation pixel value of the compensation field  $C_2$ .

The pixel value of the frame period  $T_3$  is 30, being smaller than the reference value of 128, such that the precharge pixel value of the precharge field  $P_3$  is determined to be the predetermined low pixel value  $G_{min}$  of 0. The compensation pixel value of the compensation field  $C_3$  is accordingly determined to be 60, so that the pixel of the frame period  $T_3$ , being 30, is the average of the precharge pixel value of the precharge field  $P_3$  and the compensation pixel value of the compensation field  $C_3$ .

The driving voltages are decided according to the precharge pixel value and the compensation pixel value by, for instance, looking up a table. The driving voltages in each field of this embodiment is 0V, 1.2V, 5V, 2.8V, 0V, 1.2V, as shown in FIG. 4A.

Referring to FIG. 4B, it shows the lightness of the pixel to which the driving voltages of FIG. 4A are applied. The dash line represents the ideal lightness of the pixel, and the solid line represents the real lightness of the pixel. For example, consider the frame period  $T_2$ . The lightness of the pixel rises to the maximum during the precharge field  $P_2$ . The rising time of this embodiment is shorter than that of the conventional method as a result of the larger driving voltage of this embodiment than that of the conventional one. The lightness of the pixel begins to fall during the compensation field  $C_2$ . The falling time of this embodiment is shorter than that of the conventional method due to the smaller driving voltage of this embodiment than that of the conventional one. Moreover, the curve of the lightness for the frame period  $T_2$  is more like the

display of the impulse type, such that the effect of the image residue is diminished. Furthermore, the long response time situation, as shown in FIG. 3C, is prevented either by approaching the intermediate pixel value from the predetermined high or low pixel value, or by starting from the intermediate pixel value to the predetermined high or low pixel value.

The predetermined high or low pixel value is not necessarily the maximum or the minimum pixel value and is dependent on the characteristics of the LCD.

Take frame period  $T_2$  for example. The lightness of frame period  $T_2$ , which is the result of the lightness of precharge field  $P_2$  and that of the compensation field  $C_2$ , is substantially equal to the lightness if the pixel is driven by the conventional method.

Referring to FIG. 5A, it shows the driving voltage of the other driving method for an LCD, wherein the compensation field is prior to the precharge field. The pixel values  $D$  in the frame period  $T_1$ ,  $T_2$ , and  $T_3$  are supposed to be respectively 30, 200, and 30.

The frame period  $T_1$  is divided into a compensation field  $C_1$  and a precharge field  $P_1$ ; the frame period  $T_2$  is divided into a precharge field  $P_2$  and a compensation field  $C_2$ ; the frame period  $T_3$  is divided into a precharge field  $P_3$  and a compensation field  $C_3$ .

The pixel value of the frame period  $T_1$  is 30, being smaller than the reference value of 128, so that the precharge pixel value of the precharge field  $P_1$  is determined to be the predetermined low pixel value  $G_{min}$  of 0. The compensation pixel value of the compensation field  $C_1$  is accordingly determined to be 60, so that the pixel value for the frame period  $T_1$ , being 30, is the average of the precharge pixel value of the precharge field  $P_1$  and the compensation pixel value of the compensation field  $C_1$ .

The pixel value of the frame period  $T_2$  is 200, being larger than the reference value of 128, so that the precharge pixel value of the precharge field  $P_2$  is determined to be the predetermined high pixel value  $G_{max}$  of 255. The compensation pixel value of the compensation field  $C_2$  is thereby determined to be 145, so that the pixel value of the frame period  $T_2$ , being 200, is the average of the precharge pixel value of the precharge field  $P_2$  and the compensation pixel value of the compensation field  $C_2$ .

The pixel value of the frame period  $T_3$  is 30, being smaller than the reference value of 128, so that the precharge pixel value of the precharge field  $P_3$  is determined to be the predetermined low pixel value  $G_{min}$  of 0. The compensation pixel value of the compensation field  $C_3$  is thereby determined to be 60, so that the pixel value of the frame period  $T_3$ , being 30, is the average of the precharge pixel value of the precharge field  $P_3$  and the compensation pixel value of the compensation field  $C_3$ .

The driving voltage is decided according to the precharge pixel value and the compensation pixel value by, for instance, looking up a table. The driving voltage in each field of this embodiment is 1.2V, 0V, 2.8V, 5V, 1.2V, and 0V, as shown in FIG. 5A.

Referring to FIG. 5B, it shows the lightness of the pixel, to which the driving voltages of FIG. 5A are applied. The dashed line represents the ideal lightness of the pixel, and the solid line represents the real lightness of the pixel. The longest response time situation, as shown in FIG. 3C, is avoided in this embodiment by either approaching the intermediate pixel value from the predetermined high or low pixel value, or by starting from the intermediate pixel value to the predetermined high or low pixel value.

Referring to FIG. 6, it shows the block diagram of an LCD driving apparatus according to a second embodiment of the present invention. The driving apparatus 500 includes a frame memory 510, a mathematic unit, and a field controller 550. The mathematic unit includes a threshold unit 520, a calculation unit 530, an expand unit 540, and a multiplexer 560. The LCD driving apparatus 500 receives a pixel value D and outputs driving value Dv, which is either the precharge pixel value or the compensation pixel value. Then, the source driver 570 thereby outputs driving voltage Vd to drive the LCD.

For example, consider the LCD having the refresh rate of 60 Hz, for which 60 frames are displayed in each second. The pixel value D is inputted into the LCD driving apparatus 500 according to the above-mentioned pixel clock signal Cp. The LCD driving apparatus 500 outputs the driving values Dv according to the pixel clock signal Cp', whose frequency is double of the pixel clock signal Cp, because that one frame period is divided into a compensation field and a precharge field.

First, the LCD driving apparatus 500 receives the pixel value D, saves the pixel value D in the frame memory 510, and sends the pixel value D to the threshold unit 520. The threshold unit 520 compares the pixel value D with a reference value: if the pixel value D is larger than the reference value, a threshold value from the threshold unit 520 will be a first value and be saved in the frame memory 510; otherwise, it will be a second value and be saved in the frame memory 510.

Then, the calculation unit 530 outputs a compensation pixel value according to the pixel value D and the threshold value from the frame memory 510. If the threshold value is the second value, the compensation driving voltage is determined according to the double of the pixel value D. Otherwise, the compensation voltage is determined according to the result of double of the pixel value D minus the predetermined high pixel value.

The expand unit 540 receives the threshold value from the frame memory 510 and outputs a precharge pixel value. If the threshold value is the first value, the precharge pixel value will be the predetermined high pixel value; otherwise, it will be the predetermined low pixel value. The field controller 550 controls the multiplexer 560 to output the precharge pixel value or a compensation pixel value according to the second synchronization signal derived from the first synchronization signal Fsync. The sequence of the precharge field and the compensation field is decided by the field controller 550.

Referring to FIG. 7, it shows the block diagram of an LCD driving apparatus according to a third embodiment of the present invention. The LCD driving apparatus 600 includes a frame memory 610, a mathematic unit, and a field controller 650. The mathematic unit includes a threshold unit 620, a calculation unit 630, an expand unit 640, and a multiplexer 660. The LCD driving apparatus 600 receives the pixel value D and outputs a driving value Dv, which is either the precharge pixel value or the compensation pixel value, and thereby the source driver 670 outputs driving voltage Vd to drive the LCD.

For example, consider the LCD having the refresh rate of 60 Hz, for which 60 frames are displayed in each second. The pixel value D is inputted into the LCD driving apparatus 600 according to the pixel clock signal Cp. The LCD driving apparatus 600 outputs of the driving voltage Vd according to the pixel clock signal Cp', whose frequency is double of the pixel clock signal Cp, because that one frame period is divided into the compensation field and the precharge field.

First, the driving apparatus 600 receives the pixel value D, and saves the pixel value D in the frame memory 610. The threshold unit 620 compares the pixel value D with a refer-

ence value: if the pixel value D is larger than the reference value, a threshold value from the threshold unit 620 will be the first value; otherwise, it will be the second value.

Then, the calculation unit 630 outputs a compensation pixel value according to the pixel value D and the threshold value: if the threshold value is the second value, the compensation pixel value will be decided according to double of the pixel value D; otherwise, the compensation pixel value will be determined according to the result of double of the pixel value D minus the predetermined high pixel value.

The expand unit 640 receives the threshold value and outputs a precharge pixel value. If the threshold value is the first value, the precharge pixel value will be the predetermined high pixel value; otherwise, it will be the low pixel value. The field controller 650 controls the multiplexer 660 to output the precharge pixel value or the compensation pixel value according to the first synchronization signal Fsync. The field controller 650 decides the sequence of the precharge field and the compensation field.

Referring to FIG. 8, it shows the block diagram of an LCD driving apparatus according to a fourth embodiment of the present invention. The driving apparatus 700 includes a frame memory 710, a mathematic unit, and a field controller 750. The mathematic unit includes a threshold unit 720, a calculation unit 730, an expand unit 740, and a multiplexer 760. The LCD driving apparatus 700 receives the pixel value D and thereby the source driver 770 outputs the driving voltage Vd.

For example, consider the refresh rate of 60 Hz, for which 60 frames are displayed in each second. The pixel value D is inputted into the LCD driving apparatus 700 according to the pixel clock signal Cp. The LCD driving apparatus 700 outputs the driving voltage Vd according to the pixel clock signal Cp', whose frequency is double of the pixel clock signal Cp, because that one frame period is divided into the compensation field and the precharge field.

First, the LCD driving apparatus 700 receives the pixel value D, and saves the pixel value D in the frame memory 710. The frame memory 710 outputs the saved pixel value D and also the threshold value of the previous frame period. The threshold unit 720 compares the received pixel value D with a reference value. If the pixel value D is larger than the reference value, the threshold value from the threshold unit 720 will be the first value and be saved in the frame memory 710. Otherwise, it will be the second value.

The calculation unit 730 outputs a compensation pixel value according to the pixel value D and the threshold value of the previous frame period. When the pixel value is not larger than the reference value, the compensation pixel value is determined according to double of the pixel value D. Otherwise, the compensation voltage is determined according to the result of double of the pixel value D minus the predetermined high pixel value.

Then, The calculation unit 730 determines the over-driving tactic according to the threshold value of the previous frame period. When the threshold value of the previous frame period is the first value, the predetermined high pixel value is provided in the precharge field of the previous frame period. So, the over-driving tactic for increasing the responding speed is decreasing the compensation pixel value of the present frame period. When the threshold value of the previous frame period is the second value, the minimum pixel is provided in the precharge field of the previous frame period. So that, the over-driving tactic for increasing the responding speed is increasing the compensation driving voltage of the present frame period.

The expand unit 740 receives the threshold value and outputs a precharge pixel value. If the threshold value is the first

value, the precharge pixel value will be the predetermined high pixel value. Otherwise, it will be the predetermined low pixel value. The field controller **750** controls the multiplexer **760** to output the precharge pixel value or the compensation pixel value according to the first synchronization signal Fsync.

Referring to FIG. 9, it shows the block diagram of an LCD driving apparatus according to a fifth embodiment of the present invention. The precharge field is prior to the compensation field in the fifth embodiment, as compared with the fourth embodiment. The driving apparatus **800** includes a frame memory **810**, a mathematic unit, and a field controller **850**. The mathematic unit includes a threshold unit **820**, a calculation unit **830**, an expand unit **840**, and a multiplexer **860**. The LCD driving apparatus **800** receives the pixel value D and outputs driving value Dv, and thereby the source driver **870** outputs a driving voltage Vd.

For example, consider the LCD having the refresh rate of 60 Hz, for which 60 frames are displayed in each second. The pixel value D is inputted into the LCD driving apparatus **800** according to the above pixel clock signal Cp. The LCD driving apparatus **800** outputs the driving voltage Vd according to the pixel clock signal Cp', whose frequency is double of the pixel clock signal Cp, because that one frame period is divided into a precharge field and a compensation field.

First, the driving apparatus **800** receives the pixel value D, and delivers the pixel value D to the calculation unit **830** and the threshold unit **820**. The threshold unit **820** compares the received pixel value D with a reference value. If the pixel value D is larger than the reference value, a threshold value outputted from the threshold unit **820** will be the first value and be delivered to the calculation unit **830** and the frame memory **810**. Otherwise, it will be the second value.

Then, the calculation unit **830** outputs a compensation driving voltage according to the pixel value D and the threshold value from the frame memory **810**. When threshold value is the second value, the compensation pixel value is determined according to double of the pixel value D. Otherwise, the compensation pixel value is determined according to the result of double of the pixel value D minus the predetermined high pixel value.

Then, the calculation unit **830** determines the over-driving tactic according to the threshold value. When the threshold value is the first value, the predetermined high pixel value is provided in the precharge field. So, the over-driving tactic of increasing the responding speed for the liquid crystal molecule is decreasing the compensation pixel value of the present frame period. When the threshold value of the previous frame period is the second value, the predetermined low pixel value is provided in the precharge field. Therefore, the over-driving tactic for increasing the responding speed for the liquid crystal molecule is to increase the compensation pixel value of the present frame period.

Next, the calculation unit **830** saves the compensation pixel value into the frame memory **810**. The frame memory **810** outputs the saved compensation pixel value to the multiplexer **860** and outputs the threshold value to the expand unit **840**.

The expand unit **840** receives the threshold value and outputs a precharge pixel value according to the threshold value. If the threshold value is the first value, the precharge pixel value will be the predetermined high pixel value. Otherwise, it will be the low pixel value. The field controller **850** controls the multiplexer **860** to output the precharge pixel value or the compensation pixel value according to the first synchronization signal Fsync.

The frame memory of the second, third, fourth, and fifth embodiments of the present invention saves the pixels of the

whole frame. The frequency of Vs' signal and the Hs signal should be doubled in displaying of the two pixel values corresponding to the precharge field and the compensation field during one frame period. Therefore, the Vs' signal is two times the frequency of the Vs signal, and the Hs' signal is two times the frequency of the Hs signal. In the second, third, fourth, and fifth embodiments of the present invention, the pixel values of all pixels for the first field are displayed orderly during the period of the Vs' signal, which is  $1/120$  second. Then, the pixel values of all pixels for the second field are displayed orderly during the next period of Vs' signal, which is  $1/120$  second.

Referring to FIG. 10, it shows the block diagram of an LCD driving apparatus according to a sixth embodiment of the present invention. The LCD driving apparatus **900** includes a frame memory **910**, a mathematic unit, and a field controller **950**. The mathematic unit includes a threshold unit **920**, a calculation unit **930**, an expand unit **940**, and a multiplexer **960**. The LCD driving apparatus **900** receives the pixel value D and outputs a driving value, and thereby the source driver **970** outputs the driving voltage Vd.

For example, consider the LCD having the refresh rate of 60 Hz, for which 60 frames are displayed in each second. The pixel value D is inputted into the LCD driving apparatus **900** according to the pixel clock signal Cp. The LCD driving apparatus **900** outputs the driving voltage Vd according to the pixel clock signal Cp', whose frequency is double of the pixel clock signal Cp, because that one frame period is divided into a precharge field and a compensation field.

First, the LCD driving apparatus **900** receives the pixel value D, and delivers the pixel value D to the calculation unit **930** and the threshold unit **920**. The threshold unit **920** compares the received pixel value D with a reference value. If the pixel value D is larger than the reference value, a threshold value outputted from the threshold unit **920** will be the first value and be delivered to the frame memory **910**. Otherwise, it will be the second value. The frame memory **910** outputs the threshold value to the calculation unit **930** and the expand unit **940**.

Then, the calculation unit **930** outputs a compensation driving voltage according to the pixel value D and the threshold value from the frame memory **910**. When threshold value is the second value, the compensation pixel value is determined according to the double of the pixel value D. Otherwise, the compensation pixel value is determined according to the result of double of the pixel value D minus the predetermined high pixel value.

The expand unit **940** receives the threshold value and outputs a precharge pixel value according to the threshold value. If the threshold value is the first value, the precharge pixel value will be the predetermined high pixel value. Otherwise, it will be the predetermined low pixel value. The field controller **950** controls the multiplexer **960** to output the precharge pixel value or the compensation pixel value according to the first synchronization signal Fsync.

In the second, third, fourth, and fifth embodiment of the present invention, the pixels of whole image is saved by the frame memory. However, the threshold value of each pixel, only having one bit, is saved by the frame memory **910** according to the sixth embodiment. Therefore, the sixth embodiment could efficiently decrease the needed memory required by the LCD driving apparatus **900**.

Another scanning method is needed in the sixth embodiment because the pixels of the all image are not saved by the frame memory **910** and each pixel is instantaneously processed for outputting. Referring to FIGS. 11A and 11B, they show the scanning process for the nth frame period according

to the sixth embodiment. For example, consider the compensation field is prior to the precharge field. The frequency for the Hs' signal is the two times the frequency of the Hs signal. The frequency for the Vs' signal is same as the Vs signal.

The bit stream of the pixel values is inputted into the LCD driving apparatus according to the pixel clock signal Cp. The pixel values for one frame are inputted completely in  $\frac{1}{60}$  second, and the pixels for one horizontal line are inputted completely in two cycles of the Hs' signal. In the sixth embodiment, the pixels are instantaneously processed and displayed due to the lacking of memory for saving the pixel values when the pixel values for one horizontal line are received. The frame is divided into an upper part and a lower part, which are respectively corresponding to the horizontal lines 1~300 and the horizontal lines 301~600.

FIG. 11A shows the scanning process while receiving the pixel values for the upper part of the nth frame, wherein the first cycle of the Hs' signal at the very beginning is Hs'(0). The pixel values for each horizontal line are inputted at the each even cycles, such as Hs'(0), Hs'(2), Hs'(4), and so on. At the Hs'(0), the pixel values of the 1st horizontal line are inputted, and the compensation pixel values  $C_1(n)$  for the 1st horizontal line of the nth frame are displayed. The threshold values of each pixel for the first horizontal line are saved in the frame memory.

At the Hs'(1), the pixel values of the 2nd horizontal line for the upper part are not inputted yet, and so that the precharge pixel values  $P301(n-1)$  corresponding to the pixels of the  $(n-1)$ th frame for the 301st line, the 1th horizontal line for the lower part, is displayed. The precharge pixel values  $P301(n-1)$  are decided according to the threshold value saved in the frame memory.

At the Hs'(2), the pixel values of the 2nd horizontal line for the upper part are inputted. The precharge pixel values  $C2(n)$  corresponding to each pixels of the 2nd horizontal line is displayed. The threshold values corresponding to each pixel values for the 2nd horizontal line are saved in the frame memory.

At the Hs'(3), the pixel values of the 3rd horizontal line for the upper part are not inputted yet. The precharge pixel values  $P302(n-1)$  corresponding to the pixels of the  $(n-1)$ th frame for the 302nd horizontal line, the 2nd horizontal line for the lower part, is displayed. The precharge pixel values  $P302(n-1)$  are decided according to the threshold value saved in the frame memory.

The followings are deduced by analogy. Until the Hs'(599), the precharge pixel values corresponding to the  $(n-1)$ th frame for the lower part and the precharge pixel values corresponding to the nth frame for the upper part have been displayed.

FIG. 11B shows the scanning process while receiving the pixel values for the lower part of the nth frame. At the Hs'(600), the pixel values of the 301st horizontal line are inputted, and the compensation pixel values  $C301(n)$  for the 301st horizontal line are displayed. The threshold values of pixels for the 301st horizontal line are saved in the frame memory.

At the Hs'(601), the pixel values of the 302nd horizontal line for the lower part are not inputted yet. The precharge pixel values  $P1(n)$  corresponding to the pixels of the nth frame for the 1st line of the nth frame is displayed. The precharge pixel values  $P1(n)$  are decided according to the threshold value saved in the frame memory.

At the Hs'(602), the pixel values of the 302nd horizontal line are inputted. The precharge pixel values  $C302(n)$  corresponding to pixels of the 302nd horizontal line is displayed. The threshold values corresponding to pixels for the 302nd horizontal line are saved in the frame memory.

At the Hs'(603), the pixel values of the 303rd horizontal line are not inputted yet. The precharge pixel values  $P2(n)$  corresponding to the pixels of the nth frame for the 2nd horizontal line is displayed.

The followings are deduced by analogy. Until the Hs'(1199), the precharge pixel values corresponding to the lower part for the nth frame and the precharge pixel values corresponding to the upper part for the nth frame have been displayed. Therefore, one frame can be completely displayed in one period of Vs signal.

Referring to FIG. 12, it shows the driving voltage of the driving method for an LCD according to a seventh embodiment of the invention. The pixel values D in the frame periods T1, T2, and T3 are supposed to be respectively 30, 200, and 30. The precharge field is prior to the compensation field in this embodiment. The compensation pixel value and the precharge pixel value are further compensated for overdriving. The precharge pixel value is either a first pixel value or a second pixel value, for example 5 and 240 respectively. The compensation pixel value is calculated such that the lightness of the frame period is substantially the same with lightness driven by the pixel value in the conventional method. The average of the compensation pixel value and the precharge pixel value substantially equals to the pixel value in this embodiment.

First, calculate the precharge pixel values and the compensation pixel values of the frame periods by the method of the first embodiment. The pixel value of the frame period T1 is 30, being smaller than the reference value of 128, so the precharge pixel value of the precharge field P1 is the second pixel value, which is 5 in this embodiment. Hence, the compensation pixel value of the compensation field C1 is determined to be 55. The pixel value of the frame period T2 is 200, being larger than the reference value of 128, so the precharge pixel value of the precharge field P2 is the first pixel value, which is 240 in this embodiment. Hence, the compensation pixel value of the compensation field C2 is determined to be 160. The pixel value of the frame period T3 is 30, being smaller than the reference value of 128, so the precharge pixel value of the precharge field P3 is the second pixel value, which is 5 in this embodiment. Hence, the compensation pixel value of the compensation field C3 is determined to be 55.

Then, determine the overdrive compensation value. The pixel value of frame period T2 is 200, being larger than that of the previous frame period T1, so the precharge pixel value of the precharge field P2 is added an overdrive compensation value  $\Delta 1$  and the compensation pixel value of the compensation field C2 is added an overdrive compensation value  $\Delta 2$  for increasing the response speed of the liquid crystal molecules.

The overdrive compensation values  $\Delta 1$  and  $\Delta 2$  are respectively 10 and 2 for example.

The overdrive compensation values can be determined according to the pixel value of the current frame period and that of the previous frame period. A table can be established according to the characteristics of the LCD in order to look for the best overdrive compensation values.

In this embodiment, both the precharge pixel value and the compensation pixel value are overdrivingly compensated, or only one of them is overdrivingly compensated. In addition, the overdrive compensation values can be determined according to the pixel values of previous frame periods, previous precharge fields, or previous compensation fields.

Besides, the sequence of the precharge field and the compensation field can be dynamically swapped according to the pixel values of each fields, for example.

Referring to FIG. 13, it shows the block diagram of an LCD driving apparatus according to an eighth embodiment of the

present invention. The driving apparatus **1000** includes a frame memory **1010**, a mathematic unit, and a field controller **1050**. The mathematic unit includes a overdrive compensation unit **1020**, a temperature sensor **1023**, a calculation and expand unit **1030**, and a multiplexer **1060**. The LCD driving apparatus **1000** receives a pixel value D and outputs driving value Dv, which is either the precharge pixel value or the compensation pixel value. Then, the source driver **1070** thereby outputs driving voltage Vd to drive the LCD.

The LCD driving apparatus **1000** receives the pixel value D, saves the pixel value D in the frame memory **1010**. Then, the calculation and expand unit **1030** outputs a compensation pixel value and a precharge pixel value according to the pixel value D and the overdrive compensation value from the overdrive compensation unit **1020**. The precharge pixel value and the compensation pixel value are saved to the frame memory **1010** to be used later by the overdrive compensation unit **1020** and by the calculation and expand unit **1030** to output to the multiplexer **1060**. The overdrive compensation unit **1020** outputs the overdrive compensation value according to the pixel value D, the precharge pixel value, the compensation pixel value, or the temperature value outputted by the temperature sensor **1023**. The temperature sensor **1023** is not the necessary element in this embodiment, but can enhance the performance of the overdrive compensation unit **1020**.

The field controller **1050** controls the multiplexer **1060** to output the precharge pixel value or the compensation pixel value according to the second synchronization signal derived from the first synchronization signal Fsync.

Referring to FIG. 14, it shows the block diagram of an LCD driving apparatus according to a ninth embodiment of the present invention. The driving apparatus **1100** includes a frame memory **1110**, a mathematic unit, and a field controller **1150**. The mathematic unit includes a overdrive compensation unit **1122**, a calculation and expand unit **1130**, and a multiplexer **1160**. The LCD driving apparatus **1100** receives a pixel value D and outputs driving value Dv, which is either the precharge pixel value or the compensation pixel value. Then, the source driver **1170** thereby outputs driving voltage Vd to drive the LCD.

The LCD driving apparatus **1100** receives the pixel value D, saves the pixel value D in the frame memory **1110**. Then, the calculation and expand unit **1130** outputs a compensation pixel value and a precharge pixel value according to the pixel value D and the overdrive compensation value from the overdrive compensation unit **1122**. The precharge pixel value and the compensation pixel value are saved to the frame memory **1110** to be used later by the overdrive compensation unit **1122** and by the calculation and expand unit **1130** to output to the multiplexer **1160**. The field controller **1150** controls the multiplexer **1160** to output the precharge pixel value or the compensation pixel value according to the second synchronization signal derived from the first synchronization signal Fsync.

Referring to FIG. 15, it shows the block diagram of an LCD driving apparatus according to a tenth embodiment of the present invention. The driving apparatus **1200** includes a frame memory **1210**, a mathematic unit, and a field controller **1250**. The mathematic unit includes a overdrive compensation unit **1220**, a calculation and expand unit **1230**, and a multiplexer **1260**. The LCD driving apparatus **1200** receives a pixel value D and outputs driving value Dv, which is either the precharge pixel value or the compensation pixel value. Then, the source driver **1270** thereby outputs driving voltage Vd to drive the LCD.

The LCD driving apparatus **1200** receives the pixel value D, saves the pixel value D in the frame memory **1210**. Then,

the calculation and expand unit **1230** outputs a compensation pixel value and a precharge pixel value according to the pixel value D and the overdrive compensation value from the overdrive compensation unit **1220**. The field controller **1250** controls the multiplexer **1260** to output the precharge pixel value or the compensation pixel value according to the second synchronization signal derived from the first synchronization signal Fsync.

Referring to FIG. 16A, it shows the block diagram of an LCD driving apparatus according to an eleventh embodiment of the present invention. The driving apparatus **1300** includes a frame memory **1310**, a mathematic unit, and a field controller **1350**. The mathematic unit includes a look up unit **1302** and a multiplexer **1360**. The LCD driving apparatus **1300** receives a pixel value D and outputs driving value Dv, which is either the precharge pixel value or the compensation pixel value. Then, the source driver **1370** thereby outputs driving voltage Vd to drive the LCD. The pixel value D can be saved in the frame memory **1310** to be used by the look up unit **1302** later.

FIG. 16B shows the table used by the look up unit. The look up unit **1302** finds the corresponding precharge pixel value and compensation value in this table according to the pixel value. When the pixel value is four (4), for example, the precharge pixel value and the compensation pixel value are looked up to be 0 and 9 respectively such that the lightness of the frame period equals to the lightness if driven by the pixel value. The input and the output lightness of an LCD are not necessarily linear, and the content of the table can be adjusted according to the characteristics of the LCD.

Several driving methods using different sequence of a precharge field and a compensation field, which are decided according to the pixel value of each field, are described as follows.

According to one embodiment of the present invention, the LCD drives a pixel according to N pixel values corresponding to N frame periods, where N is a nonzero integer. For example, the N pixel values include an i-th pixel value, and the N frame periods include an i-th frame period, where i is an integer not greater than N. The i-th frame period is divided into a precharge field and a compensation field. The driving method according to the embodiment of the present invention includes the following steps. First, an i-th precharge pixel value is determined to be either a predetermined first pixel value or a predetermined second pixel value as a result of comparing with the i-th pixel value. Then, an i-th compensation pixel value is determined so that the overall grey level corresponding to the i-th pixel value is substantially the same as the average of the grey level corresponding to the i-th precharge pixel value and that corresponding to the i-th compensation pixel value. After that, the pixel is driven according to the i-th precharge pixel value during the precharge field and according to the i-th compensation pixel value during the compensation field. Specifically, the driving step includes: determining an i-th precharge driving voltage corresponding to the i-th precharge pixel value; determining an i-th compensation driving voltage according to the i-th compensation pixel value; driving the pixel according to the i-th precharge driving voltage during the precharge field; and driving the pixel according to the i-th compensation driving voltage during the compensation field.

At the driving step, the lightness of the pixel driven according to the i-th precharge pixel value and i-th the compensation pixel value is substantially the same as the lightness of the pixel if driven according to the i-th pixel value. According to one embodiment of the present invention, the precharge field comes before the compensation field when the i-th precharge

## 15

pixel value is larger than the i-th compensation pixel value, and the compensation field comes before the precharge field when the i-th compensation pixel value is larger than the i-th precharge pixel value.

For example, as shown in FIG. 17, the compensation field C1 comes before the precharge field P1 when the compensation pixel value (60) of the compensation field C1 is larger than the precharge pixel value (0) of the precharge field P1. The precharge field P2 comes before the compensation field C2 when the precharge pixel value (255) of the precharge field P2 is larger than the compensation pixel value (145) of the compensation field C2.

In this example, the larger one of the precharge pixel value and the compensation pixel value in one frame period is displayed earlier. Therefore, the average voltage difference between two adjacent fields is larger, which further accelerate the average response speed of liquid crystal molecules. Besides, the displaying way using the driving method as shown in FIG. 17 is more similar to the impulse type displaying way, and therefore the quality of dynamic images is further improved.

Another example of sequence of the precharge field P and the compensation field C is shown in FIG. 18. As compared with the method illustrated in FIG. 17, the precharge field comes before the compensation field when the i-th precharge pixel value is smaller than the i-th compensation pixel value, and the compensation field comes before the precharge field when the i-th compensation pixel value is smaller than the i-th precharge pixel value.

For example, as shown in FIG. 18, the precharge field P1 comes before the compensation field C1 when the precharge pixel value zero (0) of the precharge field P1 is smaller than the compensation pixel value (60) of the compensation field C1. The compensation field C2 comes before the precharge field P2 when the compensation pixel value (145) of the compensation field C2 is smaller than the precharge pixel value (255) of the precharge field P2. The method as shown in FIG. 18 has the same advantage as the method shown in FIG. 17.

While the invention has been described by way of example and in terms of the preferred embodiments, it is to be understood that the invention is not limited to the disclosed embodiments. Rather, it is intended to cover various modifications and similar arrangements and procedures, and the scope of the appended claims therefore should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements and procedures.

What is claimed is:

1. A method for driving a liquid crystal display (LCD), the LCD being adapted to receive a pixel value and to drive a pixel of the LCD according to the pixel value during a frame period, the frame period being divided into a precharge field and a compensation field, the method comprising:

## 16

deciding a precharge pixel value to be either a predetermined first pixel value or a predetermined second pixel value according to the pixel value;

deciding a compensation pixel value; and

driving the pixel according to the precharge value and the compensation pixel value, comprising:

determining a precharge driving voltage corresponding

to the precharge pixel value;

determining a compensation driving voltage corre-

sponding to the compensation pixel value;

driving the pixel according to the precharge driving volt-

age during the precharge field; and

driving the pixel according to the compensation driving

voltage during the compensation field;

wherein at the driving step, the lightness of the pixel driven according to the precharge pixel value and the compensation pixel value is substantially the same as the lightness of the pixel if driven according to the pixel value; wherein the precharge field comes before the compensation field when the precharge pixel value is larger than the compensation pixel value, and the compensation field comes before the precharge field when the compensation pixel value is larger than the precharge pixel value.

2. A method for driving a liquid crystal display (LCD), the LCD being adapted to receive a pixel value and to drive a pixel of the LCD according to the pixel value during a frame period, the frame period being divided into a precharge field and a compensation field, the method comprising:

deciding a precharge pixel value to be either a predeter-  
mined first pixel value or a predetermined second pixel  
value according to the pixel value;

deciding a compensation pixel value; and

driving the pixel according to the precharge value and the  
compensation pixel value, comprising:

determining a precharge driving voltage corresponding  
to the precharge pixel value;

determining a compensation driving voltage corre-

sponding to the compensation pixel value;

driving the pixel according to the precharge driving volt-

age during the precharge field; and

driving the pixel according to the compensation driving  
voltage during the compensation field;

wherein at the driving step, the lightness of the pixel driven according to the precharge pixel value and the compensation pixel value is substantially the same as the lightness of the pixel if driven according to the pixel value; wherein the precharge field comes before the compensation field when the precharge pixel value is smaller than the compensation pixel value, and the compensation field comes before the precharge field when the compensation pixel value is smaller than the precharge pixel value.

\* \* \* \* \*

专利名称(译)	液晶显示器驱动装置及其方法		
公开(公告)号	<a href="#">US7742030</a>	公开(公告)日	2010-06-22
申请号	US11/525085	申请日	2006-09-22
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电.		
当前申请(专利权)人(译)	友达光电.		
[标]发明人	TSAI CHUNG KUANG LYU LI RU		
发明人	TSAI, CHUNG-KUANG LYU, LI-RU		
IPC分类号	G09G3/36 G02F1/133 G09G3/20 H04N5/66		
CPC分类号	G09G3/3611 G09G3/3648 G09G3/3696 G09G3/2025 G09G2310/0251 G09G2320/0257 G09G2320/041 G09G2340/16 G09G2320/0252		
优先权	092113907 2003-05-22 TW 093111798 2004-04-27 TW		
其他公开文献	US20070013630A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

### 摘要(译)

根据预充电像素值和补偿像素值驱动LCD的像素，所述预充电像素值和补偿像素值均分别在预充电场和补偿场期间从像素值生成。然后确定对应于预充电像素值的预充电驱动电压，以及对应于补偿像素值的补偿驱动电压，并用于驱动像素。如果根据像素值驱动，则根据预充电像素值和补偿像素值驱动的像素的亮度与像素的亮度基本相同。当预充电像素值大于补偿像素值时，预充电场到达补偿场之前，并且当补偿像素值大于预充电像素值时，补偿场到达预充电场之前。

