



US 20040196227A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0196227 A1**
Lee (43) **Pub. Date: Oct. 7, 2004**(54) **LIQUID CRYSTAL DISPLAY****Publication Classification**(76) **Inventor: Sung-Ho Lee, Hwaseong-kun (KR)**(51) **Int. Cl.⁷ G09G 3/36**(52) **U.S. Cl. 345/87**

Correspondence Address:

K. Jenny Sung**Patent Department****GRAY CARY WARE & FREIDENRICH LLP****2000 University Avenue****East Palo Alto, CA 94303 (US)**

(57)

ABSTRACT

A liquid crystal display includes: a plurality of pixels; a data driver including a memory and a register and supplying data signals to the pixels; and a signal controller supplying a control signal for controlling the data driver to the data driver, wherein the register includes a bit storing a data for determining a frequency of the control signal. The data driver operates in synchronization with the frequency of the control signal. The control signal includes a data enable signal.

(21) **Appl. No.: 10/751,171**(22) **Filed: Dec. 30, 2003**(30) **Foreign Application Priority Data**

Dec. 31, 2002 (KR) 2002-88086


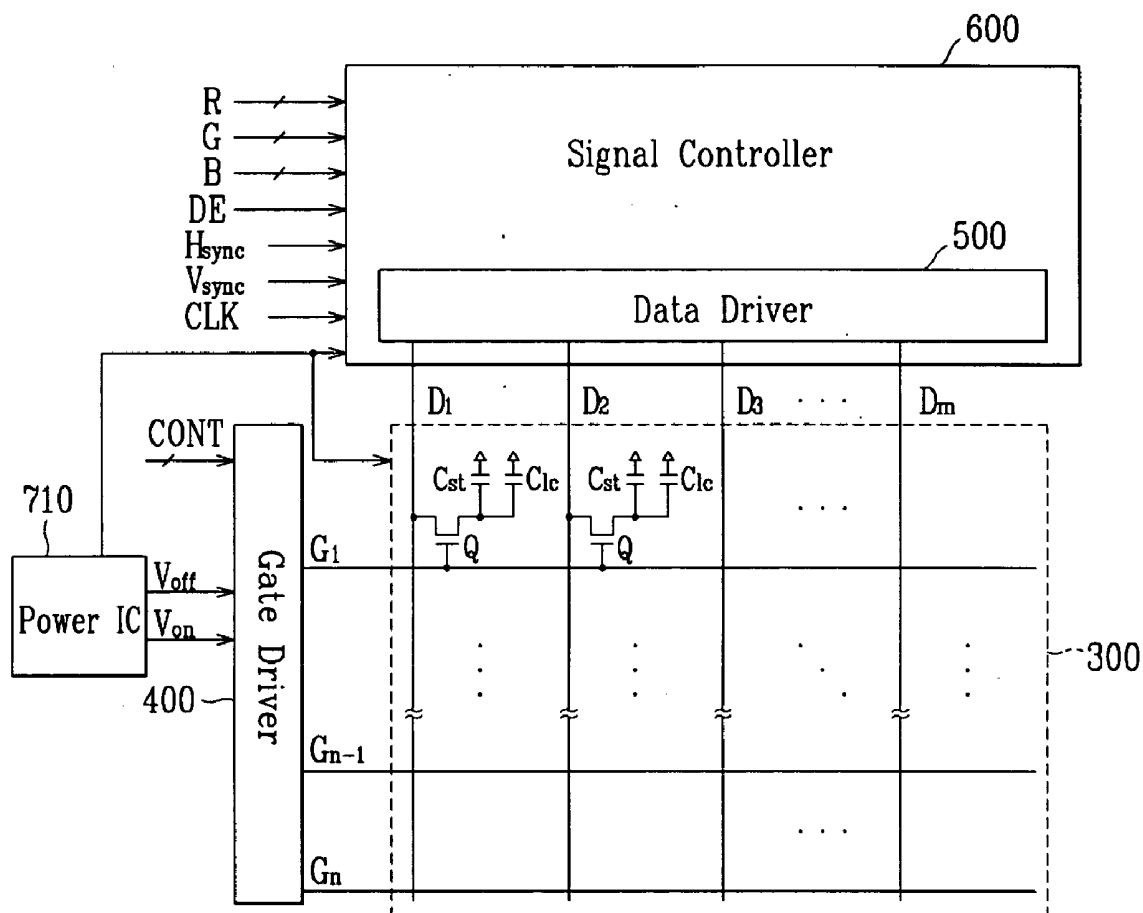


FIG. 1

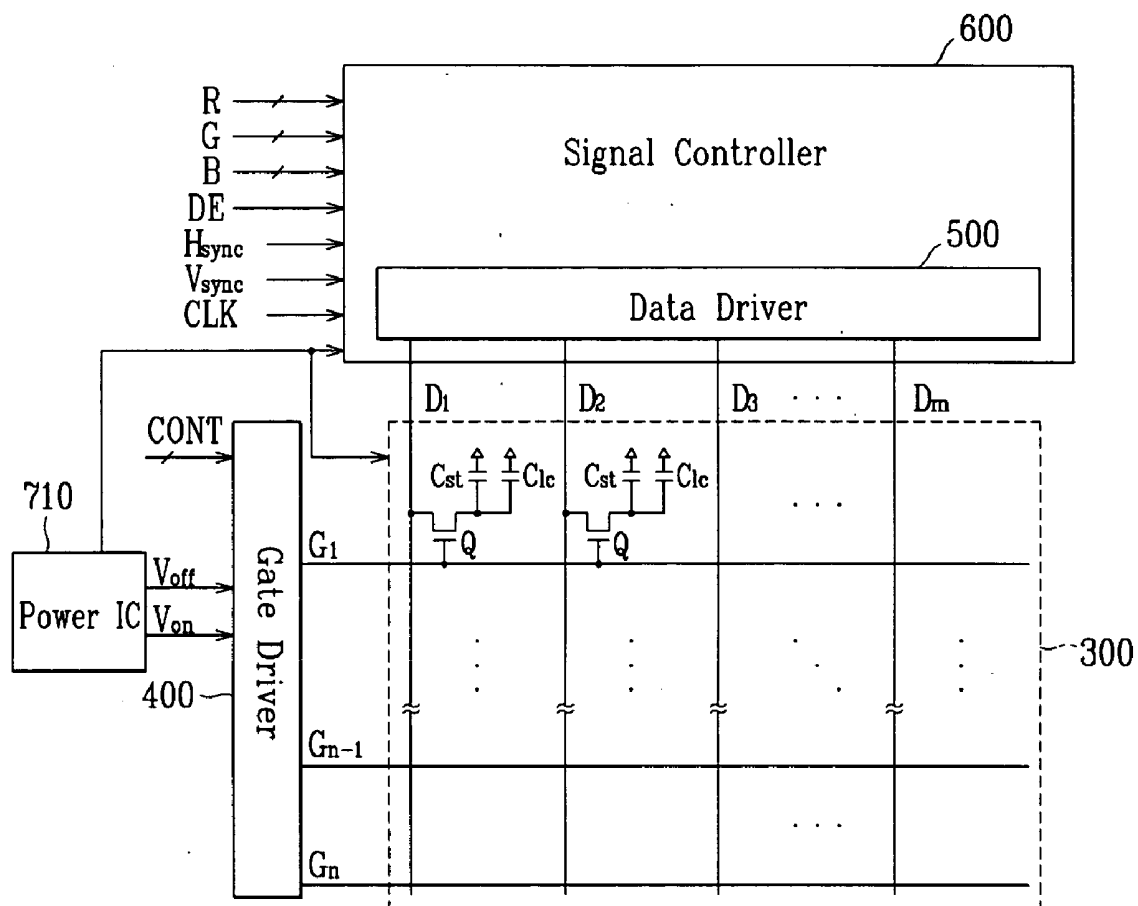

LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

[0001] (a) Field of the Invention

[0002] The present invention relates to a liquid crystal display, and in particular, to an RGB interface type liquid crystal display.

[0003] (b) Description of the Related Art

[0004] A typical liquid crystal display (LCD) includes an upper panel provided with a common electrode and a plurality of color filters and a lower panel provided with a plurality of thin film transistors (TFTs) and a plurality of pixel electrodes. Alignment layers are coated on inner surfaces of the upper and the lower panels, and a liquid crystal layer is filled in a gap between the alignment layers. The pixel electrodes and the common electrode are supplied with voltages, and the voltage difference between the two electrodes generates an electric field. When the strength and/or the direction of the electric field is changed, orientations of liquid crystal molecules in the liquid crystal layer is changed according thereto and the transmittance of light passing through the liquid crystal layer. Accordingly, desired images are obtained by controlling the voltage difference between the pixel electrodes and the common electrode.

[0005] In the meantime, small and medium LCDs are driven in two types, roughly. One is an RGB interface type and the other is a CPU interface type. The former separately inputs image data and control signals for chip driving, while the latter sequentially inputs the image data and the chip driving control signals.

[0006] A small LCD used for a mobile phone, etc., roughly includes a phone and a panel assembly.

[0007] The panel assembly corresponds to a display unit like a typical LCD, and the phone supplies various control signals for controlling the panel assembly.

[0008] An LCD employing RGB interface such as a mobile phone requires extremely low power consumption. Most of the power consumption depends on the speed or the frequency of a data enable signal.

[0009] The data enable signal indicates the existence of data by using its signal levels. For example, a high section of the data enable signal indicates the existence of data and a low section indicates the absence of data.

[0010] Generally, a small device such as a mobile phone transmits image data with a frequency of about 60 Hz. In the meantime, a data driver operates in synchronization with the frequency of the data enable signal. In detail, a memory incorporated in the data driver determines the writing of the data based on the levels of the data enable signal, and, for example, the data are written into the memory during the high section of the data enable signal. After the data are written in the memory, they are transmitted to the panel assembly to form images.

[0011] Meanwhile, since most of the image data for the mobile phone, etc., represent still images, the data stored in the memory can be repeatedly used. Accordingly, repeated writing of the same data is meaningless and causes the continuous operation of the data driver, thereby causing power consumption.

SUMMARY OF THE INVENTION

[0012] Accordingly, a motivation of the present invention is to provide a liquid crystal display for selecting operating frequencies based on a predetermined reference signal, thereby minimizing power consumption. Although an embodiment of the present invention selects a data enable signal as the reference signal, the reference signal may not be limited to the data enable signal.

[0013] A flat panel display according to an embodiment of the present invention includes: a plurality of pixels; a data driver including a memory and a register and supplying data signals to the pixels; and a signal controller supplying a control signal for controlling the data driver to the data driver, wherein the register includes a bit storing a data for determining a frequency of the control signal.

[0014] Preferably, the data driver operates in synchronization with the frequency of the control signal.

[0015] The control signal preferably includes a data enable signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The present invention will become more apparent by describing embodiments thereof in detail with reference to the accompanying drawings in which:

[0017] **FIG. 1** is a block diagram of an LCD according to an embodiment of the present invention;

[0018] **FIG. 2** is an equivalent circuit diagram of a pixel of an LCD according to an embodiment of the present invention; and

[0019] **FIG. 3** is an exemplary register according to an embodiment of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

[0020] The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. The present invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

[0021] In the drawings, the thickness of layers, films and regions are exaggerated for clarity. Like numerals refer to like elements throughout. It will be understood that when an element such as a layer, film, region or substrate is referred to as being "on" another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present.

[0022] Now, liquid crystal displays according to embodiments of the present invention will be described with reference to the accompanying drawings.

[0023] **FIG. 1** is a block diagram of an LCD according to an embodiment of the present invention, and **FIG. 2** is an equivalent circuit diagram of a pixel of an LCD according to an embodiment of the present invention.

[0024] Referring to **FIG. 1**, an LCD according to an embodiment of the present invention includes a liquid crystal panel assembly **300**, a gate driver **400** and a signal

controller **600** connected to the panel assembly **300**, and a power IC (integrate circuit) **700** supplying voltages thereto.

[0025] In circuitual view, the liquid crystal panel assembly **300** includes a plurality of display signal lines G_1 - G_n and D_1 - D_m , and a plurality of pixels connected thereto and arranged in a matrix.

[0026] The display signal lines G_1 - G_n and D_1 - D_m includes a plurality of gate lines G_1 - G_n transmitting gate signals (also called "scanning signals") and a plurality of data lines D_1 - D_m transmitting data signals. The gate lines G_1 - G_m extend substantially in a row direction and are substantially parallel to each other. The data lines D_1 - D_m extend substantially in a column direction and are substantially parallel to each other.

[0027] Each pixel includes a switching element Q connected to the display signal lines G_1 - G_n and D_1 - D_m , and a liquid crystal capacitor C_{lc} and a storage capacitor C_{st} connected thereto. The storage capacitor C_{st} may be omitted if it is not required.

[0028] The switching element Q is provided on a lower panel **100** and has three terminals: a control terminal connected to a gate line G_1 - G_n ; an input terminal connected to a data line D_1 - D_m ; and an output terminal connected to the liquid crystal capacitor C_{lc} and the storage capacitor C_{st} .

[0029] The liquid crystal capacitor C_{lc} includes two terminals formed by a pixel electrode **190** of the lower panel **100** and a common electrode **270** of an upper panel **200**, and it also includes a liquid crystal layer interposed between the two electrodes **190** and **270** serving as a dielectric. The pixel electrode **190** is connected to the switching element Q , and the common electrode **270** is supplied with a common voltage V_{com} . Unlike FIG. 2, the common electrode **270** may be provided on the lower panel **100** and in this case, the two electrodes **190** and **270** may be linear or may have bar shapes.

[0030] The storage capacitor C_{st} is formed by overlap of the pixel electrode **190** and a separate wire (not shown) provided on the lower panel **100**, which is supplied with a predetermined voltage such as the common electrode V_{com} . Otherwise, the storage capacitor C_{st} is formed by overlap of the pixel electrode **190** and a previous gate line with interposing an insulator.

[0031] For realizing color display, each pixel represents a color by providing red, green, or blue color filter **230** in an area corresponding to the pixel electrode **190**. Although FIG. 2 shows a color filter **230** is provided on a corresponding area of the upper panel **200**, the color filters **230** may be provided on or under the pixel electrodes **190** on the lower panel **100**.

[0032] Liquid crystal molecules changes their orientations depending on the variation of the electric field generated by the pixel electrode **190** and the common electrode **270** and thus polarization of light passing through the liquid crystal layer **3** is altered. The alteration of the light polarization is converted into the alteration of the light transmittance by a (pair of) polarizer attached to the panels **100** and **200**.

[0033] The power IC **700** generates a gate-on voltage V_{on} and a gate-off voltage V_{off} for turning on and off the switching elements Q on the panel assembly **300**, and the

common electrode V_{com} applied to the liquid crystal capacitor C_{lc} the panel assembly **300**.

[0034] The gate driver **400** is connected to the gate lines G_1 - G_n of the liquid crystal panel assembly **300** and applies the gate signals formed of a combination of the power the gate-on voltage V_{on} and the gate-off voltage V_{off} from IC **700** to the gate lines G_1 - G_n . The signal controller **600** generates control signals for controlling the gate driver **400** and supplies the control signals to the gate driver **400**. The signal controller **600** includes a data driver **500** connected to the data lines D_1 - D_m of the panel assembly **300**, and the data driver **500** converts image data R, G and B from an external device into analog voltages and applies the analog voltages to the data lines D_1 - D_m .

[0035] Now, the display operation of the LCD is described in detail.

[0036] The signal controller **600** receives, from a graphics controller such as a mobile phone (not shown), RGB the image signals R, G and B and input control signals for display of the image signals R, G and B. The input control signals include a vertical synchronization signal V_{sync} , a horizontal synchronization signal H_{sync} , a main clock MCLK, and a data enable signal DE. Based on the input control signals, the signal controller **600** generates gate control signals CONT to be provided for the gate driver **400** and processes the image signals R, G and B to be suitable for the liquid crystal panel assembly **300**.

[0037] The gate control signals CONT include a vertical synchronization signal STV for instructing to output gate-on pulses (gate-on voltage sections of the gate signal), a gate clock CPV for controlling the timing of the gate-on pulses, and an output enable signal OE for defining widths of the gate-on pulses.

[0038] The power IC **700** generates the gate-on voltage V_{on} and the gate-off voltage V_{off} to be supplied to the gate driver **400** and it also generates the common voltage V_{com} to be supplied for the panel assembly **300** and the signal controller **600**.

[0039] The data driver **500** of the signal controller **600** analog-converts the processed image data.

[0040] The gate driver **400** applies the gate-on voltage V_{on} to the gate lines G_1 - G_n to turn on the switching elements Q connected thereto in response to the gate control signals CONT from the signal controller **600**.

[0041] During the application of the gate-on voltage V_{on} to one of the gate lines G_1 - G_n and during the on state of a row of the switching elements Q connected thereto, the data driver **500** applies the analog-converted image data to the data lines D_1 - D_m as the data signals. Then, the data voltages applied to the data lines D_1 - D_m are supplied to the pixels through the activated switching elements Q .

[0042] Now, the operation of the data driver **500** is described in detail.

[0043] The data driver **500** includes a memory (not shown) and a register (shown in FIG. 3). The data driver **500** determines the writing of the data based on the existence of the data enable signal DE, writing the data into the memory in existence of the data enable signal DE, and transmits the data to the panel assembly **300** for image display. The

register is provided for selecting operating frequencies of the data enable signal DE, which is described in detail herein-after.

[0044] FIG. 3 is an exemplary register according to an embodiment of the present invention.

[0045] The register 550 is incorporated into the data driver 500 and includes 16 bits formed of upper 8 bits and lower 8 bits. The lower bits of register 550 according to this embodiment include bits DE0 and DE1 for controlling the data enable signal DE. Remaining bits are empty for product upgrade, which are not shown.

[0046] Control bits are pre-programmed and the data enable signal DE has operation modes depending on the established bit number. For example, if n bits are set, 2^n operation modes are generated.

[0047] For example, when all the image data represent motion images, the operation frequency is set to be 60 Hz. On the contrary, the operation frequency is set to be 1 Hz for still images. In addition, if the image data represent both the motion image and the still image, the programming is made to control the operation frequency depending on the ratio of the motion image and the still image.

[0048] The figure illustrates an exemplary register including two bits. The two bits enables for the data enable signal DE to operate in four modes. For example, when the values of the two bits are "00," "01," "10," and "11," the operation frequency is set to 60 Hz, 40 Hz, 20 Hz, and 1 Hz, respectively. The operation frequencies of the data enable signal DE can be obtained by a well-known frequency divider.

[0049] In this way, the panel assembly selectively receives the data enable signal DE such that the speed of the data storage into the memory is controlled to reduce the power consumption.

[0050] It is apparent that 3-bit control bits enables to operate in eight modes, and the locations of the control bits are varied.

[0051] It is obvious that the register can have various bit number although the figure shows the 16 bit register.

[0052] When operating in these modes, the frequency of the data enable signal DE is set to be only 1 Hz, if the still images are continuously required, even though the phone supplies 60 Hz frequency. The memory of the data driver also operates in a frequency of 1 Hz in association therewith. Accordingly, unnecessary power consumption is prevented.

[0053] While the present invention has been described in detail with reference to the preferred embodiments, those skilled in the art will appreciate that various modifications and substitutions can be made thereto without departing from the spirit and scope of the present invention as set forth in the appended claims.

[0054] For example, if it is used in an RGB interface type for preventing power consumption, it is also applicable to any flat panel display such as an organic electroluminescence display.

[0055] As described above, the power consumption is minimized by setting the frequency modes of the data enable signal DE, which largely contributes to the power consumption, depending on the types of images.

What is claimed is:

1. A liquid crystal display comprising:

a plurality of pixels:

a data driver including a memory and a register and supplying data signals to the pixels; and

a signal controller supplying a control signal for controlling the data driver to the data driver,

wherein the register includes a bit storing a data for determining a frequency of the control signal.

2. The liquid crystal display of claim 1, wherein the data driver operates in synchronization with the frequency of the control signal.

3. The liquid crystal display of claim 1, wherein the control signal includes a data enable signal.

* * * * *

专利名称(译)	液晶显示器		
公开(公告)号	US20040196227A1	公开(公告)日	2004-10-07
申请号	US10/751171	申请日	2003-12-30
[标]申请(专利权)人(译)	李成HO		
申请(专利权)人(译)	李成HO		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE SUNG HO		
发明人	LEE, SUNG-HO		
IPC分类号	G02F1/133 G09G3/36		
CPC分类号	G09G3/3648 G09G2310/0275		
优先权	1020020088086 2002-12-31 KR		
其他公开文献	US7151519		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示器包括：多个像素：数据驱动器，包括存储器和寄存器，并向像素提供数据信号；信号控制器，将用于控制数据驱动器的控制信号提供给数据驱动器，其中，寄存器包括存储用于确定控制信号的频率的数据的位。数据驱动器与控制信号的频率同步地操作。控制信号包括数据使能信号。

