

(19)



(11)

EP 2 657 754 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

05.10.2016 Bulletin 2016/40

(51) Int Cl.:

G02F 1/1335 (2006.01)	C09K 19/12 (2006.01)
C09K 19/14 (2006.01)	C09K 19/20 (2006.01)
C09K 19/30 (2006.01)	C09K 19/32 (2006.01)
C09K 19/34 (2006.01)	C09K 19/38 (2006.01)
G02B 5/20 (2006.01)	G02F 1/13 (2006.01)
C09K 19/42 (2006.01)	C09K 19/44 (2006.01)

(21) Application number: **12860188.7**

(22) Date of filing: **14.12.2012**

(86) International application number:

PCT/JP2012/082521

(87) International publication number:

WO 2013/094537 (27.06.2013 Gazette 2013/26)

(54) **LIQUID CRYSTAL DISPLAY DEVICE**

FLÜSSIGKRISTALLANZEIGEVORRICHTUNG

DISPOSITIF D’AFFICHAGE À CRISTAUX LIQUIDES

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **19.12.2011 JP 2011277090**

(43) Date of publication of application:

30.10.2013 Bulletin 2013/44

(73) Proprietor: **DIC Corporation**

Tokyo 174-8520 (JP)

(72) Inventors:

- **KANEOYA, Masakazu**
Kitaadachi-gun, Saitama 362-8577 (JP)

- **TAKEUCHI, Kiyofumi**
Kitaadachi-gun, Saitama 362-8577 (JP)
- **FUNAKURA, Seiji**
Kamisu-shi, Ibaraki 314-0193 (JP)
- **SHIMADA, Katsunori**
Sakura-shi, Chiba 285-8668 (JP)

(74) Representative: **Adam, Holger et al**

Kraus & Weisert
Patentanwälte PartGmbB
Thomas-Wimmer-Ring 15
80539 München (DE)

(56) References cited:

WO-A1-2011/092973	JP-A- 2000 192 040
JP-A- 2005 281 559	JP-A- 2006 317 602
JP-A- 2010 189 560	JP-A- 2011 141 356

EP 2 657 754 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

5 **[0001]** The present invention relates to a liquid crystal display device.

Background Art

10 **[0002]** Liquid crystal display devices have been used for watches and electronic calculators, various household electric appliances, measuring apparatuses, automotive panels, word processors, electronic notebooks, printers, computers, televisions, etc. Typical examples of a liquid crystal display mode include a TN (twisted nematic) mode, a STN (super twisted nematic) mode, a DS (dynamic light scattering) mode, a GH (guest-host) mode, an IPS (in-plane switching) mode, an OCB (optically compensated birefringence) mode, an ECB (electrically controlled birefringence) mode, a VA (vertical alignment) mode, a CSH (color super-homeotropic) mode and a FLC (ferroelectric liquid crystal). Also, multiplex driving is popularized as a driving method instead of usual static driving, and a simple matrix method and a recent active matrix (AM) method of driving by TFT (thin-film transistor), TFD (thin-film diode), or the like become the mainstream.

15 **[0003]** As shown in Fig. 1, a general color liquid crystal display device includes two substrates (1) each having an alignment film (4), a transparent electrode layer (3a) serving as a common electrode and a color filter layer (2) which are disposed between one of the alignment films and the substrate, and a pixel electrode layer (3b) disposed between the other alignment film and the substrate, the substrates are arranged so that the alignment films thereof face each other, and a liquid crystal layer (5) is held between the substrates.

20 **[0004]** The color filter layer is composed of a black matrix and a color filter including a red color layer (R), a green color layer (G), a blue color layer (B), and, if required, a yellow color layer (Y).

25 **[0005]** Liquid crystal materials constituting liquid crystal layers have undergone a high level of impurity control because impurities remaining in the materials significantly affect electric characteristics of display devices. In addition, with respect to materials constituting alignment films, it has already been known that an alignment film is in direct contact with a liquid crystal layer, and impurities remaining in the alignment film are moved to the liquid crystal layer and affect the electric characteristics of the liquid crystal layer, and thus characteristics of a liquid crystal display device due to impurities in an alignment film material have been being investigated.

30 **[0006]** On the other hand, with respect to materials such as organic pigments used in the color filter layers, like the alignment film materials, it is supposed that impurities contained affect the liquid crystal layers. However, an alignment film and a transparent electrode are interposed between the color filter layer and the liquid crystal layer, and thus it has been considered that the direct influence on the liquid crystal layer is greatly smaller than that of the alignment film material. However, the alignment film generally has a thickness of as small as 0.1 μm or less, and the transparent electrode, for example, even a common electrode used on the color filter layer side and having a thickness increased for enhancing conductivity, generally has a thickness of 0.5 μm or less. Therefore, the color filter layer and the liquid crystal layer are not put in a completely isolated environment, and the color filter layer has the possibility of developing display defects such as white spots, alignment unevenness and/or image sticking due to a decrease in voltage holding ratio (VHR) of

35 the liquid crystal layer and an increase in ion density (ID) which are caused by impurities contained in the color filter layer through the alignment film and the transparent electrode.

40 **[0007]** As a method for resolving the display defects due to impurities contained in pigments which constitute a color filter, there have been studied a method of controlling elusion of impurities into a liquid crystal by using a pigment in which a ratio of an extract with ethyl formate is decreased to a specified value or less (JP 2000-19321 A), and a method of controlling elusion of impurities into a liquid crystal by specifying a pigment in a blue color layer (JP 2009-109542 A). However, these methods are not much different from a method of simply decreasing impurities in a pigment, and are thus unsatisfactory for improvement for resolving the display defects even in the present situation in which a pigment purifying technique has recently been advanced.

45 **[0008]** On the other hand, with attention paid to a relation between organic impurities contained in a color filter and a liquid crystal composition, there are disclosed a method of specifying a hydrophobic parameter of liquid crystal molecules contained in a liquid crystal layer to be equal to or higher than a predetermined value, the hydrophobic parameter representing insolubility of the organic impurities in the liquid crystal layer, and a method of preparing a liquid crystal composition containing a predetermined ratio or more of a liquid crystal compound having $-\text{OCF}_3$ groups at the ends of liquid crystal molecules because the $-\text{OCF}_3$ groups at the ends of liquid crystal molecules have a correlation to the hydrophobic parameter (JP 2000-192040 A).

50 **[0009]** However, these cited documents each disclose an invention based on the principle that the influence of impurities in a pigment on a liquid crystal layer is suppressed and disclose no research on a direct relation between a structure of a liquid crystal material and a structure of a colorant such as a dye/pigment or the like used in a color filter, not leading

to the resolution of the problem of display defects in advanced liquid crystal display devices.

[0010] Among further prior art, WO 2011/092973 A1 discloses a liquid crystal composition containing a polymerizable compound. Moreover, JP 2005-281559 A discloses a liquid crystal composition having negative dielectrical anisotropy and a liquid crystal display element.

5

Summary of Invention

Technical Problem

[0011] The present invention is aimed at providing a liquid crystal display device including a specified liquid crystal composition and a color filter using a specified dye and/or pigment in order to prevent a decrease in voltage holding ratio (VHR) of a liquid crystal layer and an increase in ion density (ID), thereby resolving the problems of display defects such as white spots, alignment unevenness and/or image sticking.

15 Solution to Problem


[0012] In order to solve the above-described problems, the inventors intensively studied combinations of colorants such as a dye/pigment which constitute a color filter and structures of liquid crystal materials constituting a liquid crystal layer. As a result it was found that a liquid crystal display device using a specified-structure liquid crystal composition and a color filter containing a specified-structure dye and/or pigment prevents a decrease in voltage holding ratio (VHR) of a liquid crystal layer and an increase in ion density (ID), thereby resolving the problems of display defects such as white spots, alignment unevenness and/or image sticking. This led to the achievement of the present invention.

20


[0013] That is, the present invention provides a liquid crystal display device including a first substrate, a second substrate, a liquid crystal composition layer held between the first substrate and the second substrate, a color filter including a black matrix and at least RGB three-color pixel portions, a pixel electrode, and a common electrode, the liquid crystal composition layer including a liquid crystal composition which contains at least one compound selected from a compound group represented by general formula (LC1) to general formula (LC4),

25


30




35



40

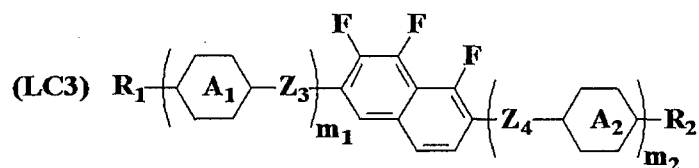

45

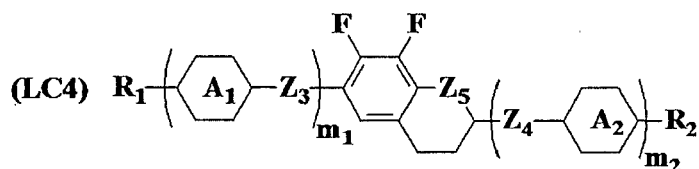


50

55

(in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 15 carbon atoms, at least one CH_2 group in the alkyl group may be substituted by $-O-$, $-\text{CH}=\text{CH}-$, $-\text{CO}-$, $-\text{OCO}-$, $-\text{COO}-$, $-\text{C}=\text{C}-$, $-\text{CF}_2\text{O}-$, or $-\text{OCF}_2-$ so that oxygen atoms are not directly adjacent to each other, at least one hydrogen atom in the alkyl group may be arbitrarily

substituted by a halogen, A₁ and A₂ each independently represent any one of the following structures,

5



(at least one CH₂ group in a cyclohexane ring in the structures may be substituted by an oxygen atom, at least one CH group in a benzene ring in the structures may be substituted by a nitrogen atom, and at least one hydrogen atom in the structures may be substituted by Cl, CF₃, or OCF₃), Z₁ to Z₄ each independently represent a single bond, -CH=CH-, -C=C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCH₂-, -CH₂O-, -OCF₂-, or -CF₂O-, Z₅ represents a CH₂ group or an oxygen atom, at least one of Z₁ and Z₂ present is not a single bond, l₁ represents 0 or 1, m₁ and m₂ each independently represent 0 to 3, and m₁ + m₂ is 1, 2, or 3), and the RGB three-color pixel portions including, as colorants, a diketopyrrolopyrrole pigment and/or anionic red organic dye in a R pixel portion, at least one selected from the group consisting of a halogenated copper phthalocyanine pigment, a phthalocyanine green dye, and a mixture of a phthalocyanine blue dye and an azo yellow organic dye in a G pixel portion, and a ε-type copper phthalocyanine pigment and/or cationic blue organic dye in a B pixel portion.

10

15

Advantageous Effects of Invention

20

[0014] A liquid crystal display device according to the present invention is capable of preventing a decrease in voltage holding ratio (VHR) of a liquid crystal layer and an increase in ion density (ID) by using a specified liquid crystal composition and a color filter including a specified dye and/or pigment, thereby preventing the occurrence of display defects such as white spots, alignment unevenness and/or image sticking.

25

Description of Embodiments

[0015] Fig. 2 shows an example of a liquid crystal display device according to the present invention. Two substrates (1) including a first substrate and a second substrate each have an alignment film (4), a transparent electrode layer (3a) serving as a common electrode and a color filter layer (2a) containing a specified dye and/or pigment are disposed between one of the alignment films (4) and the substrate, a pixel electrode layer (3b) is disposed between the other alignment film and the substrate, the substrates are arranged so that the alignment films face each other, and a liquid crystal layer (5a) containing a specified liquid crystal composition is held between the substrates.

30

[0016] The two substrates in the display device are bonded together with a sealing material disposed in a peripheral region, and in many cases, a granular spacer or a resin spacer columns formed by a photolithography method is disposed between the substrates in order to maintain a gap between the substrates.


35

(Liquid crystal layer)


[0017] The liquid crystal layer in the liquid crystal display device of the present invention preferably includes a liquid crystal composition which contains at least one compound selected from a compound group represented by general formula (LC1) to general formula (LC4),

40



45




50

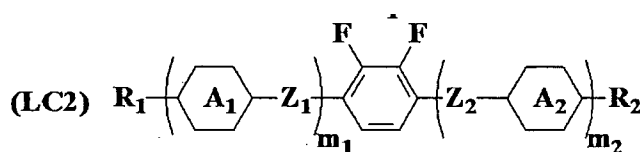

55

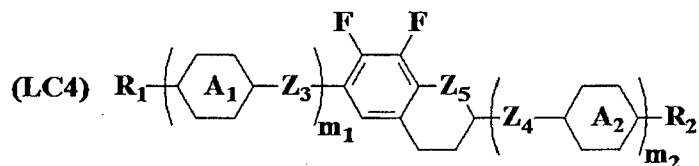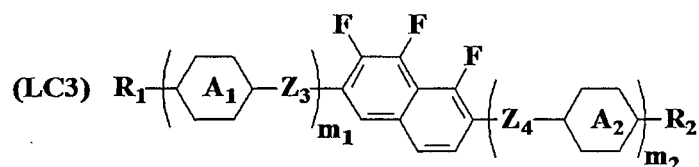


15 (in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 15 carbon atoms, at least one CH_2 group in the alkyl group may be substituted by $-O-$, $-\text{CH}=\text{CH}-$, $-\text{CO}-$, $-\text{OCO}-$, $-\text{COO}-$, $-\text{C}=\text{C}-$, $-\text{CF}_2\text{O}-$, or $-\text{OCF}_2-$ so that oxygen atoms are not directly adjacent to each other, at least one hydrogen atom in the alkyl group may be arbitrarily substituted by a halogen, A_1 and A_2 each independently represent any one of the following structures,



25 (at least one CH_2 group in a cyclohexane ring in the structures may be substituted by an oxygen atom, at least one CH group in a benzene ring in the structures may be substituted by a nitrogen atom, and at least one hydrogen atom in the structures may be substituted by Cl , CF_3 , or OCF_3), Z_1 to Z_4 each independently represent a single bond, $-\text{CH}=\text{CH}-$, $-\text{C}=\text{C}-$, $-\text{CH}_2\text{CH}_2-$, $-(\text{CH}_2)_4-$, $-\text{COO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$, Z_5 represents a CH_2 group or an oxygen atom, at least one of Z_1 and Z_2 present is not a single bond, l_1 represents 0 or 1, m_1 and m_2 each independently represent 0 to 3, and $m_1 + m_2$ is 1, 2, or 3).


30 **[0018]** Preferably, R_1 and R_2 each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, or an alkenyl group having 2 to 7 carbon atoms.

[0019] Preferably, A_1 and A_2 each independently represent any one of the following structures,

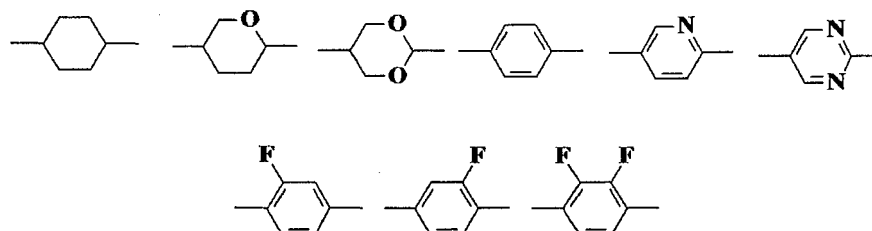


45 **[0020]** Preferably, Z_1 to Z_4 each independently represent a single bond, $-\text{CH}_2\text{CH}_2-$, $-\text{COO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$.

[0021] The liquid crystal composition preferably further contains at least one compound represented by general formula (LC5),




55 (in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 15 carbon atoms, at least one CH_2 group in the alkyl group may be substituted by $-O-$, $-\text{CH}=\text{CH}-$, $-\text{CO}-$, $-\text{OCO}-$, $-\text{COO}-$, $-\text{C}=\text{C}-$, $-\text{CF}_2\text{O}-$, or $-\text{OCF}_2-$ so that oxygen atoms are not directly adjacent to each other, at least one hydrogen atom in the alkyl group may be arbitrarily substituted by a halogen, B_1 to B_3 each independently represent any one of the following,



(in the formulae, at least one CH_2CH_2 group in a cyclohexane ring may be substituted by $-\text{CH}=\text{CH}-$, $-\text{CF}_2\text{O}-$, or $-\text{OCF}_2-$, and at least one CH group in a benzene ring may be substituted by a nitrogen atom), Z_3 and Z_4 each independently represent a single bond, $-\text{CH}=\text{CH}-$, $-\text{C}=\text{C}-$, $-\text{CH}_2\text{CH}_2-$, $-(\text{CH}_2)_4-$, $-\text{COO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$, at least one of Z_3 and Z_4 is not a single bond, and m_1 represents 0 to 3).







10 **[0022]** Preferably, R_1 and R_2 each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, or an alkenyl group having 2 to 7 carbon atoms.


[0023] Preferably, B_1 to B_3 each independently represent any one of the following structures.

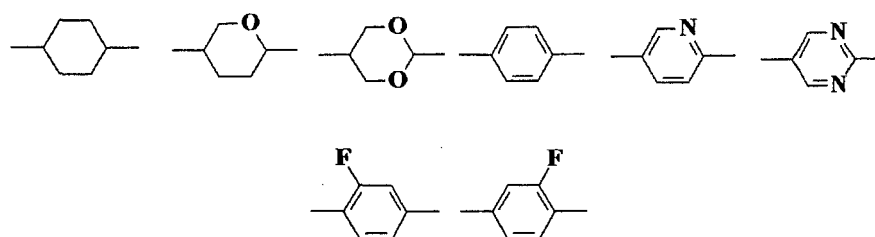

25 **[0024]** Preferably, Z_3 and Z_4 each independently represent a single bond, $-\text{CH}_2\text{CH}_2-$, $-\text{COO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$.

[0025] The general formula (LC1) more preferably represents at least one compound selected from the group consisting of compounds represented by general formula (LC1)-1 to general formula (LC1)-7 below,






5

(in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, an alkenyl group having 2 to 7 carbon atoms, or an alkenyloxy group having 2 to 7 carbon atoms).


[0026] The general formula (LC2) more preferably represents at least one compound selected from the group consisting of compounds represented by general formula (LC2)-1 to general formula (LC2)-15 below,

10


(LC2)-1




(LC2)-8




15 (LC2)-2




(LC2)-9




20 (LC2)-3




(LC2)-10




(LC2)-4




(LC2)-11




25 (LC2)-5




(LC2)-12




30 (LC2)-6




(LC2)-13




(LC2)-7



35




40



45

(in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, an alkenyl group having 2 to 7 carbon atoms, or an alkenyloxy group having 2 to 7 carbon atoms, and Z^1 represents $-\text{CH}_2\text{CH}_2-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$, and A^1 represents any one of the following structures).

50




55


[0027] The general formula (LC3) more preferably represents at least one compound selected from the group consisting of compounds represented by general formula (LC3)-1 to general formula (LC3)-6 below, and the general formula (LC4) more preferably represents at least one compound selected from the group consisting of compounds represented by

general formula (LC4)-1 to general formula (LC4)-4 below,


(LC3)-1




(LC4)-1




(LC3)-2




(LC4)-2




(LC3)-3




(LC4)-3




(LC3)-4




(LC4)-4



(LC3)-5




(LC3)-6




(in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, an alkenyl group having 2 to 7 carbon atoms, or an alkenyloxy group having 2 to 7 carbon atoms).

[0028] The general formula (LC5) more preferably represents at least one compound selected from the group consisting of compounds represented by general formula (LC5)-1 to general formula (LC5)-13 below,


(LC5)-1




(LC5)-8




(LC5)-2




(LC5)-9




(LC5)-3




(LC5)-10




(LC5)-4



(LC5)-11




(LC5)-5




(LC5)-12




(LC5)-6



(LC5)-13

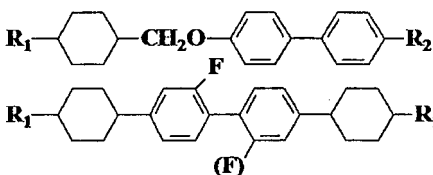

(LC5)-7




(in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, an alkenyl group having 2 to 7 carbon atoms, or an alkenyloxy group having 2 to 7 carbon atoms).

having 1 to 7 carbon atoms, an alkenyl group having 2 to 7 carbon atoms, or an alkenyloxy group having 2 to 7 carbon atoms).

[0029] The liquid crystal composition layer may contain at least one polymerizable compound. The polymerizable compound is preferably a disk-shaped liquid crystal compound having a structure in which a benzene derivative, a triphenylene derivative, a truxene derivative, a phthalocyanine derivative, or a cyclohexane derivative serves as a central mother nucleus of a molecule and is radially substituted by linear alkyl groups, linear alkoxy groups, or substituted benzoyloxy groups as side chains.


[0030] Specifically, the polymerizable compound is preferably a polymerizable compound represented by general formula (PC1),

[0031]







(in the formula, P_1 represents a polymerizable functional group, Sp_1 represents a spacer group having 0 to 20 carbon atoms, Q_1 represents a single bond, -O-, -NH-, -NHCOO-, -OCONH-, -CH=CH-, -CO-, -COO-, -OCO-, -OCOO-, -OOCO-, -CH=CH-, -CH=CH-COO-, -OCO-CH=CH-, or -C≡C-, n_1 and n_2 each represent 1, 2, or 3, MG represents a mesogenic group or a mesogeneity supporting group, R_3 represents a halogen atom, a cyano group, or an alkyl group having 1 to 25 carbon atoms, at least one CH_2 group in the alkyl group may be substituted by -O-, -S-, -NH-, -N(CH₃)-, -CO-, -COO-, -OCO-, -OCOO-, -SCO-, -COS-, or -C=C- so that oxygen atoms are not directly adjacent to each other, and alternatively R_3 represents $P_2-SP_2-Q_2$ (wherein P_2 , Sp_2 , and Q_2 independently represent the same meanings as P_1 , Sp_1 , and Q_1 , respectively).

[0032] In the general formula (PC1), MG is more preferably represented by the following structure,





(in the formula, C_1 to C_3 each independently represent a 1,4-phenylene group, a 1,4-cyclohexylene group, a 1,4-cyclohexenyl group, a tetrahydropyran-2,5-diyl group, a 1,3-dioxane-2,5-diyl group, a tetrahydrothiopyran-2,5-diyl group, a 1,4-bicyclo(2,2,2)octylene group, a decahydronaphthalene-2,6-diyl group, a pyridine-2,5-diyl group, a pyrimidine-2,5-diyl group, a pyrazine-2,5-diyl group, a 1,2,3,4-tetrahydronaphthalene-2,6-diyl group, a 2,6-naphthylene group, a phenanthrene-2,7-diyl group, a 9,10-dihydrophenanthrene-2,7-diyl group, a 1,2,3,4,4a,9,10a-octahydrophenanthrene-2,7-diyl group, or a fluorene-2,7-diyl group, the 1,4-phenylene group, 1,2,3,4-tetrahydronaphthalene-2,6-diyl group, 2,6-naphthylene group, phenanthrene-2,7-diyl group, 9,10-dihydrophenanthrene-2,7-diyl group, 1,2,3,4,4a,9,10a-octahydrophenanthrene-2,7-diyl group, and fluorene-2,7-diyl group may have as a substituent at least one F, Cl, CF₃, OCF₃, cyano group, alkyl group having 1 to 8 carbon atoms, alkoxy group, alkanoyl group, alkanoyloxy group, alkenyl group having 2 to 8 carbon atoms, alkenyloxy group, alkenoyl group, or alkenoyloxy group, Y_1 and Y_2 each independently represent -COO-, -OCO-, -CH₂CH₂-, -OCH₂-, -CH₂O-, -CH=CH-, -C=C-, -CH=CHCOO-, -OCOCH=CH-, -CH₂CH₂COO-, -CH₂CH₂OCO-, -COOCH₂CH₂-, -OCOCH₂CH₂-, -CONH-, -NHCO-, or a single bond, and n_5 represents 0, 1, or 2), Sp_1 and Sp_1 each independently represent an alkylene group, the alkylene group may be substituted by at least one halogen atom or cyano group, at least one CH_2 group in the alkylene group may be substituted by -O-, -S-, -NH-, -N(CH₃)-, -CO-, -COO-, -OCO-, -OCOO-, -SCO-, -COS-, or -C≡C- so that oxygen atoms are not directly adjacent to each other, and P_1 and P_2 each independently represent a structure selected from the group consisting of compounds represented by general formula (PC1-a) to general formula (PC1-d) below,

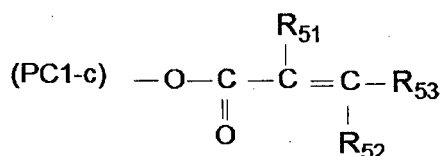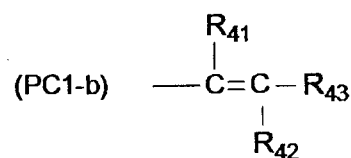








(in the formulae, R_{41} to R_{43} , R_{51} to R_{53} , and R_{61} to R_{63} each independently represent a hydrogen atom, a halogen atom, or an alkyl group having 1 to 5 carbon atoms).



[0033] More specifically, the general formula (PC1) is preferably a polymerizable compound represented by general formula (PC1)-1 or general formula (PC1)-2,



[0034] (P_1 , SP_1 , Q_1 , P_2 , SP_2 , Q_2 and MG represent the same meanings as in the general formula (PC1), and n_3 and n_4 each independently represent 1, 2, or 3).

[0035] More specifically, the general formula (PC1) is preferably at least one polymerizable compound selected from the group consisting of compounds represented by general formula (PC1)-3 to general formula (PC1)-11,

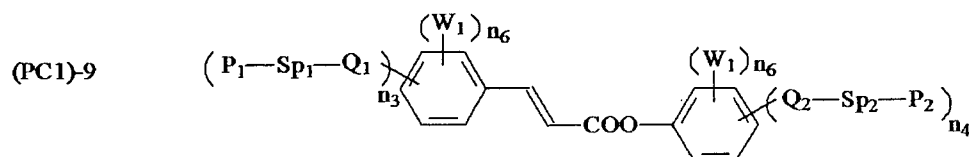

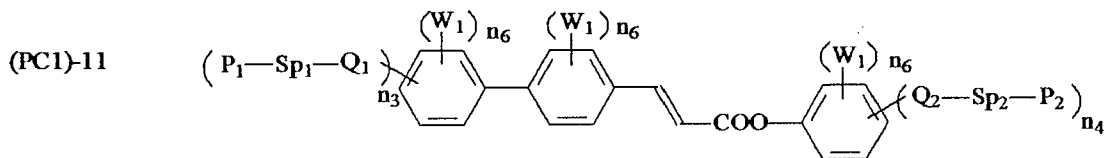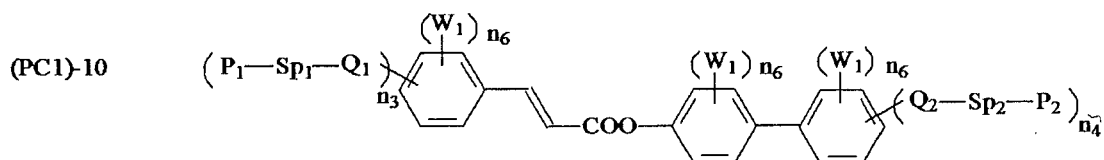


(in the formulae, P_1 , P_2 , Sp_1 , Sp_2 , Q_1 , and Q_2 represent the same meanings as in the general formula (PC1), W_1 each independently represent F, CF_3 , OCF_3 , CH_3 , OCH_3 , an alkyl group having 2 to 5 carbon atoms, an alkoxy group, an alkenyl group, $COOW_2$, $OCOW_2$, or $OCOOW_2$ (wherein W_2 each independently represent a linear or branched alkyl group having 1 to 10 carbon atoms or an alkenyl group having 2 to 5 carbon atoms), n_3 each independently represent 1, 2, or 3, n_4 each independently represent 1, 2, or 3, n_6 each independently represent 0, 1, 2, 3, or 4, and $n_3 + n_6$ on the same ring and $n_4 + n_6$ on the same ring are 5 or less).


[0036] In the general formula (PC1) and the general formula (PC1)-1 to general formula (PC1)-11, Sp_1 , Sp_2 , Q_1 , and Q_2 are preferably single bonds. $n_3 + n_4$ is preferably 1 to 3 and preferably 1 or 2. P_1 and P_2 are preferably formula (PC1-c). W_1 is preferably F, CF_3 , OCF_3 , CH_3 , or OCH_3 . n_6 is 1, 2, 3, or 4.

[0037] Specifically, the following compounds are preferred.


(PC1-3a)




(PC1-3b)




(PC1-3c)




(PC1-3d)




(PC1-3e)




(PC1-3f)




(PC1-3g)



(PC1-3h)




(PC1-3i)

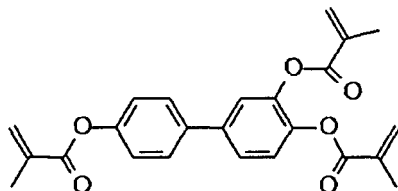

[0038] Further, a hydrogen atom in a benzene ring of (PC1-3a) to (PC1-3i) may be substituted by a fluorine atom.

[0039] Also, MG in the general formula (PC1) is preferably a disk-shaped liquid crystal compound represented by general formula (PC1)-9,

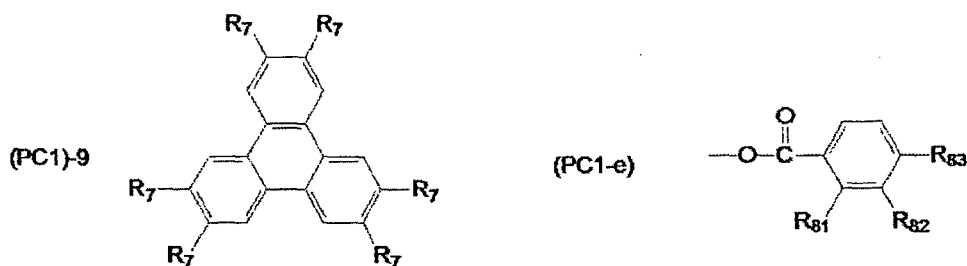

(in the formula, R_7 each independently represent a substituent represented by P_1 - Sp_1 - Q_1 or general formula (PC1-e) (wherein P_1 , Sp_1 , and Q_1 represent the same meanings as in the general formula (PCI), R_{81} and R_{82} each independently represent a hydrogen atom, a halogen atom, or a methyl group, R_{83} represents an alkoxy group having 1 to 20 carbon atoms, and at least one hydrogen atom in the alkoxy group is substituted by a substituent represented by the general formula (PC1-a) to (PC1-d)).

15 **[0040]** The amount of the polymerizable compound used is preferably 0.05 to 2.0% by mass.

[0041] The liquid crystal composition can be singly used for the above-described applications, and can further contain at least one antioxidant and at least one UV absorbent.

20 (Color filter)

[0042] A color filter according to the present invention includes a black matrix and at least RGB three-color pixel portions, the RGB three-color pixel portions including, as colorants, a diketopyrrolopyrrole pigment and/or anionic red organic dye in a R pixel portion, at least one selected from the group consisting of a halogenated copper phthalocyanine pigment, a phthalocyanine green dye, and a mixture of a phthalocyanine blue dye and an azo yellow organic dye in a G pixel portion, and a ϵ -type copper phthalocyanine pigment and/or cationic blue organic dye in a B pixel portion.

25 **[0043]** The RGB three-color pixel portions preferably include, as colorants, C. I. Solvent Red 124 in the R pixel portion, a mixture of C. I. Solvent Blue 67 and C. I. Solvent Yellow 162 in the G pixel portion, and C. I. Solvent Blue 7 in the B pixel portion.

30 **[0044]** Also, the RGB three-color pixel portions preferably include, as colorants, C. I. Pigment Red 254 in the R pixel portion, C. I. Pigment Green 7 and/or 36 in the G pixel portion, and C. I. Pigment Blue 15:6 in the B pixel portion.

35 **[0045]** The RGB three-color pixel portions preferably further include, as a colorant in the R pixel portion, at least one organic dye/pigment selected from the group consisting of C. I. Pigment Red 177, 242, 166, 167, and 179, C. I. Pigment Orange 38 and 71, C. I. Pigment Yellow 150, 215, 185, 138, and 139, C. I. Solvent Red 89, C. I. Solvent Orange 56, and C. I. Solvent Yellow 21, 82, 83:1, 33, and 162.

[0046] The RGB three-color pixel portions preferably include, as a colorant in the G pixel portion, at least one organic dye/pigment selected from the group consisting of C. I. Pigment Yellow 150, 215, 185, and 138, and C. I. Solvent Yellow 21, 82, 83:1, and 33.

40 **[0047]** The RGB three-color pixel portions preferably further include, as a colorant in the B pixel portion, at least one organic dye/pigment selected from the group consisting of C. I. Pigment Blue 1, C. I. Pigment Violet 23, C. I. Basic Blue 7, C. I. Basic Violet 10, C. I. Acid Blue 1, 90, and 83, and C. I. Direct Blue 86.

[0048] Also, the color filter includes a black matrix, RGB three-color pixel portions, and a Y pixel portion, and preferably contains, as a colorant in the Y pixel portion, at least one yellow organic dye/pigment selected from the group consisting of C. I. Pigment Yellow 150, 215, 185, 138, and 139, and C. I. Solvent Yellow 21, 82, 83:1, 33, and 162.

45 **[0049]** In the color filter, the color filter pixel portions can be formed by a generally known method. A typical method for forming pixel portions is a photolithography method in which a photocurable composition described below is applied to a surface of a color filter transparent substrate on the side provided with a black matrix and then dried by heating (prebaked), the photocurable compound is cured in portions corresponding to the pixel portions by pattern exposure under irradiation with ultraviolet light through a photomask, unexposed portions are developed with a developer, and then non-pixel portions are removed to fix the pixel portions to the transparent substrate. This method forms the pixel portions each composed of a cured color film of the photocurable composition on the transparent substrate.

[0050] A photocurable composition described below is prepared for each of R pixels, G pixels, B pixels, and if required, other color pixels such as Y pixels or the like, and the above-described operation is repeated to produce a color filter having color pixel portions of the R pixels, G pixels, B pixels, and Y pixels at predetermined positions.

55 **[0051]** Examples of a method for applying each photocurable composition described below to the transparent substrate of glass or the like include a spin coating method, a roll coating method and an ink jet method.

[0052] The drying conditions of a coating film of the photocurable composition applied to the transparent substrate are generally 50°C to 150°C and about 1 to 15 minutes, depending on the type and mixing ratio of each component, or

the like. Light used for photocuring the photocurable composition is preferably ultraviolet light within a wavelength range of 200 to 500 nm or visible light. Various light sources which emit light within this wavelength range can be used.

[0053] Examples of a development method include a puddle method, a dipping method and a spray method. After exposure and development of the photocurable composition, the transparent substrate on which necessary color pixel portions have been formed is washed with water and dried. The resultant color filter is heat-treated (post baked) at 90°C to 280°C for a predetermined time using a heating apparatus such as a hot plate, an oven, or the like to remove volatile components in the color coating film and, at the same time, to heat-cure an unreacted photocurable compound remaining in the cured color coating film of the photocurable composition, completing the color filter.

[0054] By using the colorants for the color filter of the present invention in combination with the liquid crystal composition of the present invention, it is possible to provide a liquid crystal display device capable of preventing a decrease in voltage holding ratio (VHR) of the liquid crystal layer and an increase in ion density (ID) and resolving the problems of display defects such as white spots, alignment unevenness and/or image sticking.

[0055] A method for producing the photocurable composition is generally a method in which a dye and/or pigment composition for the color filter of the present invention, an organic solvent, and a dispersant are used as essential components, these components are mixed and uniformly dispersed by stirring to prepare a pigment dispersion for forming a pixel portion of the color filter, and a photocurable compound and, if required, a thermoplastic resin and/or a photopolymerization initiator are added to the dispersion to produce the photocurable composition.

[0056] Examples of the organic solvent used include aromatic solvents such as toluene, xylene and methoxybenzene; acetic acid ester solvents such as ethyl acetate, propyl acetate, butyl acetate, propylene glycol monomethyl ether acetate, propylene glycol monoethyl ether acetate, diethylene glycol methyl ether acetate, diethylene glycol ethyl ether acetate, diethylene glycol propyl ether acetate and diethylene glycol butyl ether acetate; propionate solvents such as ethoxyethyl propionate; alcohol solvents such as methanol and ethanol; ether solvents such as butyl cellosolve, propylene glycol monomethyl ether, diethylene glycol ethyl ether and diethylene glycol dimethyl ether; ketone solvents such as methyl ethyl ketone, methyl isobutyl ketone and cyclohexanone; aliphatic hydrocarbon solvents such as hexane; nitrogen compound solvents such as N,N-dimethylformamide, γ -butyrolactam, N-methyl-2-pyrrolidone, aniline and pyridine; lactone solvents such as γ -butyrolactone; and carbamic acid esters such as a mixture of methyl carbamate and ethyl carbamate at 48:52.

[0057] Examples of the dispersant which can be used include dispersants such as BYK Chemie DISPERBYK 130, DISPERBYK 161, DISPERBYK 162, DISPERBYK 163, DISPERBYK 170, DISPERBYK 171, DISPERBYK 174, DISPERBYK 180, DISPERBYK 182, DISPERBYK 183, DISPERBYK 184, DISPERBYK 185, DISPERBYK 2000, DISPERBYK 2001, DISPERBYK 2020, DISPERBYK 2050, DISPERBYK 2070, DISPERBYK 2096, DISPERBYK 2150, DISPERBYK LPN21116, and DISPERBYK LPN6919; Efka Chemicals Company Efka 46, Efka 47, Efka 452, Efka LP4008, Efka 4009, Efka LP4010, Efka LP4050 and LP4055, Efka 400, Efka 401, Efka 402, Efka 403, Efka 450, Efka 451, Efka 453, Efka 4540, Efka 4550, Efka LP4560, Efka 120, Efka 150, Efka 1501, Efka 1502, and Efka 1503; Lubrizol Corporation Solsperse 3000, Solsperse 9000, Solsperse 13240, Solsperse 13650, Solsperse 13940, Solsperse 17000 and 18000, Solsperse 20000, Solsperse 21000, Solsperse 20000, Solsperse 24000, Solsperse 26000, Solsperse 27000, Solsperse 28000, Solsperse 32000, Solsperse 36000, Solsperse 37000, Solsperse 38000, Solsperse 41000, Solsperse 42000, Solsperse 43000, Solsperse 46000, Solsperse 54000, and Solsperse 71000; and Ajimonoto Co., Ltd. Ajisper PB711, Ajisper PB821, Ajisper PB822, Ajisper PB814, Ajisper PN411, and Ajisper PA111; and synthetic resins which are liquid at room temperature and water-insoluble, such as acryl resins, urethane resins, alkyd resins, natural rosins such as wood rosin, gum rosin and tall oil rosin, modified rosins such as polymerized rosin, disproportionated rosin, hydrogenated rosin, oxidized rosin and maleinized rosin, rosin derivatives such as rosin amine, lime rosin, rosin alkyleneoxide adduct, rosin alkyd adduct and rosin-modified phenol. Addition of any one of the dispersants and resins contributes to a decrease in flocculation and improvements in dispersion stability of pigments and viscosity characteristics of the dispersant.

[0058] Examples of a dispersion aid which can be used include organic pigment derivatives such as phthalimide methyl derivatives, sulfonic acid derivatives, N-(dialkylamino)methyl derivative and N-(dialkylaminoalkyl)sulfonic amide derivatives.

Of course, these derivatives can be used in combination of two or more different types.

[0059] Examples of the thermoplastic resin used for preparing the photocurable composition include urethane resins, acryl resins, polyamide resins, polyimide resins, styrene-maleic acid resins and styrene-maleic anhydride resins.

[0060] Examples of the photocurable compound include difunctional monomers such as 1,6-hexanediol diacrylate, ethylene glycol diacrylate, neopentyl glycol diacrylate, triethylene glycol diacrylate, bis(acryloxyethoxy)bisphenol A and 3-methylpentanediol diacrylate; polyfunctional monomers with relatively low molecular weight, such as trimethylolpropane triacrylate, pentaerythritol triacrylate, tris[2-(meth)acryloyloxyethyl] isocyanurate, dipentaerythritol hexaacrylate and dipentaerythritol pentaacrylate; and polyfunctional monomers with relatively high molecular weight, such as polyester acrylate, polyurethane acrylate and polyether acrylate.

[0061] Examples of the photopolymerization initiator include acetophenone, benzophenone, benzyl dimethyl ketal, benzoyl peroxide, 2-chlorothioxanthone, 1,3-bis(4'-azidobenzal)-2-propane, 1,3-bis(4'-azidobenzal)-2-propane-2'-sul-

fonic acid and 4,4'-diazidostilbene-2,2'-disulfonic acid. Examples of a commercially available photopolymerization initiator include BASF Corporation "Irgacure (trade name)-184", "Irgacure (trade name)-369", "Darocur (trade name)-1173", and BASF Corporation "Lucirin-TPO", Nippon Kayaku Co., Ltd. "Kayacure (trade name) DETX" and "Kayacure (trade name) OA", Sutoufa Chemical Co., "Baikyua 10" and "Baikyua 55", Akzo Co., Ltd. "Trigonal PI", Sandozu Co., Ltd. "Sandorei 1000", Apujon Co., Ltd. "Deep" and Kurogane Kasei Co., Ltd. "Biimidazole".

[0062] The photopolymerization initiator can be combined with a known photosensitizer in common use. Examples of the photosensitizer include amines, ureas, sulfur atom-containing compounds, phosphorus atom-containing compounds, chlorine atom-containing compounds, nitriles and other nitrogen atom-containing compounds. These can be used alone or in combination of two or more.

[0063] The ratio of the photopolymerization initiator mixed is not particularly limited but is preferably in a range of 0.1% to 30% on a mass basis relative to a compound having a photopolymerizable or photocurable functional group. With the ratio less than 0.1%, sensitivity during curing tends to be decreased, while with the ratio exceeding 30%, crystals of the photopolymerization initiator may be precipitated when a coating film of a pigment-dispersed resist is dried, thereby causing deterioration in the physical properties of the coating film.

[0064] By using each of the above-described materials, on a mass basis, 300 to 1000 parts of the organic solvent and 1 to 100 parts of the dispersant relative to 100 parts of the color filter dye and/or pigment composition of the present invention are uniformly dispersed by stirring to prepare the dye/pigment solution. Then, to the pigment dispersion, the thermoplastic resin and the photocurable compound in a total of 3 to 20 parts per part of the pigment composition for the color filter of the present invention, 0.05 to 3 parts of the photopolymerization initiator per part of the photocurable compound, and if required, the organic solvent are added and uniformly dispersed by stirring to produce the photocurable composition for forming each of the color filter pixel portions.

[0065] A known organic solvent or aqueous alkali solution in common use can be used as the developer. In particular, when the photocurable composition contains the thermoplastic resin or the photocurable compound at least one of which has an acid value and exhibits alkali solubility, washing with an aqueous alkali solution is effective for forming the color filter pixel portions.

[0066] Although the method for producing the color filter pixel portions by the photolithography method is described in detail, each of the color filter pixel portions prepared by using the color filter pigment composition of the present invention may be formed by another method such as an electrodeposition method, a transfer method, a micelle electrolysis method, a PVED (Photovoltaic Electrodeposition) method, an ink jet method, a reverse printing method, a heat curing method, or the like, thereby producing the color filter.

(Alignment film)

[0067] In the liquid crystal display device of the present invention, when the alignment film for aligning the liquid crystal composition is required to be provided on the surface of each of the first and second substrates which is in contact with the liquid crystal composition, the alignment film is disposed between the color filter and the liquid crystal layer. However, even in the case of a thick film, the alignment film has a thickness of as small as 100 nm or less so as not to completely cut off the interaction between the colorants such as pigments or the like, which constitute the color filter, and the liquid crystal compound constituting the liquid crystal layer.

[0068] The liquid crystal display device without using the alignment film has greater interaction between the colorants such as pigments or the like, which constitute the color filter, and the liquid crystal compound constituting the liquid crystal layer.

[0069] Usable examples of an alignment film material include transparent organic materials such as polyimide, polyamide, BCB (benzocyclobutene polymer) and polyvinyl alcohol. In particular, it is preferred to use a polyimide alignment film produced by imidizing a polyamic-acid synthesized from diamine such as an aliphatic or alicyclic diamine, for example, p-phenylenediamine, 4,4'-diaminodiphenylmethane, or the like, and an aliphatic or alicyclic tetracarboxylic anhydride, such as butanetetracarboxylic anhydride, 2,3,5-tricarboxycyclopentylacetic anhydride, or the like, or an aromatic tetracarboxylic anhydride such as pyromellitic dianhydride or the like. In this case, rubbing is generally used as an alignment imparting method, but when the alignment film is used as a vertical alignment film, it can be used without imparting alignment.

[0070] A material containing a compound containing chalcone, cinnamate, cinnamoyl, or an azo group can be used as the alignment film material, and this may be used in combination with a material such as polyimide, polyamide, or the like. For this alignment film, rubbing may be used or a light alignment technique may be used.

[0071] The alignment film is generally formed as a resin film by applying the alignment film material to the substrate using a method such as a spin coating method or the like, but a uniaxial stretching method, a Langmuir-Blodgett method, or the like can also be used.

(Transparent electrode)

[0072] In the liquid crystal display device of the present invention, a conductive metal oxide can be used as a material of the transparent electrode. Usable examples of the metal oxide include indium oxide (In_2O_3), tin oxide (SnO_2), zinc oxide (ZnO), indium-tin oxide ($\text{In}_2\text{O}_3\text{-SnO}_2$), indium-zinc oxide ($\text{In}_2\text{O}_3\text{-ZnO}$), niobium-added titanium dioxide ($\text{Ti}_{1-x}\text{Nb}_x\text{O}_2$), fluorine-doped tin oxide and graphene nanoribbons or metal nanowires. But zinc oxide (ZnO), indium-tin oxide ($\text{In}_2\text{O}_3\text{-SnO}_2$), or indium-zinc oxide ($\text{In}_2\text{O}_3\text{-ZnO}$) is preferred. The transparent conductive film can be patterned by a method such as a photo-etching method, a method using a mask, or the like.

[0073] The liquid crystal layer of the present invention is useful for a liquid crystal display device, particularly a liquid crystal display device for active matrix driving, and can be used for a liquid crystal display device for a VA mode, an IPS mode, or an ECB mode.

[0074] The liquid crystal layer containing the polymerizable monomer according to the present invention, for example, the liquid crystal layer used for a PSA mode and a PSVA mode, is imparted with the liquid crystal alignment ability when the polymerizable monomer contained is polymerized by ultraviolet irradiation, and is used for a liquid crystal display device in which a quantity of transmitted light is controlled by using birefringence of the liquid crystal composition. The liquid crystal layer is useful for AM-LCD (active matrix liquid crystal display device), TN (nematic liquid crystal display device), STN-LCD (super-twisted nematic liquid crystal display device), OCB-LCD and IPS-LCD (in-plane switching liquid crystal display device), particularly useful for AM-LCD, and can be used for a transmissive or reflective liquid crystal display device.

[0075] The liquid crystal display device of the present invention is used in combination with a backlight for various applications such as a liquid crystal television, a monitor of a personal computer, a cellular phone, a display of a smart phone, a notebook-size personal computer, a portable information terminal, a digital signage, and the like. Examples of the backlight include a cold-cathode tube-type backlight and a two-wavelength-peak pseudo-white backlight and three-wavelength-peak backlight each using a light-emitting diode using an inorganic material or an organic EL element.

EXAMPLES

[0076] A best mode of the present invention is partially described in detail below by way of examples. In the examples and comparative examples below, "%" in a composition represents "% by mass".

[0077] The physical properties of a liquid crystal composition are represented as follows.

[0078] $T_{N\rightarrow I}$: nematic-isotropic liquid phase transition temperature ($^{\circ}\text{C}$) as liquid crystal phase upper limit temperature

$\Delta\epsilon$: dielectric constant anisotropy

Δn : refractive index anisotropy

η : viscosity at 20°C (mPa·s)

d_{gap} : gap between first substrate and second substrate of cell (μm)

VHR: voltage holding ratio at 70°C (%)

(a value by % representing a ratio of a measured voltage to an initial applied voltage, the measured voltage being measured using a liquid crystal composition injected into a cell having a cell thickness of $3.5\ \mu\text{m}$ under the conditions of 5 V applied, a frame time of 200 ms, and a pulse width of $64\ \mu\text{s}$)

ID: ion density at 70°C (pC/cm²)

(a value of ion density measured using a liquid crystal composition injected into a cell having a cell thickness of $3.5\ \mu\text{m}$ and MTR-1 (manufactured by Toyo Corporation) under the conditions of 20 V applied and a frequency of 0.05 Hz)

[0079] Compounds are represented by abbreviations below.

n (Number) at end $\text{C}_n\text{H}_{2n+1}$ -

-2- $-\text{CH}_2\text{CH}_2-$

-10- $-\text{CH}_2\text{O}-$


-01- $-\text{OCH}_2-$

-0n $-\text{OC}_n\text{H}_{2n+1}$

-1=1- $-\text{HC}=\text{CH}-$

-V0- $-\text{C00}-$

ndm- $\text{C}_n\text{H}_{2n+1}-\text{HC}=\text{CH}-(\text{CH}_2)_{m-1}-$

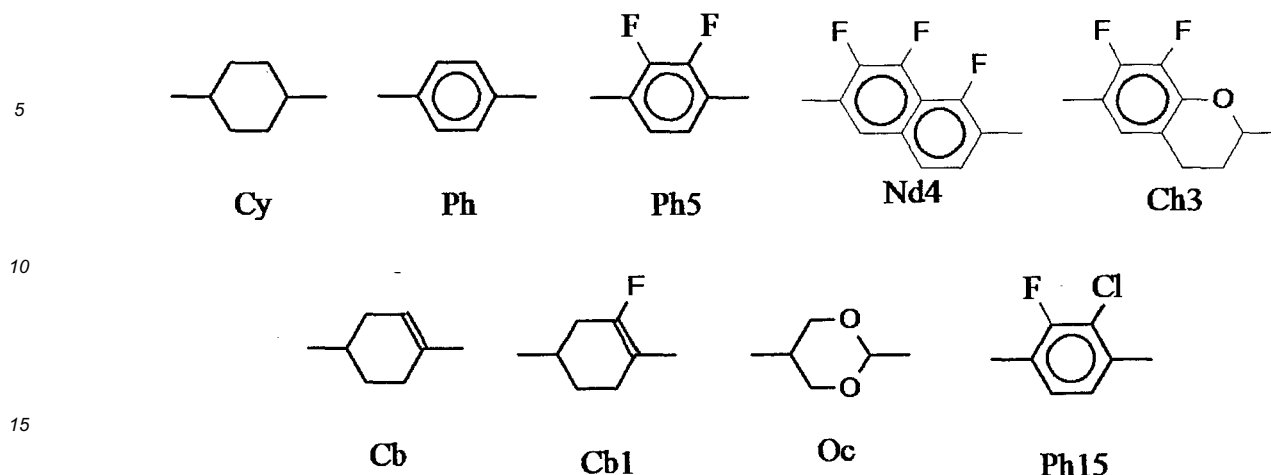

20 **[0080]** Image sticking of the liquid crystal display device was evaluated by display of a predetermined fixed pattern within a display area for 1000 hours and then uniform display over the entire screen to visually observe the level of residual image of the fixed pattern based on the following 4 levels:

[0081]

- 25 A: No residual image
 B: Slight residual image at an allowable level
 C: Residual image at an unallowable level
 D: Significant residual image

30 [Formation of color filter]

[Preparation of colored composition]

[Red dye colored composition 1]

35 **[0082]** In a polymer bottle, 10 parts of red dye 1 (C. I. Solvent Red 124) was placed, and 55 parts of propylene glycol monomethyl ether acetate and SEPR beads of 0.3 to 0.4 mm in diameter were added, and the resultant mixture was dispersed with a paint conditioner (manufactured by Toyo Seiki Co., Ltd.) for 4 hours and then filtered with a 5 μm filter to produce a dye colored solution. Then, 75.00 parts of the dye colored solution, 5.50 parts of polyester acrylate resin (Aronix (trade name) M7100 manufactured by Toa Gosei Chemical Industry Co., Ltd.), 5.00 parts of dipentaerythritol hexaacrylate (KAYARAD (trade name) DPHA, manufactured by Nippon Kayaku Co., Ltd.), 1.00 part of benzophenone (KAYACURE (trade name) BP-100, manufactured by Nippon Kayaku Co., Ltd.), and 13.5 parts of Ucar Ester EEP were stirred with a dispersion stirrer and then filtered with a filter having a pore size of 1.0 μm to produce red dye colored composition 1.

40

45 [Red dye colored composition 2]

[0083] Red dye colored composition 2 was produced by the same method as described above using 8 parts of the red dye 1 (C. I. Solvent Red 124) and 2 parts of yellow dye 2 (C. I. Solvent Yellow 21) in place of 10 parts of the red dye 1 of the red dye colored composition 1.

50

[Red dye colored composition 3]

[0084] Red dye colored composition 3 was produced by the same method as described above using 10 parts of red dye 2 (C. I. Solvent Red 1) in place of 10 parts of the red dye 1 of the red dye colored composition 1.

55

[Green dye colored composition 1]

[0085] Green dye colored composition 1 was produced by the same method as described above using 3 parts of blue

EP 2 657 754 B1

dye 1 (C. I. Solvent Blue 67) and 7 parts of yellow dye 1 (C. I. Solvent Yellow 162) in place of 10 parts of the red dye 1 of the red dye colored composition 1.

[Green dye colored composition 2]

5

[0086] Green dye colored composition 2 was produced by the same method as described above using 4 parts of the yellow dye 1 (C. I. Solvent Yellow 162) and 3 parts of yellow dye 3 (C. I. Solvent Yellow 82) in place of 7 parts of the yellow dye 1 of the green dye colored composition 1.

10

[Green dye colored composition 3]

[0087] Green dye colored composition 3 was produced by the same method as described above using 10 parts of green dye 1 (C. I. Solvent Green 7) in place of 3 parts of the blue dye 1 and 7 parts of the yellow dye 1 of the green dye colored composition 1.

15

[Blue dye colored composition 1]

[0088] Blue dye colored composition 1 was produced by the same method as described above using 10 parts of the blue dye 1 (C. I. Solvent Blue 7) in place of 10 parts of the red dye 1 of the red dye colored composition 1.

20

[Blue dye colored composition 2]

[0089] Blue dye colored composition 2 was produced by the same method as described above using 7 parts of the blue dye 1 (C. I. Solvent Blue 7) and 3 parts of violet dye 1 (C. I. Basic Violet 10) in place of 10 parts of the blue dye 1 of the blue dye colored composition 1.

25

[Blue dye colored composition 3]

[0090] Blue dye colored composition 3 was produced by the same method as described above using 10 parts of blue dye 2 (C. I. Solvent Blue 12) in place of 7 parts of the blue dye 1 and 3 parts of the violet dye 1 of the blue dye colored composition 2.

30

[Yellow dye colored composition 1]

[0091] Yellow dye colored composition 1 was produced by the same method as described above using 10 parts of yellow dye 2 (C. I. Solvent Yellow 21) in place of 10 parts of the red dye 1 of the red dye colored composition 1.

35

[Yellow dye colored composition 2]

[0092] Yellow dye colored composition 2 was produced by the same method as described above using 10 parts of yellow dye 4 (C. I. Solvent Yellow 2) in place of 10 parts of the yellow dye 2 of the yellow dye colored composition 1.

40

[Red pigment colored composition 1]

[0093] In a polymer bottle, 10 parts of red pigment 1 (C. I. Pigment Red 254, "IRGAPHOR RED BT-CF" manufactured by BASF Corporation) was placed, and 55 parts of propylene glycol monomethyl ether acetate, 7.0 parts of DISPERBYK LPN21116 (manufactured by BYK Chemie Corporation), and SEPR beads of 0.3 to 0.4 mm in diameter were added, and the resultant mixture was dispersed with a paint conditioner (manufactured by Toyo Seiki Co., Ltd.) for 4 hours and then filtered with a 5 μ m filter to produce a pigment-dispersed solution. Then, 75.00 parts of the pigment-dispersed solution, 5.50 parts by polyester acrylate resin (Aronix (trade name) M7100 manufactured by Toa Gosei Chemical Industry Co., Ltd.), 5.00 parts of dipentaerythritol hexaacrylate (KAYARAD (trade name) DPHA, manufactured by Nippon Kayaku Co., Ltd.), 1.00 part of benzophenone (KAYACURE (trade name) BP-100, manufactured by Nippon Kayaku Co., Ltd.), and 13.5 parts of Ucar Ester EEP were stirred with a dispersion stirrer and then filtered with a filter having a pore size of 1.0 μ m to produce red pigment colored composition 1.

50

55

[Red pigment colored composition 2]

[0094] Red pigment colored composition 2 was produced by the same method as described above using 6 parts of

EP 2 657 754 B1

the red pigment 1, 2 parts of red pigment 2 (C. I. Pigment Red 177 manufactured by DIC Corporation, FASTOGEN SUPER RED ATY-TR), and 2 parts of yellow pigment 2 (C. I. Pigment Yellow 139) in place of 10 parts of the red pigment 1 of the red pigment colored composition 1.

5 [Green pigment colored composition 1]

[0095] Green pigment colored composition 1 was produced by the same method as described above using 6 parts of green pigment 1 (C. I. Pigment Green 36, manufactured by DIC Corporation, "FASTOGEN GREEN 2YK-CF"), and 4 parts of yellow pigment 1 (C. I. Pigment Yellow 150, manufactured by BAYER Corporation, FANCHON FAST YELLOW E4GN) in place of 10 parts of the red pigment 1 of the red pigment colored composition 1.

[Green pigment colored composition 2]

15 [0096] Green pigment colored composition 2 was produced by the same method as described above using 4 parts of green pigment 2 (C. I. Pigment Green 7, manufactured by DIC Corporation, FASTOGEN GREEN S) and 6 parts of yellow pigment 3 (C. I. Pigment Yellow 138) in place of 6 parts of the green pigment 1 and 4 parts of the yellow pigment 1 of the green pigment colored composition 1.

[Blue pigment colored composition 1]

20 [0097] Blue pigment colored composition 1 was produced by the same method as described above using 9 parts of blue pigment 1 (C. I. Pigment Blue 15:6, manufactured by DIC Corporation, "FASTOGEN BLUE EP-210") and 1 part of violet pigment 1 (C. I. Pigment Violet 23) in place of 10 parts of the red pigment 1 of the red pigment colored composition 1.

25 [Blue pigment-dye colored composition 2]

[0098] Blue pigment-dye colored composition 2 was produced by the same method as described above using 1 part of violet dye 1 (C. I. Basic Violet 10) in place of 1 part of the violet pigment 1 of the blue pigment colored composition 1.

30 [Yellow pigment colored composition 1]

[0099] Yellow pigment colored composition 1 was produced by the same method as described above using 10 parts of yellow pigment 1 (C. I. Pigment Yellow 15, manufactured by BAYER Corporation, FANCHON FAST YELLOW E4GN) in place of 10 parts of the red pigment 1 of the red pigment colored composition 1.

35 [Formation of color filter]

[0100] The red colored composition was applied to a thickness of 2 μm by spin coating on a glass substrate on which a black matrix had been previously formed. After drying at 70°C for 20 minutes, stripe-shaped pattern exposure was performed with ultraviolet light through a photomask using an exposure apparatus provided with a super-high pressure mercury lamp. Then, spray development with an alkali developer for 90 seconds, washing with ion exchange water, and air drying were performed. Further, post baking was performed in a clean oven at 230°C for 30 minutes to form red pixels as a stripe-shaped color layer on the transparent substrate.

45 [0101] Next, similarly, the green colored composition was applied to a thickness of 2 μm by spin coating. After drying, a stripe-shaped color layer was formed in a position deviated from the red pixels by exposure with an exposure apparatus and development, thereby forming green pixels adjacent to the red pixels.

[0102] Next, similarly, the blue colored composition was applied to a thickness of 2 μm by spin coating, forming blue pixels adjacent to the red pixels and the green pixels. As a result, a color filter having stripe-shaped pixels of the three colors of red, green, and blue was produced.

50 [0103] If required, similarly, the yellow colored composition was applied to a thickness of 2 μm by spin coating, forming yellow pixels adjacent to the green pixels and the blue pixels. As a result, a color filter having stripe-shaped pixels of the four colors of red, green, blue, and yellow was produced.

[0104] Color filters 1 to 4 and comparative color filter 1 were formed by using the dye colored compositions or pigment colored compositions shown in Table 1.

55

EP 2 657 754 B1

[Table 1]

	Color filter 1	Color filter 2	Color filter 3	Color filter 4	Comparative Color filter 1	
5	R pixel portion	Red dye colored composition 1	Red dye colored composition 2	Red pigment colored composition 1	Red pigment colored composition 2	Red dye colored composition 3
10	G pixel portion	Green dye colored composition 1	Green dye colored composition 2	Green pigment colored composition 1	Green pigment colored composition 2	Green dye colored composition 3
15	B pixel portion	Blue dye colored composition 1	Blue dye colored composition 2	Blue pigment colored composition 1	Blue pigment-dye colored composition 2	Blue dye colored composition 3
20	Y pixel portion	No	Yellow dye colored composition 1	No	Yellow pigment colored composition 1	Yellow dye colored composition 2

(EXAMPLES 1 to 4)

25 **[0105]** An electrode structure was formed on each of first and second substrates, and a vertical alignment-type alignment film was formed on each of the facing surfaces of the substrates and weakly rubbed to form a VA cell. Then, liquid crystal composition 1 having negative dielectric anisotropy and shown in Table 2 was held between the first substrate and the second substrate. Next, liquid crystal display devices of Examples 1 to 4 were formed by using the color filters 1 to 4 shown in Table 1 ($d_{\text{gap}} = 3.5 \mu\text{m}$, alignment film SE-5300). VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Table 3.

[Table 2]

	Liquid crystal composition	
35	0d1-Cy-Cy-3	20
	3-Cy-Cy-2	15
40	3-Cy-Ph-O1	5
	0d1-Gy-10-Ph5-O1-Cy-2	11
	0d1-Cy-10-Ph5-O1-Cy-3	11
	0d1-Cy-10-Ph5-O1-Cy-4	11
45	0d1-Cy-10-Ph5-O1-Cy-5	11
	0d1-Cy-Cy-10-Ph5-O3d0	4
	0d1-Cy-Cy-10-Ph5-O4d0	4
50	0d1-Cy-10-Ph5-O1-Cy-Cy-2	4
	0d1-Cy-10-Ph5-O1-Cy-Cy-3	4
	Composition ratio total (%)	100
	Tni/°C	82.4
55	$\Delta n(20^\circ\text{C})$	0.074
	η 20/mPa·s	16.1

EP 2 657 754 B1

(continued)

	Liquid crystal composition
$\Delta \varepsilon$ (20°C)	-4.7

[Table 3]

	Example 1	Example 2	Example 3	Example 4
Liquid crystal composition	Liquid crystal composition 1	Liquid crystal composition 1	Liquid crystal composition 1	Liquid crystal composition 1
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.0	99.5	99.4
ID	64	76	17	22
Image sticking	B	B	A	A

[0106] The liquid crystal display devices of Examples 1 to 4 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(COMPARATIVE EXAMPLES 1 to 8)

[0107] Each of comparative liquid crystal composition 1 and comparative liquid crystal composition 2 shown in Table 4 and having negative dielectric anisotropy was interposed in the VA cell used in Example 1, liquid crystal display devices of Comparative Examples 1 to 8 were formed by using the color filters 1 to 4 shown in Table 1, and VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Table 5 and Table 6.

[Table 4]

	Comparative liquid crystal composition 1	Comparative liquid crystal composition 2
0d1-Cy-Cy-3	20	20
3-Cy-Cy-2	15	14
3-Cy-Ph-O1	5	5
0d1-Cy-10-Ph15-O1-Cy-2	8	8
0d1-Cy-10-Ph15-O1-Cy-3	8	8
0d1-Cy-10-Ph15-O1-Cy-4	10	10
0d1-Cy-10-Ph15-O1-Cy-5	10	10
0d1-Cy-Cy-10-Ph15-O3d0	4	4
0d1-Cy-Cy-10-Ph15-O4d0	4	4
0d1-Cy-10-Ph15-O1-Cy-Cy-2	4	4
0d1-Cy-10-Ph15-O1-Cy-Cy-3	4	4
3-Cy-Oc-Ph15-O1		8
3-Cy-Cb1-Ph15-O2	3	
5-Cy-Cb1-Ph15-O2	3	
5-Cy-Cb-Ph15-O2	2	
Composition ratio total	100	100
Tni/°C	81.9	81.3

EP 2 657 754 B1

(continued)

	Comparative liquid crystal composition 1	Comparative liquid crystal composition 2
$\Delta n(20^{\circ}\text{C})$	0.073	0.074
η 20/mPa·s	17.3	16.8
$\Delta \varepsilon(20^{\circ}\text{C})$	-4.6	-4.7

[Table 5]

	Comparative Example 1	Comparative Example 2	Comparative Example 3	Comparative Example 4
Liquid crystal composition	Comparative liquid crystal composition 1	Comparative liquid crystal composition 1	Comparative liquid crystal composition 1	Comparative liquid crystal composition 1
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.4	98.2	98.6	98.4
ID	125	141	118	120
Image sticking	D	D	C	D

[Table 6]

	Comparative Example 5	Comparative Example 6	Comparative Example 7	Comparative Example 8
Liquid crystal composition	Comparative liquid crystal composition 2	Comparative liquid crystal composition 2	Comparative liquid crystal composition 2	Comparative liquid crystal composition 2
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.3	98.1	98.6	98.5
ID	124	150	121	122
Image sticking	D	D	D	D

[0108] The liquid crystal display devices of Comparative Examples 1 to 8 showed lower VHR and larger ID than the liquid crystal display devices of the present invention. Also, in evaluation of image sticking, the occurrence of residual image at an unallowable level was observed.

(COMPARATIVE EXAMPLE 9)

[0109] The liquid crystal composition 1 shown in Table 2 and having negative dielectric anisotropy was interposed in the VA cell used in Example 1, and a liquid crystal display device of Comparative Example 9 was formed by using the comparative color filter 1 shown in Table 1, and VHR and ID of the resultant liquid crystal display device were measured. Also, image sticking of the resultant liquid crystal display device was evaluated. The results are shown in Table 7.

[Table 7]

	Comparative Example 9
Liquid crystal composition	Liquid crystal composition 1
Color filter	Comparative color filter 1
VHR	97.7
ID	208
Image sticking	D

[0110] The liquid crystal display device of Comparative Example 9 showed lower VHR and larger ID than the liquid crystal display devices of the present invention. Also, in evaluation of image sticking, the occurrence of residual image at an unallowable level was observed.

(COMPARATIVE EXAMPLES 10 to 13)

[0111] As in Example 1, comparative liquid crystal composition 3 shown in Table 8 and having negative dielectric anisotropy was interposed, and liquid crystal display devices of Comparative Examples 10 to 13 were formed by using the color filters 1 to 4 shown in Table 1, and VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Table 9.

[Table 8]

	Comparative liquid crystal composition 3
3-Cy-Ph15-O4	11
5-Cy-Ph15-O4	11
2-Cy-Cy-Ph15-1	12
2-Cy-Cy-Ph15-O2	9
3-Cy-Cb1-Ph15-O2	4
3-Cy-Cy-Ph15-1	12
3-Cy-Cy-Ph15-O2	9
5-Cy-Cb1-Ph15-O2	6
5-Cy-Cb-Ph15-O2	18
5-Cy-Cy-Ph15-O2	8
Composition ratio total (%)	100
T_{ni}/°C	118.1
Δn(20°C)	0.105
n_e (20°C)	1.586
Δε (20°C)	-6.4
E_⊥ (20°C)	10.4
K₃/K₁ (20°C)	1.05
K₁/pN(20°C)	20.2

[Table 9]

	Comparative Example 10	Comparative Example 11	Comparative Example 12	Comparative Example 13
Liquid crystal composition	Comparative liquid crystal composition 3	Comparative liquid crystal composition 3	Comparative liquid crystal composition 3	Comparative liquid crystal composition 3
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.5	98.2	98.6	98.6
ID	107	138	107	112
Image sticking	C	D	C	D

[0112] The liquid crystal display devices of Comparative Examples 10 to 13 showed lower VHR and larger ID than the liquid crystal display devices of the present invention. Also, in evaluation of image sticking, the occurrence of residual image at an unallowable level was observed.

(EXAMPLES 5 to 12)

[0113] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 10 was held, and liquid crystal display devices of Examples 5 to 12 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 11 and 12.

[Table 10]

	Liquid crystal composition 2	Liquid crystal composition 3
3-Cy-10-Ph5-O2	11	11
5-Cy-10-Ph5-O2	10	10
0d1-Cy-Cy-3	20	
0d1-Cy-Cy-5		20
0d3-Cy-Cy-3	10	10
3-Cy-1=1-Cy-3	10	10
0d1-Cy-10-Ph5-O1-Cy-3		5
0d1-Cy-Cy-10-Ph5-O3d0		5
0d1-Cy-Cy-10-Ph5-O4d0		5
2-Cy-Cy-10-Ph5-O2	5	5
3-Cy-Cy-10-Ph5-O2	12	12
4-Cy-Cy-10-Ph5-O2	5	5
0d1-Cy-10-Ph5-O1-Cy-Cy-1d0	12	
0d1-Cy-10-Ph5-O1-Cy-Cy-2	5	
0d1-Cy-10-Ph5-O1-Cy-Cy-3		2
Composition ratio total (%)	100	100
Tni/°C	79.6	78.9
$\Delta n(20^\circ\text{C})$	0.074	0.075
η 20/mPa·s	17.8	18.2
$\Delta \varepsilon(20^\circ\text{C})$	-4.8	-4.8

EP 2 657 754 B1

[Table 11]

	Example 5	Example 6	Example 7	Example 8
Liquid crystal composition	Liquid crystal composition 2	Liquid crystal composition 2	Liquid crystal composition 2	Liquid crystal composition 2
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.0	99.7	99.3
ID	68	73	14	28
Image sticking	A	B	A	A

[Table 12]

	Example 9	Example 10	Example 11	Example 12
Liquid crystal composition	Liquid crystal composition 3	Liquid crystal composition 3	Liquid crystal composition 3	Liquid crystal composition 3
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	99.1	99.6	99.4
ID	79	78	19	25
Image sticking	B	B	A	A

[0114] The liquid crystal display devices of Examples 5 to 12 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 13 to 28)

[0115] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 13 was held, and liquid crystal display devices of Examples 13 to 28 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 14 to 17.

[Table 13]

	Liquid crystal composition 4	Liquid crystal composition 5	Liquid crystal composition 6	Liquid crystal composition 7
0d1-Cy-10-Ph5-O3d0				5
0d1-Cy-10-Ph5-O4d0				5
0d1-Cy-Cy-3	10			4
3-Cy-Cy-2	10	18		10
3-Cy-Cy-4		6	15	3
3-Cy-Ph-O2	12	12	15	4
5-Ph-Ph-1	10	3	3	10
0d1-Cy-10-Ph5-O1-Cy-2	10	10	10	
0d1-Cy-10-Ph5-O1-Cy-3	12	12	12	
0d1-Cy-10-Ph5-O1-Cy-4	12	12	12	
0d1-Cy-10-Ph5-O1-Cy-5	10	10	10	
0d1-Cy-Cy-10-Ph5-O1d0				10

EP 2 657 754 B1

(continued)

	Liquid crystal composition 4	Liquid crystal composition 5	Liquid crystal composition 6	Liquid crystal composition 7
5	0d1-Cy-Cy-1O-Ph5-O2d0			10
	0d1-Cy-Cy-1O-Ph5-O3d0			15
	0d1-Cy-Cy-1O-Ph5-O4d0			15
10	3-Cy-Cy-Ph-1	6	3	6
	0d1-Cy-1O-Ph5-O1-Cy-Cy-2	4	4	4
15	0d1-Cy-1O-Ph5-O1-Cy-Cy-3	4	4	4
	Composition ratio total (%)	100	100	100
	T_n/°C	75.5	81.8	83.5
	Δn (20°C)	0.088	0.077	0.078
20	η 20/mPa·s	16	16.5	20.2
	Δε (20°C)	-4.2	-4.2	-4.3

25

[Table 14]

	Example 13	Example 14	Example 15	Example 16
	Liquid crystal composition 4	Liquid crystal composition 4	Liquid crystal composition 4	Liquid crystal composition 4
30	Color filter 1	Color filter 2	Color filter 3	Color filter 4
	VHR	99.0	99.2	99.4
	ID	64	57	26
35	Image sticking	A	A	A

40

[Table 15]

	Example 17	Example 18	Example 19	Example 20
	Liquid crystal composition 5	Liquid crystal composition 5	Liquid crystal composition 5	Liquid crystal composition 5
	Color filter 1	Color filter 2	Color filter 3	Color filter 4
45	VHR	99.1	99.0	99.6
	ID	59	71	16
	Image sticking	A	B	A

50

55

EP 2 657 754 B1

[Table 16]

	Example 21	Example 22	Example 23	Example 24
Liquid crystal composition	Liquid crystal composition 6	Liquid crystal composition 6	Liquid crystal composition 6	Liquid crystal composition 6
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.1	99.6	99.3
ID	64	80	17	26
Image sticking	A	B	A	A

[Table 17]

	Example 25	Example 26	Example 27	Example 28
Liquid crystal composition	Liquid crystal composition 7	Liquid crystal composition 7	Liquid crystal composition 7	Liquid crystal composition 7
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.0	99.5	99.2
ID	53	88	23	42
Image sticking	A	B	A	A

[0116] The liquid crystal display devices of Examples 13 to 28 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 29 to 40)

[0117] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 18 was held, and liquid crystal display devices of Examples 29 to 40 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 19 to 21.

[Table 18]

	Liquid crystal composition 8	Liquid crystal composition 9	Liquid crystal composition 10
2-Cy-2-Nd4-O2		4	4
2-Cy-2-Nd4-O4		4	4
3-Cy-10-Ch3-5	3		
3-Cy-10-Nd4-O4	3	4	4
5-Cy-10-Ch3-5	3		
5-Cy-10-Nd4-O2	2		
5-Cy-10-Nd4-O3	3	4	4
0d1-Cy-Cy-5		23	
0d3-Cy-Cy-3		10	
1d1-Cy-Cy-3		8	
3-Cy-Cy-2	15		
3-Cy-Cy-4	7	6	22
3-Cy-Cy-5	7		22

EP 2 657 754 B1

(continued)

	Liquid crystal composition 8	Liquid crystal composition 9	Liquid crystal composition 10
5	3-Cy-Ph-2	15	15
	3-Cy-Ph-O1	5	
	3-Cy-Ph-O2	5	
10	5-Ph-Ph-1	6	
	2-Cy-Cy-1O-Nd4-O2	3	4
	2-Cy-Cy-1O-Nd4-O4	2	4
	3-Cy-2-Cy-1O-Nd4-O2	4	
15	3-Cy-2-Cy-1O-Nd4-O3	4	
	3-Cy-Cy-1O-Ch3-5	3	
	3-Cy-Cy-1O-Nd4-O4	3	4
20	4-Cy-Cy-1O-Ch3-5	3	
	4-Cy-Cy-1O-Nd4-O2	2	4
	4-Cy-Cy-2-Nd4-O2		6
	3-Cy-Cy-Ph-1	8	3
25	Composition ratio total (%)	100	100
	Tni/°C	92	91
	$\Delta n(20^{\circ}\text{C})$	0.093	0.093
30	η 20/mPa·s	24.9	25.5
	$\Delta \varepsilon (20^{\circ}\text{C})$	-3.3	-3.2

35

[Table 19]

	Example 29	Example 30	Example 31	Example 32
40	Liquid crystal composition	Liquid crystal composition 8	Liquid crystal composition 8	Liquid crystal composition 8
	Color filter	Color filter 1	Color filter 2	Color filter 3
	VHR	98.9	99.2	99.7
	ID	108	95	13
45	Image sticking	B	B	A

50

[Table 20]

	Example 33	Example 34	Example 35	Example 36
55	Liquid crystal composition	Liquid crystal composition 9	Liquid crystal composition 9	Liquid crystal composition 9
	Color filter	Color filter 1	Color filter 2	Color filter 3
	VHR	99.2	99.2	99.6
	ID	98	96	19

EP 2 657 754 B1

(continued)

	Example 33	Example 34	Example 35	Example 36
Liquid crystal composition	Liquid crystal composition 9	Liquid crystal composition 9	Liquid crystal composition 9	Liquid crystal composition 9
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
Image sticking	B	B	A	A

[Table 21]

	Example 37	Example 38	Example 39	Example 40
Liquid crystal composition	Liquid crystal composition 10	Liquid crystal composition 10	Liquid crystal composition 10	Liquid crystal composition 10
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.1	99.5	99.2
ID	103	107	21	45
Image sticking	B	B	A	A

[0118] The liquid crystal display devices of Examples 29 to 40 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 41 to 48)

[0119] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 22 was held, and liquid crystal display devices of Examples 41 to 48 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 23 and 24.

[Table 22]

	Liquid crystal composition 11	Liquid crystal composition 12
3-Cy-10-Ch3-5	2	
3-Cy-2-Ph5-O2	6	10
3-Cy-Ph5-O2		10
4-Cy-10-Nd4-O2	5	5
5-Cy-10-Ch3-5	2	
0d1-Cy-Cy-5		16
3-Cy-1=1-Cy-3		10
3-Cy-Cy-2	15	
3-Cy-Cy-4	7	
3-Cy-Cy-5	7	
3-Cy-Ph-O1	6	
3-Cy-2-Cy-10-Nd4-O2	3	
3-Cy-2-Cy-10-Nd4-O3	3	
3-Cy-Cy-10-Ch3-5	2	
3-Cy-Cy-2-Ph5-O2	7	10

EP 2 657 754 B1

(continued)

	Liquid crystal composition 11	Liquid crystal composition 12
5	3-Cy-Cy-Ph5-1	7
	3-Cy-Cy-Ph5-O2	7
	4-Cy-Cy-10-Ch3-5	2
10	5-Cy-Cy-10-Nd4-O3	5
	0d1-Cy-Cy-Ph-1	14
	3-Cy-Cy-Ph-1	14
	Composition ratio total (%)	100
15	Tni/°C	87
	Δn(20°C)	0.086
	η 20/mPa·s	24.2
20	Δε (20°C)	-2.7

[Table 23]

	Example 41	Example 42	Example 43	Example 44
25	Liquid crystal composition 11	Liquid crystal composition 11	Liquid crystal composition 11	Liquid crystal composition 11
	Color filter 1	Color filter 2	Color filter 3	Color filter 4
30	VHR	99.4	99.2	99.7
	ID	82	94	12
	Image sticking	A	B	A

[Table 24]

	Example 45	Example 46	Example 47	Example 48
40	Liquid crystal composition 12	Liquid crystal composition 12	Liquid crystal composition 12	Liquid crystal composition 12
	Color filter 1	Color filter 2	Color filter 3	Color filter 4
45	VHR	99.3	99.4	99.8
	ID	102	76	10
	Image sticking	B	A	A

[0120] The liquid crystal display devices of Examples 41 to 48 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 49 to 60)

[0121] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 25 was held, and liquid crystal display devices of Examples 49 to 60 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 26 to 28.

EP 2 657 754 B1

[Table 25]

	Liquid crystal composition 13	Liquid crystal composition 14	Liquid crystal composition 15
5	3-Cy-10-Ch3-5	3	
	3-Cy-10-Nd4-O4	3	4
	5-Cy-10-Ch3-5	3	
10	5-Cy-10-Nd4-O2	2	4
	5-Cy-10-Nd4-O3	3	4
	3-Cy-Cy-2	7	21
	3-Cy-Cy-4	11	7
15	3-Cy-Cy-5	11	7
	3-Cy-Ph-2		7
	3-Cy-Ph-O1	7	13
20	3-Cy-Ph-O2	7	13
	5-Ph-Ph-1	6	13
	2-Cy-Cy-10-Nd4-O2	3	4
	2-Cy-Cy-10-Nd4-O4	2	
25	3-Cy-2-Cy-10-Nd4-O2	3	4
	3-Cy-2-Cy-10-Nd4-O3	3	4
	3-Cy-Cy-10-Ch3-5	2	3
30	3-Cy-Cy-10-Nd4-O4	3	4
	4-Cy-Cy-10-Ch3-5	2	3
	4-Cy-Cy-10-Nd4-O2	2	
35	3-Cy-Cy-Ph-1	8	9
	3-Cy-Ph-Ph-1	9	7
	Composition ratio total (%)	100	100
40	Tni/°C	86	81
	Δn (20°C)	0.091	0.082
	η 20/mPa·s	20	19.2
	$\Delta \varepsilon$ (20°C)	-2.7	-2.5

45

[Table 26]

	Example 49	Example 50	Example 51	Example 52
50	Liquid crystal composition	Liquid crystal composition 13	Liquid crystal composition 13	Liquid crystal composition 13
	Color filter	Color filter 1	Color filter 2	Color filter 3
	VHR	99.2	99.1	99.6
55	ID	94	98	21
	Image sticking	A	B	A

[Table 27]

	Example 53	Example 54	Example 55	Example 56
Liquid crystal composition	Liquid crystal composition 14	Liquid crystal composition 14	Liquid crystal composition 14	Liquid crystal composition 14
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	98.9	99.6	99.3
ID	102	107	24	38
Image sticking	B	B	A	A

[Table 28]

	Example 57	Example 58	Example 59	Example 60
Liquid crystal composition	Liquid crystal composition 15	Liquid crystal composition 15	Liquid crystal composition 15	Liquid crystal composition 15
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.0	99.5	99.4
ID	89	99	32	34
Image sticking	A	B	A	A

[0122] The liquid crystal display devices of Examples 49 to 60 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 61 to 76)

[0123] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 29 was held, and liquid crystal display devices of Examples 61 to 76 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 30 to 33.

[Table 29]

	Liquid crystal composition 16	Liquid crystal composition 17	Liquid crystal composition 18	Liquid crystal composition 19
3-Cy-10-Ph5-O2		2		11
5-Cy-10-Ph5-O2		2		10
0d1-Cy-Cy-3			30	
0d1-Cy-Cy-5	4	4	10	20
0d3-Cy-Cy-3				10
3-Cy-1=1-Cy-3				10
3-Cy-Cy-2	4	4		
3-Cy-Cy-4	4	4		
3-Cy-Cy-5	4	4		
3-Cy-Ph-O1	2	2		
5-Ph-Ph-1	20	20		
0d1-Cy-10-Ph5-O1-Cy-1d0				12

EP 2 657 754 B1

(continued)

	Liquid crystal composition 16	Liquid crystal composition 17	Liquid crystal composition 18	Liquid crystal composition 19
5	0d1-Cy-1O-Ph5-O1-Cy-2	7	8	10
	0d1-Cy-1O-Ph5-O1-Cy-3	7	8	12
	0d1-Cy-1O-Ph5-O1-Cy-4	7	8	12
10	0d1-Cy-1O-Ph5-O1-Cy-5	5		10
	0d1-Cy-Cy-1O-Ph5-O3d0	13		6
	0d1-Cy-Cy-1O-Ph5-O4d0	13		6
15	2-Cy-Cy-1O-Ph5-O2		13	
	3-Cy-Cy-1O-Ph5-O2		13	
	4-Cy-Cy-1O-Ph5-O2		13	
20	0d1-Cy-1O-Ph5-O1-Cy-Cy-2	5		2
	0d1-Cy-1O-Ph5-O1-Cy-Cy-3	5	5	2
	Composition ratio total (%)	100	110	100
25	Tni/°C	80.5	79.8	83.6
	Δn(20°C)	0.102	0.101	0.075
	η 20/mPa·s	23.9	27.6	15.1
30	Δε (20°C)	-4.1	-4.1	-4.8

[Table 30]

	Example 61	Example 62	Example 63	Example 64
35	Liquid crystal composition	Liquid crystal composition 16	Liquid crystal composition 16	Liquid crystal composition 16
	Color filter	Color filter 1	Color filter 2	Color filter 3
40	VHR	99.1	99.0	99.4
	ID	86	98	31
	Image sticking	A	B	A

[Table 31]

	Example 65	Example 66	Example 67	Example 68
45	Liquid crystal composition	Liquid crystal composition 17	Liquid crystal composition 17	Liquid crystal composition 17
	Color filter	Color filter 1	Color filter 2	Color filter 3
50	VHR	99.2	99.0	99.4
	ID	87	96	34
55	Image sticking	A	B	A

EP 2 657 754 B1

[Table 32]

	Example 69	Example 70	Example 71	Example 72
Liquid crystal composition	Liquid crystal composition 18	Liquid crystal composition 18	Liquid crystal composition 18	Liquid crystal composition 18
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.2	99.5	99.3
ID	94	89	28	37
Image sticking	B	A	A	A

[Table 33]

	Example 73	Example 74	Example 75	Example 76
Liquid crystal composition	Liquid crystal composition 19	Liquid crystal composition 19	Liquid crystal composition 19	Liquid crystal composition 19
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	99.0	99.6	99.4
ID	102	97	19	34
Image sticking	B	B	A	A

[0124] The liquid crystal display devices of Examples 61 to 76 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 77 to 92)

[0125] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 34 was held, and liquid crystal display devices of Examples 77 to 92 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 35 to 38.

[Table 34]

	Liquid crystal composition 20	Liquid crystal composition 21	Liquid crystal composition 22	Liquid crystal composition 23
2-Cy-2-Nd4-O2		10		10
3-Cy-10-Ch3-O5	7		10	
3-Cy-2-Nd4-O4		10		10
4-Cy-2-Nd4-O2		10		10
5-Cy-10-Ch3-O5	7		10	
5-Cy-2-Nd4-O2		5		5
0d1-Cy-Cy-3	30	40		
0d1-Cy-Cy-5			15	20
3-Cy-Cy-4		15	15	14
3-Cy-Ph-O2				10
5-Ph-Ph-1	10		10	
2-Cy-Cy-2-Nd4-O2		4		4

EP 2 657 754 B1

(continued)

	Liquid crystal composition 20	Liquid crystal composition 21	Liquid crystal composition 22	Liquid crystal composition 23
5	3-Cy-Cy-10-Ph5-O1	4	3	
	3-Cy-Cy-10-Ph5-O2	9	5	
	3-Cy-Cy-2-Ph5-O2	10	10	
10	3-Cy-Cy-Ph5-O2	10	10	
	4-Cy-Cy-10-Ph5-O1	4	3	
	4-Cy-Cy-2-Nd4-O2	4		4
	0d1-Cy-Cy-Ph-1	6	9	4
15	0d1-Cy-Ph-Ph-3	5		3
	0d3-Cy-Cy-Ph-1	6		6
	組成比計 (%)	100	100	100
20	Composition ratio total (%)	82.7	82.3	80.9
	$\Delta n(20^\circ\text{C})$	0.087	0.098	0.084
	η 20/mPa·s	19.4	18.1	26
25	$\Delta \varepsilon (20^\circ\text{C})$	-3.1	-3.1	-3.2

[Table 35]

	Example 77	Example 78	Example 79	Example 80
30	Liquid crystal composition	Liquid crystal composition 20	Liquid crystal composition 20	Liquid crystal composition 20
	Color filter	Color filter 1	Color filter 2	Color filter 3
35	VHR	99.2	99.1	99.7
	ID	71	76	14
	Image sticking	A	B	A

[Table 36]

	Example 81	Example 82	Example 83	Example 84
45	Liquid crystal composition	Liquid crystal composition 21	Liquid crystal composition 21	Liquid crystal composition 21
	Color filter	Color filter 1	Color filter 2	Color filter 3
	VHR	99.1	98.9	99.4
50	ID	97	104	36
	Image sticking	B	B	A

55

EP 2 657 754 B1

[Table 37]

	Example 85	Example 86	Example 87	Example 88
Liquid crystal composition	Liquid crystal composition 22	Liquid crystal composition 22	Liquid crystal composition 22	Liquid crystal composition 22
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.2	99.6	99.4
ID	68	74	27	34
Image sticking	A	B	A	A

[Table 38]

	Example 89	Example 90	Example 91	Example 92
Liquid crystal composition	Liquid crystal composition 23	Liquid crystal composition 23	Liquid crystal composition 23	Liquid crystal composition 23
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.0	99.5	99.1
ID	100	106	35	86
Image sticking	B	B	A	A

[0126] The liquid crystal display devices of Examples 77 to 92 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 93 to 100)

[0127] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 39 was held, and liquid crystal display devices of Examples 93 to 100 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 40 and 41.

[Table 39]

	Liquid crystal composition 24	Liquid crystal composition 25
3-Cy-Ph5-O4	9	10
3O-Ph5-Ph5-O2	8	
5-Cy-Ph5-O4	9	10
0d1-Cy-Cy-5	5	
0d1-O-Cy-Cy-Ph5-1		10
0d2-Cy-Cy-Ph5-O2	10	
0d2-O-Cy-Cy-Ph5-1		10
1d2-O-Cy-Cy-Ph5-1		8
2-Cy-Cy-Ph5-1	11	12
2-Cy-Cy-Ph5-O2	9	10
3-Cy-Cy-Ph5-1	10	11
3-Cy-Cy-Ph5-O2	10	10
3-O-Cy-Cy-Ph5-O2	10	
5-Cy-Cy-Ph5-O2	9	9

EP 2 657 754 B1

(continued)

	Liquid crystal composition 24	Liquid crystal composition 25
Composition ratio total (%)	100	100
Tni/°C	101.2	103.9
$\Delta n(20^\circ\text{C})$	0.100	0.098
ne (20°C)	1.581	1.579
$\Delta \varepsilon (20^\circ\text{C})$	-7.5	-5.5
$\varepsilon \perp (20^\circ\text{C})$	11.9	9.5
K3/K1 (20°C)	1.08	1.16
K1/pN (20°C)	15.8	16.5

[Table 40]

	Example 93	Example 94	Example 95	Example 96
Liquid crystal composition	Liquid crystal composition 24	Liquid crystal composition 24	Liquid crystal composition 24	Liquid crystal composition 24
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.3	99.8	99.4
ID	59	61	11	52
Image sticking	A	A	A	A

[Table 41]

	Example 97	Example 98	Example 99	Example 100
Liquid crystal composition	Liquid crystal composition 25	Liquid crystal composition 25	Liquid crystal composition 25	Liquid crystal composition 25
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.3	99.7	99.3
ID	68	64	18	47
Image sticking	A	A	A	A

[0128] The liquid crystal display devices of Examples 93 to 100 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 101 to 112)

[0129] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 42 was held, and liquid crystal display devices of Examples 101 to 112 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 43 to 45.

[Table 42]

	Liquid crystal composition 26	Liquid crystal composition 27	Liquid crystal composition 28
3-Cy-Ph5-O4	16	16	16

EP 2 657 754 B1

(continued)

	Liquid crystal composition 26	Liquid crystal composition 27	Liquid crystal composition 28
5	5-Cy-Ph5-O2	12	16
	0d1-Cy-Cy-5	7	4
	0d3-Ph-Ph-1	11	10
10	1d1-Cy-Cy-3	9	8
	2-Cy-Ph-Ph5-O2	13	12
	3-Cy-Cy-Ph5-O2	6	7
	3-Cy-Ph-Ph5-O2	12	12
15	0d1-Cy-Cy-Ph-1	4	4
	3-Cy-Ph-Ph-2	10	11
	Composition ratio total (%)	100	100
20	Tni/°C	80.2	80.3
	Δn(20°C)	0.128	0.129
	ne(20°C)	1.492	1.491
25	Δε(20°C)	-3.3	-3.5
	ε⊥(20°C)	6.8	7.1
	K3/K1(20°C)	0.99	1.01
30	K1/pN(20°C)	16.7	15.2
		16.4	

[Table 43]

	Example 101	Example 102	Example 103	Example 104
35	Liquid crystal composition	Liquid crystal composition 26	Liquid crystal composition 26	Liquid crystal composition 26
	Color filter	Color filter 1	Color filter 2	Color filter 3
	VHR	99.3	99.1	99.6
40	ID	57	78	28
	Image sticking	A	A	A

[Table 44]

	Example 105	Example 106	Example 107	Example 108
50	Liquid crystal composition	Liquid crystal composition 27	Liquid crystal composition 27	Liquid crystal composition 27
	Color filter	Color filter 1	Color filter 2	Color filter 3
	VHR	99.2	99.1	99.6
	ID	69	82	26
55	Image sticking	A	B	A

EP 2 657 754 B1

[Table 45]

	Example 109	Example 110	Example 111	Example 112
Liquid crystal composition	Liquid crystal composition 28	Liquid crystal composition 28	Liquid crystal composition 28	Liquid crystal composition 28
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.2	99.5	99.3
ID	54	80	30	53
Image sticking	A	A	A	A

[0130] The liquid crystal display devices of Examples 101 to 112 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 113 to 124)

[0131] As in Example 1, each of liquid crystals with negative dielectric anisotropy shown in Table 46 was held, and liquid crystal display devices of Examples 101 to 112 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Tables 47 to 49.

[Table 46]

	Liquid crystal composition 29	Liquid crystal composition 30	Liquid crystal composition 31
3-Cy-Ph5-O4	16	16	16
5-Cy-Ph5-O2	12	16	16
0d1-Cy-Cy-5	12	10	20
0d3-Ph-Ph-1	6	4	
1d1-Cy-Cy-3	9	8	
2-Ph-Ph5-Ph-2	13	12	12
3-Cy-Cy-Ph5-O2	6	7	10
3-Cy-Ph-Ph5-O2	12	12	12
0d1-Cy-Cy-Ph-1	4	4	4
3-Cy-Ph-Ph-2	10	11	10
Composition ratio total (%)	100	100	100
Tni/°C	81.7	81.2	80.9
Δn(20°C)	0.127	0.130	0.131
ne (20°C)	1.494	1.495	1.498
Δε (20°C)	-3.0	-3.3	-3.6
ε⊥ (20°C)	6.9	7.2	7.5
K3/K1 (20°C)	1.02	1.03	1.06
K1/pN(20°C)	15.8	15.6	16.2

EP 2 657 754 B1

[Table 47]

	Example 113	Example 114	Example 115	Example 116
Liquid crystal composition	Liquid crystal composition 29	Liquid crystal composition 29	Liquid crystal composition 29	Liquid crystal composition 29
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.2	99.7	99.5
ID	55	81	18	44
Image sticking	A	B	A	A

[Table 48]

	Example 117	Example 118	Example 119	Example 120
Liquid crystal composition	Liquid crystal composition 30	Liquid crystal composition 30	Liquid crystal composition 30	Liquid crystal composition 30
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.4	99.0	99.5	99.6
ID	42	84	32	27
Image sticking	A	B	A	A

[Table 49]

	121	122	123	124
Liquid crystal composition	Liquid crystal composition 31	Liquid crystal composition 31	Liquid crystal composition 31	Liquid crystal composition 31
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.1	99.7	99.2
ID	54	86	22	61
Image sticking	A	B	A	A

[0132] The liquid crystal display devices of Examples 113 to 124 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 125 to 128)

[0133] As in Example 1, a liquid crystal with negative dielectric anisotropy shown in Table 50 was held, and liquid crystal display devices of Examples 125 to 128 were formed by using the color filters shown in Table 1. VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Table 51.

[Table 50]

	Liquid crystal composition 32
0d1-Cy-Cy-5	20
3-Cy-2-Ph5-02	20
0d1-Cy-Cy-Ph-1	5
5-Cy-2-Ph5-02	20

EP 2 657 754 B1

(continued)

5

10

15

20

	Liquid crystal composition 32
3-Cy-Cy-2-Ph5-02	3
5-Cy-Cy-Ph5-02	3
3-Cy-Ph-Ph5-02	5
3-Ph-Ph-Ph-2	7
4-Ph-Ph-Ph-2	7
3-Cy-Cy-VO-Ph-Cy-3	4
3-Cy-Cy-VO-Ph-Cy-4	3
3-Cy-Cy-VO-Ph-Cy-5	3
Composition ratio total (%)	100
Tni/°C	81.6
Δn(20°C)	0.127
ne(20°C)	1.495
Δε(20°C)	-3.0

25

[Table 51]

30

35

	Example 125	Example 126	Example 127	Example 128
Liquid crystal composition	Liquid crystal composition 32	Liquid crystal composition 32	Liquid crystal composition 32	Liquid crystal composition 32
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.4	99.1	99.5	99.3
ID	59	78	23	45
Image sticking	A	B	A	A

[0134] The liquid crystal display devices of Examples 125 to 128 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

40

(EXAMPLES 129 to 132)

45

[0135] A liquid crystal composition 33 was prepared by mixing 0.3% by mass of 2-methyl-acrylic acid 4'-{2-[4-(2-acryloyloxy-ethyl)-phenoxy-carbonyl]-ethyl}-biphenyl-4-yl ester with the liquid crystal composition 1 having negative dielectric anisotropy and used in Example 1. The liquid crystal composition 33 was interposed in a VA cell used in Example 1 and then polymerized by ultraviolet irradiation (3.0 J/cm²) for 600 seconds while a driving voltage was applied between electrodes. Next, liquid crystal display devices of Examples 129 to 132 were formed by using the color filters 1 to 4 shown in Table 1, and VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Table 52.

50

[Table 52]

55

	Example 129	Example 130	Example 131	Example 132
Liquid crystal composition	Liquid crystal composition 33	Liquid crystal composition 33	Liquid crystal composition 33	Liquid crystal composition 33
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	98.8	99.3	99.2

EP 2 657 754 B1

(continued)

	Example 129	Example 130	Example 131	Example 132
Liquid crystal composition	Liquid crystal composition 33	Liquid crystal composition 33	Liquid crystal composition 33	Liquid crystal composition 33
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
ID	78	93	24	43
Image sticking	A	B	A	A

[0136] The liquid crystal display devices of Examples 129 to 132 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

[0137] The same measurement was performed using biphenyl-4,4'-diyl bismethacrylate in place of 2-methyl-acrylic acid 4'-{2-[4-(2-acryloyloxy-ethyl)-phenoxy-carbonyl]-ethyl}-biphenyl-4-yl ester. As a result, like in Examples 129 to 132, high VHR and small ID could be realized, and in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 132 to 135)

[0138] A liquid crystal composition 34 was prepared by mixing 0.3% by mass of biphenyl-4,4'-diyl bismethacrylate with the liquid crystal composition 29 having negative dielectric anisotropy. The liquid crystal composition 34 was interposed in a VA cell used in Example 1 and then polymerized by ultraviolet irradiation (3.0 J/cm²) for 600 seconds while a driving voltage was applied between electrodes. Next, liquid crystal display devices of Examples 133 to 136 were formed by using the color filters 1 to 4 shown in Table 1, and VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Table 53.

[Table 53]

	Example 133	Example 134	Example 135	Examples 136
Liquid crystal composition	Liquid crystal composition 34	Liquid crystal composition 34	Liquid crystal composition 34	Liquid crystal composition 34
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.1	99.5	99.4
ID	76	90	22	40
Image sticking	A	B	A	A

[0139] The liquid crystal display devices of Examples 132 to 135 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed.

(EXAMPLES 136 to 139)

[0140] A liquid crystal composition 35 was prepared by mixing 0.3% by mass of 3-fluorobiphenyl-4,4'-diyl bismethacrylate with the liquid crystal composition 32 having negative dielectric anisotropy. The liquid crystal composition 35 was interposed in a VA cell used in Example 1 and then polymerized by ultraviolet irradiation (3.0 J/cm²) for 600 seconds while a driving voltage was applied between electrodes. Next, liquid crystal display devices of Examples 136 to 139 were formed by using the color filters 1 to 4 shown in Table 1, and VHR and ID of the resultant liquid crystal display devices were measured. Also, image sticking of the resultant liquid crystal display devices was evaluated. The results are shown in Table 54.

[Table 54]

	Example 136	Example 137	Example 138	Example 139
Liquid crystal composition	Liquid crystal composition 35	Liquid crystal composition 35	Liquid crystal composition 35	Liquid crystal composition 35
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	98.9	99.5	99.6
ID	77	92	23	44
Image sticking	A	B	A	A

[0141] The liquid crystal display devices of Examples 136 to 139 could realize high VHR and small ID. Also, in evaluation of image sticking, no residual image or slight residual image at an allowable level was observed. Brief Description of Drawings

[0142]

[Fig. 1] Fig. 1 is a drawing showing an example of a general liquid crystal display device.

[Fig. 2] Fig. 2 is a drawing showing an example of a liquid crystal display device according to the present invention.

Reference Signs List


[0143]

- 1 substrate
- 2 color filter layer
- 2a color filter layer containing specified dye and/or pigment
- 3a transparent electrode layer (common electrode)
- 3b pixel electrode layer
- 4 alignment film
- 5 liquid crystal layer
- 5a liquid crystal layer containing specified liquid crystal composition


Claims

1. A liquid crystal display device comprising a first substrate, a second substrate, a liquid crystal composition layer held between the first substrate and the second substrate, a color filter including a black matrix and at least RGB three-color pixel portions, a pixel electrode, and a common electrode, wherein the liquid crystal composition layer includes a liquid crystal composition which contains at least one compound selected from a compound group represented by general formula (LC1) to general formula (LC4),

(LC1)




(LC2)




(continued)


(LC3)

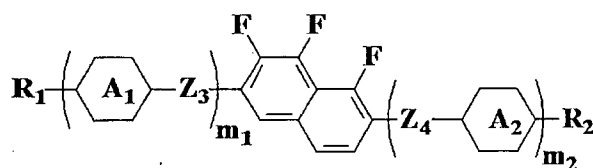

(LC4)

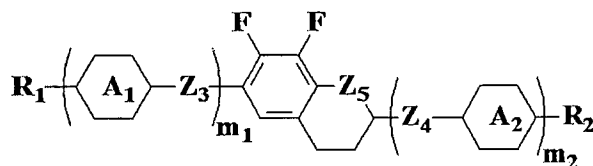

(in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 15 carbon atoms, at least one CH_2 group in the alkyl group may be substituted by $-O-$, $-CH=CH-$, $-CO-$, $-OCO-$, $-COO-$, $-C\equiv C-$, $-CF_2O-$, or $-OCF_2-$ so that oxygen atoms are not directly adjacent to each other, at least one hydrogen atom in the alkyl group may be arbitrarily substituted by a halogen, A_1 and A_2 each independently represent any one of the following structures,




(at least one CH_2 group in a cyclohexane ring in the structures may be substituted by an oxygen atom, at least one CH group in a benzene ring in the structures may be substituted by a nitrogen atom, and at least one hydrogen atom in the structures may be substituted by Cl , CF_3 , or OCF_3), Z_1 to Z_4 each independently represent a single bond, $-CH=CH-$, $-C\equiv C-$, $-CH_2CH_2-$, $-(CH_2)_4-$, $-COO-$, $-OCH_2-$, $-CH_2O-$, $-OCF_2-$, or $-CF_2O-$, Z_5 represents a CH_2 group or an oxygen atom, at least one of Z_1 and Z_2 present is not a single bond, l_1 represents 0 or 1, m_1 and m_2 each independently represent 0 to 3, and $m_1 + m_2$ is 1, 2, or 3), and the RGB three-color pixel portions include, as colorants, a diketopyrrolopyrrole pigment and/or anionic red organic dye in a R pixel portion, at least one selected from the group consisting of a halogenated copper phthalocyanine pigment, a phthalocyanine green dye, and a mixture of a phthalocyanine blue dye and an azo yellow organic dye in a G pixel portion, and a ϵ -type copper phthalocyanine pigment and/or cationic blue organic dye in a B pixel portion.


2. The liquid crystal display device according to Claim 1, wherein the RGB three-color pixel portions include, as colorants, C. I. Solvent Red 124 in the R pixel portion, a mixture of C. I. Solvent Blue 67 and C. I. Solvent Yellow 162 in the G pixel portion, and C. I. Solvent Blue 7 in the B pixel portion.
3. The liquid crystal display device according to Claim 1, wherein the RGB three-color pixel portions include, as colorants, C. I. Pigment Red 254 in the R pixel portion, C. I. Pigment Green 7 and/or 36 in the G pixel portion, and C. I. Pigment Blue 15:6 in the B pixel portion.
4. The liquid crystal display device according to any one of Claims 1 to 3, wherein the R pixel portion further contains at least one organic dye/pigment selected from the group consisting of C. I. Pigment Red 177, 242, 166, 167, and 179, C. I. Pigment Orange 38 and 71, C. I. Pigment Yellow 150, 215, 185, 138, and 139, C. I. Solvent Red 89, C. I. Solvent Orange 56, and C. I. Solvent Yellow 21, 82, 83:1, 33, and 162.
5. The liquid crystal display device according to any one of Claims 1 to 4, wherein the G pixel portion further contains at least one organic dye/pigment selected from the group consisting of C. I. Pigment Yellow 150, 215, 185, and 138, and C. I. Solvent Yellow 21, 82, 83:1, and 33.
6. The liquid crystal display device according to any one of Claims 1 to 5, wherein the B pixel portion further contains at least one organic dye/pigment selected from the group consisting of C. I. Pigment Blue 1, C. I. Pigment Violet 23, C. I. Basic Blue 7, C. I. Basic Violet 10, C. I. Acid Blue 1, 90, and 83, and C. I. Direct Blue 86.
7. The liquid crystal display device according to any one of Claims 1 to 6, wherein the color filter includes a black

matrix, RGB three-color pixel portions, and a Y pixel portion, and contains, as a colorant in the Y pixel portion, at least one yellow organic dye/pigment selected from the group consisting of C. I. Pigment Yellow 150, 215, 185, 138, and 139, and C. I. Solvent Yellow 21, 82, 83:1, 33, and 162.

- 5 8. The liquid crystal display device according to any one of Claims 1 to 7, wherein the liquid crystal composition layer includes a liquid crystal composition containing at least one compound represented by general formula (LC5),



15 (in the formula, R_1 and R_2 each independently represent an alkyl group having 1 to 15 carbon atoms, at least one CH_2 group in the alkyl group may be substituted by -O-, -CH=CH-, -CO-, -OCO-, -COO-, -C=C-, -CF₂O-, or -OCF₂- so that oxygen atoms are not directly adjacent to each other, at least one hydrogen atom in the alkyl group may be arbitrarily substituted by a halogen, B_1 to B_3 each independently represent any one of the following,

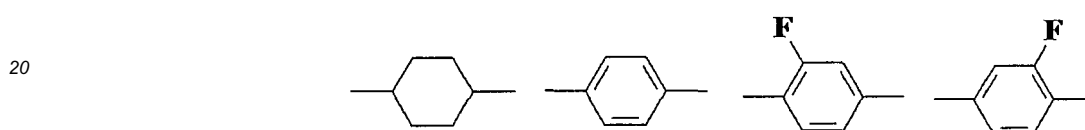

25 (in the formulae, at least one CH_2CH_2 group in a cyclohexane ring may be substituted by -CH=CH-, -CF₂O-, or -OCF₂-, and at least one CH group in a benzene ring may be substituted by a nitrogen atom), Z_3 and Z_4 each independently represent a single bond, -CH=CH-, -C=C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCH₂-, -CH₂O-, -OCF₂-, or -CF₂O-, at least one of Z_1 and Z_2 is not a single bond, and m_1 represents 0 to 3).

- 30 9. The liquid crystal display device according to any one of Claims 1 to 8, wherein the general formula (LC1) represents at least one compound selected from the group consisting of compounds represented by general formula (LC1)-1 to general formula (LC1)-7 below,

(LC1-1)



(LC1-2)



(LC1-3)



(LC1-4)




(LC1-5)




(continued)

(LC1-6)




(LC1-7)




(in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, an alkenyl group having 2 to 7 carbon atoms, or an alkenyloxy group having 2 to 7 carbon atoms).

10. The liquid crystal display device according to any one of Claims 1 to 9, wherein the general formula (LC2) represents at least one compound selected from the group consisting of compounds represented by general formula (LC2)-1 to general formula (LC2)-15 below,


(LC2)-1




(LC2)-8




(LC2)-2




(LC2)-9




(LC2)-3




(LC2)-10




(LC2)-4




(LC2)-11




(LC2)-5




(LC2)-12




(LC2)-6




(LC2)-13




(LC2)-7




(LC2)-14




(LC2)-15



(in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, an alkenyl group having 2 to 7 carbon atoms, or an alkenyloxy group having 2 to 7 carbon atoms, Z_1 represents $-\text{CH}_2\text{CH}_2-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$, and A_1 represents any one of the following structures).




5 11. The liquid crystal display device according to any one of Claims 1 to 10, wherein the general formula (LC3) represents at least one compound selected from the group consisting of compounds represented by general formula (LC3)-1 to general formula (LC3)-6 below, and the general formula (LC4) represents at least one compound selected from the group consisting of compounds represented by general formula (LC4)-1 to general formula (LC4)-4 below,

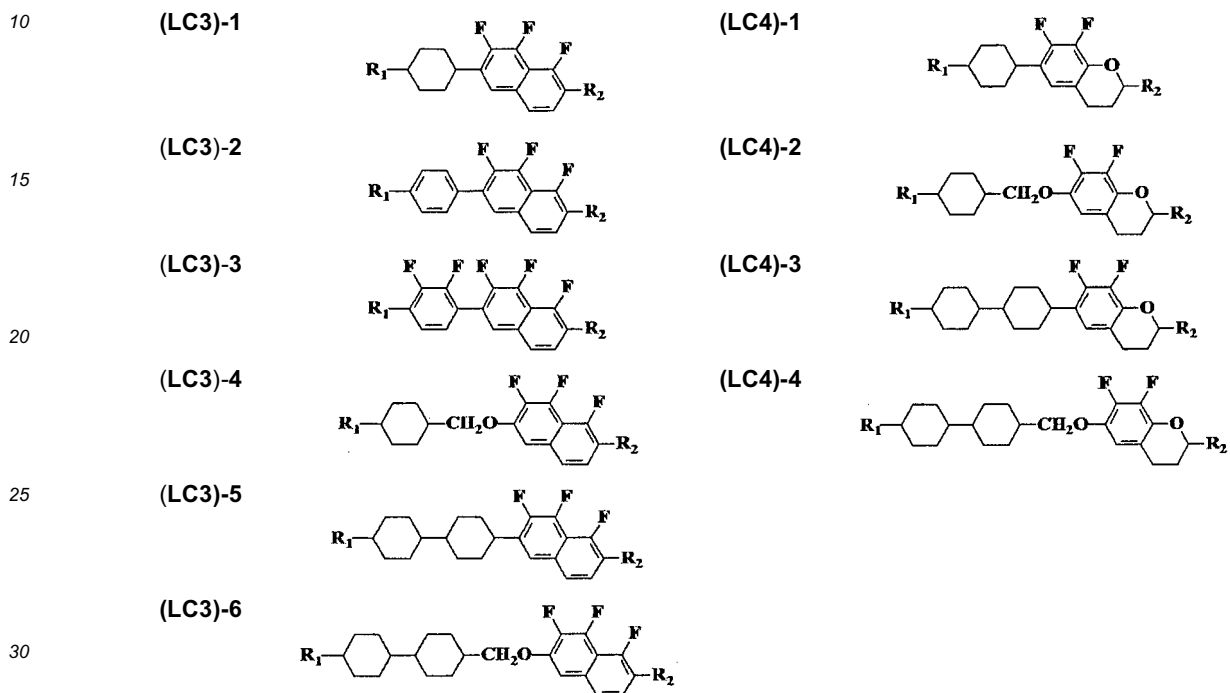

35 (in the formulae, R_1 and R_2 each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, an alkenyl group having 2 to 7 carbon atoms, or an alkenyloxy group having 2 to 7 carbon atoms).


40 12. The liquid crystal display device according to Claim 8, wherein the general formula (LC5) represents at least one compound selected from the group consisting of compounds represented by general formula (LC5)-1 to general formula (LC5)-13,

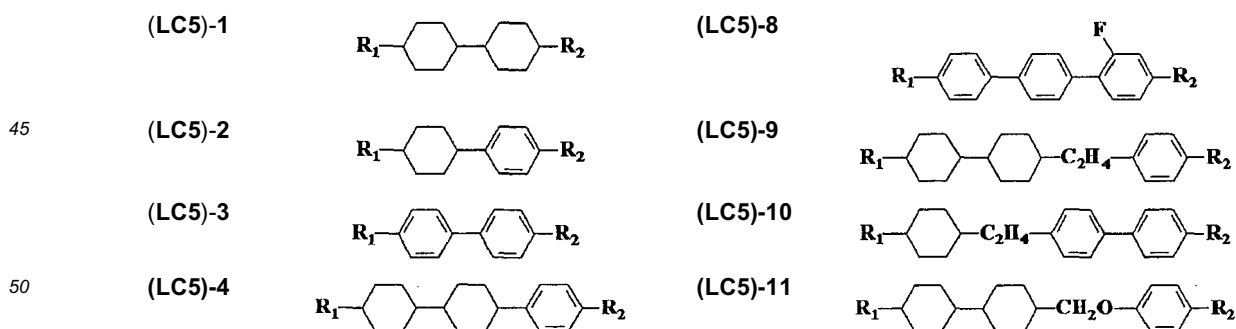


55

(continued)


(LC5)-5




(LC5)-12




(LC5)-6



(LC5)-13




(LC5)-7



(in the formulae, R₁ and R₂ each independently represent an alkyl group having 1 to 7 carbon atoms, an alkoxy group having 1 to 7 carbon atoms, an alkenyl group having 2 to 7 carbon atoms, or an alkenyloxy group having 2 to 7 carbon atoms).


13. The liquid crystal display device according to any one of Claims 1 to 12, wherein the liquid crystal composition layer includes a polymer produced by polymerizing the liquid crystal composition containing at least one polymerizable compound.
14. The liquid crystal display device according to Claim 13, wherein the polymerizable compound is a disk-shaped liquid crystal compound having a structure in which a benzene derivative, a triphenylene derivative, a truxene derivative, a phthalocyanine derivative, or a cyclohexane derivative serves as a central mother nucleus of a molecule and is radially substituted by linear alkyl groups, linear alkoxy groups, or substituted benzoyloxy groups as side chains.
15. The liquid crystal display device according to Claim 13, wherein the polymerizable compound is a polymerizable compound represented by general formula (PC1),






(in the formula, P₁ represents a polymerizable functional group, Sp₁ represents a spacer group having 0 to 20 carbon atoms, Q₁ represents a single bond, -O-, -NH-, -NHCOO-, -OCONH-, -CH=CH-, -CO-, -COO-, -OCO-, -OCOO-, -OOCO-, -CH=CH-, -CH=CH-COO-, -OCO-CH=CH-, or -C=C-, n₁ and n₂ each represent 1, 2, or 3, MG represents a mesogenic group or a mesogeneity supporting group, R₃ represents a halogen atom, a cyano group, or an alkyl group having 1 to 25 carbon atoms, at least one CH₂ group in the alkyl group may be substituted by -O-, -S-, -NH-, -N(CH₃)-, -CO-, -COO-, -OCO-, -OCOO-, -SCO-, -COS-, or -C≡C- so that oxygen atoms are not directly adjacent to each other, and alternatively R₃ represents P₂-Sp₂=Q₂ (wherein P₂, Sp₂, and Q₂ represent the same meanings as P₁, Sp₁, and Q₁, respectively).

Patentansprüche


1. Flüssigkristallanzeigergerät, welches ein erstes Substrat, ein zweites Substrat, eine Flüssigkristallzusammensetzungsschicht, die zwischen dem ersten Substrat und dem zweiten Substrat gehalten wird, einen Farbfilter, der eine Black Matrix und mindestens RGB-Dreifarben-Pixelbereiche einschließt, eine Pixelelektrode und eine gemeinsame Elektrode, umfasst, wobei die Flüssigkristallzusammensetzungsschicht eine Flüssigkristallzusammensetzung einschließt, welche mindestens eine Verbindung, ausgewählt aus einer Verbindungsgruppe, dargestellt durch allgemeine Formel (LC1) bis allgemeine Formel (LC4), beinhaltet,



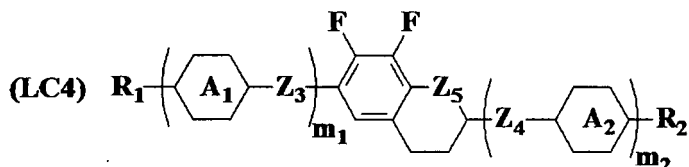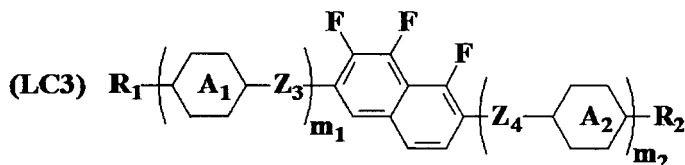

(in den Formeln stellen R_1 und R_2 jeweils unabhängig eine Alkylgruppe mit 1 bis 15 Kohlenstoffatomen dar, mindestens eine CH_2 -Gruppe in der Alkylgruppe kann durch $-\text{O}-$, $-\text{CH}=\text{CH}-$, $-\text{CO}-$, $-\text{OCO}-$, $-\text{COO}-$, $-\text{C}=\text{C}-$, $-\text{CF}_2\text{O}-$ oder $-\text{OCF}_2-$ substituiert sein, so dass Sauerstoffatome nicht direkt benachbart zueinander sind, mindestens ein Wasserstoffatom in der Alkylgruppe kann beliebig substituiert durch ein Halogen sein, A_1 und A_2 stellen jeweils unabhängig irgendeine der folgenden Strukturen dar,

25



(mindestens eine CH_2 -Gruppe in einem Cyclohexanring in den Strukturen kann durch ein Sauerstoffatom ersetzt sein, mindestens eine CH -Gruppe in einem Benzolring in den Strukturen kann durch ein Stickstoffatom ersetzt sein und mindestens ein Wasserstoffatom in den Strukturen kann durch Cl , CF_3 oder OCF_3 ersetzt sein), Z_1 bis Z_4 stellen jeweils unabhängig eine Einzelbindung, $-\text{CH}=\text{CH}-$, $-\text{C}=\text{C}-$, $-\text{CH}_2\text{CH}_2-$, $-(\text{CH}_2)_4-$, $-\text{COO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$ oder $-\text{CF}_2\text{O}-$ dar, Z_5 stellt eine CH_2 -Gruppe oder ein Sauerstoffatom dar, mindestens eines von Z_1 und Z_2 , das vorhanden ist, ist keine Einzelbindung, l_1 stellt 0 oder 1 dar, m_1 und m_2 stellen jeweils unabhängig 0 bis 3 dar und $m_1 + m_2$ ist 1, 2 oder 3), und die RGB-Dreifarb-Pixelbereiche als Färbemittel ein Diketopyrrolopyrrolpigment und/oder einen anionischen, roten, organischen Farbstoff in einem R-Pixelbereich, mindestens ein(en), ausgewählt aus der Gruppe, bestehend aus einem halogenierten Kupferphthalocyaninpigment, einem Phthalocyanin grünen Farbstoff und einer Mischung aus einem Phthalocyanin blauen Farbstoff und einem Azo, gelben, organischen Farbstoff, in einem G-Pixelbereich und ein ϵ -Typ Kupferphthalocyaninpigment und/oder einen kationischen, blauen, organischen Farbstoff in einem B-Pixelbereich einschließen.

35


40

- 45
2. Flüssigkristallanzeigegerät gemäß Anspruch 1, wobei die RGB-Dreifarb-Pixelbereiche als Färbemittel C. I. Solvent Red 124 in dem R-Pixelbereich, eine Mischung aus C. I. Solvent Blue 67 und C. I. Solvent Yellow 162 in dem G-Pixelbereich und C. I. Solvent Blue 7 in dem B-Pixelbereich einschließen.
 3. Flüssigkristallanzeigegerät gemäß Anspruch 1, wobei die RGB-Dreifarb-Pixelbereiche als Färbemittel C. I. Pigment Red 254 in dem R-Pixelbereich, C. I. Pigment Green 7 und/oder 36 in dem G-Pixelbereich und C. I. Pigment Blue 15:6 in dem B-Pixelbereich einschließen.
 4. Flüssigkristallanzeigegerät gemäß einem der Ansprüche 1 bis 3, wobei der R-Pixelbereich zusätzlich mindestens einen organischen Farbstoff/ein organisches Pigment, ausgewählt aus der Gruppe, bestehend aus C. I. Pigment Red 177, 242, 166, 167 und 179, C. I. Pigment Orange 38 und 71, C. I. Pigment Yellow 150, 215, 185, 138 und 139, C. I. Solvent Red 89, C. I. Solvent Orange 56 und C. I. Solvent Yellow 21, 82, 83:1, 33 und 162, beinhaltet.
 5. Flüssigkristallanzeigegerät gemäß einem der Ansprüche 1 bis 4, wobei der G-Pixelbereich zusätzlich mindestens
- 55


EP 2 657 754 B1

einen organischen Farbstoff/ein organisches Pigment, ausgewählt aus der Gruppe, bestehend aus C. I. Pigment Yellow 150, 215, 185 und 138 und C. I. Solvent Yellow 21, 82, 83:1 und 33, beinhaltet.

- 5
6. Flüssigkristallanzeigegerät gemäß einem der Ansprüche 1 bis 5, wobei der B-Pixelbereich zusätzlich mindestens einen organischen Farbstoff/ein organisches Pigment, ausgewählt aus der Gruppe, bestehend aus C. I. Pigment Blue 1, C. I. Pigment Violet 23, C. I. Basic Blue 7, C. I. Basic Violet 10, C. I. Acid Blue 1, 90 und 83 und C. I. Direct Blue 86, beinhaltet.
- 10
7. Flüssigkristallanzeigegerät gemäß einem der Ansprüche 1 bis 6, wobei der Farbfilter eine Black Matrix, RGB-Dreifarben-Pixelbereiche und einen Y-Pixelbereich einschließt und als ein Färbemittel in dem Y-Pixelbereich mindestens einen gelben organischen Farbstoff/ein gelbes organisches Pigment, ausgewählt aus der Gruppe, bestehend aus C. I. Pigment Yellow 150, 215, 185, 138 und 139 und C. I. Solvent Yellow 21, 82, 83:1, 33 und 162, beinhaltet.
- 15
8. Flüssigkristallanzeigegerät gemäß einem der Ansprüche 1 bis 7, wobei die Flüssigkristallzusammensetzungsschicht eine Flüssigkristallzusammensetzung einschließt, welche mindestens eine Verbindung, dargestellt durch allgemeine Formel (LC5), beinhaltet,




25
(in der Formel stellen R_1 und R_2 jeweils unabhängig eine Alkylgruppe mit 1 bis 15 Kohlenstoffatomen dar, mindestens eine CH_2 -Gruppe in der Alkylgruppe kann durch $-O-$, $-CH=CH-$, $-CO-$, $-OCO-$, $-COO-$, $-C\equiv C-$, $-CF_2O-$ oder $-OCF_2-$ ersetzt sein, so dass die Sauerstoffatome nicht direkt benachbart zueinander sind, mindestens ein Wasserstoffatom in der Alkylgruppe kann beliebig durch ein Halogen ersetzt sein, B_1 bis B_3 stellen jeweils unabhängig irgendeins des folgenden dar,

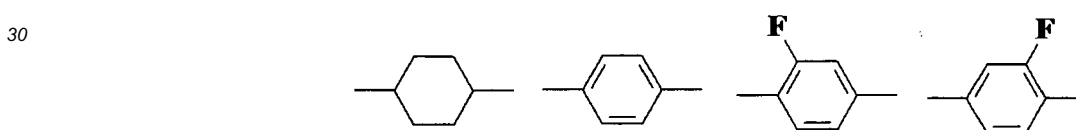


35
(in den Formeln kann mindestens eine CH_2CH_2 -Gruppe in einem Cyclohexanring durch $-CH=CH-$, $-CF_2O-$ oder $-OCF_2-$ ersetzt sein und mindestens eine CH -Gruppe in einem Benzolring kann durch ein Stickstoffatom ersetzt sein), Z_3 und Z_4 stellen jeweils unabhängig eine Einzelbindung, $-CH=CH-$, $-C=C-$, $-CH_2CH_2-$, $-(CH_2)_4-$, $-COO-$, $-OCH_2-$, $-CH_2O-$, $-OCF_2-$ oder $-CF_2O-$ dar, mindestens eines von Z_1 und Z_2 ist keine Einzelbindung und m_1 stellt 0 bis 3 dar).

- 40
9. Flüssigkristallanzeigegerät gemäß einem der Ansprüche 1 bis 8, wobei die allgemeine Formel (LC1) mindestens eine Verbindung, ausgewählt aus der Gruppe, bestehend aus Verbindungen, dargestellt durch allgemeine Formel (LC1)-1 bis allgemeine Formel (LC1)-7 unterhalb, darstellt

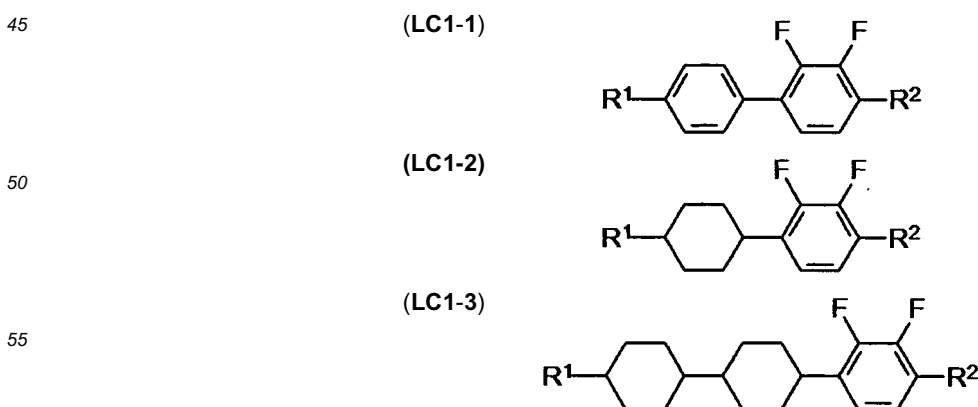


(fortgesetzt)


(LC1-4)




(LC1-5)



(LC1-6)




(LC1-7)




(in den Formeln stellen R_1 und R_2 jeweils unabhängig eine Alkylgruppe mit 1 bis 7 Kohlenstoffatomen, eine Alkoxygruppe mit 1 bis 7 Kohlenstoffatomen, eine Alkenylgruppe mit 2 bis 7 Kohlenstoffatomen oder eine Alkenyloxygruppe mit 2 bis 7 Kohlenstoffatomen dar).

10. Flüssigkristallanzeigergerät gemäß einem der Ansprüche 1 bis 9, wobei die allgemeine Formel (LC2) mindestens eine Verbindung, ausgewählt aus der Gruppe, bestehend aus Verbindungen, dargestellt durch allgemeine Formel (LC2)-1 bis allgemeine Formel (LC2)-15 unterhalb, darstellt,


(LC2)-1




(LC2)-8




(LC2)-2




(LC2)-9




(LC2)-3




(LC2)-10




(LC2)-4




(LC2)-11




(LC2)-5




(LC2)-12




(LC2)-6




(LC2)-13




(LC2)-7



(LC2)-14)




(LC2)-15)



(in den Formeln stellen R_1 und R_2 jeweils unabhängig eine Alkylgruppe mit 1 bis 7 Kohlenstoffatomen, eine Alkoxygruppe mit 1 bis 7 Kohlenstoffatomen, eine Alkenylgruppe mit 2 bis 7 Kohlenstoffatomen oder eine Alkenyloxygruppe mit 2 bis 7 Kohlenstoffatomen dar, Z_1 stellt $-CH_2CH_2-$, $-OCH_2-$, $-CH_2O-$, $-OCF_2-$ oder $-CF_2O-$ dar und A^1 stellt irgendeine der folgenden Strukturen dar).


5




- 10 11. Flüssigkristallanzeigegerät gemäß einem der Ansprüche 1 bis 10, wobei die allgemeine Formel (LC3) mindestens eine Verbindung, ausgewählt aus der Gruppe, bestehend aus Verbindungen, dargestellt durch allgemeine Formel (LC3)-1 bis allgemeine Formel (LC3)-6 unterhalb, darstellt und die allgemeine Formel (LC4) mindestens eine Verbindung, ausgewählt aus der Gruppe, bestehend aus Verbindungen, dargestellt durch allgemeine Formel (LC4)-1 bis allgemeine Formel (LC4)-4 unterhalb, darstellt,

15

(LC3)-1




(LC4)-1




20

(LC3)-2




(LC4)-2




25

(LC3)-3




(LC4)-3




30

(LC3)-4




(LC4)-4



35

(LC3)-5 (LC3)-6

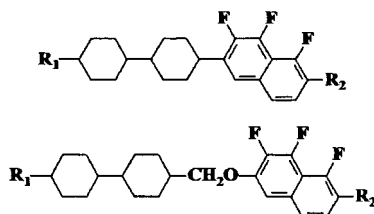

40


(in den Formeln stellen R_1 und R_2 jeweils unabhängig eine Alkylgruppe mit 1 bis 7 Kohlenstoffatomen, eine Alkoxygruppe mit 1 bis 7 Kohlenstoffatomen, eine Alkenylgruppe mit 2 bis 7 Kohlenstoffatomen oder eine Alkenyloxygruppe mit 2 bis 7 Kohlenstoffatomen dar).

45


12. Flüssigkristallanzeigegerät gemäß Anspruch 8, wobei die allgemeine Formel (LC5) mindestens eine Verbindung, ausgewählt aus der Gruppe, bestehend aus Verbindungen, dargestellt durch allgemeine Formel (LC5)-1 bis allgemeine Formel (LC5)-13, darstellt,

50

(LC5)-1




(LC5)-8




55


(LC5)-2




(LC5)-9




(LC5)-3




(LC5)-10



(LC5)-4




(LC5)-11




(fortgesetzt)


(LC5)-5




(LC5)-12




(LC5)-6



(LC5)-13




(LC5)-7



(in den Formeln stellen R_1 und R_2 jeweils unabhängig eine Alkylgruppe mit 1 bis 7 Kohlenstoffatomen, eine Alkoxygruppe mit 1 bis 7 Kohlenstoffatomen, eine Alkenylgruppe mit 2 bis 7 Kohlenstoffatomen oder eine Alkenyloxygruppe mit 2 bis 7 Kohlenstoffatomen dar).

13. Flüssigkristallanzeigegerät gemäß einem der Ansprüche 1 bis 12, wobei die Flüssigkristallzusammensetzungsschicht ein Polymer einschließt, welches durch Polymerisierung der Flüssigkristallzusammensetzung hergestellt wurde, welche mindestens eine polymerisierbare Verbindung beinhaltet.
14. Flüssigkristallanzeigegerät gemäß Anspruch 13, wobei die polymerisierbare Verbindung eine scheibenförmige Flüssigkristallverbindung ist, welche eine Struktur hat, in welcher ein Benzolderivat, ein Triphenylenderivat, ein Truxenderivat, ein Phthalocyaninderivat oder ein Cyclohexanderivat als ein zentraler Mutterkern eines Moleküls dient und radial substituiert durch lineare Alkylgruppen, lineare Alkoxygruppen oder substituierte Benzoyloxygruppen als Seitenketten ist.
15. Flüssigkristallanzeigegerät gemäß Anspruch 13, wobei die polymerisierbare Verbindung eine polymerisierbare Verbindung, dargestellt durch allgemeine Formel (PC1), ist,




(in der Formel stellt P_1 eine polymerisierbare funktionelle Gruppe dar, Sp_1 stellt eine Spacer-Gruppe mit 0 bis 20 Kohlenstoffatomen dar, Q_1 stellt eine Einzelbindung, -O-, -NH-, -NHCOO-, -OCONH-, -CH=CH-, -CO-, -COO-, -OCO-, -OCOO-, -OOCO-, -CH=CH-, -CH=CH-COO-, -OCO-CH=CH- oder -C=C- dar, n_1 und n_2 stellen jeweils unabhängig 1, 2 oder 3 dar, MG stellt eine mesogene Gruppe oder eine Mesogenität unterstützende Gruppe dar, R_3 stellt ein Halogenatom, eine Cyanogruppe oder eine Alkylgruppe mit 1 bis 25 Kohlenstoffatomen dar, mindestens eine CH_2 -Gruppe in der Alkylgruppe kann durch -O-, -S-, -NH-, -N(CH₃)-, -CO-, -COO-, -OCO-, -OCOO-, -SCO-, -COS- oder -C≡C- ersetzt sein, so dass Sauerstoffatome nicht direkt benachbart zueinander sind, und R_3 stellt alternativ $P_2 - Sp_2 - Q_2$ - dar (wobei P_2 , Sp_2 und Q_2 die gleichen Bedeutungen wie jeweils P_1 , Sp_1 und Q_1 darstellen).

Revendications

1. Dispositif d'affichage à cristaux liquides comprenant un premier substrat, un second substrat, une couche de composition de cristaux liquides maintenue entre le premier substrat et le second substrat, un filtre coloré comprenant une matrice noire et au moins des parties de pixel à trois couleurs RVB, une électrode de pixel et une électrode commune, dans lequel la couche de composition de cristaux liquides comprend une composition de cristaux liquides contenant au moins un composé choisi dans un groupe de composés représentés par la formule générale (LC1) à la formule générale (LC4),


(LC1)

5

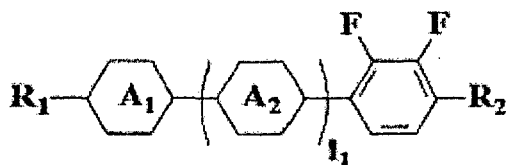


(LC2)

10

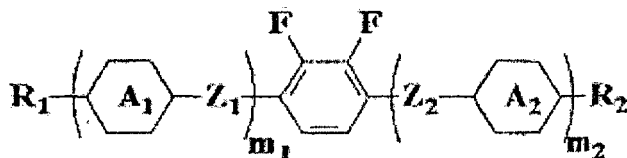

(LC3)


15

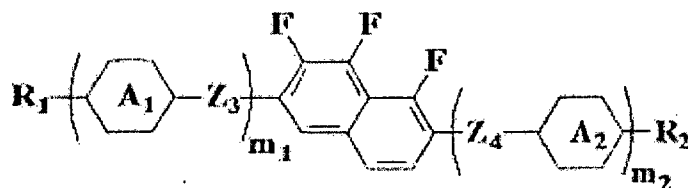

20


(LC4)

25

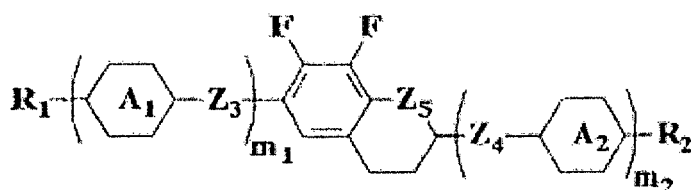

(dans les formules, R_1 et R_2 représentent chacun indépendamment un groupe alkyle contenant 1 à 15 atomes de carbone, au moins un groupe CH_2 dans le groupe alkyle peut être remplacé par $-\text{O}-$, $-\text{CH}=\text{CH}-$, $-\text{CO}-$, $-\text{OCO}-$, $-\text{COO}-$, $-\text{C}=\text{C}-$, $-\text{CF}_2\text{O}-$ ou $-\text{OCF}_2-$ de telle manière que les atomes d'oxygène ne soient pas directement adjacents l'un par rapport à l'autre, au moins un atome d'hydrogène dans le groupe alkyle peut être remplacé arbitrairement par un halogène, A_1 et A_2 représentent chacun indépendamment l'une quelconque des structures suivantes,

35



40

(au moins un groupe CH_2 dans un cycle cyclohexane dans les structures peut être remplacé par un atome d'oxygène, au moins un groupe CH dans un cycle benzène dans les structures peut être remplacé par un atome d'azote, et au moins un atome d'hydrogène dans les structures peut être remplacé par Cl , CF_3 ou OCF_3), Z_1 à Z_4 représentent chacun indépendamment une liaison simple, $-\text{CH}=\text{CH}-$, $-\text{C}=\text{C}-$, $-\text{CH}_2\text{CH}_2-$, $-(\text{CH}_2)_4-$, $-\text{COO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$ ou $-\text{CF}_2\text{O}-$, Z_5 représente un groupe CH_2 ou un atome d'oxygène, au moins un parmi Z_1 et Z_2 présent n'est pas une liaison simple, I_1 représente 0 ou 1, m_1 et m_2 représentent chacun indépendamment 0 à 3, et $m_1 + m_2$ est 1, 2 ou 3), et les parties de pixel à trois couleurs RVB contiennent, comme colorants, un pigment à base de dicétopyrrolopyrrole et/ou un colorant organique rouge anionique dans une partie de pixel R, au moins un choisi dans le groupe constitué par un pigment à base de phtalocyanine de cuivre halogéné, un colorant vert à base de phtalocyanine, et un mélange contenant un colorant bleu à base de phtalocyanine et un colorant azo organique jaune dans une partie de pixel V, et un pigment à base de phtalocyanine de cuivre de type ϵ et/ou un colorant organique bleu cationique dans une partie de pixel B.

50

2. Dispositif d'affichage à cristaux liquides selon la revendication 1, dans lequel les parties de pixel à trois couleurs RVB contiennent, comme colorants, le C.I. Solvent Red 124 dans la partie de pixel R, un mélange de C.I. Solvent Blue 67 et de C.I. Solvent Yellow 162 dans la partie de pixel V, et le C.I. Solvent Blue 7 dans la partie de pixel B.


55

3. Dispositif d'affichage à cristaux liquides selon la revendication 1, dans lequel les parties de pixel à trois couleurs RVB contiennent, comme colorants, le C.I. Pigment Red 254 dans la partie de pixel R, le C.I. Pigment Green 7 et/ou


EP 2 657 754 B1

36 dans la partie de pixel V, et le C.I. Pigment Blue 15:6 dans la partie de pixel B.

4. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 3, dans lequel la partie de pixel R contient en outre au moins un colorant/pigment organique choisi dans le groupe constitué par le C.I. Pigment Red 177, 242, 166, 167 et 179, le C.I. Pigment Orange 38 et 71, le C.I. Pigment Yellow 150, 215, 185, 138 et 139, le C.I. Solvent Red 89, le C.I. Solvent Orange 56 et le C.I. Solvent Yellow 21, 82, 83:1, 33 et 162.
5. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 4, dans lequel la partie de pixel V contient en outre au moins un colorant/pigment organique choisi dans le groupe constitué par le C.I. Pigment Yellow 150, 215, 185 et 138 et le C.I. Solvent Yellow 21, 82, 83:1 et 33.
6. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 5, dans lequel la partie de pixel B contient en outre au moins un colorant/pigment organique choisi dans le groupe constitué par le C.I. Pigment Blue 1, le C.I. Pigment Violet 23, le C.I. Basic Blue 7, le C.I. Basic Violet 10, le C.I. Acid Blue 1, 90 et 83, et le C.I. Direct Blue 86.
7. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 6, dans lequel le filtre coloré comprend une matrice noire, des parties de pixel à trois couleurs RVB et une partie de pixel J, et contient, comme colorant dans la partie de pixel J, au moins un colorant/pigment organique jaune choisi dans le groupe constitué par le C.I. Pigment Yellow 150, 215, 185, 138 et 139 et le C.I. Solvent Yellow 21, 82, 83:1, 33, et 162.
8. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 7, dans lequel la couche de composition de cristaux liquides comprend une composition de cristaux liquides contenant au moins un composé représenté par la formule générale (LC5)




(dans la formule, R_1 et R_2 représentent chacun indépendamment un groupe alkyle contenant 1 à 15 atomes de carbone, au moins un groupe CH_2 dans le groupe alkyle peut être remplacé par $-\text{O}-$, $-\text{CH}=\text{CH}-$, $-\text{CO}-$, $-\text{OCO}-$, $-\text{COO}-$, $-\text{C}=\text{C}-$, $-\text{CF}_2\text{O}-$ ou $-\text{OCF}_2-$ de telle manière que les atomes d'oxygène ne soient pas directement adjacents l'un par rapport à l'autre, au moins un atome d'hydrogène dans le groupe alkyle peut être remplacé arbitrairement par un halogène, B_1 à B_3 représentent chacun indépendamment l'une quelconque des suivantes,



(dans les formules, au moins un groupe CH_2CH_2 dans un cycle cyclohexane peut être remplacé par $-\text{CH}=\text{CH}-$, $-\text{CF}_2\text{O}-$ ou $-\text{OCF}_2-$, et au moins un groupe CH dans un cycle benzène peut être remplacé par un atome d'azote), Z_3 et Z_4 représentent chacun indépendamment une liaison simple, $-\text{CH}=\text{CH}-$, $-\text{C}=\text{C}-$, $-\text{CH}_2\text{CH}_2-$, $-(\text{CH}_2)_4-$, $-\text{COO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$ ou $-\text{CF}_2\text{O}-$, au moins un parmi Z_1 et Z_2 n'est pas une liaison simple, et m_1 représente 0 à 3.


9. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 8, dans lequel la formule générale (LC1) représente au moins un composé choisi dans le groupe constitué par les composés représentés par la formule générale (LC1)-1 à la formule générale (LC1)-7 ci-dessous,

(LC1-1)




(suite)


(LC1-2)




(LC1-3)




(LC1-4)




(LC1-5)



(LC1-6)




(LC1-7)



(dans les formules, R₁ et R₂ représentent chacun indépendamment un groupe alkyle contenant 1 à 7 atomes de carbone, un groupe alcoxy contenant 1 à 7 atomes de carbone, un groupe alcényle contenant 2 à 7 atomes de carbone ou un groupe alcényloxy contenant 2 à 7 atomes de carbone).

10. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 9, dans lequel la formule générale (LC2) représente au moins un composé choisi dans le groupe constitué par les composés représentés par la formule générale (LC2)-1 à la formule générale (LC2)-15 ci-dessous,


(LC2)-1




(LC2)-8




(LC2)-2



(LC2)-9




(LC2)-3



(LC2)-10




(LC2)-4




(LC2)-11



(LC2)-5




(LC2)-12




(suite)

(LC2)-6




(LC2)-13




(LC2)-7




(LC2)-14



(LC2)-15




(dans les formules, R_1 et R_2 représentent chacun indépendamment un groupe alkyle contenant 1 à 7 atomes de carbone, un groupe alcoxy contenant 1 à 7 atomes de carbone, un groupe alcényle contenant 2 à 7 atomes de carbone ou un groupe alcényloxy contenant 2 à 7 atomes de carbone, Z_1 représente $-\text{CH}_2\text{CH}_2-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$ ou $-\text{CF}_2\text{O}-$, et A^1 représente l'une quelconque des structures suivantes)




11. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 10, dans lequel la formule générale (LC3) représente au moins un composé choisi dans le groupe constitué par les composés représentés par la formule générale (LC3)-1 à la formule générale (LC3)-6 ci-dessous, et la formule générale (LC4) représente au moins un composé choisi dans le groupe constitué par les composés représentés par la formule générale (LC4)-1 à la formule générale (LC4)-4 ci-dessous,


(LC3)-1




(LC4)-1




(LC3)-2




(LC4)-2




(LC3)-3




(LC4)-3




(LC3)-4




(LC4)-4



(LC3)-5



(LC3)-6




(dans les formules, R_1 et R_2 représentent chacun indépendamment un groupe alkyle contenant 1 à 7 atomes de carbone, un groupe alcoxy contenant 1 à 7 atomes de carbone, un groupe alcényle contenant 2 à 7 atomes de


carbone ou un groupe alcényloxy contenant 2 à 7 atomes de carbone).

12. Dispositif d'affichage à cristaux liquides selon la revendication 8, dans lequel la formule générale (LC5) représente au moins un composé choisi dans le groupe constitué par les composés représentés par la formule générale (LC5)-1 à la formule générale (LC5)-13,


(LC5)-1




(LC5)-8




(LC5)-2



(LC5)-9



(LC5)-3




(LC5)-10



(LC5)-4



(LC5)-11



(LC5)-5




(LC5)-12




(LC5)-6



(LC5)-13

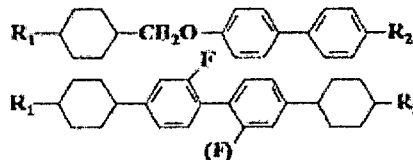

(LC5)-7




(dans les formules, R₁ et R₂ représentent chacun indépendamment un groupe alkyle contenant 1 à 7 atomes de carbone, un groupe alcoxy contenant 1 à 7 atomes de carbone, un groupe alcényle contenant 2 à 7 atomes de carbone ou un groupe alcényloxy contenant 2 à 7 atomes de carbone).

13. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 12, dans lequel la couche de composition de cristaux liquides comprend un polymère produit par la polymérisation de la composition de cristaux liquides contenant au moins un composé polymérisable.

14. Dispositif d'affichage à cristaux liquides selon la revendication 13, dans lequel le composé polymérisable est un composé de cristal liquide en forme de disque ayant une structure dans laquelle un dérivé de benzène, un dérivé de triphénylène, un dérivé de truxène, un dérivé de phtalocyanine ou un dérivé de cyclohexane joue le rôle de noyau mère central d'une molécule et est substitué radicalement par des groupes alkyle linéaire, des groupes alcoxy linéaire ou des groupes benzyloxy substitué en tant que chaînes latérales.

15. Dispositif d'affichage à cristaux liquides selon la revendication 13, dans lequel le composé polymérisable est un composé polymérisable représenté par la formule générale (PC1),



(dans la formule, P₁ représente un groupe fonctionnel polymérisable, Sp₁ représente un groupe espaceur contenant 0 à 20 atomes de carbone, Q₁ représente une liaison simple, -O-, -NH-, -NHCOO-, -OCONH-, -CH=CH-, -CO-, -COO-, -OCO-, -OCOO-, -OOCO-, -CH=CH-, -CH=CH-COO-, -OCO-CH=CH- ou -C=C-, n₁ et n₂ représentent chacun 1, 2 ou 3, MG représente un groupe mésogène ou un groupe supportant une mésogénité, R₃ représente un atome d'halogène, un groupe cyano ou un groupe alkyle contenant 1 à 25 atomes de carbone, au moins un groupe CH₂ dans le groupe alkyle peut être remplacé par -O-, -S-, -NH-, -N(CH₃)-, -CO-, -COO-, -OCO-, -OCOO-, -SCO-, -COS- ou -C=C- de telle manière que les atomes d'oxygène ne soient pas directement adjacents l'un par rapport à l'autre, et en variante R₃ représente P₂-Sp₂-Q₂ (dans lequel P₂, Sp₂ et Q₂ ont respectivement les mêmes significations que P₁, Sp₁ et Q₁).

FIG. 1


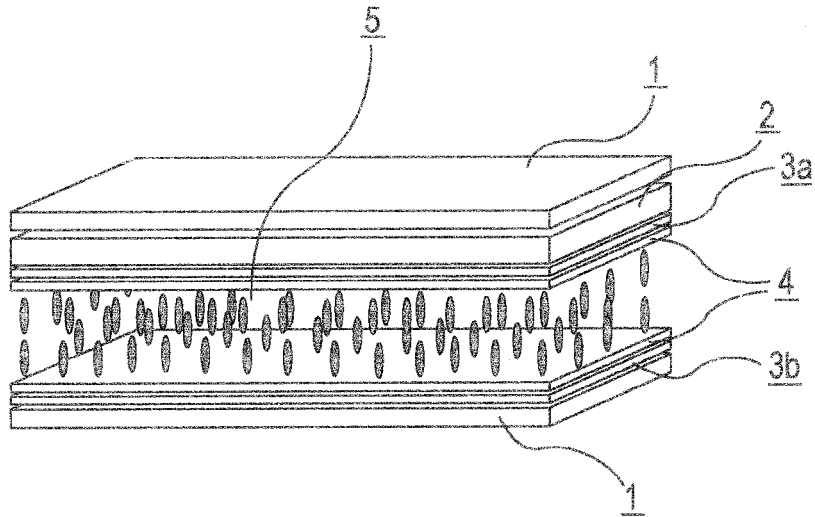


FIG. 2

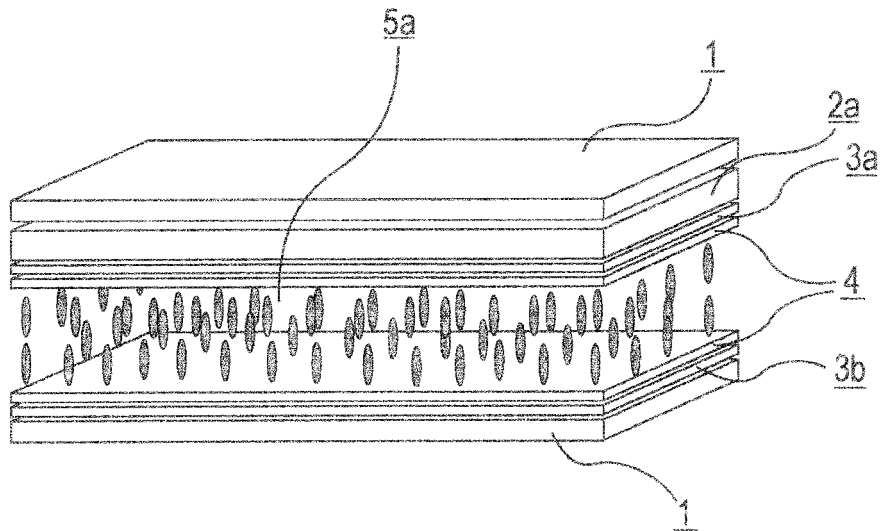

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000019321 A [0007]
- JP 2009109542 A [0007]
- JP 2000192040 A [0008]
- WO 2011092973 A1 [0010]
- JP 2005281559 A [0010]

专利名称(译)	液晶显示装置		
公开(公告)号	EP2657754B1	公开(公告)日	2016-10-05
申请号	EP2012860188	申请日	2012-12-14
[标]申请(专利权)人(译)	大日本油墨化学工业株式会社		
申请(专利权)人(译)	DIC株式会社		
当前申请(专利权)人(译)	DIC株式会社		
[标]发明人	KANEOYA MASAKAZU TAKEUCHI KIYOFUMI FUNAKURA SEIJI SHIMADA KATSUNORI		
发明人	KANEOYA, MASAKAZU TAKEUCHI, KIYOFUMI FUNAKURA, SEIJI SHIMADA, KATSUNORI		
IPC分类号	G02F1/1335 C09K19/12 C09K19/14 C09K19/20 C09K19/30 C09K19/32 C09K19/34 C09K19/38 G02B5/20 G02F1/13 C09K19/42 C09K19/44		
CPC分类号	G02F1/133514 C09K19/3003 C09K19/3028 C09K19/3066 C09K19/3068 C09K19/322 C09K19/42 C09K19/44 C09K2019/122 C09K2019/123 C09K2019/3004 C09K2019/301 C09K2019/3036 C09K2019/3037 C09K2019/3425		
优先权	2011277090 2011-12-19 JP		
其他公开文献	EP2657754A4 EP2657754A1		
外部链接	Espacenet		

摘要(译)

本发明涉及使用特定液晶组合物的液晶显示装置和包含特定染料和/或颜料的滤色器。本发明提供一种液晶显示装置，其能够防止液晶层的电压保持率 (VHR) 的降低和离子密度 (ID) 的增加，并且解决了诸如白点，取向不均匀等显示缺陷的问题，图像残留等。本发明的液晶显示装置的特征在于防止液晶层的电压保持率 (VHR) 降低和离子密度 (ID) 的增加，并且抑制诸如图像残留等显示缺陷的发生。因此，对于用于有源矩阵驱动的VA模式或PSVA模式液晶显示装置特别有用，并且可以应用于液晶电视，监视器，蜂窝电话，智能电话等液晶显示装置。等等。

