



(11)

EP 2 837 964 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

21.09.2016 Bulletin 2016/38

(21) Application number: **13836237.1**

(22) Date of filing: **06.06.2013**

(51) Int Cl.:

G02F 1/1335 ^(2006.01) **C09K 19/30** ^(2006.01)
C09K 19/42 ^(2006.01) **G02B 5/20** ^(2006.01)
G02B 5/22 ^(2006.01) **G02F 1/13** ^(2006.01)
C09K 19/44 ^(2006.01) **C09K 19/04** ^(2006.01)
C09K 19/12 ^(2006.01) **C09K 19/52** ^(2006.01)

(86) International application number:

PCT/JP2013/065713

(87) International publication number:

WO 2014/196061 (11.12.2014 Gazette 2014/50)

(54) **LIQUID CRYSTAL DISPLAY DEVICE**

FLÜSSIGKRISTALLANZEIGEVORRICHTUNG

DISPOSITIF D’AFFICHAGE À CRISTAUX LIQUIDES

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:

18.02.2015 Bulletin 2015/08

(73) Proprietor: **DIC Corporation**

Tokyo 174-8520 (JP)

(72) Inventors:

- **OGAWA Shinji**
Kitaadachi-gun
Saitama 362-8577 (JP)
- **IWASHITA Yoshinori**
Kitaadachi-gun
Saitama 362-8577 (JP)

- **FUNAKURA Seiji**
Kamisu-shi
Ibaraki 314-0193 (JP)
- **SHIMADA Katsunori**
Sakura-shi
Chiba 285-8668 (JP)

(74) Representative: **Adam, Holger et al**

Kraus & Weisert
Patentanwälte PartGmbB
Thomas-Wimmer-Ring 15
80539 München (DE)

(56) References cited:

WO-A1-2010/095506 **WO-A1-2011/092973**
JP-A- 2000 192 040 **JP-A- 2002 309 255**
JP-A- 2009 058 546 **JP-A- 2010 250 117**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 837 964 B1

Description

Technical Field

5 **[0001]** The present invention relates to a liquid crystal display device.

Background Art

10 **[0002]** Liquid crystal display devices have been applied to, for example, watches, calculators, a variety of household electrical appliances, measuring equipment, panels used in automobiles, word processors, electronic notebooks, printers, computers, and television sets. Representative examples of types of liquid crystal display devices include a TN (twisted nematic) type, an STN (super twisted nematic) type, a DS (dynamic scattering) type, a GH (guest-host) type, an IPS (in-plane switching) type, an OCB (optically compensated birefringence) type, an ECB (electrically controlled birefringence) type, a VA (vertical alignment) type, a CSH (color super homeotropic) type, and an FLC (ferroelectric liquid crystal) type. 15 Regarding a drive system, multiplex driving has become popular instead of typical static driving; a simple matrix, in particular, an active matrix (AM) in which, for example, a TFT (thin film transistor) or TFD (thin film diode) is used has become mainstream in recent years.

20 **[0003]** As illustrated in Fig. 1, in a general color liquid crystal display device, a transparent electrode layer (3a) as a common electrode and a color filter layer (2) are disposed between one of two substrates (1) and one of alignment films (4) provided so as to correspond thereto, a pixel electrode layer (3b) is disposed between the other substrate (1) and the other alignment film, the substrates are disposed such that the alignment films face each other, and a liquid crystal layer (5) is disposed therebetween.

25 **[0004]** The color filter layer is a color filter consisting of a black matrix, a red layer (R), a green layer (G), a blue layer (B), and optionally a yellow layer (Y).

30 **[0005]** Impurities remaining in liquid crystal materials of a liquid crystal layer have a large effect on the electrical properties of a display device, and impurities have been therefore highly controlled. In terms of materials of alignment films, it has been known that impurities remaining in the alignment films which directly contact a liquid crystal layer shift to the liquid crystal layer with the result that the impurities affect the electrical properties of the liquid crystal layer; hence, the relationship between the properties of liquid crystal display devices and impurities contained in materials of alignment films have been being studied.

35 **[0006]** Also in terms of materials, such as organic pigments, used for a color filter layer, it is believed that impurities contained therein have an effect on a liquid crystal layer as in materials of alignment films. However, since an alignment film and a transparent electrode are disposed between the color filter layer and the liquid crystal layer, it has been believed that direct effect thereof on the liquid crystal layer is significantly smaller than that of materials of the alignment film. In general, however, the thickness of the alignment film is only not more than 0.1 μm , and the thickness of the transparent electrode that is a common electrode disposed on the color filter layer side is not more than 0.5 μm even in the case where the thickness is increased to enhance the electric conductivity. Hence, the color filter layer and the liquid crystal layer are not in a state in which they are completely isolated from each other, and the color filter layer may therefore cause problems due to impurities which are contained in the color filter layer and which pass through the alignment film and the transparent electrode, such as a decrease in the voltage holding ratio (VHR) of the liquid crystal layer and defective display, e.g., dropouts due to increased ion density (ID), uneven alignment, and screen burn-in.

40 **[0007]** Techniques for overcoming defective display caused by impurities present in a pigment contained in the color filter layer have been studied, such as a technique in which dissolution of impurities in liquid crystal is controlled by use of a pigment in which the amount of an extract from the pigment by ethyl formate is at a predetermined level or lower (Patent Literature 1) and a technique in which dissolution of impurities in liquid crystal is controlled by use of a specific pigment for a blue layer (Patent Literature 2). These techniques, however, are substantially not different from merely reducing the impurity content in a pigment and are insufficient to overcome defective display even in a current situation in which a technique for purifying pigments has been advanced.

45 **[0008]** In another disclosed technique, attention is paid to the relationship between organic impurities contained in a color filter layer and a liquid crystal composition, the degree in which the organic impurities are less likely to be dissolved in a liquid crystal layer is represented by the hydrophobic parameter of liquid crystal molecules contained in the liquid crystal layer, and the hydrophobic parameter is adjusted to be at a predetermined level or more; furthermore, since such a hydrophobic parameter has a correlation with a $-\text{OCF}_3$ group present at an end of a liquid crystal molecule, a liquid crystal composition is prepared so as to contain a certain amount of a liquid crystal compound having a $-\text{OCF}_3$ group at an end of each liquid crystal molecule thereof (Patent Literature 3).

50 **[0009]** Also in such disclosure, however, the technique is substantially for reducing effects of impurities present in a pigment on the liquid crystal layer, and a direct relationship between the structure of a colorant, such as a dye or a pigment, used for the color filter layer and the structure of a liquid crystal material is not considered; thus, problems of

defective display in highly-developed liquid crystal display devices have not been overcome.

Citation List

Patent Literature

[0010]

PTL 1: Japanese Unexamined Patent Application Publication No. 2000-19321
 PTL 2: Japanese Unexamined Patent Application Publication No. 2009-109542
 PTL 3: Japanese Unexamined Patent Application Publication No. 2000-192040

[0011] Further documents disclosing liquid crystal compositions, and liquid crystal display devices, or colour filters including i.a. at least RGB three-colour pixel portions are:

JP 2002 309255 A (CHISSO CORP) (2002-10-23),
 WO 2011/092973 A1 (CHISSO) (2011-08-04) && US 2012236246 A1 (2012-09-20),
 WO 2010/095506 A1 (CHISSO) (2010-08-26) && US 2011/0297881 A1 (2011-12-08),
 JP 2009 058546 A (SEIREN CO., LTD.) (2009-03-19), and
 JP 2010 250117 A (TOPPAN PRINTING CO., LTD.) (2010-11-04).

Summary of Invention

Technical Problem

[0012] It is an object of the present invention to provide a liquid crystal display device in which a specific liquid crystal composition and a color filter using a specific pigment are used to prevent a decrease in the voltage holding ratio (VHR) of a liquid crystal layer and an increase in ion density (ID) therein and to overcome problems of defective display such as dropouts, uneven alignment, and screen burn-in.

Solution to Problem

[0013] In order to achieve the above-mentioned object, the inventors have intensively studied a structural combination of a colorant, such as a dye or pigment, used for forming a color filter and a liquid crystal material used for forming a liquid crystal layer and found that a liquid crystal display device in which a specific liquid crystal material and a color filter using a specific pigment are used prevents a decrease in the voltage holding ratio (VHR) of the liquid crystal layer and an increase in ion density (ID) therein and eliminates problems of defective display such as dropouts, uneven alignment, and screen burn-in, thereby accomplishing the present invention.

[0014] In particular, an aspect of the present invention provides a liquid crystal display device including a first substrate, a second substrate, a liquid crystal composition layer disposed between the first substrate and the second substrate, a color filter including a black matrix and at least RGB three-color pixel portions, a pixel electrode, and a common electrode, wherein


the liquid crystal composition layer contains a liquid crystal composition containing a compound represented by general formula (I) in an amount of 30 to 50%

[Chem. 1]




(where R¹ and R² each independently represent an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; and A represents a 1,4-phenylene group or a trans-1,4-cyclohexylene group), a compound represented by general formula (II-1) in an amount of 5 to 30%

[Chem. 2]



(where R³ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; R⁴ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 4 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 3 to 8 carbon atoms; and Z³ represents a single bond, -CH=CH-, -C≡C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCO-, -OCH₂-, -CH₂O-, -OCF₂-, or -CF₂O-), and a compound represented by general formula (II-2) in an amount of 25 to 45%

[Chem. 3]



(where R⁵ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; R⁶ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 4 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 3 to 8 carbon atoms; B represents a 1,4-phenylene group or trans-1,4-cyclohexylene group which is optionally substituted with a fluorine atom; and Z⁴ represents a single bond, -CH=CH-, -C≡C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCO-, -OCH₂-, -CH₂O-, -OCF₂-, or -CF₂O-), and the R pixel portion of the RGB three-color pixel portions contains a colorant that is a red diketopyrrolopyrrole pigment having an average primary particle size of 5 to 50 nm determined by small angle X-ray scattering.

Advantageous Effects of Invention

[0015] In the liquid crystal display device of the present invention, using a specific liquid crystal composition and a color filter in which a specific pigment is used enables prevention of a decrease in the voltage holding ratio (VHR) of a liquid crystal layer, prevention of an increase in ion density (ID) therein, and elimination of defective display such as dropouts, uneven alignment, and screen burn-in.

Brief Description of Drawings

[0016]

[Fig. 1] Fig. 1 illustrates an example of typical liquid crystal display devices generally used.

[Fig. 2] Fig. 2 illustrates an example of the liquid crystal display device of the present invention. Reference Signs List

[0017]

- 1 Substrate
- 2 Color filter layer
- 2a Color filter layer containing specific pigment
- 3a Transparent electrode layer (common electrode)
- 3b Pixel electrode layer
- 4 Alignment film
- 5 Liquid crystal layer
- 5a Liquid crystal layer containing specific liquid crystal composition

Description of Embodiments

[0018] Fig. 2 illustrates an example of the liquid crystal display device of the present invention. In the liquid crystal


display device, a transparent electrode layer (3a) as a common electrode and a color filter layer (2) containing a specific pigment are disposed between one of two substrates (1) of first and second substrates and one of alignment films (4) provided so as to correspond thereto, a pixel electrode layer (3b) is disposed between the other substrate and the other alignment film, the substrates are disposed such that the alignment films face each other, and a liquid crystal layer (5a) containing a specific liquid crystal composition is disposed therebetween.

[0019] In the display device, the two substrates are attached to each other with a sealant and sealing material placed at the peripheries thereof, and particulate spacers or spacer columns formed of resin by photolithography are disposed between the substrates to maintain the distance therebetween in many cases.

(Liquid Crystal Layer)


[0020] The liquid crystal layer of the liquid crystal display device of the present invention is composed of a liquid crystal composition containing a compound represented by general formula (I) in an amount of 30 to 50%

[Chem. 4]




(where R¹ and R² each independently represent an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; and A represents a 1,4-phenylene group or a trans-1,4-cyclohexylene group), a compound represented by general formula (II-1) in an amount of 5 to 30%

[Chem. 5]



(where R³ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; R⁴ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 4 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 3 to 8 carbon atoms; and Z³ represents a single bond, -CH=CH-, -C≡C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCO-, -OCH₂-, -CH₂O-, -OCF₂-, or -CF₂O-), and a compound represented by general formula (II-2) in an amount of 25 to 45%

[Chem. 6]



(where R⁵ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; R⁶ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 4 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 3 to 8 carbon atoms; B represents a 1,4-phenylene group or trans-1,4-cyclohexylene group which is optionally substituted with a fluorine atom; and Z⁴ represents a single bond, -CH=CH-, -C≡C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCO-, -OCH₂-, -CH₂O-, -OCF₂-, or -CF₂O-).

[0021] The amount of the compound represented by general formula (I) in the liquid crystal layer of the liquid crystal display device of the present invention is from 30 to 50%, preferably 32 to 48%, and more preferably 34 to 46%.

[0022] In general formula (I), R¹ and R² each independently represent an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; in the case where A is a trans-1,4-cyclohexylene group, R¹ and R² preferably each independently represent an alkyl group having 1 to 5 carbon atoms, an alkenyl group having

2 to 5 carbon atoms, an alkoxy group having 1 to 5 carbon atoms, or an alkenyloxy group having 2 to 5 carbon atoms; and more preferably an alkyl group having 2 to 5 carbon atoms, an alkenyl group having 2 to 4 carbon atoms, an alkoxy group having 1 to 4 carbon atoms, or an alkenyloxy group having 2 to 4 carbon atoms.

R¹ preferably represents an alkyl group; in this case, an alkyl group having 2, 3, or 4 carbon atoms is especially preferred. In the case where R¹ represents an alkyl group having 3 carbon atoms, R² is preferably an alkyl group having 2, 4, or 5 carbon atoms or an alkenyl group having 2 or 3 carbon atoms, and more preferably an alkyl group having 2 carbon atoms.

[0023] In the case where A represents a 1,4-phenylene group, R¹ and R² preferably each independently represent an alkyl group having 1 to 5 carbon atoms, an alkenyl group having 4 to 5 carbon atoms, an alkoxy group having 1 to 5 carbon atoms, or an alkenyloxy group having 3 to 5 carbon atoms; and

more preferably an alkyl group having 2 to 5 carbon atoms, an alkenyl group having 4 to 5 carbon atoms, an alkoxy group having 1 to 4 carbon atoms, or an alkenyloxy group having 2 to 4 carbon atoms.

R¹ preferably represents an alkyl group; in this case, an alkyl group having 1, 3, or 5 carbon atoms is especially preferred. In addition, R² preferably represents an alkoxy group having 1 to 2 carbon atoms.


[0024] The amount of a compound represented by general formula (I) in which at least one of the substituents R¹ and R² is an alkyl group having 3 to 5 carbon atoms preferably accounts for not less than 50% of the total amount of compounds represented by general formula (I), more preferably not less than 70%, and further preferably not less than 80%. Moreover, the amount of a compound represented by general formula (I) in which at least one of the substituents R¹ and R² is an alkyl group having 3 carbon atoms preferably accounts for not less than 50% of the total amount of compounds represented by general formula (I), more preferably not less than 70%, further preferably not less than 80%, and most preferably 100%.

[0025] One or more compounds represented by general formula (I) can be used, and at least one compound in which A represents a trans-1,4-cyclohexylene group and at least one compound in which A represents a 1,4-phenylene group are preferably used.

The amount of a compound represented by general formula (I) in which A represents a trans-1,4-cyclohexylene group preferably accounts for not less than 50% of the total amount of compounds represented by general formula (I), more preferably not less than 70%, and further preferably not less than 80%.

[0026] In particular, preferred examples of compounds represented by general formula (I) include the following compounds represented by general formulae (Ia) to (Ik):

[Chem. 7]

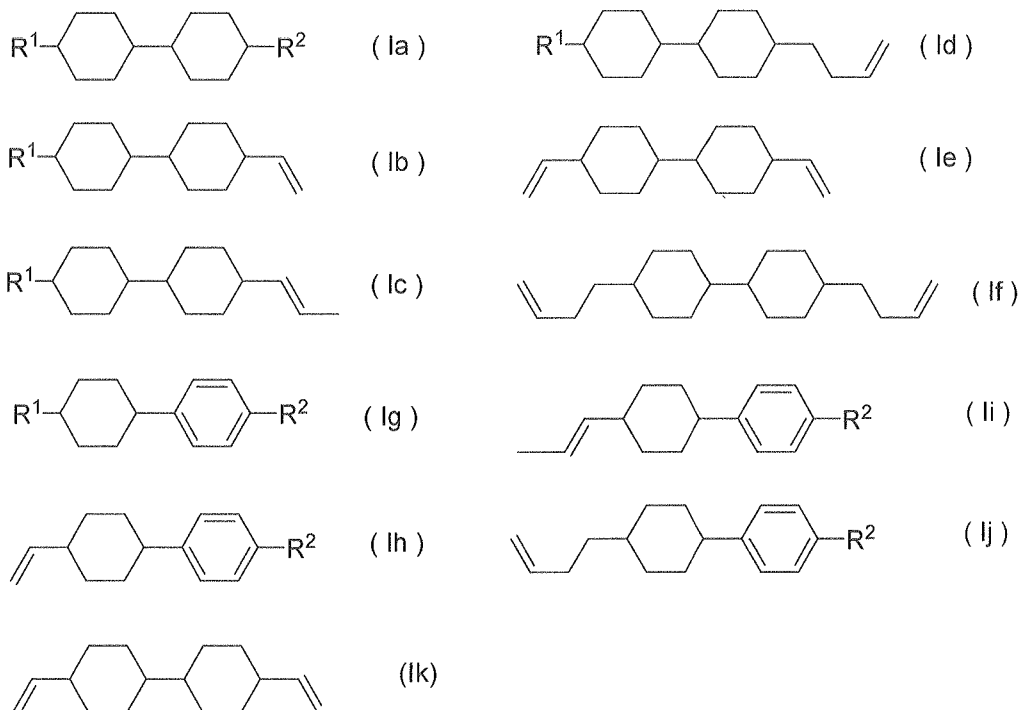

(where R¹ and R² each independently represent an alkyl group having 1 to 5 carbon atoms or an alkoxy group having 1 to 5 carbon atoms, and preferred R¹ and R² are the same as specified in general formula (I)).

[0027] Among general formulae (Ia) to (Ik), general formulae (Ia), (Ic), and (Ig) are preferred, general formulae (Ia) and (Ig) are more preferred, and general formula (Ia) is especially preferred; in order to emphasize response speed,

general formula (Ib) is also preferred; in order to further emphasize response speed, general formulae (Ib), (Ic), (Ie), and (Ik) are preferred, and general formulae (Ic) and (Ik) are more preferred; and in order to especially emphasize response speed, a dialkenyl compound represented by general formula (Ik) is preferred.

[0028] From such a viewpoint, the amounts of compounds represented by general formulae (Ia) and (Ic) preferably account for not less than 50% of the total amount of compounds represented by general formula (I), more preferably not less than 70%, further preferably not less than 80%, and most preferably 100%. The amount of a compound represented by general formula (Ia) preferably accounts for not less than 50% of the total amount of compounds represented by general formula (I), more preferably not less than 70%, and further preferably not less than 80%.

[0029] The amount of the compound represented by general formula (II-1) in the liquid crystal layer of the liquid crystal display device of the present invention is from 5 to 30%, preferably 8 to 27%, and more preferably 10 to 25%.

[0030] In general formula (II-1), R^3 represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; preferably an alkyl group having 1 to 5 carbon atoms or an alkenyl group having 2 to 5 carbon atoms; more preferably an alkyl group having 2 to 5 carbon atoms or an alkenyl group having 2 to 4 carbon atoms; further preferably an alkyl group having 3 to 5 carbon atoms or an alkenyl group having 2 carbon atoms; and especially preferably an alkyl group having 3 carbon atoms.





[0031] R^4 represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 4 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 3 to 8 carbon atoms; preferably an alkyl group having 1 to 5 carbon atoms or an alkoxy group having 1 to 5 carbon atoms; more preferably an alkyl group having 1 to 3 carbon atoms or an alkoxy group having 1 to 3 carbon atoms; further preferably an alkyl group having 3 carbon atoms or an alkoxy group having 2 carbon atoms; and especially preferably an alkoxy group having 2 carbon atoms.

[0032] Z^3 represents a single bond, $-\text{CH}=\text{CH}-$, $-\text{C}=\text{C}-$, $-\text{CH}_2\text{CH}_2-$, $-(\text{CH}_2)_4-$, $-\text{COO}-$, $-\text{OCO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$; preferably a single bond, $-\text{CH}_2\text{CH}_2-$, $-\text{COO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$; and more preferably a single bond or $-\text{CH}_2\text{O}-$.

[0033] The liquid crystal layer of the liquid crystal display device of the present invention can contain one or two or more compounds represented by general formula (II-1); it is preferred that one or two compounds be contained.

[0034] In particular, preferred examples of compounds represented by general formula (II-1) include the following compounds represented by general formulae (II-1a) to (II-1d) :

[Chem. 8]



(where R^3 represents an alkyl group having 1 to 5 carbon atoms or an alkenyl group having 2 to 5 carbon atoms, and R^{4a} represents an alkyl group having 1 to 5 carbon atoms).

[0035] In general formulae (II-1a) and (II-1c), R^3 preferably represents the same as specified in general formula (II-1). R^{4a} preferably represents an alkyl group having 1 to 3 carbon atoms, more preferably an alkyl group having 1 or 2 carbon atoms, and especially preferably an alkyl group having 2 carbon atoms.

[0036] In general formulae (II-1b) and (II-1d), R^3 preferably represents the same as specified in general formula (II-1). R^{4a} preferably represents an alkyl group having 1 to 3 carbon atoms, more preferably an alkyl group having 1 or 3 carbon atoms, and especially preferably an alkyl group having 3 carbon atoms.

[0037] Among general formulae (II-1a) to (II-1d), in order to increase the absolute value of dielectric anisotropy, general formulae (II-1a) and (II-1c) are preferred, and general formula (II-1a) is more preferred.

[0038] The liquid crystal layer of the liquid crystal display device of the present invention preferably contains one or two or more compounds represented by general formulae (II-1a) to (II-1d), and more preferably one or two compounds; in particular, one or two compounds represented by general formula (II-1a) are preferably contained.

[0039] The amount of the compound represented by general formula (II-2) in the liquid crystal layer of the liquid crystal display device of the present invention is from 25 to 45%, preferably 28 to 42%, and more preferably 30 to 40%.

[0040] In general formula (II-2), R^5 represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2

to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; preferably an alkyl group having 1 to 5 carbon atoms or an alkenyl group having 2 to 5 carbon atoms; more preferably an alkyl group having 2 to 5 carbon atoms or an alkenyl group having 2 to 4 carbon atoms; further preferably an alkyl group having 3 to 5 carbon atoms or an alkenyl group having 2 carbon atoms; and especially preferably an alkyl group having 3 carbon atoms.







[0041] R^6 represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 4 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 3 to 8 carbon atoms; preferably an alkyl group having 1 to 5 carbon atoms or an alkoxy group having 1 to 5 carbon atoms; more preferably an alkyl group having 1 to 3 carbon atoms or an alkoxy group having 1 to 3 carbon atoms; further preferably an alkyl group having 3 carbon atoms or an alkoxy group having 2 carbon atoms; and especially preferably an alkoxy group having 2 carbon atoms.

[0042] B represents a 1,4-phenylene group or trans-1,4-cyclohexylene group which is optionally substituted with a fluorine atom, preferably an unsubstituted 1,4-phenylene group or trans-1,4-cyclohexylene group, and more preferably a trans-1,4-cyclohexylene group.

[0043] Z^4 represents, a single bond, $-\text{CH}=\text{CH}-$, $-\text{C}=\text{C}-$, $-\text{CH}_2\text{CH}_2-$, $-(\text{CH}_2)_4-$, $-\text{COO}-$, $-\text{OCO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$; preferably a single bond, $-\text{CH}_2\text{CH}_2-$, $-\text{COO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$; and more preferably a single bond or $-\text{CH}_2\text{O}-$.

[0044] In particular, preferred examples of compounds represented by general formula (II-2) include the following compounds represented by general formulae (II-2a) to (II-2f) :

[Chem. 9]



(where R^5 represents an alkyl group having 1 to 5 carbon atoms or an alkenyl group having 2 to 5 carbon atoms, and R^{6a} represents an alkyl group having 1 to 5 carbon atoms; preferred R^5 and R^{6a} are the same as preferred R^5 and R^6 specified in general formula (II-2), respectively).

[0045] In general formulae (II-2a), (II-2b), and (II-2e), R^5 preferably represents the same as specified in general formula (II-2). R^{6a} preferably represents an alkyl group having 1 to 3 carbon atoms, more preferably an alkyl group having 1 or 2 carbon atoms, and especially preferably an alkyl group having 2 carbon atoms.

[0046] In general formulae (II-2c), (II-2d), and (II-2f), R^5 preferably represents the same as specified in general formula (II-2). R^{6a} preferably represents an alkyl group having 1 to 3 carbon atoms, more preferably an alkyl group having 1 or


3 carbon atoms, and especially preferably an alkyl group having 3 carbon atoms.

[0047] Among general formulae (II-2a) to (II-2f), in order to increase the absolute value of dielectric anisotropy, general formulae (II-2a), (II-2b), and (II-2e) are preferred.

[0048] One or two or more compounds represented by general formula (II-2) can be used, and it is preferred at least one compound in which B represents a 1,4-phenylene group and at least one compound in which B represents a trans-1,4-cyclohexylene group be used.

[0049] The liquid crystal layer of the liquid crystal display device of the present invention preferably further contains a compound represented by general formula (III):

[Chem. 10]



(where R⁷ and R⁸ each independently represent an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; D, E, and F each independently represent a 1,4-phenylene group or trans-1,4-cyclohexylene group which is optionally substituted with a fluorine atom; Z² represents a single bond, -OCH₂-, -OCO-, -CH₂O-, -COO-, or -OCO-; n represents 0, 1, or 2; and a compound represented by general formula (III) is different from compounds represented by general formulae (I), (II-1), and (II-2)).

[0050] The amount of the compound represented by general formula (III) is preferably in the range of 3 to 35%, more preferably 5 to 33%, and further preferably 7 to 30%.

[0051] In general formula (III), R⁷ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; in the case where D represents trans-1,4-cyclohexylene, R⁷ preferably represents an alkyl group having 1 to 5 carbon atoms or an alkenyl group having 2 to 5 carbon atoms, more preferably an alkyl group having 2 to 5 carbon atoms or an alkenyl group having 2 to 4 carbon atoms, further preferably an alkyl group having 3 to 5 carbon atoms or an alkenyl group having 2 or 3 carbon atoms, and especially preferably an alkyl group having 3 carbon atoms; and in the case where D represents a 1,4-phenylene group which is optionally substituted with a fluorine atom, R⁷ preferably represents an alkyl group having 1 to 5 carbon atoms or an alkenyl group having 4 or 5 carbon atoms, more preferably an alkyl group having 2 to 5 carbon atoms or an alkenyl group having 4 carbon atoms, and further preferably an alkyl group having 2 to 4 carbon atoms.

[0052] R⁸ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 3 to 8 carbon atoms; in the case where F represents trans-1,4-cyclohexylene, R⁸ preferably represents an alkyl group having 1 to 5 carbon atoms or an alkenyl group having 2 to 5 carbon atoms, more preferably an alkyl group having 2 to 5 carbon atoms or an alkenyl group having 2 to 4 carbon atoms, further preferably an alkyl group having 3 to 5 carbon atoms or an alkenyl group having 2 to 3 carbon atoms, and especially preferably an alkyl group having 3 carbon atoms; and in the case where F represents a 1,4-phenylene group which is optionally substituted with a fluorine atom, R⁸ preferably represents an alkyl group having 1 to 5 carbon atoms or an alkenyl group having 4 or 5 carbon atoms, more preferably an alkyl group having 2 to 5 carbon atoms or an alkenyl group having 4 carbon atoms, and further preferably an alkyl group having 2 to 4 carbon atoms.

[0053] In the case where R⁷ and R⁸ each represent an alkenyl group and where D and F respectively connected thereto each represent a 1,4-phenylene group which is optionally substituted with a fluorine atom, the preferred structure of an alkenyl group having 4 or 5 carbon atoms is as follows:

[Chem. 11]



(where the right end of each structure is bonded to a ring structure).

Also in this case, an alkenyl group having 4 carbon atoms is preferred.

[0054] D, E, and F each independently represent a 1,4-phenylene group or trans-1,4-cyclohexylene which is optionally substituted with a fluorine atom; preferably a 2-fluoro-1,4-phenylene group, a 2,3-difluoro-1,4-phenylene group, a 1,4-phenylene group, or trans-1,4-cyclohexylene; more preferably a 2-fluoro-1,4-phenylene group, a 2,3-difluoro-1,4-phenylene group, or a 1,4-phenylene group; and especially preferably a 2,3-difluoro-1,4-phenylene group or a 1,4-phenylene






group.

[0055] Z^2 represents a single bond, $-OCH_2-$, $-OCO-$, $-CH_2O-$, or $-COO-$; preferably a single bond, $-CH_2O-$, or $-COO-$; and more preferably a single bond.






[0056] n represents 0, 1, or 2, and preferably 0 or 1. In the case where Z^2 does not represent a single bond but represents a substituent, n preferably represents 1.

[0057] In the case where n represents 1, preferred compounds represented by general formula (III) are compounds represented by general formulae (III-1a) to (III-1e) in order to enhance negative dielectric anisotropy and are compounds represented by general formulae (III-1f) to (III-1j) in order to enhance response speed:

[Chem. 12]




[Chem. 13]




(where R^7 and R^8 each independently represent an alkyl group having 1 to 5 carbon atoms, an alkenyl group having 2 to 5 carbon atoms, or an alkoxy group having 1 to 5 carbon atoms; and preferred R^7 and R^8 are the same as specified in general formula (III)).

[0058] In the case where n represents 2, preferred compounds represented by general formula (III) are compounds represented by general formulae (III-2a) to (III-2i) in order to enhance negative dielectric anisotropy and are compounds represented by general formulae (III-2j) to (III-2l) in order to enhance response speed:

[Chem. 14]

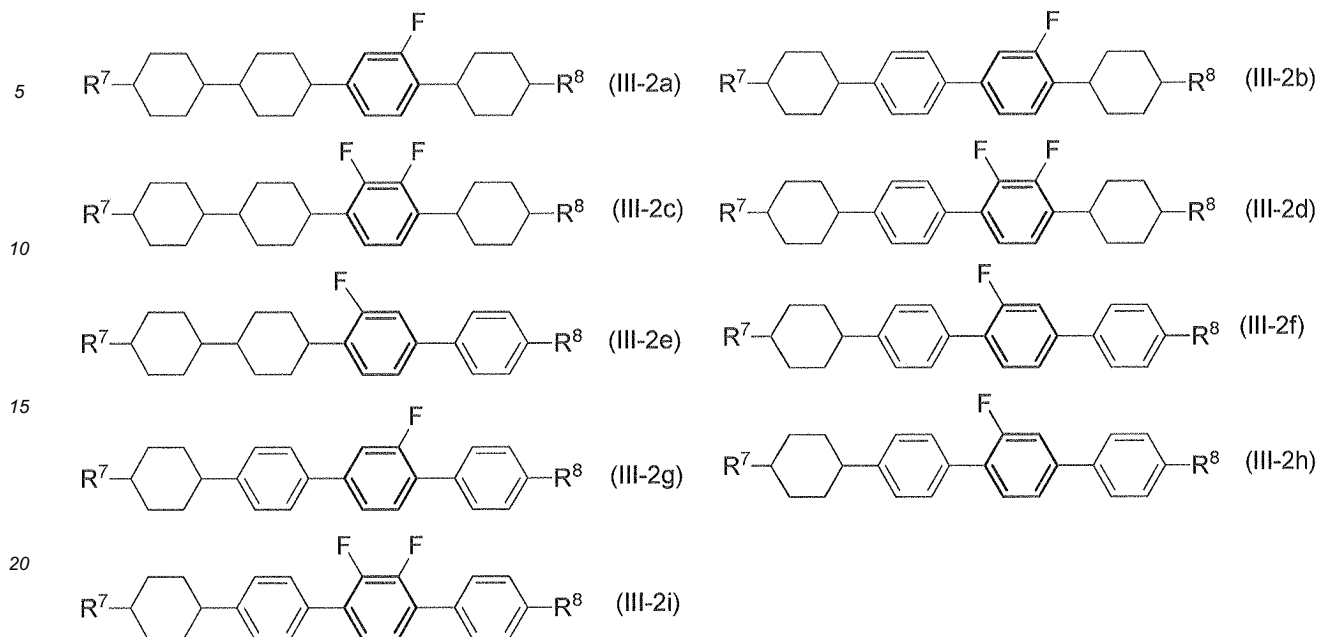


[Chem. 15]

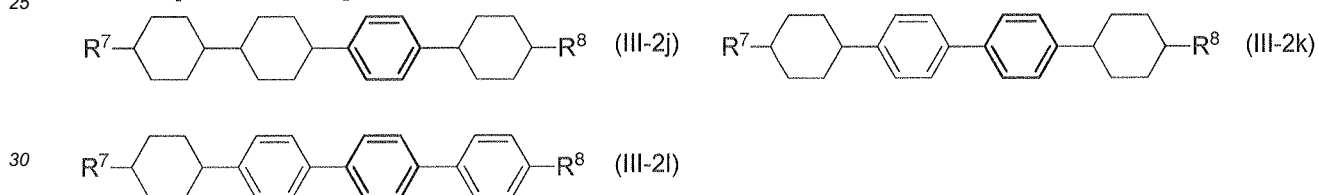


(where R⁷ and R⁸ each independently represent an alkyl group having 1 to 5 carbon atoms, an alkenyl group having 2 to 5 carbon atoms, or an alkoxy group having 1 to 5 carbon atoms; and preferred R⁷ and R⁸ are the same as specified in general formula (III)).

[0059] In the case where n represents 0, preferred compounds represented by general formula (III) are compounds represented by general formula (III-3a) in order to enhance negative dielectric anisotropy and are compounds represented by general formulae (III-3b) in order to enhance response speed:

[Chem. 16]



[Chem. 17]



(where R⁷ and R⁸ each independently represent an alkyl group having 1 to 5 carbon atoms, an alkenyl group having 2 to 5 carbon atoms, or an alkoxy group having 1 to 5 carbon atoms; and preferred R⁷ and R⁸ are the same as specified in general formula (III)).

[0060] R⁷ is preferably an alkyl group having 2 to 5 carbon atoms, and more preferably an alkyl group having 3 carbon atoms. R⁸ is preferably an alkoxy group having 1 to 3 carbon atoms, and more preferably an alkoxy group having 2 carbon atoms.

[0061] Each of the compounds represented by general formulae (II-1) and (II-2) has a negative dielectric anisotropy of which the absolute value is relatively large. The total amount of such compounds is preferably in the range of 30 to 65%, more preferably 40 to 55%, and especially preferably 43 to 50%.

[0062] Compounds represented by general formula (III) include both a compound having a positive dielectric anisotropy and a compound having a negative dielectric anisotropy; in the case where a compound that is to be used has a negative dielectric anisotropy of which the absolute value is not less than 0.3, the total amount of compounds represented by general formulae (II-1), (II-2), and (III) is preferably in the range of 35 to 70%, more preferably 45 to 65%, and especially preferably 50 to 60%.

[0063] It is preferred that the amount of a compound represented by general formula (I) range from 30 to 50% and that the amount of compounds represented by general formulae (II-1), (II-2), and (III) range from 35 to 70%. It is more preferred that the amount of a compound represented by general formula (I) range from 35 to 45% and that the amount of compounds represented by general formulae (II-1), (II-2), and (III) range from 45 to 65%. It is especially preferred that the amount of a compound represented by general formula (I) range from 38 to 42% and the amount of compounds represented by general formulae (II-1), (II-2), and (III) range from 50 to 60%.

[0064] The total amount of compounds represented by general formulae (I), (II-1), (II-2), and (III) is preferably in the range of 80 to 100%, more preferably 90 to 100%, and especially preferably 95 to 100% relative to the whole of the composition.

[0065] The liquid crystal layer of the liquid crystal display device of the present invention can be used in a broad range of nematic phase-isotropic liquid phase transition temperature (T_{ni}), and the temperature is preferably in the range of 60 to 120°C, more preferably 70 to 100°C, and especially preferably 70 to 85°C.

[0066] Dielectric anisotropy at 25°C is preferably in the range of -2.0 to -6.0, more preferably -2.5 to -5.0, and especially preferably -2.5 to -4.0.

[0067] Refractive index anisotropy at 25°C is preferably in the range of 0.08 to 0.13, and more preferably 0.09 to 0.12. In particular, in the case where a cell gap is small, the refractive index anisotropy preferably ranges from 0.10 to 0.12; and in the case where a cell gap is large, the refractive index anisotropy preferably ranges from 0.08 to 0.10.

[0068] Rotational viscosity (γ_1) is preferably not more than 150, more preferably not more than 130, and especially preferably not more than 120.

[0069] In the liquid crystal layer of the liquid crystal display device of the present invention, the function Z of rotational viscosity and refractive index anisotropy preferably has a specific value:

[Math. 1]

$$Z = \gamma_1 / \Delta n^2$$

(where γ_1 represents rotational viscosity, and Δn represents refractive index anisotropy).


[0070] Z is preferably not more than 13000, more preferably not more than 12000, and especially preferably not more than 11000.

[0071] In the case where the liquid crystal display device of the present invention is an active-matrix display device, the liquid crystal layer used therein needs to have a specific resistance of not less than 10^{12} ($\Omega \cdot m$), preferably 10^{13} ($\Omega \cdot m$), and more preferably not less than 10^{14} ($\Omega \cdot m$).

[0072] The liquid crystal layer of the liquid crystal display device of the present invention may contain, in addition to the above-mentioned compounds, typical nematic liquid crystal, smectic liquid crystal, cholesteric liquid crystal, an antioxidant, an ultraviolet absorber, and a polymerizable monomer depending on applications thereof.

[0073] The polymerizable monomer is preferably a difunctional monomer represented by general formula (V):

[Chem. 18]



(where X^1 and X^2 each independently represent a hydrogen atom or a methyl group;

Sp^1 and Sp^2 each independently represent a single bond, an alkylene group having 1 to 8 carbon atoms, or

-O-(CH₂)_s- (where s represents an integer from 2 to 7, and the oxygen atom is connected to an aromatic ring); Z¹ represents -OCH₂-, -CH₂O-, -COO-, -OCO-, -CF₂O-, -OCF₂-, -CH₂CH₂-, -CF₂CF₂-, -CH=CH-COO-, -CH=CH-OCO-, -COO-CH=CH-, -OCO-CH=CH-, -COO-CH₂CH₂-, -OCO-CH₂CH₂-, -CH₂CH₂-COO-, -CH₂CH₂-OCO-, -COO-CH₂-, -OCO-CH₂-, -CH₂-COO-, -CH₂-OCO-, -CY¹=CY²- (where Y¹ and Y² each independently represent a fluorine atom or a hydrogen atom), -C≡C-, or a single bond; and C represents a 1,4-phenylene group, a trans-1,4-cyclohexylene group, or a single bond, and in each 1,4-phenylene group in the formula, any hydrogen atom may be substituted with a fluorine atom).

[0074] Both a diacrylate derivative in which X¹ and X² each represent a hydrogen atom and a dimethacrylate derivative in which X¹ and X² each represent a methyl group are preferred, and a compound in which one of X¹ and X² represents a hydrogen atom and in which the other one represents a methyl group is also preferred. Among such compounds, the diacrylate derivative has the highest polymerization rate, the dimethacrylate derivative has a low polymerization rate, and the asymmetric compound has an intermediate polymerization rate; hence, suitable compound can be employed depending on applications. In PSA display devices, a dimethacrylate derivative is especially preferred.

[0075] Sp¹ and Sp² each independently represent a single bond, an alkylene group having 1 to 8 carbon atoms, or -O-(CH₂)_s-; in PSA display devices, at least any one of Sp¹ and Sp² is preferably a single bond, and a compound in which each of them represents a single bond and a compound in which one of them represents a single bond and in which the other one represents an alkylene group having 1 to 8 carbon atoms or -O-(CH₂)_s- are preferred. In this case, an alkyl group having 1 to 4 carbon atoms is preferred, or s is preferably from 1 to 4.






[0076] Z¹ preferably represents -OCH₂-, -CH₂O-, -COO-, -OCO-, -CF₂O-, -OCF₂-, -CH₂CH₂-, -CF₂CF₂-, or a single bond; more preferably -COO-, -OCO-, or a single bond; and especially preferably a single bond.

[0077] C represents a 1,4-phenylene group in which any hydrogen atom is optionally substituted with a fluorine atom, a trans-1,4-cyclohexylene group, or a single bond, and preferably a 1,4-phenylene group or a single bond. In the case where C does not represent a single bond but represents a ring structure, Z¹ is also preferably a linking group as well as a single bond; in the case where C represents a single bond, Z¹ is preferably a single bond.

[0078] From these viewpoints, a preferred ring structure between Sp¹ and Sp² in general formula (V) is particularly as follows.

[0079] In the case where C in general formula (V) represents a single bond and where the ring structure consists of two rings, the ring structure is preferably represented by any of general formulae (Va-1) to (Va-5), more preferably general formulae (Va-1) to (Va-3), and especially preferably general formula (Va-1):

[Chem. 19]







(where the two ends of each structure are connected to Sp¹ and Sp², respectively).

[0080] Polymerizable compounds having such skeletons enable alignment regulation optimum for PSA liquid crystal display devices after polymerization thereof, which enables a good alignment state; hence, uneven display is reduced or eliminated.

[0081] Accordingly, the polymerizable monomer is especially preferably represented by any of general formulae (V-

1) to (V-4), and most preferably general formula (V-2):

[Chem. 20]



(where Sp² represents an alkylene group having 2 to 5 carbon atoms).

25
[0082] In the case where the polymerizable monomer is added, polymerization is carried out even without a polymerization initiator; however, a polymerization initiator may be used to promote the polymerization. Examples of the polymerization initiator include benzoin ethers, benzophenones, acetophenones, benzyl ketals, and acyl phosphine oxides. In order to enhance storage stability, a stabilizer may be added. Examples of usable stabilizers include hydroquinones, hydroquinone monoalkylethers, tertiary butylcatechol, pyrogallols, thiophenols, nitro compounds, β-naphthylamines, β-naphthols, and nitroso compounds.

30
[0083] The liquid crystal layer containing the polymerizable monomer is useful in liquid crystal display devices, and especially useful in liquid crystal display devices driven by an active matrix; hence, such a liquid crystal layer can be used in liquid crystal display devices of a PSA mode, PSVA mode, VA mode, IPS mode, and ECB mode.

35
[0084] The polymerizable monomer contained in the liquid crystal layer is polymerized by being irradiated with ultraviolet with the result that liquid crystal molecules can be aligned, and such a liquid crystal layer is used in liquid crystal display devices in which the birefringence of a liquid crystal composition is utilized to control the amount of transmitted light. Such a liquid crystal layer is useful in liquid crystal display devices, such as an AM-LCD (active matrix liquid crystal display device), a TN (twisted nematic liquid crystal display device), an STN-LCD (super twisted nematic liquid crystal display device), an OCB-LCD, and an IPS-LCD (in-plane switching liquid crystal display device), particularly useful in an AM-LCD, and can be used in transmissive or reflective liquid crystal display devices.

40
(Color Filter)

45
[0085] The color filter used in the present invention includes a black matrix and at least RGB three-color pixel portions; in the RGB three-color pixel portions, the R pixel portion contains a colorant that is a red diketopyrrolopyrrole pigment having an average primary particle size of 5 to 50 nm determined by small angle X-ray scattering.

50
(R Pixel Portion)

[0086] The R pixel portion contains a red diketopyrrolopyrrole pigment having an average primary particle size of 5 to 50 nm determined by small angle X-ray scattering, and preferably 10 to 30 nm. In particular, the diketopyrrolopyrrole pigment is preferably at least one selected from C. I. Pigment Red 254, 255, 264, and 272 and Orange 71 and 73; and more preferably at least one selected from Red 254, 255, 264, and 272; and especially preferably C. I. Pigment Red 254.

55
[0087] In addition, the R pixel portion preferably contains a pigment derivative as a dispersion aid. The pigment derivative to be contained is preferably at least one of quinacridone-based pigment derivatives, diketopyrrolopyrrole-based pigment derivatives, anthraquinone-based pigment derivatives, and thiazine-based pigment derivatives. Examples

of the modifying moiety include a phthalimidomethyl group, a sulfonate group, an N-(dialkylamino)methyl group, and an N-(dialkylaminoalkyl)sulfonic acid amide group. Among these derivatives, different types may be used in combination.

[0088] The amount of the pigment derivative is preferably in the range of 4 parts to 17 parts, and more preferably 6 parts to 13 parts relative to 100 parts of the red diketopyrrolopyrrole pigment.

(G Pixel Portion)

[0089] The G pixel portion preferably contains at least one selected from the group consisting of a halogenated metallophthalocyanine pigment, a green phthalocyanine dye, and a mixture of a blue phthalocyanine dye and a yellow organic azo dye. The halogenated metallophthalocyanine pigment is a halogenated metallophthalocyanine pigment having a metal center that is a metal selected from the group consisting of Al, Si, Sc, Ti, V, Mg, Fe, Co, Ni, Zn, Cu, Ga, Ge, Y, Zr, Nb, In, Sn, and Pb. In a preferred halogenated metallophthalocyanine pigment, in the case where the metal center is trivalent, the metal center is bonded to any of a halogen atom, a hydroxyl group, and a sulfonate group or oxo- or thio-bridged; and in the case where the metal center is tetravalent, the metal center is bonded to any of an oxygen atom, the same or different two halogen atoms, a hydroxyl group, and a sulfonate group. Preferred examples of the halogenated metallophthalocyanine pigment include halogenated metallophthalocyanine pigments belonging to the following two groups.

(First Group)

[0090] A halogenated metallophthalocyanine pigment which has the metal center that is a metal selected from the group consisting of Al, Si, Sc, Ti, V, Mg, Fe, Co, Ni, Zn, Cu, Ga, Ge, Y, Zr, Nb, In, Sn, and Pb and in which 8 to 16 halogen atoms per one phthalocyanine molecule are connected to benzene rings of the phthalocyanine molecule. In the case where the metal center is trivalent, the metal center is bonded to any of a halogen atom, a hydroxyl group, and a sulfonate group ($-\text{SO}_3\text{H}$); and in the case where the metal center is tetravalent, the metal center is bonded to any of an oxygen atom, the same or different two halogen atoms, a hydroxyl group, and a sulfonate group.

(Second Group)


[0091] A pigment composed of a halogenated metallophthalocyanine dimer containing two halogenated metallophthalocyanine molecules which have the metal centers that are trivalent metals selected from the group consisting of Al, Sc, Ga, Y, and In and in which 8 to 16 halogen atoms per one phthalocyanine molecule are connected to benzene rings of the phthalocyanine molecule. The metal centers of such halogenated metallophthalocyanine molecules are connected to each other via a divalent atomic group selected from the group consisting of an oxygen atom, a sulfur atom, sulfinyl ($-\text{SO}-$), and sulfonyl ($-\text{SO}_2-$).

[0092] In such halogenated metallophthalocyanine pigments, halogen atoms bonded to benzene rings may be the same as or different from each other. In addition, different halogen atoms may be bonded to one benzene ring.

[0093] A halogenated metallophthalocyanine pigment in which 9 to 15 bromine atoms among 8 to 16 halogen atoms per one phthalocyanine molecule are connected to benzene rings of the phthalocyanine molecule has a color of yellow-tinged bright green and is therefore well suitably used for a green pixel portion of the color filter. Such a halogenated metallophthalocyanine pigment is insoluble or less soluble in water or an organic solvent. The above-mentioned halogenated metallophthalocyanine pigment comprehends both a pigment which have not been subjected to a treatment (hereinafter also referred to crude pigment) and a treated pigment.

[0094] The halogenated metallophthalocyanine pigments belonging to the first and second groups can be represented by general formula (PIG-1).

[Chem. 21]

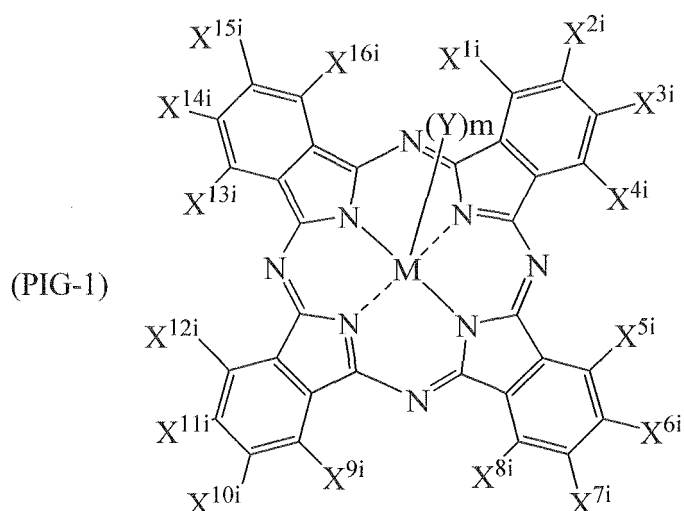

[0095] With reference to general formula (FIG-1), the detail of the halogenated metallophthalocyanine pigment belonging to the first group is as follows.


[0096] In general formula (FIG-1), X^{1i} to X^{16i} each represent a hydrogen atom, a chlorine atom, a bromine atom, or an iodine atom. Four atoms X bonded to one benzene ring may be the same as or different from each other. Among X^{1i} to X^{16i} connected to 4 benzene rings, 8 to 16 of them are chlorine atoms, bromine atoms, or iodine atoms. M represents the metal center. In halogenated metallophthalocyanine pigments having the same type of Y which will be described later and the same value of m which is the number of Y, if a halogenated metallophthalocyanine pigment has less than 8 chlorine atoms, bromine atoms, and iodine atoms in total among 16 X^{1i} to X^{16i} , such a pigment is a blue pigment; and if a halogenated metallophthalocyanine pigment has 8 or more chlorine atoms, bromine atoms, and iodine atoms in total among 16 X^{1i} to X^{16i} , an increase in the total number of these atoms makes the pigment more yellow. Y bonded to the metal center M is the group of monovalent atoms selected from the group consisting of any of halogen atoms of a fluorine atom, a chlorine atom, a bromine atom, and an iodine atom; a hydroxyl group; a sulfonate group, and a divalent oxygen atom. m represents the number of Y bonded to the metal center M and is an integer from 0 to 2.

[0097] m is determined depending on the valence of the metal center M. In the case where the metal center M is trivalent, such as Al, Sc, Ga, Y, or In, m is 1, and any one selected from the group consisting of a fluorine atom, a chlorine atom, a bromine atom, an iodine atom, a hydroxyl group, and a sulfonate group is bonded to the metal center. In the case where the metal center M is tetravalent, such as Si, Ti, V, Ge, Zr, or Sn, m is 2, and an oxygen atom or any two selected from the group consisting of a fluorine atom, a chlorine atom, a bromine atom, an iodine atom, a hydroxyl group, and a sulfonate group are bonded to the metal center. In the case where the metal center M is divalent, such as Mg, Fe, Co, Ni, Zn, Cu, Zr, Sn, or Pb, Y is absent.

[0098] With reference to general formula (FIG-1), the detail of the halogenated metallophthalocyanine pigment belonging to the second group is as follows.

[0099] In general formula (FIG-1), X^{1i} to X^{16i} each represent the same as defined above; the metal center M represents a trivalent metal selected from the group consisting of Al, Sc, Ga, Y, and In; and m represents 1. Y represents the following atomic group.

[Chem. 22]

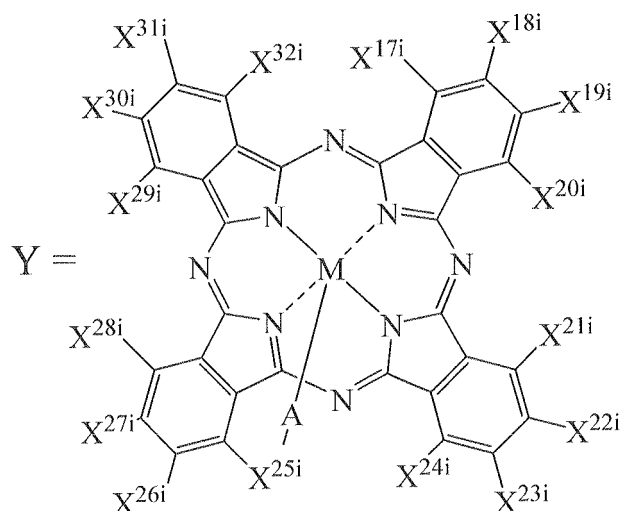

[0100] In the structure of the atomic group Y, the metal center M represents the same as defined above, X^{17i} to X^{32i} each represent the same as X^{1i} to X^{16i} defined in general formula (PIG-1). A represents a divalent atomic group selected from the group consisting of an oxygen atom, a sulfur atom, sulfinyl (-SO-), and sulfonyl (-SO₂-). M in general formula (PIG-1) and M in the atomic group Y are connected to each other via the divalent atomic group A.

[0101] In other words, the halogenated metallophthalocyanine pigment belonging to the second group is a halogenated metallophthalocyanine dimer which includes two halogenated metallophthalocyanine molecules and in which such molecules are connected to each other via the divalent atomic group.

[0102] Specific examples of the halogenated metallophthalocyanine pigment represented by general formula (PIG-1) include the following (1) to (4).

(1) halogenated metallophthalocyanine pigments which each have the metal center that is a divalent metal selected from the group consisting of Mg, Fe, Co, Ni, Zn, Cu, Zr, Sn, and Pb and in which 8 to 16 halogen atoms per one phthalocyanine molecule are bonded to 4 benzene rings, such as a halogenated copper phthalocyanine pigment, a halogenated tin phthalocyanine pigment, a halogenated nickel phthalocyanine pigment, and a halogenated zinc phthalocyanine pigment. Among such halogenated metallophthalocyanine pigments, a chlorinated brominated zinc phthalocyanine pigment is C. I. Pigment Green 58, which is especially preferred.

(2) halogenated metallophthalocyanine pigments which each have the metal center that is a trivalent metal selected from the group consisting of Al, Sc, Ga, Y, and In, in which the metal center is bonded to a halogen atom, a hydroxyl group, or a sulfonate group, and in which 8 to 16 halogen atoms per one phthalocyanine molecule are bonded to 4 benzene rings, such as halogenated chloroaluminum phthalocyanine.

(3) halogenated metallophthalocyanine pigments which each have the metal center that is a tetravalent metal selected from the group consisting of Si, Ti, V, Ge, Zr, and Sn, in which the metal center is bonded to any of an oxygen atom, the same or different two halogen atoms, a hydroxyl group, and a sulfonate group, and in which 8 to 16 halogen atoms per one phthalocyanine molecule are bonded to 4 benzene rings, such as halogenated oxytitanium phthalocyanine and halogenated oxyvanadium phthalocyanine.


(4) pigments each consisting of a halogenated metallophthalocyanine dimer including two halogenated metallophthalocyanine molecules which have the metal centers that are trivalent metals selected from the group consisting of Al, Sc, Ga, Y, and In, in which 8 to 16 halogen atoms per one phthalocyanine molecule are bonded to 4 benzene rings, and of which the metal centers are bonded to each other via a divalent atomic group selected from the group consisting of an oxygen atom, a sulfur atom, sulfinyl, and sulfonyl, such as a halogenated μ -oxo-aluminum phthalocyanine dimer and a halogenated μ -thio-aluminum phthalocyanine dimer.

[0103] In particular, the halogenated metallophthalocyanine pigment is preferably at least one selected from C. I. Pigment Green 7, 36, and 58; and more preferably one or two selected from Green 36 and 58. The green phthalocyanine dye is, in particular, preferably at least one selected from C. I. Solvent Green 4, 5, 7, and 28. The blue phthalocyanine dye is, in particular, preferably at least one selected from C. I. Solvent Blue 4, 5, 25, 35, 36, 38, 58, 59, 67, and 70; more preferably at least one selected from Blue 25, 38, 67, and 70. The yellow organic azo dye is, in particular, preferably at least one selected from C. I. Solvent Yellow 2, 4, 14, 16, 18, 21, 56, 72, 124, 162, and 163; and more preferably one or two selected from Yellow 82 and 162.

(B Pixel Portion)

[0104] The B pixel portion contains at least one selected from the group consisting of a ϵ -copper phthalocyanine pigment, a triarylmethane pigment, and a blue cationic organic dye. The blue cationic organic dye to be contained is preferably C. I. Solvent Blue 7. The ϵ -copper phthalocyanine pigment is preferably C. I. Pigment Blue 15:6. The triarylmethane pigment is preferably a triarylmethane pigment represented by general formula (1):

[Chem. 23]

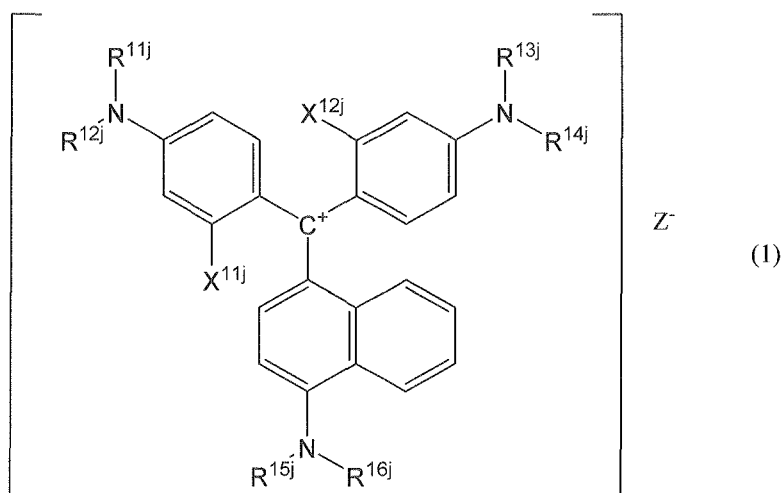

(where R^{11j} to R^{16j} each independently represent a hydrogen atom, an optionally substituted alkyl group having 1 to 8 carbon atoms, or an optionally substituted aryl group; in the case where R^{11j} to R^{16j} each represent an optionally substituted alkyl group, R^{11j} , R^{13j} , and R^{15j} may be connected to adjoining R^{12j} , R^{14j} , and R^{16j} to form ring structures, respectively; X^{11j} and X^{12j} each independently represent a hydrogen atom, a halogen atom, or an optionally substituted alkyl group having 1 to 8 carbon atoms; Z^- is at least one anion selected from heteropolyoxometalate anion represented by $(P_2MoyW_{18-y}O_{62})^{6-/6}$ in which y is an integer of 0, 1, 2, or 3, heteropolyoxometalate anion represented by $(SiMoW_{11}O_{40})^{4-/4}$, and lacunary Dawson-structure phosphotungstic acid heteropolyoxometalate anion; and in the case where one molecule has multiple structures represented by general formula (1), these structures may be the same as or different from each other).

[0105] In general formula (1), R^{11j} to R^{16j} may be the same as or different from each other. Hence, -NRR moieties (RR represents any of combinations of R^{11j} and R^{12j} , R^{13j} and R^{14j} , and R^{15j} and R^{16j}) may be symmetric or asymmetric.

[0106] In the case where R (R represents any of R^{11j} to R^{16j}) is bonded to the adjoining R to form a ring, a cross-linked structure may be formed in such a ring by a hetero atom. Specific examples of such a ring include the following rings. These rings are optionally substituted.

[Chem. 24]



[0107] In terms of chemical stability, R^{11j} to R^{16j} are preferably each independently a hydrogen atom, an optionally substituted alkyl group, or an optionally substituted aryl group.

[0108] In particular, R^{11j} to R^{16j} are preferably each independently any one of the followings: a hydrogen atom; alkyl groups such as a methyl group, an ethyl group, a propyl group, an isopropyl group, a cyclopropyl group, a butyl group, an isobutyl group, a sec-butyl group, a tert-butyl group, a pentyl group, a cyclopentyl group, a hexyl group, a cyclohexyl group, a heptyl group, an octyl group, and a 2-ethylhexyl group; and aryl groups such as a phenyl group and a naphthyl group.

[0109] In the case where R^{11j} to R^{16j} each represent an alkyl group or an aryl group, such an alkyl group or an aryl group is further optionally substituted with any substituent. Examples of such a substituent with which an alkyl group or

an aryl group is further optionally substituted include substituents of [Substituent Group Y].

[Substituent Group Y]

[0110] Alkyl groups such as a methyl group, an ethyl group, a propyl group, an isopropyl group, a cyclopropyl group, a butyl group, an isobutyl group, a sec-butyl group, a tert-butyl group, a pentyl group, a cyclopentyl group, a hexyl group, a cyclohexyl group, a heptyl group, an octyl group, and a 2-ethylhexyl group; aryl groups such as a phenyl group and a naphthyl group; halogen atoms such as a fluorine atom and a chlorine atom; a cyano group; a hydroxyl group; alkoxy groups having 1 to 8 carbon atoms such as a methoxy group, an ethoxy group, a propoxy group, and a butoxy group; optionally substituted amino groups such as an amino group, a diethylamino group, a dibutylamino group, and an acetylamino group; acyl groups such as an acetyl group and a benzoyl group; and acyloxy groups such as an acetyloxy group and a benzoyloxy group

[0111] R^{11j} to R^{16j} are more preferably each an optionally substituted alkyl group having 1 to 8 carbon atoms: in particular, an unsubstituted alkyl group such as a methyl group, an ethyl group, a propyl group, an isopropyl group, a butyl group, an isobutyl group, a sec-butyl group, a pentyl group, a hexyl group, or a 2-ethylhexyl group; an alkoxyalkyl group such as a 2-methoxyethyl group or a 2-ethoxyethyl group; an acyloxy group such as a 2-acetyloxyethyl group; a cyanoalkyl group such as a 2-cyanoethyl group; and a fluoroalkyl group such as a 2,2,2-trifluoroethyl group or a 4,4,4-trifluorobutyl group.

[0112] In the case where X^{11j} and X^{12j} are each the above-mentioned alkyl group, X^{11j} and X^{12j} may be further substituted with any substituent. Examples of such a substituent include halogen atoms, such as a fluorine atom, a chlorine atom, a bromine atom, and an iodine atom, and alkoxy groups, such as a methoxy group, an ethoxy group, and a propoxy group. Specific examples of X^{11j} and X^{12j} include haloalkyl groups, such as a fluoromethyl group, a trifluoromethyl group, a trichloromethyl group, and a 2,2,2-trifluoroethyl group, and an alkoxyalkyl group, such as a methoxymethyl group.

[0113] X^{11j} and X^{12j} are preferably each a substituent having a proper steric hindrance that does not affect a twist structure, such as a hydrogen atom, a methyl group, a chlorine atom, or a trifluoromethyl group. In terms of color tone and thermal resistance, X^{11j} and X^{12j} are most preferably each a hydrogen atom, a methyl group, or a chlorine atom.

[0114] Z^- represents at least one anion selected from a heteropolyoxometalate anion represented by $(P_2Mo_yW_{18-y}O_{62})^{6-/6}$ in which y is an integer of 0, 1, 2, or 3, a heteropolyoxometalate anion represented by $(SiMoW_{11}O_{40})^{4-/4}$, and a lacunary Dawson-structure phosphotungstic acid heteropolyoxometalate anion. In particular, a preferred lacunary Dawson-structure phosphotungstic acid is a mono-lacunary Dawson-structure phosphotungstic acid heteropolyoxometalate anion represented by $(P_2W_{17}O_{61})^{10-/10}$ in terms of curability.

[0115] Specific examples of the triarylmethane pigment represented by general formula (1) include compounds shown in Tables 1 to 7; however, the present invention is not limited thereto within the scope of the present invention.

[Table 1]

No.	R^{11j}	R^{12j}	R^{13j}	R^{14j}	R^{15j}	R^{16j}	X^{11j}	X^{12j}	Z^-
1	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	H	$(P_2W_{18}O_{62})^{6-}$
2	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	H	$(P_2MoW_{17}O_{62})^{6-}$
3	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	H	$(P_2Mo_2W_{16}O_{62})^{6-}$
4	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	H	$(P_2Mo_3W_{15}O_{62})^{6-}$
5	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	H	$(SiMoW_{11}O_{40})^{4-}$
6	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	H	$(P_2W_{17}O_{61})^{10-}$
7	CH3-	CH3-	CH3-	CH3-	C2H5-	H	H	H	$(P_2W_{18}O_{62})^6$
8	CH3-	CH3-	CH3-	CH3-	C2H5-	H	H	H	$(P_2MoW_{17}O_{62})^{6-}$
9	CH3-	CH3-	CH3-	CH3-	C2H5-	H	H	H	$(P_2Mo_3W_{15}O_{62})^{6-}$

[Table 2]

No.	R^{11j}	R^{12j}	R^{13j}	R^{14j}	R^{15j}	R^{16j}	X^{11j}	X^{12j}	Z^-
10	CH3-	CH3-	CH3-	CH3-	C2H5-	H	H	H	$(P_2Mo_3W_{15}O_{62})^6$

EP 2 837 964 B1

(continued)

No.	R ^{11j}	R ^{12j}	R ^{13j}	R ^{14j}	R ^{15j}	R ^{16j}	X ^{11j}	X ^{12j}	Z-
11	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	C ₂ H ₅ -	H	H	H	(SiMoW11O ₄₀) ₄ -
12	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	C ₂ H ₅ -	H	H	H	(P ₂ W ₁₇ O ₆₁) ₁₀ -
13	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	H	H	H	(P ₂ W ₁₈ O ₆₂) ₆ -
14	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	H	H	H	(P ₂ MoW ₁₇ O ₆₂) ₆ -
15	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	H	H	H	(P ₂ Mo ₂ W ₁₆ O ₆₂) ₆ -
16	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	H	H	H	(P ₂ Mo ₃ W ₁₅ O ₆₂) ₆ -
17	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	H	H	H	(SiMoW11O ₄₀) ₄ -
18	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	H	H	H	(P ₂ W ₁₇ O ₆₁) ₁₀ -

[Table 3]

No.	R ^{11j}	R ^{12j}	R ^{13j}	R ^{14j}	R ^{15j}	R ^{16j}	X ^{11j}	X ^{12j}	Z-
19	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	CH ₃ -	H	H	(P ₂ W ₁₈ O ₆₂) ₆ -
20	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	CH ₃ -	H	H	(P ₂ MoW ₁₇ O ₆₂) ₆ -
21	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	CH ₃ -	H	H	(P ₂ Mo ₂ W ₁₆ O ₆₂) ₆ -
22	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	CH ₃ -	H	H	(P ₂ Mo ₃ W ₁₅ O ₆₂) ₆ -
23	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	CH ₃ -	H	H	(SiMoW11O ₄₀) ₄ -
24	CH ₃ -	CH ₃ -	CH ₃ -	CH ₃ -	Ph-	CH ₃ -	H	H	(P ₂ W ₁₇ O ₆₁) ₁₀ -
25	n-C ₃ H ₇ -	n-C ₃ H ₇ -	n-C ₃ H ₇ -	n-C ₃ H ₇ -	C ₂ H ₅ -	H	H	H	(P ₂ W ₁₈ O ₆₂) ₆ -
26	n-C ₃ H ₇ -	n-C ₃ H ₇ -	n-C ₃ H ₇ -	n-C ₃ H ₇ -	C ₂ H ₅ -	H	H	H	(P ₂ MoW ₁₇ O ₆₂) ₆ -
27	n-C ₃ H ₇ -	n-C ₃ H ₇ -	n-C ₃ H ₇ -	n-C ₃ H ₇ -	C ₂ H ₅ -	H	H	H	(P ₂ Mo ₂ W ₁₆ O ₆₂) ₆ -

[Table 4]

No.	R ^{11j}	R ^{12j}	R ^{13j}	R ^{14j}	R ^{15j}	R ^{16j}	X ^{11j}	X ^{12j}	Z-
28	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	H	(P ₂ W ₁₈ O ₆₂) ₆ -
29	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	H	(P ₂ MoW ₁₇ O ₆₂) ₆ -
30	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	H	(P ₂ Mo ₂ W ₁₆ O ₆₂) ₆ -
31	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	H	(P ₂ Mo ₃ W ₁₅ O ₆₂) ₆ -
32	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	H	(SiMoW11O ₄₀) ₄ -
33	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	H	(P ₂ W ₁₇ O ₆₁) ₁₀ -
34	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	CH ₃ -	(P ₂ W ₁₈ O ₆₂) ₆ -
35	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	CH ₃ -	(P ₂ MoW ₁₇ O ₆₂) ₆ -
36	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	CH ₃ -	(P ₂ Mo ₃ W ₁₅ O ₆₂) ₆ -

[Table 5]

No.	R ^{11j}	R ^{12j}	R ^{13j}	R ^{14j}	R ^{15j}	R ^{16j}	X ^{11j}	X ^{12j}	Z-
37	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	CH ₃ -	(P ₂ Mo ₃ W ₁₅ O ₆₂) ₆ -
38	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	C ₂ H ₅ -	H	CH ₃ -	CH ₃ -	(SiMoW11O ₄₀) ₄ -

EP 2 837 964 B1

(continued)

No.	R ^{11j}	R ^{12j}	R ^{13j}	R ^{14j}	R ^{15j}	R ^{16j}	X ^{11j}	X ^{12j}	Z-
39	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	CH3-	CH3-	(P2W17O61)10-
40	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	Cl	H	(P2W18O62)6-
41	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	Cl	H	(P2MoW17O62)6-
42	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	Cl	H	(P2Mo2W16O62)6-
43	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	Cl	H	(P2Mo3W15O62)6-
44	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	Cl	H	(SiMoW11O40)4-
45	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	Cl	H	(P2W17O61)10-

[Table 6]

No.	R ^{11j}	R ^{12j}	R ^{13j}	R ^{14j}	R ^{15j}	R ^{16j}	X ^{11j}	X ^{12j}	Z-
46	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	(P2W18O62)6-
47	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	(P2MoW17O62)6-
48	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	(P2Mo2W16O62)6-
49	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	(P2Mo3W15O62)6-
50	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	(SiMoW11O40)4-
51	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	C2H5-	H	H	(P2W17O61)10-
52					C2H5-	H	H	H	(P2W18O62)6-
53					C2H5-	H	H	H	(P2MoW17O62)6-
54					C2H5-	H	H	H	(P2Mo2W16O62)6-

[Table 7]

No.	R ^{11j}	R ^{12j}	R ^{13j}	R ^{14j}	R ^{15j}	R ^{16j}	X ^{11j}	X ^{12j}	Z-
55					C2H5-	H	H	H	(P2Mo3W15O62)6-
56					C2H5-	H	H	H	(SiMoW11O40)4-
57					C2H5-	H	H	H	(P2W17O61)10-
58	4,4,4-trifluorobutyl	4,4,4-trifluorobutyl	C2H5-	C2H5-	C2H5-	H	H	H	(P2W18O62)6-
59	4,4,4-trifluorobutyl	4,4,4-trifluorobutyl	C2H5-	C2H5-	C2H5-	H	H	H	(P2MoW17O62)6-

(continued)

No.	R ^{11j}	R ^{12j}	R ^{13j}	R ^{14j}	R ^{15j}	R ^{16j}	X ^{11j}	X ^{12j}	Z-
60	4,4,4-trifluorobutyl	4,4,4-trifluorobutyl	C2H5-	C2H5-	C2H5-	H	H	H	(SiMoW11O40)4-
61	4,4,4-trifluorobutyl	4,4,4-trifluorobutyl	C2H5-	C2H5-	C2H5-	H	CH3-	H	(P2W18O62)6-
62	4,4,4-trifluorobutyl	4,4,4-trifluorobutyl	C2H5-	C2H5-	C2H5-	H	CH3	H	(P2MoW17O62)6-
63	4,4,4-trifluorobutyl	4,4,4-trifluorobutyl	C2H5-	C2H5-	C2H5-	H	CH3	H	((SiMoW11O40)4-

[0116] In the RGB three-color pixel portions, it is preferred that the colorant contained in the R pixel portion be C. I. Pigment Red 254 having an average primary particle size of 5 to 50 nm determined by small angle X-ray scattering, that the colorant contained in the G pixel portion be a mixture of C. I. Solvent Blue 67 and C. I. Solvent Yellow 82 and/or 162, and that the colorant contained in the B pixel portion be the triarylmethane pigment represented by general formula (1).

[0117] In the RGB three-color pixel portions, it is also preferred that the colorant contained in the R pixel portion be C. I. Pigment Red 254 having an average primary particle size of 5 to 50 nm determined by small angle X-ray scattering, that the colorant contained in the G pixel portion be at least one selected from C. I. Pigment Green 7, 36, and 58, and that the colorant contained in the B pixel portion be the triarylmethane pigment represented by general formula (1).

[0118] In the RGB three-color pixel portions, the R pixel portion preferably further contains a colorant that is at least one organic dye or pigment selected from the group consisting of C. I. Pigment Red 177, 242, 166, 167, and 179; C. I. Pigment Orange 38 and 71; C. I. Pigment Yellow 150, 215, 185, 138, and 139; C. I. Solvent Red 89; C. I. Solvent Orange 56; and C. I. Solvent Yellow 21, 82, 83:1, 33, and 162.

[0119] In the RGB three-color pixel portions, the G pixel portion preferably further contains a colorant that is at least one organic dye or pigment selected from the group consisting of C. I. Pigment Yellow 150, 215, 185, and 138 and C. I. Solvent Yellow 21, 82, 83:1, and 33.

[0120] In the RGB three-color pixel portions, the B pixel portion preferably further contains a colorant that is at least one organic dye or pigment selected from the group consisting of C. I. Pigment Blue 1; C. I. Pigment Violet 23; C. I. Basic Blue 7; C. I. Basic Violet 10; C. I. Acid Blue 1, 90, and 83; C. I. Direct Blue 86; and C. I. Pigment Blue 15, 15:1, 15:2, 15:3, 15:4, and 15:6.

[0121] It is also preferred that the color filter include the black matrix, the RGB three-color pixel portions, and a Y pixel portion and that the Y pixel portion contain a colorant that is at least one yellow organic dye or pigment selected from the group consisting of C. I. Pigment Yellow 150, 215, 185, 138, and 139 and C. I. Solvent Yellow 21, 82, 83:1, 33, and 162.

[0122] In order to prevent a decrease in the voltage holding ratio (VHR) of the liquid crystal layer and an increase in ion density (ID) therein and to reduce problems of defective display such as dropouts, uneven alignment, and screen burn-in, the chromaticity x and y of each pixel portion of the color filter used in the present invention under a C illuminant in accordance with the XYZ colorimetric system are preferably as follows.

[0123] The chromaticity x of the R pixel portion under a C illuminant in accordance with the XYZ colorimetric system is preferably in the range of 0.58 to 0.69, more preferably 0.62 to 0.68; and the chromaticity y thereof is preferably in the range of 0.31 to 0.36, and more preferably 0.32 to 0.35. It is further preferred that the chromaticity x range from 0.58 to 0.69 and that the chromaticity y range from 0.31 to 0.36, and it is still further preferred that the chromaticity x range from 0.62 to 0.68 and that the chromaticity y range from 0.32 to 0.35.

[0124] The chromaticity x of the G pixel portion under a C illuminant in accordance with the XYZ colorimetric system is preferably in the range of 0.19 to 0.35, more preferably 0.20 to 0.26; and the chromaticity y thereof is preferably in the range of 0.54 to 0.76, and more preferably 0.64 to 0.73. It is further preferred that the chromaticity x range from 0.19 to 0.35 and that the chromaticity y range from 0.54 to 0.76, and it is still further preferred that the chromaticity x range from 0.20 to 0.26 and that the chromaticity y range from 0.64 to 0.73.

[0125] The chromaticity x of the B pixel portion under a C illuminant in accordance with the XYZ colorimetric system is preferably in the range of 0.12 to 0.19, more preferably 0.12 to 0.17; and the chromaticity y thereof is preferably in the range of 0.04 to 0.14, and more preferably 0.05 to 0.12. It is further preferred that the chromaticity x range from 0.11 to 0.19 and that the chromaticity y range from 0.04 to 0.14, and it is still further preferred that the chromaticity x range from 0.12 to 0.17 and that the chromaticity y range from 0.05 to 0.12.

[0126] The chromaticity x of the Y pixel portion under a C illuminant in accordance with the XYZ colorimetric system is preferably in the range of 0.46 to 0.50, more preferably 0.47 to 0.48; and the chromaticity y thereof is preferably in

the range of 0.48 to 0.53, and more preferably 0.50 to 0.52. It is further preferred that the chromaticity x range from 0.46 to 0.50 and that the chromaticity y range from 0.48 to 0.53, and it is still further preferred that the chromaticity x range from 0.47 to 0.48 and that the chromaticity y range from 0.50 to 0.52.

[0127] The term "XYZ colorimetric system" is a color system approved as a standard colorimetric system by CIE (International Commission on Illumination) in 1931.

[0128] The chromaticity of each pixel portion can be adjusted by changing the type or blend ratio of a dye or pigment to be used. The chromaticity can be adjusted, for example, as follows: the chromaticity of the R pixel portion can be adjusted by addition of a proper amount of a yellow dye or pigment and/or orange pigment to a red dye or pigment, the chromaticity of the G pixel portion can be adjusted by addition of a proper amount of a yellow dye or pigment to a green dye or pigment, and the chromaticity of the B pixel portion can be adjusted by addition of a proper amount of a purple dye or pigment to a blue dye or pigment. In addition, properly changing the particle size of a pigment also enables the adjustment of chromaticity.

[0129] The pixel portions of the color filter can be formed by known methods. A representative example of a method for forming the pixel portions is photolithography; in the photolithography, photocurable compositions which will be described later are applied onto the black-matrix-formed surface of a transparent substrate used for a color filter and then heated for drying (pre-baked), pattern exposure is carried out by irradiation with ultraviolet through a photomask to cure part of a photocurable compound which is to be formed into the pixel portions, and then the unexposed part is developed with a developer to remove the part not formed into the pixel portions and to fix the pixel portions to the transparent substrate. In this method, the pixel portions that are cured and colored films made of the photocurable compositions are formed on the transparent substrate.

[0130] Photocurable compositions which will be described later are prepared for the individual R, G, and B pixel portions and optionally a pixel portion of another color, such as a Y pixel portion, and the above-mentioned process is repeated to produce a color filter having colored pixel portions including the R, G, B, and Y pixel portions formed at intended positions.

[0131] Examples of a method for applying photocurable compositions which will be described later onto a transparent substrate such as glass include spin coating, roll coating, and an ink jet technique.

[0132] Conditions for drying the coating films of the photocurable compositions formed on the transparent substrate vary depending on, for example, types and proportions of components thereof and are normally approximately from 50 to 150°C and 1 to 15 minutes. Light used for photo-curing the photocurable compositions is preferably ultraviolet or visible light in a wavelength range of 200 to 500 nm. A variety of light sources that emit light in such a wavelength range can be used.

[0133] Examples of a developing method include a puddle method, a dipping method, and a spray method. After the exposure of the photocurable compositions to light and the development, the transparent substrate on which the pixel portions of necessary colors have been formed is washed with water and then dried. The color filter produced in such a manner is then heated (post-baked) for a predetermined time at 90 to 280°C with heating equipment, such as a hotplate and an oven, to remove volatile components in the colored coating films as well as to thermally cure the unreacted portion of a photocurable compound remaining in the cured and colored coating films of the photocurable compositions, thereby completing production of the color filter.

[0134] The colorants used for the color filter according to the present invention are used in combination with the liquid crystal composition according to the present invention, which enables production of a liquid crystal display device which prevents a decrease in the voltage holding ratio (VHR) of a liquid crystal layer and an increase in ion density (ID) therein and which overcomes problems of defective display, such as dropouts, uneven alignment, and screen burn-in.

[0135] In a general method for preparing the photocurable compositions, the dye and/or pigment compositions used for the color filter according to the present invention, an organic solvent, and a dispersant are used as essential components, the components are mixed and stirred for dispersion to a homogeneous state to prepare pigment dispersion liquids used for forming the pixel portions of the color filter, and then photocurable compounds and optionally thermoplastic resin and a photopolymerization initiator are added thereto, thereby producing the photocurable compositions.

[0136] Examples of an organic solvent used include aromatic solvents such as toluene, xylene, and methoxybenzene; acetate ester-based solvents such as ethyl acetate, propyl acetate, butyl acetate, propylene glycol monomethyl ether acetate, propylene glycol monoethyl ether acetate, diethylene glycol methyl ether acetate, diethylene glycol ethyl ether acetate, diethylene glycol propyl ether acetate, and diethylene glycol butyl ether acetate; propionate solvents such as ethoxyethyl propionate; alcohol-based solvents such as methanol and ethanol; ether-based solvents such as butyl cellosolve, propylene glycol monomethyl ether, diethylene glycol ethyl ether, and diethylene glycol dimethyl ether; ketone-based solvents such as methyl ethyl ketone, methyl isobutyl ketone, and cyclohexanone; aliphatic hydrocarbon solvents such as hexane; nitrogen compound-based solvents such as N,N-dimethylformamide, γ -butyrolactam, N-methyl-2-pyrrolidone, aniline, and pyridine; lactone-based solvents such as γ -butyrolactone; and carbamate esters such as a 48:52 mixture of methyl carbamate and ethyl carbamate.

[0137] Examples of a dispersant used include dispersants such as DISPERBYK 130, 161, 162, 163, 170, 171, 174,

180, 182, 183, 184, 185, 2000, 2001, 2020, 2050, 2070, 2096, 2150, LPN21116, and LPN6919 manufactured by BYK-Chemie GmbH, Efka 46, 47, 452, LP4008, 4009, LP4010, LP4050, LP4055, 400, 401, 402, 403, 450, 451, 453, 4540, 4550, LP4560, 120, 150, 1501, 1502, and 1503 manufactured by Efka Corporation, Solsperse 3000, 9000, 13240, 13650, 13940, 17000, 18000, 20000, 21000, 20000, 24000, 26000, 27000, 28000, 32000, 36000, 37000, 38000, 41000, 42000, 43000, 46000, 54000, and 71000 manufactured by The Lubrizol Corporation, and AJISPER PB711, PB821, PB822, PB814, PN411, and PA111 manufactured by Ajinomoto Co., Inc.; acrylic resins; urethane resins; alkyd resins; natural rosin such as wood rosin, gum rosin, and tall oil rosin; modified rosin such as polymerized rosin, disproportionated rosin, hydrogenated rosin, oxidized rosin, and maleated rosin; and synthetic resins that are in the form of liquid and insoluble to water at room temperature, such as rosin derivatives, e.g., rosin amine, lime rosin, rosin alkylene oxide adducts, rosin alkyd adducts, and rosin-modified phenol. Addition of these dispersants and resins contributes to a reduction in flocculation, an enhancement in the dispersion stability of the pigments, and an enhancement in the viscosity characteristics of the dispersion.

[0138] Organic pigment derivatives may be used as a dispersion aid, and examples thereof include phthalimidomethyl derivatives, sulfonic acid derivatives, N-(dialkylamino)methyl derivatives, and N-(dialkylaminoalkyl)sulfonic acid amide derivatives. Different types of such derivatives can be used in combination.

[0139] Examples of a thermoplastic resin used for preparing a photocurable composition include urethane resins, acrylic resins, polyamide resins, polyimide resins, styrene-maleic acid resins, and styrene-maleic anhydride resins.

[0140] Examples of the photocurable compound include difunctional monomers such as 1,6-hexanediol diacrylate, ethylene glycol diacrylate, neopentyl glycol diacrylate, triethylene glycol diacrylate, bis(acryloxyethoxy)bisphenol A, and 3-methylpentanediol diacrylate; polyfunctional monomers having a relatively low molecular weight, such as trimethylolpropane triacrylate, pentaerythritol triacrylate, tris[2-(meth)acryloyloxyethyl]isocyanurate, dipentaerythritol hexaacrylate, and dipentaerythritol pentaacrylate; and polyfunctional monomers having a relatively large molecular weight, such as polyester acrylates, polyurethane acrylates, and polyether acrylates.

[0141] Examples of the photopolymerization initiator include acetophenone, benzophenone, benzylidimethylketanol, benzoyl peroxide, 2-chlorothioxanthone, 1,3-bis(4'-azidobenzal)-2-propane, 1,3-bis(4'-azidobenzal)-2-propane-2'-sulfonic acid, and 4,4'-diazidostilbene-2,2'-disulfonic acid. Examples of commercially available photopolymerization initiators include "IRGACURE (registered trademark)-184", "IRGACURE (registered trademark)-369", and "DAROCUR (registered trademark)-1173" manufactured by BASF SE; "Lucirin-TPO" manufactured by BASF SE; "KAYACURE (registered trademark) DETX" and "KAYACURE (registered trademark) OA" manufactured by Nippon Kayaku Co., Ltd.; "VICURE 10" and "VICURE 55" manufactured by Stauffer Chemical Company; "Trigonal PI" manufactured by Akzo Nobel N.V.; "Sandoray 1000" manufactured by SANDOZ Co., LTD.; "DEAP" manufactured by The Upjohn Company; and "Biimida-zole" manufactured by Kurogane Kasei Co., Ltd.

[0142] Known photosensitizers can be used in combination with the photopolymerization initiator. Examples of the photosensitizers include amines, ureas, compounds having a sulfur atom, compounds having a phosphorus atom, compounds having a chlorine atom, nitriles, and other compounds having a nitrogen atom. These materials may be used alone or in combination.

[0143] The photopolymerization initiator content is not specifically limited; however, the photopolymerization initiator content is preferably in the range of 0.1 to 30% on a mass basis relative to a photopolymerizable compound or a compound having a photocurable functional group. At a content less than 0.1%, photosensitivity in the photo-curing step is likely to be reduced; at a content larger than 30%, the crystals of the photopolymerization initiator precipitate on a dried coating film of a pigment-dispersed resist with the result that the physical properties of the coating film are impaired in some cases.

[0144] The above-mentioned materials are used, and 300 to 1000 parts of an organic solvent and 1 to 100 parts of a dispersant relative to 100 parts of a dye and/or pigment composition used for the color filter according to the present invention on a mass basis are stirred for dispersion to a homogeneous state, thereby producing dye or pigment dispersion liquids. Then, to the dye or pigment dispersion liquids, a total of 3 to 20 parts of a thermoplastic resin and a photocurable compound relative to 1 part of the dye and/or pigment composition used for the color filter according to the present invention, 0.05 to 3 parts of a photopolymerization initiator relative to 1 part of the photocurable compound, and optionally an organic solvent are added, and the products are stirred for dispersion to a homogeneous state, thereby yielding photocurable compositions used for forming the pixel portions of the color filter.

[0145] Known organic solvents and alkali aqueous solutions can be used as a developer. Especially in the case where the photocurable composition contains a thermoplastic resin or a photocurable compound and where at least any one of these materials has an acid value or is soluble in alkali, washing with an alkali aqueous solution is effective for forming the pixel portions of the color filter.

[0146] The detail of formation of the pixel portions of the color filter by photolithography has been described; however, in the color filter having the pixel portions formed of the pigment compositions used for the color filter according to the present invention, such pixel portions of individual colors may be formed by another technique such as an electrodeposition method, a transfer process, micelle electrolysis, a PVED (photovoltaic electrodeposition) method, an ink jet tech-

nique, a reverse printing method, or a thermal curing method.

(Alignment Film)

[0147] In the liquid crystal display device of the present invention, in the case where alignment films need to be disposed on the liquid-crystal-composition-side planes on the first and second substrate to align the molecules of the liquid crystal composition, an alignment film is placed between the color filter and the liquid crystal layer; however, the alignment film has a small thickness that is not more than 100 nm at the largest, and thus the alignment film does not completely block the interaction between a coloring matter, such as a pigment, contained in the color filter and a liquid crystal compound contained in the liquid crystal layer.

[0148] The interaction between a coloring matter, such as a pigment, contained in the color filter and a liquid crystal compound contained in the liquid crystal layer is larger in a liquid crystal display device in which an alignment film is not disposed.

[0149] Materials usable for the alignment film are transparent organic materials such as polyimide, polyamide, BCB (benzocyclobutene polymer), and polyvinyl alcohol; in particular, polyimide alignment films produced through imidization of polyamic acids synthesized from diamines such as aliphatic or alicyclic diamines, e.g., p-phenylenediamine and 4,4'-diaminodiphenylmethane; aliphatic or alicyclic tetracarboxylic acid anhydrides such as butanetetracarboxylic acid anhydride and 2,3,5-tricarboxycyclopentylacetic acid anhydride; and aromatic tetracarboxylic acid anhydrides such as pyromellitic acid dianhydride are preferred. An alignment function is generally developed by rubbing in this case; however, in the case where the alignment film is used as, for instance, a vertical alignment film, the film can be used without development of an alignment function.

[0150] Materials usable for the alignment film may be materials in which compounds contain a chalcone, cinnamate, cinnamoyl, or an azo group. Such materials may be used in combination with another material such as polyimide or polyamide; in this case, the alignment film may be subjected to rubbing or treatment with a photo-alignment technique.

[0151] In general formation of alignment films, the above-mentioned material of the alignment film is applied onto a substrate by, for example, spin coating to form a resin film; however, uniaxial drawing or a Langmuir-Blodgett technique may be also employed.

(Transparent Electrode)

[0152] In the liquid crystal display device of the present invention, a conductive metallic oxide can be used as a material of the transparent electrode; examples of the metallic oxide include indium (III) oxide (In_2O_3), tin dioxide (SnO_2), zinc oxide (ZnO), indium tin oxide ($\text{In}_2\text{O}_3\text{-SnO}_2$), indium zinc oxide ($\text{In}_2\text{O}_3\text{-ZnO}$), niobium-added titanium dioxide ($\text{Ti}_{1-x}\text{Nb}_x\text{O}_2$), fluorine-doped tin oxide, graphene nanoribbon, and metallic nanowires. Zinc oxide (ZnO), indium tin oxide ($\text{In}_2\text{O}_3\text{-SnO}_2$), and indium zinc oxide ($\text{In}_2\text{O}_3\text{-ZnO}$) are preferred. Transparent conductive films formed of these materials can be patterned by photo-etching or a technique involving use of a mask.

The liquid crystal display device of the present invention is combined with a back light and used in a variety of applications such as liquid crystal television sets, computers monitors, mobile phones, displays of smartphones, laptops, personal digital assistants, and digital signage. Examples of the back light include cold-cathode tube backlights and virtually white backlights with two peak wavelengths or backlights with three peak wavelengths; in the backlight with two or three peak wavelengths, light-emitting diodes using inorganic materials or organic EL devices are used.

EXAMPLES

[0153] Although some best modes of the present invention will now be described in detail with reference to Examples, the present invention is not limited to Examples. In compositions which will be described in Examples and Comparative Examples, the term "%" refers to "mass%".

[0154] In Examples, the following properties were measured.

T_{ni} : nematic phase-isotropic liquid phase transition temperature ($^{\circ}\text{C}$)

Δn : refractive index anisotropy at 25°C

$\Delta\epsilon$: dielectric constant anisotropy at 25°C

η : viscosity at 20°C ($\text{mPa}\cdot\text{s}$)

γ_1 : rotational viscosity at 25°C ($\text{mPa}\cdot\text{s}$)

d_{gap} : gap between first and second substrates in cell (μm)

VHR: voltage holding ratio at 70°C (%) (ratio, represented by %, of measured voltage to initial applied voltage, which was obtained as follows: a liquid crystal composition was put into a cell having a thickness of $3.5\ \mu\text{m}$, and the measurement was carried out under the conditions of applied voltage of 5 V, frame time of 200 ms and pulse width

of 64 μ s.)

ID: ion density at 70°C (pC/cm^2) (ion density obtained as follows: a liquid crystal composition was put into a cell having a thickness of 3.5 μm , and measurement was carried out with an MTR-1 (manufactured by TOYO Corporation) under the conditions of an applied voltage of 20 V and a frequency of 0.05 Hz)

Screen burn-in:

In evaluation of screen burn-in in a liquid crystal display device, a certain fixed pattern was continuously displayed in a display area for 1000 hours, and then the whole of the screen evenly showed an image. Then, the degree of an afterimage of the fixed pattern was visually observed, and result of the observation was evaluated on the basis of the following four criteria:

Excellent: No afterimage observed

Good: Slight afterimage observed, but acceptable

Bad: Afterimage observed, unacceptable

Poor: Afterimage observed, quite inadequate

In Examples, compounds are abbreviated as follows.

(Side Chain)


[0155]

- n $-\text{C}_n\text{H}_{2n+1}$ linear alkyl group having n carbon atoms
- n- $\text{C}_n\text{H}_{2n+1}-$ linear alkyl group having n carbon atoms
- On $-\text{OC}_n\text{H}_{2n+1}$ linear alkoxy group having n carbon atoms
- nO- $\text{C}_n\text{H}_{2n+1}\text{O}-$ linear alkoxy group having n carbon atoms
- V $-\text{CH}=\text{CH}_2$
- V- $\text{CH}_2=\text{CH}-$
- V1 $-\text{CH}=\text{CH}-\text{CH}_3$
- 1V- $\text{CH}_3-\text{CH}=\text{CH}-$
- 2V $-\text{CH}_2-\text{CH}_2-\text{CH}=\text{CH}_3$
- V2- $\text{CH}_3=\text{CH}-\text{CH}_2-\text{CH}_2-$
- 2V1 $-\text{CH}_2-\text{CH}_2-\text{CH}=\text{CH}-\text{CH}_3$
- 1V2- $\text{CH}_3-\text{CH}=\text{CH}-\text{CH}_2-\text{CH}_2-$

(Ring Structure)

[0156]

[Chem. 25]

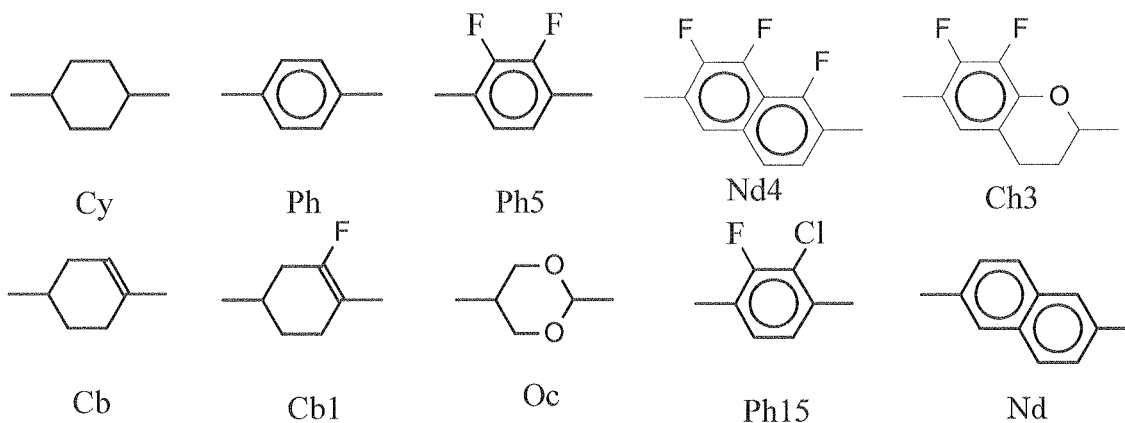

[Production of Color Filter]

[Preparation of Colored Composition]

5 [Colored Red Pigment Composition 1]

[0157] Into a polyethylene bottle, 10 parts of a red pigment 1 (C. I. Pigment Red 254) having an average primary particle size of 25 nm, which was determined by small angle X-ray scattering, and a normalized variance of 40% was added; 55 parts of propylene glycol monomethyl ether acetate, 7.0 parts of DISPERBYK LPN21116 (manufactured by BYK-Chemie GmbH), and 0.3 to 0.4 mm ϕ of zirconia beads "ER-120S" manufactured by Saint-Gobain K.K. were added thereto; the product was subjected to dispersion for 4 hours with a PAINT CONDITIONER (manufactured by Toyo Seiki Seisaku-sho, Ltd.); and then the product was filtered through a filter having a pore size of 1 μ m to produce a pigment dispersion liquid. Then, 75.00 parts of this pigment dispersion liquid, 5.50 parts of a polyester acrylate resin (ARONIX (registered trademark) M7100 manufactured by TOAGOSEI CO., LTD.), 5.00 parts of dipentaerythritol hexaacrylate (KAYARAD (registered trademark) DPHA manufactured by Nippon Kayaku Co., Ltd.), 1.00 parts of benzophenone (KAYACURE (registered trademark) B-100 manufactured by Nippon Kayaku Co., Ltd.), and 13.5 parts of UCAR ester EEP were mixed in a dispersion mixer; and the product was filtered through a filter having a pore size of 1.0 μ m to yield a colored red pigment composition 1.

[0158] The average primary particle size and particle size distribution of the organic pigment were obtained by a small angle X-ray scattering profile (measurement scattering profile) of an organic pigment dispersion on the basis of small angle X-ray scattering as disclosed in Japanese Unexamined Patent Application Publication No. 2006-113042.

[Colored Red Pigment Composition 2]

[0159] In place of 10 parts of the red pigment 1 used in the preparation of the colored red pigment composition 1, 9.95 parts of a red pigment 2 (C. I. Pigment Red 254) having an average primary particle size of 15 nm, which was determined by small angle X-ray scattering, and a normalized variance of 55% and 0.05 parts of a sulfonic acid derivative of diketopyrrolopyrrole were used. Except for this change, a colored red pigment composition 2 was prepared as in the above-mentioned preparation process.

[Colored Red Pigment Composition 3]

[0160] In place of 10 parts of the red pigment 1 used in the preparation of the colored red pigment composition 1, 9.95 parts of a red pigment 3 (C. I. Pigment Red 255) having an average primary particle size of 20 nm, which was determined by small angle X-ray scattering, and a normalized variance of 48% and 0.05 parts of a phthalimidomethyl derivative of dichloroquinacridone were used. Except for this change, a colored red pigment composition 3 was prepared as in the above-mentioned preparation process.

[Colored Red Pigment Composition 4]

[0161] In place of 10 parts of the red pigment 1 used in the preparation of the colored red pigment composition 1, 7.36 parts of a red pigment 31 (C. I. Pigment Red 255) having an average primary particle size of 10 nm, which was determined by small angle X-ray scattering, and a normalized variance of 60%, 0.64 parts of a sulfonic acid derivative of diamino anthraquinonyl, and 2 parts of a yellow pigment 2 (C. I. Pigment Yellow 139) were used. Except for this change, a colored red pigment composition 4 was prepared as in the above-mentioned preparation process.

[Colored Green Pigment Composition 1]

[0162] In place of 10 parts of the red pigment 1 used in the preparation of the colored red pigment composition 1, 6 parts of a green pigment 1 (C. I. Pigment Green 36 "FASTOGEN GREEN 2YK-CF" manufactured by DIC Corporation) and 4 parts of a yellow pigment 1 (C. I. Pigment Yellow 150 "FANCHON FAST YELLOW E4GN" manufactured by LANXESS) were used. Except for this change, a colored green pigment composition 1 was prepared as in the above-mentioned preparation process.

[Colored Green Pigment Composition 2]

[0163] In place of 6 parts of the green pigment 1 and 4 parts of the yellow pigment 1, which had been used in the

EP 2 837 964 B1

preparation of the colored green pigment composition 1, 4 parts of a green pigment 2 (C. I. Pigment Green 58 "FASTOGEN GREEN A110" manufactured by DIC Corporation) and 6 parts of a yellow pigment 2 (C. I. Pigment YELLOW 138) were used. Except for this change, a colored green pigment composition 2 was prepared as in the above-mentioned preparation process.

[Colored Blue Pigment Composition 1]

[0164] In place of 10 parts of the red pigment 1 used in the preparation of the colored red pigment composition 1, 9 parts of a blue pigment 1 (C. I. Pigment Blue 15:6 "FASTOGEN BLUE EP-210" manufactured by DIC Corporation) and 1 part of a purple pigment 1 (C. I. Pigment VIOLET 23) were used.

Except for this change, a colored blue pigment composition 1 was prepared as in the above-mentioned preparation process.

[Colored Blue Pigment Composition 2]

[0165] Into a polyethylene bottle, 1.80 parts of a triarylmethane pigment represented by general formula (1) (compound No. 2 in Table 1), 2.10 parts of BYK-2164 (manufactured by BYK-Chemie GmbH), 11.10 parts of propylene glycol monomethyl ether acetate, and 0.3 to 0.4 mmφ of SEPR beads were added; and the product was subjected to dispersion for 4 hours with a PAINT CONDITIONER (manufactured by Toyo Seiki Seisaku-sho, Ltd.) to produce a pigment dispersion liquid. Then, 75.00 parts of this pigment dispersion liquid, 5.50 parts of a polyester acrylate resin (ARONIX (registered trademark) M7100 manufactured by TOAGOSEI CO., LTD.), 5.00 parts of dipentaerythritol hexaacrylate (KAYARAD (registered trademark) DPHA manufactured by Nippon Kayaku Co., Ltd.), 1.00 parts of benzophenone (KAYACURE (registered trademark) BP-100 manufactured by Nippon Kayaku Co., Ltd.), and 13.5 parts of UCAR ester EEP (manufactured by Union Carbide Corporation) were mixed in a dispersion mixer; and the product was filtered through a filter having a pore size of 1.0 μm to yield a colored blue pigment composition 2.

[Colored Blue Pigment Composition 3]

[0166] In place of the triarylmethane pigment used in the preparation of the colored blue pigment composition 2, another triarylmethane pigment represented by general formula (1) (compound No. 5 in Table 1) was used. Except for this change, a colored blue pigment composition 3 was prepared as in the above-mentioned preparation process.

[Colored Yellow Pigment Composition 1]

[0167] In place of 10 parts of the red pigment 1 used in the preparation of the colored red pigment composition 1, 10 parts of the yellow pigment 1 (C. I. Pigment Yellow 150 "FANCHON FAST YELLOW E4GN" manufactured by LANXESS) was used. Except for this change, a colored yellow pigment composition 1 was prepared as in the above-mentioned preparation process.

[Colored Red Dye Composition 1]

[0168] Into a polyethylene bottle, 10 parts of a red dye 1 (C. I. Solvent Red 1) was added; 55 parts of propylene glycol monomethyl ether acetate and 0.3 to 0.4 mmφ of SEPR beads were added thereto; the product was subjected to dispersion for 4 hours with a PAINT CONDITIONER (manufactured by Toyo Seiki Seisaku-sho, Ltd.); and then the product was filtered through a filter having a pore size of 5 μm to produce a dye-colored liquid. Then, 75.00 parts of this dye-colored liquid, 5.50 parts of a polyester acrylate resin (ARONIX (registered trademark) M7100 manufactured by TOAGOSEI CO., LTD.), 5.00 parts of dipentaerythritol hexaacrylate (KAYARAD (registered trademark) DPHA manufactured by Nippon Kayaku Co., Ltd.), 1.00 parts of benzophenone (KAYACURE (registered trademark) BP-100 manufactured by Nippon Kayaku Co., Ltd.), and 13.5 parts of UCAR ester EEP were mixed in a dispersion mixer; and the product was filtered through a filter having a pore size of 1.0 μm to yield a colored red dye composition 1.

[Colored Green Dye Composition 1]

[0169] In place of 10 parts of the red dye 1 used in the preparation of the colored red dye composition 1, 3 parts of a blue dye 1 (C. I. Solvent Blue 67) and 7 parts of a yellow dye 1 (C. I. Solvent Yellow 162) were used. Except for this change, a colored green dye composition 1 was prepared as in the above-mentioned preparation process.

[Colored Green Dye Composition 2]

[0170] In place of 7 parts of the yellow dye 1 used in the preparation of the colored green dye composition 1, 4 parts of the yellow dye 1 (C. I. Solvent Yellow 162) and 3 parts of a yellow dye 3 (C. I. Solvent Yellow 82) were used. Except for this change, a colored green dye composition 2 was prepared as in the above-mentioned preparation process.

[Colored Green Dye Composition 3]

[0171] In place of 3 parts of the blue dye 1 and 7 parts of the yellow dye 1, which had been used in the preparation of the colored green dye composition 1, 10 parts of a green dye 1 (C. I. Solvent Green 7) was used. Except for this change, a colored green dye composition 3 was prepared as in the above-mentioned preparation process.

[Colored Yellow Dye Composition 1]

[0172] In place of 10 parts of the red dye 1 used in the preparation of the colored red dye composition 1, 10 parts of the yellow dye 4 (C. I. Solvent Yellow 21) was used. Except for this change, a colored yellow dye composition 1 was prepared as in the above-mentioned preparation process.

[Colored Yellow Dye Composition 2]

[0173] In place of 10 parts of the yellow dye 1 used in the preparation of the colored yellow dye composition 1, 10 parts of a yellow dye 5 (C. I. Solvent Yellow 2) was used. Except for this change, a colored yellow dye composition 2 was prepared as in the above-mentioned preparation process.

[Colored Blue Dye Composition 1]

[0174] In place of the red dye 1 used in the preparation of the colored red dye composition 1, 10 parts of the blue dye 3 (C. I. Solvent Blue 7) was used. Except for this change, a colored blue dye composition 1 was prepared as in the above-mentioned preparation process.

[Colored Blue Dye Composition 2]

[0175] In place of 10 parts of the blue dye 3 used in the preparation of the colored blue dye composition 1, 10 parts of a blue dye 2 (C. I. Solvent Blue 12) was used. Except for this change, a colored blue dye composition 2 was prepared as in the above-mentioned preparation process.

[Production of Color Filter]

[0176] The colored red composition 1 was applied by spin coating onto a glass substrate on which a black matrix had been formed in advance, thereby forming a film having a thickness of 2 μm . The product was dried at 70°C for 20 minutes and then exposed to ultraviolet through a photomask with exposure equipment having an extra-high pressure mercury lamp to form a striped pattern. The product was subjected to a spray development for 90 seconds with an alkaline developer, washed with ion exchanged water, and air-dried. Then, the product was post-baked at 230°C for 30 minutes in a clean oven to form a red pixel portion composed of stripe-shaped colored layers on the transparent substrate.

[0177] Then, the colored green composition 1 was similarly applied by spin coating to form a film having a thickness of 2 μm . The product was dried, and then part of the product which did not correspond to the above-mentioned red pixel portion was exposed to light with exposure equipment and subsequently developed to form stripe-shaped colored layers, thereby forming a green pixel portion adjoining the red pixel portion.

[0178] Then, the colored blue composition 1 was similarly applied by spin coating to form a film having a thickness of 2 μm , thereby forming a blue pixel portion adjoining the red and green pixel portions. Through such a process, a color filter having the stripe-shaped pixel portions of three colors of red, green, and blue on the transparent substrate was produced.

[0179] The colored dye compositions or colored pigment compositions shown in Table 8 were used to produce color filters 1 to 4 and a comparative color filter 1.

[Table 8]

	Color filter 1	Color filter 2	Color filter 3	Color filter 4	Comparative color filter 1
R pixel portion	Colored red pigment composition 1	Colored red pigment composition 2	Colored red pigment composition 3	Colored red pigment composition 4	Colored red dye composition 1
G pixel portion	Colored green dye composition 1	Colored green dye composition 2	Colored green pigment composition 1	Colored green pigment composition 2	Colored green dye composition 3
B pixel portion	Colored blue dye composition 1	Colored blue pigment composition 1	Colored blue pigment composition 2	Colored blue pigment composition 3	Colored blue dye composition 2
Y pixel portion	No	Colored yellow dye composition 1	No	Colored yellow pigment composition 1	Colored yellow dye composition 2

[0180] The x chromaticity and y chromaticity of each pixel portion of the color filters under a C illuminant in accordance with the CIE1931 XYZ colorimetric system were measured with a microscope MX-50 manufactured by Olympus Corporation and a spectrophotometer MCPD-3000 microspectrophotometer manufactured by Otsuka Electronics Co., Ltd. Table 9 shows results of the measurement.

[Table 9]

	Color filter 1 (x, y)	Color filter 2 (x, y)	Color filter 3 (x, y)	Color filter 4 (x, y)	Comparative color filter (x, y)
R pixel portion	(0.62, 0.32)	(0.64, 0.35)	(0.68, 0.32)	(0.61, 0.36)	(0.59, 0.30)
G pixel portion	(0.26, 0.68)	(0.27, 0.69)	(0.24, 0.67)	(0.24, 0.72)	(0.20, 0.55)
B pixel portion	(0.17, 0.10)	(0.13, 0.14)	(0.14, 0.10)	(0.19, 0.10)	(0.14, 0.15)
Y pixel portion		(0.47, 0.51)		(0.48, 0.50)	(0.49, 0.48)

(Examples 1 to 4)

[0181] Electrodes corresponding to first and second substrates were formed, vertical alignment films were formed on the facing surfaces thereof, the alignment films were slightly rubbed to form VA cells, and then a liquid crystal composition 1 shown in Table 10 was placed between the first and second substrates. Then, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Examples 1 to 4 ($d_{\text{gap}} = 3.5 \mu\text{m}$ and alignment film SE-5300). The VHR and ID of the produced liquid crystal display devices were measured. The screen burn-in of each liquid crystal display device was evaluated. Table 11 shows results of the measurement and evaluation.

[Table 10]

Liquid crystal composition 1	
$T_{\text{NI}} / ^\circ\text{C}$	81.0
Δn	0.103
$\Delta \varepsilon$	-2.9
$\eta / \text{mPa}\cdot\text{s}$	20.3
$\gamma_1 / \text{mPa}\cdot\text{s}$	112

(continued)

Liquid crystal composition 1	
$\gamma_1 / \Delta n^2 \times 10^{-2}$	105
3-Cy-Cy-2	24%
3-Cy-Cy-4	10%
3-Cy-Cy-5	5%
3-Cy-Ph-O1	2%
3-Cy-Ph5-O2	13%
2-Cy-Ph-Ph5-O2	9%
3-Cy-Ph-Ph5-O2	9%
3-Cy-Cy-Ph5-O3	5%
4-Cy-Cy-Ph5-O2	6%
5-Cy-Cy-Ph5-O2	5%
3-Ph-Ph5-Ph-2	6%
4-Ph-Ph5-Ph-2	6%

[Table 11]

	Example 1	Example 2	Example 3	Example 4
Liquid crystal composition	Liquid crystal composition 1	Liquid crystal composition 1	Liquid crystal composition 1	Liquid crystal composition 1
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.2	99.4	99.6
ID	70	54	26	15
Screen burn-in	Good	Good	Excellent	Excellent

[0182] The liquid crystal composition 1 had a temperature range of a liquid crystal phase of 81°C, which was practical for a liquid crystal composition used for TV sets, a dielectric anisotropy with a large absolute value thereof, a low viscosity, and optimum Δn .

[0183] Each of the liquid crystal display devices of Examples 1 to 4 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 5 to 12)

[0184] As in Example 1, liquid crystal compositions shown in Table 12 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 5 to 12, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 13 and 14 show results of the measurement and evaluation.

[Table 12]

Liquid crystal composition 2		Liquid crystal composition 3	
$T_{NI} / ^\circ\text{C}$	76.0	$T_{NI} / ^\circ\text{C}$	84.8
Δn	0.103	Δn	0.103
$\Delta\epsilon$	-2.9	$\Delta\epsilon$	-2.9
$\eta / \text{mPa}\cdot\text{s}$	19.8	$\eta / \text{mPa}\cdot\text{s}$	21.4
$\gamma_1 / \text{mPa}\cdot\text{s}$	110	$\gamma_1 / \text{mPa}\cdot\text{s}$	119
$\gamma_1 / \Delta n^2 \times 10^{-2}$	103	$\gamma_1 / \Delta n^2 \times 10^{-2}$	112
3-Cy-Cy-2	24%	3-Cy-Cy-2	24%
3-Cy-Cy-4	10%	3-Cy-Cy-4	11%
3-Cy-Ph-O1	7%	3-Cy-Ph5-O2	12%
3-Cy-Ph5-O2	14%	2-Cy-Ph-Ph5-O2	5%
2-Cy-Ph-Ph5-O2	7%	3-Cy-Ph-Ph5-O2	6%
3-Cy-Ph-Ph5-O2	9%	3-Cy-Cy-Ph5-O3	8%
3-Cy-Cy-Ph5-O3	5%	4-Cy-Cy-Ph5-O2	8%
4-Cy-Cy-Ph5-O2	7%	5-Cy-Cy-Ph5-O2	8%
5-Cy-Cy-Ph5-O2	5%	3-Ph-Ph5-Ph-2	6%
3-Ph-Ph5-Ph-2	6%	4-Ph-Ph5-Ph-2	6%
4-Ph-Ph5-Ph-2	6%	5-Ph-Ph-1	3%
		3-Cy-Cy-Ph-1	3%

[Table 13]

	Example 5	Example 6	Example 7	Example 8
Liquid crystal composition	Liquid crystal composition 2	Liquid crystal composition 2	Liquid crystal composition 2	Liquid crystal composition 2
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.2	99.4	99.5
ID	74	57	33	21
Screen burn-in	Good	Excellent	Excellent	Excellent

[Table 14]

	Example 9	Example 10	Example 11	Example 12
Liquid crystal composition	Liquid crystal composition 3	Liquid crystal composition 3	Liquid crystal composition 3	Liquid crystal composition 3
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.3	99.5	99.7
ID	66	39	25	13
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[0185] Each of the liquid crystal display devices of Examples 5 to 12 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

EP 2 837 964 B1

(Examples 13 to 24)

[0186] As in Example 1, liquid crystal compositions shown in Table 15 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 13 to 24, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 16 and 18 show results of the measurement and evaluation.

[Table 15]

Liquid crystal composition 4		Liquid crystal composition 5		Liquid crystal composition 6	
$T_{NI} / ^\circ C$	74.9	$T_{NI} / ^\circ C$	80.2	$T_{NI} / ^\circ C$	85.7
Δn	0.102	Δn	0.105	Δn	0.104
$\Delta \epsilon$	-2.9	$\Delta \epsilon$	-2.9	$\Delta \epsilon$	-3.0
$\eta / mPa \cdot s$	21.1	$\eta / mPa \cdot s$	22.7	$\eta / mPa \cdot s$	22.9
$\gamma_1 / mPa \cdot s$	116	$\gamma_1 / mPa \cdot s$	124	$\gamma_1 / mPa \cdot s$	126
$\gamma_1 / \Delta n^2 \times 10^{-2}$	111	$\gamma_1 / \Delta n^2 \times 10^{-2}$	112	$\gamma_1 / \Delta n^2 \times 10^{-2}$	116
3-Cy-Cy-2	22%	3-Cy-Cy-2	20%	3-Cy-Cy-2	20%
3-Cy-Cy-4	11%	3-Cy-Cy-4	10%	3-Cy-Cy-4	10%
3-Cy-Ph5-O2	7%	3-Cy-Ph5-O2	7%	3-Cy-Ph5-O2	7%
3-Cy-Ph5-O4	8%	3-Cy-Ph5-O4	7%	3-Cy-Ph5-O4	7%
2-Cy-Ph-Ph5-O2	6%	2-Cy-Ph-Ph5-O2	6%	2-Cy-Ph-Ph5-O2	6%
3-Cy-Ph-Ph5-O2	7%	3-Cy-Ph-Ph5-O2	7%	3-Cy-Ph-Ph5-O2	7%
3-Cy-Cy-Ph5-O3	7%	3-Cy-Cy-Ph5-O3	7%	3-Cy-Cy-Ph5-O3	7%
4-Cy-Cy-Ph5-O2	7%	4-Cy-Cy-Ph5-O2	8%	4-Cy-Cy-Ph5-O2	8%
5-Cy-Cy-Ph5-O2	7%	5-Cy-Cy-Ph5-O2	7%	5-Cy-Cy-Ph5-O2	7%
3-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	4%
4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%
5-Ph-Ph-1	8%	5-Ph-Ph-1	8%	5-Ph-Ph-1	5%
3-Cy-Cy-Ph-1	2%	3-Cy-Cy-Ph-1	5%	3-Cy-Cy-Ph-1	8%

[Table 16]

	Example 13	Example 14	Example 15	Example 16
Liquid crystal composition	Liquid crystal composition 4	Liquid crystal composition 4	Liquid crystal composition 4	Liquid crystal composition 4
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.4	99.5	99.7
ID	64	37	28	14
Screen burn-in	Good	Excellent	Excellent	Excellent

[Table 17]

	Example 17	Example 18	Example 19	Example 20
Liquid crystal composition	Liquid crystal composition 5	Liquid crystal composition 5	Liquid crystal composition 5	Liquid crystal composition 5

(continued)

	Example 17	Example 18	Example 19	Example 20
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.4	99.6	99.6
ID	43	31	17	13
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[Table 18]

	Example 21	Example 22	Example 23	Example 24
Liquid crystal composition	Liquid crystal composition 6	Liquid crystal composition 6	Liquid crystal composition 6	Liquid crystal composition 6
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.5	99.5	99.6
ID	59	27	24	19
Screen burn-in	Good	Excellent	Excellent	Excellent

[0187] Each of the liquid crystal display devices of Examples 13 to 24 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 25 to 36)

[0188] As in Example 1, liquid crystal compositions shown in Table 19 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 25 to 36, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 20 to 22 show results of the measurement and evaluation.

EP 2 837 964 B1

[Table 19]

Liquid crystal composition 7		Liquid crystal composition 8		Liquid crystal composition 9	
$T_{NI} / ^\circ C$	75.1	$T_{NI} / ^\circ C$	80.4	$T_{NI} / ^\circ C$	85.1
Δn	0.103	Δn	0.103	Δn	0.103
$\Delta \varepsilon$	-2.6	$\Delta \varepsilon$	-2.6	$\Delta \varepsilon$	-2.6
$\eta / mPa \cdot s$	20.5	$\eta / mPa \cdot s$	21.6	$\eta / mPa \cdot s$	22.7
$\gamma_1 / mPa \cdot s$	117	$\gamma_1 / mPa \cdot s$	125	$\gamma_1 / mPa \cdot s$	130
$\gamma_1 / \Delta n^2 \times 10^{-2}$	110	$\gamma_1 / \Delta n^2 \times 10^{-2}$	117	$\gamma_1 / \Delta n^2 \times 10^{-2}$	122
3-Cy-Cy-2	15%	3-Cy-Cy-2	15%	3-Cy-Cy-2	10%
3-Cy-Cy-4	12%	3-Cy-Cy-4	12%	3-Cy-Cy-4	15%
3-Cy-Cy-5	7%	3-Cy-Cy-5	7%	3-Cy-Cy-5	12%
3-Cy-Ph-O1	12%	3-Cy-Ph-O1	12%	3-Cy-Ph-O1	9%
3-Cy-Ph5-O2	6%	3-Cy-Ph5-O2	5%	3-Cy-Ph5-O2	5%
3-Cy-Ph5-O4	7%	3-Cy-Ph5-O4	5%	3-Cy-Ph5-O4	5%
2-Cy-Ph-Ph5-O2	11%	2-Cy-Ph-Ph5-O2	11%	2-Cy-Ph-Ph5-O2	11%
3-Cy-Ph-Ph5-O2	12%	3-Cy-Ph-Ph5-O2	11%	3-Cy-Ph-Ph5-O2	11%
3-Cy-Cy-Ph5-O3	3%	3-Cy-Cy-Ph5-O3	4%	3-Cy-Cy-Ph5-O3	4%
4-Cy-Cy-Ph5-O2	4%	4-Cy-Cy-Ph5-O2	6%	4-Cy-Cy-Ph5-O2	6%
5-Cy-Cy-Ph5-O2	3%	5-Cy-Cy-Ph5-O2	4%	5-Cy-Cy-Ph5-O2	4%
3-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	4%
4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%

[Table 20]

	Example 25	Example 26	Example 27	Example 28
Liquid crystal composition	Liquid crystal composition 7	Liquid crystal composition 7	Liquid crystal composition 7	Liquid crystal composition 7
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.4	99.6	99.7
ID	48	38	20	13
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[Table 21]

	Example 29	Example 30	Example 31	Example 32
Liquid crystal composition	Liquid crystal composition 8	Liquid crystal composition 8	Liquid crystal composition 8	Liquid crystal composition 8
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.3	99.4	99.6
ID	62	42	33	19
Screen burn-in	Good	Excellent	Excellent	Excellent

[Table 22]

	Example 33	Example 34	Example 35	Example 36
Liquid crystal composition	Liquid crystal composition 9	Liquid crystal composition 9	Liquid crystal composition 9	Liquid crystal composition 9
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	99.3	99.4	99.5
ID	82	46	39	26
Screen burn-in	Good	Excellent	Excellent	Excellent

[0189] Each of the liquid crystal display devices of Examples 25 to 36 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 37 to 48)

[0190] As in Example 1, liquid crystal compositions shown in Table 23 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 37 to 48, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 24 to 26 show results of the measurement and evaluation.

[Table 23]

Liquid crystal composition 10		Liquid crystal composition 11		Liquid crystal composition 12	
$T_{NI} / ^\circ\text{C}$	76.7	$T_{NI} / ^\circ\text{C}$	80.3	$T_{NI} / ^\circ\text{C}$	85.8
Δn	0.109	Δn	0.105	Δn	0.104
$\Delta\epsilon$	-3.0	$\Delta\epsilon$	-3.1	$\Delta\epsilon$	-3.2
$\eta / \text{mPa}\cdot\text{s}$	22.4	$\eta / \text{mPa}\cdot\text{s}$	21.8	$\eta / \text{mPa}\cdot\text{s}$	22.0
$\gamma_1 / \text{mPa}\cdot\text{s}$	131	$\gamma_1 / \text{mPa}\cdot\text{s}$	126	$\gamma_1 / \text{mPa}\cdot\text{s}$	128
$\gamma_1 / \Delta n^2 \times 10^{-2}$	110	$\gamma_1 / \Delta n^2 \times 10^{-2}$	114	$\gamma_1 / \Delta n^2 \times 10^{-2}$	119
3-Cy-Cy-2	24%	3-Cy-Cy-2	24%	3-Cy-Cy-2	24%
3-Cy-Cy-4	6%	3-Cy-Cy-4	10%	3-Cy-Cy-4	10%
3-Cy-Ph-O1	5%	3-Cy-Ph-O1	4%	3-Cy-Ph-O1	4%
3-Cy-Ph5-O4	6%	3-Cy-Ph5-O4	6%	3-Cy-Ph5-O4	6%
3-Ph-Ph5-O2	6%	3-Ph-Ph5-O2	6%	3-Ph-Ph5-O2	6%
2-Cy-Ph-Ph5-O2	8%	2-Cy-Ph-Ph5-O2	8%	2-Cy-Ph-Ph5-O2	8%
3-Cy-Ph-Ph5-O2	8%	3-Cy-Ph-Ph5-O2	8%	3-Cy-Ph-Ph5-O2	8%
3-Cy-Cy-Ph5-O3	7%	3-Cy-Cy-Ph5-O3	7%	3-Cy-Cy-Ph5-O3	7%
4-Cy-Cy-Ph5-O2	9%	4-Cy-Cy-Ph5-O2	9%	4-Cy-Cy-Ph5-O2	9%
5-Cy-Cy-Ph5-O2	7%	5-Cy-Cy-Ph5-O2	7%	5-Cy-Cy-Ph5-O2	7%
3-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	4%
4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%
5-Ph-Ph-1	6%	5-Ph-Ph-1	3%	3-Cy-Cy-Ph-1	3%

[Table 24]

	Example 37	Example 38	Example 39	Example 40
Liquid crystal composition	Liquid crystal composition 10	Liquid crystal composition 10	Liquid crystal composition 10	Liquid crystal composition 10
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.2	99.5	99.6
ID	77	58	29	17
Screen burn-in	Good	Good	Excellent	Excellent

[Table 25]

	Example 41	Example 42	Example 43	Example 44
Liquid crystal composition	Liquid crystal composition 11	Liquid crystal composition 11	Liquid crystal composition 11	Liquid crystal composition 11
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.4	99.5	99.7
ID	50	37	26	16
Screen burn-in	Good	Excellent	Excellent	Excellent

[Table 26]

	Example 45	Example 46	Example 47	Example 48
Liquid crystal composition	Liquid crystal composition 12	Liquid crystal composition 12	Liquid crystal composition 12	Liquid crystal composition 12
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.4	99.6	99.8
ID	45	39	24	12
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[0191] Each of the liquid crystal display devices of Examples 37 to 48 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 49 to 60)

[0192] As in Example 1, liquid crystal compositions shown in Table 27 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 49 to 60, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 28 to 30 show results of the measurement and evaluation.

EP 2 837 964 B1

[Table 27]

Liquid crystal composition 13		Liquid crystal composition 14		Liquid crystal composition 15	
$T_{NI} / ^\circ C$	71.9	$T_{NI} / ^\circ C$	78.8	$T_{NI} / ^\circ C$	73.8
Δn	0.116	Δn	0.113	Δn	0.113
$\Delta \epsilon$	-3.6	$\Delta \epsilon$	-3.5	$\Delta \epsilon$	-3.9
$\eta / \text{mPa}\cdot\text{s}$	21.2	$\eta / \text{mPa}\cdot\text{s}$	21.1	$\eta / \text{mPa}\cdot\text{s}$	21.8
$\gamma_1 / \text{mPa}\cdot\text{s}$	123	$\gamma_1 / \text{mPa}\cdot\text{s}$	122	$\gamma_1 / \text{mPa}\cdot\text{s}$	123
$\gamma_1 / \Delta n^2 \times 10^{-2}$	92	$\gamma_1 / \Delta n^2 \times 10^{-2}$	95	$\gamma_1 / \Delta n^2 \times 10^{-2}$	97
3-Cy-Cy-2	24%	3-Cy-Cy-2	23%	3-Cy-Cy-2	16%
3-Cy-Ph-O1	7%	3-Cy-Cy-4	5%	3-Cy-Cy-4	9%
2-Cy-Ph5-O2	6%	3-Cy-Ph-O1	3%	3-Cy-Ph-O1	6%
3-Cy-Ph5-O4	6%	2-Cy-Ph5-O2	5%	2-Cy-Ph5-O2	6%
3-Ph-Ph5-O2	5%	3-Cy-Ph5-O4	5%	3-Cy-Ph5-O4	6%
5-Ph-Ph5-O2	5%	3-Ph-Ph5-O2	5%	3-Ph-Ph5-O2	6%
2-Cy-Ph-Ph5-O2	7%	5-Ph-Ph5-O2	5%	5-Ph-Ph5-O2	6%
3-Cy-Ph-Ph5-O2	9%	2-Cy-Ph-Ph5-O2	7%	2-Cy-Ph-Ph5-O2	5%
3-Cy-Cy-Ph5-O3	5%	3-Cy-Ph-Ph5-O2	7%	3-Cy-Ph-Ph5-O2	7%
4-Cy-Cy-Ph5-O2	5%	3-Cy-Cy-Ph5-O3	5%	3-Cy-Cy-Ph5-O3	5%
5-Cy-Cy-Ph5-O2	4%	4-Cy-Cy-Ph5-O2	6%	4-Cy-Cy-Ph5-O2	6%
3-Ph-Ph5-Ph-2	5%	5-Cy-Cy-Ph5-O2	5%	5-Cy-Cy-Ph5-O2	6%
4-Ph-Ph5-Ph-2	6%	3-Ph-Ph5-Ph-2	5%	3-Ph-Ph5-Ph-2	5%
3-Cy-Cy-Ph-1	6%	4-Ph-Ph5-Ph-2	6%	4-Ph-Ph5-Ph-2	5%
		3-Cy-Cy-Ph-1	8%	3-Cy-Cy-Ph-1	6%

[Table 28]

	Example 49	Example 50	Example 51	Example 52
Liquid crystal composition	Liquid crystal composition 13	Liquid crystal composition 13	Liquid crystal composition 13	Liquid crystal composition 13
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.3	99.5	99.6
ID	44	41	27	20
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[Table 29]

	Example 53	Example 54	Example 55	Example 56
Liquid crystal composition	Liquid crystal composition 14	Liquid crystal composition 14	Liquid crystal composition 14	Liquid crystal composition 14
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.4	99.5	99.6
ID	78	38	28	19
Screen burn-in	Good	Excellent	Excellent	Excellent

[Table 30]

	Example 57	Example 58	Example 59	Example 60
Liquid crystal composition	Liquid crystal composition 15	Liquid crystal composition 15	Liquid crystal composition 15	Liquid crystal composition 15
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.4	99.5	99.7
ID	51	42	26	14
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[0193] Each of the liquid crystal display devices of Examples 49 to 60 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Example 61 to 72)

[0194] As in Example 1, liquid crystal compositions shown in Table 31 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 61 to 72, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 32 to 34 show results of the measurement and evaluation.

[Table 31]

Liquid crystal composition 16		Liquid crystal composition 17		Liquid crystal composition 18	
$T_{NI} / ^\circ\text{C}$	75.9	$T_{NI} / ^\circ\text{C}$	82.3	$T_{NI} / ^\circ\text{C}$	85.7
Δn	0.112	Δn	0.111	Δn	0.112
$\Delta \epsilon$	-2.8	$\Delta \epsilon$	-2.7	$\Delta \epsilon$	-2.8
$\eta / \text{mPa}\cdot\text{s}$	19.8	$\eta / \text{mPa}\cdot\text{s}$	19.2	$\eta / \text{mPa}\cdot\text{s}$	20.1
$\gamma_1 / \text{mPa}\cdot\text{s}$	121	$\gamma_1 / \text{mPa}\cdot\text{s}$	114	$\gamma_1 / \text{mPa}\cdot\text{s}$	119
$\gamma_1 / \Delta n^2 \times 10^{-2}$	96	$\gamma_1 / \Delta n^2 \times 10^{-2}$	94	$\gamma_1 / \Delta n^2 \times 10^{-2}$	95
3-Cy-Cy-2	19%	3-Cy-Cy-2	21%	3-Cy-Cy-2	19%
3-Cy-Cy-4	12%	3-Cy-Cy-4	12%	3-Cy-Cy-4	12%
3-Cy-Cy-5	5%	3-Cy-Cy-5	5%	3-Cy-Cy-5	4%
3-Cy-Ph-O1	5%	2-Cy-Ph5-O2	4%	2-Cy-Ph5-O2	4%
2-Cy-Ph5-O2	4%	3-Cy-Ph5-O4	4%	3-Cy-Ph5-O4	4%
3-Cy-Ph5-O4	4%	3-Ph-Ph5-O2	3%	3-Ph-Ph5-O2	3%
3-Ph-Ph5-O2	3%	5-Ph-Ph5-O2	4%	5-Ph-Ph5-O2	4%
5-Ph-Ph5-O2	4%	2-Cy-Ph-Ph5-O2	6%	2-Cy-Ph-Ph5-O2	6%
2-Cy-Ph-Ph5-O2	6%	3-Cy-Ph-Ph5-O2	6%	3-Cy-Ph-Ph5-O2	6%
3-Cy-Ph-Ph5-O2	6%	3-Cy-Cy-Ph5-O3	5%	3-Cy-Cy-Ph5-O3	5%
3-Cy-Cy-Ph5-O3	5%	4-Cy-Cy-Ph5-O2	5%	4-Cy-Cy-Ph5-O2	5%
4-Cy-Cy-Ph5-O2	5%	5-Cy-Cy-Ph5-O2	4%	5-Cy-Cy-Ph5-O2	4%
5-Cy-Cy-Ph5-O2	5%	3-Ph-Ph5-Ph-2	7%	3-Ph-Ph5-Ph-2	7%
3-Ph-Ph5-Ph-2	8%	4-Ph-Ph5-Ph-2	8%	4-Ph-Ph5-Ph-2	8%
4-Ph-Ph5-Ph-2	9%	3-Cy-Cy-Ph-1	6%	3-Cy-Cy-Ph-1	9%

EP 2 837 964 B1

[Table 32]

	Example 61	Example 62	Example 63	Example 64
Liquid crystal composition	Liquid crystal composition 16	Liquid crystal composition 16	Liquid crystal composition 16	Liquid crystal composition 16
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.2	99.5	99.6
ID	55	53	25	18
Screen burn-in	Good	Good	Excellent	Excellent

[Table 33]

	Example 65	Example 66	Example 67	Example 68
Liquid crystal composition	Liquid crystal composition 17	Liquid crystal composition 17	Liquid crystal composition 17	Liquid crystal composition 17
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	99.2	99.4	99.5
ID	84	57	36	24
Screen burn-in	Good	Excellent	Excellent	Excellent

[Table 34]

	Example 69	Example 70	Example 71	Example 72
Liquid crystal composition	Liquid crystal composition 18	Liquid crystal composition 18	Liquid crystal composition 18	Liquid crystal composition 18
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.3	99.6	99.7
ID	62	49	22	15
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[0195] Each of the liquid crystal display devices of Examples 61 to 72 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 73 to 84)

[0196] As in Example 1, liquid crystal compositions shown in Table 35 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 73 to 84, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 36 to 38 show results of the measurement and evaluation.

[Table 35]

Liquid crystal composition 19		Liquid crystal composition 20		Liquid crystal composition 21	
$T_{NI} / ^\circ C$	77.1	$T_{NI} / ^\circ C$	82.7	$T_{NI} / ^\circ C$	86.4

(continued)

Liquid crystal composition 19		Liquid crystal composition 20		Liquid crystal composition 21	
Δn	0.104	Δn	0.107	Δn	0.106
$\Delta \varepsilon$	-3.5	$\Delta \varepsilon$	-3.0	$\Delta \varepsilon$	-3.0
η / mPa·s	25.1	η / mPa·s	24.2	η / mPa·s	24.4
γ_1 / mPa·s	141	γ_1 / mPa·s	141	γ_1 / mPa·s	142
$\gamma_1 / \Delta n^2 \times 10^{-2}$	131	$\gamma_1 / \Delta n^2 \times 10^{-2}$	123	$\gamma_1 / \Delta n^2 \times 10^{-2}$	126
3-Cy-Cy-2	22%	3-Cy-Cy-2	24%	3-Cy-Cy-2	24%
3-Cy-Ph-O1	14%	3-Cy-Cy-4	5%	3-Cy-Cy-4	5%
2-Cy-Ph5-O2	7%	3-Cy-Ph-O1	6%	3-Cy-Ph-O1	6%
3-Cy-Ph5-O4	8%	2-Cy-Ph5-O2	5%	2-Cy-Ph5-O2	5%
2-Cy-Ph-Ph5-O2	7%	3-Cy-Ph5-O4	5%	3-Cy-Ph5-O4	5%
3-Cy-Ph-Ph5-O2	9%	2-Cy-Ph-Ph5-O2	7%	2-Cy-Ph-Ph5-O2	7%
3-Cy-Cy-Ph5-O3	8%	3-Cy-Ph-Ph5-O2	9%	3-Cy-Ph-Ph5-O2	9%
4-Cy-Cy-Ph5-O2	8%	3-Cy-Cy-Ph5-O3	8%	3-Cy-Cy-Ph5-O3	8%
5-Cy-Cy-Ph5-O2	8%	4-Cy-Cy-Ph5-O2	8%	4-Cy-Cy-Ph5-O2	8%
3-Ph-Ph5-Ph-2	5%	5-Cy-Cy-Ph5-O2	8%	5-Cy-Cy-Ph5-O2	8%
4-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	5%	3-Ph-Ph5-Ph-2	5%
		4-Ph-Ph5-Ph-2	5%	4-Ph-Ph5-Ph-2	5%
		5-Ph-Ph-1	5%	5-Ph-Ph-1	3%
				3-Cy-Cy-Ph-1	2%

[Table 36]

	Example 73	Example 74	Example 75	Example 76
Liquid crystal composition	Liquid crystal composition 19	Liquid crystal composition 19	Liquid crystal composition 19	Liquid crystal composition 19
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.4	99.4	99.6
ID	56	38	36	17
Screen burn-in	Good	Excellent	Excellent	Excellent

[Table 37]

	Example 77	Example 78	Example 79	Example 80
Liquid crystal composition	Liquid crystal composition 20	Liquid crystal composition 20	Liquid crystal composition 20	Liquid crystal composition 20
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.4	99.5	99.6	99.7
ID	41	30	19	14
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[Table 38]

	Example 81	Example 82	Example 83	Example 84
Liquid crystal composition	Liquid crystal composition 21	Liquid crystal composition 21	Liquid crystal composition 21	Liquid crystal composition 21
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	99.1	99.4	99.5
ID	90	82	37	28
Screen burn-in	Good	Excellent	Excellent	Excellent

[0197] Each of the liquid crystal display devices of Examples 73 to 84 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 85 to 96)

[0198] As in Example 1, liquid crystal compositions shown in Table 39 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 85 to 96, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 40 to 42 show results of the measurement and evaluation.

[Table 39]

Liquid crystal composition 22		Liquid crystal composition 23		Liquid crystal composition 24	
$T_{NI} / ^\circ\text{C}$	75.5	$T_{NI} / ^\circ\text{C}$	80.3	$T_{NI} / ^\circ\text{C}$	85.0
Δn	0.102	Δn	0.101	Δn	0.102
$\Delta\epsilon$	-2.8	$\Delta\epsilon$	-2.9	$\Delta\epsilon$	-3.0
$\eta / \text{mPa}\cdot\text{s}$	22.2	$\eta / \text{mPa}\cdot\text{s}$	22.0	$\eta / \text{mPa}\cdot\text{s}$	22.7
$\gamma_1 / \text{mPa}\cdot\text{s}$	121	$\gamma_1 / \text{mPa}\cdot\text{s}$	118	$\gamma_1 / \text{mPa}\cdot\text{s}$	122
$\gamma_1 / \Delta n^2 \times 10^{-2}$	117	$\gamma_1 / \Delta n^2 \times 10^{-2}$	117	$\gamma_1 / \Delta n^2 \times 10^{-2}$	118
3-Cy-Cy-2	14%	3-Cy-Cy-2	17%	3-Cy-Cy-2	16%
3-Cy-Cy-4	12%	3-Cy-Cy-4	12%	3-Cy-Cy-4	12%
3-Cy-Cy-5	5%	3-Cy-Cy-5	5%	3-Cy-Cy-5	5%
3-Cy-Ph-O1	7%	3-Cy-Ph-O1	6%	3-Cy-Ph-O1	5%
2-Cy-Ph5-O2	7%	2-Cy-Ph5-O2-	12%	2-Cy-Ph5-O2	12%
3-Cy-Ph5-O4	7%	2-Cy-Ph-Ph5-O2	9%	2-Cy-Ph-Ph5-O2	9%
2-Cy-Ph-Ph5-O2	8%	3-Cy-Ph-Ph5-O2	9%	3-Cy-Ph-Ph5-O2	9%
3-Cy-Ph-Ph5-O2	8%	3-Cy-Cy-Ph5-O3	6%	3-Cy-Cy-Ph5-O3	6%
3-Cy-Cy-Ph5-O3	6%	4-Cy-Cy-Ph5-O2	8%	4-Cy-Cy-Ph5-O2	8%
4-Cy-Cy-Ph5-O2	7%	5-Cy-Cy-Ph5-O2	6%	5-Cy-Cy-Ph5-O2	6%
5-Cy-Cy-Ph5-O2	6%	3-Ph-Ph5-Ph-2	3%	3-Ph-Ph5-Ph-2	3%
3-Ph-Ph5-Ph-2	3%	4-Ph-Ph5-Ph-2	3%	4-Ph-Ph5-Ph-2	3%
4-Ph-Ph5-Ph-2	3%	5-Ph-Ph-1	4%	5-Ph-Ph-1	3%
5-Ph-Ph-1	6%			3-Cy-Cy-Ph-1	3%
3-Cy-Cy-Ph-1	1%				

[Table 40]

	Example 85	Example 86	Example 87	Example 88
Liquid crystal composition	Liquid crystal composition 22	Liquid crystal composition 22	Liquid crystal composition 22	Liquid crystal composition 22
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.3	99.5	99.6
ID	52	43	27	19
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[Table 41]

	Example 89	Example 90	Example 91	Example 92
Liquid crystal composition	Liquid crystal composition 23	Liquid crystal composition 23	Liquid crystal composition 23	Liquid crystal composition 23
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	99.2	99.4	99.5
ID	87	58	39	25
Screen burn-in	Good	Excellent	Excellent	Excellent

[Table 42]

	Example 93	Example 94	Example 95	Example 96
Liquid crystal composition	Liquid crystal composition 24	Liquid crystal composition 24	Liquid crystal composition 24	Liquid crystal composition 24
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.4	99.6	99.6	99.8
ID	42	19	20	13
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[0199] Each of the liquid crystal display devices of Examples 85 to 96 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 97 to 108)

[0200] As in Example 1, liquid crystal compositions shown in Table 43 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 97 to 108, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 44 to 46 show results of the measurement and evaluation.

[Table 43]

Liquid crystal composition 25		Liquid crystal composition 26		Liquid crystal composition 27	
$T_{NI} / ^\circ\text{C}$	75.6	$T_{NI} / ^\circ\text{C}$	81.1	$T_{NI} / ^\circ\text{C}$	85.7

(continued)

Liquid crystal composition 25		Liquid crystal composition 26		Liquid crystal composition 27	
Δn	0.104	Δn	0.105	Δn	0.105
$\Delta \varepsilon$	-2.8	$\Delta \varepsilon$	-2.8	$\Delta \varepsilon$	-2.9
η / mPa·s	20.2	η / mPa·s	20.8	η / mPa·s	21.0
γ_1 / mPa·s	117	γ_1 / mPa·s	119	γ_1 / mPa·s	92
$\gamma_1 / \Delta n^2 \times 10^{-2}$	107	$\gamma_1 / \Delta n^2 \times 10^{-2}$	107	$\gamma_1 / \Delta n^2 \times 10^{-2}$	82
3-Cy-Cy-2	25%	3-Cy-Cy-2	25%	3-Cy-Cy-2	25%
3-Cy-Cy-4	10%	3-Cy-Cy-4	10%	3-Cy-Cy-4	12%
3-Cy-Ph-O1	4%	3-Cy-Ph-O1	4%	2-Cy-Ph5-O2	12%
2-Cy-Ph5-O2	7%	2-Cy-Ph5-O2	12%	2-Cy-Ph-Ph5-O2	5%
3-Cy-Ph5-O4	8%	2-Cy-Ph-Ph5-O2	5%	3-Cy-Ph-Ph5-O2	6%
2-Cy-Ph-Ph5-O2	5%	3-Cy-Ph-Ph5-O2	6%	3-Cy-Cy-Ph5-O3	7%
3-Cy-Ph-Ph5-O2	6%	3-Cy-Cy-Ph5-O3	7%	4-Cy-Cy-Ph5-O2	8%
3-Cy-Cy-Ph5-O3	6%	4-Cy-Cy-Ph5-O2	8%	5-Cy-Cy-Ph5-O2	7%
4-Cy-Cy-Ph5-O2	7%	5-Cy-Cy-Ph5-O2	7%	3-Ph-Ph5-Ph-2	8%
5-Cy-Cy-Ph5-O2	6%	3-Ph-Ph5-Ph-2	8%	4-Ph-Ph5-Ph-2	8%
3-Ph-Ph ₅ -Ph-2	8%	4-Ph-Ph5-Ph-2	8%	3-Cy-Cy-Ph-1	2%
4-Ph-Ph5-Ph-2	8%				

[Table 44]

	Example 97	Example 98	Example 99	Example 100
Liquid crystal composition	Liquid crystal composition 25	Liquid crystal composition 25	Liquid crystal composition 25	Liquid crystal composition 25
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.3	99.3	99.5	99.7
ID	48	42	27	18
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[Table 45]

	Example 101	Example 102	Example 103	Example 104
Liquid crystal composition	Liquid crystal composition 26	Liquid crystal composition 26	Liquid crystal composition 26	Liquid crystal composition 26
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.3	99.4	99.6
ID	58	49	40	21
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[Table 46]

	Example 105	Example 106	Example 107	Example 108
Liquid crystal composition	Liquid crystal composition 27	Liquid crystal composition 27	Liquid crystal composition 27	Liquid crystal composition 27
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.2	99.5	99.6
ID	80	63	29	19
Screen burn-in	Good	Excellent	Excellent	Excellent

[0201] Each of the liquid crystal display devices of Examples 97 to 108 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 109 to 112)

[0202] The liquid crystal composition 1 was mixed with 0.3 mass% of 2-methyl-acrylic acid 4-{2-[4-(2-acryloyloxy-ethyl)-phenoxy-carbonyl]-ethyl}-biphenyl-4'-yl ester to produce a liquid crystal composition 28. The liquid crystal composition 28 was placed in the VA cell used in Example 1 and then polymerized by being irradiated with ultraviolet for 600 seconds (3.0 J/cm²) while a driving voltage was applied between the electrodes. Then, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Examples 109 to 112, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Table 47 shows results of the measurement and evaluation.

[Table 47]

	Example 109	Example 110	Example 111	Example 112
Liquid crystal composition	Liquid crystal composition 28	Liquid crystal composition 28	Liquid crystal composition 28	Liquid crystal composition 28
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	99.2	99.4	99.5
ID	93	63	41	24
Screen burn-in	Good	Excellent	Excellent	Excellent

[0203] Each of the liquid crystal display devices of Examples 109 to 112 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 113 to 116)

[0204] The liquid crystal composition 13 was mixed with 0.3 mass% of bismethacrylic acid biphenyl-4,4'-diyl ester to produce a liquid crystal composition 29. The liquid crystal composition 29 was placed in the VA cell used in Example 1 and then polymerized by being irradiated with ultraviolet for 600 seconds (3.0 J/cm²) while a driving voltage was applied between the electrodes. Then, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Examples 113 to 116, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Table 48 shows results of the measurement and evaluation.

[Table 48]

	Example 113	Example 114	Example 115	Example 116
Liquid crystal composition	Liquid crystal composition 29	Liquid crystal composition 29	Liquid crystal composition 29	Liquid crystal composition 29
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.3	99.5	99.5

(continued)

	Example 113	Example 114	Example 115	Example 116
ID	86	53	29	30
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[0205] Each of the liquid crystal display devices of Examples 113 to 116 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 117 to 120)

[0206] The liquid crystal composition 19 was mixed with 0.3 mass% of bismethacrylic acid 3-fluorobiphenyl-4,4'-diyl ester to produce a liquid crystal composition 30. The liquid crystal composition 30 was placed in the VA cell used in Example 1 and then polymerized by being irradiated with ultraviolet for 600 seconds (3.0 J/cm²) while a driving voltage was applied between the electrodes. Then, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Examples 117 to 120, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Table 49 shows results of the measurement and evaluation.

[Table 49]

	Example 117	Example 118	Example 119	Example 120
Liquid crystal composition	Liquid crystal composition 30	Liquid crystal composition 30	Liquid crystal composition 30	Liquid crystal composition 30
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.9	99.2	99.4	99.6
ID	92	61	39	22
Screen burn-in	Good	Excellent	Excellent	Excellent

[0207] Each of the liquid crystal display devices of Examples 117 to 120 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Comparative Examples 1 to 12)

[0208] As in Example 1, comparative liquid crystal compositions shown in Table 50 were placed, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Comparative Examples 1 to 12, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 51 to 53 show results of the measurement and evaluation.

EP 2 837 964 B1

[Table 50]

	Comparative liquid crystal composition 1		Comparative liquid crystal composition 2		Comparative liquid crystal composition 3	
5	$T_{NI} / ^\circ C$	75.5	$T_{NI} / ^\circ C$	80.7	$T_{NI} / ^\circ C$	85.8
	Δn	0.104	Δn	0.104	Δn	0.104
	$\Delta \varepsilon$	-2.88	$\Delta \varepsilon$	-2.88	$\Delta \varepsilon$	-2.95
10	$\eta / \text{mPa}\cdot\text{s}$	22.5	$\eta / \text{mPa}\cdot\text{s}$	22.3	$\eta / \text{mPa}\cdot\text{s}$	22.4
	$\gamma_1 / \text{mPa}\cdot\text{s}$	123	$\gamma_1 / \text{mPa}\cdot\text{s}$	122	$\gamma_1 / \text{mPa}\cdot\text{s}$	124
	$\gamma_1 / \Delta n^2 \times 10^{-2}$	114	$\gamma_1 / \Delta n^2 \times 10^{-2}$	113	$\gamma_1 / \Delta n^2 \times 10^{-2}$	114
15	3-Cy-Cy-2	24%	3-Cy-Cy-2	24%	3-Cy-Cy-2	24%
	3-Cy-Cy-4	4%	3-Cy-Cy-4	4%	3-Cy-Cy-4	4%
	3-Cy-Ph5-O2	7%	3-Cy-Ph5-O2	7%	3-Cy-Ph5-O2	7%
20	3-Cy-Ph5-O4	8%	3-Cy-Ph5-O4	8%	3-Cy-Ph5-O4	8%
	2-Cy-Ph-Ph5-O2	4%	2-Cy-Ph-Ph5-O2	5%	2-Cy-Ph-Ph5-O2	6%
	3-Cy-Ph-Ph5-O2	5%	3-Cy-Ph-Ph5-O2	6%	3-Cy-Ph-Ph5-O2	7%
25	3-Cy-Cy-Ph5-O3	8%	3-Cy-Cy-Ph5-O3	7%	3-Cy-Cy-Ph5-O3	7%
	4-Cy-Cy-Ph5-O2	10%	4-Cy-Cy-Ph5-O2	9%	4-Cy-Cy-Ph5-O2	7%
	5-Cy-Cy-Ph5-O2	8%	5-Cy-Cy-Ph5-O2	7%	5-Cy-Cy-Ph5-O2	7%
30	3-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	4%
	4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%
	5-Ph-Ph-1	10%	5-Ph-Ph-1	7%	5-Ph-Ph-1	4%
	3-Cy-Cy-Ph-1	4%	3-Cy-Cy-Ph-1	8%	3-Cy-Cy-Ph-1	11%

[Table 51]

35		Comparative example 1	Comparative example 2	Comparative example 3	Comparative example 4
40	Liquid crystal composition	Comparative liquid crystal composition 1	Comparative liquid crystal composition 1	Comparative liquid crystal composition 1	Comparative liquid crystal composition 1
	Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
45	VHR	97.7	98.0	98.1	98.3
	ID	187	180	168	145
	Screen burn-in	Poor	Poor	Poor	Poor

[Table 52]

	Comparative example 5	Comparative example 6	Comparative example 7	Comparative example 8
50	Comparative liquid crystal composition 2	Comparative liquid crystal composition 2	Comparative liquid crystal composition 2	Comparative liquid crystal composition 2
55	Color filter 1	Color filter 2	Color filter 3	Color filter 4

(continued)

	Comparative example 5	Comparative example 6	Comparative example 7	Comparative example 8
VHR	98.0	98.1	98.3	98.4
ID	178	166	152	139
Screen burn- in	Poor	Poor	Poor	Poor

[Table 53]

	Comparative example 9	Comparative example 10	Comparative example 11	Comparative example 12
Liquid crystal composition	Comparative liquid crystal composition 3	Comparative liquid crystal composition 3	Comparative liquid crystal composition 3	Comparative liquid crystal composition 3
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.0	98.2	98.4	98.5
ID	182	159	141	132
Screen burn- in	Poor	Poor	Poor	Bad

[0209] As compared with the liquid crystal display device of the present invention, each of the liquid crystal display devices of Comparative Examples 1 to 12 had lower VHR and larger ID. In the evaluation of screen burn-in, an afterimage was observed, which was unacceptable.

(Comparative Examples 13 to 24)

[0210] As in Example 1, comparative liquid crystal compositions shown in Table 54 were placed, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Comparative Examples 13 to 24, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 55 to 57 show results of the measurement and evaluation.

EP 2 837 964 B1

[Table 54]

	Comparative liquid crystal composition 4		Comparative liquid crystal composition 5		Comparative liquid crystal composition 6	
5	$T_{NI} / ^\circ C$	73.6	$T_{NI} / ^\circ C$	80.9	$T_{NI} / ^\circ C$	84.7
	Δn	0.099	Δn	0.094	Δn	0.085
	$\Delta \varepsilon$	-2.15	$\Delta \varepsilon$	-2.16	$\Delta \varepsilon$	-2.13
10	$\eta / mPa \cdot s$	17.7	$\eta / mPa \cdot s$	17.0	$\eta / mPa \cdot s$	17.5
	$\gamma_1 / mPa \cdot s$	104	$\gamma_1 / mPa \cdot s$	97	$\gamma_1 / mPa \cdot s$	98
	$\gamma_1 / \Delta n^2 \times 10^{-2}$	106	$\gamma_1 / \Delta n^2 \times 10^{-2}$	109	$\gamma_1 / \Delta n^2 \times 10^{-2}$	136
	3-Cy-Cy-2	20%	3-Cy-Cy-2	24%	3-Cy-Cy-2	21%
15	3-Cy-Cy-4	12%	3-Cy-Cy-4	12%	3-Cy-Cy-4	15%
	3-Cy-Cy-5	7%	3-Cy-Cy-5	15%	3-Cy-Cy-5	15%
	3-Cy-Ph-O1	12%	3-Cy-Ph5-O2	5%	3-Cy-Ph5-O2	5%
20	3-Cy-Ph5-O2	5%	3-Cy-Ph5-O4	5%	3-Cy-Ph5-O4	5%
	3-Cy-Ph5-O4	5%	2-Cy-Ph-Ph5-O2	11%	2-Cy-Ph-Ph5-O2	4%
	2-Cy-Ph-Ph5-O2	11%	3-Cy-Ph-Ph5-O2	11%	3-Cy-Ph-Ph5-O2	5%
	3-Cy-Ph-Ph5-O2	11%	3-Cy-Cy-Ph5-O3	3%	3-Cy-Cy-Ph5-O3	7%
25	3-Cy-Cy-Ph5-O3	3%	4-Cy-Cy-Ph5-O2	3%	4-Cy-Cy-Ph5-O2	8%
	4-Cy-Cy-Ph5-O2	3%	5-Cy-Cy-Ph5-O2	3%	5-Cy-Cy-Ph5-O2	7%
	5-Cy-Cy-Ph5-O2	3%	3-Ph-Ph5-Ph-2	4%	3-Ph-Ph5-Ph-2	4%
30	3-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%
	4-Ph-Ph5-Ph-2	4%				

[Table 55]

35		Comparative example 13	Comparative example 14	Comparative example 15	Comparative example 16
40	Liquid crystal composition	Comparative liquid crystal composition 4	Comparative liquid crystal composition 4	Comparative liquid crystal composition 4	Comparative liquid crystal composition 4
	Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
45	VHR	97.9	98.1	98.3	98.4
	ID	192	168	155	140
	Screen burn-in	Poor	Poor	Poor	Poor

[Table 56]

	Comparative example 17	Comparative example 18	Comparative example 19	Comparative example ' 20
50	Comparative liquid crystal composition 5	Comparative liquid crystal composition 5	Comparative liquid crystal composition 5	Comparative liquid crystal composition 5
55	Color filter 1	Color filter 2	Color filter 3	Color filter 4

(continued)

	Comparative example 17	Comparative example 18	Comparative example 19	Comparative example ' 20
VHR	98.0	98.3	98.4	98.5
ID	183	153	136	133
Screen burn-in	Poor	Poor	Poor	Bad

[Table 57]

	Comparative example 21	Comparative example 22	Comparative example 23	Comparative example 24
Liquid crystal composition	Comparative liquid crystal composition 6	Comparative liquid crystal composition 6	Comparative liquid crystal composition 6	Comparative liquid crystal composition 6
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.0	98.2	98.4	98.4
ID	186	158	142	137
Screen burn-in	Poor	Poor	Poor	Poor

[0211] As compared with the liquid crystal display device of the present invention, each of the liquid crystal display devices of Comparative Examples 13 to 24 had lower VHR and larger ID. In the evaluation of screen burn-in, an afterimage was observed, which was unacceptable.

(Comparative Examples 25 to 36)

[0212] As in Example 1, comparative liquid crystal compositions shown in Table 58 were placed, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Comparative Examples 25 to 36, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 59 to 61 show results of the measurement and evaluation.

[Table 58]

Comparative liquid crystal composition 7		Comparative liquid crystal composition 8		Comparative liquid crystal composition 9	
$T_{NI} / ^\circ\text{C}$	77.1	$T_{NI} / ^\circ\text{C}$	80.8	$T_{NI} / ^\circ\text{C}$	86.3
Δn	0.109	Δn	0.108	Δn	0.107
$\Delta\epsilon$	-2.10	$\Delta\epsilon$	-2.20	$\Delta\epsilon$	-2.27
$\eta / \text{mPa}\cdot\text{s}$	21.6	$\eta / \text{mPa}\cdot\text{s}$	22.1	$\eta / \text{mPa}\cdot\text{s}$	22.3
$\gamma_1 / \text{mPa}\cdot\text{s}$	130	$\gamma_1 / \text{mPa}\cdot\text{s}$	133	$\gamma_1 / \text{mPa}\cdot\text{s}$	134
$\gamma_1 / \Delta n^2 \times 10^{-2}$	109	$\gamma_1 / \Delta n^2 \times 10^{-2}$	114	$\gamma_1 / \Delta n^2 \times 10^{-2}$	118
3-Cy-Cy-2	24%	3-Cy-Cy-2	24%	3-Cy-Cy-2	24%
3-Cy-Cy-4	7%	3-Cy-Cy-4	7%	3-Cy-Cy-4	7%
3-Cy-Ph-O1	5%	3-Cy-Ph-O1	5%	3-Cy-Ph-O1	5%
2-Cy-Ph5-O2	2%	2-Cy-Ph5-O2	2%	2-Cy-Ph5-O2	2%
3-Cy-Ph5-O4	2%	3-Cy-Ph5-O4	2%	3-Cy-Ph5-O4	2%
2-Cy-Ph-Ph5-O2	8%	2-Cy-Ph-Ph5-O2	8%	2-Cy-Ph-Ph5-O2	8%
3-Cy-Ph-Ph5-O2	8%	3-Cy-Ph-Ph5-O2	8%	3-Cy-Ph-Ph5-O2	8%
3-Cy-Cy-Ph5-O3	7%	3-Cy-Cy-Ph5-O3	8%	3-Cy-Cy-Ph5-O3	8%
4-Cy-Cy-Ph5-O2	9%	4-Cy-Cy-Ph5-O2	8%	4-Cy-Cy-Ph5-O2	8%
5-Cy-Cy-Ph5-O2	7%	5-Cy-Cy-Ph5-O2	8%	5-Cy-Cy-Ph5-O2	8%
3-Ph-Ph5-Ph2	4%	3-Ph-Ph5-Ph2	4%	3-Ph-Ph5-Ph2	4%
4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%	4-Ph-Ph5-Ph-2	4%
5-Ph-Ph-1	13%	5-Ph-Ph-1	11%	5-Ph-Ph-1	8%
		3-Cy-Cy-Ph-1	1%	3-Cy-Cy-Ph-1	4%

[Table 59]

	Comparative example 25	Comparative example 26	Comparative example 27	Comparative example 28
Liquid crystal composition	Comparative liquid crystal composition 7	Comparative liquid crystal composition 7	Comparative liquid crystal composition 7	Comparative liquid crystal composition 7
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	97.9	98.1	98.2	98.4
ID	193	173	155	142
Screen burn-in	Poor	Poor	Poor	Poor

[Table 60]

	Comparative example 29	Comparative example 30	Comparative example 31	Comparative example 32
Liquid crystal composition	Comparative liquid crystal composition 8	Comparative liquid crystal composition 8	Comparative liquid crystal composition 8	Comparative liquid crystal composition 8

(continued)

	Comparative example 29	Comparative example 30	Comparative example 31	Comparative example 32
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.0	98.4	98.2	98.5
ID	179	149	158	139
Screen burn-in	Poor	Poor	Poor	Bad

[Table 61]

	Comparative example 33	Comparative example 34	Comparative example 35	Comparative example 36
Liquid crystal composition	Comparative liquid crystal composition 9	Comparative liquid crystal composition 9	Comparative liquid crystal composition 9	Comparative liquid crystal composition 9
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	97.8	98.2	98.3	98.4
ID	201	164	152	144
Screen burn-in	Poor	Poor	Poor	Poor

[0213] As compared with the liquid crystal display device of the present invention, each of the liquid crystal display devices of Comparative Examples 25 to 36 had lower VHR and larger ID. In the evaluation of screen burn-in, an afterimage was observed, which was unacceptable.

(Comparative Example 37 to 44)

[0214] As in Example 1, comparative liquid crystal compositions shown in Table 62 were placed, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Comparative Examples 37 to 44, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 63 and 64 show results of the measurement and evaluation.

[Table 62]

Comparative liquid crystal composition 10		Comparative liquid crystal composition 11	
$T_{NI} / ^\circ C$	62.2	$T_{NI} / ^\circ C$	72.4
Δn	0.087	Δn	0.088
$\Delta \varepsilon$	-4.1	$\Delta \varepsilon$	-4.2
$\eta / \text{mPa}\cdot\text{s}$	21.3	$\eta / \text{mPa}\cdot\text{s}$	23.8
$\gamma_1 / \text{mPa}\cdot\text{s}$	97	$\gamma_1 / \text{mPa}\cdot\text{s}$	106
$\gamma_1 / \Delta n^2 \times 10^{-2}$	129	$\gamma_1 / \Delta n^2 \times 10^{-2}$	138
3-Cy-Cy-2	12%	3-Cy-Cy-4	20%
3-Cy-Cy-4	12%	3-Cy-Cy-5	15%
3-Cy-Cy-5	5%	2-Cy-Ph5-O2	16%
3-Cy-Ph-O1	6%	3-Cy-Ph5-O4	16%
2-Cy-Ph5-O2	16%	2-Cy-Ph-Ph5-O2	7%
3-Cy-Ph5-O4	16%	3-Cy-Ph-Ph5-O2	8%
2-Cy-Ph-Ph5-O2	7%	3-Cy-Cy-Ph5-O3	5%
3-Cy-Ph-Ph5-O2	8%	4-Cy-Cy-Ph5-O2	5%
3-Cy-Cy-Ph5-O3	5%	5-Cy-Cy-Ph5-O2	5%
4-Cy-Cy-Ph5-O2	5%	3-Cy-Cy-Ph-1	3%
5-Cy-Cy-Ph5-O2	5%		
3-Cy-Cy-Ph-1	3%		

[Table 63]

	Comparative example 37	Comparative example 38	Comparative example 39	Comparative example 40
Liquid crystal composition	Comparative liquid crystal composition 10	Comparative liquid crystal composition 10	Comparative liquid crystal composition 10	Comparative liquid crystal composition 10
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	97.8	98.0	98.2	98.3
ID	196	184	160	149
Screen burn-in	Poor	Poor	Poor	Poor

[Table 64]

	Comparative example 41	Comparative example 42	Comparative example 43	Comparative example 44
Liquid crystal composition	Comparative liquid crystal composition 11	Comparative liquid crystal composition 11	Comparative liquid crystal composition 11	Comparative liquid crystal composition 11
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.0	98.1	98.2	98.4
ID	188	174	162	143

(continued)

	Comparative example 41	Comparative example 42	Comparative example 43	Comparative example 44
Screen burn-in	Poor	Poor	Poor	Poor

[0215] As compared with the liquid crystal display device of the present invention, each of the liquid crystal display devices of Comparative Examples 37 to 44 had lower VHR and larger ID. In the evaluation of screen burn-in, an afterimage was observed, which was unacceptable.

(Comparative Examples 45 to 56)

[0216] As in Example 1, comparative liquid crystal compositions shown in Table 65 were placed, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Comparative Examples 45 to 56, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 66 to 68 show results of the measurement and evaluation.

[Table 65]

Comparative liquid crystal composition 12		Comparative liquid crystal composition 13		Comparative liquid crystal composition 14	
$T_{NI} / ^\circ C$	74.9	$T_{NI} / ^\circ C$	79.6	$T_{NI} / ^\circ C$	85.4
Δn	0.103	Δn	0.104	Δn	0.107
$\Delta \epsilon$	-2.34	$\Delta \epsilon$	-2.39	$\Delta \epsilon$	-2.46
$\eta / mPa \cdot s$	18.4	$\eta / mPa \cdot s$	18.9	$\eta / mPa \cdot s$	20.0
$\gamma_1 / mPa \cdot s$	106	$\gamma_1 / mPa \cdot s$	108	$\gamma_1 / mPa \cdot s$	114
$\gamma_1 / \Delta n^2 \times 10^{-2}$	99	$\gamma_1 / \gamma n^2 \times 10^{-2}$	99	$\gamma_1 / \Delta n^2 \times 10^{-2}$	99
3-Cy-Cy-2	20%	3-Cy-Cy-2	20%	3-Cy-Cy-2	18%
3-Cy-Cy-4	12%	3-Cy-Cy-4	12%	3-Cy-Cy-4	12%
3-Cy-Cy-5	5%	3-Cy-Cy-5	5%	3-Cy-Cy-5	5%
3-Cy-Ph-O1	5%	3-Cy-Ph-O1	2%	2-Cy-Ph5-O2	7%
2-Cy-Ph5-O2	7%	2-Cy-Ph5-O2	7%	3-Cy-Ph5-O4	8%
3-Cy-Ph5-O4	8%	3-Cy-Ph5-O4	8%	2-Cy-Ph-Ph5-O2	6%
2-Cy-Ph-Ph5-O2	6%	2-Cy-Ph-Ph5-O2	6%	3-Cy-Ph-Ph5-O2	6%
3-Cy-Ph-Ph5-O2	6%	3-Cy-Ph-Ph5-O2	6%	3-Cy-Cy-Ph5-O3	4%
3-Cy-Cy-Ph5-O3	4%	3-Cy-Cy-Ph5-O3	4%	4-Cy-Cy-Ph6-O2	4%
4-Cy-Cy-Ph5-O2	4%	4-Cy-Cy-Ph5-O2	4%	5-Cy-Cy-Ph5-O2	4%
5-Cy-Cy-Ph5-O2	4%	5-Cy-Cy-Ph5-O2	4%	3-Ph-Ph5-Ph-2	7%
3-Ph-Ph5-Ph-2	7%	3-Ph-Ph5-Ph-2	7%	4-Ph-Ph5-Ph-2	8%
4-Ph-Ph5-Ph-2	8%	4-Ph-Ph5-Ph-2	8%	3-Cy-Cy-Ph-1	11%
3-Cy-Cy-Ph-1	4%	3-Cy-Cy-Ph-1	7%		

EP 2 837 964 B1

[Table 66]

	Comparative example 45	Comparative example 46	Comparative example 47	Comparative example 48	
Liquid crystal composition	Comparative liquid crystal composition 12	Comparative liquid crystal composition 12	Comparative liquid crystal composition 12	Comparative liquid crystal composition 12	
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4	
VHR	97.7	98.0	98.2	98.3	
ID	205	182	159	151	
Screen burn-in	Poor	Poor	Poor	Poor	

[Table 67]

	Comparative example 49	Comparative example 50	Comparative example 51	Comparative example 52
Liquid crystal composition	Comparative liquid crystal composition 13	Comparative liquid crystal composition 13	Comparative liquid crystal composition 13	Comparative liquid crystal composition 13
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.0	98.1	98.3	98.4
ID	189	169	147	140
Screen burn-in	Poor	Poor	Poor	Bad

[Table 68]

	Comparative example 53	Comparative example 54	Comparative example 55	Comparative example 56
Liquid crystal composition	Comparative liquid crystal composition 14	Comparative liquid crystal composition 14	Comparative liquid crystal composition 14	Comparative liquid crystal composition 14
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	98.1	98.3	98.4	98.5
ID	170	150	146	132
Screen burn-in	Poor	Poor	Poor	Bad

[0217] As compared with the liquid crystal display device of the present invention, each of the liquid crystal display devices of Comparative Examples 45 to 56 had lower VHR and larger ID. In the evaluation of screen burn-in, an afterimage was observed, which was unacceptable.

(Comparative Examples 57 to 60)

[0218] As in Example 1, a comparative liquid crystal composition shown in Table 69 was placed, the color filters 1 to 4 shown in Table 8 were used to produce liquid crystal display devices of Comparative Examples 57 to 60, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Table 70 shows results of the measurement and evaluation.

[Table 69]

Comparative liquid crystal composition 15	
$T_{NI} / ^\circ\text{C}$	86.3
Δn	0.105
$\Delta\varepsilon$	-3.41
$\eta / \text{mPa}\cdot\text{s}$	26.4
$\gamma_1 / \text{mPa}\cdot\text{s}$	149
$\gamma_1 / \Delta n^2 \times 10^{-2}$	135
3-Cy-Cy-2	24%
3-Cy-Ph-O1	11%
2-Cy-Ph5-O2	10%
2-Cy-Ph-Ph5-O2	7%
3-Cy-Ph-Ph5-O2	9%
3-Cy-Cy-Ph5-O3	10%
4-Cy-Cy-Ph5-O2	10%
5-Cy-Cy-Ph5-O2	10%
3-Ph-Ph5-Ph-2	4%
4-Ph-Ph5-Ph-2	4%
5-Ph-Ph-1	1%

[Table 70]

	Comparative example 57	Comparative example 58	Comparative example 59	Comparative example 60
Liquid crystal composition	Comparative liquid crystal composition 15	Comparative liquid crystal composition 15	Comparative liquid crystal composition 15	Comparative liquid crystal composition 15
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	97.9	98.0	98.2	98.3
ID	192	182	163	150
Screen burn-in	Poor	Poor	Poor	Poor

[0219] As compared with the liquid crystal display device of the present invention, each of the liquid crystal display devices of Comparative Examples 57 to 60 had lower VHR and larger ID. In the evaluation of screen burn-in, an afterimage was observed, which was unacceptable.

(Comparative Examples 61 to 68)

[0220] The liquid crystal compositions 1, 2, 8, 13, 14, 19, 20, and 26 were placed in the VA cells used in Example 1, the comparative color filter 1 shown in Table 8 was used to produce liquid crystal display devices of Comparative Examples 61 to 68, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 71 and 72 show results of the measurement and evaluation.

[Table 71]

	Comparative example 61	Comparative example 62	Comparative example 63	Comparative example 64
Liquid crystal composition	Liquid crystal composition 1	Liquid crystal composition 2	Liquid crystal composition 8	Liquid crystal composition 13
Color filter	Comparative color filter 1	Comparative color filter 1	Comparative color filter 1	Comparative color filter 1
VHR	97.4	97.4	97.5	97.4
ID	217	213	203	218
Screen burn-in	Poor	Poor	Poor	Poor

[Table 72]

	Comparative example 65	Comparative example 66	Comparative example 67	Comparative example 68
Liquid crystal composition	Liquid crystal composition 14	Liquid crystal composition 19	Liquid crystal composition 20	Liquid crystal composition 26
Color filter	Comparative color filter 1	Comparative color filter 1	Comparative color filter 1	Comparative color filter 1
VHR	97.3	97.4	97.5	97.4
ID	220	212	198	209
Screen burn-in	Poor	Poor	Poor	Poor

[0221] As compared with the liquid crystal display device of the present invention, each of the liquid crystal display devices of Comparative Examples 61 to 68 had lower VHR and larger ID. In the evaluation of screen burn-in, an afterimage was observed, which was unacceptable.

(Examples 121 to 132)

[0222] As in Example 1, liquid crystal compositions shown in Table 73 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 121 to 132, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 74 to 76 show results of the measurement and evaluation.

EP 2 837 964 B1

[Table 73]

Liquid crystal composition 31		Liquid crystal composition 32		Liquid crystal composition 33	
TNI/°C	75.5	TNI/°C	75.4	TNI/°C	83.1
Δn	0.103	Δn	0.109	Δn	0.114
$\Delta \epsilon$	-3.1	$\Delta \epsilon$	-3.1	$\Delta \epsilon$	-2.9
η / mPa·s	15.8	η / mPa·s	14.9	η / mPa·s	14.8
$\gamma 1$ / mPa·s	113	$\gamma 1$ / mPa·s	110	$\gamma 1$ / mPa·s	92
$\gamma 1 / \Delta n^2 \times 10^{-2}$	113	$\gamma 1 / \Delta n^2 \times 10^{-2}$	92	$\gamma 1 / \Delta n^2 \times 10^{-2}$	71
3-Cy-Cy-2	13%	2-Cy-Cy-V1	20%	V2-Ph-Ph-1	5%
3-Cy-Cy-V1	12%	3-Cy-Cy-V1	13%	3-Cy-Cy-V	39%
3-Cy-Cy-4	5%	3-Ph-Ph-1	10%	3-Cy-1O-Ph5-O2	5%
3-Ph-Ph-1	3%	5-Ph-Ph-1	5%	2-Cy-Cy-1O-Ph5-O2	11%
5-Ph-Ph-1	12%	3-Cy-Ph-Ph-2	6%	3-Cy-Cy-1O-Ph5-O1	11%
3-Cy-Cy-Ph-1	3%	1V-Cy-1O-Ph5-O2	8%	3-Cy-Cy-1O-Ph5-O2	6%
V-Cy-Ph-Ph-3	6%	2-Cy-Cy-1O-Ph5-O2	10%	2-Cy-Ph-Ph5-O2	6%
3-Cy-1O-Ph5-O2	11%	3-Cy-Cy-1O-Ph5-O2	10%	3-Ph-Ph5-Ph-1	8%
2-Cy-Cy-1O-Ph5-O2	12%	V-Cy-Cy-1O-Ph5-O2	10%	3-Ph-Ph5-Ph-2	9%
3-Cy-Cy-1O-Ph5-O2	12%	1V-Cy-Cy-1O-Ph5-O2	4%		
4-Cy-Cy-1O-Ph5-O2	2%	3-Ph-Ph5-Ph-2	4%		
V-Cy-Cy-1O-Ph5-O2	3%				
1V-Cy-Cy-1O-Ph5-O2	6%				

[Table 74]

	Example 121	Example 122	Example 123	Example 124
Liquid crystal composition	Liquid crystal composition 31	Liquid crystal composition 31	Liquid crystal composition 31	Liquid crystal composition 31
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.2	99.3	99.4	99.6
ID	73	50	29	17
Screen burn-in	Excellent	Excellent	Excellent	Excellent

[Table 75]

	Example 125	Example 126	Example 127	Example 128
Liquid crystal composition	Liquid crystal composition 32	Liquid crystal composition 32	Liquid crystal composition 32	Liquid crystal composition 32
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.2	99.3	99.5
ID	72	60	47	35
Screen burn-in	Good	Good	Excellent	Excellent

[Table 76]

	Example 129	Example 130	Example 131	Example 132
Liquid crystal composition	Liquid crystal composition 33	Liquid crystal composition 33	Liquid crystal composition 33	Liquid crystal composition 33
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	99.1	99.2	99.4
ID	86	79	51	36
Screen burn-in	Good	Good	Excellent	Excellent

[0223] Each of the liquid crystal display devices of Examples 121 to 132 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

(Examples 133 to 140)

[0224] As in Example 1, liquid crystal compositions shown in Table 77 were placed, the color filters shown in Table 8 were used to produce liquid crystal display devices of Examples 133 to 140, and the VHR and ID thereof were measured. The screen burn-in of each liquid crystal display device was evaluated. Tables 78 and 79 show results of the measurement and evaluation.

[Table 77]

Liquid crystal composition 34		Liquid crystal composition 35	
TNI / °C	76.3	TNI / °C	76.6
Δn	0.106	Δn	0.109
$\Delta \epsilon$	-3.0	$\Delta \epsilon$	-3.2
η / mPa·s	16.6	η / mPa·s	13.9
γ_1 / mPa·s	106	γ_1 / mPa·s	95
$\gamma_1 / \Delta n^2 \times 10^{-2}$	95	$\gamma_1 / \Delta n^2 \times 10^{-2}$	80
3-Cy-Cy-2	17%	1V-Cy-1O-Ph5-O2	12%
3-Cy-Ph-Ph-2	12%	1V-Cy-Cy-1O-Ph5-O2	12%
3-Cy-1O-Ph5-O1	11%	3-Cy-1O-Ph5-O2	2%
3-Cy-1O-Ph5-O2	17%	2-Cy-Cy-1O-Ph5-O2	5%
3-Nd-Ph5-Ph-2	4%	3-Cy-Cy-1O-Ph5-O2	4%
3-Cy-Cy-V	5%	3-Cy-Ph-Ph5-O2	4%
3-Cy-Cy-V1	10%	3-Cy-Cy-V	38%
V-Cy-Ph-Ph-3	12%	3-Cy-Cy-V1	3%
V-Cy-Cy-1O-Ph5-O3	12%	3-Ph-Ph-1	3%
		V2-Ph-Ph5-Ph-2V	12%
		1V2-Ph-Ph5-Ph2-V1	5%

[Table 78]

	Example 133	Example 134	Example 135	Example 136
Liquid crystal composition	Liquid crystal composition 34	Liquid crystal composition 34	Liquid crystal composition 34	Liquid crystal composition 34

(continued)

	Example 133	Example 134	Example 135	Example 136
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.1	99.2	99.3	99.5
ID	85	60	40	29
Screen burn-in	Good	Excellent	Excellent	Excellent

[Table 79]


	Example 137	Example 138	Example 139	Example 140
Liquid crystal composition	Liquid crystal composition 35	Liquid crystal composition 35	Liquid crystal composition 35	Liquid crystal composition 35
Color filter	Color filter 1	Color filter 2	Color filter 3	Color filter 4
VHR	99.0	99.1	99.3	99.4
ID	89	76	42	34
Screen burn-in	Good	Excellent	Excellent	Excellent

[0225] Each of the liquid crystal display devices of Examples 133 to 140 had high VHR and small ID. In the evaluation of screen burn-in, no afterimage was observed, or, if any, a very minor afterimage was observed but acceptable.

Claims


1. A liquid crystal display device comprising a first substrate, a second substrate, a liquid crystal composition layer disposed between the first substrate and the second substrate, a color filter including a black matrix and at least RGB three-color pixel portions, a pixel electrode, and a common electrode, wherein the liquid crystal composition layer contains a liquid crystal composition containing a compound represented by general formula (I) in an amount of 30 to 50%

[Chem. 1]



(where R¹ and R² each independently represent an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; and A represents a 1,4-phenylene group or a trans-1,4-cyclohexylene group), a compound represented by general formula (II-1) in an amount of 5 to 30%


[Chem. 2]



(where R³ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; R⁴ represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 4 to 8 carbon atoms, an alkoxy group having 1 to

8 carbon atoms, or an alkenyloxy group having 3 to 8 carbon atoms; and Z^3 represents a single bond, $-\text{CH}=\text{CH}-$, $-\text{C}\equiv\text{C}-$, $-\text{CH}_2\text{CH}_2-$, $-(\text{CH}_2)_4-$, $-\text{COO}-$, $-\text{OCO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$), and a compound represented by general formula (II-2) in an amount of 25 to 45%


[Chem. 3]



(where R^5 represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; R^6 represents an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 4 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 3 to 8 carbon atoms; B represents a 1,4-phenylene group or trans-1,4-cyclohexylene group which is optionally substituted with a fluorine atom; and Z^4 represents a single bond, $-\text{CH}=\text{CH}-$, $-\text{C}\equiv\text{C}-$, $-\text{CH}_2\text{CH}_2-$, $-(\text{CH}_2)_4-$, $-\text{COO}-$, $-\text{OCO}-$, $-\text{OCH}_2-$, $-\text{CH}_2\text{O}-$, $-\text{OCF}_2-$, or $-\text{CF}_2\text{O}-$), and the R pixel portion of the RGB three-color pixel portions contains a colorant that is a red diketopyrrolopyrrole pigment having an average primary particle size of 5 to 50 nm determined by small angle X-ray scattering.

2. The liquid crystal display device according to Claim 1, wherein in the RGB three-color pixel portions, the G pixel portion contains a colorant that is at least one selected from the group consisting of a halogenated metallophthalocyanine pigment, a green phthalocyanine dye, and a mixture of a blue phthalocyanine dye and a yellow organic azo dye, and the B pixel portion contains a colorant that is at least one selected from the group consisting of a ϵ -copper phthalocyanine pigment, a triarylmethane pigment, and a blue cationic organic dye.
3. The liquid crystal display device according to Claim 1 or 2, wherein the R pixel portion contains a pigment derivative.
4. The liquid crystal display device according to any one of Claims 1 to 3, wherein the R pixel portion contains at least one selected from a quinacridone-based pigment derivative, a diketopyrrolopyrrole-based pigment derivative, an anthraquinone-based pigment derivative, and a thiazine-based pigment derivative.
5. The liquid crystal display device according to any one of Claims 1 to 4, wherein the G pixel portion of the RGB three-color pixel portions contains a colorant that is a halogenated metallophthalocyanine pigment having a metal center that is a metal selected from the group consisting of Al, Si, Sc, Ti, V, Mg, Fe, Co, Ni, Zn, Cu, Ga, Ge, Y, Zr, Nb, In, Sn, and Pb, wherein in the case where the metal center is trivalent, the metal center is bonded to any of a halogen atom, a hydroxyl group, and a sulfonate group or oxo- or thio-bridged, and in the case where the metal center is tetravalent, the metal center is bonded to any of an oxygen atom, the same or different two halogen atoms, a hydroxyl group, and a sulfonate group.
6. The liquid crystal display device according to any one of Claims 1 to 5, wherein the B pixel portion of the RGB three-color pixel portions contains a colorant that is a triarylmethane pigment represented by general formula (1)


[Chem. 4]

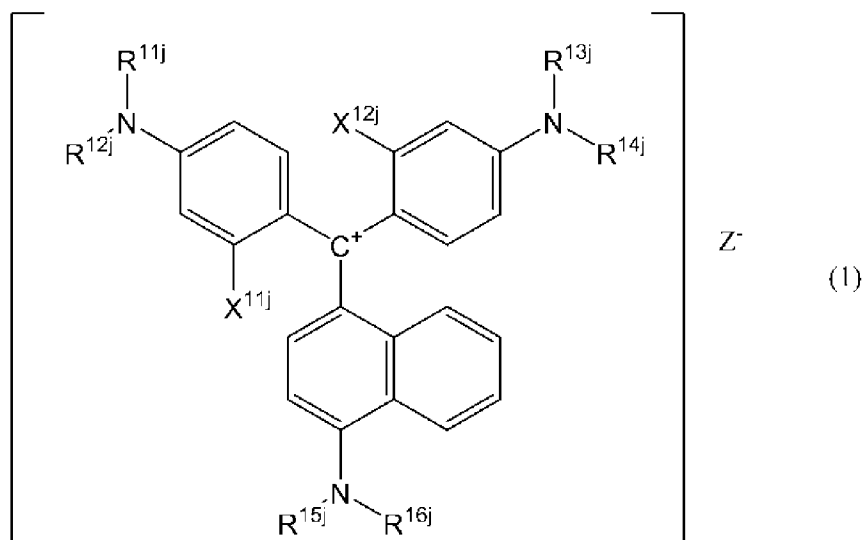

(where R^{11j} to R^{16j} each independently represent a hydrogen atom, an optionally substituted alkyl group having 1 to 8 carbon atoms, or an optionally substituted aryl group; in the case where R^{11j} to R^{16j} each represent an optionally substituted alkyl group, R^{11j} , R^{13j} , and R^{15j} are optionally connected to adjoining R^{12j} , R^{14j} , and R^{16j} to form ring structures, respectively; X^{11j} and X^{12j} each independently represent a hydrogen atom, a halogen atom, or an optionally substituted alkyl group having 1 to 8 carbon atoms; Z^- is at least one anion selected from heteropolyoxometalate anion represented by $(P_2Mo_yW_{18-y}O_{62})^{6-}$ /6 in which y is an integer of 0, 1, 2, or 3, heteropolyoxometalate anion represented by $(SiMoW_{11}O_{40})^{4-}$ /4, and lacunary Dawson-structure phosphotungstic acid heteropolyoxometalate anion; and in the case where one molecule has multiple structures represented by general formula (1), the structures are optionally the same as or different from each other).

7. The liquid crystal display device according to any one of Claims 1 to 6, wherein in the RGB three-color pixel portions, the G pixel portion contains a colorant that is a mixture of C. I. Solvent Blue 67 and C. I. Solvent Yellow 162, and the B pixel portion contains a colorant that is C. I. Solvent Blue 7.
8. The liquid crystal display device according to any one of Claims 1 to 6, wherein in the RGB three-color pixel portions, the G pixel portion contains a colorant that is at least one selected from C. I. Pigment Green 7, 36, and 58, and the B pixel portion contains a colorant that is C. I. Pigment Blue 15:6 and/or the triarylmethane pigment.
9. The liquid crystal display device according to any one of Claims 1 to 8, wherein the color filter includes the black matrix, the RGB three-color pixel portions, and a Y pixel portion, and the Y pixel portion contains a colorant that is at least one yellow organic dye or pigment selected from the group consisting of C. I. Pigment Yellow 150, 215, 185, 138, and 139 and C. I. Solvent Yellow 21, 82, 83:1, 33, and 162.
10. The liquid crystal display device according to any one of Claims 1 to 9, wherein the liquid crystal composition layer further contains a compound represented by general formula (III) in an amount of 3 to 35%

[Chem. 5]



(where R^7 and R^8 each independently represent an alkyl group having 1 to 8 carbon atoms, an alkenyl group having 2 to 8 carbon atoms, an alkoxy group having 1 to 8 carbon atoms, or an alkenyloxy group having 2 to 8 carbon atoms; D, E, and F each independently represent a 1,4-phenylene group or trans-1,4-cyclohexylene which is optionally substituted with a fluorine atom; Z^2 represents a single bond, $-OCH_2-$, $-OCO-$, $-CH_2O-$, or $-COO-$; n represents 0, 1, or 2; and the compound represented by general formula (III) is different from the compounds represented by general formulae (I), (II-1), and (II-2)).

11. The liquid crystal display device according to any one of Claims 1 to 10, wherein at least one compound represented by general formula (I) in which A represents a trans-1,4-cyclohexylene group and at least one compound represented by general formula (I) in which A represents a 1,4-phenylene group are used.

12. The liquid crystal display device according to any one of Claims 1 to 11, wherein at least one compound represented by general formula (II-2) in which B represents a 1,4-phenylene group and at least one compound represented by general formula (II-2) in which B represents a trans-1,4-cyclohexylene group are used.

13. The liquid crystal display device according to Claim 10, wherein the amount of the compounds represented by general formulae (II-1), (II-2), and (III) is in the range of 35 to 70%.

14. The liquid crystal display device according to any one of Claims 1 to 13, wherein in the liquid crystal composition contained in the liquid crystal composition layer, Z represented by the following expression is not more than 13000

[Math. 1]

$$Z = \gamma_1 / \Delta n^2$$


(where γ_1 represents rotational viscosity, and Δn represents refractive index anisotropy), γ_1 is not more than 150, and Δn ranges from 0.08 to 0.13.

15. The liquid crystal display device according to any one of Claims 1 to 14, wherein in the liquid crystal composition contained in the liquid crystal composition layer, the upper limit of the nematic liquid crystal phase temperature is in the range of 60 to 120°C, the lower limit of the nematic liquid crystal phase temperature is -20°C or lower, the difference between the upper limit and the lower limit of the nematic liquid crystal phase temperature is in the range of 100 to 150.

16. The liquid crystal display device according to any one of Claims 1 to 15, wherein the liquid crystal composition contained in the liquid crystal composition layer has a specific resistance of not less than 10^{12} ($\Omega \cdot m$).

17. The liquid crystal display device according to any one of Claims 1 to 16, wherein the liquid crystal composition contains a polymerizable compound represented by general formula (V)

[Chem. 6]




(where X^1 and X^2 each independently represent a hydrogen atom or a methyl group; Sp^1 and Sp^2 each independently represent a single bond, an alkylene group having 1 to 8 carbon atoms, or $-O-(CH_2)_s-$ (where s represents an integer from 2 to 7, and the oxygen atom is connected to an aromatic ring); Z^1 represents $-OCH_2-$, $-CH_2O-$, $-COO-$, $-OCO-$, $-CF_2O-$, $-OCF_2-$, $-CH_2CH_2-$, $-CF_2CF_2-$, $-CH=CH-COO-$, $-CH=CH-OCO-$, $-COO-CH=CH-$, $-OCO-CH=CH-$, $-COO-CH_2CH_2-$, $-OCO-CH_2CH_2-$, $-CH_2CH_2-COO-$, $-CH_2CH_2-OCO-$, $-COO-CH_2-$, $-OCO-CH_2-$, $-CH_2-COO-$, $-CH_2-OCO-$, $-CY^1=CY^2-$ (where Y^1 and Y^2 each independently represent a fluorine atom or a hydrogen atom), $-C\equiv C-$, or a single bond; C represents a 1,4-phenylene group, a trans-1,4-cyclohexylene group, or a single bond; and in each 1,4-phenylene group in the formula, any hydrogen atom is optionally substituted with a fluorine atom), and the liquid crystal composition is polymerized to serve as the liquid crystal composition layer.

18. The liquid crystal display device according to Claim 17, wherein in general formula (V), C represents a single bond, and Z^1 represents a single bond.

Patentansprüche


1. Eine Flüssigkristallanzeigevorrichtung, umfassend einen ersten Träger, einen zweiten Träger, eine Flüssigkristallzusammensetzungsschicht, angeordnet zwischen dem ersten Träger und dem zweiten Träger, einen Farbfilter, welcher eine Black Matrix und mindestens RGB-Dreifarben-Pixelbereiche enthält, eine Pixelelektrode und eine gemeinsame Elektrode, wobei die Flüssigkristallzusammensetzungsschicht eine Flüssigkristallzusammensetzung enthält, beinhaltend eine Verbindung, dargestellt durch die allgemeine Formel (I), in einer Menge von 30 bis 50%

[Chem. 1]




(wobei R¹ und R² jeweils unabhängig voneinander eine Alkylgruppe, welche 1 bis 8 Kohlenstoffatome hat, eine Alkenylgruppe, welche 2 bis 8 Kohlenstoffatome hat, eine Alkoxygruppe, welche 1 bis 8 Kohlenstoffatome hat, oder eine Alkenyloxygruppe, welche 2 bis 8 Kohlenstoffatome hat, darstellen; und A eine 1,4-Phenylengruppe oder eine trans-1,4-Cyclohexylengruppe darstellt), eine Verbindung, dargestellt durch die allgemeine Formel (II-1), in einer Menge von 5 bis 30%

[Chem. 2]



(wobei R³ eine Alkylgruppe, welche 1 bis 8 Kohlenstoffatome hat, eine Alkenylgruppe, welche 2 bis 8 Kohlenstoffatome hat, eine Alkoxygruppe, welche 1 bis 8 Kohlenstoffatome hat, oder eine Alkenyloxygruppe, welche 2 bis 8 Kohlenstoffatome hat, darstellt; R⁴ eine Alkylgruppe, welche 1 bis 8 Kohlenstoffatome hat, eine Alkenylgruppe, welche 4 bis 8 Kohlenstoffatome hat, eine Alkoxygruppe, welche 1 bis 8 Kohlenstoffatome hat, oder eine Alkenyloxygruppe, welche 3 bis 8 Kohlenstoffatome hat, darstellt; und Z³ eine Einfachbindung, -CH=CH-, -C≡C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCO-, -OCH₂-, -CH₂O-, -OCF₂- oder -CF₂O- darstellt), und eine Verbindung, dargestellt durch eine allgemeine Formel (II-2), in einer Menge von 25 bis 45%

[Chem. 3]




(wobei R⁵ eine Alkylgruppe, welche 1 bis 8 Kohlenstoffatome hat, eine Alkenylgruppe, welche 2 bis 8 Kohlenstoffatome hat, eine Alkoxygruppe, welche 1 bis 8 Kohlenstoffatome hat, oder eine Alkenyloxygruppe, welche 2 bis 8 Kohlenstoffatome hat, darstellt; R⁶ eine Alkylgruppe, welche 1 bis 8 Kohlenstoffatome hat, eine Alkenylgruppe, welche 4 bis 8 Kohlenstoffatome hat, eine Alkoxygruppe, welche 1 bis 8 Kohlenstoffatome hat, oder eine Alkenyloxygruppe, welche 3 bis 8 Kohlenstoffatome hat, darstellt; B eine 1,4-Phenylengruppe oder trans-1,4-Cyclohexylengruppe, welche gegebenenfalls mit einem Fluoratom substituiert ist, darstellt; und Z⁴ eine Einfachbindung, -CH=CH-, -C≡C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCO-, -OCH₂-, -CH₂O-, -OCF₂- oder -CF₂O- darstellt), und der R-Pixelbereich von den RGB-Dreifarben-Pixelbereichen ein Färbemittel enthält, das ein rotes Diketopyrrolopyrrolpigment ist, welches eine mittlere Primärpartikelgröße von 5 bis 50 nm hat, bestimmt durch Kleinwinkel-Röntgenstreuung.

2. Flüssigkristallanzeigevorrichtung gemäß Anspruch 1, wobei in den RGB-Dreifarben-Pixelbereichen der G-Pixelbereich ein Färbemittel enthält, das mindestens eines, ausgewählt aus der Gruppe, bestehend aus einem halogenierten Metallphthalocyaninpigment, einem grünen Phthalocyaninfarbstoff und einer Mischung aus einem blauen Phthalocyaninfarbstoff und einem gelben organischen Azofarbstoff, ist und der B-Pixelbereich ein Färbemittel enthält, das

mindestens eines, ausgewählt aus der Gruppe, bestehend aus einem ϵ -Kupferphthalocyaninpigment, einem Triarylmethanpigment und einem blauen kationischen organischen Farbstoff, ist.

3. Flüssigkristallanzeigevorrichtung gemäß Anspruch 1 oder 2, wobei der R-Pixelbereich ein Pigmentderivat enthält.
4. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 3, wobei der R-Pixelbereich mindestens eines, ausgewählt aus einem Chinacridon-basierten Pigmentderivat, einem Diketopyrrolopyrrol-basierten Pigmentderivat, einem Anthrachinon-basierten Pigmentderivat und einem Thiazin-basierten Pigmentderivat, enthält.
5. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 4, wobei der G-Pixelbereich der RGB-Dreifarben-Pixelbereiche ein Färbemittel enthält, das ein halogeniertes Metallphthalocyaninpigment ist, welches ein Metallzentrum hat, das ein Metall, ausgewählt aus der Gruppe, bestehend aus Al, Si, Sc, Ti, V, Mg, Fe, Co, Ni, Zn, Cu, Ga, Ge, Y, Zr, Nb, In, Sn und Pb, ist, wobei im Falle, wenn das Metallzentrum dreiwertig ist, das Metallzentrum an eines aus einem Halogenatom, einer Hydroxylgruppe und einer Sulfonatgruppe gebunden ist oder Oxo- oder Thioverbrückt ist, und im Falle, wenn das Metallzentrum vierwertig ist, das Metallzentrum an eines aus einem Sauerstoffatom, den gleichen oder verschiedenen zwei Halogenatomen, einer Hydroxylgruppe und einer Sulfonatgruppe gebunden ist.
6. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 5, wobei der B-Pixelbereich der RGB-Dreifarben-Pixelbereiche ein Färbemittel enthält, das ein Triarylmethanpigment, dargestellt durch die allgemeine Formel (1), ist

[Chem. 4]

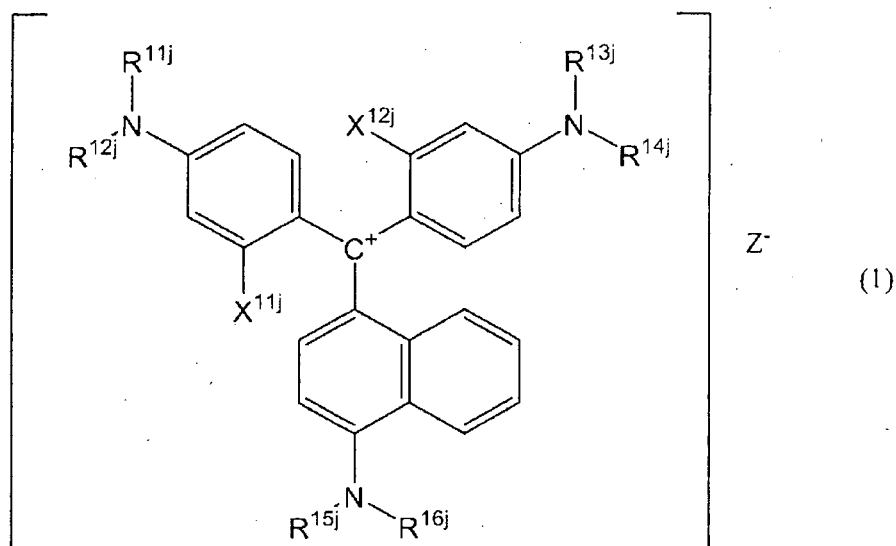


(wobei R^{11j} bis R^{16j} jeweils unabhängig voneinander ein Wasserstoffatom, eine gegebenenfalls substituierte Alkylgruppe, welche 1 bis 8 Kohlenstoffatome hat, oder eine gegebenenfalls substituierte Arylgruppe darstellen; im Falle, wenn R^{11j} bis R^{16j} jeweils eine gegebenenfalls substituierte Alkylgruppe darstellen, R^{11j} , R^{13j} und R^{15j} gegebenenfalls verbunden mit einem benachbarten R^{12j} , R^{14j} und R^{16j} sind, um jeweils Ringstrukturen zu bilden; X^{11j} und X^{12j} jeweils unabhängig voneinander ein Wasserstoffatom, ein Halogenatom oder eine gegebenenfalls substituierte Alkylgruppe, welche 1 bis 8 Kohlenstoffatome hat, darstellen; Z^- mindestens ein Anion, ausgewählt aus Heteropolyoxometalatanion, dargestellt durch $(P_2Mo_yW_{18-y}O_{62})^{6-/6}$, in welchem y eine ganze Zahl aus 0, 1, 2 oder 3 ist, Heteropolyoxometalatanion, dargestellt durch $(SiMoW_{11}O_{40})^{4-/4}$, und eine lakunäre Dawson-Struktur Wolframtophosphorsäureheteropolyoxometalatanion ist; und im Falle, wenn ein Molekül multiple Strukturen, dargestellt durch die allgemeine Formel (1), hat, die Strukturen gegebenenfalls die gleichen oder voneinander verschiedene sind).

7. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 6, wobei in den RGB-Dreifarben-Pixelbereichen der G-Pixelbereich ein Färbemittel enthält, das eine Mischung aus C. I. Solvent Blue 67 und C. I. Solvent Yellow 162 ist und der B-Pixelbereich ein Färbemittel enthält, das C. I. Solvent Blue 7 ist.

8. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 6, wobei in den RGB-Dreifarben-Pixelbereichen der G-Pixelbereich ein Färbemittel enthält, das wenigstens eines, ausgewählt aus C. I. Pigment Green 7, 36 und 58 ist, und der B-Pixelbereich ein Färbemittel enthält, das C. I. Pigment Blue 15:6 und/oder das Triarylmethanpigment ist.
9. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 8, wobei der Farbfilter die Black Matrix, die RGB-Dreifarben-Pixelbereiche und einen Y-Pixelbereich beinhaltet, und der Y-Pixelbereich ein Färbemittel enthält, das mindestens ein gelber organischer Farbstoff oder ein Pigment ist, ausgewählt aus der Gruppe, bestehend aus C. I. Pigment Yellow 150, 215, 185, 138 und 139 und C. I. Solvent Yellow 21, 82, 83:1, 33 und 162.
10. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 9, wobei die Flüssigkristallzusammensetzungsschicht des Weiteren eine Verbindung, dargestellt durch die allgemeine Formel (III), in einer Menge von 3 bis 35% enthält

[Chem. 5]



(wobei R^7 und R^8 jeweils unabhängig voneinander eine Alkylgruppe, welche 1 bis 8 Kohlenstoffatome hat, eine Alkenylgruppe, welche 2 bis 8 Kohlenstoffatome hat, eine Alkoxygruppe, welche 1 bis 8 Kohlenstoffatome hat, oder eine Alkenyloxygruppe, welche 2 bis 8 Kohlenstoffatome hat, darstellen; D, E und F jeweils unabhängig voneinander eine 1,4-Phenylengruppe oder trans-1,4-Cyclohexylengruppe darstellen, welche gegebenenfalls substituiert mit einem Fluoratom ist; Z^2 eine Einfachbindung, $-OCH_2-$, $-OCO-$, $-CH_2O-$ oder $-COO-$ darstellt; n 0, 1 oder 2 darstellt; und die Verbindung, dargestellt durch die allgemeine Formel (III), unterschiedlich von den Verbindungen, dargestellt durch die allgemeinen Formeln (I), (II-1) und (II-2), ist).

11. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 10, wobei wenigstens eine Verbindung, dargestellt durch die allgemeine Formel (I), in welcher A eine trans-1,4-Cyclohexylengruppe darstellt, und wenigstens eine Verbindung, dargestellt durch die allgemeine Formel (I), in welcher A eine 1,4-Phenylengruppe darstellt, verwendet werden.
12. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 11, wobei wenigstens eine Verbindung, dargestellt durch die allgemeine Formel (II-2), in welcher B eine 1,4-Phenylengruppe darstellt, und wenigstens eine Verbindung, dargestellt durch die allgemeine Formel (II-2), in welcher B eine trans-1,4-Cyclohexylengruppe darstellt, verwendet werden.
13. Flüssigkristallanzeigevorrichtung gemäß Anspruch 10, wobei die Menge der Verbindungen, dargestellt durch die allgemeinen Formeln (II-1), (II-2) und (III), in einem Bereich von 35 bis 70% ist.
14. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 13, wobei in der Flüssigkristallzusammensetzung, welche in der Flüssigkristallzusammensetzungsschicht beinhaltet ist, Z, dargestellt durch den folgenden Ausdruck, nicht mehr als 13.000 ist

[Math. 1]

$$Z = \gamma^1 / \Delta n^2$$


(wobei γ^1 Rotationsviskosität darstellt und Δn Brechungsindexanisotropie darstellt, γ^1 nicht mehr als 150 ist und Δn von 0,08 bis 0,13 reicht).

15. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 14, wobei in der Flüssigkristallzusammensetzung, welche in der Flüssigkristallzusammensetzungsschicht beinhaltet ist, die obere Grenze der nematischen

Flüssigkristallphasentemperatur in einem Bereich von 60 bis 120°C ist, die untere Grenze der nematischen Flüssigkristallphasentemperatur -20°C oder tiefer ist, die Differenz zwischen der oberen Grenze und der unteren Grenze der nematischen Flüssigkristallphasentemperatur in einem Bereich von 100 bis 150°C ist.

16. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 15, wobei die Flüssigkristallzusammensetzung, welche in der Flüssigkristallzusammensetzungsschicht beinhaltet ist, einen spezifischen Widerstand von nicht weniger als $10^{12} \text{ } (\Omega \cdot \text{m})$ hat.
17. Flüssigkristallanzeigevorrichtung gemäß einem der Ansprüche 1 bis 16, wobei die Flüssigkristallzusammensetzung eine polymerisierbare Verbindung, dargestellt durch die allgemeine Formel (V), beinhaltet

[Chem. 6]



(wobei X^1 und X^2 jeweils unabhängig voneinander ein Wasserstoffatom oder eine Methylgruppe darstellen; Sp^1 und Sp^2 unabhängig voneinander eine Einfachbindung, eine Alkylengruppe, welche 1 bis 8 Kohlenstoffatome hat, oder $-O-(CH_2)_S-$ darstellen (wobei S eine ganze Zahl von 2 bis 7 darstellt und das Sauerstoffatom mit einem aromatischen Ring verbunden ist); Z^1 $-OCH_2-$, $-CH_2O-$, $-COO-$, $-OCO-$, $-CF_2O-$, $-OCF_2-$, $-CH_2CH_2-$, $-CF_2CF_2-$, $-CH=CH-COO-$, $-CH=CH-OCO-$, $-COO-CH=CH-$, $-OCO-CH=CH-$, $-COO-CH_2CH_2-$, $-OCO-CH_2CH_2-$, $-CH_2CH_2-COO-$, $-CH_2CH_2-OCO-$, $-COO-CH_2-$, $-OCO-CH_2-$, $-CH_2-COO-$, $-CH_2-OCO-$, $-CY^1=CY^2-$ (wobei Y^1 und Y^2 jeweils unabhängig voneinander ein Fluoratom oder ein Wasserstoffatom darstellen), $-C\equiv C-$ oder eine Einfachbindung darstellt; C eine 1,4-Phenylengruppe, eine trans-1,4-Cyclohexylengruppe oder eine Einfachbindung darstellt; und in jeder 1,4-Phenylengruppe in der Formel, jedes Wasserstoffatom gegebenenfalls substituiert durch ein Fluoratom ist), und die Flüssigkristallzusammensetzung polymerisiert ist, um als die Flüssigkristallzusammensetzungsschicht zu dienen.

18. Flüssigkristallanzeigevorrichtung gemäß Anspruch 17, wobei in der allgemeinen Formel (V) C eine Einfachbindung darstellt und Z^1 eine Einfachbindung darstellt.

Revendications


1. Dispositif d'affichage à cristaux liquides comprenant un premier substrat, un second substrat, une couche de composition de cristaux liquides disposée entre le premier substrat et le second substrat, un filtre coloré comprenant une matrice noire et au moins des parties de pixel à trois couleurs RVB, une électrode de pixel et une électrode commune, dans lequel la couche de composition de cristaux liquides contient une composition de cristaux liquides contenant un composé représenté par la formule générale (I) en une quantité de 30 à 50 %

[Chem. 1]




(où R^1 et R^2 représentent chacun indépendamment un groupe alkyle contenant 1 à 8 atomes de carbone, un groupe alcényle contenant 2 à 8 atomes de carbone, un groupe alcoxy contenant 1 à 8 atomes de carbone ou un groupe alcényloxy contenant 2 à 8 atomes de carbone ; et A représente un groupe 1,4-phénylène ou un groupe trans-1,4-cyclohexylène), un composé représenté par la formule générale (II-1) en une quantité de 5 à 30 %

[Chem. 2]



(où R³ représente un groupe alkyle contenant 1 à 8 atomes de carbone, un groupe alcényle contenant 2 à 8 atomes de carbone, un groupe alcoxy contenant 1 à 8 atomes de carbone ou un groupe alcényloxy contenant 2 à 8 atomes de carbone ; R⁴ représente un groupe alkyle contenant 1 à 8 atomes de carbone, un groupe alcényle contenant 4 à 8 atomes de carbone, un groupe alcoxy contenant 1 à 8 atomes de carbone ou un groupe alcényloxy contenant 3 à 8 atomes de carbone ; et Z³ représente une liaison simple, -CH=CH-, -C=C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCO-, -OCH₂-, -CH₂O-, -OCF₂- ou -CF₂O-), et un composé représenté par la formule générale (II-2) en une quantité de 25 à 45 %

[Chem. 3]




(où R⁵ représente un groupe alkyle contenant 1 à 8 atomes de carbone, un groupe alcényle contenant 2 à 8 atomes de carbone, un groupe alcoxy contenant 1 à 8 atomes de carbone ou un groupe alcényloxy contenant 2 à 8 atomes de carbone ; R⁶ représente un groupe alkyle contenant 1 à 8 atomes de carbone, un groupe alcényle contenant 4 à 8 atomes de carbone, un groupe alcoxy contenant 1 à 8 atomes de carbone ou un groupe alcényloxy contenant 3 à 8 atomes de carbone ; B représente un groupe 1,4-phénylène ou un groupe trans-1,4-cyclohexylène qui est facultativement substitué avec un atome de fluor ; et Z⁴ représente une liaison simple, -CH=CH-, -C≡C-, -CH₂CH₂-, -(CH₂)₄-, -COO-, -OCO-, -OCH₂-, -CH₂O-, -OCF₂- ou -CF₂O-), et la partie de pixel R des parties de pixel à trois couleurs RVB contient un colorant qui est un pigment rouge à base de dicétopyrrolopyrrole présentant une taille moyenne de particule primaire de 5 à 50 nm déterminée par diffusion X aux petits angles.

2. Dispositif d'affichage à cristaux liquides selon la revendication 1, dans lequel, dans les parties de pixel à trois couleurs RVB, la partie de pixel V contient un colorant qui est au moins un choisi dans le groupe constitué par un pigment à base de métallophthalocyanine halogénée, un colorant vert à base de phthalocyanine et un mélange d'un colorant bleu à base de phthalocyanine et d'un colorant azo organique jaune, et la partie de pixel B contient un colorant qui est au moins un choisi dans le groupe constitué par un pigment à base de phthalocyanine de cuivre ε, un pigment à base de triarylméthane et un colorant organique cationique bleu.
3. Dispositif d'affichage à cristaux liquides selon la revendication 1 ou 2, dans lequel la partie de pixel R contient un dérivé de pigment.
4. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 3, dans lequel la partie de pixel R contient au moins un choisi parmi un dérivé de pigment à base de quinacridone, un dérivé de pigment à base de dicétopyrrolopyrrole, un dérivé de pigment à base d'anthraquinone et un dérivé de pigment à base de thiazine.
5. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 4, dans lequel la partie de pixel V des parties de pixel à trois couleurs RVB contient un colorant qui est un pigment à base de métallophthalocyanine halogénée présentant un centre métallique qui est un métal choisi dans le groupe constitué par Al, Si, Sc, Ti, V, Mg, Fe, Co, Ni, Zn, Cu, Ga, Ge, Y, Zr, Nb, In, Sn et Pb, dans lequel, dans le cas où le centre métallique est trivalent, le centre métallique est lié à l'un quelconque parmi un atome d'halogène, un groupe hydroxyle et un groupe sulfonate ou ponté avec un oxo ou un thio, et dans le cas où le centre métallique est tétravalent, le centre métallique est lié à l'un quelconque parmi un atome d'oxygène, deux atomes d'halogène identiques ou différents, un groupe hydroxyle et un groupe sulfonate.
6. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 5, dans lequel la partie de

pixel B des parties de pixel à trois couleurs RVB contient un colorant qui est un pigment à base de triarylméthane représenté par la formule générale (1)


[Chem. 4]

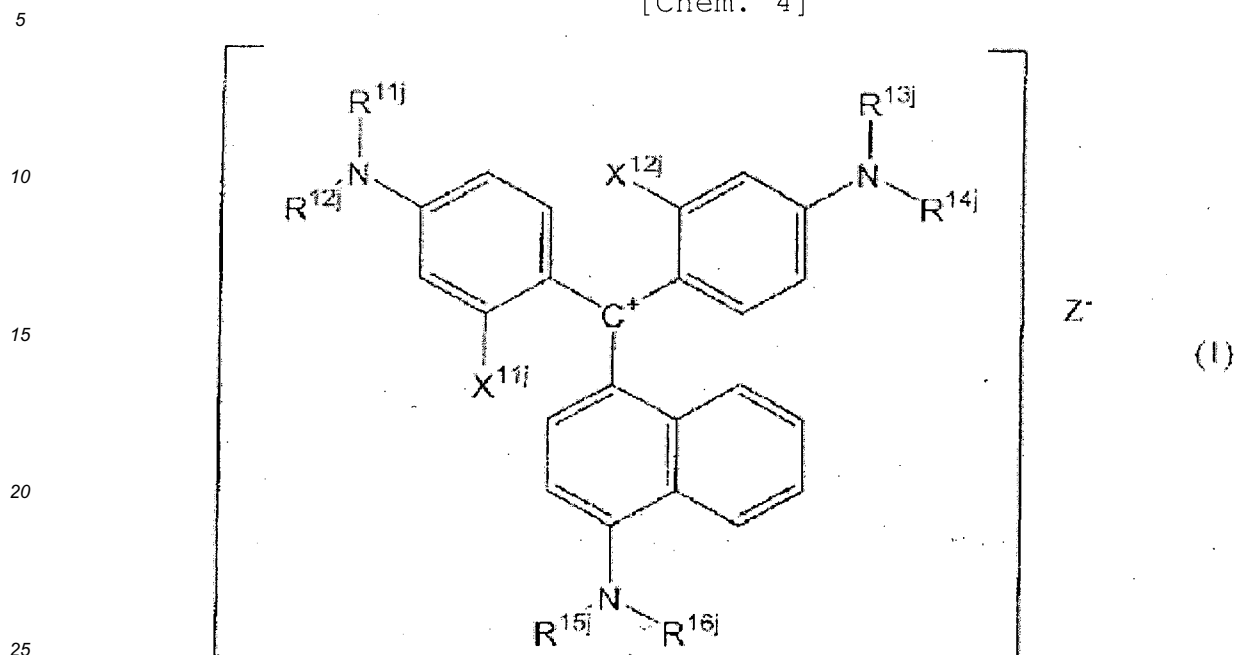

(où R^{11j} à R^{16j} représentent chacun indépendamment un atome d'hydrogène, un groupe alkyle facultativement substitué contenant 1 à 8 atomes de carbone ou un groupe aryle facultativement substitué ; dans le cas où R^{11j} à R^{16j} représentent chacun un groupe alkyle facultativement substitué, R^{11j} , R^{13j} et R^{15j} sont facultativement reliés aux R^{12j} , R^{14j} et R^{16j} voisins pour former des structures cycliques, respectivement ; X^{11j} et X^{12j} représentent chacun indépendamment un atome d'hydrogène, un atome d'halogène ou un groupe alkyle facultativement substitué contenant 1 à 8 atomes de carbone ; Z^- est au moins un anion choisi parmi un anion hétéropolyoxométalate représenté par $(P_2Mo_yW_{18-y}O_{62})^{6-/6}$ dans lequel y est un nombre entier égal à 0, 1, 2 ou 3, un anion hétéropolyoxométalate représenté par $(SiMoW_{11}O_{40})^{4-/4}$, et un anion hétéropolyoxométalate lacunaire d'acide phosphotungstique à structure de Dawson ; et dans le cas où une molécule possède de multiples structures représentées par la forme générale (1), les structures sont facultativement identiques les unes aux autres ou différentes les unes des autres).

7. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 6, dans lequel, dans les parties de pixel à trois couleurs RVB, la partie de pixel V contient un colorant qui est un mélange de C.I. Solvent Blue 67 et de C.I. Solvent Yellow 162, et la partie de pixel B contient un colorant qui est le C.I. Solvent Blue 7.
8. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 6, dans lequel, dans les parties de pixel à trois couleurs RVB, la partie de pixel V contient un colorant qui est au moins un choisi parmi les C.I. Pigment Green 7, 36 et 58, et la partie de pixel B contient un colorant qui est le C.I. Pigment Blue 15:6 et/ou le pigment à base de triarylméthane.
9. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 8, dans lequel le filtre coloré comprend la matrice noire, les parties de pixel à trois couleurs RVB et une partie de pixel J, la partie de pixel J contient un colorant qui est au moins un colorant ou pigment organique jaune choisi dans le groupe constitué par les C.I. Pigment Yellow 150, 215, 185, 138 et 139 et les C.I. Solvent Yellow 21, 82, 83:1, 33 et 162.
10. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 9, dans lequel la couche de composition de cristaux liquides contient en outre un composé représenté par la formule générale (III) en une quantité de 3 à 35 %

[Chem. 5]



(où R^7 et R^8 représentent chacun indépendamment un groupe alkyle contenant 1 à 8 atomes de carbone, un groupe alcényle contenant 2 à 8 atomes de carbone, un groupe alcoxy contenant 1 à 8 atomes de carbone ou un groupe alcényloxy contenant 2 à 8 atomes de carbone ; D, E et F représentent chacun indépendamment un groupe 1,4-phénylène ou un trans-1,4-cyclohexylène qui est facultativement substitué avec un atome de fluor ; Z^2 représente une liaison simple, $-OCH_2-$, $-OCO-$, $-CH_2O-$ ou $-COO-$; n représente 0, 1 ou 2 ; et le composé représenté par la formule générale (III) est différent des composés représentés par les formules générales (I), (II-1) et (II-2)).

11. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 10, dans lequel au moins un composé représenté par la formule générale (I) dans laquelle A représente un groupe trans-1,4-cyclohexylène et au moins un composé représenté par la formule générale (I) dans laquelle A représente un groupe 1,4-phénylène sont utilisés.

12. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 11, dans lequel au moins un composé représenté par la formule générale (II-2) dans laquelle B représente un groupe 1,4-phénylène et au moins un composé représenté par la formule générale (II-2) dans laquelle B représente un groupe trans-1,4-cyclohexylène sont utilisés.

13. Dispositif d'affichage à cristaux liquides selon la revendication 10, dans lequel la quantité des composés représentés par les formules générales (II-1), (II-2) et (III) est située dans la plage allant de 35 à 70 %.

14. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 13, dans lequel, dans la composition de cristaux liquides contenue dans la couche de composition de cristaux liquides, Z représenté par l'expression suivante n'est pas supérieur à 13 000

[Math. 1]

$$Z = \frac{\gamma_1}{\Delta n^2}$$


(où γ_1 représente la viscosité rotationnelle et Δn représente l'anisotropie de l'indice de réfraction), γ_1 n'est pas supérieur à 150 et Δn est situé dans la plage allant de 0,08 à 0,13.

15. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 14, dans lequel, dans la composition de cristaux liquides contenue dans la couche de composition de cristaux liquides, la limite supérieure de la température de la phase de cristaux liquides nématiques est située dans la plage allant de 60 à 120 °C, la limite inférieure de la température de la phase de cristaux liquides nématiques est inférieure ou égale à -20 °C, la différence entre la limite supérieure et la limite inférieure de la température de la phase de cristaux liquides nématiques est située dans la plage allant de 100 à 150.

16. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 15, dans lequel la composition de cristaux liquides contenue dans la couche de composition de cristaux liquides présente une résistance spécifique qui n'est pas inférieure à 10^{12} ($\Omega \cdot m$).

17. Dispositif d'affichage à cristaux liquides selon l'une quelconque des revendications 1 à 16, dans lequel la composition de cristaux liquides contient un composé polymérisable représenté par la formule générale (V)

[Chem. 6]



10 (où X¹ et X² représentent chacun indépendamment un atome d'hydrogène ou un groupe méthyle ; Sp¹ et Sp² représentent chacun indépendamment une liaison simple, un groupe alkylène contenant 1 à 8 atomes de carbone ou -O-(CH₂)_s- (où s représente un nombre entier allant de 2 à 7, et l'atome d'oxygène est lié à un cycle aromatique) ; Z¹ représente -OCH₂-, -CH₂O-, -COO-, -OCO-, -CF₂O-, -OCF₂-, -CH₂CH₂-, -CF₂CF₂-, -CH=CH-COO-, -CH=CH-OCO-, -COO-CH=CH-, -OCO-CH=CH-, -COO-CH₂CH₂-, -OCO-CH₂CH₂-, -CH₂CH₂-COO-, -CH₂CH₂-OCO-, -COO-CH₂-, -OCO-CH₂-, -CH₂-COO-, -CH₂-OCO-, -CY¹=CY²- (où Y¹ et Y² représentent chacun indépendamment un atome de fluor ou un atome d'hydrogène), -C≡C-, ou une liaison simple ; C représente un groupe 1,4-phénylène, un groupe trans-1,4-cyclohexylène ou une liaison simple ; et dans chaque groupe 1,4-phénylène dans la formule, n'importe quel atome d'hydrogène est facultativement substitué avec un atome de fluor), et la composition de cristaux liquides est polymérisée pour servir de couche de composition de cristaux liquides.

- 20 **18.** Dispositif d'affichage à cristaux liquides selon la revendication 17, dans lequel, dans la formule générale (V), C représente une liaison simple et Z¹ représente une liaison simple.

FIG. 1


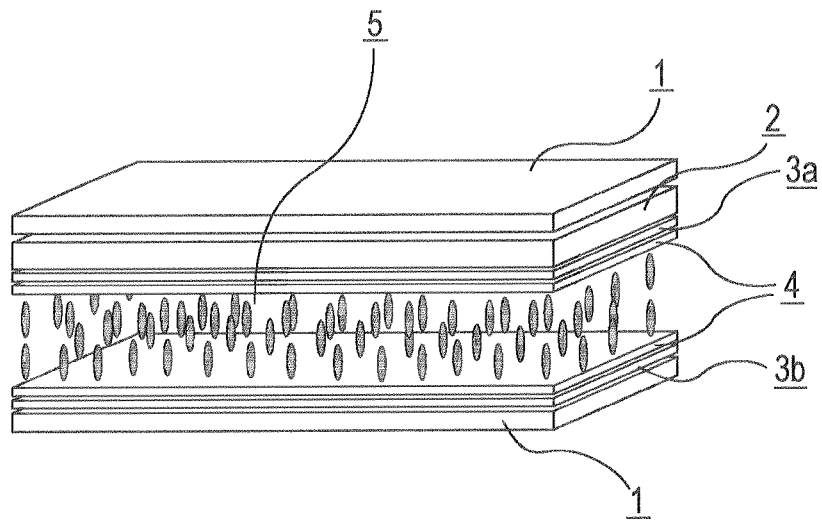


FIG. 2

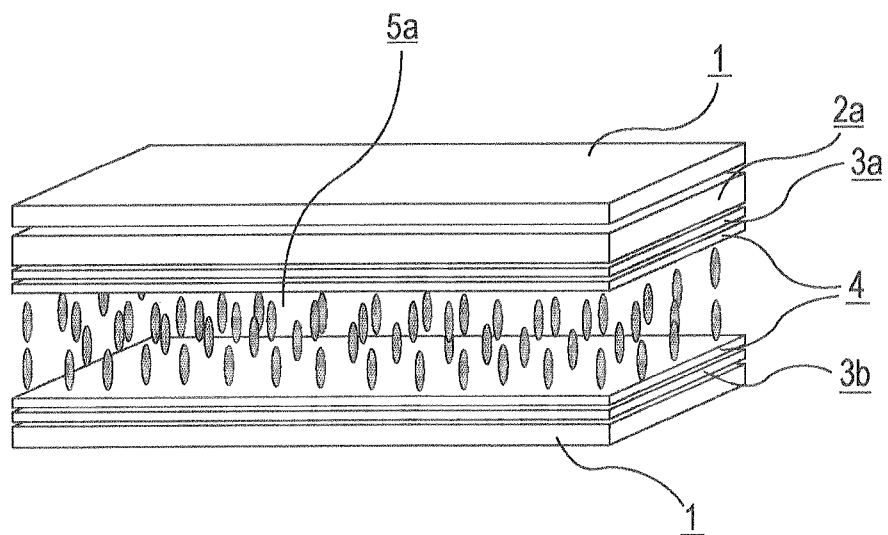

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000019321 A [0010]
- JP 2009109542 A [0010]
- JP 2000192040 A [0010]
- JP 2002309255 A [0011]
- WO 2011092973 A1 [0011]
- US 2012236246 A1 [0011]
- WO 2010095506 A1 [0011]
- US 20110297881 A1 [0011]
- JP 2009058546 A [0011]
- JP 2010250117 A [0011]
- JP 2006113042 A [0158]

专利名称(译)	液晶显示装置		
公开(公告)号	EP2837964B1	公开(公告)日	2016-09-21
申请号	EP2013836237	申请日	2013-06-06
[标]申请(专利权)人(译)	大日本油墨化学工业株式会社		
申请(专利权)人(译)	DIC株式会社		
当前申请(专利权)人(译)	DIC株式会社		
[标]发明人	OGAWA SHINJI IWASHITA YOSHINORI FUNAKURA SEIJI SHIMADA KATSUNORI		
发明人	OGAWA SHINJI IWASHITA YOSHINORI FUNAKURA SEIJI SHIMADA KATSUNORI		
IPC分类号	G02F1/1335 C09K19/30 C09K19/42 G02B5/20 G02B5/22 G02F1/13 C09K19/44 C09K19/04 C09K19/12 C09K19/52		
CPC分类号	C09K19/322 C09K19/3003 C09K19/3066 C09K19/44 C09K2019/0448 C09K2019/122 C09K2019/123 C09K2019/3004 C09K2019/3009 C09K2019/301 C09K2019/3016 C09K2019/3027 C09K2019/523 G02B5/20 G02B5/22 G02F1/133512 G02F1/133514		
其他公开文献	EP2837964A1 EP2837964A4		
外部链接	Espacenet		

摘要(译)

液晶显示装置技术领域本发明涉及一种液晶显示装置，其中使用特定的液晶组合物和使用特定颜料的滤色器。本发明提供一种液晶显示装置，该液晶显示装置防止液晶层的电压保持率（VHR）的降低和其中的离子密度（ID）的增加，并且克服了诸如漏失，不均匀对准等缺陷显示的问题。和屏幕老化。本发明的液晶显示装置可以防止液晶层的电压保持率（VHR）的降低和离子密度（ID）的增加，并且可以减少屏幕老化等缺陷显示。因此，这种液晶显示装置适合作为VA模式和PSVA模式的液晶显示装置，其涉及有源矩阵驱动，并且可以应用于液晶电视机，监视器，移动电话和智能电话的液晶显示装置。。

[Chem. 1]

