




US 20160223846A1

(19) **United States**(12) **Patent Application Publication**
LV et al.(10) **Pub. No.: US 2016/0223846 A1**(43) **Pub. Date: Aug. 4, 2016**(54) **LIQUID CRYSTAL DISPLAY DEVICE AND
DRIVING METHOD THEREOF****Publication Classification**(71) Applicant: **Shanghai Tianma Micro-Electronics
Co., Ltd., Shanghai (CN)**(51) **Int. Cl.**
G02F 1/133 (2006.01)
G02F 1/1362 (2006.01)(72) Inventors: **Bojia LV**, Shanghai (CN); **Dong Qian**,
Shanghai (CN); **Xiangzi Kong**, Shanghai
(CN); **Hanyu Gu**, Shanghai (CN)(52) **U.S. Cl.**
CPC **G02F 1/13306** (2013.01); **G02F 1/136286**
(2013.01)(21) Appl. No.: **15/087,830**(22) Filed: **Mar. 31, 2016****Related U.S. Application Data**(63) Continuation of application No. 14/077,175, filed on
Nov. 11, 2013, now Pat. No. 9,335,573, which is a
continuation of application No. PCT/CN2012/
084263, filed on Nov. 8, 2012.(30) **Foreign Application Priority Data**

Jul. 24, 2012 (CN) 201210258179.1

ABSTRACT

The present invention discloses a liquid crystal display device and a driving method thereof, and the device comprises a plurality of data lines; a plurality of gate lines; a plurality of common lines; at least one dummy gate line; a plurality of gate line trigger circuits; and a plurality of common line trigger circuits; wherein, one end of the last gate line is connected with the last gate line trigger circuit; one end of each of remaining gate lines are connected with a gate line trigger circuit corresponding to said each of remaining gate lines, and the other end of said each of the remaining gate lines are connected with the succeeding gate line trigger circuit; the first common line trigger circuit is connected with one dummy gate line, and each of remaining common line trigger circuits is connected with one or more preceding gate line trigger circuits. Latency to the charging time is effectively reduced with the liquid crystal display device of this invention.

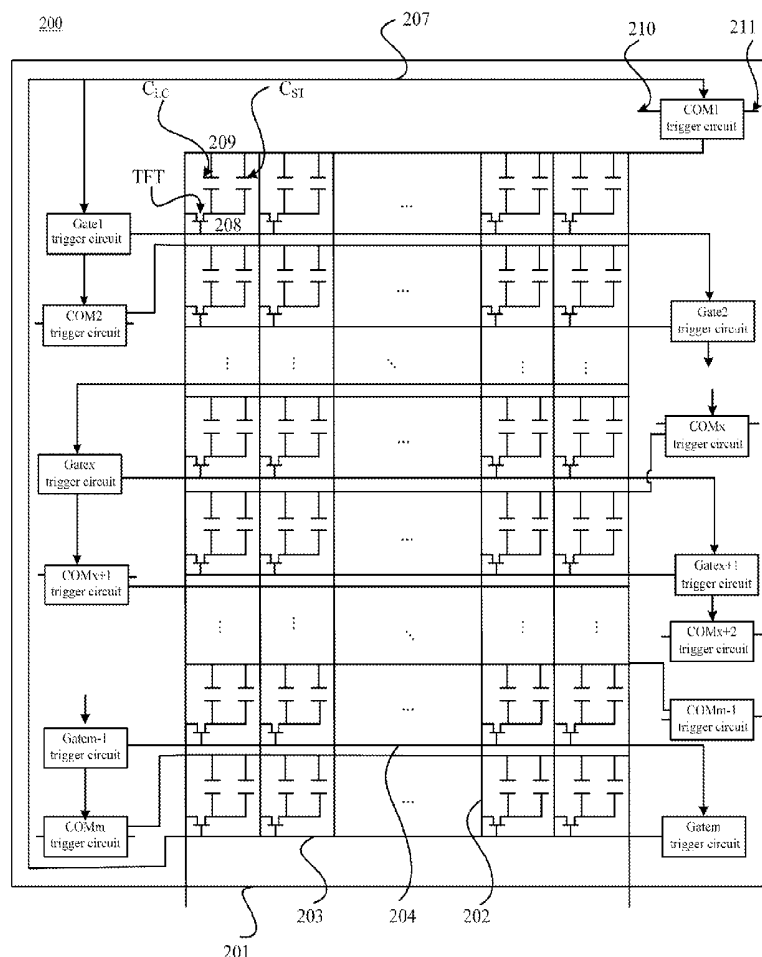

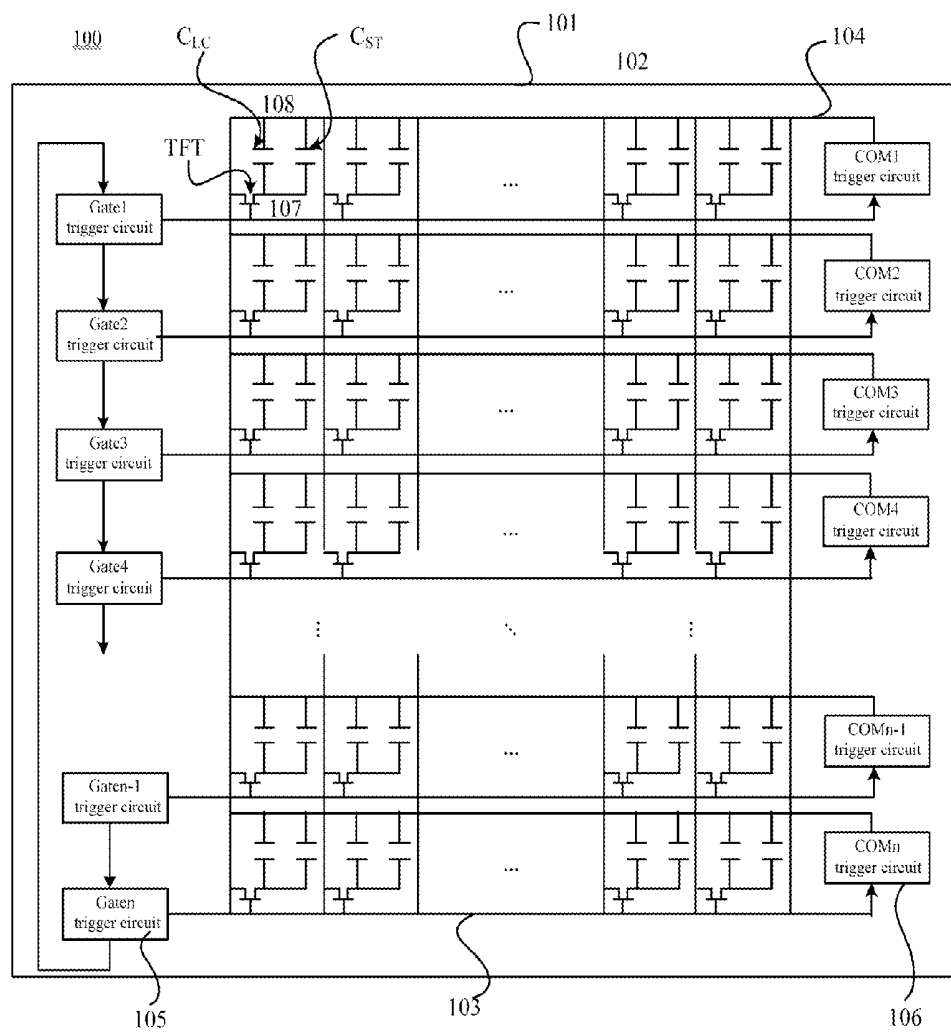


FIG.1

--Prior Art--

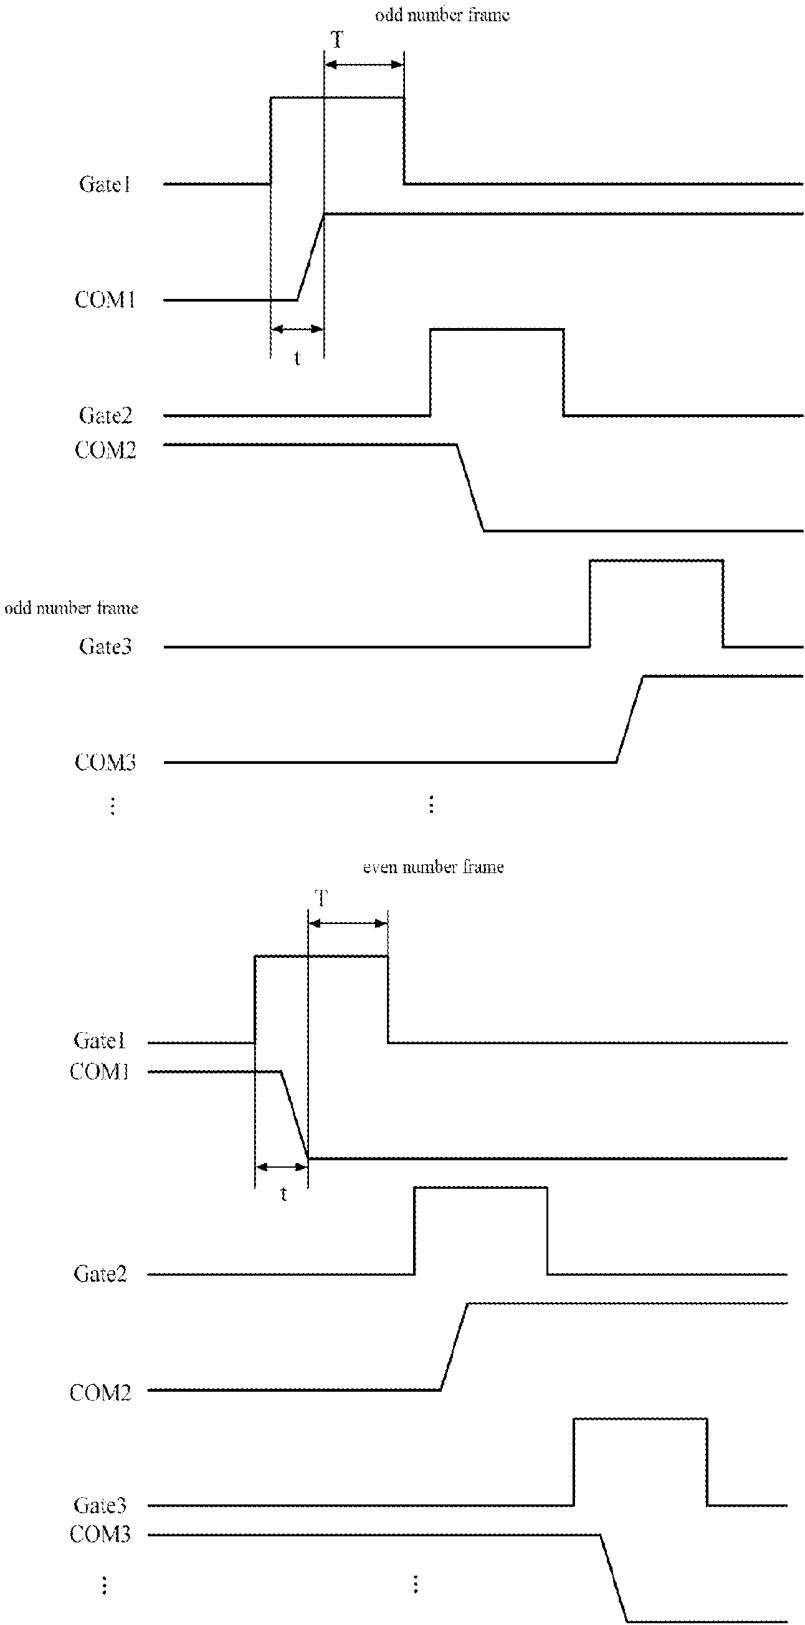


FIG.2

--Prior Art--

FIG.3

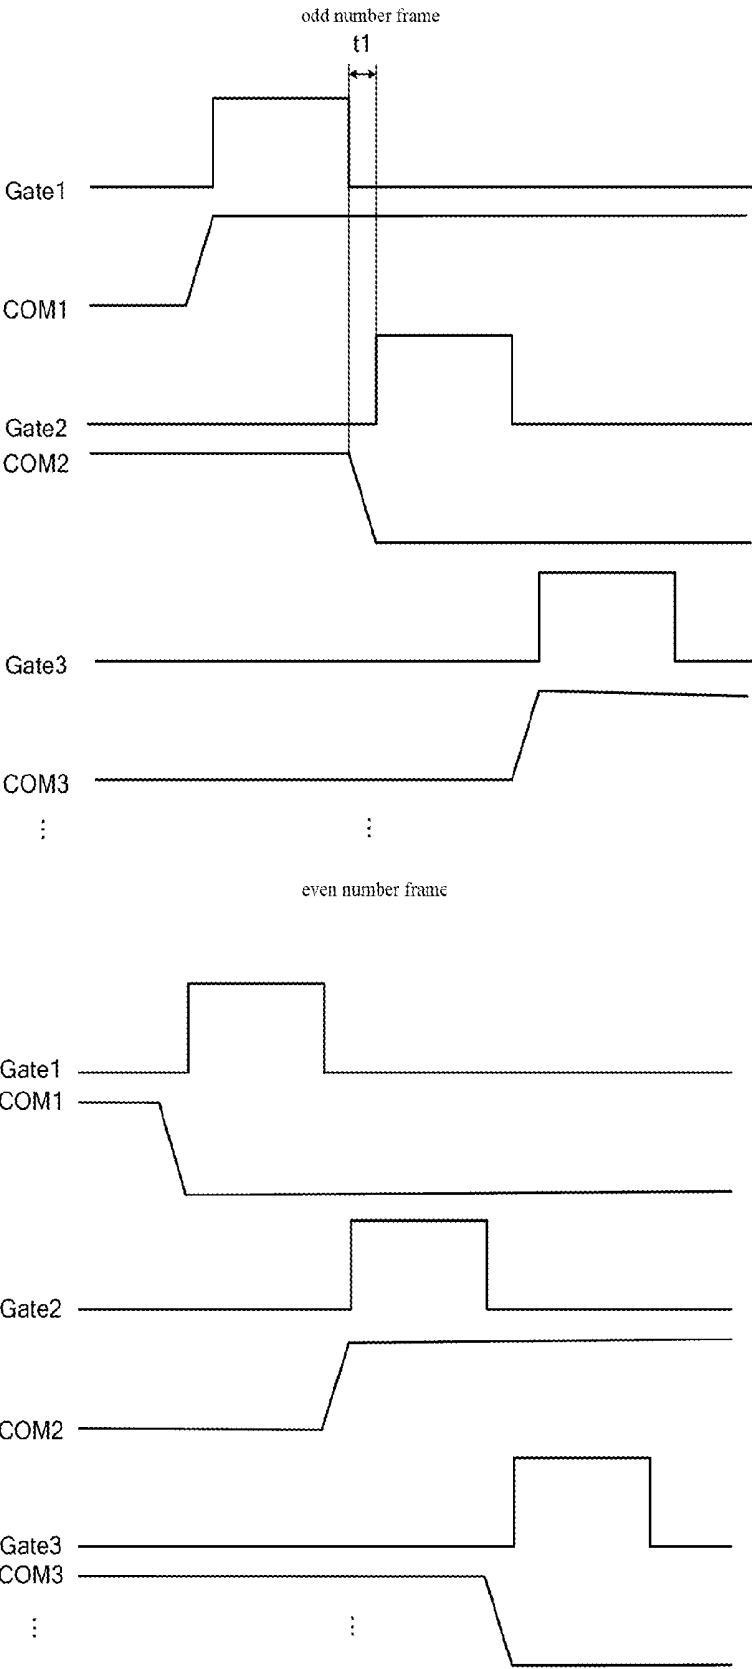


FIG.4

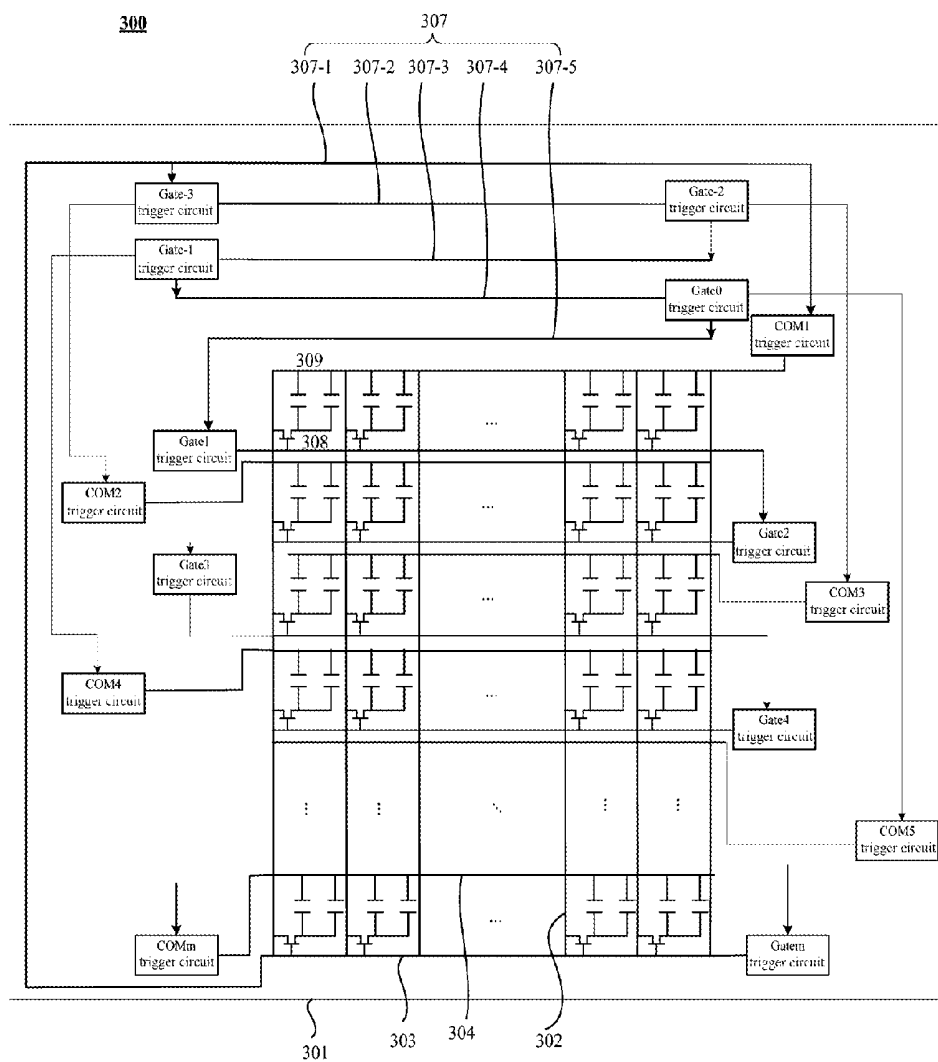


FIG.5

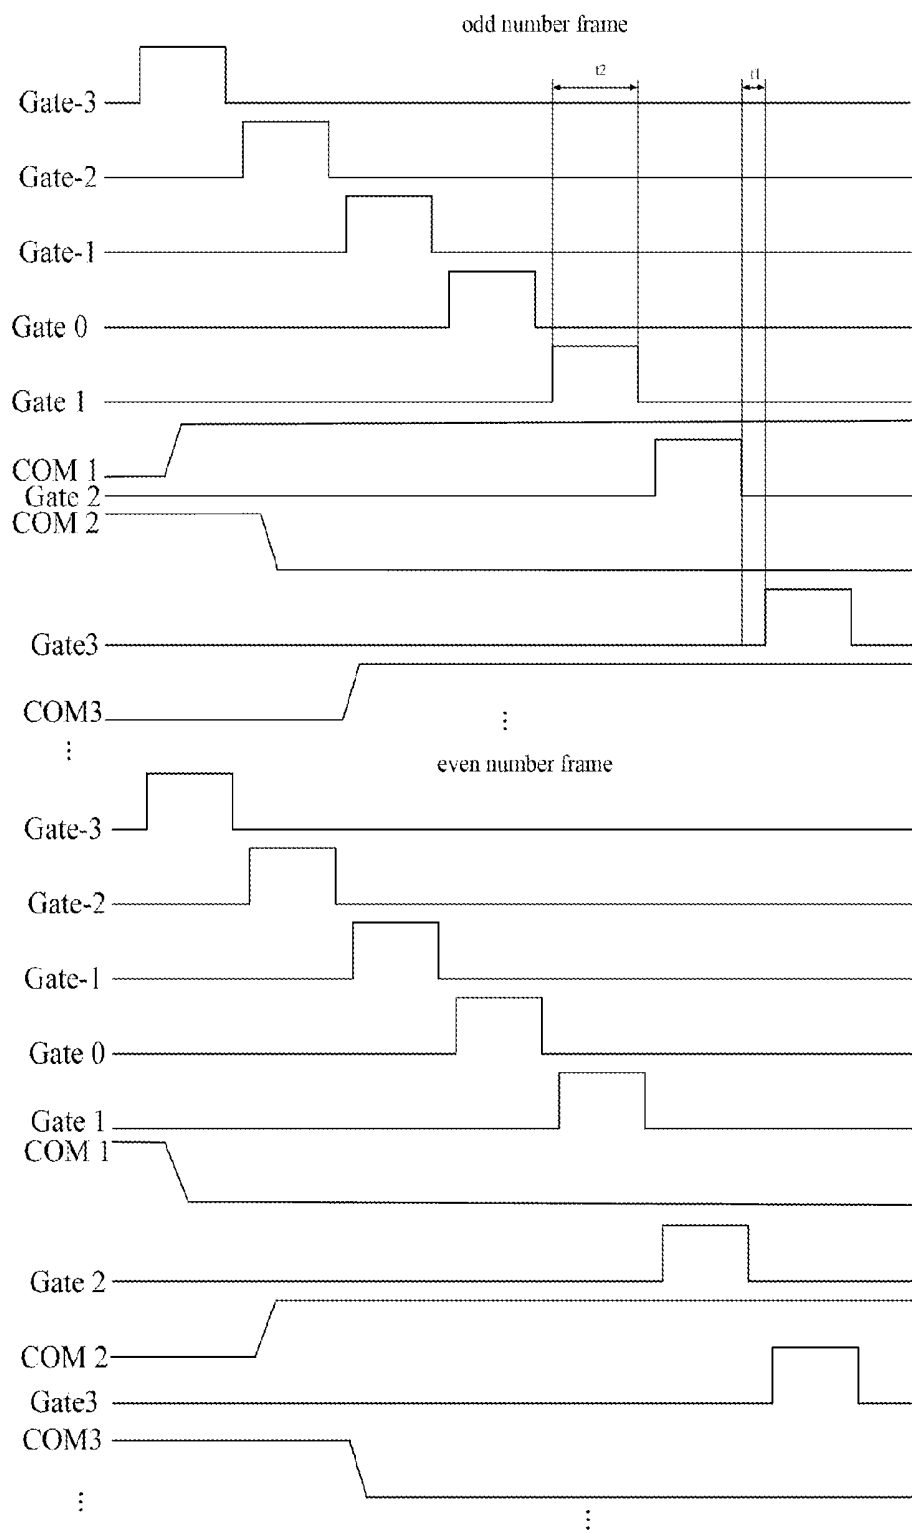


FIG.6

FIG.7

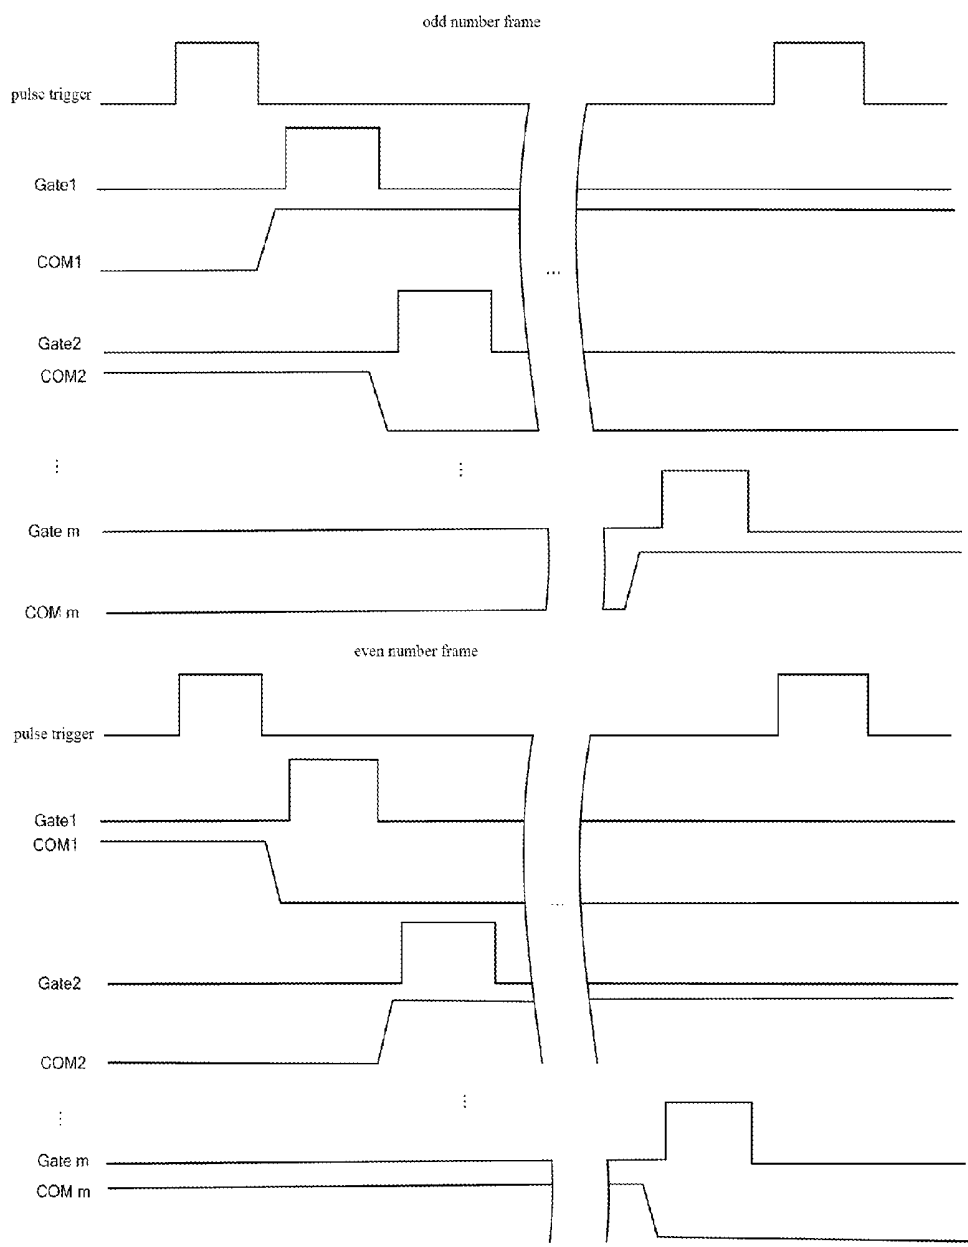


FIG.8

LIQUID CRYSTAL DISPLAY DEVICE AND DRIVING METHOD THEREOF

CROSS-REFERENCES TO RELATED APPLICATIONS

[0001] This application is a continuation application of an U.S. application Ser. No. 14/077,175, titled “LIQUID CRYSTAL DISPLAY DEVICE AND DRIVING METHOD THEREOF”, filed on Nov. 11, 2013, which claims priority to Chinese Patent Application No. 201210258179.1, titled “LIQUID CRYSTAL DISPLAY DEVICE AND DRIVING METHOD THEREOF”, filed on Jul. 24, 2012, which is herein incorporated by reference in its entirety.

FIELD OF THE INVENTION

[0002] The present invention relates to flat panel display technologies, and in particular to a liquid crystal display device and a driving method of the liquid crystal display device.

BACKGROUND OF THE INVENTION

[0003] In a traditional liquid crystal display device, an electric field is used to control the rotation of liquid crystal molecules to display an image. As shown in FIG. 1, the traditional liquid crystal display device 100 includes a liquid crystal panel 101, a plurality of data lines 102 formed on the liquid crystal panel 101, a plurality of gate lines 103, a plurality of common lines 104, a plurality of gate line trigger circuits (including a trigger circuit Gate 1, a trigger circuit Gate 2, a trigger circuit Gate 3, a trigger circuit Gate 4 . . . a trigger circuit Gate n-1, and a trigger circuit Gate n), and a plurality of common line trigger circuits (including a trigger circuit COM 1, a trigger circuit COM 2, a trigger circuit COM 3, a trigger circuit COM 4 . . . a trigger circuit COM n-1, and a trigger circuit COM n).

[0004] In FIG. 1, a first direction is defined by the vertical direction, while a second direction is defined by the horizontal direction. The data lines 102 extend in the first direction, the gate lines 103 extend in the second direction and intersect with the data lines 102, and the common lines 104 are in parallel with the gate lines 103 and intersect with the data lines 102. The regions defined by the plurality of data lines 102 and the plurality of gate lines 103 are as display regions. The liquid crystal panel 101 is provided with Thin-Film-Transistors (TFTs), each of which is used to drive a liquid crystal element C_{LC} located at the intersection. Furthermore, the liquid crystal panel 101 is equipped with storage capacitors C_{ST} for maintaining the voltages of the liquid crystal elements C_{LC} . The TFT is turned on if its gate is applied with a gate voltage by the gate line 103. At this time, if a drive voltage is provided to a pixel electrode 107 via the data line 102 and a common voltage is provided to a common electrode 108 via the common line 104, an electric field is generated on the liquid crystal element C_{LC} to change the arrangement of the liquid crystal molecules, so as to control the light transmittance of the liquid crystal element C_{LC} .

[0005] In the liquid crystal panel 101, one end of each of the gate lines 103 is connected to one gate line trigger circuit which is used to selectively provide a gate voltage to the gate line 103. The other end of the gate line 103 is connected to a common line trigger circuit in the row of the gate line and is used to trigger the common line trigger circuit and to selectively provide a common voltage to the common line 104 in

the row. The gate line trigger circuit is located on one side of the display region and the common line trigger circuit is located on the other side of the display region. When a common voltage is applied to the common electrode and a gate voltage is inputted to apply a data voltage to the pixel electrode 107, the charging of the storage capacitor C_{ST} is started, and the charging ends once the gate voltage is removed and the TFT is turned off. Here, the time for the charging of the storage capacitor C_{ST} is referred to as charging time. After the sufficient charging time, the voltage across the storage capacitors C_{ST} is equal to the difference between the data voltage and the common voltage. After the TFT is turned off, the storage capacitor C_{ST} maintains the rotation of the liquid crystal molecules with its voltage.

[0006] Latency exists for the gate voltage to be transferred from the leftmost pixel to the rightmost pixel. The gate voltage transferred to the rightmost pixel triggers the common line trigger circuit, and then the triggered common line trigger circuit provides the common voltage to the common line. Likewise, there exists latency for the common voltage to be transferred from the rightmost pixel to the leftmost pixel. All the above latency results in that, after a gate voltage is applied to the TFT, the common voltage is applied to the common electrode 108 after certain delay time. The above latency is an RC delay which is significantly impacted by resistance of the gate line and the common line as well as the related parasitic capacitance. Particularly, if the resistance is increased, the related parasitic capacitance is increased, and the latency is lengthened. The presence of the above latency shortens the charging time of the storage capacitors C_{ST} , as a result, the storage capacitors C_{ST} cannot be charged to a predetermined voltage value and hence the liquid crystal molecules cannot be rotated to predetermined positions to implement the intended display.

[0007] To maintain the polarities of the liquid crystal molecules, the liquid crystal display device may be driven by a driving approach with an unchanged common voltage and a driving approach with inverted common voltages. FIG. 2 shows a time sequence for the driving approach with inverted common voltages. As shown in FIG. 2, after each gate line is applied by a gate voltage, the applying of a common voltage to the common voltage line is later than the applying of the gate voltage because of the presence of the latency t , therefore the charging time T of the storage capacitors C_{ST} is shortened, such that the voltage of the storage capacitor C_{ST} cannot reach the difference between the data voltage and the common voltage, and hence the display effect is degraded.

[0008] With the increasing improved resolution of the liquid crystal display device, more and more gate lines and common lines are distributed on the liquid crystal panel, and the charging time for each storage capacitor C_{ST} under the same refresh frequency is increasingly shortened. Meanwhile, a high aperture ratio of the liquid crystal panel requires for thinner gate lines and common lines, which causes larger resistance and hence lengthened RC delay. Based on the above two reasons, the effective charging time for the storage capacitor C_{ST} is increasingly shortened, which has become a substantial problem degrading the resolution of the liquid crystal display device.

[0009] Therefore, it is necessary to develop a liquid crystal display device and a driving method of the liquid crystal display device, for reducing or eliminating the impact of the above latency to the storage capacitor C_{ST} .

SUMMARY OF THE INVENTION

[0010] The present invention provides a liquid crystal display device and a driving method of the liquid crystal display device, for reducing or eliminating the impact of the above latency to the storage capacitor C_{ST} .

[0011] In order to solve the above technical problems, the present invention provides a liquid crystal display device including:

[0012] a plurality of data lines extending in a first direction;

[0013] a plurality of gate lines extending in a second direction and intersecting with the plurality of data lines;

[0014] a plurality of common lines in parallel with the plurality of gate lines and intersecting with the plurality of data lines;

[0015] a plurality of gate line trigger circuits for providing gate voltages to corresponding gate lines; and

[0016] a plurality of common line trigger circuits for providing common voltages to the plurality of common lines;

[0017] wherein, one end of each of the gate lines is connected with a corresponding gate line trigger circuit, and the other end of said each of the gate lines is connected with a succeeding gate line trigger circuit; each of the common line trigger circuits is connected with N preceding gate line trigger circuits, wherein the N is a positive integer and is greater than or equal to 1.

[0018] Optionally, the liquid crystal display device further includes at least one dummy gate line in parallel with the gate lines; wherein, the plurality of gate line trigger circuits are further configured to provide gate voltages to the at least one dummy gate line; one end of the last gate line is connected with the last gate line trigger circuit; and the first common line trigger circuit is connected with one dummy gate line.

[0019] Optionally, pixel regions defined by the plurality of data lines and the plurality of gate lines are display regions.

[0020] Optionally, the dummy gate line is formed above or below the display regions.

[0021] Optionally, the gate lines include even number gate lines and odd number gate lines, and the common lines include even number common lines and odd number common lines.

[0022] Optionally, both the gate line trigger circuits connected with the even number gate lines and the common line trigger circuits connected with the odd number common lines are located on one side of the display regions.

[0023] Optionally, both the gate line trigger circuits connected with the odd number gate lines and the common line trigger circuits connected with the even number common lines are located on the other side of the display regions.

[0024] Optionally, if the at least one dummy gate line consists of one dummy gate line, the other end of the last gate line is connected with the dummy gate line.

[0025] Optionally, if the at least one dummy gate line consists of a plurality of dummy gate lines, the other end of the last gate line is connected with the first dummy gate line, and one end of each of remaining dummy gate lines is connected with a gate line trigger circuit corresponding to said each of remaining dummy gate lines, and the other end of said each of the remaining dummy gate lines is connected with the succeeding gate line trigger circuit.

[0026] Optionally, if the at least one dummy gate line consists of one dummy gate line, said one dummy gate line is connected with a periodic pulse trigger circuit.

[0027] Optionally, if the at least one dummy gate line consists of a plurality of dummy gate lines, the first dummy gate

line is connected with a periodic pulse trigger circuit, one end of each of remaining dummy gate lines is connected with a gate line trigger circuit corresponding to said each of remaining dummy gate lines and the other end of said each of the remaining dummy gate lines is connected with a succeeding gate line trigger circuit.

[0028] Optionally, the liquid crystal display device further includes a first common voltage terminal and a second common voltage terminal, which are connected with the common line trigger circuit and used for providing the common lines with a first common voltage and a second common voltage.

[0029] Optionally, the first common voltage and the second common voltage have the same magnitude and different polarities.

[0030] Optionally, the magnitude of the first common voltage or the second common voltage is zero.

[0031] Correspondingly, there is provided a driving method of the liquid crystal display device including:

[0032] providing, by a gate line trigger circuit, a gate voltage to a gate line corresponding to the gate line trigger circuit, and triggering a next gate line trigger circuit; and

[0033] triggering the first common line trigger circuit by a signal transmitted by a dummy gate line, wherein each of remaining common line trigger circuits is triggered by one or more preceding gate line trigger circuits.

[0034] Optionally, if only one dummy gate line is present, the other end of the last gate line is connected with the dummy gate line, and a gate voltage of the last gate line is used to trigger the first common line trigger circuit.

[0035] Optionally, if a plurality of the dummy gate lines are present, the other end of the last gate line is connected with the first dummy gate line, and a gate voltage of the last gate line is used to trigger the first common line trigger circuit; and one end of each of remaining dummy gate lines is connected with a gate line trigger circuit corresponding to said each of remaining dummy gate lines, and the other end of said each of the remaining dummy gate lines is connected with a succeeding gate line trigger circuit, so that the succeeding gate line trigger circuit is triggered by its preceding gate line trigger circuit.

[0036] Optionally, if only one dummy gate line is present, the dummy gate line is connected with a periodic pulse trigger circuit, which is used to trigger the first common line trigger circuit.

[0037] Optionally, if a plurality of the dummy gate lines are present, the first dummy gate line is connected with a periodic pulse trigger circuit, which is used to trigger the first common line trigger circuit; and one end of each of remaining dummy gate lines is connected with a gate line trigger circuit corresponding to said each of remaining dummy gate lines, and the other end of said each of the remaining dummy gate lines is connected with a succeeding gate line trigger circuit, so that the succeeding gate line trigger circuit is triggered by its preceding gate line trigger circuit.

[0038] Optionally, the liquid crystal display device further includes a first common voltage terminal and a second common voltage terminal, which are connected with the common line trigger circuit and used for selectively providing the common lines with a first common voltage and a second common voltage.

[0039] In an embodiment of this invention, at least one dummy gate line is introduced, a gate line trigger circuit provides a gate voltage to a gate line corresponding to the gate line trigger circuit and triggers a succeeding gate line trigger

circuit; meanwhile, the first common line trigger circuit is triggered by a signal transmitted via the dummy gate line, and each of remaining common line trigger circuits is triggered by one or more preceding gate line trigger circuits. That is, the common line trigger circuits are not triggered by the gate voltage of the same gate line, but triggered before the arrival of the gate voltage of this gate line. Therefore, the common voltage of the common line is applied to the common electrode before the gate voltage is applied, thereby ensuring that the charged capacitor is maintained in a charging state once the voltage of the pixel electrode is applied to the capacitor, such that the impact of the latency of the common voltage on the charging time is alleviated, and the display effect is improved.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040] FIG. 1 is a schematic view of a traditional liquid crystal display device;

[0041] FIG. 2 is a diagram showing a time sequence of a driving approach of the traditional liquid crystal display device;

[0042] FIG. 3 is schematic view of a liquid crystal display device according to a first embodiment of the invention;

[0043] FIG. 4 is a diagram showing a time sequence of a driving approach of the liquid crystal display device according to the first embodiment of the invention;

[0044] FIG. 5 is a schematic view of a liquid crystal display device according to a second embodiment of the invention;

[0045] FIG. 6 is a diagram showing a time sequence of a driving approach of the liquid crystal display device according to the second embodiment of the invention;

[0046] FIG. 7 is a schematic view of a liquid crystal display device according to a third embodiment of the invention; and

[0047] FIG. 8 is a diagram showing a time sequence of a driving approach of the liquid crystal display device according to the third embodiment of the invention.

DETAILED DESCRIPTION

[0048] At least one dummy gate line may be added in the present invention, one end of the last gate line is connected with the last gate line trigger circuit; one end of each of remaining gate lines is connected with a gate line trigger circuit corresponding to said each of remaining gate lines and the other end is connected with the succeeding gate line trigger circuit; and the first common line trigger circuit is connected with the dummy gate line, and each of remaining common line trigger circuits is connected with one or more preceding gate line trigger circuits. In this way, the gate line trigger circuit may provide a gate voltage to its corresponding gate line and trigger the gate line trigger circuit corresponding to the succeeding gate line; meanwhile, the first common line trigger circuit is triggered by a signal transmitted via the dummy gate line, and each of remaining common line trigger circuits is triggered by one or more preceding gate line trigger circuits. That is, the common line trigger circuits are not triggered by the gate voltage of the same gate line, but triggered before the arrival of the gate voltage of this gate line. Therefore, the common voltage of the common line is applied to the common electrode before the gate voltage is applied, thereby ensuring that the charged capacitor is maintained in a charging state once the voltage of the pixel electrode is applied to the capacitor, such that the impact of the latency of

the common voltage on the charging time is alleviated, and the display effect is improved.

[0049] In order for better understanding of the objects, solutions and advantages of the invention, the invention is further detailed in conjunction with FIGS. 3-8.

First Embodiment

[0050] FIG. 3 is a schematic view showing a liquid crystal display device of the first embodiment of the invention. As shown in FIG. 3, the liquid crystal display device 200 includes a liquid crystal panel 201, a plurality of data lines 202 formed on the liquid crystal panel 201, a plurality of gate lines 203, a plurality of common lines 204, a plurality of gate line trigger circuits (including a trigger circuit Gate 1, a trigger circuit Gate 2, a trigger circuit Gate 3, a trigger circuit Gate 4 . . . a trigger circuit Gate m-1, and a trigger circuit Gate m), a plurality of common line trigger circuits (including a trigger circuit COM 1, a trigger circuit COM 2, a trigger circuit COM 3, a trigger circuit COM 4 . . . a trigger circuit COM m-1, and a trigger circuit COM m), and a dummy gate line 207.

[0051] As shown in FIG. 3, a first direction is defined by the vertical direction and a second direction is defined by the horizontal direction. The data lines 202 extend in the first direction, the gate lines 203 extend in the second direction and intersect with the data lines 202, and the dummy gate line 207 is in parallel with the gate lines 203. The liquid crystal panel 201 is provided with TFTs, each of which is configured to drive a liquid crystal element C_{LC} and a storage capacitor C_{ST} located at the intersection. The regions defined by the plurality of data lines 202 and the gate lines 203 are used as display regions. When a drive voltage is provided to a pixel electrode 208 via the data line 202 and a common voltage is provided to a common electrode 209 via the common line 204, an electric field is generated on the liquid crystal element C_{LC} to change the arrangement of the liquid crystal molecules, so as to control the light transmittance of the liquid crystal element C_{LC} .

[0052] One dummy gate line, m common lines, m gate lines, m common line trigger circuits, and m gate line trigger circuits are shown in FIG. 3, wherein, m is an even number. Both gate line trigger circuits connected with even number gate lines and common line trigger circuits connected with odd number common lines are located on one side (e.g. the left side) of the display regions, and both gate line trigger circuits connected with odd number gate lines and common line trigger circuits connected with even number common lines are located on the other side (e.g. the right side) of the display regions.

[0053] Additionally, this embodiment is applicable to a liquid crystal display device in which a liquid crystal driving electric field is in parallel with the liquid crystal panel 201. Each common line trigger circuit is connected with a first common voltage terminal 210 and a second common voltage terminal 211, which are used for providing a first common voltage V_{COMH} and a second common voltage V_{COML} to the common lines. For a liquid crystal display device adopting a driving approach with the inverted common voltages, the first common voltage and the second common voltage have the same magnitude but different polarities. For example, the first common voltage V_{COMH} is +5V and the second common voltage V_{COML} is -5V. Of course, in order to reduce power consumption, the first common voltage and the second common voltage may have different magnitudes, for example, the

first common voltage V_{COMH} is +5V and the second common voltage V_{COML} is 0V, which is not limited in the invention.

[0054] As shown in FIG. 3, one end of the dummy gate line 207 is connected to the first gate line trigger circuit, i.e. a trigger circuit Gate 1. One end of the trigger circuit Gate 1 which is connected to the first gate line is used to provide a gate voltage to the first gate line. Meanwhile, the other end of the dummy gate line 207 is connected to the first common line trigger circuit, i.e. a trigger circuit COM 1. The COM 1 trigger circuit is connected to the first common line to selectively provide a common electrode voltage to the first common line. The signal of the dummy gate line 207 is provided by the last gate line, and the first common line trigger circuit (i.e. the trigger circuit COM 1) is triggered by the gate voltage of the last gate line. The other end of the first gate line is connected to the second gate line trigger circuit, i.e. a trigger circuit Gate 2, and one end of the trigger circuit Gate 2 which is connected to the second gate line is used to selectively provide a gate voltage to the second gate line. Meanwhile, the first gate line trigger circuit is connected to the second common line trigger circuit, i.e. a trigger circuit COM 2, which is connected to the second common line to selectively provide a common electrode voltage to the second common line.

[0055] Likewise, the xth gate line trigger circuit is connected to one end of the xth gate line to selectively provide a gate voltage to the xth gate line, and the other end of the xth gate line is connected to the (x+1)th gate line trigger circuit. The (x+1)th gate line trigger circuit is meanwhile connected to the (x+1)th gate line to selectively provide a gate voltage to the (x+1)th gate line. Meanwhile, the xth gate line trigger circuit is connected to the (x+1)th common line trigger circuit, and the (x+1)th common line trigger circuit is connected to the (x+1)th common line to selectively provide a common voltage to the (x+1)th common line.

[0056] One end of the last gate line is connected to the last gate line trigger circuit, i.e. the trigger circuit Gate m, the other end of the last gate line is connected to the dummy gate line 207, to trigger the first gate line trigger circuit (i.e. the trigger circuit Gate 1) and the first common line trigger circuit (i.e. the trigger circuit COM 1).

[0057] FIG. 4 is diagram showing a time sequence of a driving approach of the liquid crystal display device according to the first embodiment of the invention. In the present embodiment, the liquid crystal display device is driven in the driving approach with the inverted common voltages. Particularly, FIG. 4 is a diagram showing a driving time sequence of the liquid crystal display device of the present embodiment under the driving approach with the inverted common voltages. The driving approach of the liquid crystal display device of the present embodiment is described in detail in conjunction with FIGS. 3 and 4.

[0058] After the signal of the dummy gate line 207 is transferred to the first gate line trigger circuit (i.e. the trigger circuit Gate 1), the trigger circuit Gate 1 provides a gate voltage to the first gate line. Meanwhile, the signal of the dummy gate line 207 is also transferred to the first common line trigger circuit (i.e. the trigger circuit COM 1). After being triggered, the trigger circuit COM 1 selectively provides a common voltage to the first common line. That is, the trigger circuit Gate 1 and the trigger circuit COM 1 are triggered simultaneously without any trigger latency. When the gate voltage begins to be transferred along the first gate line, the common voltage is transferred along the first common line.

[0059] Next, the gate voltage begins to be transferred along the first gate line from left to right, and arrives at the rightmost end of the first gate line after latency t1. The other end of the first gate line is connected to the second gate line trigger circuit, i.e. the trigger circuit Gate 2. After being triggered, the trigger circuit Gate 2 provides a gate voltage to the second gate line. After being triggered, the trigger circuit Gate 1 also sends a trigger signal to the trigger circuit COM 2. After being triggered, the trigger circuit COM 2 in turn selectively provides a common voltage to the second common line. That is, after the trigger circuit COM 2 is triggered, the trigger circuit Gate 2 is not triggered until the latency t1 elapses. That is, the trigger circuit COM 2 is triggered before the trigger circuit Gate 2 is triggered.

[0060] Likewise, after being triggered by the (x-1)th gate line, the trigger circuit Gate x selectively provides a gate voltage to the xth gate line, and the gate voltage is transferred along the xth gate line and arrives at the other end of the xth gate line after the latency t1, to subsequently trigger the trigger circuit Gate x+1. Meanwhile, when the gate voltage begins to be transferred along the xth gate line, the trigger circuit Gate x triggers the trigger circuit Gate x+1 and the trigger circuit COM x+1 begins to selectively provide a common voltage to the (x+1)th common line. That is, after the trigger circuit COM x+1 is triggered, the trigger circuit Gate x+1 is not triggered until the latency t1 elapses. That is, the trigger circuit COM x+1 is triggered before the trigger circuit Gate x+1 is triggered.

[0061] After the last gate line trigger circuit (i.e. the trigger circuit Gate m) is triggered, the trigger circuit Gate m also sends a trigger signal to the dummy gate line 207 as the trigger signal for both the trigger circuit Gate 1 and the trigger circuit COM 1. Subsequently, the line-by-line triggering for the next period begins.

Second Embodiment

[0062] FIG. 5 is schematic view of a liquid crystal display device of the second embodiment of the invention. As shown in FIG. 5, the liquid crystal display device 300 includes a liquid crystal panel 301, a plurality of data lines 302 formed on the liquid crystal panel 301, a plurality of gate lines 303, a plurality of common lines 304, a plurality of gate line trigger circuits, a plurality of common line trigger circuits, and a plurality of dummy gate lines 307. In this embodiment, there are 5 dummy gate lines, i.e. dummy gate lines 307-1, 307-2, 307-3, 307-4, and 307-5; there are m gate lines, m common lines, m+4 gate line trigger circuits (i.e. a trigger circuit Gate -3, a trigger circuit Gate -2, a trigger circuit Gate -1, a trigger circuit Gate 0, a trigger circuit Gate 1, a trigger circuit Gate 2, a trigger circuit Gate 3, a trigger circuit Gate 4 . . . and a trigger circuit Gate m), and m common line control circuits (including a trigger circuit COM 1, a trigger circuit COM 2, a trigger circuit COM 3, a trigger circuit COM 4, a trigger circuit COM 5 . . . and a trigger circuit COM m).

[0063] Additionally, TFTs are provided on the liquid crystal panel 101 to drive liquid crystal elements CLC and storage capacitors CST located at the intersections. When a drive voltage is provided to a pixel electrode 308 via the data line 302 and a common voltage is provided to the common electrode 309 via the common line 304, an electric field is generated on the liquid crystal element CLC to change the arrangement of the liquid crystal molecules, so as to control the light transmittance of the liquid crystal element CLC.

[0064] As shown in FIG. 5, one end of the first dummy gate line 307-1 is connected to the first gate line trigger circuit, i.e. the trigger circuit Gate -3, which is connected to one end of the second dummy gate line 307-2. Meanwhile, the other end of the first dummy gate line 307-1 is connected to the first common line trigger circuit, i.e. the trigger circuit COM 1, which is connected to the first common line. The other end of the second dummy gate line 307-2 is connected to the second gate line trigger circuit, i.e. the trigger circuit Gate -2, which is also connected to one end of the third dummy gate line 307-3. The other end of the third dummy gate line 307-3 is connected to the third gate line trigger circuit, i.e. the trigger circuit Gate -1. In the same way, one end of each gate line or dummy gate line is connected to a gate line trigger circuit, and the other end of the gate line or dummy gate line is connected to the next gate line trigger circuit.

[0065] As shown in FIG. 5, the first gate line trigger circuit (i.e. the trigger circuit Gate -3) is also connected to the second common line trigger circuit (i.e. the trigger circuit COM 2), and the second gate line trigger circuit (i.e. the trigger circuit Gate -2) is also connected to the third common line trigger circuit, i.e. the trigger circuit COM 3.

[0066] Likewise, each of the remaining common line trigger circuits is connected with one or more preceding gate line trigger circuits. In this embodiment, each of the remaining common line trigger circuits is connected with one preceding gate line trigger circuit.

[0067] One end of the last gate line is connected with the last gate line trigger circuit (i.e. the trigger circuit Gate m), and the other end of the last gate line is connected with the first dummy gate line 307-1 to trigger the first gate line trigger circuit (i.e. the trigger circuit Gate -3) and the first common line trigger circuit (i.e. the trigger circuit COM 1).

[0068] In this embodiment, dummy gate lines 307 are formed above the display regions. In another embodiment, the dummy gate lines 307 are formed below the display regions.

[0069] FIG. 6 is a diagram showing a time sequence of a driving approach of the liquid crystal display device according to the second embodiment of the invention. In this embodiment, the liquid crystal display device is driven in the driving approach with the inverted common voltages. Particularly, FIG. 6 is a diagram showing a time sequence of the driving approach of the liquid crystal display device of the embodiment under the driving approach with the inverted common voltages.

[0070] The driving approach of the liquid crystal display device of the second embodiment is described in detail in conjunction with FIGS. 5 and 6.

[0071] After the signal of the first dummy gate line 307-1 is transferred to the first gate line trigger circuit (i.e. the trigger circuit Gate -3), the gate voltage of the trigger circuit Gate -3 triggers the second gate line trigger circuit (i.e. the trigger circuit Gate -2) through the second dummy gate line 307-2. In the same way, the gate voltage of the trigger circuit Gate 0 triggers the fifth gate line trigger circuit (i.e. the trigger circuit Gate 1) through the fifth dummy gate line 307-5. After being triggered, the trigger circuit Gate 1 provides a gate voltage to the first gate line, and the gate voltage begins to be transferred along the first gate line from left to right and arrives at the rightmost end of the first gate line after latency t1. The other end of the first gate line is connected to the trigger circuit Gate 2, which is triggered after certain charging time t2 to provide a gate voltage to the second gate line. That is, the gate line

trigger circuit (i.e. the trigger circuit Gate 1) connected with the first gate line will not be triggered until the gate voltage is transferred through 4 dummy gate lines, that is, the gate line trigger circuit connected with the first gate line will not be triggered until four multiples of the latency t1 and the charging time t2 elapses after the trigger circuit Gate -3 is triggered.

[0072] The signal of the first dummy gate line 307-1 triggers the first gate line trigger circuit (i.e. the trigger circuit Gate -3) and the first common line trigger circuit (i.e. the trigger circuit COM 1) simultaneously. Similarly, the Gate -3 trigger circuit, when providing the gate voltage to the second dummy gate line 307-2, simultaneously provides a trigger signal to the second common line trigger circuit (i.e. the trigger circuit COM 2), and the trigger circuit COM 2 is triggered to provide a common voltage to the second common line. That is, the common line trigger circuit (i.e. the trigger circuit COM 1) connected with the first common line is triggered simultaneously while the trigger circuit Gate -3 is triggered.

[0073] In the same way, after the trigger circuit Gate x is triggered by the (x-1)th gate line, the trigger circuit Gate x selectively provides a gate voltage to the xth gate line, and the gate voltage begins to be transferred along the xth gate line. The trigger circuit COM y is connected to and triggered by the trigger circuit Gate x. However, the trigger circuit COM y is triggered by the trigger signal of the trigger circuit Gate x that is delayed by n multiples of the latency. That is, the trigger circuit COM y is triggered earlier than the trigger circuit Gate y by the sum of n multiples of the latency t1 and the charging time t2.

[0074] That is, the time when the common voltage of each common line is provided is earlier than the time when the gate voltage of the gate line corresponding to the common line by time of $n \cdot (t1 + t2)$. In this embodiment, $n=5$. Therefore, the time when the common voltage of each common line is provided is earlier than the time when the gate voltage of the gate line corresponding to the common line by time of $5 \cdot (t1 + t2)$.

[0075] In comparison with the first embodiment, the time when the common voltage of each common line is provided is much advanced with respect to the time when the gate voltage of the gate line is provided in the second embodiment, so as to ensure that the voltage of the common electrode 309 is always maintained at the common voltage during the time when the TFT is turned on. However, the time amount, by which the time when the common voltage is provided is earlier than the time when the gate voltage is provided, depends on the number of the dummy gate lines. That is, the more dummy gate lines cause the common line trigger circuit may possibly be triggered much earlier. However, the increased dummy gate lines occupy more space on the liquid crystal panel, and the area of the effective display regions is decreased accordingly. Therefore, the number of the dummy gate lines shall be selected to strike a balance between reducing the impact of the latency to the charging time and maintaining the area of the effective display regions as large as possible. Preferably, the number of the dummy gate lines is equal to or less than 5.

Third Embodiment

[0076] FIG. 7 is a schematic view showing a liquid crystal display device corresponding to the third embodiment of the invention. As shown in FIG. 7, the liquid crystal display device 400 includes a liquid crystal panel 401, a plurality of data lines 402 formed on the liquid crystal panel 401, a

plurality of gate lines **403**, a plurality of common lines **404**, a plurality of gate line trigger circuits (including a trigger circuit Gate **1**, a trigger circuit Gate **2**, a trigger circuit Gate **3**, a trigger circuit Gate **4** . . . a trigger circuit Gate $m-1$, and a trigger circuit Gate m), a plurality of common line trigger circuits (including a trigger circuit COM **1**, a trigger circuit COM **2**, a trigger circuit COM **3**, a trigger circuit COM **4** . . . a trigger circuit COM $m-1$, and a trigger circuit COM m), a dummy gate line **407** and a periodic pulse trigger circuit **412**.

[0077] As shown in FIG. 7, the data lines **402** extend in the first direction, the gate lines **403** extend in the second direction and intersect with the data lines **402**, and the dummy gate line **407** is in parallel with the gate lines **403**. TFTs are provided on the liquid crystal panel **401** to drive liquid crystal elements C_{LC} and storage capacitors C_{ST} located at the intersections. When a drive voltage is provided to a pixel electrode **408** via the data line **402** and a common voltage is provided to a common electrode **409** via the common line **404**, an electric field is generated on the liquid crystal element C_{LC} to change the arrangement of the liquid crystal molecules, so as to control the light transmittance of the liquid crystal element C_{LC} .

[0078] As shown in FIG. 7, the periodic pulse trigger circuit **412** is connected to one end of the dummy gate line **407**, and the other end of the dummy gate line **407** is connected to the first common line trigger circuit, i.e. the trigger circuit COM **1**, which is connected to the first common line to selectively provide a common electrode voltage to the first common line. Moreover, the periodic pulse trigger circuit **412** is connected to the first gate line trigger circuit, i.e. the trigger circuit Gate **1**, which is connected to one end of the first gate line to provide a gate voltage to the first gate line. The periodic pulse trigger circuit **412** triggers both the first gate line trigger circuit (i.e. the trigger circuit Gate **1**) and the first common line trigger circuit (i.e. the trigger circuit COM **1**). The other end of the first gate line is connected to the second gate line trigger circuit, i.e. the trigger circuit Gate **2**, which is connected to one end of the second gate line to selectively provide a gate voltage to the second gate line. Meanwhile, the first gate line trigger circuit is connected to the second common line trigger circuit, i.e. the trigger circuit COM **2**, which is connected to the second common line to selectively provide a common electrode voltage to the second common line.

[0079] In the same way, the x th gate line trigger circuit is connected to one end of the x th gate line to selectively provide a gate voltage to the x th gate line, while the other end of the x th gate line is connected to the $(x+1)$ th gate line trigger circuit, which is meanwhile connected to the $(x+1)$ th gate line to selectively provide a gate voltage to the $(x+1)$ th gate line. Meanwhile, the x th gate line trigger circuit is connected to the $(x+1)$ th common line trigger circuit, and the $(x+1)$ th common line trigger circuit is connected to the $(x+1)$ th common line to selectively provide a common voltage to the $(x+1)$ th common line.

[0080] Finally, one end of the last gate line is connected to the last gate line trigger circuit, i.e. the trigger circuit Gate m .

[0081] In comparison with the first and second embodiments, both the first gate line trigger circuit and the first common line trigger circuit are triggered by the periodic pulse trigger circuit **412** in the present embodiment. The time for scanning all the gate lines and the common lines for one time is equal to one period of the periodic pulse trigger circuit **412**.

[0082] FIG. 8 is a diagram showing a time sequence of a driving approach of the liquid crystal display device according to the third embodiment of the invention. The driving approach of the liquid crystal display device of this embodiment will be described in detail in conjunction with FIGS. 7 and 8.

[0083] After the signal of the periodic pulse trigger circuit **412** triggers the first gate line trigger circuit, i.e. the trigger circuit Gate **1**, the trigger circuit Gate **1** in turn provides a gate voltage to the first gate line. Moreover, the signal of the periodic pulse trigger circuit **412** is transferred to the first common line trigger circuit (i.e. the trigger circuit COM **1**) through the dummy gate line **407**, and the triggered trigger circuit COM **1** selectively provides a common electrode voltage to the first common line.

[0084] Next, the gate voltage begins to be transferred along the first gate line from left to right, and arrives at the rightmost end of the first gate line. The other end of the first gate line is connected to the second gate line trigger circuit, i.e. the trigger circuit Gate **2**, which provides a gate voltage to the second gate line after being triggered. After being triggered, the trigger circuit Gate **1** also sends a trigger signal to the trigger circuit COM **2**, and the triggered trigger circuit COM **2** in turn selectively provides a common voltage to the second common line.

[0085] In the same way, after being triggered by the $(x-1)$ th gate line, the trigger circuit Gate x selectively provides a gate voltage to the x th gate line. The gate voltage is transferred along the x th gate line, and is transferred to the other end of the x th gate line, and then triggers the trigger circuit Gate $x+1$. Meanwhile, when the gate voltage begins to be transferred along the x th gate line, the trigger circuit Gate x triggers the trigger circuit COM $x+1$, which in turn begins to selectively provide a common voltage to the $(x+1)$ th common line.

[0086] At last, after being triggered, the last gate line trigger circuit (i.e. the trigger circuit Gate m) provides a gate voltage to the last gate line. Moreover, after being triggered, the last common line trigger circuit (i.e. the trigger circuit COM m) provides a common voltage to the last common line. One period of the periodic pulse trigger circuit **412** is finished once the scanning of both the last gate line and the last common line is completed.

[0087] Subsequently, the periodic pulse trigger circuit **412** proceeds to the next period, and the line-by-line triggering for the next period begins.

[0088] In this embodiment, the periodic pulse trigger circuit **412** is used for the triggering of both the first gate line trigger circuit and the first common line trigger circuit. Therefore, in comparison with the first and second embodiments, the pulse trigger circuit is used in the present embodiment for better control on products.

[0089] As can be seen, a plurality of dummy gate lines are introduced in the present invention, a gate line trigger circuit is triggered by a dummy gate line or a gate line, and each gate line trigger circuit further triggers a certain succeeding common line trigger circuit. That is, the common line trigger circuit is not triggered by the gate voltage of the same gate line, but is triggered before the arrival of the gate voltage of the gate line. Therefore, the common voltage of the common line may be applied to the common line before the gate voltage is applied, thus ensuring that the charged capacitor is always maintained at a charged state after the pixel electrode

voltage is applied, such that the impact of the latency of the common voltage to the charging time is reduced or eliminated.

[0090] It should be noted that, embodiments are described in a step-up way in the description, that is, differences of each embodiment from the previous embodiment(s) are described, but reference is made to the previous embodiment(s) for any identical or similar parts of said each embodiment with respect to the previous embodiment(s).

[0091] Obviously, various modifications and variations may be made by those skilled in the art without departing from the principle and scope of the invention. Thus, all modifications and variations are intended to be included in this invention if they fall within the scope of the claims of the invention and their equivalents.

1. A liquid crystal display device, comprising:
 - a plurality of data lines extending in a first direction;
 - a plurality of gate lines extending in a second direction and intersecting with the plurality of data lines;
 - a plurality of common lines in parallel with the plurality of gate lines and intersecting with the plurality of data lines;
 - a plurality of gate line trigger circuits for providing gate voltages to corresponding gate lines; and
 - a plurality of common line trigger circuits for providing common voltages to the plurality of common lines;
 wherein one end of each of the gate lines is connected with a corresponding gate line trigger circuit, and the other end of said each of the gate lines is connected with a succeeding gate line trigger circuit, and each of the common line trigger circuits is connected with N preceding gate line trigger circuits, wherein the N is a positive integer and is greater than or equal to 1.
2. The liquid crystal display device of claim 1, further comprising at least one dummy gate line in parallel with the gate lines;
 - wherein, the plurality of gate line trigger circuits are further configured to provide gate voltages to the at least one dummy gate line;
 - one end of the last gate line is connected with the last gate line trigger circuit; and
 - the first common line trigger circuit is connected with one dummy gate line.
3. The liquid crystal display device of claim 2, wherein, pixel regions defined by the plurality of data lines and the plurality of gate lines are display regions.
4. The liquid crystal display device of claim 3, wherein, the dummy gate line is formed above or below the display regions.
5. The liquid crystal display device of claim 3, wherein, the gate lines comprise even number gate lines and odd number gate lines, and the common lines comprise even number common lines and odd number common lines.
6. The liquid crystal display device of claim 5, wherein, both the gate line trigger circuits connected with the even number gate lines and the common line trigger circuits connected with the odd number common lines are located on one side of the display regions.
7. The liquid crystal display device of claim 5, wherein, both the gate line trigger circuits connected with the odd number gate lines and the common line trigger circuits connected with the even number common lines are located on the other side of the display regions.

8. The liquid crystal display device of claim 2, wherein, if the at least one dummy gate line consists of one dummy gate line, the other end of the last gate line is connected with the dummy gate line.

9. The liquid crystal display device of claim 2, wherein, if the at least one dummy gate line consists of a plurality of dummy gate lines, the other end of the last gate line is connected with the first dummy gate line, and one end of each of remaining dummy gate lines is connected with a gate line trigger circuit corresponding to said each of remaining dummy gate lines, and the other end of said each of the remaining dummy gate lines is connected with the succeeding gate line trigger circuit.

10. The liquid crystal display device of claim 2, wherein, if the at least one dummy gate line consists of one dummy gate line, said one dummy gate line is connected with a periodic pulse trigger circuit.

11. The liquid crystal display device of claim 2, wherein, if the at least one dummy gate line consists of a plurality of dummy gate lines, the first dummy gate line is connected with a periodic pulse trigger circuit, one end of each of remaining dummy gate lines is connected with a gate line trigger circuit corresponding to said each of remaining dummy gate lines and the other end of said each of the remaining dummy gate lines is connected with a succeeding gate line trigger circuit.

12. The liquid crystal display device of claim 1, further comprising a first common voltage terminal and a second common voltage terminal, which are connected with the common line trigger circuit and used for providing the common lines with a first common voltage and a second common voltage.

13. The liquid crystal display device of claim 12, wherein, the first common voltage and the second common voltage have the same magnitude and different polarities.

14. The liquid crystal display device of claim 12, wherein, the magnitude of the first common voltage or the second common voltage is zero.

15. A driving method of the liquid crystal display device of claim 2, comprising:

- providing, by a gate line trigger circuit, a gate voltage to a gate line corresponding to the gate line trigger circuit, and triggering a next gate line trigger circuit; and
- triggering the first common line trigger circuit by a signal transmitted by a dummy gate line, wherein each of remaining common line trigger circuits is triggered by one or more preceding gate line trigger circuits.

16. The driving method of the liquid crystal display device of claim 15, wherein, if only one dummy gate line is present, the other end of the last gate line is connected with the dummy gate line, and a gate voltage of the last gate line is used to trigger the first common line trigger circuit.

17. The driving method of the liquid crystal display device of claim 15, wherein, if a plurality of the dummy gate lines are present, the other end of the last gate line is connected with the first dummy gate line, and a gate voltage of the last gate line is used to trigger the first common line trigger circuit; and one end of each of remaining dummy gate lines is connected with a gate line trigger circuit corresponding to said each of remaining dummy gate lines, and the other end of said each of the remaining dummy gate lines is connected with a succeeding gate line trigger circuit, so that the succeeding gate line trigger circuit is triggered by its preceding gate line trigger circuit.

18. The driving method of the liquid crystal display device of claim **15**, wherein, if only one dummy gate line is present, the dummy gate line is connected with a periodic pulse trigger circuit, which is used to trigger the first common line trigger circuit.

19. The driving method of the liquid crystal display device of claim **15**, wherein, if a plurality of the dummy gate lines are present, the first dummy gate line is connected with a periodic pulse trigger circuit, which is used to trigger the first common line trigger circuit; and one end of each of remaining dummy gate lines is connected with a gate line trigger circuit corresponding to said each of remaining dummy gate lines, and the other end of said each of the remaining dummy gate lines is connected with a succeeding gate line trigger circuit, so that the succeeding gate line trigger circuit is triggered by its preceding gate line trigger circuit.

20. The driving method of the liquid crystal display device of claim **15**, further comprising a first common voltage terminal and a second common voltage terminal, which are connected with the common line trigger circuit and used for selectively providing the common lines with a first common voltage and a second common voltage.

* * * * *

本发明公开了一种液晶显示装置及其驱动方法,该装置包括多条数据线;多条栅极线;多条公共线;至少一条伪栅极线;多个栅极线触发电路;多个公共线触发电路;其中,最后一条栅极线的一端与最后一条栅极线触发电路连接;每条剩余栅极线的一端与对应于所述每条剩余栅极线的栅极线触发电路连接,所述每条剩余栅极线的另一端与后续栅极线触发电路连接;第一公共线触发电路与一条虚拟栅极线连接,其余每条公共线触发电路与一条或多条在线栅极线触发电路连接。利用本发明的液晶显示装置,有效地减少了充电时间的延迟。

