

(19) World Intellectual Property Organization
International Bureau



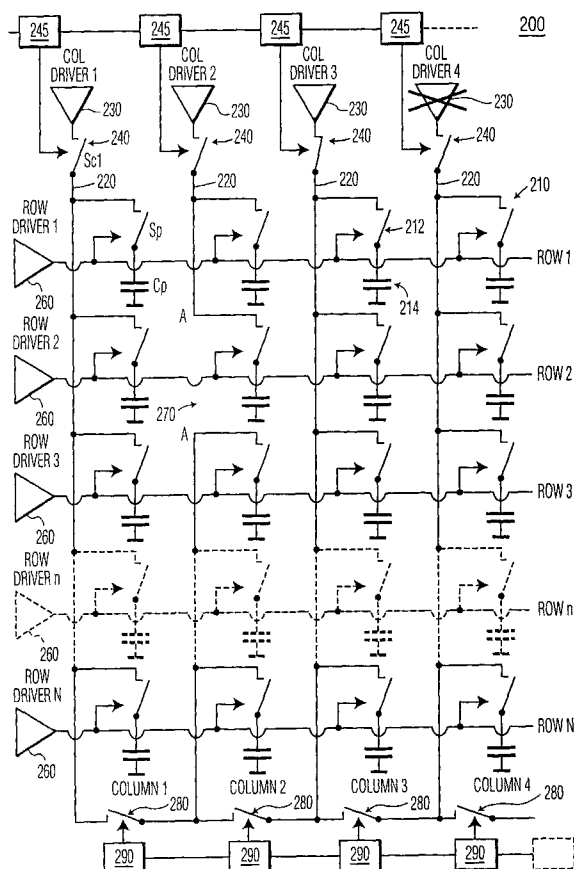
(43) International Publication Date
20 February 2003 (20.02.2003)

PCT

(10) International Publication Number
WO 03/014814 A1

- (51) International Patent Classification⁷: **G02F 1/13** (74) Agent: RAAP, Adriaan, Y.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/IB02/02989
- (22) International Filing Date: 11 July 2002 (11.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/920,635 3 August 2001 (03.08.2001) US
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors: JANSSEN, Peter, J.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). ALBU, Lucian, R.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (*national*): CN, JP, KR.
- (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LIQUID CRYSTAL DISPLAY WITH REDUNDANT COLUMN DRIVE CIRCUITRY



(57) Abstract: A liquid crystal display (LCD) device includes means for selectively connecting at least two data lines together to provide image data to pixels of a defective column due to either a defective column line (e.g., a line break) or a defective column driver. The means preferably includes a plurality of switches for connecting the two data lines together. The switches may either be cross-column switches extending between the two data lines, or may be column test switches used in a column calibration procedure and connecting the two columns each to a common column test line. Registers are preferably also provided for each switch to store therein a data value indicating whether the switch should be opened or closed. The registers may comprise a shift register.

WO 03/014814 A1

LIQUID CRYSTAL DISPLAY WITH REDUNDANT COLUMN DRIVE CIRCUITRY

BACKGROUND OF THE INVENTION

Field of the Invention

This invention pertains to the field of image display devices, and more particularly to liquid crystal display devices, and to drive circuitry for such devices.

Description of the Related Art

Image display devices such as liquid crystal display (LCD) devices are widely known. With reference to the following description, familiarity with conventional features of such devices will be assumed, so that only features bearing on the present invention will be described.

FIG. 1 shows relevant portions of an exemplary liquid crystal display (LCD) device 100.

The LCD device 100 comprises in relevant part: a plurality of pixels 110; a plurality of column (data) lines 120 connected to the plurality of pixels 110; a plurality of column (data) drivers 130 for supplying data to pixels 110 via the column lines 120; a plurality of column driver switches 140; a plurality of row (scanning) lines 150 connected to rows of pixels 110; and a plurality of row drivers 160 connected to the row lines 120 for selecting a row of pixels 110 to which data from the column drivers 130 is to be applied.

Typically, each pixel 110 includes a pixel switching device 112 and a storage (pixel capacitor) 114. The pixel switching device 112, which may be a thin film transistor (TFT), is responsive to a scanning signal on the connected row line 150 to switch a data signal applied via the connected column line 120 into the storage device 114.

The LCD device 100 may be a liquid crystal on silicon (LCOS) type LCD device. In that case, the column (data) drivers 130, column driver switches 140, and/or row (scanning) drivers 160 may be integrated onto a same silicon substrate as the liquid crystal pixels 110.

Some problems with the prior art LCD device 100 will now be explained.

Occasionally, a break may occur in the fabrication of one or more column lines 120. For example, in Fig. 1 a break or line defect 170 is indicated between the points A

and A' in the column line 120 of column 2. Because of the line defect 170, it is not possible to provide a data signal to any of the pixels 110 of column 2 from row numbers 3 to N.

Accordingly, all pixels 110 of column 2 from row number 3 to row number N fail, and those pixels 110 of the display 100 will be permanently white or black, depending upon whether

the device operates in a normally white or normally black mode.

Also, a column driver 130 for a particular column may be defective and fail to provide a data signal to the column line 120. For example, in Fig. 1 a failed column driver 130 is indicated for column 4. In that case, it is not possible to provide a data signal to any of the pixels 110 of column 4. Accordingly, all pixels 110 of column 4 fail, and the entire column 4 of the display 100 will be permanently white or black, depending upon whether the device operates in a normally white or normally black mode.

Accordingly, it would be desirable to provide an image display system that can operate despite one or more column line defects, or breaks, and/or failed column drivers. Other and further objects and advantages will appear hereinafter.

SUMMARY OF THE INVENTION

Accordingly, in one aspect, an image display device includes means for selectively connecting at least two data lines together to provide image data to pixels of a defective column due to either a defective column line (e.g., a line break) or a defective column driver. The means preferably includes a plurality of switches for connecting the two data lines together.

In another aspect, registers are preferably also provided for storing therein a data value indicating whether a switch should be opened or closed to connect two or more column lines together. The registers may comprise a shift register.

In yet another aspect, defective columns may be repaired by selectively closing column test switches used in a display calibration procedure.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a prior art liquid crystal display (LCD) device;

FIG. 2 shows a first embodiment of an image display device capable of operating with a column line or column driver defect;

FIG. 3 shows a second embodiment of an image display device capable of operating with a column line or column driver defect;

FIG. 4 shows a third embodiment of an image display device capable of operating with a column line or column driver defect; and

FIG. 5 shows a fourth embodiment of an image display device capable of operating with a column line or column driver defect.

5

DETAILED DESCRIPTION

FIG. 2 shows a first embodiment of an image display device in accordance with one or more aspects of the invention. The first embodiment is described with respect to a liquid crystal display (LCD) device 200. For clarity and simplicity, those portions of the LCD device 200 relating to the present invention are illustrated.

The LCD device 200 comprises in relevant part: a plurality of pixels 210; a plurality (M) of column (data) lines 220 connected to the plurality of pixels 210; a plurality of column (data) drivers 230 for supplying data to the pixels 210 via the column lines 220; a plurality of column driver switches 240; a plurality (M) of column driver switch registers 245; a plurality (N) of row (scanning) lines 250 connected to N rows of pixels 210; a plurality of row drivers 260 connected to the row lines 250 for selecting a row of pixels 210 to which data from the column drivers 230 is to be applied; a plurality (M-1) of cross-column switches 280 each extending between two adjacent column lines 220; and a plurality (M-1) of cross-column switch registers 290 each having an output connected to a control terminal of a corresponding one of the cross-column switches 280. Beneficially, the column driver switch registers 245 and/or the cross-column switch registers 290 may be configured as shift registers.

Typically, each pixel 210 includes a pixel switching device 212, having first and second terminals and a control terminal, and a storage device (pixel capacitor) 214 connected to the first terminal of the pixel switching device 212. However, a two terminal switch such as a diode may be used. The second terminal of the pixel switching device 212 is connected to one of the column lines 220. The pixel switching device 212, which may be a thin film transistor (TFT), is responsive to a scanning signal on the connected row line 250 to selectively connect the column line 220 to the storage device 214 and thereby to store a data signal applied via the column line 220 into the storage device 214.

The LCD device 200 may be a liquid crystal on silicon (LCOS) type LCD device. In that case, the column (data) drivers 230 and/or row (scanning) drivers 260 may be integrated onto a same silicon substrate as the liquid crystal pixels 210. Also, the column

driver switches 240, the column driver switch registers 245, the cross-column switches 280 and/or the cross-column switch registers 290 may be integrated onto the same substrate.

The operation of various pertinent elements of the first preferred embodiment LCD device 200 in the case of a defective column will now be explained.

5 In Fig. 2, a break or line defect 270 is indicated between the points A and A' in the column line 220 of column 2. Because of the line defect 270, it is not possible to provide a data signal from the column driver 230 for column 2 to any of the pixels 210 for row numbers 3 to N. Accordingly, during a test of the LCD device 200, it will be determined that those pixels 210 of the LCD device 200 are permanently white or black, depending upon
10 whether the device operates in a normally white or normally black mode.

In that case, a data value (e.g., "1" or "0") is stored into a cross-column switch register 290 connected to the control terminal of the cross-column switch 280 between columns 2 and 3, such that a control signal output by the cross-column switch register 290 causes the cross-column switch 280 between columns 2 and 3 to close. In other words, the
15 data value stored in each cross-column switch register 290 indicates whether the corresponding cross-column switch 280 should be opened or closed. With the cross-column switch 280 between columns 2 and 3 closed, the pixels 210 for rows 3 to N of column 2 are connected to the column line 220 for column 3. Accordingly, in response to a scanning (gate) signal of the corresponding row (scanning) line 250, the pixels 210 for rows 3 to N of
20 column 2 are driven by the data signal of column 3 to store and display image data.

Also, a column driver 230 for a particular column may be defective and fail to provide a data signal to a column line 220. For example, in Fig. 2 a failed column driver 230 is indicated for column 4. Because of the defective column driver 230, it is not possible to provide a desired data signal from the column driver 230 for column 4 to any of the pixels
25 210 of column 4. Accordingly, during a test of the LCD device 200, it will be determined that the pixels 210 of column 4 of the LCD device 200 are permanently white or black, depending upon whether the device operates in a normally white or normally black mode.

In that case, a data value (e.g., "1" or "0") is stored into a cross-column switch register 290 connected to the control terminal of the cross-column switch 280 between
30 columns 3 and 4 such that a control signal output by the cross-column switch register 290 causes the cross-column switch 280 between columns 3 and 4 to close. Also, a data value is stored into a column driver switch register 245 for column 4 such that a control signal output by the column driver switch register 245 for column 4 connected to the control terminal of column driver switch 240 for column 4 causes the column driver switch 240 for column 4 to

open. In other words, the data value stored in each column driver switch register 245 indicates whether the corresponding column driver switch 240 should be opened or closed. With the cross-column switch 280 between columns 3 and 4 closed, and the column driver switch 240 for column 4 opened, the pixels 210 of column 4 are connected to the column line 220 for column 3. Accordingly, in response to a scanning (gate) signal of the corresponding row (scanning) line 250, the pixels 210 for column 4 are driven by the data signal of column 3 to store and display image data.

It should be understood that, although in the above example with the line defect 270 the pixels 210 for rows 3 to N of column 2 were connected to column 3, it is possible instead to connect the pixels 210 for rows 3 to N of column 2 to column 1. Similarly, in the above example where the column driver for column 4 is defective, the pixels 210 of column 4 may be connected to column 5 instead of to column 3. Indeed, multiple columns may be connected in a variety of configurations to account for multiple defective column lines 220 and/or column drivers 230.

Beneficially, when the column driver switch registers 245 and/or the cross-column switch registers 290 are configured as shift registers, data values may be supplied for the column driver switch registers 245 and cross-column switch registers 290 of the LCD device 200 by shifting them into place using a shift enable or clock signal. Also, it is possible to either store the data permanently in the registers 245 and 290 after performing a test of the LCD device 200, or the data may be reloaded into the registers periodically, such as upon powering up the LCD device 200.

It is also possible to dynamically change the contents of the registers 290. In that case, for example, with the line defect 270, the pixels 210 for rows 3 to N of column 2 may be alternately connected to column 3 and to column 1, say, in alternating frames. This may allow for an improved display, as the human eye will tend to average the video data displayed by the pixels 210 for rows 3 to N of column 2. Similarly, in the case where the column driver for column 4 is defective, the pixels 210 of column 4 may be alternately connected to column 3 and to column 5, say, in alternating frames.

Many LCD devices employ a column (data) driver layout wherein the column (data) drivers are disposed on two sides (e.g., top and bottom) of the pixel area. Typically, in such a layout column lines are alternately connected to column drivers on opposite sides of the pixel area. That is, odd-numbered column lines are all connected to column drivers on one side (e.g., the top) of the pixel area, and even-numbered column lines are all connected to column drivers on the opposite side (e.g., the bottom) of the pixel area. By employing such

an interleaved column driver layout, the frequency of the data signal that must be communicated to and processed by each column (data) driver can be reduced by $\frac{1}{2}$.

FIG. 3 shows a second preferred embodiment of an image display device in accordance with one or more aspects of the invention. The second embodiment is described with respect to a liquid crystal display (LCD) device 300 having column (data) drivers disposed on two sides (top and bottom) of the pixel area, i.e., the so-called interleaved column (data) driver layout. For clarity and simplicity, those portions of the LCD device 300 relating to the present invention are illustrated.

The LCD device 300 comprises in relevant part: a plurality of pixels 310; a plurality (M) of column (data) lines 320 connected to the plurality of pixels 310; a plurality of column (data) drivers 330 disposed on opposite sides of the pixels 310 for supplying data to the pixels 310 via the column lines 320; a plurality of column driver switches 340; a plurality (M) of column driver switch registers (not shown); a plurality (N) of row (scanning) lines 350 connected to N rows of pixels 310; a plurality of row drivers 360 connected to the row lines 350 for selecting a row of pixels 310 to which data from the column drivers 330 is to be applied; a plurality of cross-column switches 380 each extending between two column lines 320; and a plurality of cross-column switch registers 390 each having an output connected to a control terminal of a corresponding one of the cross-column switches 380. Beneficially, the column driver switch registers and/or the cross-column switch registers 390 may be configured as shift registers.

Typically, each pixel 310 includes a pixel switching device 312, having first and second terminals and a control terminal, and a storage device (pixel capacitor) 314 connected to the first terminal of the pixel switching device 312. The second terminal of the pixel switching device 312 is connected to one of the column lines 320. The pixel switching device 312, which may be a thin film transistor (TFT), is responsive to a scanning signal on the connected row line 350 to selectively connect the column line 320 to the storage device 314 and thereby to store a data signal applied via the column line 320 into the storage device 314.

The LCD device 300 may be a liquid crystal on silicon (LCOS) type LCD device. In that case, the column (data) drivers 330 and/or row (scanning) drivers 360 may be integrated onto a same silicon substrate as the liquid crystal pixels 310. Also, the column driver switches 340, the column driver switch registers, the cross-column switches 380 and/or the cross-column switch registers 390 may be integrated onto the same substrate.

The operation of various pertinent elements of the second preferred embodiment LCD device 300 in the case of a defective column will now be explained.

The second embodiment of the LCD device 300 operates similarly to the first embodiment of the LCD device 200, except that the second embodiment of the LCD device 300 has column drivers 330, cross-column switches 380, and cross-column switch registers 390 located on two opposite sides of the pixel area.

Accordingly, for example, when a line defect 370 indicated between the points A and A' in the column line 320 of column 2 occurs, the pixels for rows 3 to N of column 2 are still connected to the column driver 330 for column 3, located on a first (bottom) side of the pixel area. However, the pixels for rows 1 and 2 are disconnected from the column driver 330 for column 2. In that case, a data value (e.g., "1" or "0") is loaded into the cross-column switch register 390 connected to the control terminal of the cross-column switch 380 between columns 2 and 3 located on the opposite (top) side of the pixel area from the column driver 330 for column 2, such that a control signal output by the cross-column switch register 390 causes the cross-column switch 380 between columns 2 and 3 to close. In other words, the data value stored in each cross-column switch register 390 indicates whether the corresponding cross-column switch 380 should be opened or closed.

With the cross-column switch 380 between columns 2 and 3 closed, the pixels 310 for rows 1 and 2 of column 2 are connected to the column line 320 for column 3.

Accordingly, in response to a scanning (gate) signal of the corresponding row (scanning) line 350, the pixels 310 for rows 1 and 2 of column 2 are driven by the data signal of column 3 to store and display image data. It should be understood that it is possible to connect the pixels 310 for rows 1 and 2 of column 2 to column 1 instead of to column 3.

Also, for example, a column driver 330 for column 4 may be defective and fail to provide a data signal to a column line 320 of column 4. In that case, a data value (e.g., "1" or "0") is stored into a cross-column switch register 390 connected to one of the cross-column switches 380 (top or bottom) between columns 3 and 4, such that a control signal output by the cross-column switch register 390 causes the cross-column switch 380 between columns 3 and 4 to close. Also, a data value (e.g., "1" or "0") is stored into a column driver switch register 390 for column 4 such that a control signal output by the column driver switch register 390 for column 4 causes the column driver switch 340 for column 4 to open. In other words, the data value stored in the column driver switch register 390 indicates whether the corresponding column driver switch 340 should be opened or closed. With one of the cross-column switches 380 between columns 3 and 4 closed, and the column driver switch 340 for

column 4 opened, the pixels 310 of column 4 are connected to the column line 320 for column 3. Accordingly, in response to a scanning (gate) signal of the corresponding row (scanning) line 350, the pixels 310 for column 4 are driven by the data signal of column 3 to store and display image data.

5 It should be understood that, in the above example where the column driver 330 for column 4 is defective, the pixels 310 of column 4 can be connected to column 5 instead of to column 3.

FIG. 4 shows a third embodiment of an image display device in accordance with one or more aspects of the invention. The third embodiment is described with respect to
10 a liquid crystal display (LCD) device 400. For clarity and simplicity, those portions of the LCD device 400 relating to the present invention are illustrated.

The LCD device 400 comprises in relevant part: a plurality of pixels 410; a plurality (M) of column (data) lines 420 connected to the plurality of pixels 410; a plurality of column (data) drivers 430 for supplying data to the pixels 410 via the column lines 420; a
15 plurality of column driver switches 440; a plurality (M) of column driver switch registers 445; a plurality (N) of row (scanning) lines 450 connected to N rows of pixels 410; a plurality of row drivers 460 connected to the row lines 450 for selecting a row of pixels 410 to which data from the column drivers 430 is to be applied; a plurality (M) of column test switches 480 each connected with a corresponding one of the column lines 420; a common
20 test line 486 connected to each of the column test switches 480; a buffer 488 connected to the common test line 486; and a plurality (M) of column test switch registers 490 each having an output connected to a control terminal of a corresponding one of the column test switches 480. Beneficially, the column driver switch registers 445 and/or the column test switch registers 490 may be configured as shift registers.

25 Typically, each pixel 410 includes a pixel switching device 412, having first and second terminals and a control terminal, and a storage device (pixel capacitor) 414 connected to the first terminal of the pixel switching device 412. The second terminal of the pixel switching device 412 is connected to one of the column lines 420. The pixel switching device 412, which may be a thin film transistor (TFT), is responsive to a scanning signal on
30 the connected row line 450 to selectively connect the column line 420 to the storage device 414 and thereby to store a data signal applied via the column line 420 into the storage device 414.

The LCD device 400 may be a liquid crystal on silicon (LCOS) type LCD device. In that case, the column (data) drivers 430 and/or row (scanning) drivers 460 may be

integrated onto a same silicon substrate as the liquid crystal pixels 410. Also, the column driver switches 440, the column driver switch registers 445, the column test switches 480, the buffer 488, and/or the column test switch registers 490 may be integrated onto the same substrate.

5 The operation of various pertinent elements of the third preferred embodiment LCD device 400 in the case of a defective column will now be explained.

10 The third embodiment of the LCD device 400 operates similarly to the first embodiment of the LCD device 200, except that instead of the cross-column switches extending between pairs of adjacent columns, the third embodiment includes the column test switches 480 each connecting a corresponding column line 420 to the common test line 486. Accordingly, when a defect of a column line 420 or a column driver 430 is detected, then a data value is stored in the corresponding column test switch register 490 so as to output a control signal to cause the corresponding column test switch 480 to close, thereby connecting pixels of the defective column to the common test line 486. Also, a data value is stored in a column test switch register 490 for another properly working column, preferably an adjacent column, so as to output a control signal to cause the corresponding column test switch 480 to close, thereby also connecting the properly working column line 420 to the common test line 486. In other words, the data value stored in each cross-column switch register 490 indicates whether the corresponding cross-column switch 480 should be opened or closed. As a result, the pixels of the defective column are driven, via the common test line 486, by the data signal of a properly working (preferably adjacent) column line 420 to store and display image data.

15 The third embodiment is particularly useful where the LCD device includes self-calibrating circuitry to compensate for brightness variations between pixels or columns of the LCD device, including the plurality of column test switches 480. Such an LCD device is described in co-pending U.S. Patent Application Serial No. 09/930190 (Docket No. US010349) filed on 16 August 2001 in the name of inventors Peter J. Janssen and Remus L. Albu and entitled "Self-Calibrating Liquid Crystal Display" the entirety of which is hereby incorporated by reference for all purposes as if fully set forth herein.

20 FIG. 5 shows a fourth embodiment of an image display device in accordance with one or more aspects of the invention. The fourth embodiment is described with respect to a liquid crystal display (LCD) device 500. For clarity and simplicity, those portions of the LCD device 500 relating to the present invention are illustrated.

 The LCD device 500 comprises in relevant part: a plurality of pixels 510; a plurality (M) of column (data) lines 520 connected to the plurality of pixels 510; a plurality

of column (data) drivers 530 for supplying data to the pixels 510 via the column lines 520; a plurality of column driver switches 540; a plurality (M) of column driver switch registers 545; a plurality (N) of row (scanning) lines 550 connected to N rows of pixels 510; a plurality of row drivers 560 connected to the row lines 550 for selecting a row of pixels 510 to which data from the column drivers 530 is to be applied; a plurality (M) of column test switches 580 each connected with a corresponding one of the column lines 520; a plurality ($\approx M/2$) of column pair selection switches 582; a plurality of column pair selection switch registers 584 each having an output connected to a control terminal of a corresponding one of the column pair selection switches 582; a common test line 586 connected to the column pair selection switches 582; a buffer 588 connected to the common test line 586; and a plurality (M) of column test switch registers 590 each having an output connected to a control terminal of a corresponding one of the column test switches 580. Beneficially, the column driver switch registers 545 and/or the column test switch registers 590 and column pair selection switch registers 584 may be configured as shift registers.

Typically, each pixel 510 includes a pixel switching device 512, having first and second terminals and a control terminal, and a storage device (pixel capacitor) 514 connected to the first terminal of the pixel switching device 512. The second terminal of the pixel switching device 512 is connected to one of the column lines 520. The pixel switching device 512, which may be a thin film transistor (TFT), is responsive to a scanning signal on the connected row line 550 to selectively connect the column line 520 to the storage device 514 and thereby to store a data signal applied via the column line 520 into the storage device 514.

The LCD device 500 may be a liquid crystal on silicon (LCOS) type LCD device. In that case, the column (data) drivers 530 and/or row (scanning) drivers 560 may be integrated onto a same silicon substrate as the liquid crystal pixels 510. Also, the column driver switches 540, the column driver switch registers 545, the column test switches 580 and/or the column test switch registers 590 may be integrated onto the same substrate.

The operation of various pertinent elements of the fourth preferred embodiment LCD device 500 in the case of a defective column will now be explained.

The fourth embodiment of the LCD device 500 operates similarly to the third embodiment of the LCD device 400, except that it includes the column pair selection switches 582 and column pair selection switch registers 584. Unlike the third embodiment, wherein only a single column in each group can be repaired, in the fourth embodiment, multiple defects of column lines 520 and column drivers 530 within a group may be repaired,

because each pair of column lines 520 has its own column pair selection switch 582 which can be opened to isolate the column pair from all other columns of the LCD device 500. As in the first to third embodiments, a data value is stored in each cross-column switch register 590 to indicate whether the corresponding cross-column switch 580 should be opened or
5 closed.

While preferred embodiments are disclosed herein, many variations are possible which remain within the concept and scope of the invention. Such variations would become clear to one of ordinary skill in the art after inspection of the specification, drawings and claims herein. Accordingly, the invention therefore is not to be restricted except within
10 the spirit and scope of the appended claims.

CLAIMS:

1. A liquid crystal display (LCD) device, comprising:

a plurality of pixels arranged in a matrix of rows and columns, each pixel including,

- a pixel switching device having first and second terminals and a control terminal, and

- a storage device connected to the first terminal of the pixel switching device;

- a plurality of data lines connected to the second terminals of the pixel switching devices;

- a plurality of data drivers connected to the data lines and providing data to the pixels;

- a plurality of scanning lines connected to the control terminals of the pixel switching devices for selectively connecting the first and second terminals of the pixel switching devices to provide the data to the storage devices; and

- at least one switch responsive to a corresponding control signal to selectively connect two of the data lines to each other.

2. The LCD device of claim 1, wherein each switch comprises a cross-column switch extending between the two data lines selectively connected to each other.

3. The LCD device of claim 2, further comprising a register corresponding to each cross-column switch and providing the control signal for the cross-column switch.

4. The LCD device of claim 1, further comprising a common test line and wherein the at least one switch comprises a column test switch extending between a corresponding one of the data lines and the common test line.

5. The LCD device of claim 4, further comprising a register corresponding to each switch and providing the control signal for the switch.

6. The LCD device of claim 1 wherein each switch includes a column test switch, the LCD device further comprising:

- a common test line; and

5 - a plurality of common pair selection switches each connected between a pair of the column test switches and the common test line.

7. The LCD device of claim 1, further comprising a register corresponding to each switch and providing the control signal for the switch.

10

8. A method of repairing a defect in a liquid crystal display (LCD) device including a plurality of pixels arranged in a matrix of rows and columns, a plurality of column lines connected to the plurality of pixels, a plurality of column drivers connected to the column lines and providing data to the pixels, and a plurality of switches each responsive to a corresponding control signal to selectively connect two column lines to each other, the method comprising:

15

- identifying a defective column in the LCD device, the defective column including a first one of the column lines;

- connecting at least one pixel of the defective column to a second one of the column lines for a second one of the columns in the LCD device.

20

9. The method of claim 8, wherein connecting the at least one pixel of the defective column to the second one of the column lines comprises closing a first one of the switches connected to the defective column.

25

10. The method of claim 9, wherein the LCD device includes a plurality of registers connected to the plurality of switches, the method further comprising storing a data value in one of the registers connected to the first switch to provide a control signal to close the first switch.

30

11. The method of claim 8, wherein connecting the at least one pixel of the defective column to the second column line comprises closing one of the switches connected to the defective column and to the second column line.

12. The method of claim 8, wherein connecting the at least one pixel of the defective column to the second column line comprises:

- closing a first one of the switches connected to the defective column and to a common test line; and

5 - closing a second one of the switches connected to the second column and to the common test line.

13. The method of claim 8, wherein identifying the defective column comprises identifying a portion of the first column line which is not connected to any of the column
10 drivers.

14. The method of claim 8, wherein identifying the defective column comprises identifying a defective column driver.

15 15. The method of claim 14, wherein the LCD device includes a plurality of column driver switches each connected to one of the column lines and to one of the column drivers, and a plurality of registers each connected to control terminals of the column driver switches, the method further comprising storing a data value in one of the registers connected to a first one of the column driver switches to provide a control signal to close the first
20 column driver switch.

16. An image display device, comprising:

- a plurality of pixels arranged in a matrix;

- a plurality of column lines connected to the plurality of pixels;

25 a plurality of column drivers connected to the column lines and providing data to the pixels; and

- means for selectively connecting two column lines to each other.

17. The device of claim 16, wherein the means for selectively connecting two
30 column lines to each other comprises at least one switch responsive to a control signal to selectively connect the two column lines to each other.

18. The device of claim 17, further comprising a plurality of registers each corresponding to one of the switches and storing a data value indicating whether the corresponding switch should be opened or closed.

5 19. The device of claim 17, wherein each of the switches comprises a cross-column switch extending between the two column lines selectively connected to each other.

20. The device of claim 17, further comprising a common test line and wherein
10 each of the switches comprises a column test switch extending between a corresponding one of the column lines and the common test line.

1/5

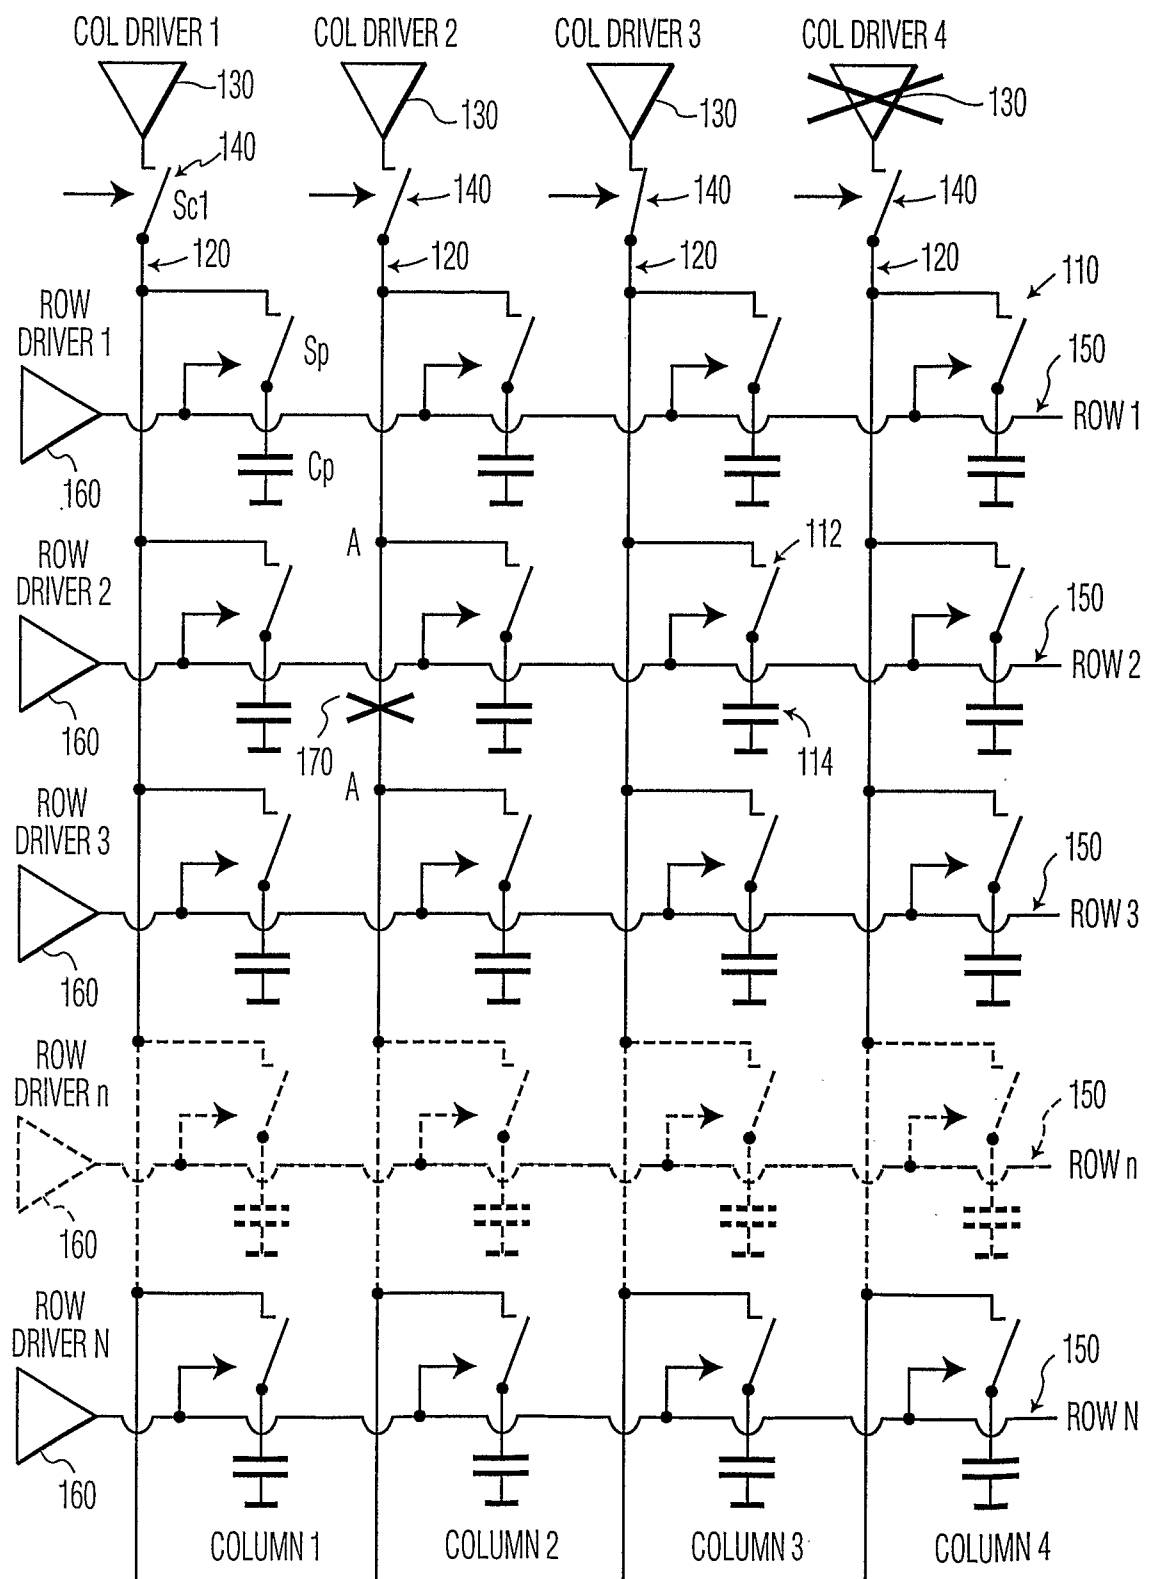
100

FIG. 1

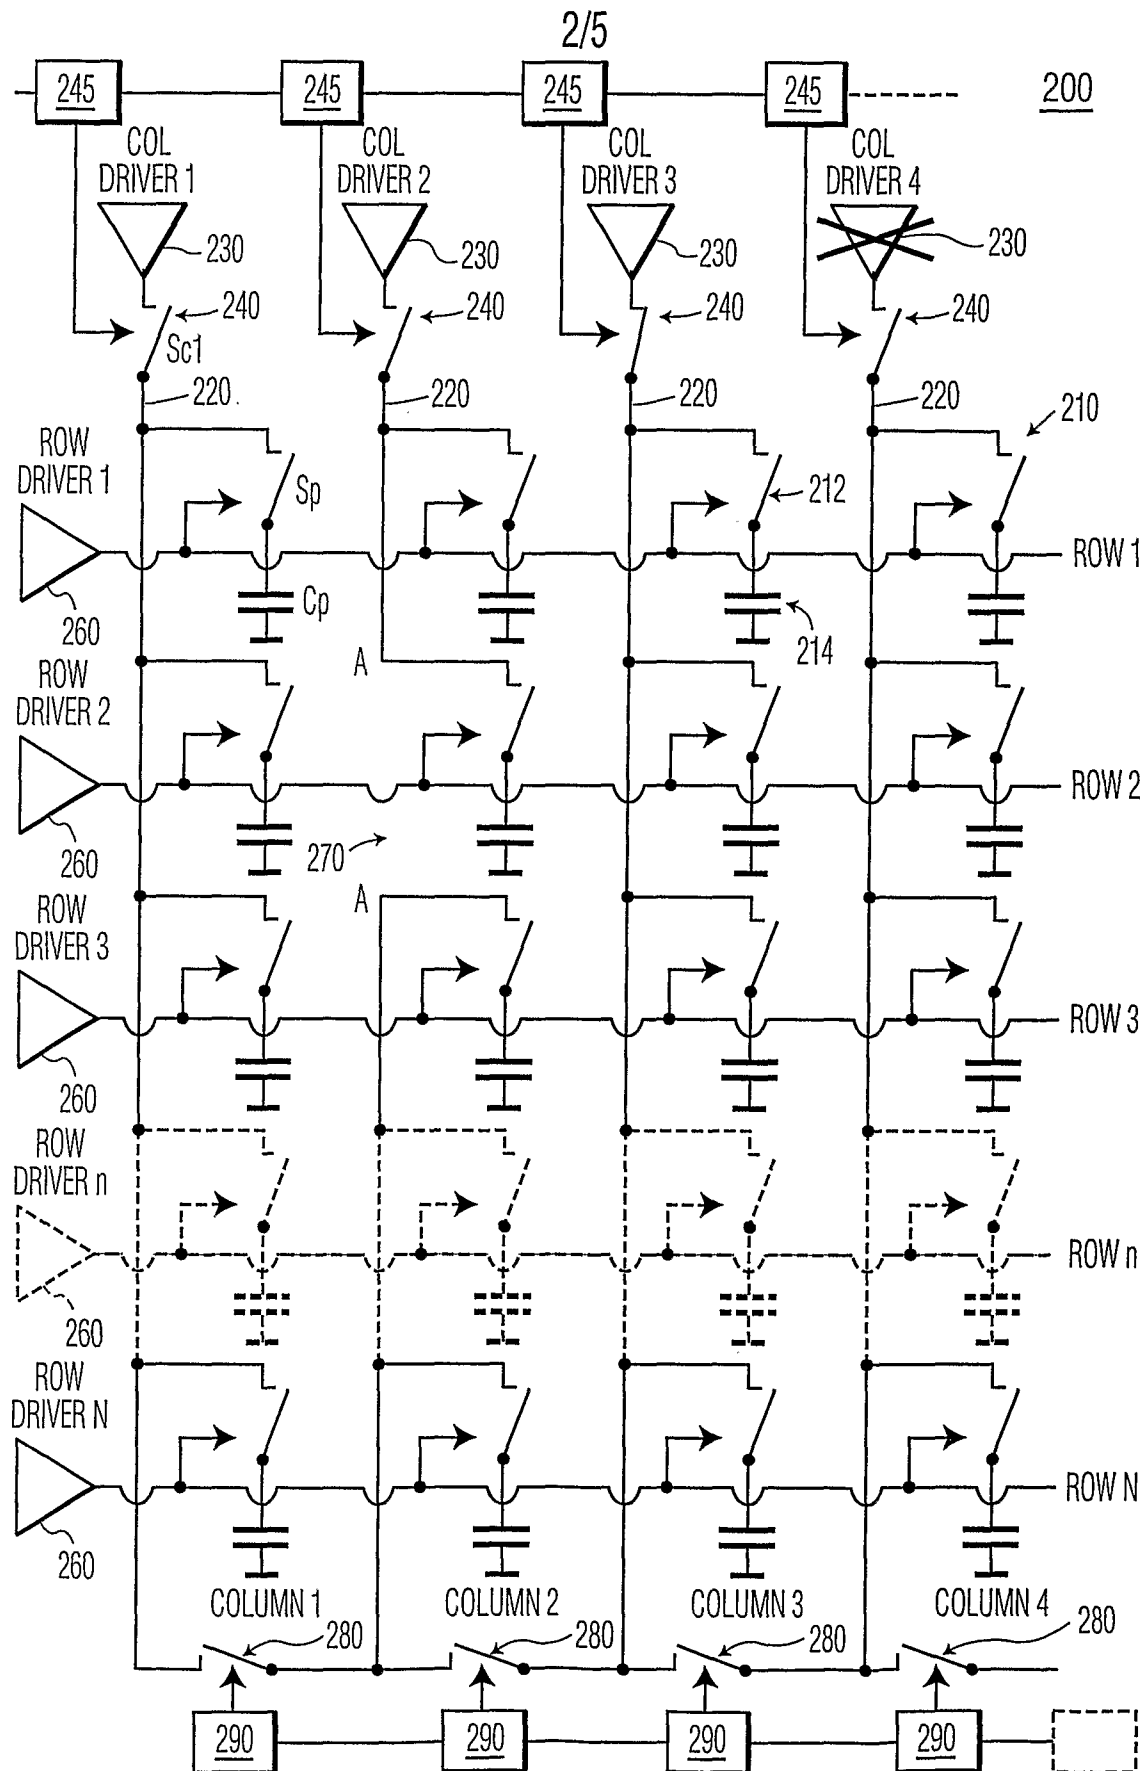
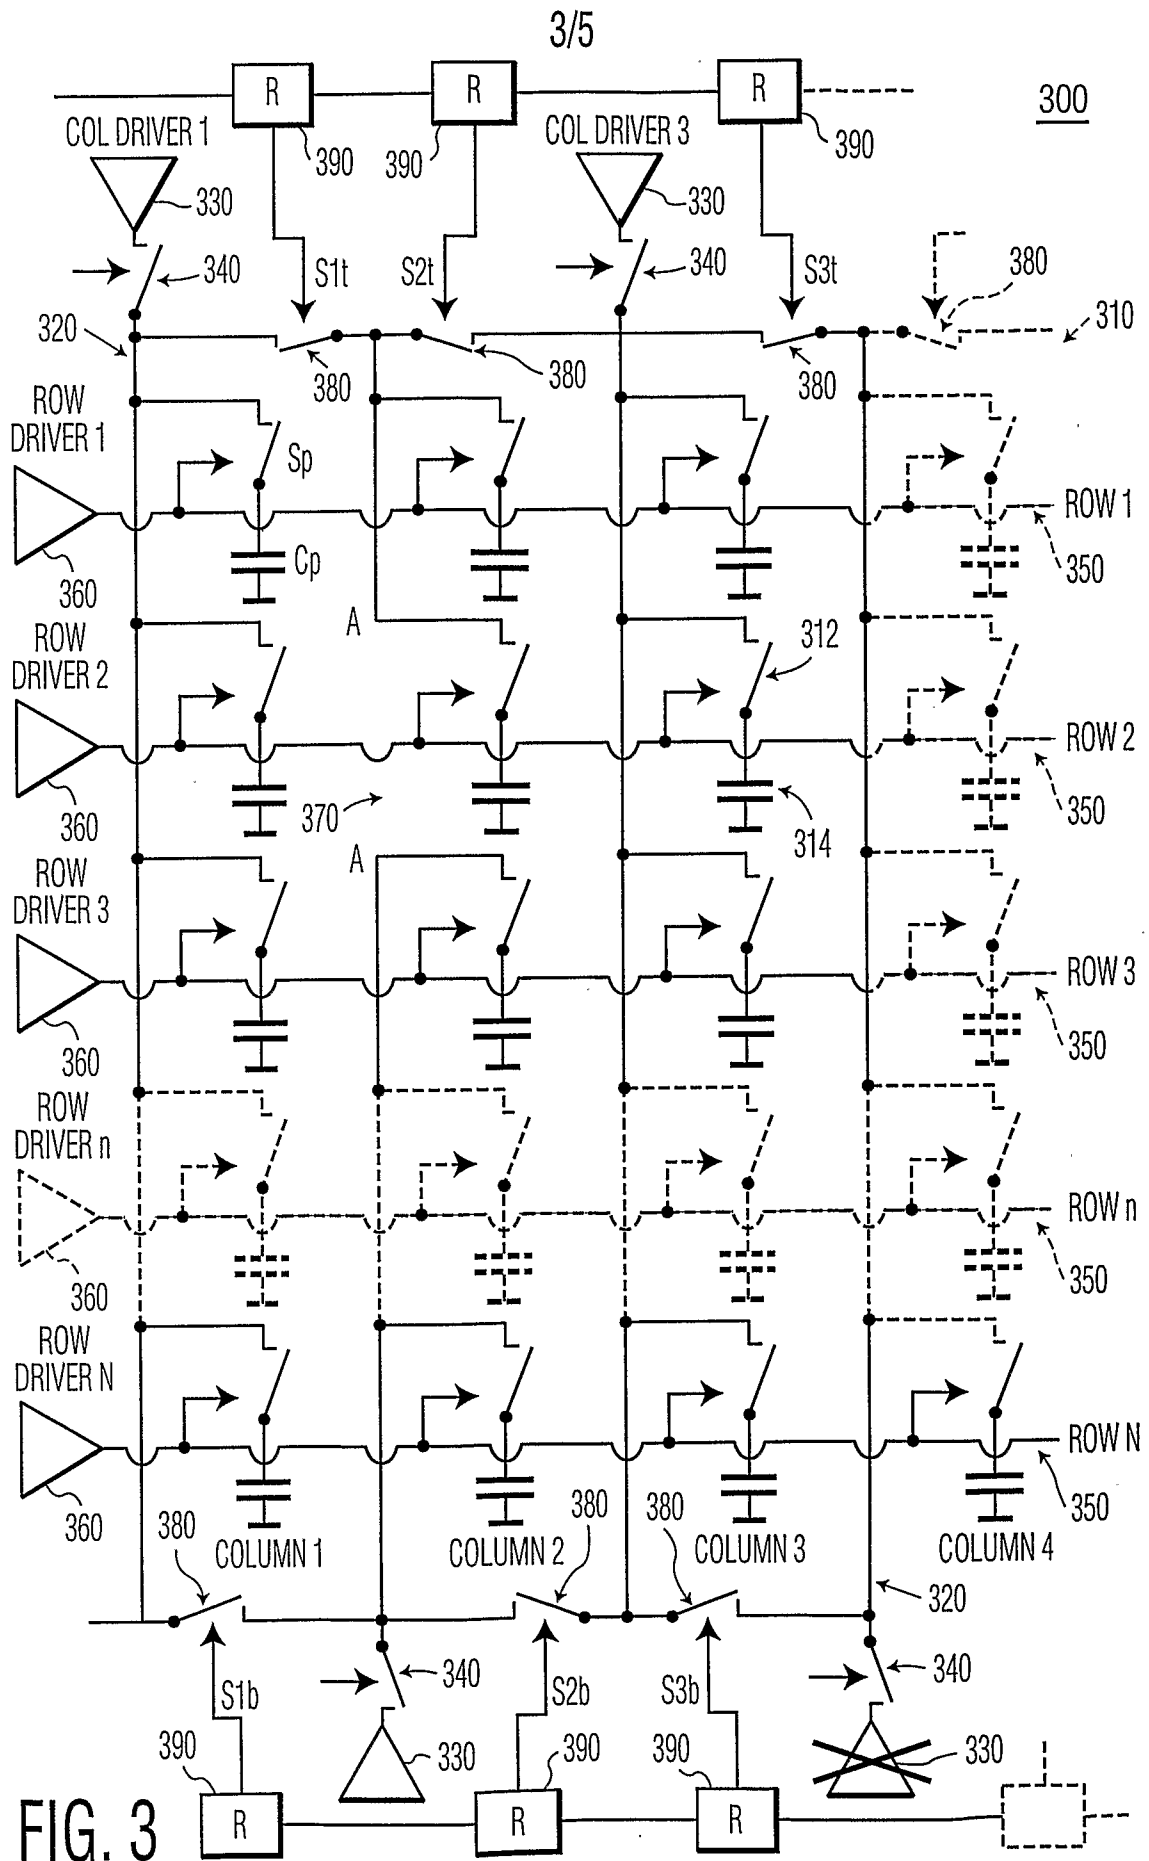


FIG. 2



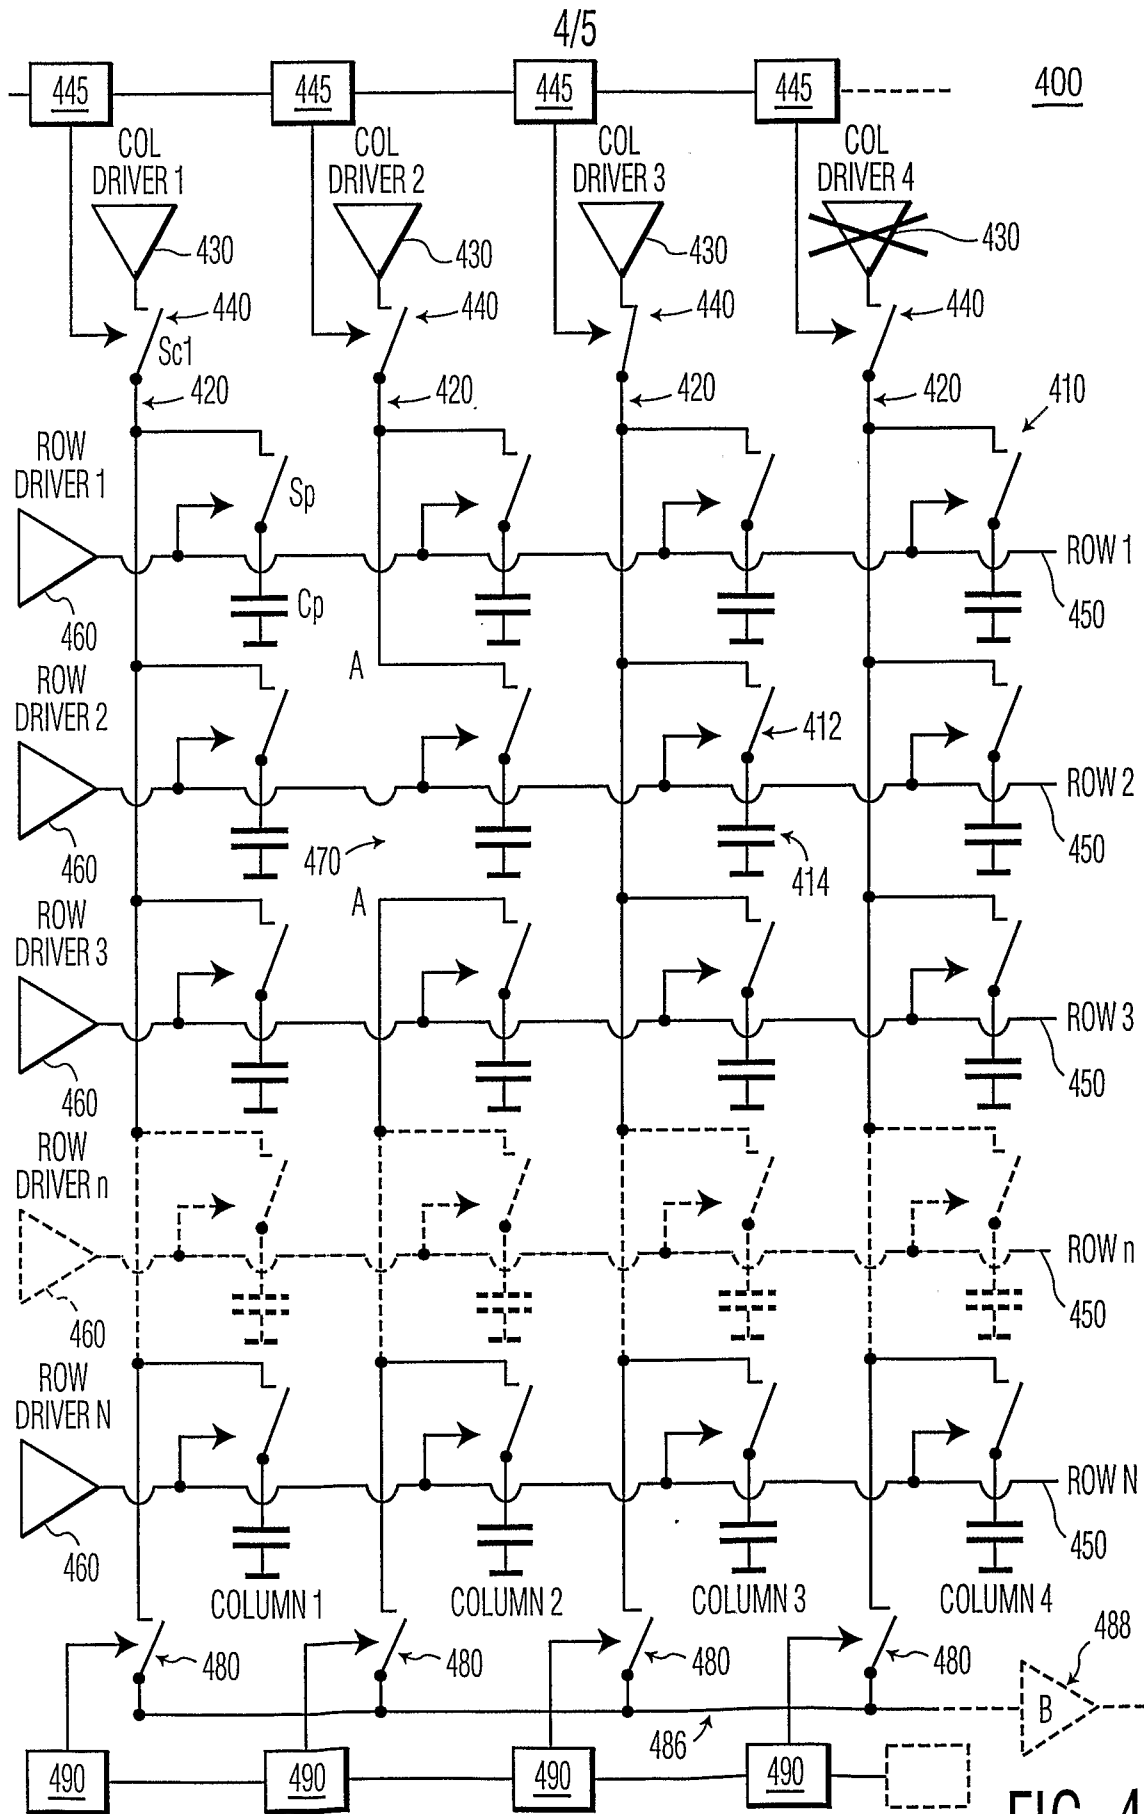
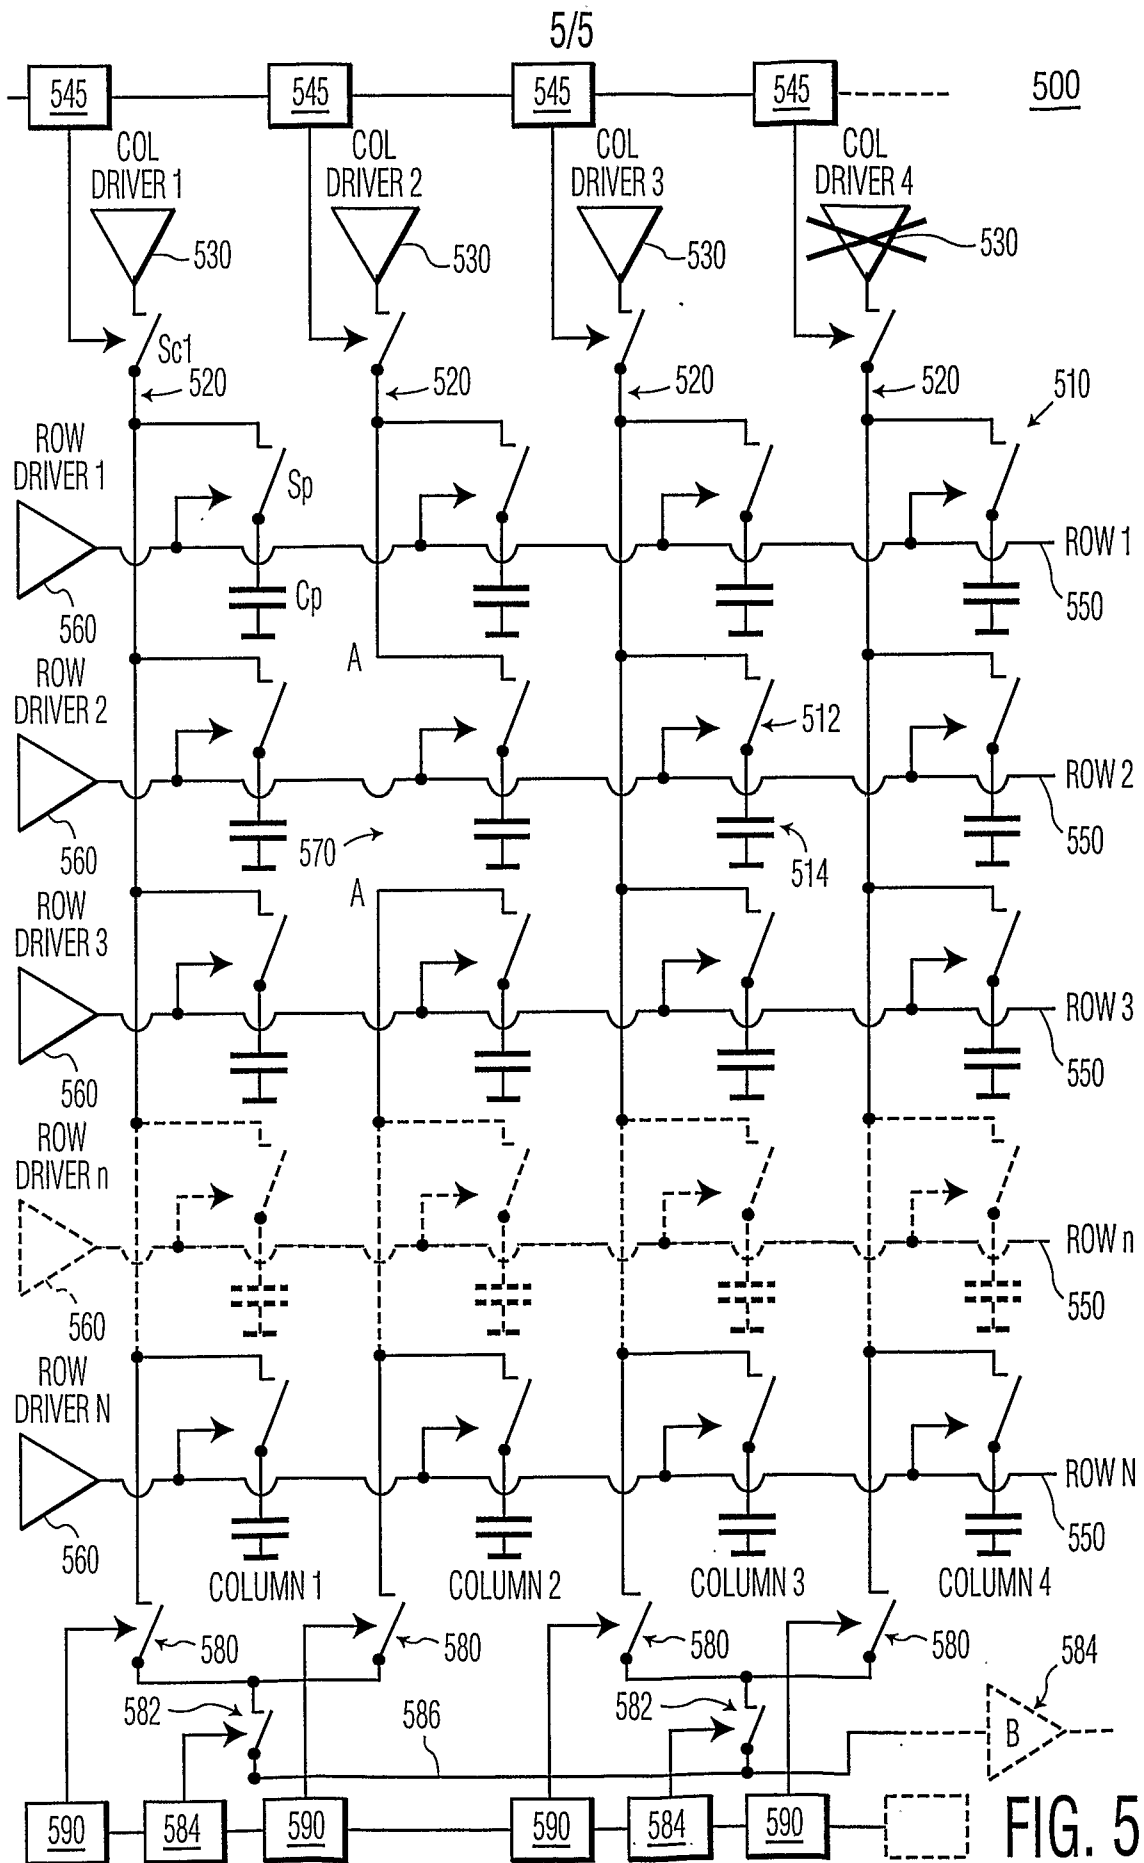


FIG. 4



INTERNATIONAL SEARCH REPORT

International No
PCT/IB 02/02989

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G02F1/13

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 404 528 A (SHARP KK) 27 December 1990 (1990-12-27)	1-15, 17-20
X	column 8, line 47 -column 31, line 18	16
A	PATENT ABSTRACTS OF JAPAN vol. 010, no. 198 (P-476), 11 July 1986 (1986-07-11) & JP 61 041126 A (CANON INC), 27 February 1986 (1986-02-27) abstract	1-20
A	US 6 111 621 A (NA BYOUNG-SUN ET AL) 29 August 2000 (2000-08-29)	1-15, 17-20
X	column 3, line 28 -column 6, line 12; figure 3	16



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

9 October 2002

Date of mailing of the international search report

21/10/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lerbinger, K

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internatio

lication No

PCT/IB 02/02989

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0404528	A	27-12-1990	JP 2573712 B2	22-01-1997
			JP 3259222 A	19-11-1991
			JP 3023425 A	31-01-1991
			JP 3085524 A	10-04-1991
			JP 2523190 B2	07-08-1996
			JP 3085525 A	10-04-1991
			JP 3098023 A	23-04-1991
			DE 69013239 D1	17-11-1994
			DE 69013239 T2	04-05-1995
			EP 0404528 A2	27-12-1990
			KR 9309099 B1	22-09-1993
			US 5268678 A	07-12-1993
JP 61041126	A	27-02-1986	NONE	
US 6111621	A	29-08-2000	KR 260611 B1	01-07-2000

专利名称(译)	带有冗余列驱动电路的液晶显示器		
公开(公告)号	EP1421433A1	公开(公告)日	2004-05-26
申请号	EP2002751484	申请日	2002-07-11
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	皇家飞利浦电子N.V.		
[标]发明人	JANSSEN PETER J ALBU LUCIAN R		
发明人	JANSSEN, PETER, J. ALBU, LUCIAN, R.		
IPC分类号	G02F1/1368 G02F1/13 G02F1/133 G02F1/1362 G09F9/00 G09F9/30 G09F9/35 G09G3/20 G09G3/36		
CPC分类号	G09G3/3688 G02F1/1309 G02F2001/136263 G02F2001/136272 G09G2310/0297 G09G2330/08 G09G2330/12		
代理机构(译)	RAAP, 雅迪尔ADRIAAN		
优先权	09/920635 2001-08-03 US		
其他公开文献	EP1421433B1		
外部链接	Espacenet		

摘要(译)

液晶显示 (LCD) 装置包括用于选择性地将至少两条数据线连接在一起的装置, 以便由于有缺陷的列线 (例如, 断线) 或有缺陷的列驱动器而将图像数据提供给有缺陷的列的像素。该装置最好包括多个开关, 用于将两条数据线连接在一起。开关可以是在两条数据线之间延伸的交叉列开关, 或者可以是在列校准过程中使用的列测试开关, 并且每个列连接到公共列测试线。优选地, 还为每个开关提供寄存器, 以在其中存储指示开关是应该打开还是关闭的数据值。寄存器可以包括移位寄存器。