



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
04.11.2015 Bulletin 2015/45

(51) Int Cl.:
G09G 3/32 ^(2006.01)

(21) Application number: **13869147.2**

(86) International application number:
PCT/CN2013/090103

(22) Date of filing: **20.12.2013**

(87) International publication number:
WO 2014/101719 (03.07.2014 Gazette 2014/27)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

- **QIU, Yong**
Beijing 100085 (CN)
- **HUANG, Xiuqi**
KunShan City
Jiangsu 215300 (CN)
- **GAO, Xiaoyu**
KunShan City
Jiangsu 215300 (CN)
- **HU, Siming**
KunShan City
Jiangsu 215300 (CN)
- **HAN, Zhenzhen**
KunShan City
Jiangsu 215300 (CN)

(30) Priority: **31.12.2012 CN 201210587996**

(71) Applicants:
• **Kunshan New Flat Panel Display Technology Center Co. Ltd**
KunShan City, Jiangsu 215300 (CN)
• **Kunshan Go-Visionox Opto-Electronics Co., Ltd.**
KunShan City, Jiangsu 215300 (CN)

(74) Representative: **Hanna, Peter William Derek et al**
Hanna Moore + Curley
13 Lower Lad Lane
Dublin 2, D02 T668 (IE)

(72) Inventors:
• **ZHU, Hui**
KunShan City
Jiangsu 215300 (CN)

(54) **PIXEL CIRCUIT, DISPLAY DEVICE, AND DRIVE METHOD THEREFOR**

(57) A pixel circuit, a display device, and a drive method therefor. The pixel circuit comprises: a first power source (ELVDD), a second power source (ELVSS), an organic light-emitting diode (OLED), a first capacitor (C1), a first transistor (T1), a second transistor (T2), and a third transistor (T3), wherein the first transistor (T1) is configured to compensate a threshold voltage of the third transistor (T3). According to the drive method, the pixel circuit is driven to emit light by sequentially applying scanning signals to the pixel circuit on scanning lines (Sn1, Sn2, Sn3). The pixel circuit and the method for driving the pixel circuit can improve the response characteristics of active matrix organic light-emitting diodes, thereby enabling the display device to display images having uniform image quality.

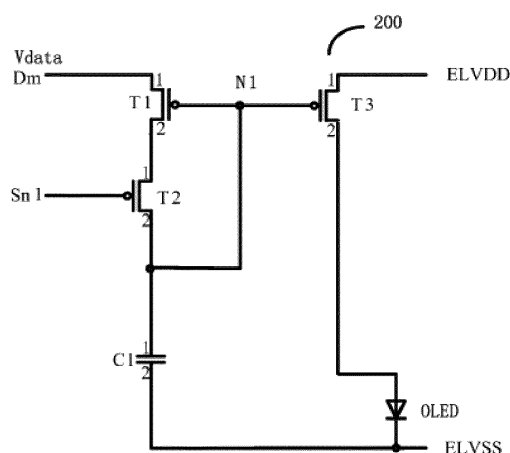


FIG. 2

Description

TECHNICAL FIELD

[0001] The present invention relates to a pixel circuit, a display device and a method for driving the pixel circuit, and more particularly relates to a pixel circuit of an organic light-emitting diode capable of compensating a threshold voltage of a driving transistor, a display device and a method for driving the pixel circuit.

BACKGROUND

[0002] In recent years, various types of flat panel display devices, which have light weight and small size compared with cathode ray tube (CRT) displays, have been developed. Among the various types of flat panel display devices, by using a self-light-emitting organic light-emitting diode (OLED) to display images, an active matrix organic light-emitting display device with a thin-film transistor (TFT) backplane usually has the characteristics of short response time, low power consumption for driving, and better brightness and color purity. Therefore, the organic light-emitting display device has become a focus of the next-generation display devices.

[0003] FIG. 1 schematically shows a circuit diagram of a traditional active matrix organic light-emitting display device 100, wherein the active matrix organic light-emitting display device 100 comprises a data driver and a scanning driver (not shown in FIG. 1). The data driver is configured to control a plurality of data lines DA1...DAm in transversal arrangement, and the scanning driver is configured to control a plurality of scanning lines SC1...SCn in longitudinal arrangement. A plurality of pixel circuits 110 are formed in intersection areas between the plurality of data lines DA1...DAm and the plurality of scanning lines SC1...SCn.

[0004] With reference to FIG. 1, the pixel circuit 110 comprises an organic light-emitting diode (OLED)1, a storage capacitor C11, a switching transistor T11, a driving transistor T12, a first power source ELVDD1, and a second power source ELVSS1, wherein both the transistors T11 and T12 are P-channel metal-oxide semiconductor transistors (PMOS). A grid of the switching transistor of the switching transistor T11 is coupled to one scanning line SC1, a source of the switching transistor T11 is coupled to one data line DA1, and a drain of the switching transistor T11 is coupled to a grid of the second transistor T12. A source of the driving transistor T12 is coupled to the high-voltage power source ELVDD1, and a drain of the driving transistor T12 is coupled to an anode of the OLED1. A cathode of the OLED1 is coupled to the low-voltage power source ELVSS1. A first terminal of the storage capacitor C11 is coupled to the first power source ELVDD1, and a second terminal of the storage capacitor C11 is coupled to the grid of the second transistor.

[0005] The scanning driver applies scanning signals to the scanning lines SC1 to SCn in sequence, and the data driver applies corresponding data signals via the data lines DA1 to DAm according to image data to be displayed. Thus, the pixel circuits 110 located in the intersection areas supply a driving current flowing through the organic light-emitting diode according to the signals of the scanning lines and data lines coupled to the pixel circuits.

[0006] Using the pixel circuit 110 shown in FIG. 1 as an example, when the scanning drive applies the scanning signals to the scanning line SC1, the switching transistor T11 is conducted, and at this point, a voltage of the data signals on the data line DA1 is stored in the storage capacitor C11 through the switching transistor T11. The driving transistor T12 supplies a driving current I_{OLED1} according to the voltage stored in the storage capacitor C11 to drive the organic light-emitting diode OLED1 to emit the light of the corresponding brightness. A formula for the driving current is shown as below:

$$I_{OLED1} = 1/12 \mu_{12} \times C_{ox12} \times W_{12}/L_{12} (V_{GS12} - V_{TH12})^2 \text{ (Formula 1),}$$

wherein μ_{12} is a carrier mobility of the driving transistor T12, C_{ox12} is a capacitance of a control end oxidation layer per unit area of the driving transistor T12, W_{12} is a channel width of the driving transistor T12, L_{12} is a channel length of the driving transistor T12, V_{GS12} is a voltage difference between the grid and the source of the driving transistor T12, and V_{TH12} is a threshold voltage of the driving transistor T12. That is, the driving current flowing through the organic light-emitting diode OLED1 can be controlled according to the magnitude of a data voltage from the data line DA1 to display a predefined grayscale.

[0007] A large active matrix organic light-emitting display device comprises a number of pixel circuits, and each of which need to comprise a driving transistor. The electric difference among different driving transistors results in different threshold voltages on the driving transistors. Therefore, according to the formula 1, it can be known that when the data voltages supplied to the pixel circuits 110 are the same, the driving currents supplied to the organic light-emitting diodes may vary with different threshold voltages of the driving transistors. This will result in the problems of poor quality uniformity and poor consistency of an image displayed by a plurality of pixel circuits.

SUMMARY

[0008] In view of this, a main objective of the present invention is to provide a novel pixel circuit structure capable of compensating a difference in a threshold voltage of the driving transistor. The present invention provides a pixel circuit capable of producing a desired brightness and an active matrix organic light-emitting display device employing the pixel circuit, wherein the pixel circuit is capable of improving the response characteristic of the active matrix organic light-emitting diode to display the image with uniform image quality.

[0009] To achieve the above objective, technical solutions of the present invention are implemented as follows:

[0010] The present invention provides a pixel circuit, comprising: a first power source, a second power source, an organic light-emitting diode, a first capacitor, a first transistor, a second transistor, and a third transistor; wherein a cathode of the organic light-emitting diode is coupled to the second power source;

the first capacitor is coupled between a node and the second power source;

each of the first transistor, the second transistor, and the third transistor is provided with a control end, a first electrode, and a second electrode;

the control end of the first transistor is coupled with the node, and the first electrode of the first transistor is configured to receive a data signal;

the control end of the second transistor is configured to receive a first scanning signal, the first electrode of the second transistor is coupled to the second electrode of the first transistor, and the second electrode of the second transistor is coupled to the node;

the control end of the third transistor is coupled to the node, the first electrode of the third transistor is coupled to the first power source, and the second electrode of the third transistor is coupled to an anode of the light-emitting diode; and the first transistor is configured to compensate a threshold voltage of the third transistor.

[0011] The first transistor and the third transistor are approximate in channel width, and are arranged in the pixel circuit in a close range.

[0012] The pixel circuit is arranged on a TFT backplane; and

the first transistor and the third transistor are symmetrically arranged on the TFT backplane.

[0013] The pixel circuit further comprises a fourth transistor;

wherein a control end of the fourth transistor is configured to receive a second scanning signal, a first electrode of the fourth transistor is coupled to the second electrode of the third transistor, and a second electrode of the fourth transistor is coupled to an anode of the light-emitting diode.

[0014] The pixel circuit further comprises a fifth transistor and a third power source;

wherein the fifth transistor comprises: a control end configured to receive a third scanning signal, a first electrode coupled to the node, and a second electrode coupled to the third power source.

[0015] A voltage of the third power source is lower than or equal to a voltage of the second power source.

[0016] The pixel circuit further comprises a sixth transistor;

wherein the sixth transistor comprises: a control end configured to receive the third scanning signal, a first electrode coupled to the anode of the light-emitting diode, and a second electrode coupled to the second power source.

[0017] The pixel circuit further comprises a second capacitor coupled between the control end of the second transistor and the node.

[0018] The first transistor, the second transistor, the third transistor, the fourth transistor, the fifth transistor, and the sixth transistor are P-channel metal-oxide semiconductor transistors.

[0019] The present invention further provides a method for driving a pixel circuit; wherein the pixel circuit comprises: a first transistor, a second transistor, a third transistor, a storage capacitor and an organic light-emitting diode, and is driven by signals from data lines and scanning lines; and the drive method comprises:

applying a first scanning signal to a first scanning line for conducting the second transistor such that data signals from a data line are provided to a node via the first transistor and the second transistor, and storing a voltage at the node in the storage capacitor, wherein a control end of the first transistor and a terminal of the storage capacitor are jointly coupled to the node;

providing the data signals to the light-emitting diode via the third transistor; and

emitting, by the light-emitting diode, light with a brightness matching the data signals.

[0020] The pixel circuit further comprises a fourth transistor; and the method further comprises:

applying a second scanning signal to a second scanning line for conducting the fourth transistor such that the data

signals are provided to the light-emitting diode via the third transistor.

[0021] The pixel circuit further comprises a fifth transistor; and a third scanning signal is applied for conducting the fifth transistor before the first scanning signal is applied, thereby initializing the node.

[0022] The first transistor and the third transistor are approximate in channel width, and are arranged in the pixel circuit in a close range.

[0023] The pixel circuits arranged on a TFT backplane; and the first transistor and the third transistor are symmetrically arranged on the TFT backplane.

[0024] The present invention further provides a display device, comprising:

A scanning driver is configured to apply a scanning signal to a scanning line;
a data driver is configured to apply a data signal to a data line; and
a pixel circuit is coupled between the data line and the scanning line;

wherein the pixel circuit comprises: a first power source, a second power source, an organic light-emitting diode, a first capacitor, a first transistor, a second transistor, and a third transistor; wherein the organic light-emitting diode comprises an anode and a cathode which is coupled to the second power source; the first capacitor is coupled between a node and the second power source;

each of the first transistor, the second transistor, and the third transistor is provided with a control end, a first electrode, and a second electrode; wherein

the control end of the first transistor is coupled to the node, and the first electrode of the first transistor is coupled to with the data lines;

the control end of the second transistor is coupled to a first scanning line, the first electrode of the second transistor is coupled to the second electrode of the first transistor, and the second electrode of the second transistor is coupled to the node;

the control end of the third transistor is coupled to the node, the first electrode of the third transistor is coupled to the first power source, and the second electrode of the third transistor is coupled to an anode of the light-emitting diode; and the first transistor is configured to compensate a threshold voltage of the third transistor.

[0025] The first transistor and the third transistor are approximate in channel width, and are arranged in the pixel circuit in a close range.

[0026] The display device further comprises a TFT backplane, the pixel circuit being arranged on the TFT backplane; and

the first transistor and the third transistor are symmetrically arranged on the TFT backplane.

[0027] The pixel circuit further comprises a fourth transistor; wherein a control end of the fourth transistor is coupled to a second scanning line, a first electrode of the fourth transistor is coupled to the second electrode of the third transistor, and a second electrode of the fourth transistor is coupled to the anode of the light-emitting diode.

[0028] The pixel circuit further comprises a fifth transistor and a third power source; wherein the fifth transistor comprises a control end coupled to a third scanning line, a first electrode coupled to the node, and a second electrode coupled to the third power source.

[0029] A voltage of the third power source is lower than or equal to a voltage of the second power source.

[0030] The pixel circuit further comprises a sixth transistor; wherein the sixth transistor comprises: a control end coupled to the third scanning line, a first electrode coupled to the anode of the light-emitting diode, a second electrode coupled to the second power source.

[0031] The pixel circuit further comprises a second capacitor coupled between the control end of the second transistor and the node.

[0032] The first transistor, the second transistor, the third transistor, the fourth transistor, the fifth transistor, and the sixth transistor are P-channel metal-oxide semiconductor transistors.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033]

FIG. 1 is a diagram of a pixel circuit of a traditional active matrix organic light-emitting display device;

FIG. 2 is a schematic diagram of a pixel circuit according to a first embodiment of the present invention;

FIG. 3 is a signal timing diagram of a method for driving the pixel circuit as shown in FIG. 2.

FIG. 4 is a schematic diagram of a pixel circuit according to a second embodiment of the present invention;

FIG. 5 is a signal timing diagram of a method for driving the pixel circuit as shown in FIG. 4.

FIG. 6 is a schematic diagram of a pixel circuit according to a third embodiment of the present invention;
 FIG. 7 is a signal timing diagram of a method for driving the pixel circuit as shown in FIG. 6.
 FIG. 8 is a schematic diagram of a pixel circuit according to a fourth embodiment of the present invention;
 FIG. 9 is a schematic diagram of a pixel circuit according to a fifth embodiment of the present invention; and
 FIG. 10 is a schematic diagram of an active matrix organic light-emitting display device of the present invention.

DETAILED DESCRIPTION

[0034] In the following, the pixel circuit and the method for driving the pixel circuit according to the present invention will be further described in detail with reference to the appended drawings and the embodiments of the present invention.

[0035] It is necessary to note that the term "coupled/couple/coupling" as referred to in the present invention includes either direct connection between elements or connection between elements via other components.

[0036] For ease of description, a pixel circuit and a method for driving the pixel circuit according to an embodiment of the present invention will be described with reference to FIG. 2 and FIG. 3.

[0037] FIG. 2 shows a schematic diagram of a pixel circuit 200 according to a first embodiment of the present invention.

[0038] With reference to FIG. 2, the pixel circuit 200 comprises: a first transistor T1, a second transistor T2, a third transistor T3, a capacitor C1, and an organic light-emitting diode (OLED). Each of the transistors T1 to T3 comprises a control end, a first electrode 1, and a second electrode 2. The first electrode of the first transistor T1 is coupled to a data line Dm, the control end of the first transistor T1 is coupled to a node N1, and the second electrode of the first transistor T1 is coupled to the first electrode of the second transistor T2. The control end of the second transistor T2 is coupled to a first scanning line Sn1 configured to receive a first scanning signal from the first scanning line Sn1, the first electrode of the second transistor T2 is coupled to the second electrode of the second transistor, and the second electrode of the second transistor T2 is coupled to the node N1. A first terminal of the capacitor C1 is coupled to the node N1, and a second terminal of the capacitor C1 is coupled to a second power source ELVSS. The control end of the third transistor T3 is coupled to the node N1, the first electrode of the third transistor T3 is coupled to the first power source ELVDD, and the second electrode of the third transistor T3 is coupled to an anode of the OLED. A cathode of the OLED is coupled to the second power source ELVSSO. Preferably, the control end may be a grid of each of the transistors T1 to T3, the first electrode may be a source of each of the transistors T1 to T3, and the second electrode may be a drain of each of the transistors T1 to T3. Similarly, the control end of each of the transistors T4, T5 and T6 may be a grid of each of the transistors T4 to T6, the first electrode may be a drain of each of the transistors T1 to T3, and the second electrode may be a drain of each of the transistors T1 to T3.

[0039] FIG. 3 shows a signal timing diagram for a method for driving the pixel circuit 200 as shown in FIG. 2. The signal timing as shown in FIG. 3 includes a first phase and a second phase, wherein the first phase t1 is a data writing phase, and the second phase t2 is a normal light-emitting phase. As all the transistors T1 to T3 in the pixel circuit 200 as shown in FIG. 2 are described using PMOS transistors as an example, the transistors are conducted when low-level signals are applied to the control ends of the transistors.

[0040] As shown in FIG. 3, in the first phase, i.e., a time period t1 in which the scanning signals are applied to the scanning line Sn1, the first transistor T1 and the second transistor T2 respond to the low-level scanning signals Sn1 to be conducted. Therefore, the data signals Vdata from the data line Dm are provided to the node N1 via the first transistor T1 and the second transistor T2. It can be understood that, at this point, the voltage value at the node N1 is a voltage value corresponding to a differential value between the data signals Vdata and the threshold voltage of the first transistor T1, i.e., $V_{data} - |V_{TH1}|$, which is equivalent to $V_{data} + V_{TH1}$. Further, the voltage at the node N1 is also stored in the capacitor C1. That is, the data signals Vdata on the data line Dm are read into the pixel circuit 200.

[0041] In the second phase t2, that is, after the voltage of the first scanning line Sn1 jumps to a high level, the OLED enters the normal light-emitting phase. At this point, a current of the first power source ELVDD flows through the third transistor T3 into the anode of the OLED.

[0042] The driving current flowing into the OLED is shown as a formula below:

$$I_{OLED} = 1/2 \mu_3 \times C_{ox3} \times W_3 / L_3 \times (V_{GS3} - V_{TH3})^2 \quad (\text{Formula 2}),$$

wherein μ_3 is a carrier mobility of the third transistor T3; C_{ox3} is a capacitance of a control end oxidation layer per unit area of the third transistor T3, W_3 is a channel width of the third transistor, and L_3 is a channel length of the third transistor T3. V_{GS3} is a voltage difference between the grid and the source of the third transistor T3, and V_{TH3} is the threshold voltage of the third transistor T3.

[0043] At this point, as the third transistor is conducted, the voltage V_{GS3} for the grid and the source is the voltage ($V_{data} + V_{TH1}$) at the node N1, and the voltage difference between the voltage V_{GS3} and the voltage Vdd of the first power

source is $V_{data} + V_{TH1} - V_{dd}$. Therefore, through calculation in the above formula, the following formula may be obtained:

$$I_{OLED} = 1/2 \mu_3 \times C_{ox3} \times W_3/L_3 \times (V_{data} + V_{TH1} - V_{dd} - V_{TH3})^2 \quad (\text{Formula 3}).$$

[0044] It follows that the impact of the threshold voltage of the third transistor T3 to the driving current of OLED may be reduced by arranging the first transistor T1 with appropriate electric characteristics.

[0045] Preferably, if the transistors T1 and T3 with similar electrical characteristics as much as possible are arranged, the threshold voltage of the third transistor T3 can be offset to almost zero, thereby allowing the driving current flowing into the OLED to be free from the impact of the threshold voltage of the third transistor T3. That is, the current value of the OLED is as follows:

$$I_{OLED} = 1/2 \mu_3 \times C_{ox3} \times W_3/L_3 \times (V_{data} - V_{dd})^2 \quad (\text{Formula 4}).$$

[0046] Wherein for the arrangement of the first transistor T1 and the third transistor T3 with similar electrical characteristics as much as possible, two transistors approximate in channel width and channel length as much as possible may be arranged, and are arranged in the pixel circuit 200 in a close range.

[0047] Preferably, the pixel circuit 200 may also be arranged on a TFT backplane, with the first and third transistors T1 and T3 symmetrically arranged, so that the threshold voltages of the first and third transistors T1 and T3 are as close as possible.

[0048] FIG. 4 shows a schematic diagram of a pixel circuit 300 according to a second embodiment of the present invention. Compared with the pixel circuit as shown in FIG. 2, the pixel circuit 300 further comprises a fourth transistor T4; wherein a control end of the fourth transistor T4 is coupled to a second scanning line Sn2 configured to receive a second scanning signal from the second scanning line Sn2, a first electrode of the fourth transistor T4 is coupled to the second electrode of the third transistor T3, and a second electrode of the fourth transistor T4 is coupled to the anode of the OLED.

[0049] FIG. 5 shows a signal timing diagram of a drive method according to the pixel circuit 300 as shown in FIG. 4. Compared with the signal timing diagram as shown in FIG. 3, the signal timing diagram as shown in FIG. 4 is different in that the scanning signal is provided to the second scanning line Sn2 in the second phase t2. At this point, the third transistor T3 and the fourth transistor T4 are conducted simultaneously, thereby providing the data signals to the OLED through the third transistor T3 and the fourth transistor T4. Furthermore, the OLED enters the normal light-emitting phase.

[0050] It can be understood that as the fourth transistor T4 is arranged in the pixel circuit 300, the conduction time and the shutdown time of the fourth transistor T4 may be controlled through the second scanning line Sn2, thereby controlling the light-emitting time of the OLED through the fourth transistor T4. That is, when the transistor T4 is shut down, the OLED does not emit light; and when the transistor T4 is conducted, the OLED emits light. The OLED in the pixel circuit 200 as shown in FIG. 2 is always in a light-emitting state since the third transistor T3 is conducted continuously. Therefore, the light-emitting effect of the pixel circuit 3 becomes more stable.

[0051] FIG. 6 shows a schematic diagram of a pixel circuit 400 according to a third embodiment of the present invention. Compared with the pixel circuit 300 as shown in FIG. 4, the pixel circuit 400 further comprises a fifth transistor T5; wherein a control end of the fifth transistor T5 is coupled to a third scanning line Sn3 configured to receive a third scanning signal from the third scanning line Sn3, a first electrode of the fifth transistor T5 is coupled to the node N1, and a second electrode of the fifth transistor T5 is coupled to the third power source. The voltage V_{init} of the third power source is not higher than V_{ELVSS} .

[0052] For those skilled in the art, it can be understood that when the value of V_{init} is equal to that of V_{ELVSS} , the source electrode of the fifth transistor can be coupled to the second power source ELVSS.

[0053] FIG. 7 shows a signal timing diagram of a pixel circuit 400 as shown in FIG. 6. The signal timing further comprises an initialization phase before the first phase.

[0054] In the initialization phase, i.e., the time period t0 in which the scanning signals are provided to the scanning line Sn3, the fifth transistor T5 is conducted, thereby supplying the voltage of the third power source V_{init} to the node N1 and the anode of the OLED.

[0055] That is, the fifth transistor T5 supplies a constant voltage to the node N1 and the anode of the OLED in the initialization time period. Thus, the voltage at the node N1 and the voltage of the capacitor C1 are initialized to be V_{init} .

[0056] Preferably, the initialized voltage V_{init} may be set to be the same as the voltage of the second power source ELVSS.

[0057] FIG. 8 shows a schematic diagram of a pixel circuit 500 according to the fourth embodiment of the present invention. Compared with the circuit as shown in FIG. 6, the pixel circuit 500 further comprises a sixth transistor T6.

[0058] The sixth transistor T6 is coupled between the anode of the OLED and the second power source ELVSS. A control end of the sixth transistor T6 and the control end of the fifth transistor T5 are jointly coupled to the scanning line Sn3 configured to receive a third scanning signal; and a first electrode and a second electrode of the sixth transistor T6 are respectively coupled to the anode and the cathode of the OLED. In the time period in which the low-level scanning signal is provided to the scanning line Sn3, the sixth transistor T6 is conducted. Since the first and second electrodes of the sixth transistor T6 are respectively coupled to the anode and the cathode of the OLED, the driving current may be prevented from being supplied to the OLED.

[0059] FIG. 9 shows a schematic diagram of a pixel circuit 600 according to a fifth embodiment of the present invention. Compared with the circuit as shown in FIG. 7, the pixel circuit 600 further comprises a second capacitor C2. The second capacitor C2 is coupled between the control end of the second transistor T2 and the node N1.

[0060] It can be understood that in the time period in which the scanning signal of the scanning line Sn1 jumps from low level to high level, since Vdata is stored in the node N1, the voltage increases the potential of the node N1 through the coupling effect of the second capacitor C2 when the voltage of the scanning line Sn1 turns into high level, thereby correspondingly improving the voltage $V_{data} + V_{TH1}$ of the control end of the third transistor T3 and storing the corresponding voltage into the second capacitor C2. Due to $V_{data} < V_{dd}$, from the formula 4, it can be known that the increase in the voltage value of the control end of the third transistor T3 results in the decrease of the differential value between the voltage of the control end of the third transistor T3 and V_{dd} . Therefore, when the voltage of the data signals, read into the pixel circuit 600, is very small, i.e. when the grayscale for light emitting is very low, the driving current flowing through the OLED is made to decrease further, thereby improving the contrast among different grayscales of the pixel circuit.

[0061] It is necessary to note that the first transistor T1, the second transistor T2, the third transistor T3, the fourth transistor T4, the fifth transistor T5, and the sixth transistor T6 in the pixel circuits of the embodiments above are described by using the P-channel metal-oxide semiconductor transistor as an example. Those skilled in the art may understand that the transistors T1 to T6 in the pixel circuit of the present invention may also be implemented by using N-channel metal-oxide semiconductor transistors.

[0062] FIG. 10 shows an active matrix organic light-emitting display device 600 comprising the pixel circuit according to the embodiments of the present invention.

[0063] With reference to FIG. 10, a display device 700 comprises: a first power source ELVDD, a second power source ELVSS, a scanning driver 702, a data driver 703, and a plurality of pixel circuits 701 arranged in intersection areas between the scanning lines Sn1, Sn2 and Sn3 and the data lines D1 to Dm in a matrix manner. The first power source ELVDD and the second power source ELVSS supply corresponding power voltages to the plurality of pixel circuits 701 through corresponding row lines (with the number of n) and column lines (with the number of m).

[0064] Each pixel circuit 701 is coupled to the corresponding scanning line (for example, Sn2, Sn2 and Sn3) and data line respectively. For example, the pixel circuit 701 located in the row i and the column j is coupled to the scanning lines Si1, Si2 and Si3 of the row i and the data line Dj of the column j.

[0065] The scanning driver 702 generates the scanning signals corresponding to the scanning signals provided externally (for example, by a certain control unit). The scanning signals generated by the scanning driver 702 are respectively provided to the pixel circuits 701 in sequence through the scanning lines Si1 to Sin.

[0066] The data driver 703 generates the data signals corresponding to the data and data control signals provided externally (for example, by a certain control unit). The data signals generated by the data driver 703 are provided to the pixel circuit 701 through the data lines D1 to Dm in synchronization with the scanning signals, wherein the pixel circuit 701 may be any one pixel circuit as shown in the embodiments above. It can be understood that the number of the scanning lines in each row may be differently arranged accordingly according to different embodiments of the pixel circuit.

[0067] Although the present invention is described with reference to specific exemplary embodiments, it should be understood that the present invention is not limited to such embodiments. However, the present invention intends to cover various modifications and equivalent arrangements made under the spirit and scope of the claims and equivalents thereof.

[0068] The embodiments above are only used for describing the technical solutions of the present invention instead of limiting the present invention. Although the present invention is described in detail with reference to preferred embodiments, those of ordinary knowledge in the related technical field may make some modifications and polishments without departing from the spirit and scope of the present invention. Therefore, the protection scope of the present invention should be subject to that defined by the claims.

Claims

1. A pixel circuit, comprising: a first power source, a second power source, an organic light-emitting diode, a first capacitor, a first transistor, a second transistor, and a third transistor; wherein

a cathode of the organic light-emitting diode is coupled to the second power source;
 the first capacitor is coupled between a node and the second power source; and each of the first transistor, the
 second transistor, and the third transistor is provided with a control end, a first electrode, and a second electrode;
 wherein

the control end of the first transistor is coupled to the node, and the first electrode of the first transistor is configured
 to receive a data signal;

the control end of the second transistor is configured to receive a first scanning signal, the first electrode of the
 second transistor is coupled to the second electrode of the first transistor, and the second electrode of the second
 transistor is coupled to the node;

the control end of the third transistor is coupled to the node, the first electrode of the third transistor is coupled to
 the first power source, and the second electrode of the third transistor is coupled to an anode of the light-emitting
 diode; and

the first transistor is configured to compensate a threshold voltage of the third transistor.

2. The pixel circuit according to claim 1, wherein the first transistor and the third transistor are approximate in channel
 width, and are arranged in the pixel circuit in a close range.

3. The pixel circuit according to claim 2, wherein:

the pixel circuit is arranged on a TFT backplane; and

the first transistor and the third transistor are symmetrically arranged on the TFT backplane.

4. The pixel circuit according to claim 1, further comprising a fourth transistor; wherein,
 a control end of the fourth transistor is configured to receive a second scanning signal, a first electrode of the fourth
 transistor is coupled to the second electrode of the third transistor, and a second electrode of the fourth transistor
 is coupled to an anode of the light-emitting diode.

5. The pixel circuit according to claim 1, further comprising a fifth transistor and a third power source;
 wherein the fifth transistor comprises: a control end configured to receive a third scanning signal, a first electrode
 coupled to the node, and a second electrode coupled to the third power source.

6. The pixel circuit according to claim 5, wherein a voltage of the third power source is lower than or equal to a voltage
 of the second power source.

7. The pixel circuit according to claim 5, further comprising a sixth transistor; wherein the sixth transistor comprises:
 a control end configured to receive the third scanning signal, a first electrode coupled to the anode of the light-
 emitting diode, and a second electrode coupled to the second power source.

8. The pixel circuit according to claim 1, further comprising a second capacitor coupled between the control end of the
 second transistor and the node.

9. The pixel circuit according to any one of claims 1 to 8, wherein:

the first transistor, the second transistor, the third transistor, the fourth transistor, the fifth transistor, and the
 sixth transistor are P-channel metal-oxide semiconductor transistors.

10. A method for driving a pixel circuit, wherein the pixel circuit comprises a first transistor, a second transistor, a third
 transistor, a storage capacitor and an organic light-emitting diode, and is driven by signals from data lines and
 scanning lines, and the drive method comprises

applying a first scanning signal to a first scanning line for conducting the second transistor such that data signals
 from data lines are provided to a node via the first transistor and the second transistor, and storing a voltage at the
 node in the storage capacitor, wherein a control end of the first transistor and a terminal of the storage capacitor
 are jointly coupled to the node;

providing the data signals to the light-emitting diode via the third transistor; and emitting, by the light-emitting diode,
 light with a brightness matching the data signals.

11. The drive method according to claim 10, wherein:

the pixel circuit further comprises a fourth transistor; and
the method further comprises:

applying a second scanning signal to a second scanning line for conducting the fourth transistor such that the data signals are provided to the light-emitting diode via the third transistor.

12. The drive method according to claim 11, wherein:

the pixel circuit further comprises a fifth transistor; and
a third scanning signal is applied for conducting the fifth transistor before the first scanning signal is applied, thereby initializing the node.

13. The drive method according to claim 10, wherein the first transistor and the third transistor are approximate in channel width, and are arranged in the pixel circuit in a close range.

14. The drive method according to claim 13, wherein:

the pixel circuits are arranged on a TFT backplane; and
the first transistor and the third transistor are symmetrically arranged on the TFT backplane.

15. A display device, comprising:

a scanning driver, configured to apply a scanning signal to a scanning line;
a data driver, configured to apply a data signal to a data line; and
a pixel circuit coupled between the data lines and scanning lines;
wherein the pixel circuit comprises: a first power source, a second power source, an organic light-emitting diode, a first capacitor, a first transistor, a second transistor, and a third transistor, wherein
the organic light-emitting diode comprises an anode and a cathode which is coupled to the second power source;
the first capacitor is coupled between a node and the second power source;
each of the first transistor, the second transistor, and the third transistor is provided with a control end, a first electrode, and a second electrode; wherein
the control end of the first transistor is coupled to the node, and the first electrode of the first transistor is coupled to the data line;
the control end of the second transistor is coupled to a first scanning line, the first electrode of the second transistor is coupled to the second electrode of the first transistor, and the second electrode of the second transistor is coupled to the node;
the control end of the third transistor is coupled to the node, the first electrode of the third transistor is coupled to the first power source, and the second electrode of the third transistor is coupled to an anode of the light-emitting diode; and
the first transistor is configured to compensate a threshold voltage of the third transistor.

16. The display device according to claim 15, wherein the first transistor and the third transistor are approximate in channel width, and are arranged in the pixel circuit in a close range.

17. The display device according to claim 16, wherein:

the display device further comprises a TFT backplane, the pixel circuit being arranged on the TFT backplane; and
the first transistor and the third transistor are symmetrically arranged on the TFT backplane.

18. The display device according to claim 15, further comprising a fourth transistor; wherein a control end of the fourth transistor is coupled to a second scanning line, a first electrode of the fourth transistor is coupled to the second electrode of the third transistor, and a second electrode of the fourth transistor is coupled to the anode of the light-emitting diode.

19. The display device according to claim 15, further comprising a fifth transistor and a third power source; wherein the fifth transistor comprises: a control end coupled to a third scanning line, a first electrode coupled to the node, and a second electrode coupled to the third power source.

20. The display device according to claim 19, wherein a voltage of the third power source is lower than or equal to a voltage of the second power source.

21. The display device according to claim 19, further comprising a sixth transistor;
wherein the sixth transistor comprises a control end coupled to the third scanning line jointly, a first electrode coupled to the anode of the light-emitting diode, and a second electrode coupled to the second power source.

22. The display device according to claim 15, further comprising a second capacitor coupled between the control end of the second transistor and the node.

23. The display device according to any one of claims 15 to 22, wherein the first transistor, the second transistor, the third transistor, the fourth transistor, the fifth transistor, and the sixth transistor are P-channel metal-oxide semiconductor transistors.

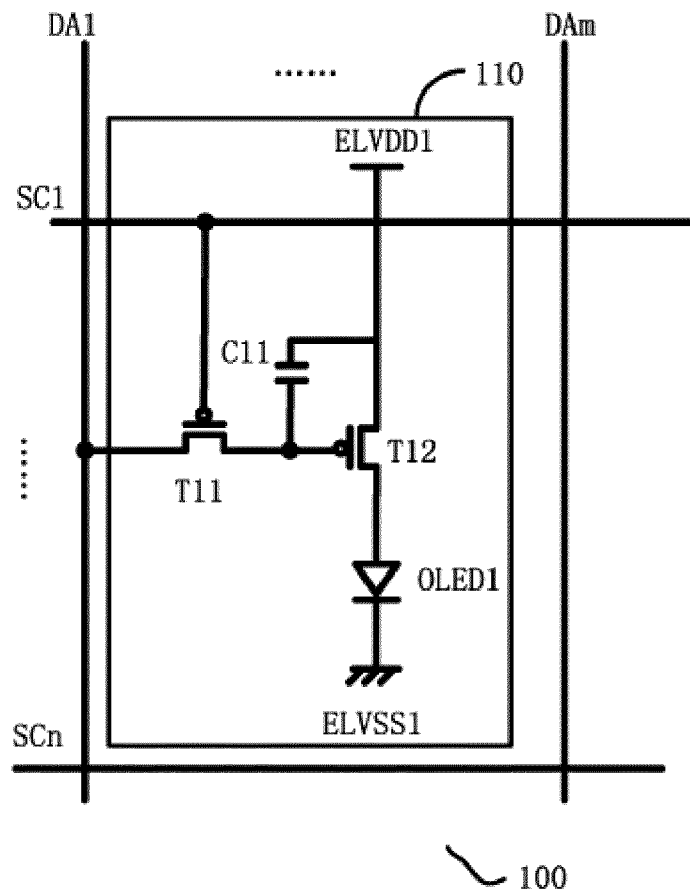


FIG. 1

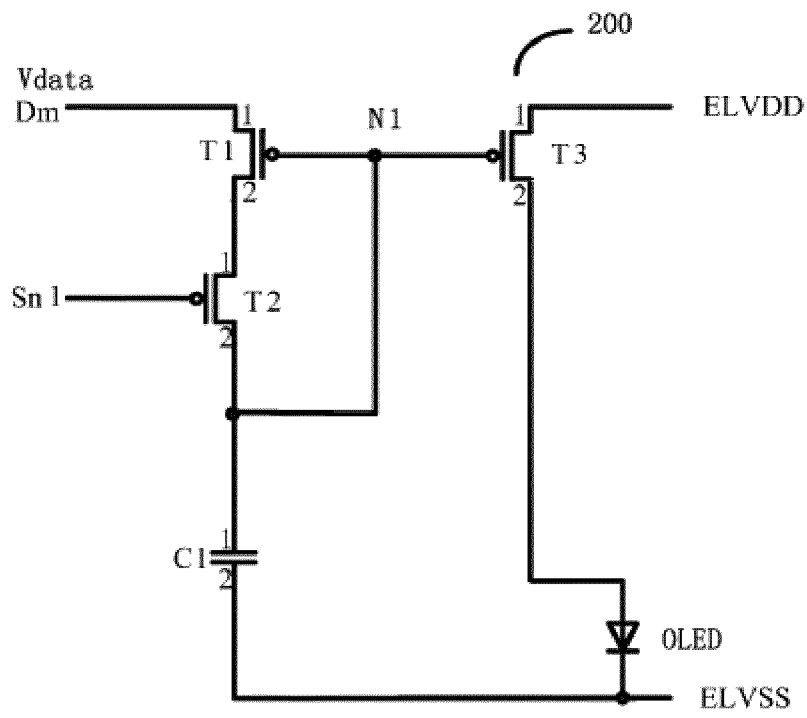


FIG. 2

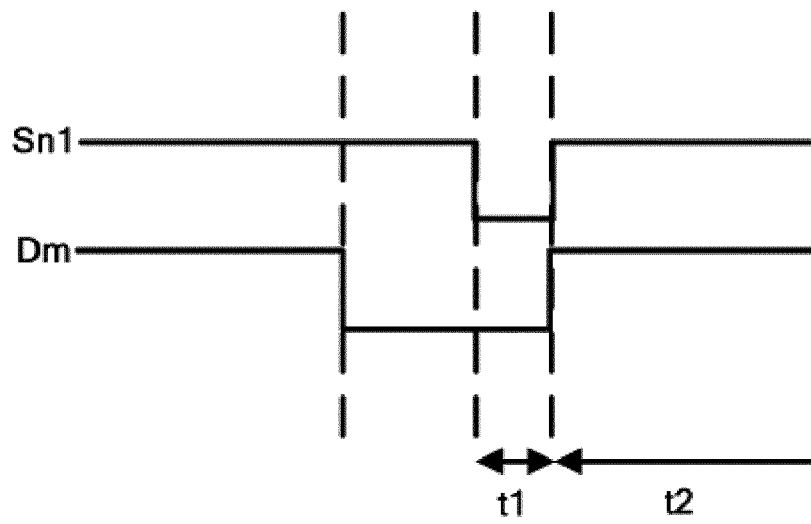


FIG. 3

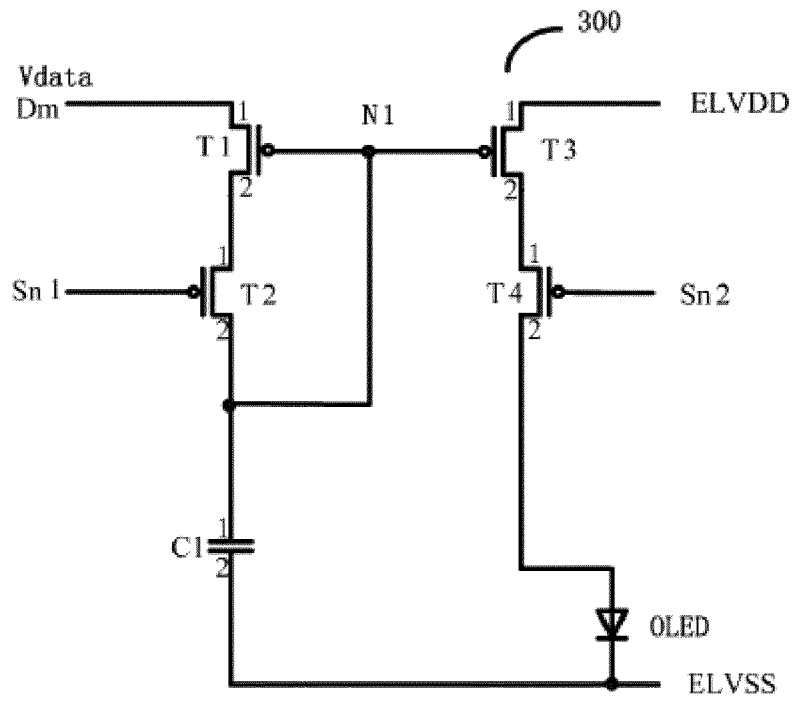


FIG. 4

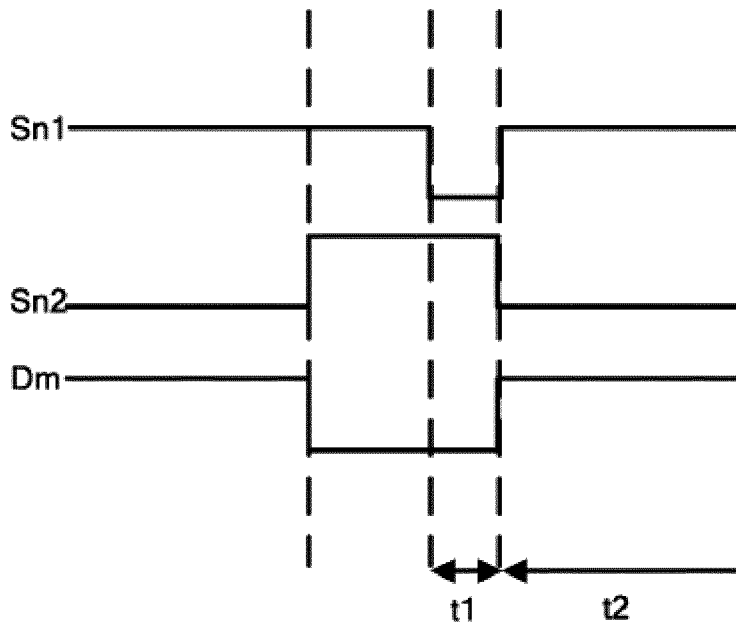


FIG. 5

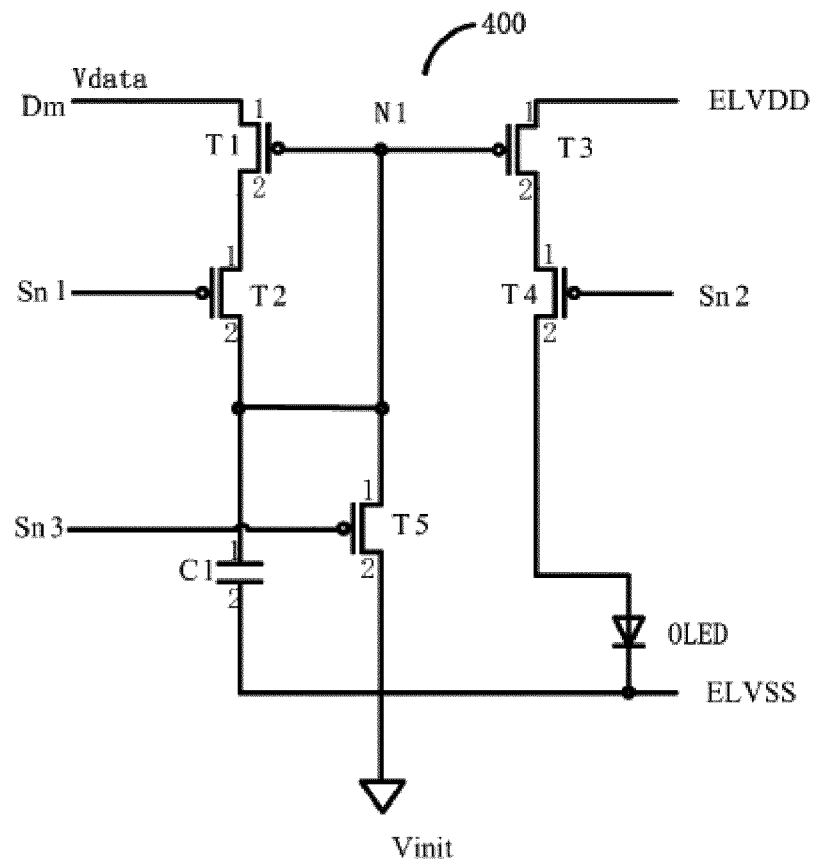


FIG. 6

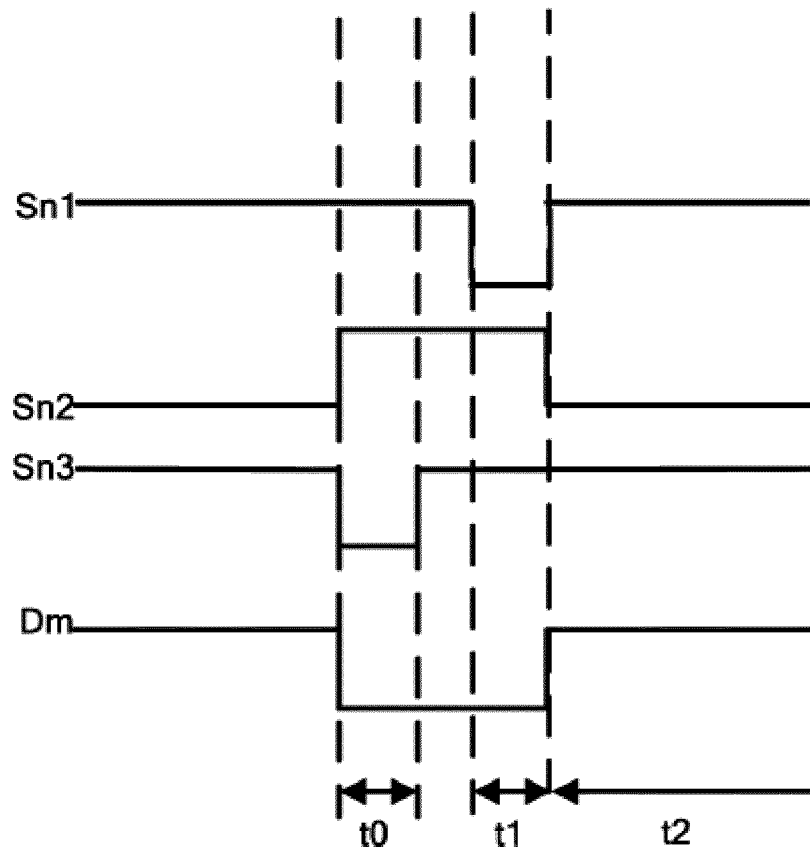


FIG. 7

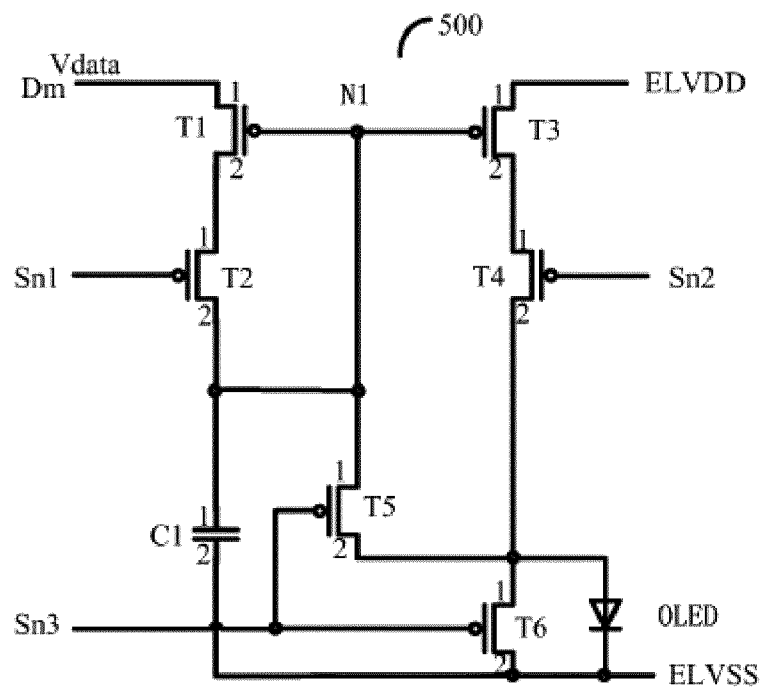


FIG. 8

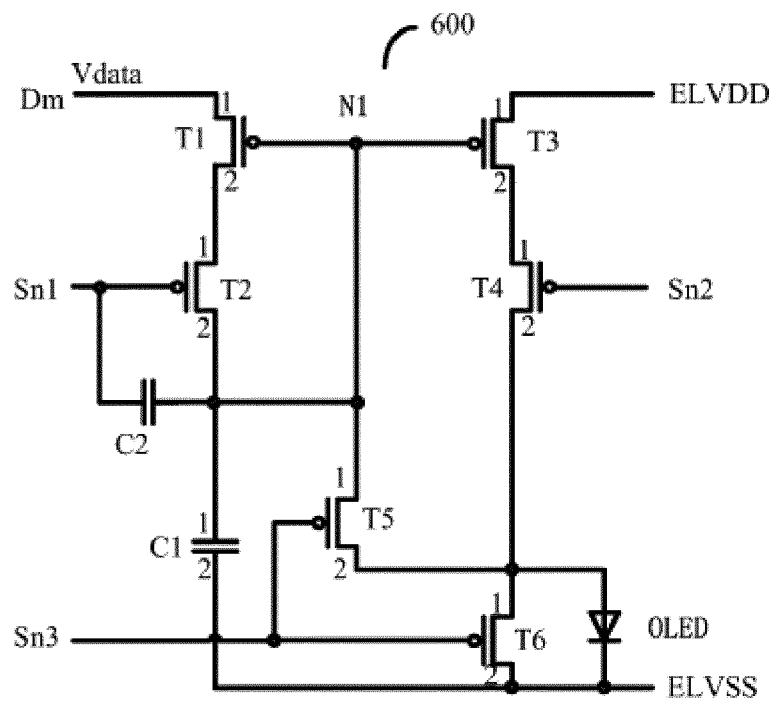


FIG. 9

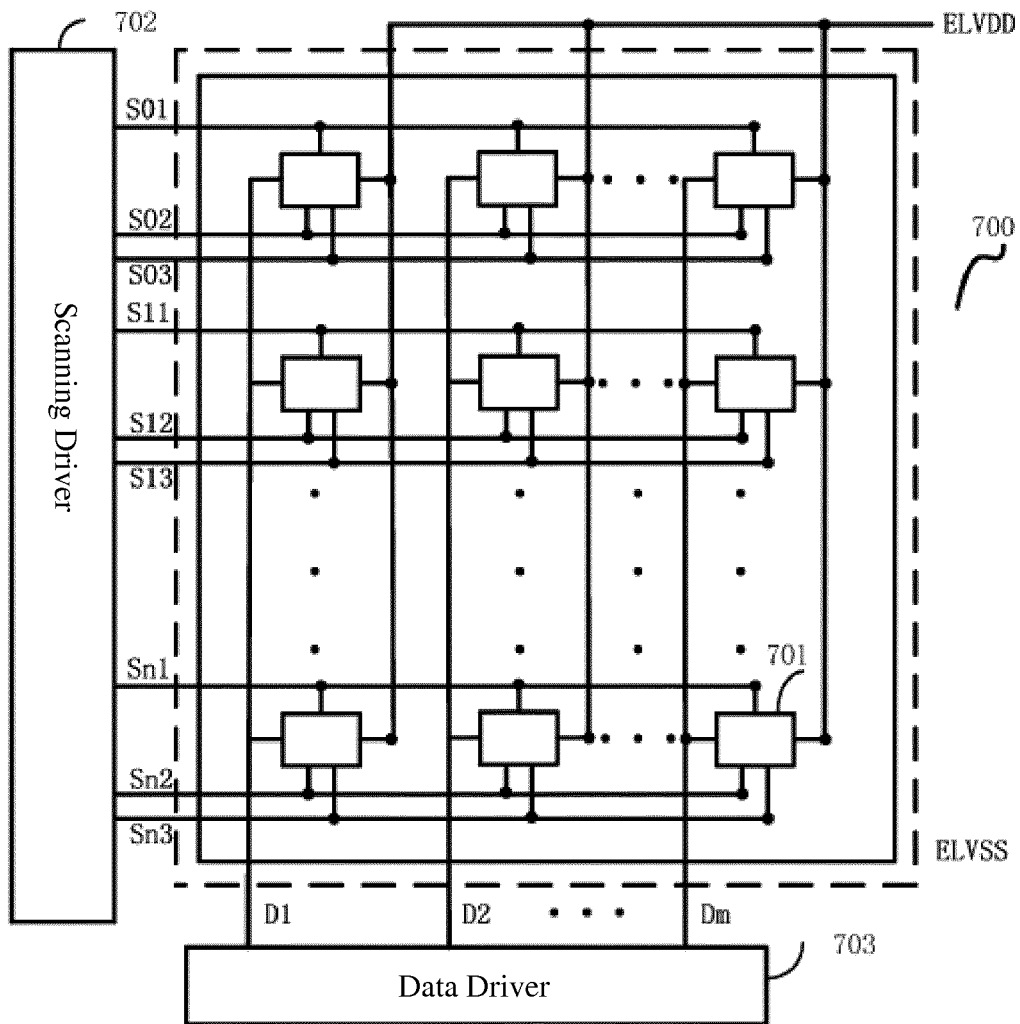


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2013/090103

A. CLASSIFICATION OF SUBJECT MATTER

G09G 3/32 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G09G 3, H05B 33

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS, CNTXT: light emitting diode, OLED, drive, voltage, threshold, transistor, TFT, compensate, correct, supplement, three, equal, same, match, symmetry, corresponding, close, similar

VEN: LED, light, emit+, diode?, driv+, voltage, threshold+, tft, transistor?, compensate+, retriiv+, redeem+, idemnit+, three, third, symmetr+, equal+, entical, los+ , roximit+

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 103021339 A (KUNSHAN NEW FLAT PANEL DISPLAY TECHNOLOGY CENTER CO., LTD.), 03 April 2013 (03.04.2013), claims 1-23	1-23
X	CN 1542718 A (SAMSUNG SDI CO., LTD.), 03 November 2004 (03.11.2004), description, pages 2-9, and figures 1-8	10-14
X	CN 1612194 A (SAMSUNG SDI CO., LTD.), 04 May 2005 (04.05.2005), description, pages 4-7, and figures 1-3	10
X	CN 1599518 A (SAMSUNG SDI CO., LTD.), 23 March 2005 (23.03.2005), description, pages 4-8, and figures 1-6	10-14

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

19 March 2014 (19.03.2014)

Date of mailing of the international search report

03 April 2014 (03.04.2014)

Name and mailing address of the ISA/CN:
 State Intellectual Property Office of the P. R. China
 No. 6, Xitucheng Road, Jimenqiao
 Haidian District, Beijing 100088, China
 Facsimile No.: (86-10) 62019451

Authorized officer

LIU, Xue

Telephone No.: (86-10) 62085841

Form PCT/ISA/210 (second sheet) (July 2009)

5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2013/090103

10

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 102254510 A (LG DISPLAY CO., LTD.), 23 November 2011 (23.11.2011), the whole document	1-23
A	JP 2006119180 A (SEIKO EPSON CORP.), 11 May 2006 (11.05.2006), the whole document	1-23
A	US 2010/0127955 A1 (SAMSUNG MOBILE DISPLAY CO., LTD.), 27 May 2010 (27.05.2010), the whole document	1-23

15

20

25

30

35

40

45

50

55

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2013/090103

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 103021339 A	03.04.2013	None	
CN 1542718 A	03.11.2004	US 7403176 B2	22.07.2008
		US 2004217925 A1	04.11.2004
		KR 100515299 B1	15.09.2005
		DE 60324097 D1	27.11.2008
		CN 100399392 C	02.07.2008
		JP 2004334163 A	25.11.2004
		EP 1473689 A2	03.11.2004
		EP 1473689 B1	15.10.2008
		KR 20040093785 A	09.11.2004
CN 1612194 A	04.05.2005	US 2005093787 A1	05.05.2005
		CN 100378781 C	02.04.2008
		KR 100778409 B1	22.11.2007
		KR 20050041078 A	04.05.2005
		US 7109982 B2	19.09.2006
CN 1599518 A	23.03.2005	US 7397450 B2	08.07.2008
		US 2005083271 A1	21.04.2005
		CN 100450321 C	07.01.2009
		KR 100560468 B1	13.03.2006
		KR 20050027741 A	21.03.2005
CN 102254510 A	23.11.2011	US 2011285691 A1	24.11.2011
		JP 2011242767 A	01.12.2011
		KR 20110127006 A	24.11.2011
		US 8462086 B2	11.06.2013
		JP 5227442 B2	03.07.2013
JP 2006119180 A	11.05.2006	JP 4747552 B2	17.08.2011
US 2010/0127955 A1	27.05.2010	KR 20100059317 A	04.06.2010
		KR 1008438 B1	14.01.2011

Form PCT/ISA/210 (patent family annex) (July 2009)

专利名称(译)	像素电路，显示装置及其驱动方法		
公开(公告)号	EP2940682A4	公开(公告)日	2015-11-04
申请号	EP2013869147	申请日	2013-12-20
[标]申请(专利权)人(译)	昆山工研院新型平板显示技术中心有限公司 昆山国显光电有限公司		
申请(专利权)人(译)	昆山新型平板显示技术中心CO.LTD 昆山GO-维信诺光电科技有限公司.		
当前申请(专利权)人(译)	昆山新型平板显示技术中心CO.LTD 昆山GO-维信诺光电科技有限公司.		
[标]发明人	ZHU HUI QIU YONG HUANG XIUQI GAO XIAOYU HU SIMING HAN ZHENZHEN		
发明人	ZHU, HUI QIU, YONG HUANG, XIUQI GAO, XIAOYU HU, SIMING HAN, ZHENZHEN		
IPC分类号	G09G3/32		
CPC分类号	G09G3/3258 G09G3/3233 G09G3/3291 G09G2300/0814 G09G2300/0819 G09G2300/0842 G09G2300/0852 G09G2300/0861 G09G2310/0251 G09G2310/0262 G09G2320/043 G09G2330/028		
优先权	201210587996.1 2012-12-31 CN		
其他公开文献	EP2940682B1 EP2940682A1		
外部链接	Espacenet		

摘要(译)

像素电路，显示装置及其驱动方法。像素电路包括：第一电源（ELVDD），第二电源（ELVSS），有机发光二极管（OLED），第一电容（C1），第一晶体管（T1），第二晶体管（T2）和第三晶体管（T3），其中第一晶体管（T1）被配置为补偿第三晶体管（T3）的阈值电压。根据该驱动方法，通过顺序地将扫描信号施加到扫描线（Sn1，Sn2，Sn3）上的像素电路来驱动像素电路发光。像素电路和用于驱动像素电路的方法可以改善有源矩阵有机发光二极管的响应特性，从而使显示装置能够显示具有均匀图像质量的图像。