

(19)



(11)

EP 3 349 205 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
30.10.2019 Bulletin 2019/44

(51) Int Cl.:
G09G 3/3233 (2016.01)

(21) Application number: **18151515.6**

(22) Date of filing: **12.01.2018**

(54) **PIXEL AND ORGANIC LIGHT EMITTING DISPLAY DEVICE USING THE SAME**
PIXEL UND ORGANISCHE LICHEMITTIERENDE ANZEIGEVORRICHTUNG DAMIT
PIXEL ET DISPOSITIF D’AFFICHAGE ÉLECTROLUMINESCENT ORGANIQUE L’UTILISANT

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **17.01.2017 KR 20170008251**

(43) Date of publication of application:
18.07.2018 Bulletin 2018/29

(73) Proprietor: **Samsung Display Co., Ltd.**
Yongin-si
Gyeonggi-do 17113 (KR)

(72) Inventors:
• **CHUNG, Bo Yong**
Gyeonggi-do (KR)
• **PARK, Jun Hyun**
Gyeonggi-do (KR)
• **SEO, Young Wan**
Gyeonggi-do (KR)
• **LEE, An Su**
Gyeonggi-do (KR)

• **JO, Kang Moon**
Gyeonggi-do (KR)
• **CHAI, Chong Chul**
Gyeonggi-do (KR)

(74) Representative: **Mouteney, Simon James**
Marks & Clerk LLP
15 Fetter Lane
London EC4A 1BW (GB)

(56) References cited:
WO-A1-2009/117092 US-A1- 2006 044 244
US-A1- 2013 222 356

• **MAVIENGA ET AL: "Oxide Versus LTPS TFTs for
Active-Matrix Displays", INTERNET CITATION, 30
June 2014 (2014-06-30), pages 1-4, XP002773066,
Retrieved from the Internet:
URL: <http://onlinelibrary.wiley.com/doi/10.1002/j.2168-0159.2014.tb00001.x/pdf> [retrieved
on 2017-08-18]**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 349 205 B1

Description

BACKGROUND

FIELD

[0001] Embodiments of the invention relate to a pixel and an organic light emitting display device using the same. More particularly, embodiments relate to a pixel capable of improving display quality and an organic light emitting display device using the pixel.

DISCUSSION OF THE BACKGROUND

[0002] With the constant development of information technologies, the importance of a display device, which is a connection medium between a user and information, increases. Accordingly, display devices, such as a liquid crystal display device and an organic light emitting display device, are increasingly being used.

[0003] Among these display devices, the organic light emitting display device displays images using an organic light emitting diode that generates light by recombination of electrons and holes. The organic light emitting display device has a high response speed and is driven with low power consumption.

[0004] The organic light emitting display device includes pixels coupled to data lines and scan lines. Each of the pixels generally includes an organic light emitting diode and a driving transistor for controlling an amount of current flowing through the organic light emitting diode. Each of the pixels generates light with a predetermined luminance while supplying current from the driving transistor to the organic light emitting diode, corresponding to a data signal.

[0005] The pixel may include a plurality of transistors, e.g., six or more, transistors and a plurality of capacitors so as to compensate for a variation in threshold voltage of the driving transistor. When the plurality of transistors are included in the pixel, it is difficult to apply the pixel to a high-resolution panel. Thus, there is need for a pixel capable of improving display quality while minimizing the number of transistors included therein.

[0006] The above information disclosed in this Background section is only for enhancement of understanding of the background of the inventive concept, and, therefore, it may contain information that does not form the prior art that is already known in this country to a person of ordinary skill in the art.

[0007] WO 2009/117092 discloses an EL light-emitting element that is driven digitally to reduce power consumption using a pixel having three transistors and two capacitors. A reset transistor for diode connection writes the threshold voltage of the drive transistor onto a coupling capacitor. The data voltage plus threshold voltage is then written onto the gate of the drive transistor. This reduces the amplitude of the data voltage required, further reducing power consumption.

[0008] US 2013/222356 discloses a pixel having a simplified structure that can compensate for the threshold voltage of a driving transistor. The pixel includes an organic light emitting diode having a cathode electrode coupled to a second power source, a storage capacitor coupled between a data line and a first node, a second transistor having a first electrode coupled to a first power source, a second electrode coupled to an anode electrode of the organic light emitting diode, and a gate electrode coupled to the first node. A first transistor is coupled between the first node and the second electrode of the second transistor, a gate electrode of the first transistor is coupled to a current scan line, a third transistor is coupled between the second electrode of the second transistor and the anode electrode of the organic light emitting diode, and a gate electrode of the third transistor is coupled to a control line.

[0009] The paper "Oxide Versus LTPS TFTs for Active-Matrix Displays" by Mativenga et al discloses a review of the comparison of LTPS and Oxide TFTs for AMOLED backplane applications. The bulk accumulation mode oxide TFTs for AMOLED backplanes is proposed.

[0010] US 2006/044244 discloses a display device that makes it possible to shorten a selection period per pixel while compensating variations in a threshold voltage of the driving transistor, and a method for driving the same are achieved. In a pixel circuit, a potential wire is set to a potential, a voltage of a gate wire becomes Low, a voltage of a control wire becomes High, and a voltage of a control wire becomes High, so that a gate terminal of a driving TFT has a potential of a data wire. Moreover, a voltage of the gate wire becomes High so as to compensate a threshold voltage of the driving TFT. Thereafter, a voltage of the control wire becomes Low, and the potential wire is set to a potential, so that a voltage of a capacitor, i.e., a gate-source voltage of the driving TFT is changed. This causes a voltage of the control wire to be Low, so that a driving current is flown into an organic light emitting element.

SUMMARY

[0011] The invention sets out to provide a pixel capable of improving display quality while minimizing the number of transistors included therein and an organic light emitting display device using the pixel. The invention is defined in the independent claims.

[0012] Additional aspects will be set forth in the detailed description which follows, and, in part, will be apparent from the disclosure, or may be learned by practice of the inventive concept.

[0013] According to embodiments, there is provided a pixel including: an organic light emitting diode; a first transistor for controlling the amount of current flowing from a first driving power source to a second driving power source via the organic light emitting diode, corresponding to a voltage of a first node; a second transistor coupled between the first node and a second node, the second

transistor being turned on when a scan signal is supplied to an i th (i is a natural number) scan line; a third transistor coupled between the second node and an anode electrode of the organic light emitting diode; a first capacitor coupled between a data line and the second node; and a fourth transistor coupled between an initialization power source and the anode electrode of the organic light emitting diode, the fourth transistor being turned on when a first control signal is supplied to a first control line.

[0014] The pixel may further include a storage capacitor coupled between the first node and the initialization power source.

[0015] A turn-on period of the fourth transistor may at least partially overlap with that of the second transistor.

[0016] The third transistor may be turned on when a second control signal is supplied to a second control line, and a turn-on period of the third transistor may at least partially overlap with that of the second transistor.

[0017] The third transistor may be turned on when a scan signal is supplied to an $(i+1)$ th scan line.

[0018] The third transistor the third transistor may be turned on when the scan signal is supplied to the i th scan line.

[0019] The first transistor may be an N-type transistor.

[0020] The second to fourth transistors may be N-type transistors.

[0021] At least one of the first to fourth transistors may be a poly-silicon semiconductor transistor.

[0022] At least one of the first to fourth transistors may be an oxide semiconductor transistor.

[0023] At least one of the second to fourth transistors may be a P-type transistor.

[0024] According to another aspect of the inventive concept, there is provided a pixel including: an organic light emitting diode; a first transistor for controlling the amount of current flowing from a first driving power source to a second driving power source via the organic light emitting diode, corresponding to a voltage of a first node; a second transistor coupled between the first node and an anode electrode of the organic light emitting diode, the second transistor being turned on when a scan signal is supplied to an i th scan line; a third transistor coupled between the anode electrode of the organic light emitting diode and a first terminal of a first capacitor, the third transistor being turned on when the scan signal is supplied to the i th scan line; the first capacitor coupled between the third transistor and a data line; and a fourth transistor coupled between an initialization power source and the anode electrode of the organic light emitting diode, the fourth transistor being turned on when a first control signal is supplied to a first control line.

[0025] The pixel may further include a storage capacitor coupled between the first node and the initialization power source.

[0026] A turn-on period of the fourth transistor may at least partially overlap with that of the second transistor.

[0027] According to still another aspect of the inventive concept, there is provided an organic light emitting dis-

play device driven during one frame period divided into an initialization period, a threshold voltage compensation period, a programming period, and a light emission period, the organic light emitting display device including: pixels located to be coupled to scan lines and data lines; a scan driver for supplying a scan signal to the scan lines; a control driver for supplying a first control signal to a first control line commonly coupled to the pixels; and a power supply unit for supplying, to the pixels, a first driving power source, a second driving power source, and an initialization power source, wherein a pixel located on an i th (i is a natural number) horizontal line includes: an organic light emitting diode; a first transistor for controlling the amount of current flowing from the first driving power source to the second driving power source via the organic light emitting diode, corresponding to a voltage of a first node; a second transistor coupled between the first node and a second node, the second transistor being turned on when a scan signal is supplied to an i th scan line; a third transistor coupled between the second node and an anode electrode of the organic light emitting diode; a first capacitor coupled between a data line and the second node; and a fourth transistor coupled between the initialization power source and the anode electrode of the organic light emitting diode, the fourth transistor being turned on when the first control signal is supplied to the first control line.

[0028] The control driver may supply the first control signal during the initialization period.

[0029] The scan driver may simultaneously supply the scan signal to the scan lines during the initialization period and the threshold voltage compensation period, and sequentially supply the scan signal to the scan lines during the programming period.

[0030] The power supply unit may supply the initialization power source having a first voltage during the initialization period, the threshold voltage compensation period, and the programming period, and supply the initialization power source having a second voltage higher than the first voltage during the light emission period.

[0031] The first voltage may be set such that the organic light emitting diode does not emit light.

[0032] The power supply unit may supply the first driving power source having a third voltage during the threshold voltage compensation period, and supply the first driving power source having a fourth voltage higher than the third voltage during the other periods.

[0033] The first voltage may be set to a voltage higher than the third voltage.

[0034] The pixel located on the i th horizontal line may further include a storage capacitor coupled between the first node and the initialization power source.

[0035] The organic light emitting display device may further include a second control line commonly coupled to the pixels. The control driver may supply a second control signal to the second control line during the initialization period and the threshold voltage compensation period.

[0036] The third transistor may be turned on when the second control signal is supplied.

[0037] The third transistor may be turned on when a scan signal is supplied to an (i+1)th scan line.

[0038] The third transistor may be turned on when the scan signal is supplied to the ith scan line.

[0039] The first transistor may be an N-type transistor.

[0040] The second to fourth transistors may be N-type transistors.

[0041] At least one of the first to fourth transistors may be a poly-silicon semiconductor transistor.

[0042] At least one of the first to fourth transistors may be an oxide semiconductor transistor.

[0043] At least one of the second to fourth transistors may be a P-type transistor.

[0044] The foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0045] The accompanying drawings, which are included to provide a further understanding of the inventive concept, and are incorporated in and constitute a part of this specification, illustrate embodiments of the inventive concept, and, together with the description, serve to explain principles of the inventive concept.

FIG. 1 is a diagram illustrating an organic light emitting display device according to an embodiment of the inventive concept.

FIG. 2 is a diagram illustrating an embodiment of a pixel shown in FIG. 1.

FIG. 3 is a waveform diagram illustrating an embodiment of a driving method of the pixel shown in FIG. 2.

FIG. 4 is a diagram illustrating another embodiment of the pixel shown in FIG. 1.

FIG. 5 is a waveform diagram illustrating an embodiment of a driving method of the pixel shown in FIG. 4.

FIG. 6 is a diagram illustrating still another embodiment of the pixel shown in FIG. 1.

FIG. 7 is a waveform diagram illustrating an embodiment of a driving method of the pixel shown in FIG. 6.

FIG. 8 is a diagram illustrating still another embodiment of the pixel shown in FIG. 1.

FIG. 9 is a waveform diagram illustrating an embodiment of a driving method of the pixel shown in FIG. 8.

FIG. 10A, FIG. 10B, FIG. 10C, and FIG. 10D are diagrams illustrating still other embodiments of the pixel shown in FIG. 1.

FIG. 11A, FIG. 11B, FIG. 11C, and FIG. 11D are diagrams illustrating still other embodiments of the pixel shown in FIG. 1.

FIG. 12 is a diagram illustrating an organic light emitting display device according to another embodiment of the inventive concept.

FIG. 13 is a diagram illustrating an embodiment of a

pixel shown in FIG. 12.

FIG. 14 is a waveform diagram illustrating an embodiment of a driving method of the pixel shown in FIG. 13.

FIG. 15A and FIG. 15B are diagrams illustrating other embodiments of the pixel shown in FIG. 13.

FIG. 16A, FIG. 16B, FIG. 16C, and FIG. 16D are diagrams illustrating still other embodiments of the pixel shown in FIG. 13.

FIG. 17 is a diagram illustrating still another embodiment of the pixel shown in FIG. 13.

FIG. 18 is a diagram illustrating still another embodiment of the pixel shown in FIG. 13.

FIG. 19 is a waveform diagram illustrating an embodiment of a driving method of the pixel shown in FIG. 18.

FIG. 20A and FIG. 20B are diagrams illustrating still other embodiments of the pixel shown in FIG. 13.

FIG. 21A, FIG. 21B, and FIG. 21C are diagrams illustrating still other embodiments of the pixel shown in FIG. 13.

FIG. 22 is a diagram illustrating still another embodiment of the pixel shown in FIG. 13.

FIG. 23 is a diagram illustrating still another embodiment of the pixel shown in FIG. 13.

DETAILED DESCRIPTION

[0046] In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of various embodiments. It is apparent, however, that various embodiments may be practiced without these specific details or with one or more equivalent arrangements. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring various embodiments.

[0047] In the accompanying figures, the size and relative sizes of layers, films, panels, regions, etc., may be exaggerated for clarity and descriptive purposes. Also, like reference numerals denote like elements.

[0048] When an element or layer is referred to as being "on," "connected to," or "coupled to" another element or layer, it may be directly on, connected to, or coupled to the other element or layer or intervening elements or layers may be present. When, however, an element or layer is referred to as being "directly on," "directly connected to," or "directly coupled to" another element or layer, there are no intervening elements or layers present. For the purposes of this disclosure, "at least one of X, Y, and Z" and "at least one selected from the group consisting of X, Y, and Z" may be construed as X only, Y only, Z only, or any combination of two or more of X, Y, and Z, such as, for instance, XYZ, XYY, YZ, and ZZ. Like numbers refer to like elements throughout. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items.

[0049] Although the terms first, second, etc. may be

used herein to describe various elements, components, regions, layers, and/or sections, these elements, components, regions, layers, and/or sections should not be limited by these terms. These terms are used to distinguish one element, component, region, layer, and/or section from another element, component, region, layer, and/or section. Thus, a first element, component, region, layer, and/or section discussed below could be termed a second element, component, region, layer, and/or section without departing from the teachings of the inventive concept.

[0050] Spatially relative terms, such as "beneath," "below," "lower," "above," "upper," and the like, may be used herein for descriptive purposes, and, thereby, to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the drawings. Spatially relative terms are intended to encompass different orientations of an apparatus in use, operation, and/or manufacture in addition to the orientation depicted in the drawings. For example, if the apparatus in the drawings is turned over, elements described as "below" or "beneath" other elements or features would then be oriented "above" the other elements or features. Thus, the exemplary term "below" can encompass both an orientation of above and below. Furthermore, the apparatus may be otherwise oriented (e.g., rotated 90 degrees or at other orientations), and, as such, the spatially relative descriptors used herein interpreted accordingly.

[0051] The terminology used herein is for the purpose of describing particular embodiments and is not intended to be limiting. As used herein, the singular forms, "a," "an," and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. Moreover, the terms "comprises," "comprising," "includes," and/or "including," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, components, and/or groups thereof, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0052] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure is a part. Terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense, unless expressly so defined herein.

[0053] FIG. 1 is a diagram illustrating an organic light emitting display device according to an embodiment of the inventive concept.

[0054] Referring to FIG. 1, the organic light emitting display device includes a pixel unit 100, a scan driver 110, a data driver 120, a control driver 130, a timing controller 140, a host system 150, and a power supply unit 160.

[0055] The host system 150 supplies image data RGB

to the timing controller 140 through a predetermined interface. Also, the host system 150 may supply, to the timing controller 140, a vertical synchronization signal Vsync, a horizontal synchronization signal Hsync, a data enable signal DE, a clock signal CLK, and the like.

[0056] The timing controller 140 generates a scan driving control signal SCS, a data driving control signal DCS, a control driving control signal CCS, and a timing signal TS, corresponding to the vertical synchronization signal Vsync, the horizontal synchronization signal Hsync, the data enable signal DE, the clock signal CLK, and the like, which are output from the host system 150.

[0057] The scan driving control signal SCS generated by the timing controller 140 is supplied to the scan driver 110, the data driving control signal DCS generated by the timing controller 140 is supplied to the data driver 120, the control driving control signal CCS generated by the timing controller 140 is supplied to the control driver 130, and the timing signal TS generated by the timing controller 140 is supplied to the power supply unit 160. In addition, the timing controller 140 realigns data RGB supplied from the outside and supplies the realigned data RGB to the data driver 120.

[0058] The scan driving control signal SCS may include a scan start pulse and clock signals. The scan start pulse controls a first timing of a scan signal. The clock signals are used to shift the scan start pulse.

[0059] The data driving control signal DCS may include a source start pulse and clock signals. The source start pulse controls a sampling start time of data. The clock signals are used to control a sampling operation.

[0060] The control driving control signal CCS controls the control driver 130. The control driving control signal CCS may include at least one control start pulse.

[0061] The timing signal TS may include signals for dividing one frame period. For example, the timing signal TS may include signals for dividing one frame period into an initialization period, a threshold voltage compensation period, a programming period, and a light emission period, which are shown in FIG. 3.

[0062] The scan driver 110 supplies a scan signal to scan lines S in response to the scan driving control signal SCS. For example, the scan driver 110, as shown in FIG. 3, may simultaneously supply the scan signal to the scan lines S during the initialization period and the threshold voltage compensation period. The scan driver 110 may sequentially supply the scan signal to the scan lines during the programming period. If the scan signal is supplied to the scan lines S, pixels PXL are selected. To this end, the scan signal may be set to a gate-on voltage such that transistors included in the pixels PXL can be turned on.

[0063] The scan driver 110 may be mounted on a substrate through a thin film process. The scan driver 110 may be located at both sides of the pixel unit 100.

[0064] The data driver 120 supplies a data signal to data lines D, corresponding to the data driving control signal DCS. For example, the data driver 120 may supply the data signal to the data lines D to be synchronized

with the scan signal supplied to the scan lines S during the programming period. The data signal supplied to the data lines D is supplied to the pixels PXL selected by the scan signal. The data driver 120 supplies a predetermined voltage to the data lines D during the other periods (i.e., the initialization period, the threshold voltage compensation period, and the light emission period) except the programming period. Here, the predetermined voltage may be set to a specific voltage within a voltage range of the data signal supplied from the data driver 120.

[0065] The control driver 130 supplies a first control signal to a first control line CL1 and supplies a second control signal to a second control line CL2. For example, the control driver 130 may supply the first control signal to the first control line CL1 during the initialization period, and supply the second signal to the second control line CL2 during the initialization period and the threshold voltage compensation period. If the first control signal is supplied to the first control line CL1 and the second control signal is supplied to the second control line CL2, an anode electrode of an organic light emitting diode OLED and a gate electrode of a driving transistor, which are included in each of the pixels PXL, are initialized.

[0066] Each of the first control signal and the second control signal is set to the gate-on voltage such that the transistors included in the pixels PXL can be turned on. Additionally, the first control line CL1 and the second control line CL2 are commonly coupled to the pixels PXL, and accordingly, the pixels PXL can be driven in a simultaneous driving manner.

[0067] In FIG. 1, the control driver 130 is illustrated as a driver separate from the scan driver 110, but the inventive concept is not limited thereto. For example, the control driver 130 and the scan driver 110 may be implemented as one driver.

[0068] The power supply unit 160 generates an initialization power source Vint, a first driving power source ELVDD, and a second driving power source ELVSS and supplies the initialization power source Vint, the first driving power source ELVDD, and the second driving power source ELVSS to the pixels PXL.

[0069] The power supply unit 160 supplies the initialization power source Vint having a first voltage V1 to the pixels PXL during the initialization period, the threshold voltage compensation period, and the programming period, and supplies the initialization power source Vint having a second voltage V2 to the pixels PXL during the light emission period. Here, the second voltage V2 is set to a voltage higher than the first voltage V1.

[0070] The power supply unit 160 also supplies the first driving power source ELVDD having a third voltage V3 to the pixels PXL during the threshold voltage compensation period, and supplies the first driving power source ELVDD having a fourth voltage V4 to the pixels PXL during the other periods (i.e., the initialization period, the programming period, and the light emission period). Here, the third voltage V3 is set to a voltage lower than the first voltage V1.

[0071] The power supply unit 160 supplies the second driving power source ELVSS having a predetermined voltage to the pixels PXL during one frame period 1F. That is, the second driving power source ELVSS maintains a constant voltage during the one frame period 1F. The voltage of the second driving power source ELVSS is set to a voltage lower than the fourth voltage V4 such that the pixels PXL can emit light during the light emission period.

[0072] The pixel unit 100 includes pixels PXL located to be coupled to the data lines D, the scan lines S, the first control line CL1, and the second control line CL2. The pixels PXL are supplied with the first driving power source ELVDD, the second driving power source ELVSS, and the initialization power source Vint from the power supply unit 160.

[0073] Each of the pixels PXL is supplied with the data signal from the data line D during the programming period. The pixel supplied with the data signal controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via an organic light emitting diode (not shown), corresponding to the data signal, during the light emission period. At this time, the organic light emitting diode generates light with a predetermined luminance corresponding to the amount of the current.

[0074] FIG. 2 is a diagram illustrating an embodiment of the pixel shown in FIG. 1. For convenience of illustration, a pixel coupled to an i th (i is a natural number) scan line Si and an m th data line Dm is illustrated in FIG. 2.

[0075] Referring to FIG. 2, the pixel PXL according to the embodiment of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC for controlling the amount of current supplied to the organic light emitting diode OLED.

[0076] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC, and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC during the light emission period.

[0077] The pixel circuit PC controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal, during the light emission period. To this end, the pixel circuit PC includes first to fourth transistors M1 to M4, a storage capacitor Cst, and a first capacitor C1.

[0078] A first electrode of the first transistor (or driving transistor) M1 is coupled to the first driving power source ELVDD, and a second electrode of the first transistor M1 is coupled to the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the first transistor M1 is coupled to a first node N1. The first transistor M1 controls the amount of current flowing the first driving power source ELVDD to the second driving power

source ELVSS via the organic light emitting diode OLED, corresponding to a voltage of the first node N1.

[0079] The second transistor M2 and the third transistor M3 are coupled in series between the first node N1 and the anode electrode of the organic light emitting diode OLED. That is, the second transistor M2 is coupled between the first node N1 and a second node N2, and the third transistor M3 is coupled between the second node N2 and the anode electrode of the organic light emitting diode OLED.

[0080] A gate electrode of the second transistor M2 is coupled to an *i*th scan line Si. The second transistor M2 is turned on when the scan signal is supplied to the *i*th scan line Si to allow the first node N1 and the second node N2 to be electrically coupled to each other.

[0081] A gate electrode of the third transistor M3 is coupled to the second control line CL2. The third transistor M3 is turned on when the second control signal is supplied to the second control line CL2 to allow the second node N2 and the anode electrode of the organic light emitting diode OLED to be electrically coupled to each other.

[0082] The fourth transistor M4 is coupled between the initialization power source Vint and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the fourth transistor M4 is coupled to the first control line CL1. The fourth transistor M4 is turned on when the first control signal is supplied to the first control line CL1. If the fourth transistor M4 is turned on, the first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0083] The storage capacitor Cst is coupled between the initialization power source Vint and the first node N1. The storage capacitor Cst stores voltages corresponding to the data signal and a threshold voltage of the first transistor M1.

[0084] The first capacitor C1 is coupled between a data line Dm and the second node N2 that is a common node of the second transistor M2 and the third transistor M3. The first capacitor C1 controls a voltage of the second node N2, corresponding to a voltage of the data line Dm.

[0085] FIG. 3 is a waveform diagram illustrating an embodiment of a driving method of the pixel shown in FIG. 2.

[0086] Referring to FIG. 3, one frame period 1F is divided into an initialization period, a threshold voltage compensation period, a programming period, and a light emission period.

[0087] During the initialization period, the first node N1 and the anode electrode of the organic light emitting diode OLED are initialized to the first voltage V1 by the initialization power source Vint.

[0088] During the threshold voltage compensation period, a voltage corresponding to the threshold voltage of the first transistor M1 is stored in the storage capacitor Cst.

[0089] During the programming period, a voltage corresponding to the data signal is stored in the storage

capacitor Cst.

[0090] During the light emission period, the organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC.

[0091] An operating process of the pixel PXL will be described. First, the scan signal is supplied to all of the scan lines S during the initialization period. In addition, during the initialization period, the first control signal is supplied to the first control line CL1, and the second control signal is supplied to the second control line CL2.

[0092] If the first control signal is supplied to the first control line CL1, the fourth transistor M4 included in each of the pixels PXL is turned on. If the fourth transistor M4 is turned on, the first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0093] If the second control signal is supplied to the second control line CL2, the third transistor M3 included in each of the pixels PXL is turned on. If the scan signal is supplied to the scan lines S, the second transistor M2 included in each of the pixels PXL is turned on. If the second transistor M2 and the third transistor M3 are turned on, the first node N1 and the anode electrode of the organic light emitting diode OLED are electrically coupled to each other. Then, the first voltage of the initialization power source Vint is supplied to the first node N1. That is, during the initialization period, the anode electrode of the organic light emitting diode OLED and the first node N1, which are included in each of the pixels PXL, are initialized to the first voltage V1 of the initialization power source Vint. Here, the first voltage V1 may be set such that the organic light emitting diode OLED does not emit light.

[0094] The supply of the first control to the first control line CL1 is stopped during the threshold voltage compensation period. If the supply of the first control signal to the first control line CL1 is stopped, the fourth transistor M4 is turned off. In addition, the first driving power source ELVDD is set to the third voltage V3 during the threshold voltage compensation period. Here, the third voltage V3 is set to a voltage lower than the first voltage V1.

[0095] During the threshold voltage compensation period, the scan signal is supplied to the scan lines S, and the second control signal is supplied to the second control line CL2. That is, the supply of the scan signal and the second control signal is maintained during the initialization period and the threshold voltage compensation period.

[0096] If the second transistor M2 and the third transistor M3 are turned on, the first transistor M1 is diode-coupled such that current can flow from the anode electrode of the organic light emitting diode OLED to the first driving power source ELVDD. Then, current is supplied from the first node N1 and the anode electrode of the organic light emitting diode OLED, which are set to the first voltage V1, to the first driving power source ELVDD set to the third voltage V3.

[0097] At this time, since the first transistor M1 is diode-coupled, as described above, the voltage of the first node N1 is set to a voltage obtained by adding an absolute value of the threshold voltage of the first transistor M1 to the third voltage V3 of the first driving power source ELVDD. That is, a voltage corresponding to the threshold voltage of the first transistor M1 is applied to the first node N1 during the threshold voltage compensation period. The voltage corresponding to the threshold voltage of the first transistor M1, which is applied to the first node N1, is stored in the storage capacitor Cst during the threshold voltage compensation period.

[0098] The scan signal is simultaneously supplied to all of the scan lines S during the initialization period and the threshold voltage compensation period. Therefore, a voltage corresponding to the threshold voltage of the first transistor M1 coupled to the storage capacitor Cst included in each of the pixels PXL is stored in the storage capacitor Cst during the initialization period and the threshold voltage compensation period.

[0099] The scan signal is sequentially supplied to the scan lines S during the programming period. In addition, the first driving power source ELVDD is set to the fourth voltage V4 higher than the third voltage V3.

[0100] If the scan signal is supplied to the *i*th scan line Si, the second transistor M2 coupled to the *i*th scan line Si is turned on. If the second transistor M2 is turned on, the first node N1 and the second node N2 are electrically coupled to each other.

[0101] A data signal is supplied to the data line Dm to be synchronized with the *i*th scan line Si. If the data signal is supplied to the data line Dm, voltages of the second node N2 and the first node N1 are changed by coupling of the first capacitor C1. That is, if the second transistor M2 is turned on, the voltage of the first node N1 is set corresponding to the voltage of the data signal. Therefore, voltages corresponding to the threshold voltage of the first transistor M1 and the data signal are stored in the storage capacitor Cst included in each of the pixels PXL during the programming period.

[0102] In other words, the scan signal is sequentially supplied to the scan lines S during the programming period. Then, the second transistors M2 included in the respective pixels PXL are turned on in units of horizontal lines, and accordingly, a voltage corresponding to a desired data signal can be stored in each of the pixels PXL.

[0103] The initialization power source Vint is set to the second voltage V2 during the light emission period. If the initialization power source Vint is set to the second voltage V2, i.e., if the initialization power source Vint is increased from the first voltage V1 to the second voltage V2, the voltage of the first node N1 is increased by coupling of the storage capacitor Cst. At this time, the first transistor M1 controls the amount of current from the first driving power source ELVDD set to the fourth voltage V4 to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the voltage of the first node N1. To this end, the fourth voltage

V4 and the second voltage V2 may be set such that current can be supplied to the pixels PXL.

[0104] As described above, the pixel PXL according to an exemplary embodiment of the inventive concept generate light with a predetermined luminance by passing through the initialization period, the threshold voltage compensation period, the programming period, and the light emission period during the one frame period 1F.

[0105] In an embodiment of the inventive concept, the first capacitor C1 may be coupled between the data line Dm and the second node N2, and accordingly, an image with uniform luminance can be displayed in the pixel unit 100.

[0106] In detail, if the first capacitor C1 is coupled between the data line Dm and the anode electrode of the organic light emitting diode OLED, a voltage of the anode electrode of the organic light emitting diode OLED is changed by the data signal supplied to the data line Dm during the programming period. At this time, a charging voltage of an organic capacitor Coled is changed corresponding to the change in voltage of the anode electrode of the organic light emitting diode OLED.

[0107] Then, amounts of leakage current supplied from the first driving power source ELVDD and the initialization power source Vint to the anode electrode of the organic light emitting diode OLED are set differently for the respective pixels PXL. In this case, amounts of leakage current between the first nodes N1 and the anode electrodes of the organic light emitting diodes OLED, which are included in the respective pixels PXL, are set differently, and accordingly, light with different luminances may be generated in the respective pixels PXL even when the same data signal is supplied.

[0108] On the other hand, in the inventive concept, if the first capacitor C1 is formed between the second node N2 and the data line Dm, the anode electrodes of the organic light emitting diodes OLED included in the respective pixels PXL maintain a uniform voltage regardless of a change in voltage of the data line Dm. Then, amounts of leakage current between the first nodes N1 and the anode electrodes of the organic light emitting diodes OLED, which are included in the respective pixels PXL, are set to be approximately equal to one another, and accordingly, light with an approximately equal luminance can be generated from each of the pixels PXL, corresponding to the same data signal.

[0109] In an embodiment of the inventive concept, the voltage of the second node N2 may be changed corresponding to the data signal supplied to the data line Dm. Here, since the second node N2 is not coupled to a separate capacitor (i.e., since the voltage of the second node N2 is not maintained), the voltage of the second node N2 has no influence on the voltage of the first node N1.

[0110] Although FIG. 2 illustrates that the transistors M1 to M4 are formed as N-type transistors (e.g., NMOS transistors), the inventive concept is not limited thereto. For example, at least one of the second transistor M2, the third transistor M3, and the fourth transistor M4 may

be formed as a P-type transistor (e.g., a PMOS transistor).

[0111] FIG. 4 is a diagram illustrating another embodiment of the pixel shown in FIG. 1. In FIG. 4, components (e.g., the pixel circuit PC and the like) identical to those of FIG. 2 are designated by like reference numerals, and their detailed descriptions will be omitted.

[0112] Referring to FIG. 4, the pixel PXL according to this embodiment of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC for controlling the amount of current supplied to the organic light emitting diode OLED.

[0113] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC, and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC during the light emission period.

[0114] The pixel circuit PC controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal during the light emission period. To this end, the pixel circuit PC includes a first transistor M1, a second transistor M2, a third transistor M3, and a fourth transistor M4(P).

[0115] The fourth transistor M4(P) is coupled between the initialization power source Vint and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the fourth transistor M4(P) is coupled to the first control line CL1. The fourth transistor M4(P) is turned on when the first control signal is supplied to the first control line CL1. If the fourth transistor M4(P) is turned on, the first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0116] In this embodiment of the inventive concept, the other components and operating process of the pixel PXL are set identically to those of FIG. 2, except that the fourth transistor M4(P) is formed as a P-type transistor. However, when the fourth transistor M4(P) is formed as the P-type transistor, the polarity of the first control signal supplied to the first control line CL1 is reversed, as shown in FIG. 5. That is, the first control signal may be set to a low voltage to have the gate-on voltage.

[0117] FIG. 6 is a diagram illustrating still another embodiment of the pixel shown in FIG. 1. In FIG. 6, components identical to those of FIG. 4 are designated by like reference numerals, and their detailed descriptions will be omitted.

[0118] Referring to FIG. 6, the pixel PXL according to this embodiment of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC for controlling the amount of current supplied to the organic light emitting diode OLED.

[0119] An anode electrode of the organic light emitting

diode OLED is coupled to the pixel circuit PC, and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC during the light emission period.

[0120] During the light emission period, the pixel circuit PC controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal. To this end, the pixel circuit PC includes a first transistor M1, a second transistor M2(P), a third transistor M3, and a fourth transistor M4(P).

[0121] The second transistor M2(P) is coupled between the first node N1 and the second node N2. In addition, a gate electrode of the second transistor M2(P) is coupled to the *i*th scan line Si. The second transistor M2(P) is turned on when the scan signal is supplied to the *i*th scan line Si to allow the first node N1 and the second node N2 to be electrically coupled to each other.

[0122] In this embodiment of the inventive concept, the other components and operating process of the pixel PXL are set identically to those of FIG. 4, except that the second transistor M2(P) is formed as a P-type transistor. However, when the second transistor M2(P) is formed as the P-type transistor, the polarity of the scan signal supplied to the *i*th scan line Si is reversed as shown in FIG. 7. That is, the scan signal may be set to a low voltage to have the gate-on voltage.

[0123] FIG. 8 is a diagram illustrating still another embodiment of the pixel shown in FIG. 1. In FIG. 8, components identical to those of FIG. 6 are designated by like reference numerals, and their detailed descriptions will be omitted.

[0124] Referring to FIG. 8, the pixel PXL according to this embodiment of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC for controlling the amount of current supplied to the organic light emitting diode OLED.

[0125] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC, and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC during the light emission period.

[0126] During the light emission period, the pixel circuit PC controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal. To this end, the pixel circuit PC includes a first transistor M1, a second transistor M2(P), a third transistor M3(P), and a fourth transistor M4(P).

[0127] The third transistor M3(P) is coupled between

the second node N2 and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the third transistor M3(P) is coupled to the second control line CL2. The third transistor M3(P) is turned on when the second control signal is supplied to the second control line CL2 to allow the second node N2 and the organic light emitting diode OLED to be electrically coupled to each other.

[0128] In this embodiment of the inventive concept, the other components and operating process of the pixel PXL are set identically to those of FIG. 6, except that the third transistor M3(P) is formed as a P-type transistor. However, when the third transistor M3(P) is formed as the P-type transistor, the polarity of the second control signal supplied to the second control line CL2 is reversed, as shown in FIG. 9. That is, the second control signal may be set to a low voltage to have the gate-on voltage.

[0129] In the above-described FIG. 2, it has been illustrated that the transistors M1 to M4 are formed as N-type transistors. Here, at least one of the transistors M1 to M4 may be formed as an oxide semiconductor transistor. In addition, at least one of the transistors M1 to M4 may be formed as a poly-silicon semiconductor transistor.

[0130] The oxide semiconductor transistor includes a gate electrode, a source electrode, and a drain electrode, and has an active layer formed of an oxide semiconductor. Here, the oxide semiconductor may be set as an amorphous or crystalline semiconductor. The oxide semiconductor transistor may be formed through a low temperature process, and has a lower charge mobility than the poly-silicon semiconductor transistor. The oxide semiconductor transistor has excellent off-current characteristics.

[0131] The poly-silicon semiconductor transistor includes a gate electrode, a source electrode, and a drain electrode, and has an active layer formed of poly-silicon. For example, the poly-silicon semiconductor transistor may be set as a low temperature poly-silicon (LTPS) transistor. The poly-silicon semiconductor transistor has a high electron mobility, and accordingly, has fast driving characteristics.

[0132] FIGS. 10A to 10D are diagrams illustrating still other embodiments of the pixel shown in FIG. 1. The pixels of FIGS. 10A to 10D are driven by the same driving method as the pixel of FIG. 2, and therefore, a detailed description of the driving method will be omitted.

[0133] Referring to FIGS. 10A to 10D, each of the pixels PXL according to these other embodiments of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC for controlling the amount of current supplied to the organic light emitting diode OLED.

[0134] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC, and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the

amount of current supplied from the pixel circuit PC during the light emission period.

[0135] During the light emission period, the pixel circuit PC controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal. To this end, the pixel circuit PC includes four transistors.

[0136] Referring to FIG. 10A, a first transistor M1(O) may be formed as an oxide semiconductor transistor, and a second transistor M2(L), a third transistor M3(L), and a fourth transistor M4(L) may be formed as poly-silicon semiconductor transistors.

[0137] Referring to FIG. 10B, a first transistor M1(O) and a second transistor M2(O) may be formed as oxide semiconductor transistors, and a third transistor M3(L) and a fourth transistor M4(L) may be formed as poly-silicon semiconductor transistors.

[0138] Referring to FIG. 10C, a first transistor M1(O), a second transistor M2(O), and a third transistor M3(O) may be formed as oxide semiconductor transistors, and a fourth transistor M4(L) may be formed as a poly-silicon semiconductor transistor.

[0139] Referring to FIG. 10D, a first transistor M1(O), a second transistor M2(O), a third transistor M3(O), and a fourth transistor M4(O) may be formed as oxide semiconductor transistors.

[0140] That is, in these other embodiments of the inventive concept, at least one transistor among the first to fourth transistors M1 to M4 may be formed as an oxide semiconductor transistor. A ratio of oxide semiconductor transistors and/or poly-silicon semiconductor transistors, which are included in the pixel circuit PC, may be variously set by considering the resolution, size, etc., of a panel.

[0141] FIGS. 11A to 11D are diagrams illustrating still other embodiments of the pixel shown in FIG. 1. The pixels of FIGS. 11A to 11D are driven by the same driving method as the pixel of FIG. 2, and therefore, a detailed description of the driving method will be omitted.

[0142] Referring to FIGS. 11A to 11D, each of the pixels PXL according to these other embodiments of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC for controlling the amount of current supplied to the organic light emitting diode OLED.

[0143] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC, and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC during the light emission period.

[0144] During the light emission period, the pixel circuit PC controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED,

corresponding to the data signal. To this end, the pixel circuit PC includes four transistors.

[0145] Referring FIG. 11A, a first transistor M1(L) may be formed as a poly-silicon semiconductor transistor, and a second transistor M2(O), a third transistor M3(O), and a fourth transistor M4(O) may be formed as oxide semiconductor transistors.

[0146] Referring to FIG. 11B, a first transistor M1(L) and a second transistor M2(L) may be formed as poly-silicon semiconductor transistors, and a third transistor M3(O) and a fourth transistor M4(O) may be formed as oxide semiconductor transistors.

[0147] Referring to FIG. 11C, a first transistor M1(L), a second transistor M2(L), and a third transistor M3(L) may be formed as poly-silicon semiconductor transistors, and a fourth transistor M4(O) may be formed as an oxide semiconductor transistor.

[0148] Referring to FIG. 11D, a first transistor M1(L), a second transistor M2(L), a third transistor M3(L), and a fourth transistor M4(L) may be formed as poly-silicon semiconductor transistors.

[0149] That is, in these other embodiments of the inventive concept, at least one transistor among the first to fourth transistors M1 to M4 may be formed as a poly-silicon semiconductor transistor. A ratio of oxide semiconductor transistors and/or poly-silicon semiconductor transistors, which are included in the pixel circuit PC, may be variously set by considering the resolution, size, etc. of a panel.

[0150] FIG. 12 is a diagram illustrating an organic light emitting display device according to another embodiment of the inventive concept. In FIG. 12, components identical to those of FIG. 1 are designated by like reference numerals, and their detailed descriptions will be omitted.

[0151] Referring to FIG. 12, the organic light emitting display device according to the embodiment of the inventive concept includes a pixel unit 100', a scan driver 110, a data driver 120, a control driver 130', a timing controller 140, a host system 150, and a power supply unit 160.

[0152] The control driver 130' supplies a first control signal to a first control line CL1. For example, the control driver 130' may supply the first control signal to the first control line CL1 during an initialization period. If the first control signal is supplied to the first control line CL1, an anode electrode of the organic light emitting diode OLED and a gate electrode of a driving transistor, which are included in each of pixels PXL', are initialized.

[0153] The first control signal is set to the gate-on voltage such that transistors included in the pixels PXL' can be turned on. Additionally, the first control line CL1 is commonly coupled to the pixels PXL', and accordingly, the pixels PXL' can be driven in the simultaneous driving manner.

[0154] The pixel unit 100' includes pixels PXL' located to be coupled to data lines D, scan lines S, and the first control line CL1. The pixels PXL' are supplied with a first driving power source ELVDD, a second driving power source ELVSS, and an initialization power source Vint.

[0155] Each of the pixels PXL' is supplied with a data signal from the data line D during a programming period. The pixel PXL' supplied with the data signal controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via an organic light emitting diode (not shown) during a light emission period. At this time, the organic light emitting diode generates light with a predetermined luminance corresponding to the amount of the current. Each of the pixels PXL' may be coupled to two or more scan lines, corresponding to a circuit structure thereof.

[0156] FIG. 13 is a diagram illustrating an embodiment of a pixel shown in FIG. 12. For convenience of illustration, a pixel coupled to an *i*th scan line Si and an *m*th data line Dm is illustrated in FIG. 13.

[0157] Referring to FIG. 13, the pixel PXL' according to the embodiment of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC' for controlling the amount of current supplied to the organic light emitting diode OLED.

[0158] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC', and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC' during the light emission period.

[0159] During the light emission period, the pixel circuit PC' controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal. To this end, the pixel circuit PC' includes first to fourth transistors M1, M2, M3', and M4, a storage capacitor Cst, and a first capacitor C1.

[0160] A first electrode of the first transistor (or driving transistor) M1 is coupled to the first driving power source ELVDD, and a second electrode of the first transistor M1 is coupled to the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the first transistor M1 is coupled to a first node N1. The first transistor M1 controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to a voltage of the first node N1.

[0161] The second transistor M2 is coupled between the first node N1 and a second node N2. In addition, a gate electrode of the second transistor M2 is coupled to the *i*th scan line Si. The second transistor M2 is turned on when a scan signal is supplied to the *i*th scan line Si to allow the first node N1 and the second node N2 to be electrically coupled to each other.

[0162] The third transistor M3' is coupled between the second node N2 and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the third transistor M3' is coupled to an (*i*+1)th scan line Si+1. The third transistor M3' is turned on when the scan signal is supplied to the (*i*+1)th scan line Si+1 to

allow the second node N2 and the anode electrode of the organic light emitting diode OLED to be electrically coupled to each other.

[0163] The fourth transistor M4 is coupled between the initialization power source Vint and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the fourth transistor M4 is coupled to the first control line CL1. The fourth transistor M4 is turned on when the first control signal is supplied to the first control line CL1. If the fourth transistor M4 is turned on, a first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0164] The storage capacitor Cst is coupled between the initialization power source Vint and the first node N1. The storage capacitor Cst stores voltages corresponding to the data signal and a threshold voltage of the first transistor M1.

[0165] The first capacitor C1 is coupled between the second node N2 and the data line Dm. The first capacitor C1 controls a voltage of the second node N2, corresponding to a voltage of the data line Dm.

[0166] FIG. 14 is a waveform diagram illustrating an embodiment of a driving method of the pixel shown in FIG. 13.

[0167] Referring to FIG. 14, one frame period 1F is divided into an initialization period, a threshold voltage compensation period, a programming period, and a light emission period.

[0168] During the initialization period, a first node N1 and the anode electrode of the organic light emitting diode OLED are initialized to the first voltage V1 by the initialization power source Vint.

[0169] During the threshold voltage compensation period, a voltage corresponding to the threshold voltage of the first transistor M1 is stored in the storage capacitor Cst.

[0170] During the programming period, a voltage corresponding to the data signal is stored in the storage capacitor Cst.

[0171] During the light emission period, the organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC'.

[0172] An operating process of the pixel PXL' will be described. First, the scan signal is supplied to all of the scan lines S during the initialization period. In addition, the first control signal is supplied to the first control line CL1 during the initialization period.

[0173] If the first control signal is supplied to the first control line CL1, the fourth transistor M4 included in each of the pixels PXL' is turned on. If the fourth transistor M4 is turned on, the first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0174] If the scan signal is supplied to the scan lines S, the second transistor M2 and the third transistor M3', which are included in each of the pixels PXL', are turned

on. If the second transistor M2 and the third transistor M3' are turned on, the first node N1 and the anode electrode of the organic light emitting diode OLED are electrically coupled to each other. Then, the first voltage V1 of the initialization power source Vint is supplied to the first node N1. That is, during the initialization period, the anode electrode of the organic light emitting diode OLED and the first node N1, which are included in each of the pixels PXL', are initialized to the first voltage V1 of the initialization power source Vint. Here, the first voltage V1 may be set such that the organic light emitting diode OLED does not emit light.

[0175] The supply of the first control signal to the first control line CL1 is stopped during the threshold voltage compensation period. If the supply of the first control signal to the first control line CL1 is stopped, the fourth transistor M4 is turned off. In addition, the first driving power source ELVDD is set to a third voltage V3 during the threshold voltage compensation period. Here, the third voltage V3 is set to a voltage lower than the first voltage V1.

[0176] The scan signal is supplied to the scan lines S during the threshold voltage compensation period, and accordingly, the second transistor M2 and the third transistor M3', which are included in each of the pixels PXL', maintain a turn-on state. If the second transistor M2 and the third transistor M3' are turned on, the first transistor M1 is diode-coupled such that current can flow from the anode electrode of the organic light emitting diode OLED to the first driving power source ELVDD. Then, the current is supplied from the first node N1 and the anode electrode of the organic light emitting diode OLED, which are set to the first voltage V1, to the first driving power source ELVDD set to the third voltage V3.

[0177] At this time, since the first transistor M1 is diode-coupled as described above, the voltage of the first node N1 is set to a voltage obtained by adding an absolute value of the threshold voltage of the first transistor M1 to the third voltage V3 of the first driving power source ELVDD. That is, the voltage corresponding to the threshold voltage of the first transistor M1 is applied to the first node N1 during the threshold voltage compensation period. The voltage corresponding to the threshold voltage of the first transistor M1, which is applied to the first node N1, is stored in the storage capacitor Cst during the threshold voltage compensation period.

[0178] The scan signal is simultaneously supplied to all of the scan lines S during the initialization period and the threshold voltage compensation period. Therefore, the voltage corresponding to the threshold voltage of the first transistor M1 coupled to the storage capacitor Cst included in each of the pixels PXL' is stored in the storage capacitor Cst during the initialization period and the threshold voltage compensation period.

[0179] The scan signal is sequentially supplied to the scan lines S during the programming period. In addition, the first driving power source ELVDD is set to a fourth voltage V4 higher than the third voltage V3.

[0180] If the scan signal is supplied to the *i*th scan line *S_i*, the second transistor M2 coupled to the *i*th scan line *S_i* is turned on. If the second transistor M2 is turned on, the first node N1 and the second node N2 are electrically coupled to each other.

[0181] The data signal is supplied to the data line *D_m* to be synchronized with the *i*th scan line *S_i*. If the data signal is supplied to the data line *D_m*, voltages of the second node N2 and the first node N1 are changed by coupling of the first capacitor C1. That is, if the second transistor M2 is turned on, the voltage of the first node N1 is set corresponding to the voltage of the data signal. Therefore, during the programming period, the voltages corresponding to the threshold voltage of the first transistor M1 and the data signal are stored in the storage capacitor Cst included in each of the pixels PXL'.

[0182] In other words, the scan signal is sequentially supplied to the scan lines *S* during the programming period. Then, the second transistors M2 included in the respective pixels PXL' are turned on in units of horizontal lines, and accordingly, a voltage corresponding to a desired data signal can be stored in each of the pixels PXL'.

[0183] If the scan signal is supplied to the (*i*+1)th scan line *S_{i+1}*, the third transistor M3' coupled to the (*i*+1)th scan line *S_{i+1}* is turned on. At this time, since the second transistor M2 is set to a turn-off state, the first node N1 stably maintains a voltage charged in a previous period.

[0184] The initialization power source *V_{int}* is set to a second voltage *V₂* during the light emission *V_{int}*. If the initialization power source *V_{int}* is set to the second voltage *V₂*, i.e., if the initialization power source *V_{int}* is increased from the first voltage *V₁* to the second voltage *V₂*, the voltage of the first node N1 is increased by coupling of the storage capacitor Cst. At this time, the first transistor M1 controls the amount of current flowing from the first driving power source ELVDD set to a fourth voltage *V₄* to the second driving power source ELVDD via the organic light emitting diode OLED, corresponding to the voltage of the first node N1. To this end, the fourth voltage *V₄* and the second voltage *V₂* may be set such that current can be supplied to the pixel PXL'.

[0185] As described above, each of the pixels PXL' according to the embodiment of the inventive concept generates light with a predetermined luminance by passing through the initialization period, the threshold voltage compensation period, the programming period, and the light emission period during the one frame period 1F.

[0186] In an embodiment of the inventive concept, the first capacitor C1 is coupled between the data line *D_m* and the second node N2, and accordingly, an image with uniform luminance can be displayed from the pixel unit 100'. That is, a voltage of an organic capacitor Coled is not changed corresponding to a change in voltage of the data line *D_m*, and accordingly, an image with uniform luminance can be displayed. Additionally, since the second node N2 is not coupled to a separate capacitor (i.e., since the voltage of the second node N2 is not maintained), the voltage of the second node N2 has no influ-

ence on the voltage of the first node N1.

[0187] In FIG. 13, it has been illustrated that the transistors M1 to M4 are formed as N-type transistors (e.g., NMOS transistors), but the inventive concept is not limited thereto. For example, at least one of the second transistor M2, the third transistor M3', and the fourth transistor M4 may be formed as a P-type transistor (e.g., a PMOS transistor).

[0188] FIGS. 15A and 15B are diagrams illustrating other embodiments of the pixel shown in FIG. 13. The pixels of FIGS. 15A and 15B are driven by the same driving method as the pixel of FIG. 13, and therefore, a detailed description of the driving method will be omitted.

[0189] Referring to FIGS. 15A and 15B, each of the pixels PXL' according to the other embodiments of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC' for controlling the amount of current supplied to the organic light emitting diode OLED.

[0190] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC', and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC' during the light emission period.

[0191] During the light emission period, the pixel circuit PC' controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal.

[0192] Referring to FIG. 15A, the pixel circuit PC' includes a first transistor M1, a second transistor M2, a third transistor M3', and a fourth transistor M4(P).

[0193] The fourth transistor M4(P) is coupled between the initialization power source *V_{int}* and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the fourth transistor M4(P) is coupled to the first control line CL1. The fourth transistor M4(P) is turned on when the first control signal is supplied to the first control line CL1. If the fourth transistor M4(P) is turned on, the first voltage of the initialization power source *V_{int}* is supplied to the anode electrode of the organic light emitting diode OLED.

[0194] In FIG. 15A, the other components and operating process of the pixel PXL' are set identically to those of FIG. 13, except that the fourth transistor M4(P) is formed as a P-type transistor. However, when the fourth transistor M4(P) is formed as the P-type transistor, the polarity of the first control signal supplied to the first control line CL1 is reversed. That is, the first control signal may be set to a low voltage to have the gate-on voltage.

[0195] Referring to FIG. 15B, the pixel circuit PC' includes a first transistor M1, a second transistor M2(P), a third transistor M3'(P), and a fourth transistor M4(P).

[0196] The second transistor M2(P) is coupled between the first node N1 and the second node N2. In ad-

dition, a gate electrode of the second transistor M2(P) is coupled to the *i*th scan line Si. The second transistor M2(P) is turned on when the scan signal is supplied to the *i*th scan line Si to allow the first node N1 and the second node N2 to be electrically coupled to each other.

[0197] The third transistor M3'(P) is coupled between the second node N2 and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the third transistor M3'(P) is coupled to the (*i*+1)th scan line Si+1. The third transistor M3'(P) is turned on when the scan signal is supplied to the (*i*+1)th scan line Si+1 to allow the second node N2 and the anode electrode of the organic light emitting diode OLED to be electrically coupled to each other.

[0198] The fourth transistor M4(P) is coupled between the initialization power source Vint and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the fourth transistor M4(P) is coupled to the first control line CL1. The fourth transistor M4(P) is turned on when the first control signal is supplied to the first control line CL1. If the fourth transistor M4(P) is turned on, the first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0199] In FIG. 15B, the other components and operating process of the pixel PXL' are set identically to those of FIG. 13, except that the second transistor M2(P), the third transistor M3'(P), and the fourth transistor M4(P) are formed as P-type transistors. However, when the second transistor M2(P) and the third transistor M3'(P) are formed as the P-type transistors, the polarity of the scan signal is reversed. That is, the scan signal may be set to a low voltage to have the gate-on voltage.

[0200] Similarly, when the fourth transistor M4(P) is formed as the P-type transistor, the polarity of the first control signal supplied to the first control line CL1 is reversed. That is, the first control signal may be set to a low voltage to have the gate-on voltage.

[0201] In the above-described FIG. 13, it has been illustrated that the transistors M1 to M4 are formed as the N-type transistors. Here, at least one of the transistors M1 to M4 may be formed as an oxide semiconductor transistor. In addition, at least one of the transistors M1 to M4 may be formed as a poly-silicon semiconductor transistor.

[0202] FIGS. 16A to 16D are diagrams illustrating still other embodiments of the pixel shown in FIG. 13. The pixels of FIGS. 16A to 16D are driven by the same driving method as the pixel of FIG. 13, and therefore, a detailed description of the driving method will be omitted.

[0203] Referring to FIGS. 16A to 16D, each of the pixels PXL' according to these other embodiments of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC' for controlling the amount of current supplied to the organic light emitting diode OLED.

[0204] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC', and a

cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC' during the light emission period.

[0205] During the light emission period, the pixel circuit PC' controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal. To this end, the pixel circuit PC' includes four transistors.

[0206] Referring to FIG. 16A, a first transistor M1(L) may be formed as a poly-silicon semiconductor transistor, and a second transistor M2(O), a third transistor M3'(O), and a fourth transistor M4(O) may be formed as oxide semiconductor transistors.

[0207] Referring to FIG. 16B, a first transistor M1(L) and a second transistor M2(L) may be formed as poly-silicon semiconductor transistors, and a third transistor M3'(O) and a fourth transistor M4(O) may be formed as oxide semiconductor transistors.

[0208] Referring to FIG. 16C, a first transistor M1(L), a second transistor M2(L), and a third transistor M3'(L) may be formed as poly-silicon semiconductor transistors, and a fourth transistor M4(O) may be formed as an oxide semiconductor transistor.

[0209] Referring to FIG. 16D, a first transistor M1(L), a second transistor M2(L), a third transistor M3'(L), and a fourth transistor M4(L) may be formed as poly-silicon semiconductor transistors.

[0210] That is, in these other embodiments, at least one transistor among the first to fourth transistors M1 to M4 may be formed as a poly-silicon semiconductor transistor. Similarly, in these other embodiments, at least one transistor among the first to fourth transistors M1 to M4 may be formed as an oxide semiconductor transistor. For example, as shown in FIG. 17, first to fourth transistors M1(O), M2(O), M3'(O), and M4(O) may be formed as oxide semiconductor transistors.

[0211] A ratio of oxide semiconductor transistors and/or poly-silicon semiconductor transistors, which are included in the pixel circuit PC', may be variously set by considering the resolution, size, etc. of a panel.

[0212] FIG. 18 is a diagram illustrating still another embodiment of the pixel shown in FIG. 13. In FIG. 18, components identical to those of FIG. 13 are designated by like reference numerals, and their detailed descriptions will be omitted.

[0213] Referring to FIG. 18, the pixel PXL' according to the embodiment of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC' for controlling the amount of current supplied to the organic light emitting diode OLED.

[0214] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC', and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source

ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC' during the light emission period.

[0215] During the light emission period, the pixel circuit PC' controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal. To this end, the pixel circuit PC' includes first to fourth transistors M1, M2, M3", and M4, a storage capacitor Cst, and a first capacitor C1.

[0216] The third transistor M3" is coupled between the second node N2 and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the third transistor M3" is coupled to the ith scan line Si. The third transistor M3" is turned on when the scan signal is supplied to the ith scan line Si to allow the second node N2 and the anode electrode of the organic light emitting diode OLED to be electrically coupled to each other.

[0217] FIG. 19 is a waveform diagram illustrating an embodiment of a driving method of the pixel shown in FIG. 18.

[0218] Referring to FIG. 19, one frame period 1F is divided into an initialization period, a threshold voltage compensation period, a programming period, and a light emission period.

[0219] During the initialization period, the first node N1 and the anode electrode of the organic light emitting diode OLED are initialized to the first voltage V1 by the initialization power source Vint.

[0220] During the threshold voltage compensation period, a voltage corresponding to the threshold voltage of the first transistor M1 is stored in the storage capacitor Cst.

[0221] During the programming period, a voltage corresponding to the data signal is stored in the storage capacitor Cst.

[0222] During the light emission period, the organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC'.

[0223] An operating process of the pixel PXL' will be described. First, the scan signal is supplied to all of the scan lines S during the initialization period. In addition, the first control signal is supplied to the first control line CL1 during the initialization period.

[0224] If the first control signal is supplied to the first control line CL1, the fourth transistor M4 included in each of the pixels PXL' is turned on. If the fourth transistor M4 is turned on, the first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0225] If the scan signal is supplied to the scan lines S, the second transistor M2 and the third transistor M3", which are included in each of the pixels PXL', are turned on. If the second transistor M2 and the third transistor M3" are turned on, the first node N1 and the anode elec-

trode of the organic light emitting diode OLED are electrically coupled to each other. Then, the first voltage V1 of the initialization power source Vint is supplied to the first node N1. That is, during the initialization period, the anode electrode of the organic light emitting diode OLED and the first node N1, which are included in each of the pixels PXL', are initialized to the first voltage V1 of the initialization power source Vint.

[0226] The supply of the first control signal to the first control line CL1 is stopped during the threshold voltage compensation period. If the supply of the first control signal to the first control line CL1 is stopped, the fourth transistor M4 is turned off. In addition, the first driving power source ELVDD is set to a third voltage V3 during the threshold voltage compensation period.

[0227] The scan signal is supplied to the scan lines S during the threshold voltage compensation period, and accordingly, the second transistor M2 and the third transistor M3", which are included in each of the pixels PXL', maintain the turn-on state. If the second transistor M2 and the third transistor M3" are turned on, the first transistor M1 is diode-coupled such that current can flow from the anode electrode of the organic light emitting diode OLED to the first driving power source ELVDD. Then, the current is supplied from the first node N1 and the anode electrode of the organic light emitting diode OLED, which are set to the first voltage V1, to the first driving power source ELVDD set to the third voltage V3.

[0228] At this time, since the first transistor M1 is diode-coupled as described above, the voltage of the first node N1 is set to a voltage obtained by adding an absolute value of the threshold voltage of the first transistor M1 to the third voltage V3 of the first driving power source ELVDD. That is, the voltage corresponding to the threshold voltage of the first transistor M1 is applied to the first node N1 during the threshold voltage compensation period. The voltage corresponding to the threshold voltage of the first transistor M1, which is applied to the first node N1, is stored in the storage capacitor Cst during the threshold voltage compensation period.

[0229] The scan signal is simultaneously supplied to all of the scan lines S during the initialization period and the threshold voltage compensation period. Therefore, the voltage corresponding to the threshold voltage of the first transistor M1 coupled to the storage capacitor Cst included in each of the pixels PXL' is stored in the storage capacitor Cst during the initialization period and the threshold voltage compensation period.

[0230] The scan signal is sequentially supplied to the scan lines S during the programming period. In addition, the first driving power source ELVDD is set to a fourth voltage V4 higher than the third voltage V3.

[0231] If the scan signal is supplied to the ith scan line Si, the second transistor M2 and the third transistor M3", which are coupled to the ith scan line Si, are turned on. If the second transistor M2 is turned on, the first node N1 and the second node N2 are electrically coupled to each other. If the third transistor M3" is turned on, the second

node N2 and the anode electrode of the organic light emitting diode OLED are electrically coupled to each other.

[0232] The data signal is supplied to the data line Dm to be synchronized with the ith scan line Si. If the data signal is supplied to the data line Dm, voltages of the second node N2 and the first node N1 are changed by coupling of the first capacitor C1. That is, if the second transistor M2 is turned on, the voltage of the first node N1 is set corresponding to the voltage of the data signal. Therefore, during the programming period, the voltages corresponding to the threshold voltage of the first transistor M1 and the data signal are stored in the storage capacitor Cst included in each of the pixels PXL'.

[0233] In other words, the scan signal is sequentially supplied to the scan lines S during the programming period. Then, the second transistors M2 included in the respective pixels PXL' are turned on in units of horizontal lines, and accordingly, a voltage corresponding to a desired data signal can be stored in each of the pixels PXL'.

[0234] The initialization power source Vint is set to a second voltage V2 during the light emission period. If the initialization power source Vint is set to the second voltage V2, i.e., if the initialization power source Vint is increased from the first voltage V1 to the second voltage V2, the voltage of the first node N1 is increased by coupling of the storage capacitor Cst. At this time, the first transistor M1 controls the amount of current flowing from the first driving power source ELVDD set to a fourth voltage V4 to the second driving power source ELVDD via the organic light emitting diode OLED, corresponding to the voltage of the first node N1. To this end, the fourth voltage V4 and the second voltage V2 may be set such that current can be supplied to the pixel PXL'.

[0235] As described above, each of the pixels PXL' according to the embodiment of the inventive concept generates light with a predetermined luminance by passing through the initialization period, the threshold voltage compensation period, the programming period, and the light emission period during the one frame period 1F.

[0236] In an embodiment of the inventive concept, the first capacitor C1 is coupled between the data line Dm and the second node N2, and accordingly, an image with uniform luminance can be displayed from the pixel unit 100'. That is, a voltage of an organic capacitor Coled is not changed corresponding to a change in voltage of the data line Dm, and accordingly, an image with uniform luminance can be displayed. Additionally, since the second node N2 is not coupled to a separate capacitor (i.e., since the voltage of the second node N2 is not maintained), the voltage of the second node N2 has no influence on the voltage of the first node N1.

[0237] In FIG. 18, it has been illustrated that the transistors M1, M2, M3", and M4 are formed as N-type transistors (e.g., NMOS transistors), but the inventive concept is not limited thereto. For example, at least one of the second transistor M2, the third transistor M3", and the fourth transistor M4 may be formed as a P-type tran-

sistor (e.g., a PMOS transistor).

[0238] FIGS. 20A and 20B are diagrams illustrating still other embodiments of the pixel shown in FIG. 13. The pixels of FIGS. 20A and 20B are driven by the same driving method as the pixel of FIG. 18, and therefore, a detailed description of the driving method will be omitted.

[0239] Referring to FIGS. 20A and 20B, each of the pixels PXL' according to these other embodiments of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC' for controlling the amount of current supplied to the organic light emitting diode OLED.

[0240] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC', and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC' during the light emission period.

[0241] During the light emission period, the pixel circuit PC' controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal.

[0242] Referring to FIG. 20A, the pixel circuit PC' includes a first transistor M1, a second transistor M2, a third transistor M3", and a fourth transistor M4(P).

[0243] The fourth transistor M4(P) is coupled between the initialization power source Vint and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the fourth transistor M4(P) is coupled to a first control line CL1. The fourth transistor M4(P) is turned on when the first control signal is supplied to the first control line CL1. If the fourth transistor M4(P) is turned on, the first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0244] In FIG. 20A, the other components and operating process of the pixel PXL' are set identically to those of FIG. 18, except that the fourth transistor M4(P) is formed as a P-type transistor. However, when the fourth transistor M4(P) is formed as the P-type transistor, the polarity of the first control signal supplied to the first control line is reversed. That is, the first control signal may be set to a low voltage to have the gate-on voltage.

[0245] Referring to FIG. 20B, the pixel circuit PC' includes a first transistor M1, a second transistor M2(P), a third transistor M3"(P), and a fourth transistor M4(P).

[0246] The second transistor M2(P) is coupled between the first node N1 and the second node N2. In addition, a gate electrode of the second transistor M2(P) is coupled to the ith scan line Si. The second transistor M2(P) is turned on when the scan signal is supplied to the ith scan line Si to allow the first node N1 and the second node N2 to be electrically coupled to each other.

[0247] The third transistor M3"(P) is coupled between the second node N2 and the anode electrode of the or-

ganic light emitting diode OLED. In addition, a gate electrode of the third transistor M3"(P) is coupled to the ith scan line Si. The third transistor M3"(P) is turned on when the scan signal is supplied to the ith scan line Si to allow the second node N2 and the anode electrode of the organic light emitting diode OLED to be electrically coupled to each other.

[0248] The fourth transistor M4(P) is coupled between the initialization power source Vint and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the fourth transistor M4(P) is coupled to the first control line CL1. The fourth transistor M4(P) is turned on when the first control signal is supplied to the first control line CL1. If the fourth transistor M4(P) is turned on, the first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0249] In FIG. 20B, the other components and operating process of the pixel PXL' are set identically to those of FIG. 13, except that the second transistor M2(P), the third transistor M3"(P), and the fourth transistor M4(P) are formed as P-type transistors. However, when the second transistor M2(P) and the third transistor M3"(P) are formed as the P-type transistors, the polarity of the scan signal is reversed. That is, the scan signal may be set to a low voltage to have the gate-on voltage.

[0250] Similarly, when the fourth transistor M4(P) is formed as the P-type transistor, the polarity of the first control signal supplied to the first control line CL1 is reversed. That is, the first control signal may be set to a low voltage to have the gate-on voltage.

[0251] In the above-described FIG. 18, it has been illustrated that the transistors M1, M2, M3", and M4 are formed as N-type transistors. Here, at least one of the transistors M1, M2, M3", and M4 may be formed as an oxide semiconductor transistor. In addition, at least one of the transistors M1, M2, M3", and M4 may be formed as a poly-silicon semiconductor transistor.

[0252] FIGS. 21A to 21C are diagrams illustrating still other embodiments of the pixel shown in FIG. 13. The pixels of FIGS. 21A to 21C are driven by the same driving method as the pixel of FIG. 13, and therefore, a detailed description of the driving method will be omitted.

[0253] Referring to FIGS. 21A to 21C, each of the pixels PXL' according to the other embodiments of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC' for controlling the amount of current supplied to the organic light emitting diode OLED.

[0254] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC', and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC' during the light emission period.

[0255] During the light emission period, the pixel circuit

PC' controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal. To this end, the pixel circuit PC' includes four transistors.

[0256] Referring to FIG. 21A, a first transistor M1(L) may be formed as a poly-silicon semiconductor transistor, and a second transistor M2(O), a third transistor M3"(O), and a fourth transistor M4(O) may be formed as oxide semiconductor transistors.

[0257] Referring to FIG. 21B, a first transistor M1(L), a second transistor M2(L), and a third transistor M3"(L) may be formed as poly-silicon semiconductor transistors, and a fourth transistor M4(O) may be formed as an oxide semiconductor transistor.

[0258] Referring to FIG. 21C, a first transistor M1(L), a second transistor M2(L), a third transistor M3"(L), and a fourth transistor M4(L) may be formed as poly-silicon semiconductor transistors.

[0259] That is, in these other embodiments, at least one transistor among the first to fourth transistors M1 to M4 may be formed as a poly-silicon semiconductor transistor. Similarly, in these other embodiments, at least one transistor among the first to fourth transistors M1 to M4 may be formed as an oxide semiconductor transistor. For example, as shown in FIG. 22, first to fourth transistors M1(O), M2(O), M3"(O), and M4(O) may be formed as oxide semiconductor transistors.

[0260] A ratio of oxide semiconductor transistors and/or poly-silicon semiconductor transistors, which are included in the pixel circuit PC', may be variously set by considering the resolution, size, etc. of a panel.

[0261] FIG. 23 is a diagram illustrating still another embodiment of the pixel shown in FIG. 13. In FIG. 23, components identical to those of FIG. 18 are designated by like reference numerals, and their detailed descriptions will be omitted.

[0262] Referring to FIG. 23, the pixel PXL' according to the embodiment of the inventive concept includes an organic light emitting diode OLED and a pixel circuit PC' for controlling the amount of current supplied to the organic light emitting diode OLED.

[0263] An anode electrode of the organic light emitting diode OLED is coupled to the pixel circuit PC', and a cathode electrode of the organic light emitting diode OLED is coupled to the second driving power source ELVSS. The organic light emitting diode OLED generates light with a predetermined luminance corresponding to the amount of current supplied from the pixel circuit PC' during the light emission period.

[0264] During the light emission period, the pixel circuit PC' controls the amount of current flowing from the first driving power source ELVDD to the second driving power source ELVSS via the organic light emitting diode OLED, corresponding to the data signal. To this end, the pixel circuit PC' includes first to fourth transistors M1, M2', M3'", and M4, a storage capacitor Cst, and a first capacitor C1'.

[0265] The second transistor M2' is coupled between the first node N1 and the anode electrode of the organic light emitting diode OLED. In addition, a gate electrode of the second transistor M2' is coupled to the ith scan line Si. The second transistor M2' is turned on when the scan signal is supplied to the ith scan line Si to allow the first node N1 and the anode electrode of the organic light emitting diode OLED to be electrically coupled to each other.

[0266] The third transistor M3''' is coupled between the anode electrode of the organic light emitting diode OLED and a first terminal of the first capacitor C1'. In addition, a gate electrode of the third transistor M''' is coupled to the first scan line Si. The third transistor M''' is turned on when the scan signal is supplied to the ith scan line Si to allow the anode electrode of the organic light emitting diode OLED and the first terminal of the first capacitor C1' to be electrically coupled to each other.

[0267] The first terminal of the first capacitor C1' is coupled to the third transistor M3''', and a second terminal of the first capacitor C1' is coupled to the data line Dm.

[0268] An operating process of the pixel PXL' will be described in conjunction with FIGS. 19 and 23. First, the scan signal is supplied to all of the scan lines S during the initialization period. In addition, the first control signal is supplied to the first control line CL1 during the initialization period.

[0269] If the first control signal is supplied to the first control line CL1, the fourth transistor M4 included in each of the pixels PXL' is turned on. If the fourth transistor M4 is turned on, the first voltage V1 of the initialization power source Vint is supplied to the anode electrode of the organic light emitting diode OLED.

[0270] If the scan signal is supplied to the scan lines S, the second transistor M2' and the third transistor M3''', which are included in each of the pixels PXL', are turned on. If the second transistor M2' is turned on the first node N1 and the anode electrode of the organic light emitting diode OLED are electrically coupled to each other. Then, the first voltage V1 of the initialization power source Vint is supplied to the first node N1. That is, during the initialization period, the anode electrode of the organic light emitting diode OLED and the first node N1, which are included in each of the pixels PXL', are initialized to the first voltage V1 of the initialization power source Vint.

[0271] The supply of the first control signal to the first control line CL1 is stopped during the threshold voltage compensation period. If the supply of the first control signal to the first control line CL1 is stopped, the fourth transistor M4 is turned off. In addition, the first driving power source ELVDD is set to a third voltage V3 during the threshold voltage compensation period.

[0272] The scan signal is supplied to the scan lines S during the threshold voltage compensation period, and accordingly, the second transistor M2' and the third transistor M3''', which are included in each of the pixels PXL', maintain the turn-on state. If the second transistor M2' is turned on, the first transistor M1 is diode-coupled such

that current can flow from the anode electrode of the organic light emitting diode OLED to the first driving power source ELVDD. Then, the current is supplied from the first node N1 and the anode electrode of the organic light emitting diode OLED, which are set to the first voltage V1, to the first driving power source ELVDD set to the third voltage V3.

[0273] At this time, since the first transistor M1 is diode-coupled, as described above, the voltage of the first node N1 is set to a voltage obtained by adding an absolute value of the threshold voltage of the first transistor M1 to the third voltage V3 of the first driving power source ELVDD. That is, the voltage corresponding to the threshold voltage of the first transistor M1 is applied to the first node N1 during the threshold voltage compensation period. The voltage corresponding to the threshold voltage of the first transistor M1, which is applied to the first node N1, is stored in the storage capacitor Cst during the threshold voltage compensation period.

[0274] The scan signal is simultaneously supplied to all of the scan lines S during the initialization period and the threshold voltage compensation period. Therefore, the voltage corresponding to the threshold voltage of the first transistor M1 coupled to the storage capacitor Cst included in each of the pixels PXL' is stored in the storage capacitor Cst during the initialization period and the threshold voltage compensation period.

[0275] If the third transistor M3''' is turned on, the anode electrode of the organic light emitting diode OLED and the first terminal of the first capacitor C1' are electrically coupled to each other. At this time, a constant voltage is supplied to the data line Dm, and has no influence on the voltage of the first node N1.

[0276] The scan signal is sequentially supplied to the scan lines S during the programming period. In addition, the first driving power source ELVDD is set to a fourth voltage V4 higher than the third voltage V3.

[0277] If the scan signal is supplied to the ith scan line Si, the second transistor M2' and the third transistor M3''', which are coupled to the ith scan line Si, are turned on. If the second transistor M2' is turned on, the first node N1 and the second node N2 are electrically coupled to each other. If the third transistor M3''' is turned on, the first terminal of the first capacitor C1' and the anode electrode of the organic light emitting diode OLED are electrically coupled to each other.

[0278] The data signal is supplied to the data line Dm to be synchronized with the ith scan line Si. If the data signal is supplied to the data line Dm, voltages of the second node N2 and the first node N1 are changed by coupling of the first capacitor C1'. That is, if the second transistor M2' and the third transistor M3''' are turned on, the voltage of the first node N1 is set corresponding to the voltage of the data signal. Therefore, during the programming period, the voltages corresponding to the threshold voltage of the first transistor M1 and the data signal are stored in the storage capacitor Cst included in each of the pixels PXL'.

[0279] In other words, the scan signal is sequentially supplied to the scan lines S during the programming period. Then, the second transistors M2' and the third transistors M3'', which are included in the respective pixels PXL', are turned on in units of horizontal lines, and accordingly, a voltage corresponding to a desired data signal can be stored in each of the pixels PXL'.

[0280] The initialization power source Vint is set to a second voltage V2 during the light emission Vint. If the initialization power source Vint is set to the second voltage V2, i.e., if the initialization power source Vint is increased from the first voltage V1 to the second voltage V2, the voltage of the first node N1 is increased by coupling of the storage capacitor Cst. At this time, the first transistor M1 controls the amount of current flowing from the first driving power source ELVDD set to a fourth voltage V4 to the second driving power source ELVDD via the organic light emitting diode OLED, corresponding to the voltage of the first node N1.

[0281] As described above, each of the pixels PXL' according to the embodiment of the inventive concept generates light with a predetermined luminance by passing through the initialization period, the threshold voltage compensation period, the programming period, and the light emission period during the one frame period 1F.

[0282] In an embodiment of the inventive concept, the first capacitor C1' is coupled between the data line Dm and the third transistor M3'', and accordingly, an image with uniform luminance can be displayed from the pixel unit 100'. That is, a voltage of an organic capacitor Coled is not changed corresponding to a change in voltage of the data line Dm, and accordingly, an image with uniform luminance can be displayed.

[0283] At least one of the second transistor M2', the third transistor M3'', and the fourth transistor M4, which are shown in FIG. 23, may be formed as a P-type transistor (e.g., a PMOS transistor). In addition, the first transistor M1, the second transistor M2', the third transistor M3'', and the fourth transistor M4, which are shown in FIG. 23, may be formed as oxide semiconductor transistors and/or poly-silicon semiconductor transistors.

[0284] In the pixel and the organic light emitting display device using the same according to the inventive concept, four transistors are included in the pixel, and accordingly, the pixel can be applied to a high-resolution panel. Further, in the inventive concept, the capacitor coupled to the data line is not directly coupled to the anode electrode of the organic light emitting diode, and accordingly, it is possible to prevent a voltage of the anode electrode of the organic light emitting diode from being changed corresponding to a change in voltage of the data line. If the voltage of the anode electrode of the organic light emitting diode is not changed corresponding to the change in voltage of the data line, a leakage current, etc. is approximately equally set in the pixels, and hence, images with uniform luminance can be displayed.

[0285] Embodiments of the invention have been disclosed herein, and although specific terms are employed,

they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. In some instances, as would be apparent to one of ordinary skill in the art as of the filing of the present application, features, characteristics, and/or elements described in connection with a particular embodiment may be used singly or in combination with features, characteristics, and/or elements described in connection with other embodiments unless otherwise specifically indicated. Accordingly, the inventive concept is not limited to such embodiments.

Claims

1. A pixel (PXL) comprising:

an organic light emitting diode (OLED);
a first transistor (M1) configured to control the amount of current flowing from a first driving power source (ELVDD) to a second driving power source (ELVSS) via the organic light emitting diode (OLED), corresponding to a voltage of a first node (N1);
a second transistor (M2) coupled between the first node (N1) and a second node (N2), the second transistor (M2) configured to be turned on in response to a scan signal being supplied to an ith (i is a natural number) scan line (Si);
a third transistor (M3) coupled between the second node (N2) and an anode electrode of the organic light emitting diode (OLED);
a first capacitor (C1) coupled between a data line (D) and the second node (N2);
a fourth transistor (M4) coupled between an initialization power source (Vint) and the anode electrode of the organic light emitting diode (OLED), the fourth transistor (M4) configured to be turned on in response to a first control signal being supplied to a first control line (CL1), and a storage capacitor (Cst) coupled between the first node (N1) and the initialization power source (Vint).

2. A pixel according to claim 1, wherein a turn-on period of the fourth transistor (M4) in response to the first control signal at least partially overlaps with that of the second transistor (M2) in response to the scan signal.

3. A pixel according to claim 1, wherein the third transistor (M3) is configured to be turned on in response to a second control signal (CL2) being supplied to a second control line, and a turn-on period of the third transistor (M3) at least partially overlaps with that of the second transistor (M2).

4. A pixel according to claim 1, wherein the third tran-

sistor (M3) is configured to be turned on in response to a scan signal being supplied to an (i+1)th scan line (Si+1).

5. A pixel according to claim 1, wherein the third transistor (M3) is configured to be turned on in response to the scan signal being supplied to the ith scan line (Si).
6. A pixel according to any preceding claim, wherein the first transistor (M1) is an N-type transistor.
7. A pixel according to claim 6, wherein the second to fourth transistors (M2, M3, M4) are N-type transistors.
8. A pixel according to claim 7, wherein at least one of the first to fourth transistors (M1(L), M2(L), M3(L), M4(L)) is a poly-silicon semiconductor transistor.
9. A pixel according to claim 7, wherein at least one of the first to fourth transistors (M1(O), M2(O), M3(O), M4(O)) is an oxide semiconductor transistor.
10. A pixel according to claim 6, wherein at least one of the second to fourth transistors (M2(P), M3(P), M4(P)) is a P-type transistor.
11. A pixel (PXL) comprising:

an organic light emitting diode (OLED);
a first transistor (M1) configured to control the amount of current flowing from a first driving power source (ELVDD) to a second driving power source (ELVSS) via the organic light emitting diode (OLED), corresponding to a voltage of a first node (N1);
a second transistor (M2) coupled between the first node (N1) and an anode electrode of the organic light emitting diode (OLED), the second transistor (M2) configured to be turned on in response to a scan signal being supplied to an ith (i is a natural number) scan line (Si);
a third transistor (M3) coupled between the anode electrode of the organic light emitting diode (OLED) and a first terminal of a first capacitor (C1), the third transistor (M3) configured to be turned on in response to the scan signal being supplied to the ith scan line (Si), the first capacitor (C1) coupled between the third transistor (M3) and a data line (D); and
a fourth transistor (M4) coupled between an initialization power source (Vint) and the anode electrode of the organic light emitting diode (OLED), the fourth transistor (M4) configured to be turned on in response to a first control signal being supplied to a first control line (CL1), and a storage capacitor (Cst) coupled between the

first node (N1) and the initialization power source (Vint).

12. A pixel according to claim 11, wherein a turn-on period of the fourth transistor (M4) in response to the first control signal at least partially overlaps with that of the second transistor (M2) in response to the scan signal.

13. An organic light emitting display device configured to be driven during one frame period (1F) divided into an initialization period, a threshold voltage compensation period, a programming period, and a light emission period, the organic light emitting display device comprising:

Pixels (PXL) coupled to scan lines (S) and data lines (D);
a scan driver (110) configured to supply a scan signal to the scan lines (S);
a control driver (130; 130') configured to supply a first control signal to a first control line (CL1) commonly coupled to the pixels (PXL); and
a power supply unit (160) configured to supply, to the pixels (PXL), a first driving power source (ELVDD), a second driving power source (ELVSS), and an initialization power source (Vint),
wherein a pixel (PXL) located on an ith (i is a natural number) horizontal line is set out in any preceding claim.

14. An organic light emitting display device according to claim 13, wherein the control driver (130; 130') is configured to supply the first control signal during the initialization period.

15. An organic light emitting display device according to claim 13 or 14, wherein the scan driver (110) is configured to simultaneously supply the scan signal to the scan lines (S) during the initialization period and the threshold voltage compensation period, and sequentially supply the scan signal to the scan lines (S) during the programming period.

16. An organic light emitting display device according to claim 13, 14 or 15 wherein the power supply unit (160) is configured to supply the initialization power source (Vint) having a first voltage (V1) during the initialization period, the threshold voltage compensation period, and the programming period, and supply the initialization power source (Vint) having a second voltage (V2) higher than the first voltage (V1) during the light emission period.

17. An organic light emitting display device according to claim 16, wherein the first voltage (V1) is set to a level such that the organic light emitting diode

(OLED) does not emit light.

18. An organic light emitting display device according to claim 16 or 17, wherein the power supply unit (160) is configured to supply the first driving power source (ELVDD) having a third voltage (V3) during the threshold voltage compensation period, and supply the first driving power source (ELVDD) having a fourth voltage (V4) higher than the third voltage (V3) during the other periods.
19. An organic light emitting display device according to claim 18, wherein the first voltage (V1) is set to a voltage higher than the third voltage (V3).
20. An organic light emitting display device according to claim 13 wherein the said pixel (PXL) located on the *i*th horizontal line is as set out in claim 1, further comprising a second control line (CL2) commonly coupled to the pixels (PXL), wherein the control driver (130; 130') is configured to supply a second control signal to the second control line (CL2) during the initialization period and the threshold voltage compensation period.
21. An organic light emitting display device according to claim 20, wherein the third transistor (M3) is configured to be turned on in response to the second control signal being supplied thereto.

Patentansprüche

1. Pixel (PXL), umfassend:

eine organische lichtemittierende Diode (OLED);
einen ersten Transistor (M1), welcher konfiguriert ist, um die Strommenge zu steuern, die von einer ersten Ansteuerspannungsquelle (ELVDD) zu einer zweiten Ansteuerspannungsquelle (ELVSS) über die organische lichtemittierende Diode (OLED) fließt, welche einer Spannung eines ersten Knotens (N1) entspricht;
einen zweiten Transistor (M2), welcher zwischen dem ersten Knoten (N1) und einem zweiten Knoten (N2) gekoppelt ist, wobei der zweite Transistor (M2) konfiguriert ist, um als Reaktion auf ein Abtastsignal eingeschaltet zu werden, welches der *i*-ten (wobei *i* eine natürliche Zahl ist) Abtastlinie (Si) zugeführt wird;
einen dritten Transistor (M3), welcher zwischen dem zweiten Knoten (N2) und der Anodenelektrode der organischen lichtemittierenden Diode (OLED) gekoppelt ist;
einen ersten Kondensator (C1), welcher zwischen einer Datenlinie (D) und dem zweiten Knoten (N2) gekoppelt ist;

einen vierten Transistor (M4), welcher zwischen einer Initialisierungsspannungsquelle (Vint) und der Anodenelektrode der organischen lichtemittierenden Diode (OLED) gekoppelt ist, wobei der vierte Transistor (M4) konfiguriert ist, um als Reaktion auf ein erstes Steuersignal eingeschaltet zu werden, welches einer ersten Steuerlinie (CL1) zugeführt wird, und einen Speicherkondensator (Cst), welcher zwischen dem ersten Knoten (N1) und der Initialisierungsspannungsquelle (Vint) gekoppelt ist.

2. Pixel nach Anspruch 1, wobei sich eine Einschaltperiode des vierten Transistors (M4) als Reaktion auf das erste Steuersignal zumindest teilweise mit der des zweiten Transistors (M2) als Reaktion auf das Abtastsignal überlappt.
3. Pixel nach Anspruch 1, wobei der dritte Transistor (M3) so konfiguriert ist, dass er in Reaktion auf ein zweites Steuersignal (CL2), das einer zweiten Steuerlinie zugeführt wird, eingeschaltet wird, und eine Einschaltdauer des dritten Transistors (M3) sich zumindest teilweise mit derjenigen des zweiten Transistors (M2) überlappt.
4. Pixel nach Anspruch 1, wobei der dritte Transistor (M3) so konfiguriert ist, dass er als Reaktion auf ein Abtastsignal eingeschaltet wird, das einer (*i*+1)-ten Abtastlinie zugeführt wird.
5. Pixel nach Anspruch 1, wobei der dritte Transistor (M3) so konfiguriert ist, dass er als Reaktion auf das Abtastsignal eingeschaltet wird, das der *i*-ten Abtastlinie zugeführt wird.
6. Pixel nach einem der vorhergehenden Ansprüche, bei dem der erste Transistor (M1) ein Transistor vom N-Typ ist.
7. Pixel nach Anspruch 6, wobei der zweite bis vierte Transistor (M2, M3, M4) Transistoren vom N-Typ ist.
8. Pixel nach Anspruch 7, wobei mindestens einer des ersten bis vierten Transistors (M1(L), M2(L), M3(L), M4(L)) ein Polysilizium-Halbleitertransistor ist.
9. Pixel nach Anspruch 7, wobei mindestens einer des ersten bis vierten Transistors (M1(O), M2(O), M3(O), M4(O)) ein Oxidhalbleitertransistor ist.
10. Pixel nach Anspruch 6, wobei mindestens einer des zweiten bis vierten Transistors (M2(P), M3(P), M4(P)) ein Transistor vom P-Typ ist.
11. Pixel (PXL), umfassend:

eine organische lichtemittierende Diode

- (OLED);
 einen ersten Transistor (M1), welcher konfiguriert ist, um die Strommenge zu steuern, die von einer ersten Ansteuerspannungsquelle (ELVDD) zu einer zweiten Ansteuerspannungsquelle (ELVSS) über die organische lichtemittierende Diode (OLED) fließt, welche einer Spannung eines ersten Knotens (N1) entspricht;
 einen zweiten Transistor (M2), welcher zwischen dem ersten Knoten (N1) und einer Anodenelektrode der organischen lichtemittierenden Diode (OLED) gekoppelt ist, wobei der zweite Transistor (M2) konfiguriert ist, um als Reaktion auf ein Abtastsignal eingeschaltet zu werden, welches einer i-ten (wobei i eine natürliche Zahl ist) Abtastlinie (Si) zugeführt wird;
 einen dritten Transistor (M3), welcher zwischen der Anodenelektrode der organischen lichtemittierenden Diode (OLED) und einem ersten Anschluss eines ersten Kondensators (C1) gekoppelt ist, wobei der dritte Transistor (M3) konfiguriert ist, um als Reaktion auf ein Abtastsignal eingeschaltet zu werden, welches der i-ten Abtastlinie (Si) zugeführt wird, wobei der erste Kondensator (C1) zwischen dem dritten Transistor (M3) und einer Datenlinie (D) gekoppelt ist; und
 einen vierten Transistor (M4), welcher zwischen einer Initialisierungsspannungsquelle (Vint) und der Anodenelektrode der organischen lichtemittierenden Diode (OLED) gekoppelt ist, wobei der vierte Transistor (M4) konfiguriert ist, um als Reaktion auf ein erstes Steuersignal eingeschaltet zu werden, welches einer ersten Steuerlinie (CL1) zugeführt wird, und
 einen Speicherkondensator (Cst), welcher zwischen dem ersten Knoten (N1) und der Initialisierungsspannungsquelle (Vint) gekoppelt ist.
- 12.** Pixel nach Anspruch 11, wobei eine Einschaltperiode des vierten Transistors (M4) als Reaktion auf das erste Steuersignal zumindest teilweise mit der des zweiten Transistors (M2) als Reaktion auf das Abtastsignal überlappt.
- 13.** Organische lichtemittierende Anzeigevorrichtung, welche konfiguriert ist, um während einer Rahmenperiode (1F) angesteuert zu werden, die in eine Initialisierungsperiode, eine Schwellenspannungskompensationsperiode, eine Programmierperiode und eine Lichtemissionsperiode unterteilt ist, wobei die organische lichtemittierende Anzeigevorrichtung umfasst:
- Pixel (PXL), die mit Abtastlinien (S) und Datenlinien (D) gekoppelt sind;
 einen AbtastAnsteuer (110), der konfiguriert ist, um den Abtastlinien (S) ein Abtastsignal zuzuführen;
- einen SteuerAnsteuer (130; 130'), der konfiguriert ist, um ein erstes Steuersignal einer ersten Steuerlinie (CL1) zuzuführen, die gemeinsam mit den Pixeln (PXL) gekoppelt ist; und
 eine Energieversorgungseinheit (160), die konfiguriert ist, um den Pixeln (PXL) eine erste Ansteuerspannungsquelle (ELVDD), eine zweite Ansteuerspannungsquelle (ELVSS) und eine Initialisierungsspannungsquelle (Vint) zuzuführen, wobei ein auf einer i-ten (wobei i eine natürliche Zahl ist) horizontalen Linie befindliches Pixel nach einem der vorhergehenden Ansprüche festgelegt ist.
- 14.** Organische lichtemittierende Anzeigevorrichtung nach Anspruch 13, wobei der SteuerAnsteuer (130; 130') konfiguriert ist, um das erste Steuersignal während der Initialisierungsperiode zuzuführen.
- 15.** Organische lichtemittierende Anzeigevorrichtung nach Anspruch 13 oder 14, wobei der AbtastAnsteuer (110) konfiguriert ist, um gleichzeitig das Abtastsignal den Abtastlinien (S) während der Initialisierungsperiode und der Schwellenspannungskompensationsperiode zuzuführen und um das Abtastsignal den Abtastlinien (S) sequentiell während der Programmierperiode zuzuführen.
- 16.** Organische lichtemittierende Anzeigevorrichtung nach Anspruch 13, 14 oder 15, wobei die Energieversorgungseinheit (160) konfiguriert ist, um die Initialisierungsenergiequelle mit einer ersten Spannung (V1) während der Initialisierungsperiode, der Schwellenspannungskompensationsperiode und der Programmierperiode zu versorgen und um die Initialisierungsstromquelle (Vint) mit einer zweiten Spannung (V2), die höher als die erste Spannung (V1) ist, während der Lichtemissionsperiode zu versorgen.
- 17.** Organische lichtemittierende Anzeigevorrichtung nach Anspruch 16, wobei die erste Spannung (V1) auf einen solchen Pegel eingestellt ist, dass die organische lichtemittierende Diode (OLED) kein Licht emittiert.
- 18.** Organische lichtemittierende Anzeigevorrichtung nach Anspruch 16 oder 17, wobei die Energieversorgungseinheit (160) konfiguriert ist, um die erste Ansteuerspannungsquelle (ELVDD), die eine dritte Spannung (V3) hat, während der Schwellenspannungskompensationsperiode zu versorgen und um die erste Ansteuerspannungsquelle (ELVDD), die eine vierte Spannung (V4) hat, welche höher als die dritte Spannung (V3) ist, während der anderen Perioden zu versorgen.

19. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 18, wobei die erste Spannung (V1) auf eine Spannung eingestellt ist, die höher als die dritte Spannung (V3) ist.
20. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 13, wobei das auf der i-ten horizontalen Linie befindliche Pixel (PXL) nach Anspruch 1 festgelegt ist und ferner eine zweite Steuerlinie (CL2) umfasst, die gemeinsam mit den Pixeln (PXL) gekoppelt ist, wobei der SteuerAnsteuer (130; 130') konfiguriert ist, um ein zweites Steuersignal der zweiten Steuerlinie (CL2) während der Initialisierungsperiode und der Schwellenspannungskompensationsperiode zuzuführen.
21. Organische lichtemittierende Anzeigevorrichtung nach Anspruch 22, wobei der dritte Transistor (M3) so konfiguriert ist, dass er als Reaktion auf das ihm zugeführte zweite Steuersignal eingeschaltet wird.

Revendications

1. Pixel (PXL) comprenant :

une diode électroluminescente organique (OLED) ;
 un premier transistor (M1) qui est configuré de manière à ce qu'il commande la quantité de courant qui circule depuis une première source de puissance d'excitation (ELVDD) jusqu'à une seconde source de puissance d'excitation (ELVSS) via la diode électroluminescente organique (OLED), lequel courant correspond à une tension d'un premier nœud (N1) ;
 un deuxième transistor (M2) qui est couplé entre le premier nœud (N1) et un second nœud (N2), le deuxième transistor (M2) étant configuré de manière à ce qu'il soit activé en réponse à un signal de balayage qui est fourni à une i-ème (i est un nombre naturel) ligne de balayage (Si) ;
 un troisième transistor (M3) qui est couplé entre le second nœud (N2) et une électrode d'anode de la diode électroluminescente organique (OLED) ;
 un premier condensateur (C1) qui est couplé entre une ligne de données (D) et le second nœud (N2) ;
 un quatrième transistor (M4) qui est couplé entre une source de puissance d'initialisation (Vint) et l'électrode d'anode de la diode électroluminescente organique (OLED), le quatrième transistor (M4) étant configuré de manière à ce qu'il soit activé en réponse à un premier signal de commande qui est fourni à une première ligne de commande (CL1) ; et

un condensateur de stockage (Cst) qui est couplé entre le premier nœud (N1) et la source de puissance d'initialisation (Vint).

2. Pixel selon la revendication 1, dans lequel une période d'activation du quatrième transistor (M4) en réponse au premier signal de commande chevauche au moins partiellement celle du deuxième transistor (M2) en réponse au signal de balayage.
3. Pixel selon la revendication 1, dans lequel le troisième transistor (M3) est configuré de manière à ce qu'il soit activé en réponse à un second signal de commande (CL2) qui est fourni à une seconde ligne de commande, et une période d'activation du troisième transistor (M3) chevauche au moins partiellement celle du deuxième transistor (M2).
4. Pixel selon la revendication 1, dans lequel le troisième transistor (M3) est configuré de manière à ce qu'il soit activé en réponse à un signal de balayage qui est fourni à une (i+1)-ième ligne de balayage (Si+1).
5. Pixel selon la revendication 1, dans lequel le troisième transistor (M3) est configuré de manière à ce qu'il soit activé en réponse au signal de balayage qui est fourni à la i-ème ligne de balayage (Si).
6. Pixel selon l'une quelconque des revendications qui précèdent, dans lequel le premier transistor (M1) est un transistor de type N.
7. Pixel selon la revendication 6, dans lequel les deuxième à quatrième transistors (M2, M3, M4) sont des transistors de type N.
8. Pixel selon la revendication 7, dans lequel au moins l'un des premier à quatrième transistors (M1(L), M2(L), M3(L), M4(L)) est un transistor semiconducteur en polysilicium.
9. Pixel selon la revendication 7, dans lequel au moins l'un des premier à quatrième transistors (M1(O), M2(O), M3(O), M4(O)) est un transistor semiconducteur en oxyde.
10. Pixel selon la revendication 6, dans lequel au moins l'un des deuxième à quatrième transistors (M2(P), M3(P), M4(P)) est un transistor de type P.
11. Pixel (PXL) comprenant :
- une diode électroluminescente organique (OLED) ;
 un premier transistor (M1) qui est configuré de manière à ce qu'il commande la quantité de courant qui circule depuis une première source de

- puissance d'excitation (ELVDD) jusqu'à une seconde source de puissance d'excitation (ELVSS) via la diode électroluminescente organique (OLED), lequel courant correspond à une tension d'un premier nœud (N1) ;
 un deuxième transistor (M2) qui est couplé entre le premier nœud (N1) et une électrode d'anode de la diode électroluminescente organique (OLED), le deuxième transistor (M2) étant configuré de manière à ce qu'il soit activé en réponse à un signal de balayage qui est fourni à une i-ème (i est un nombre naturel) ligne de balayage (Si) ;
 un troisième transistor (M3) qui est couplé entre l'électrode d'anode de la diode électroluminescente organique (OLED) et une première borne d'un premier condensateur (C1), le troisième transistor (M3) étant configuré de telle sorte qu'il soit activé en réponse au signal de balayage qui est fourni à la i-ème ligne de balayage (Si), le premier condensateur (C1) étant couplé entre le troisième transistor (M3) et une ligne de données (D) ; et
 un quatrième transistor (M4) qui est couplé entre une source de puissance d'initialisation (Vint) et l'électrode d'anode de la diode électroluminescente organique (OLED), le quatrième transistor (M4) étant configuré de manière à ce qu'il soit activé en réponse à un premier signal de commande qui est fourni à une première ligne de commande (CL1) ; et
 un condensateur de stockage (Cst) qui est couplé entre le premier nœud (N1) et la source de puissance d'initialisation (Vint).
- 12.** Pixel selon la revendication 11, dans lequel une période d'activation du quatrième transistor (M4) en réponse au premier signal de commande chevauche au moins partiellement celle du deuxième transistor (M2) en réponse au signal de balayage.
- 13.** Dispositif d'affichage électroluminescent organique configuré de manière à ce qu'il soit piloté pendant une période d'une trame (1F) qui est divisée en une période d'initialisation, une période de compensation de tension de seuil, une période de programmation et une période d'électroluminescence, le dispositif d'affichage électroluminescent organique comprenant :
- des pixels (PXL) qui sont couplés à des lignes de balayage (S) et à des lignes de données (D) ;
 un pilote de balayage (110) qui est configuré de manière à ce qu'il fournisse un signal de balayage aux lignes de balayage (S) ;
 un pilote de commande (130 ; 130') qui est configuré de manière à ce qu'il fournisse un premier signal de commande à une première ligne de commande (CL1) qui est couplée de façon commune aux pixels (PXL) ; et
 une unité d'alimentation (160) qui est configurée de manière à ce qu'elle fournisse aux pixels (PXL) une première source de puissance d'excitation (ELVDD), une seconde source de puissance d'excitation (ELVSS) et une source de puissance d'initialisation (Vint) ;
 dans lequel un pixel (PXL) qui est localisé sur une i-ème (i est un nombre naturel) ligne horizontale est tel que défini selon l'une quelconque des revendications qui précèdent.
- 14.** Dispositif d'affichage électroluminescent organique selon la revendication 13, dans lequel le pilote de commande (130 ; 130') est configuré de manière à ce qu'il fournisse le premier signal de commande pendant la période d'initialisation.
- 15.** Dispositif d'affichage électroluminescent organique selon la revendication 13 ou 14, dans lequel le pilote de balayage (110) est configuré de manière à ce qu'il fournisse de façon simultanée le signal de balayage aux lignes de balayage (S) pendant la période d'initialisation et la période de compensation de tension de seuil, et de manière à ce qu'il fournisse de façon séquentielle le signal de balayage aux lignes de balayage (S) pendant la période de programmation.
- 16.** Dispositif d'affichage électroluminescent organique selon la revendication 13, 14 ou 15, dans lequel l'unité d'alimentation (160) est configurée de manière à ce qu'elle alimente la source de puissance d'initialisation (Vint) qui présente une première tension (V1) pendant la période d'initialisation, la période de compensation de tension de seuil et la période de programmation, et de manière à ce qu'elle alimente la source de puissance d'initialisation (Vint) qui présente une deuxième tension (V2) qui est supérieure à la première tension (V1) pendant la période d'électroluminescence.
- 17.** Dispositif d'affichage électroluminescent organique selon la revendication 16, dans lequel la première tension (V1) est définie à un niveau tel que la diode électroluminescente organique (OLED) n'est pas électroluminescente.
- 18.** Dispositif d'affichage électroluminescent organique selon la revendication 16 ou 17, dans lequel l'unité d'alimentation (160) est configurée de manière à ce qu'elle alimente la première source de puissance d'excitation (ELVDD) qui présente une troisième tension (V3) pendant la période de compensation de tension de seuil, et de manière à ce qu'elle alimente la première source de puissance d'excitation (ELVDD) qui présente une quatrième tension (V4) qui est supérieure à la troisième tension (V3) pendant

les autres périodes.

19. Dispositif d'affichage électroluminescent organique selon la revendication 18, dans lequel la première tension (V1) est définie à une tension qui est supérieure à la troisième tension (V3). 5
20. Dispositif d'affichage électroluminescent organique selon la revendication 13, dans lequel ledit pixel (PXL) qui est localisé sur la i-ème ligne horizontale est tel que revendiqué selon la revendication 1, comprenant en outre une seconde ligne de commande (CL2) qui est couplée de façon commune aux pixels (PXL) ; 10
dans lequel le pilote de commande (130 ; 130') est configuré de manière à ce qu'il fournisse un second signal de commande à la seconde ligne de commande (CL2) pendant la période d'initialisation et la période de compensation de tension de seuil. 15
20
21. Dispositif d'affichage électroluminescent organique selon la revendication 20, dans lequel le troisième transistor (M3) est configuré de manière à ce qu'il soit activé en réponse au second signal de commande qui lui est fourni. 25

30

35

40

45

50

55

FIG. 1

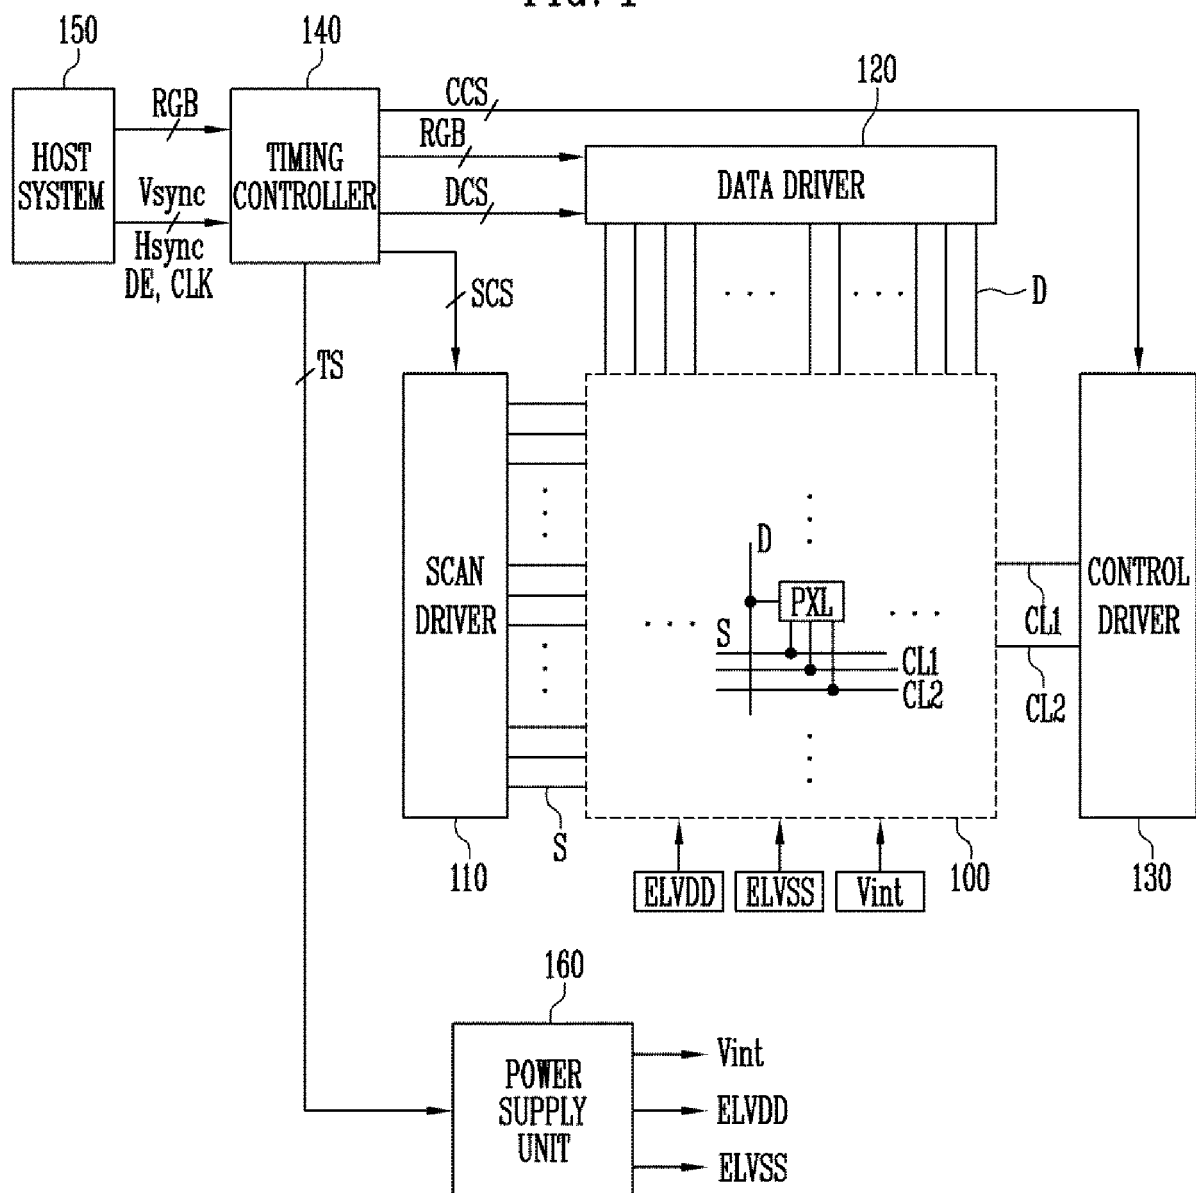


FIG. 2

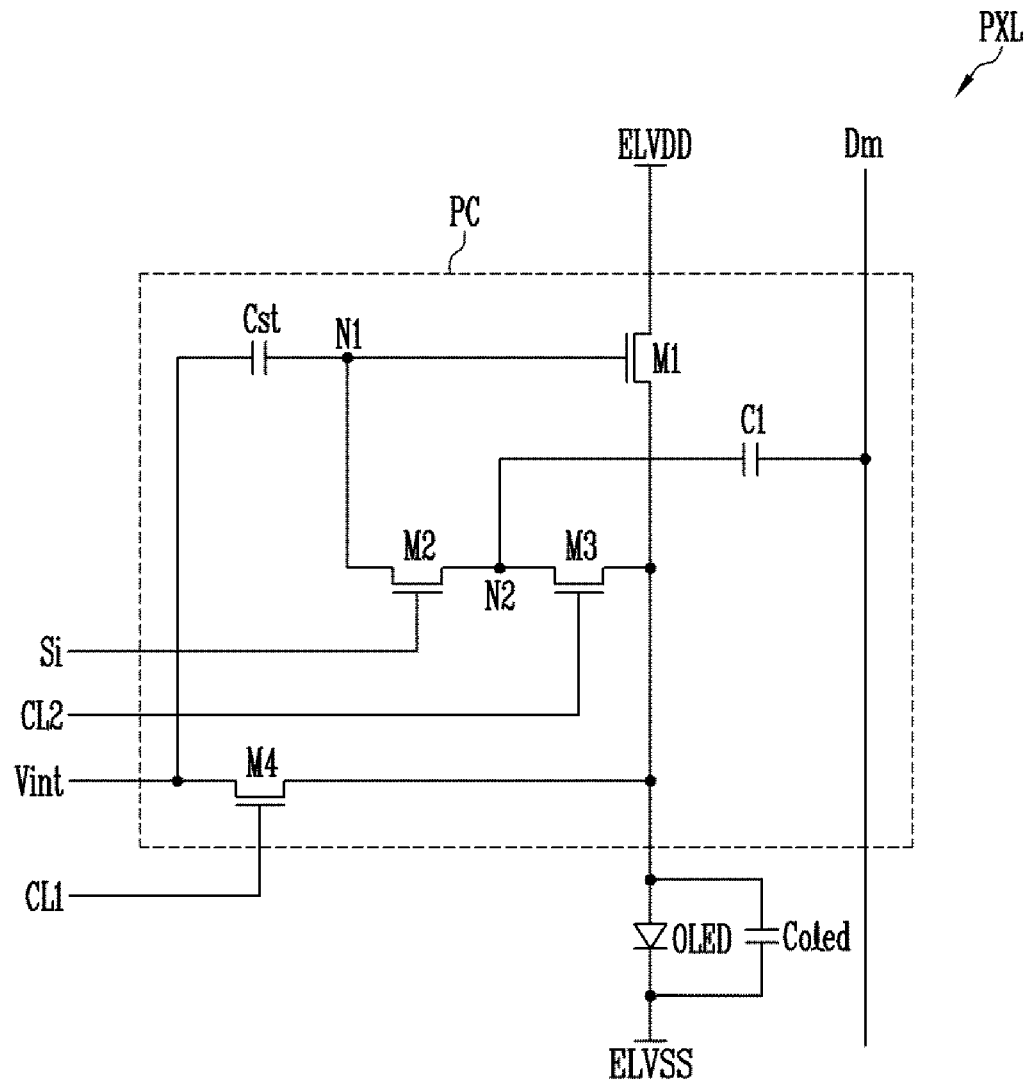


FIG. 3

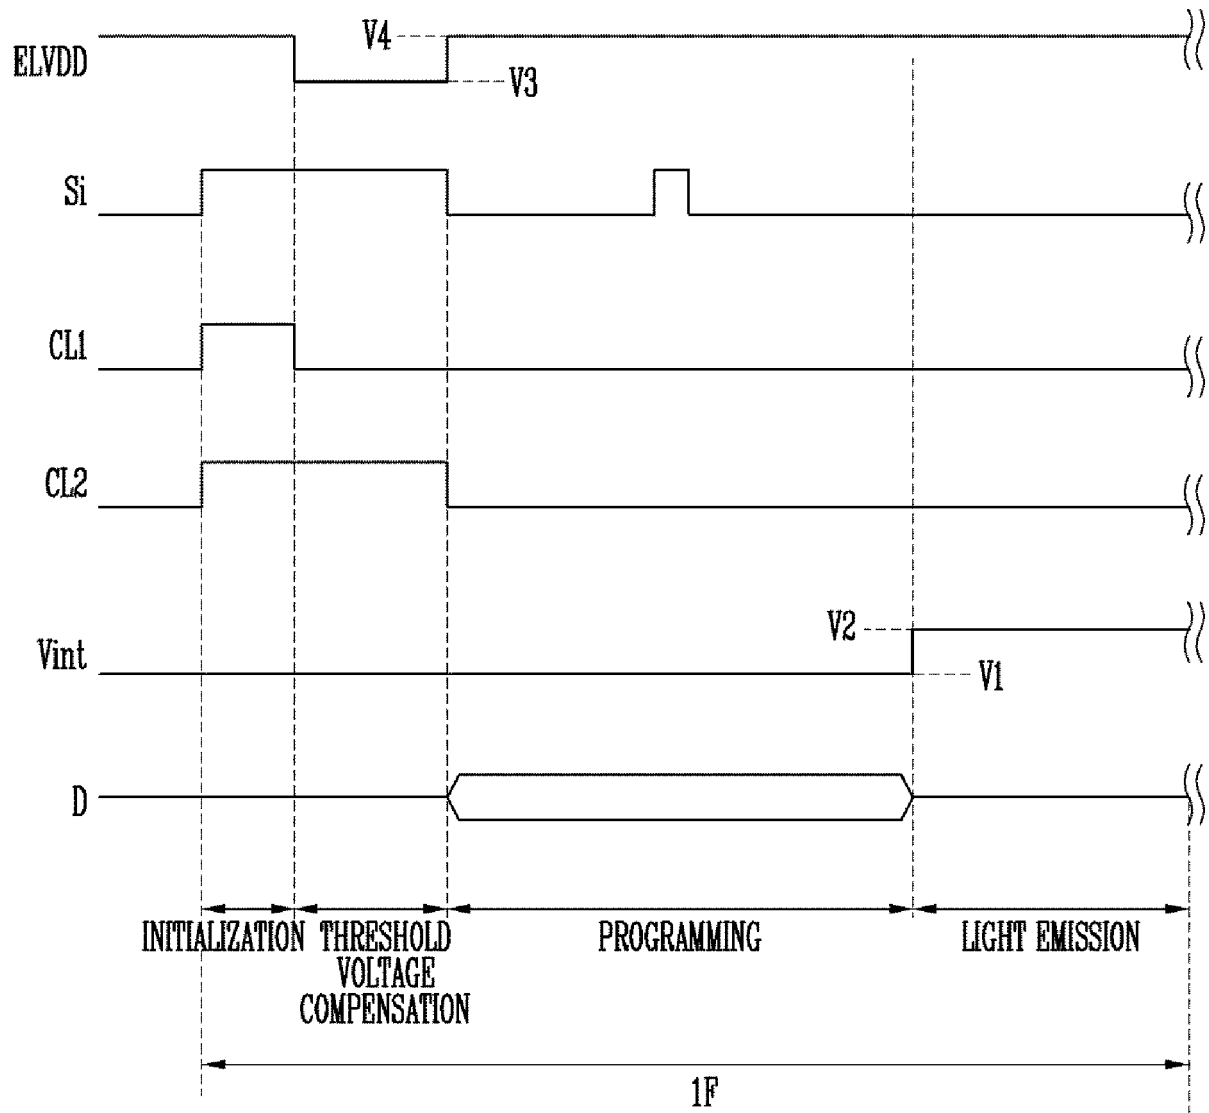


FIG. 4

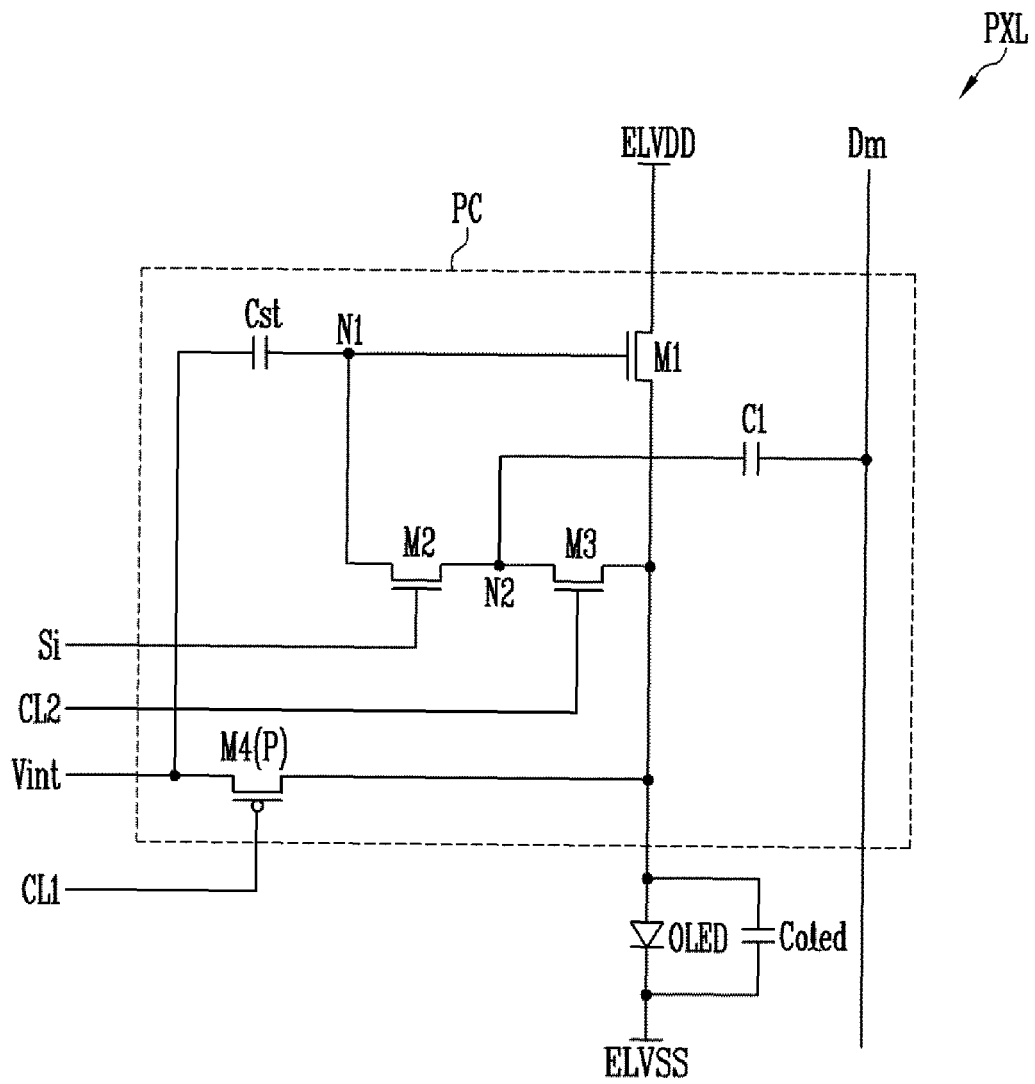


FIG. 5

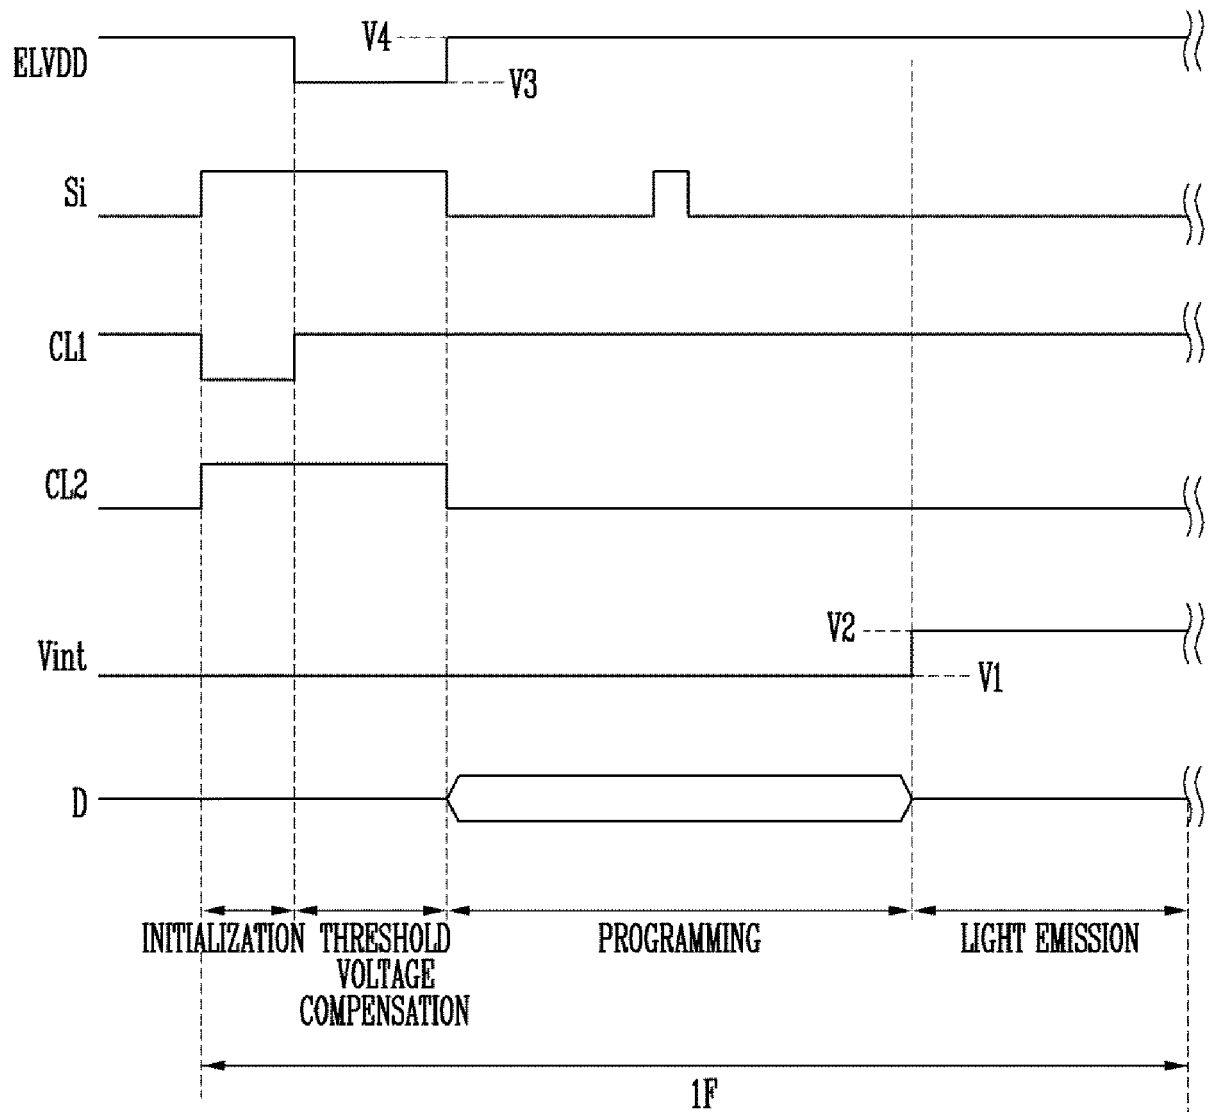


FIG. 6

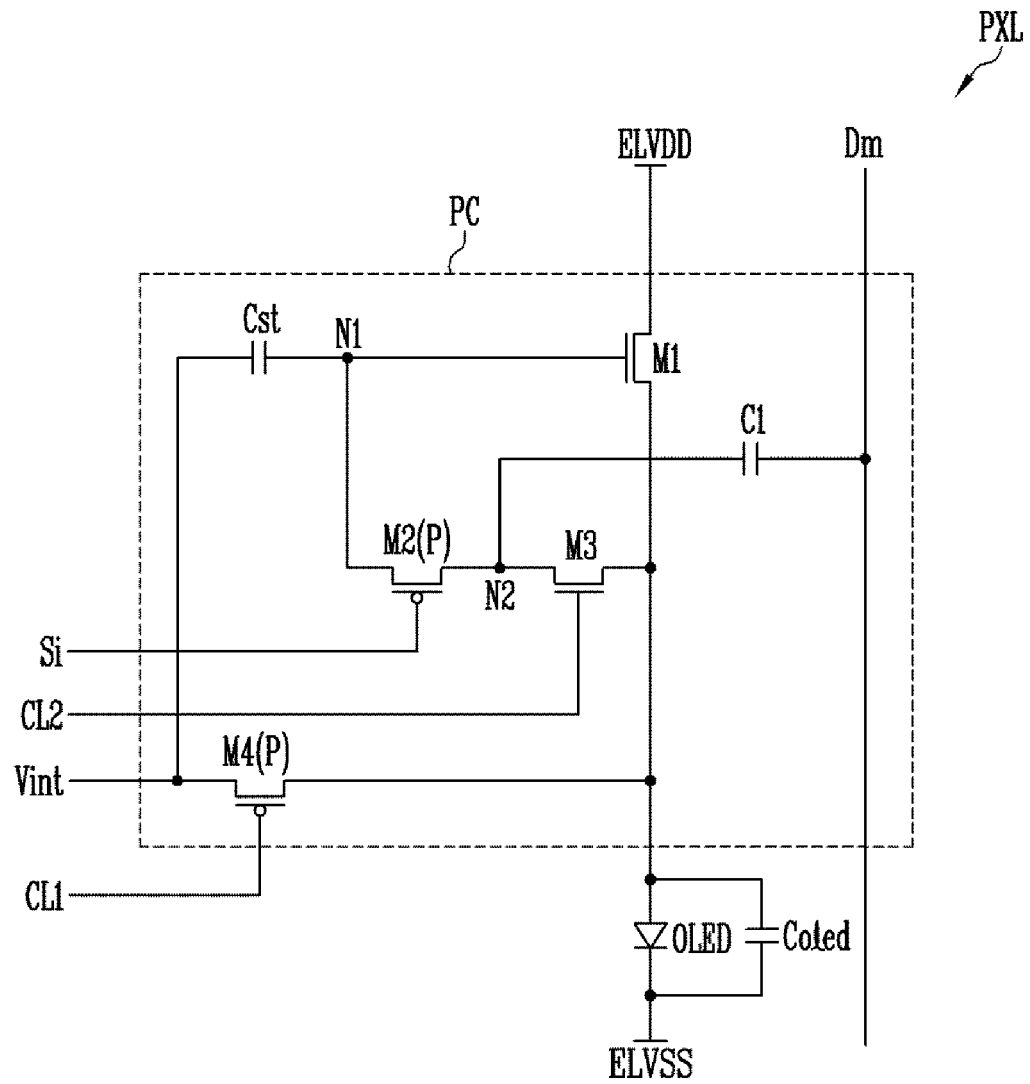


FIG. 7

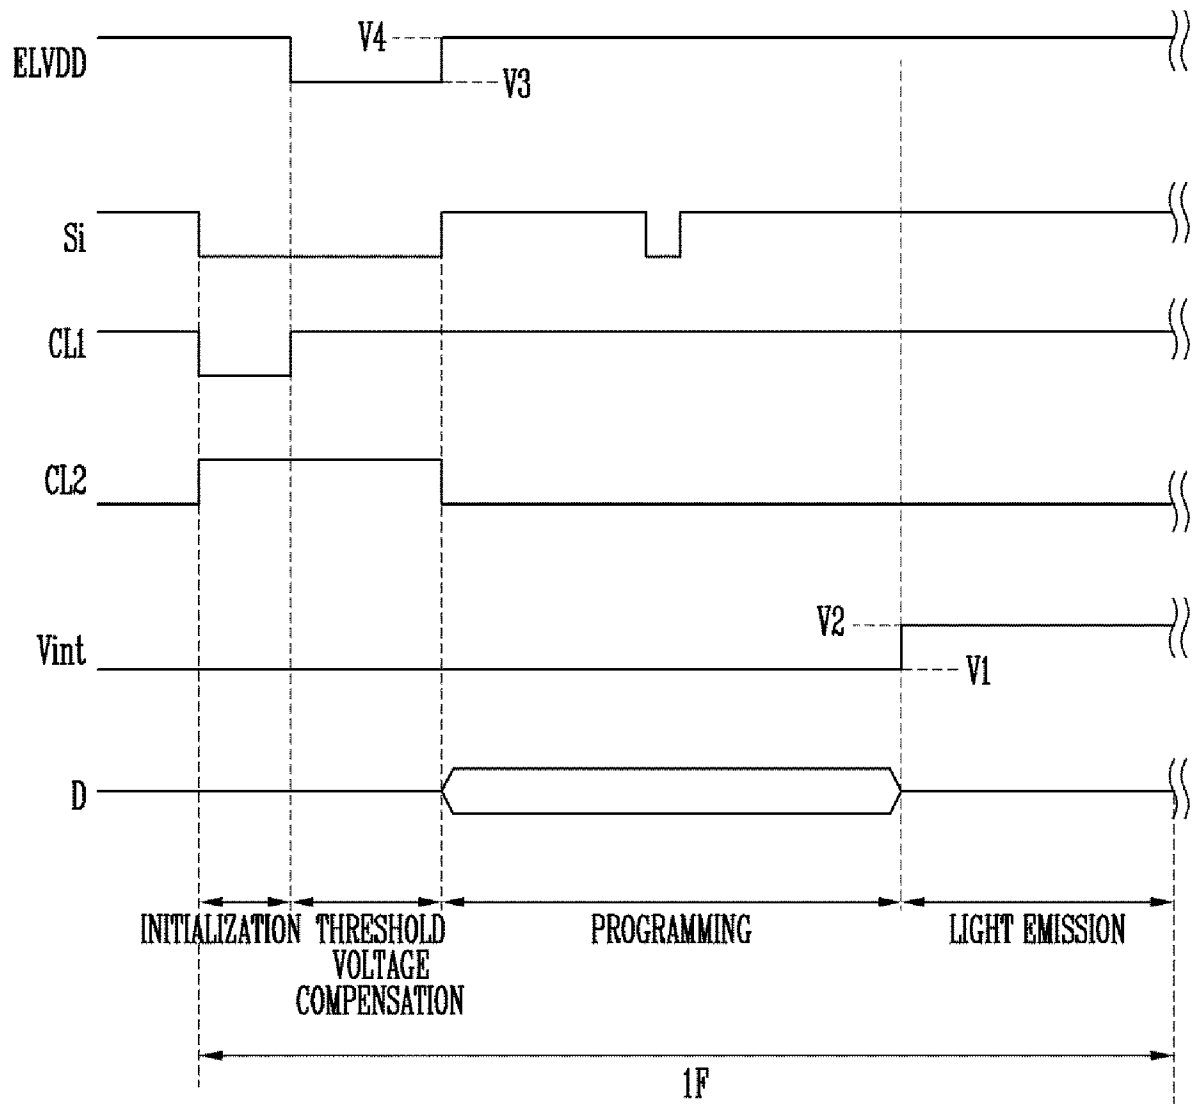


FIG. 8

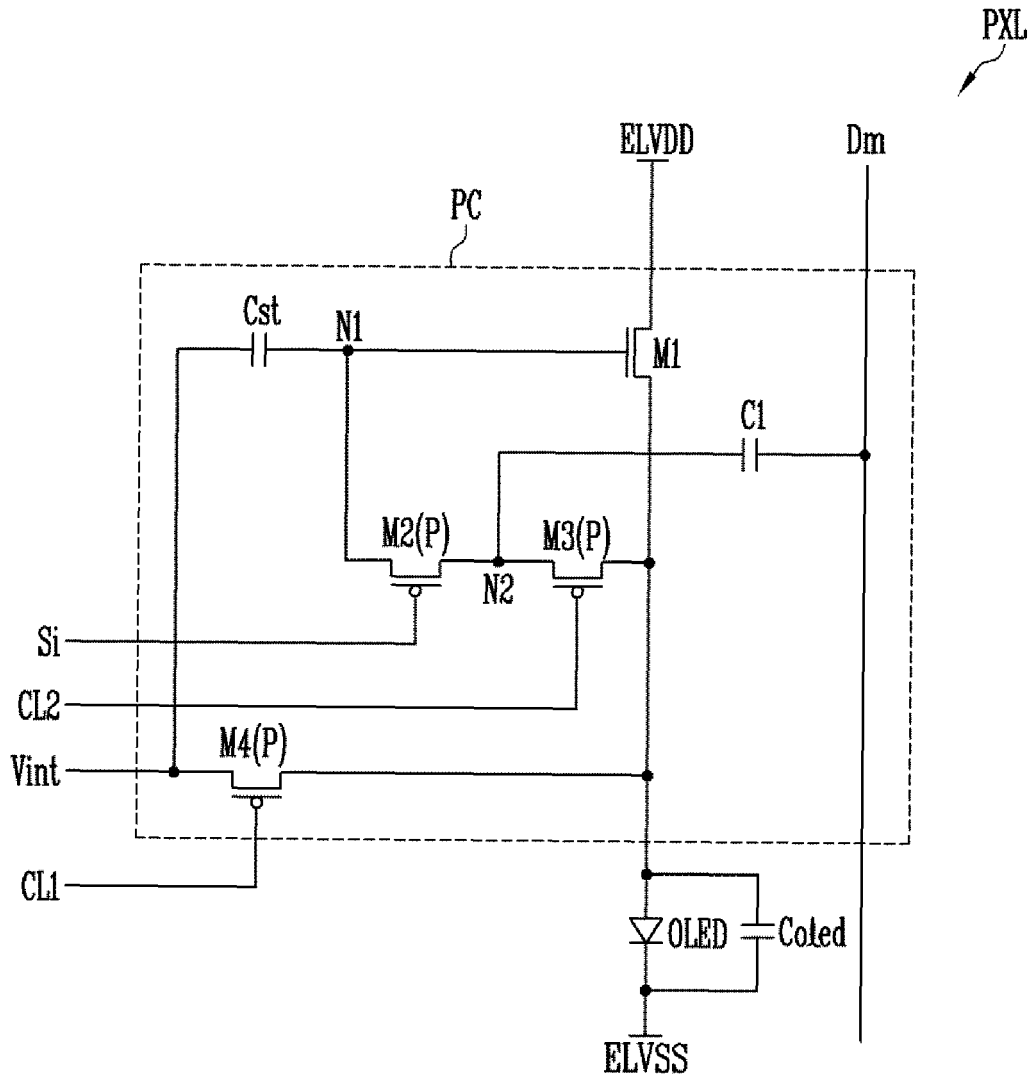


FIG. 9

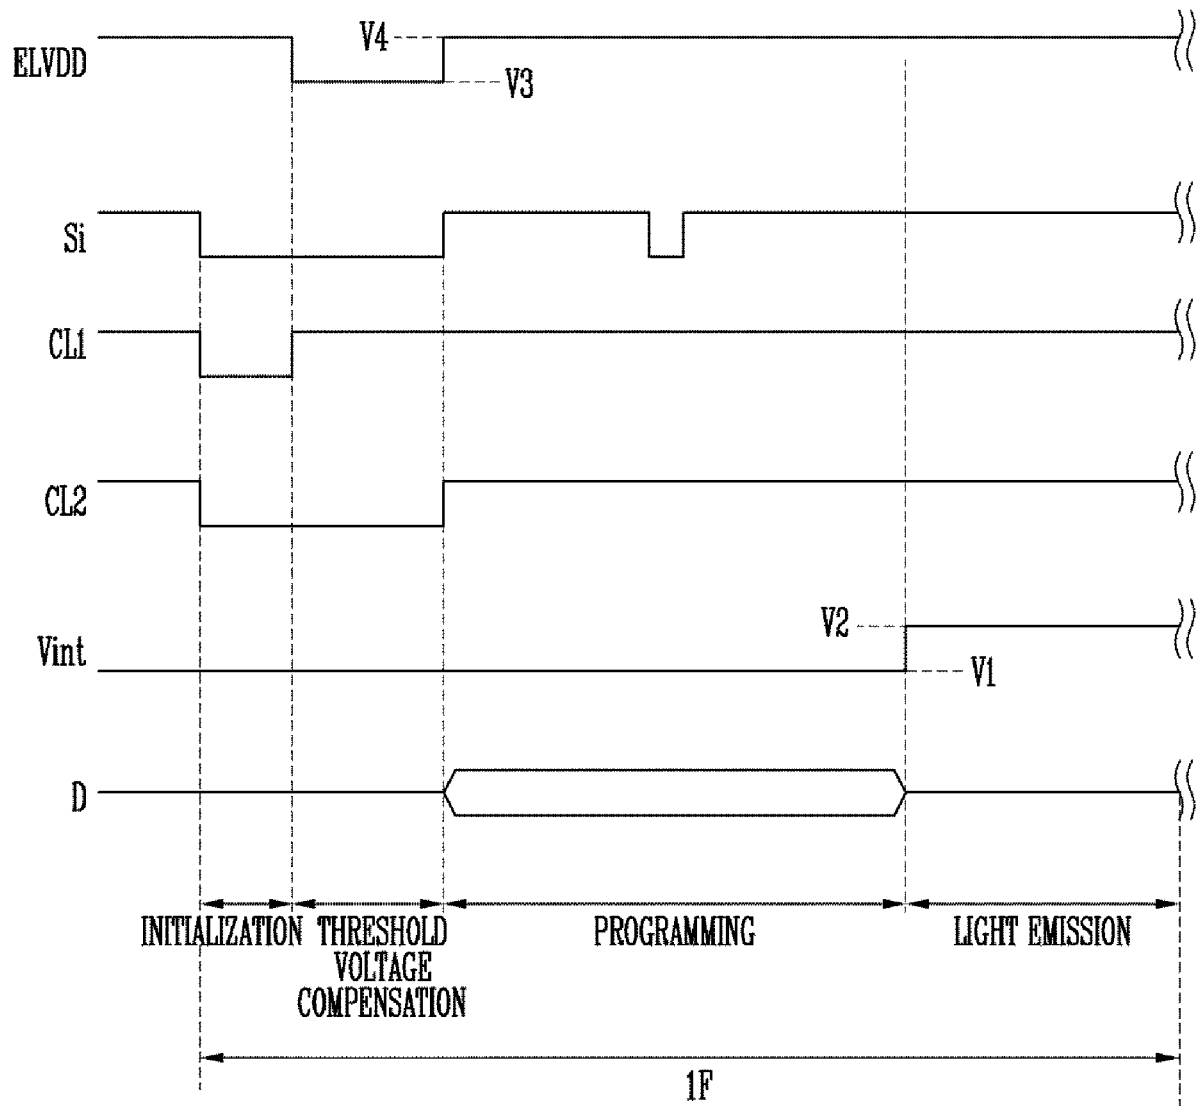


FIG. 10A

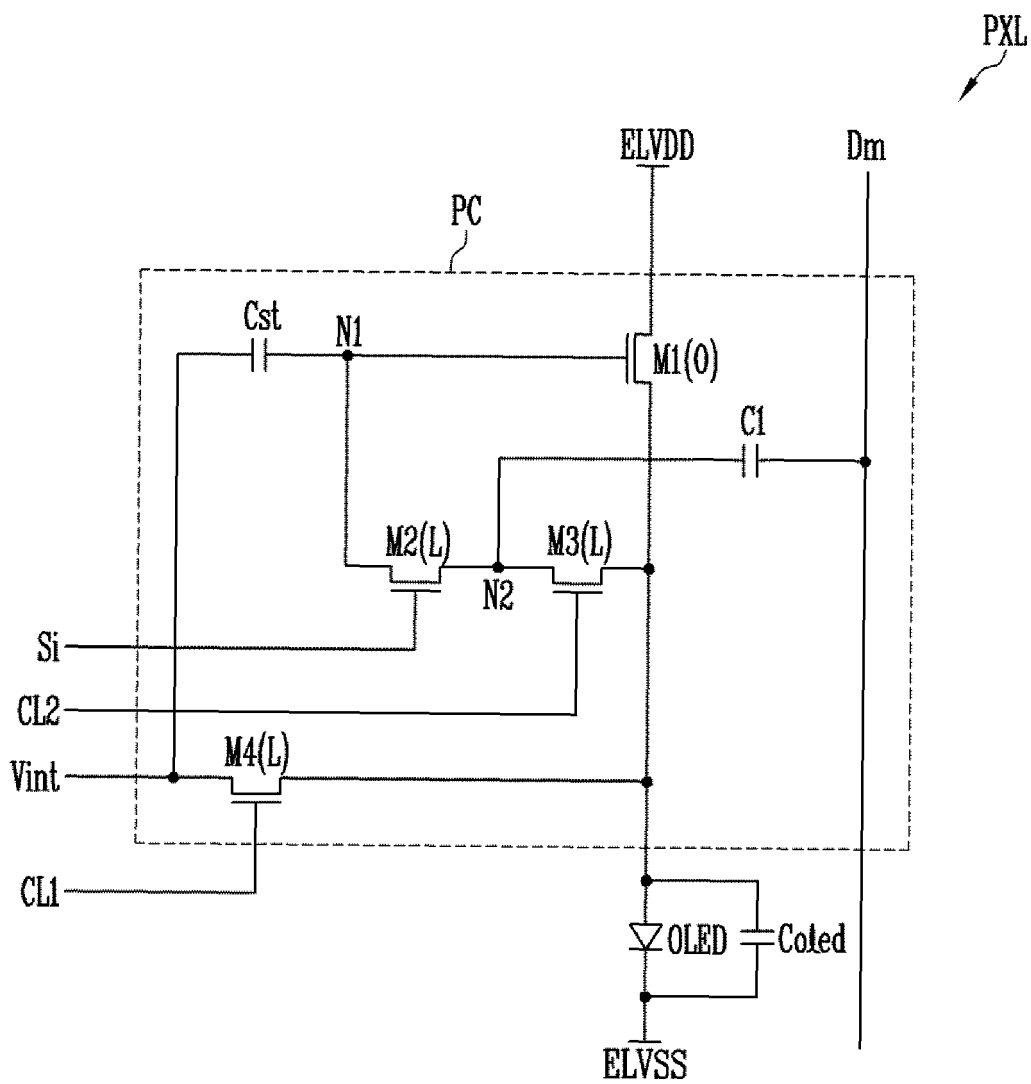


FIG. 10B

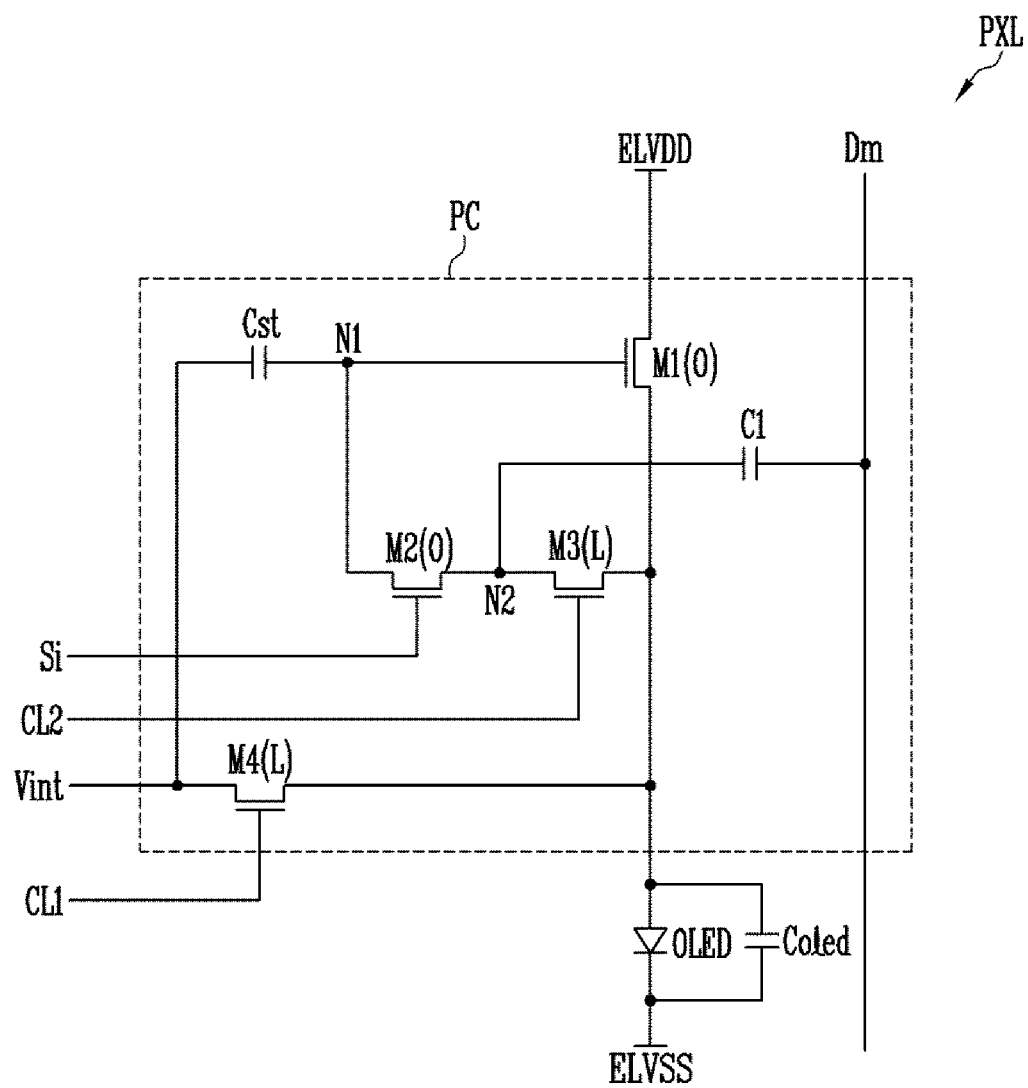


FIG. 10C

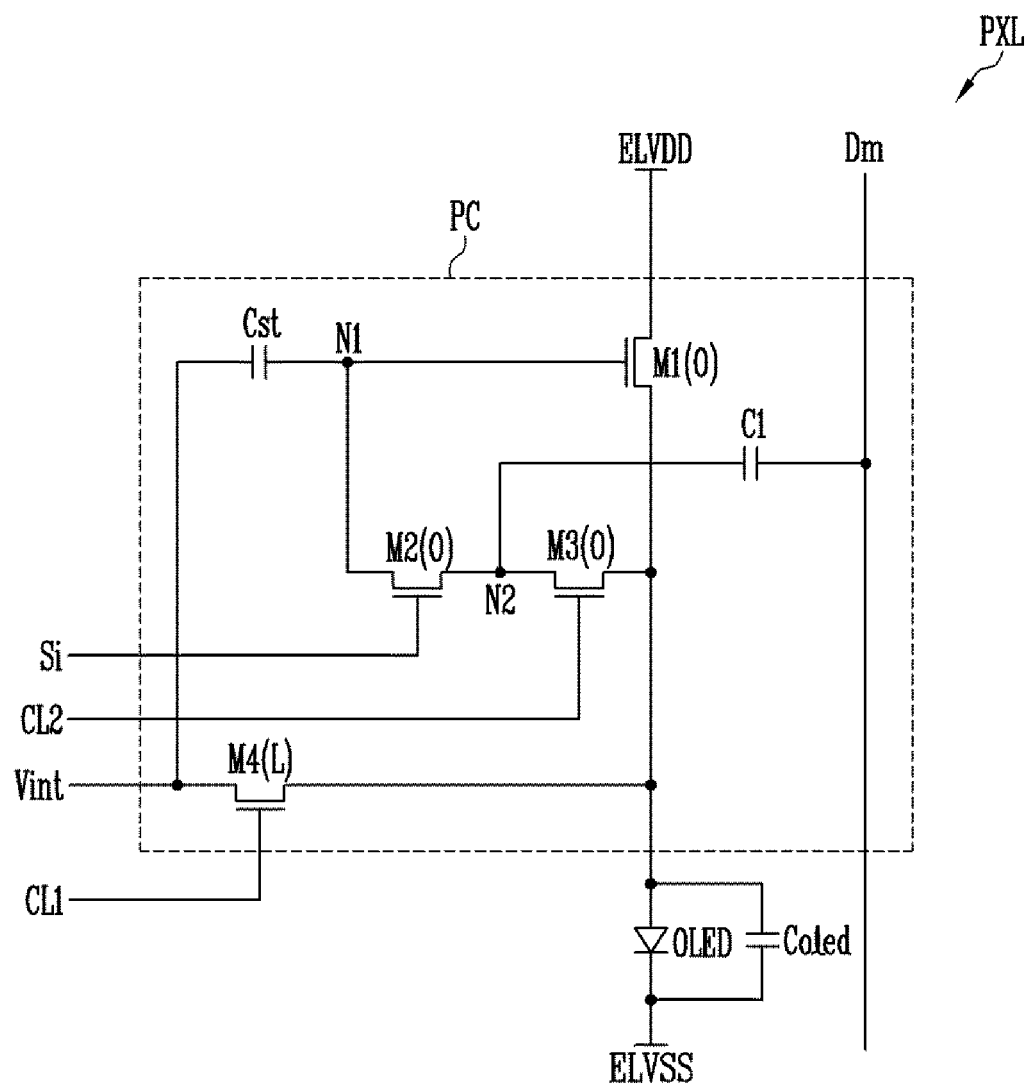


FIG. 10D

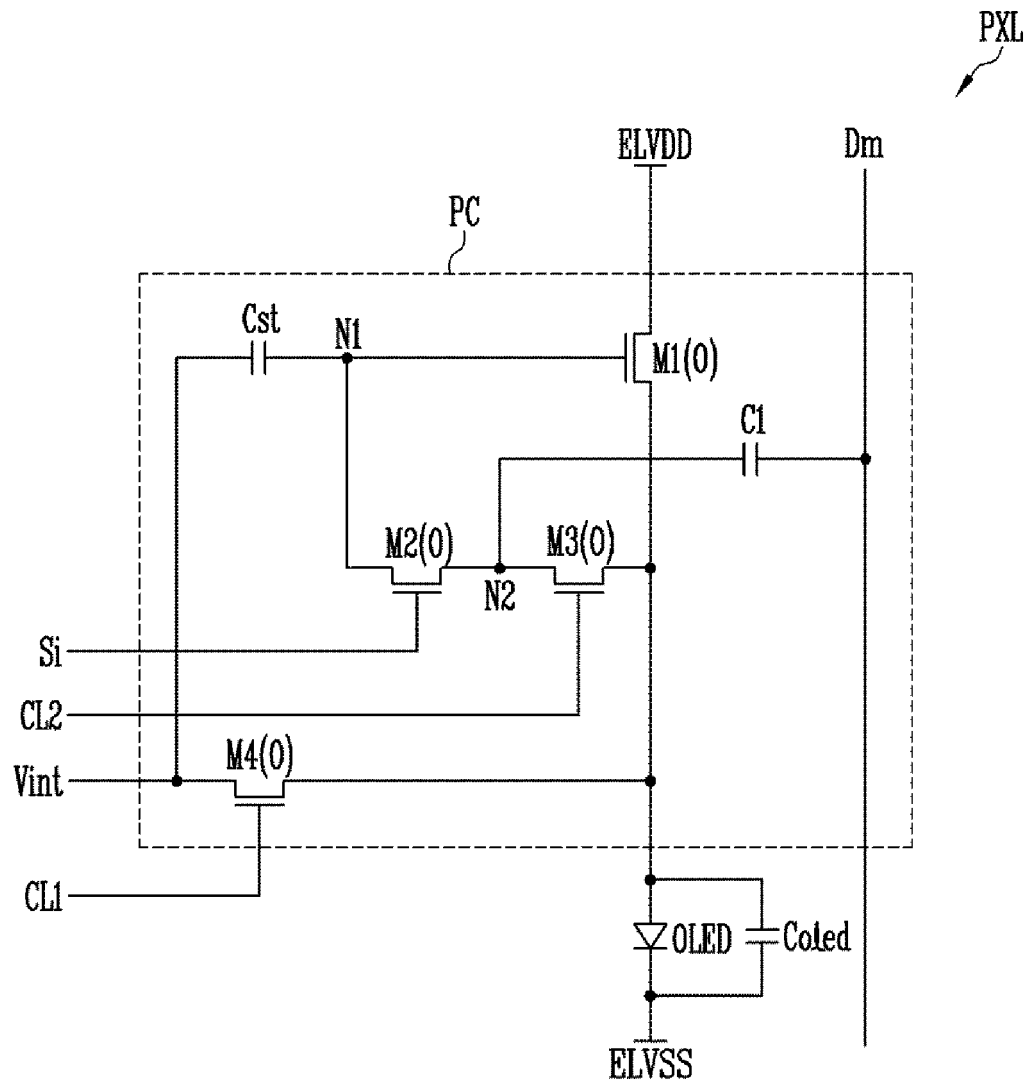


FIG. 11A

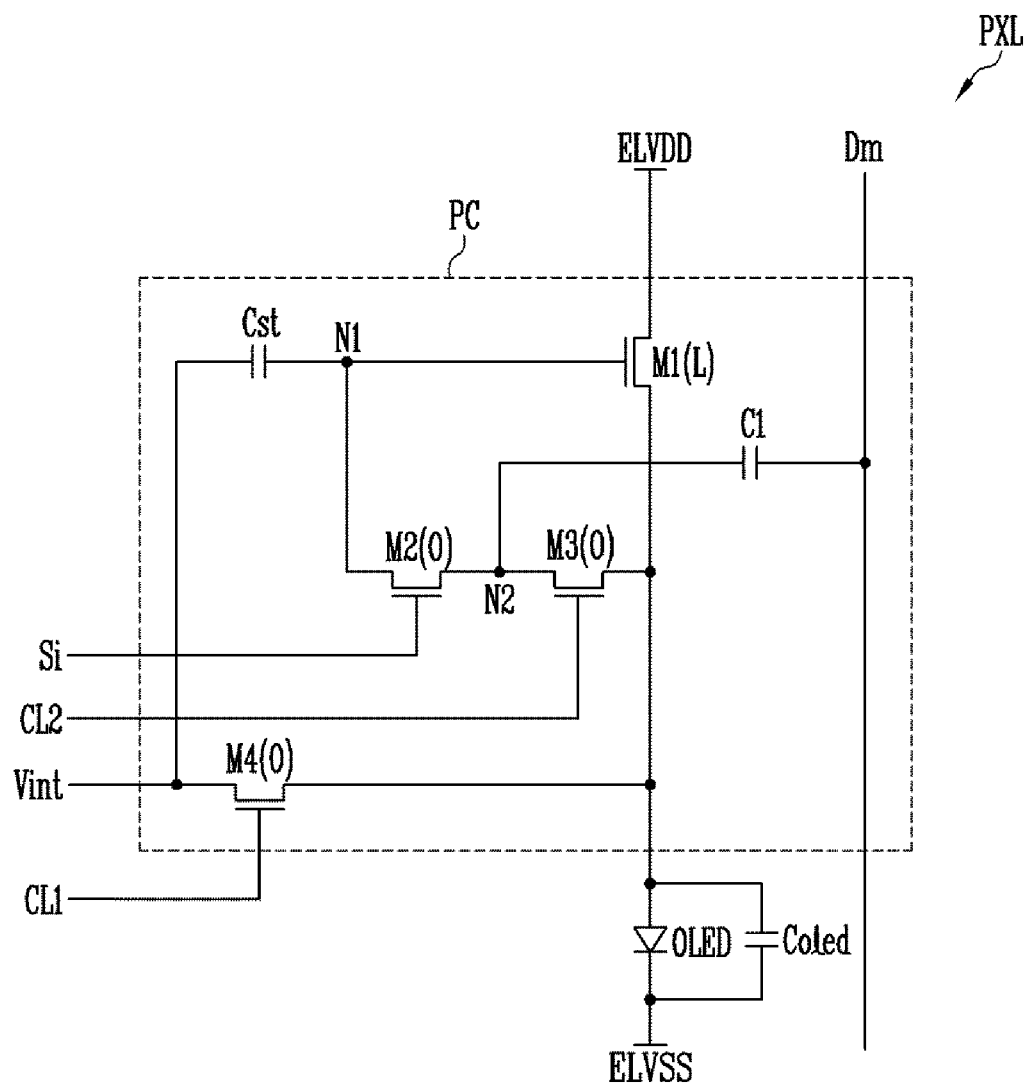


FIG. 11B

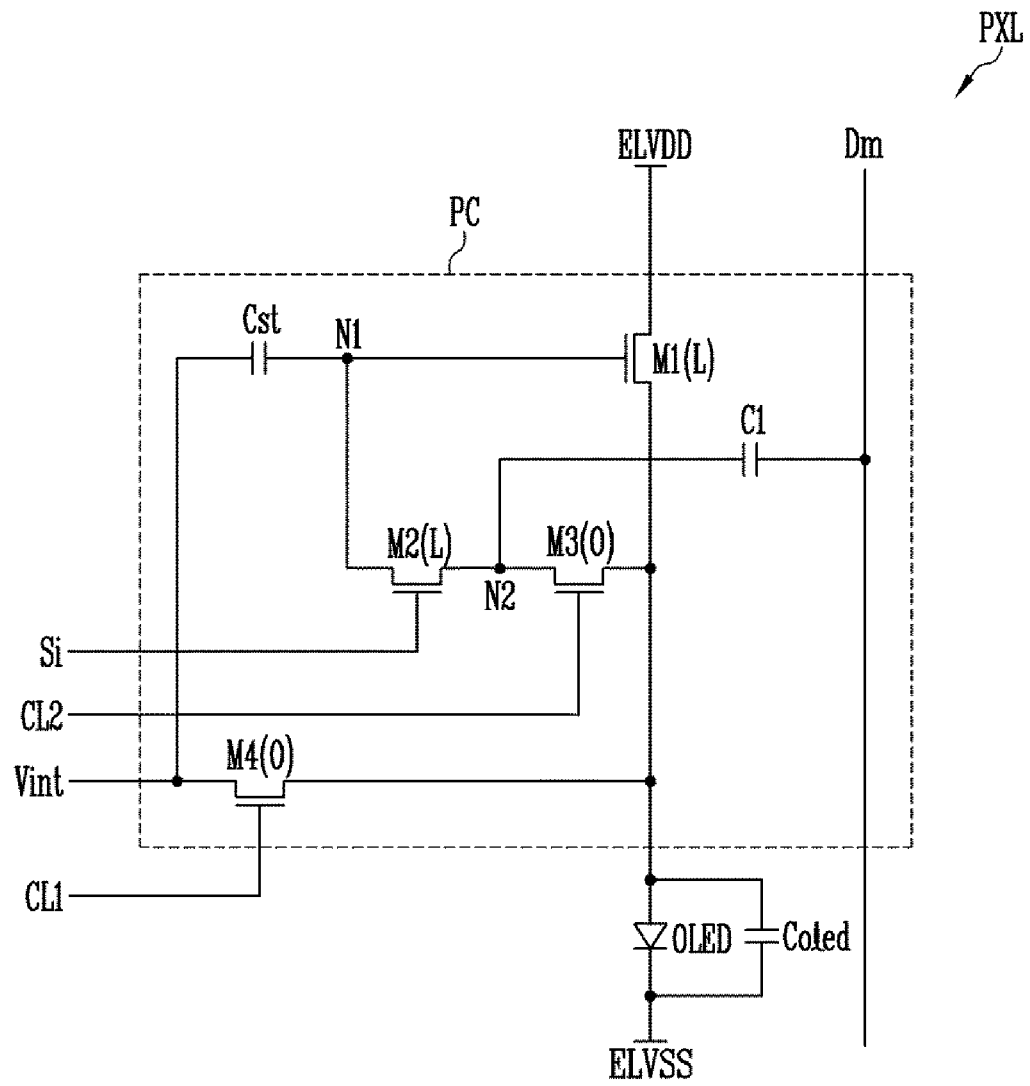


FIG. 11C

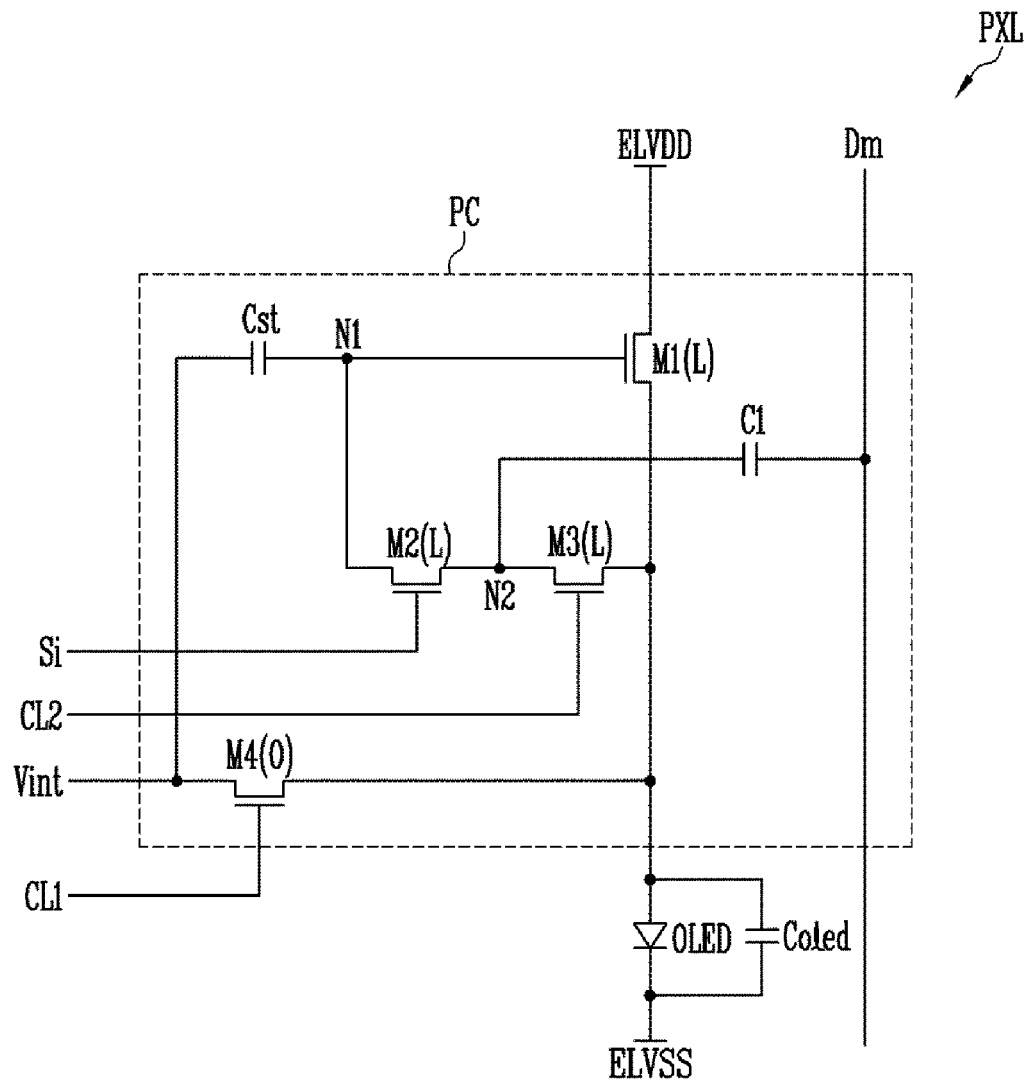


FIG. 11D

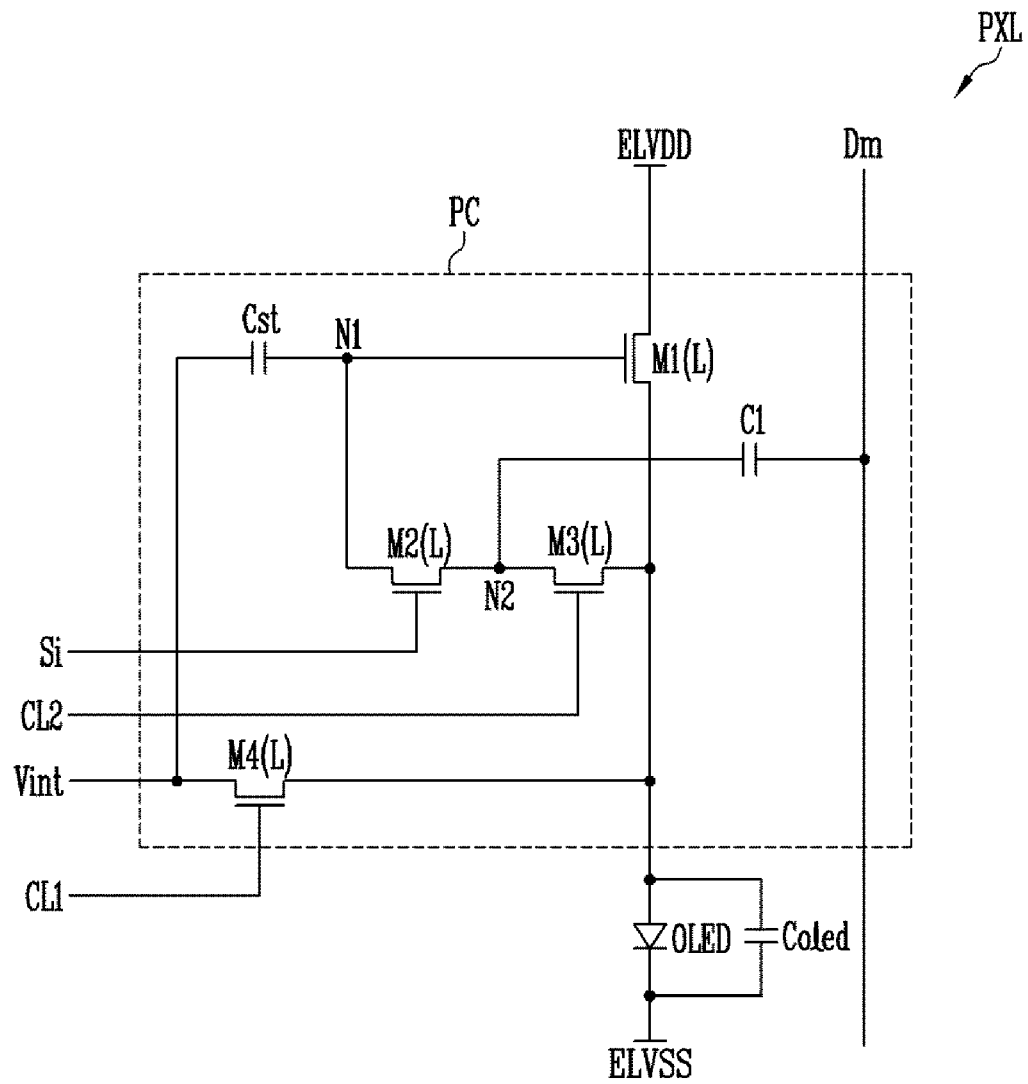


FIG. 12

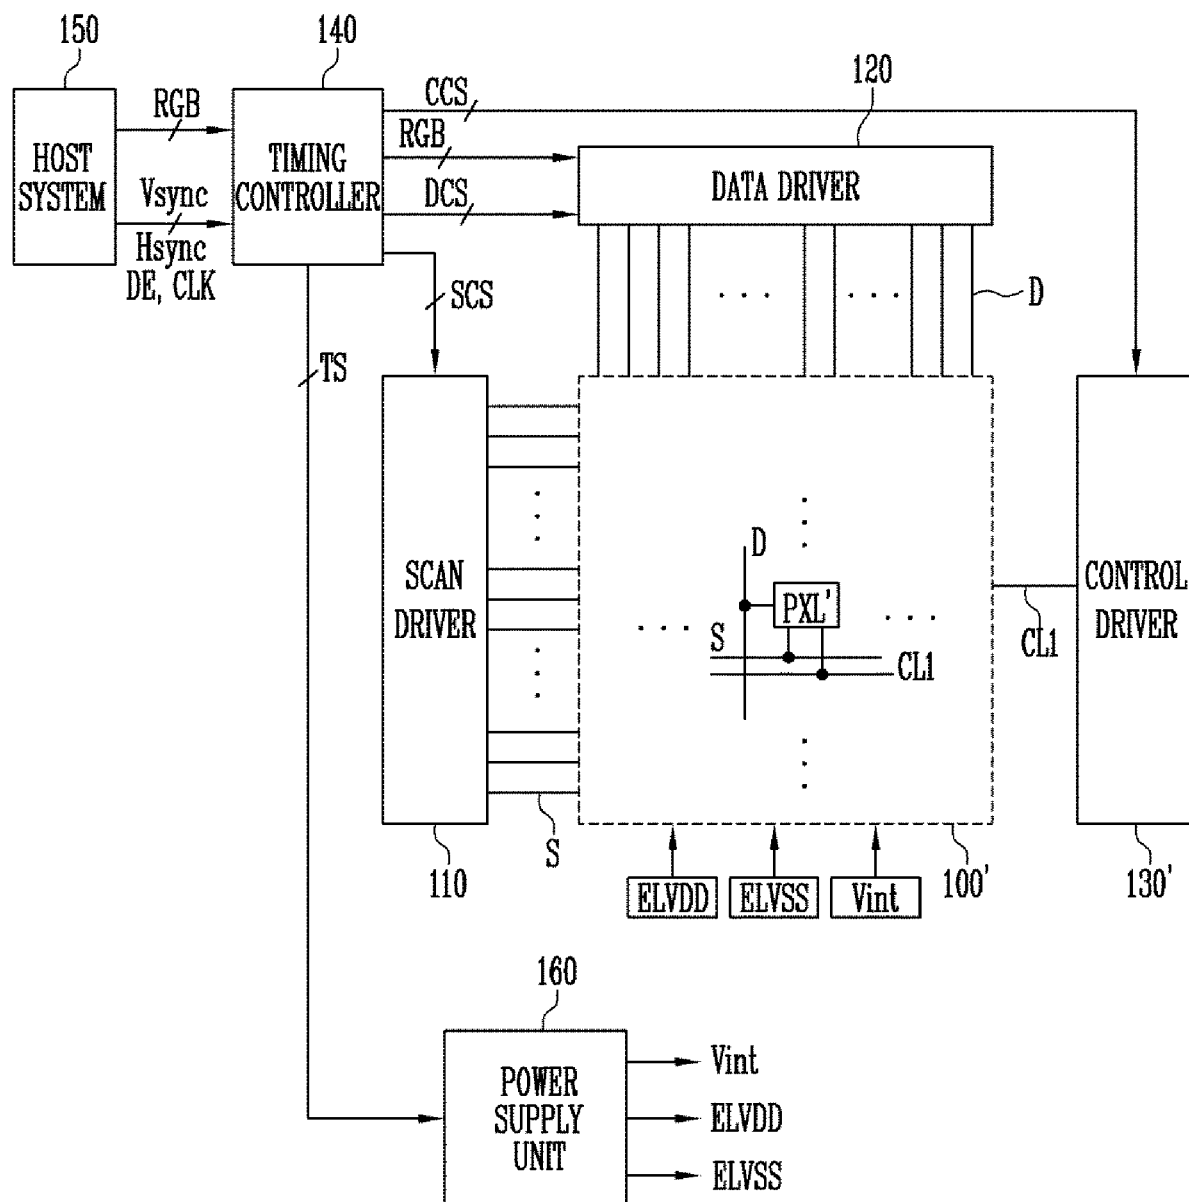


FIG. 13

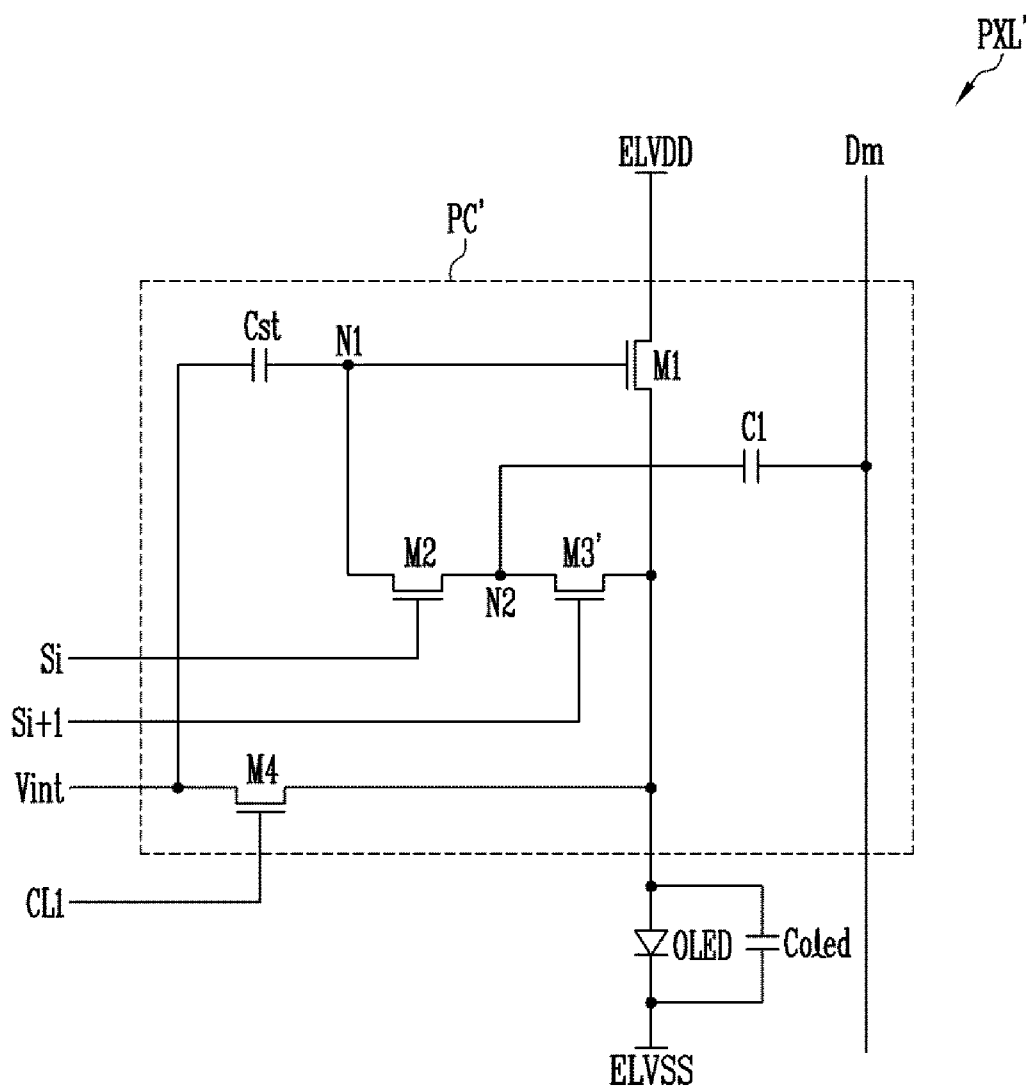


FIG. 14

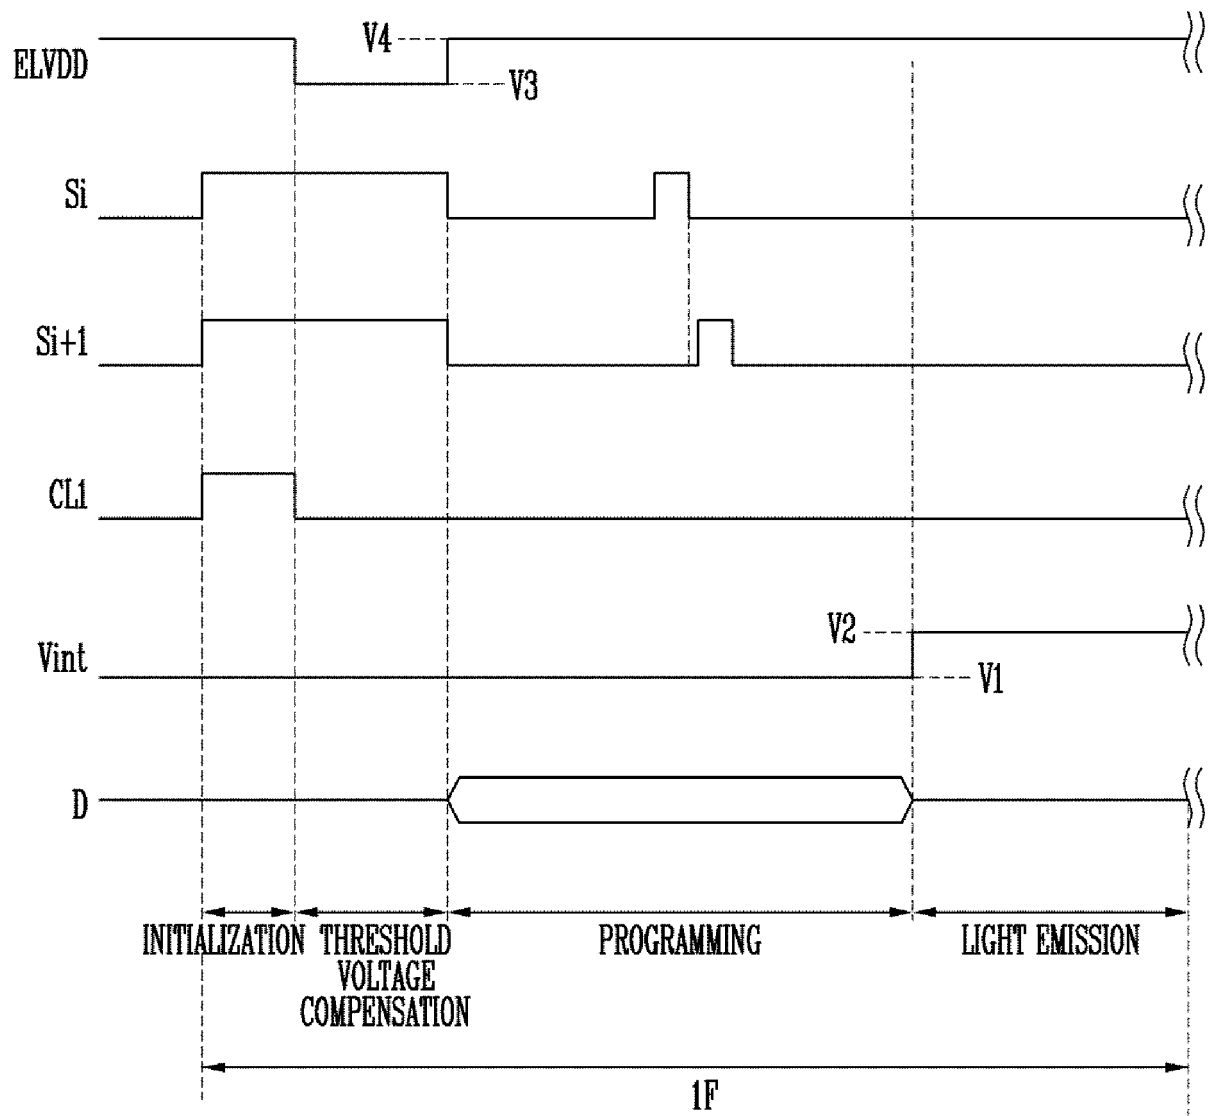


FIG. 15A

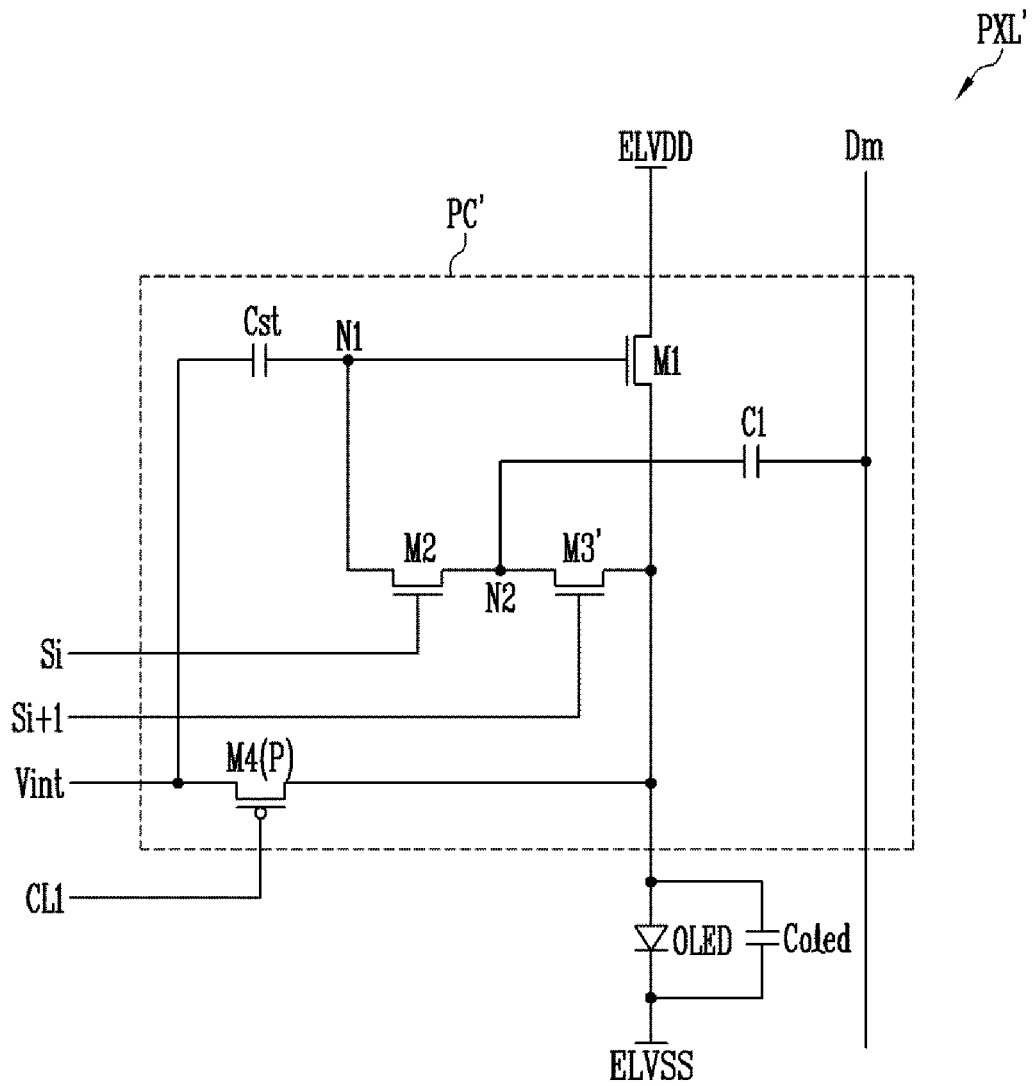


FIG. 15B

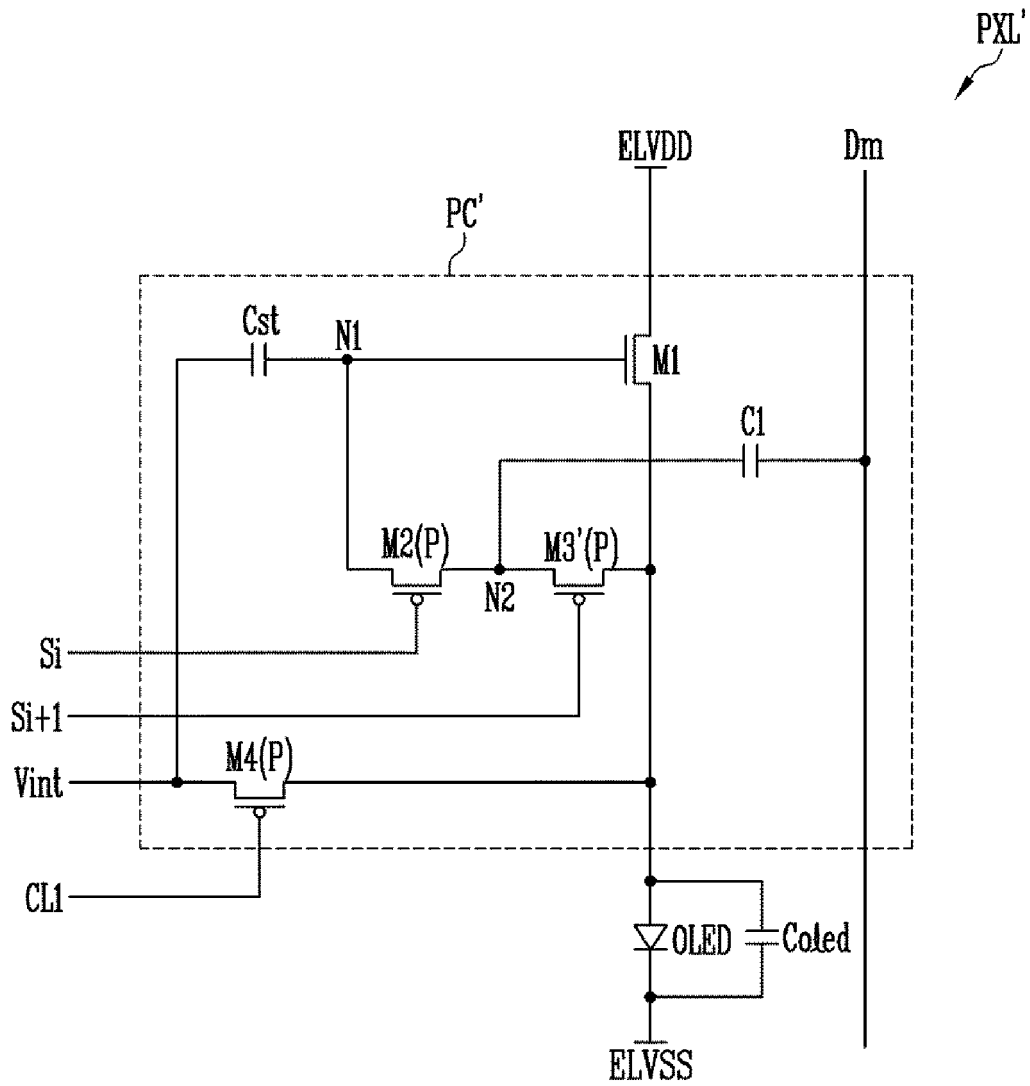


FIG. 16A

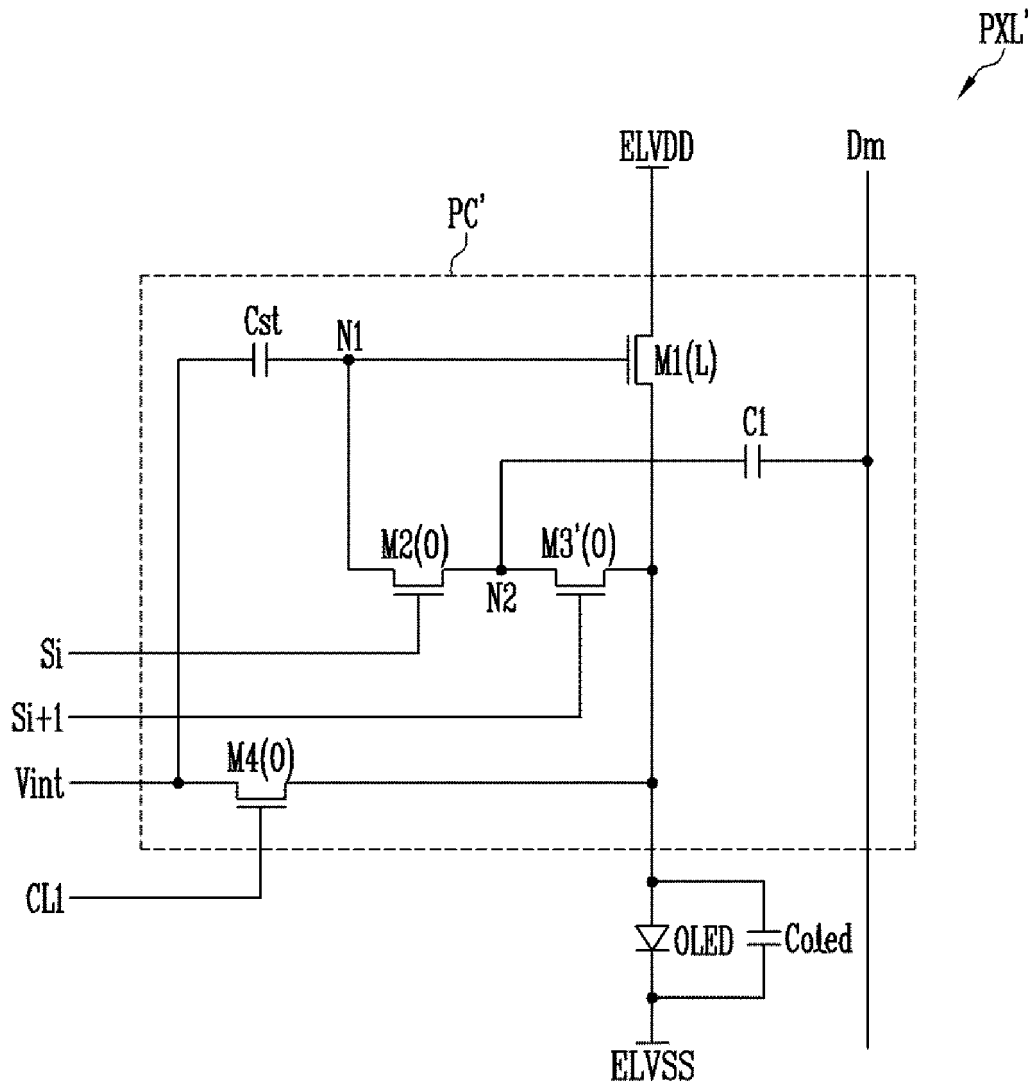


FIG. 16B

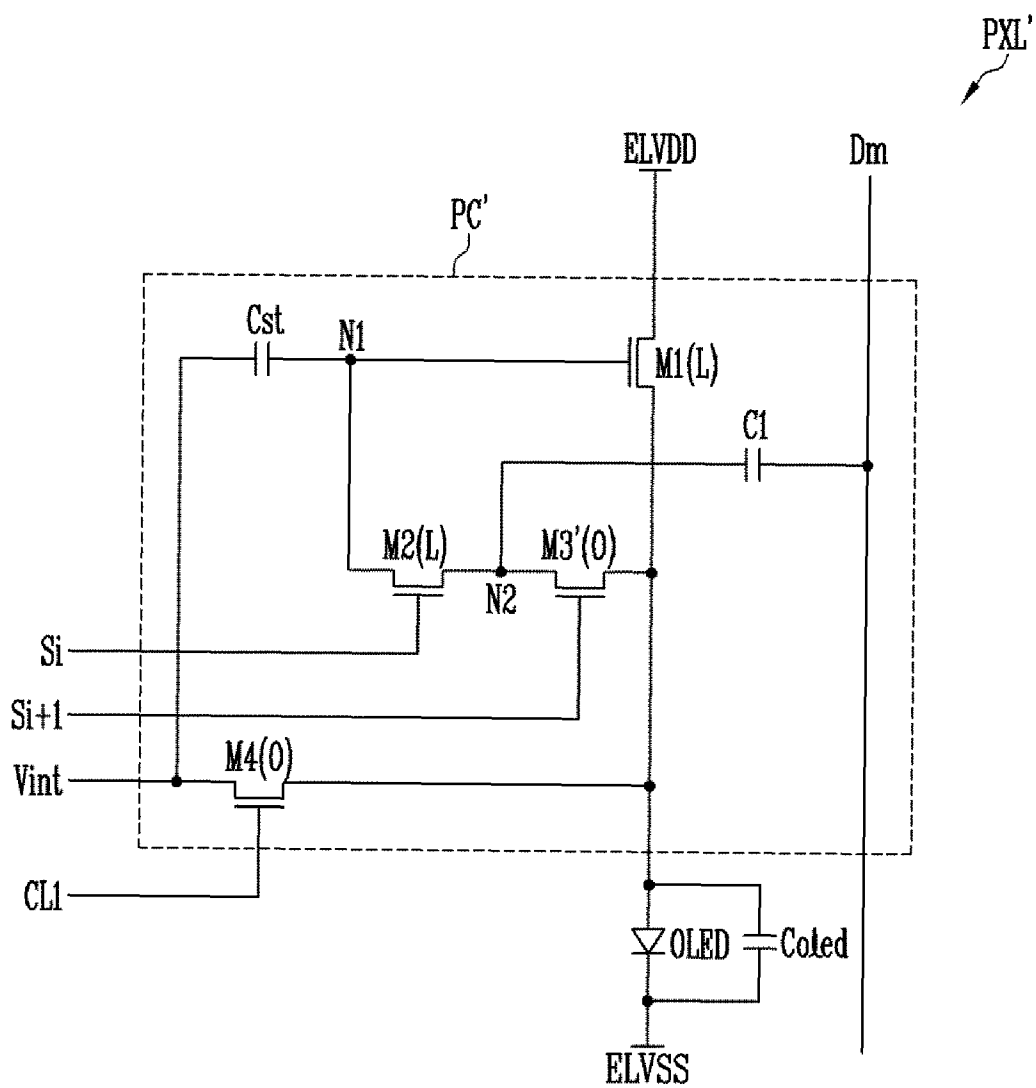


FIG. 16C

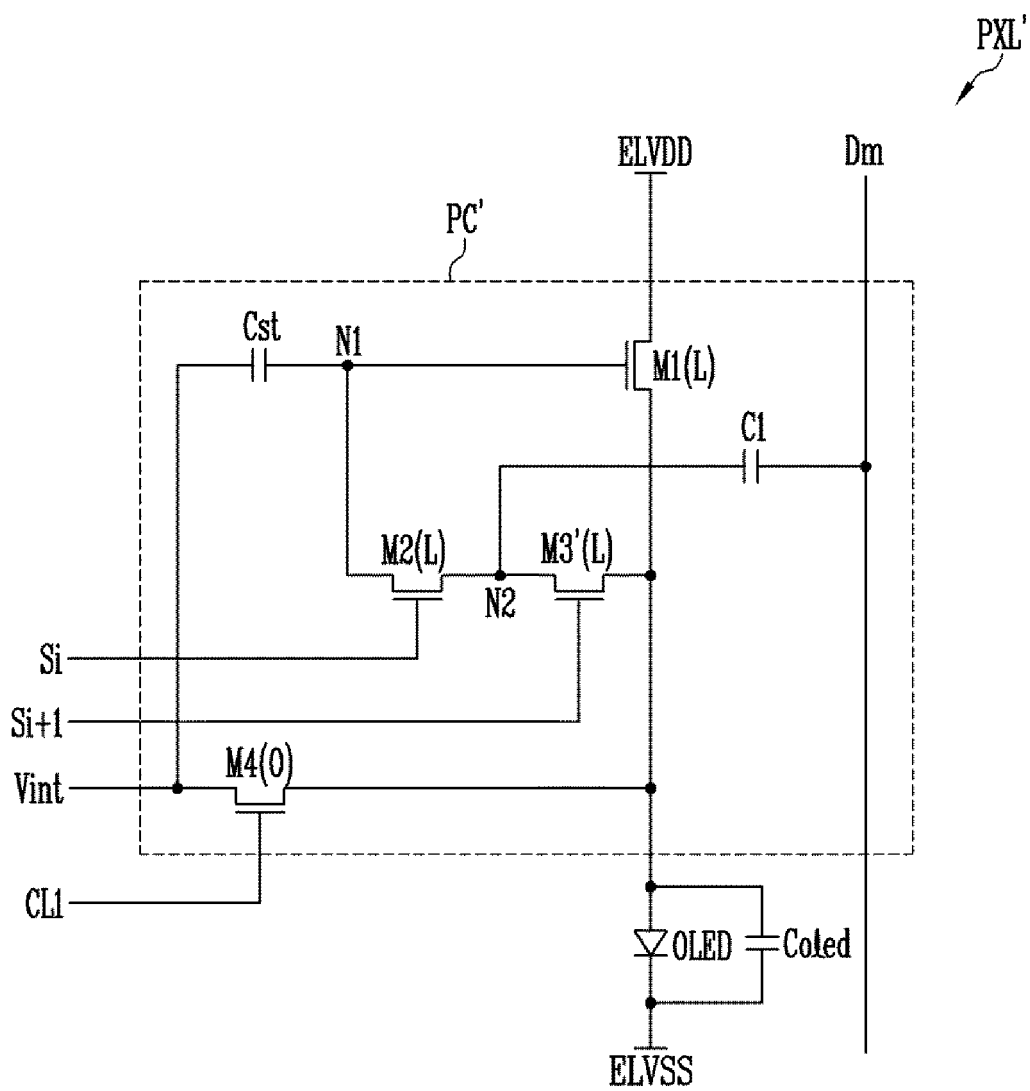


FIG. 16D

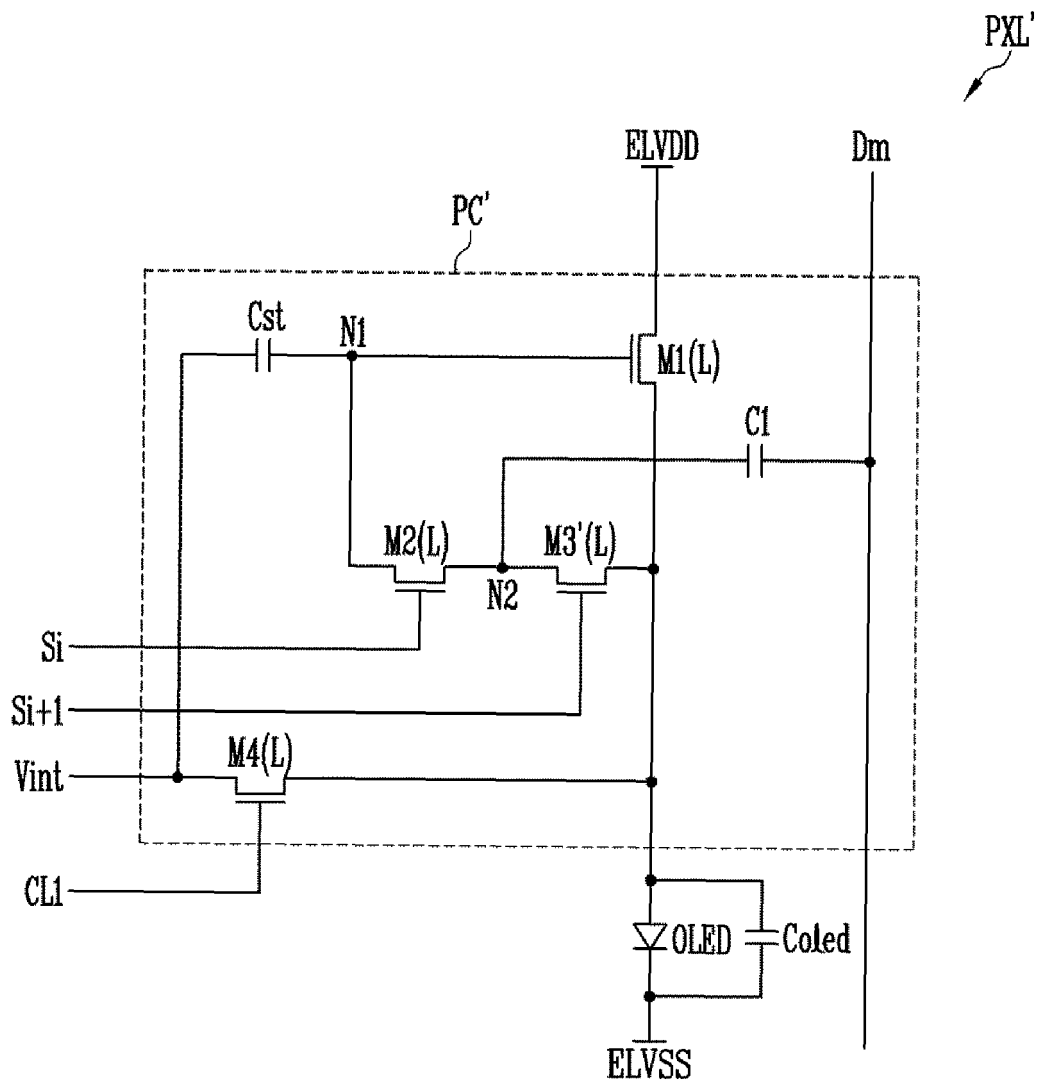


FIG. 17

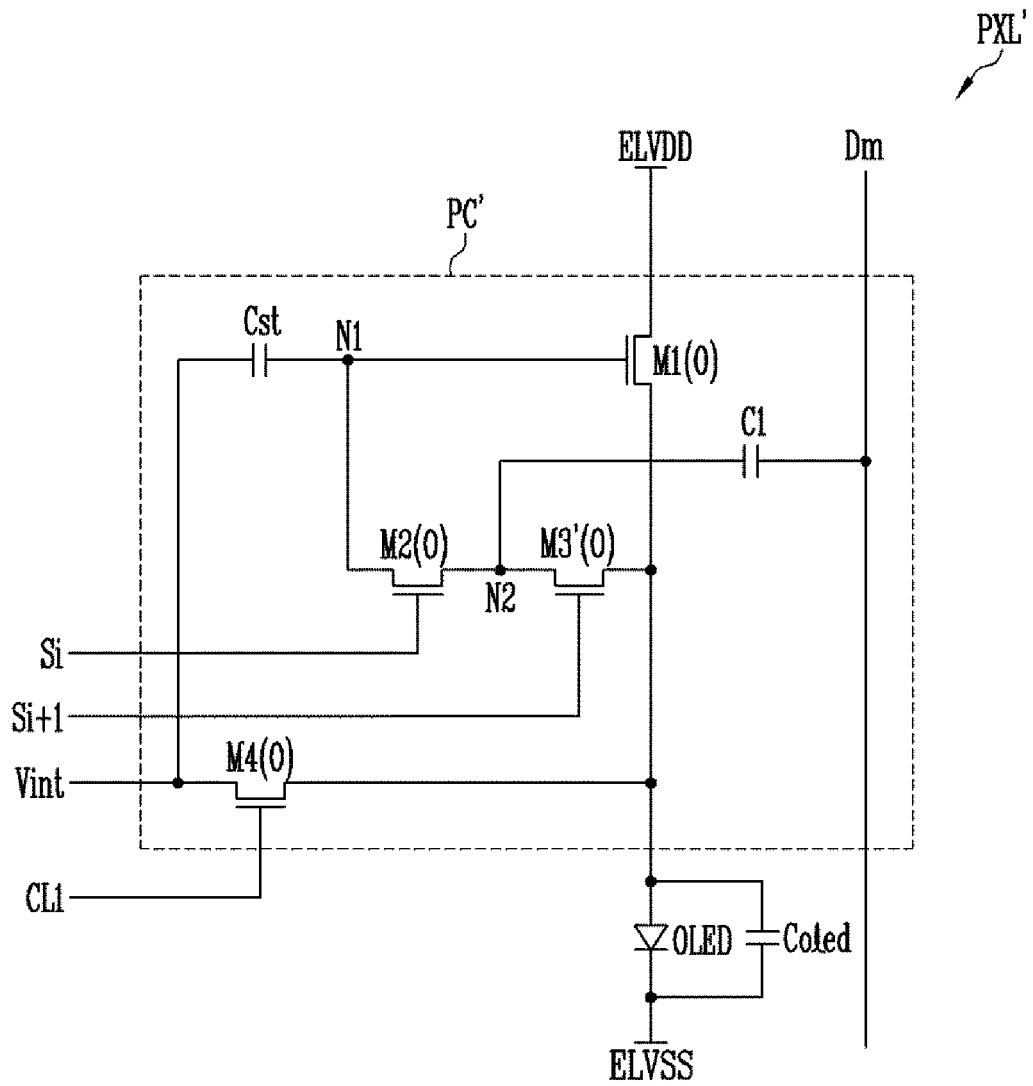


FIG. 18

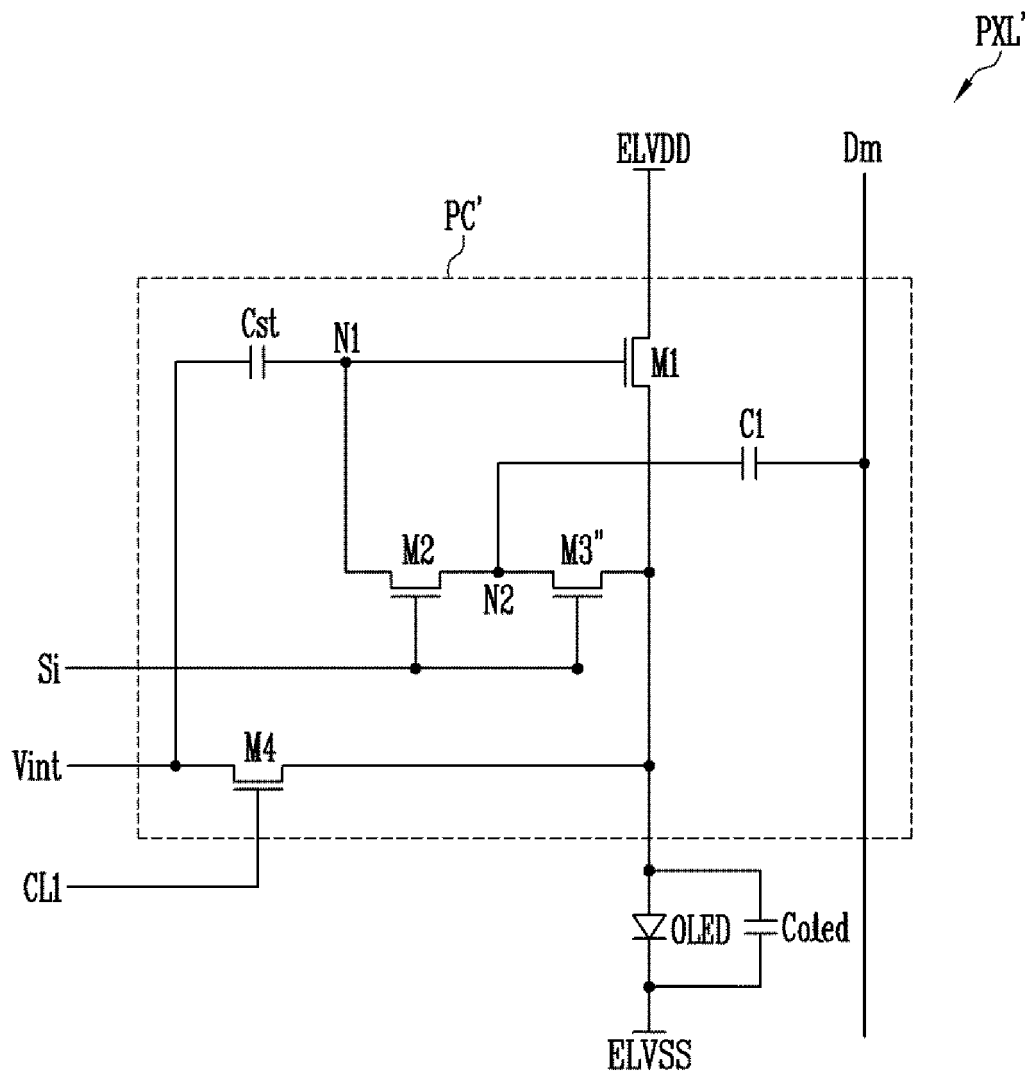


FIG. 19

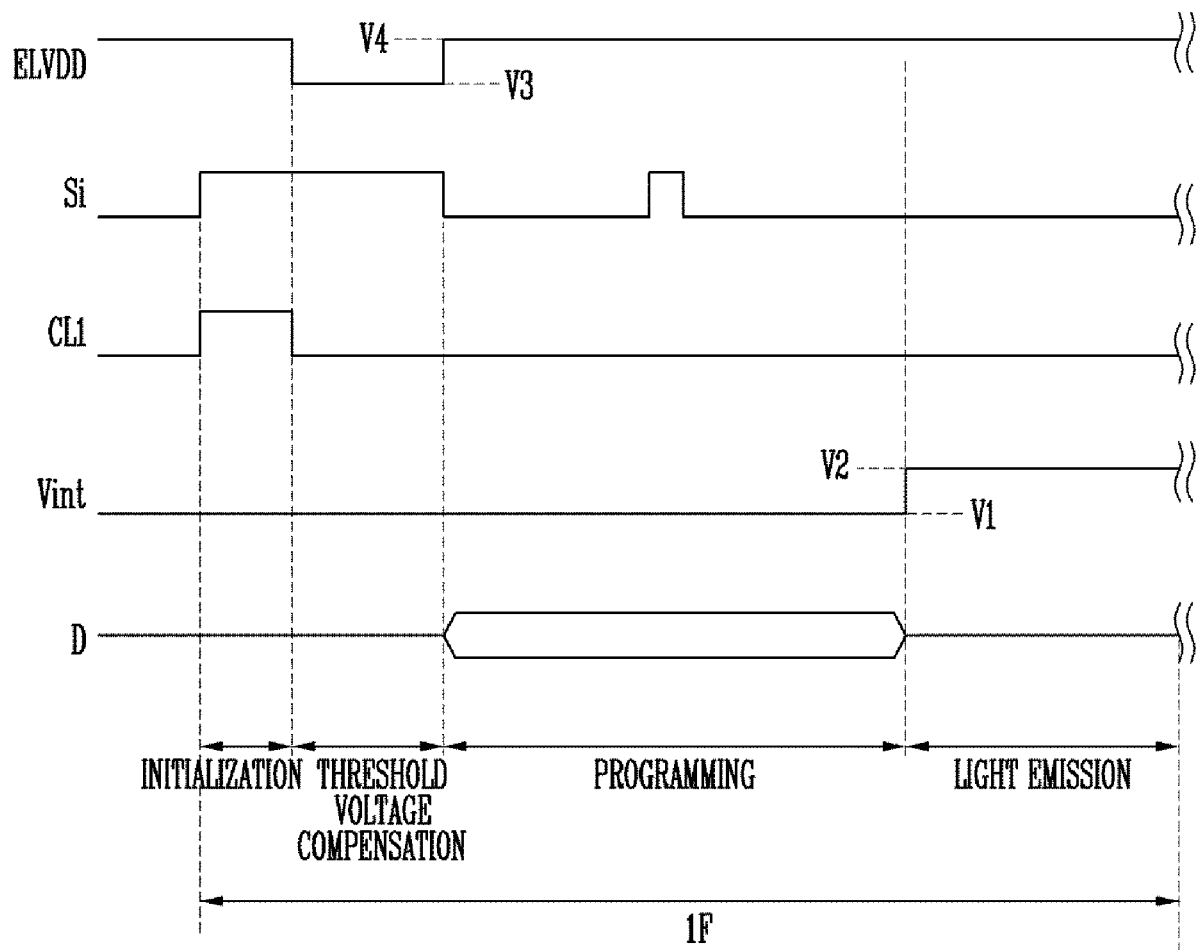


FIG. 20A

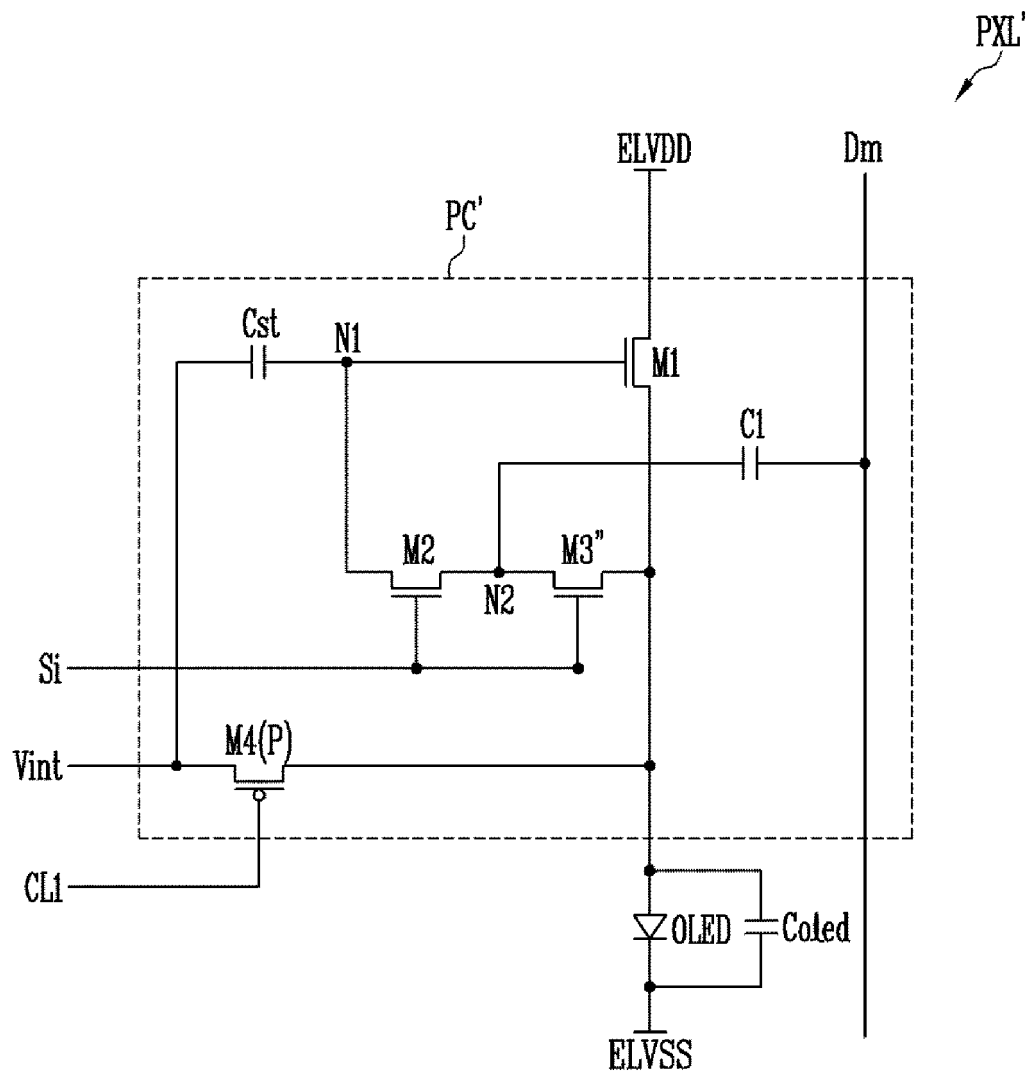


FIG. 20B

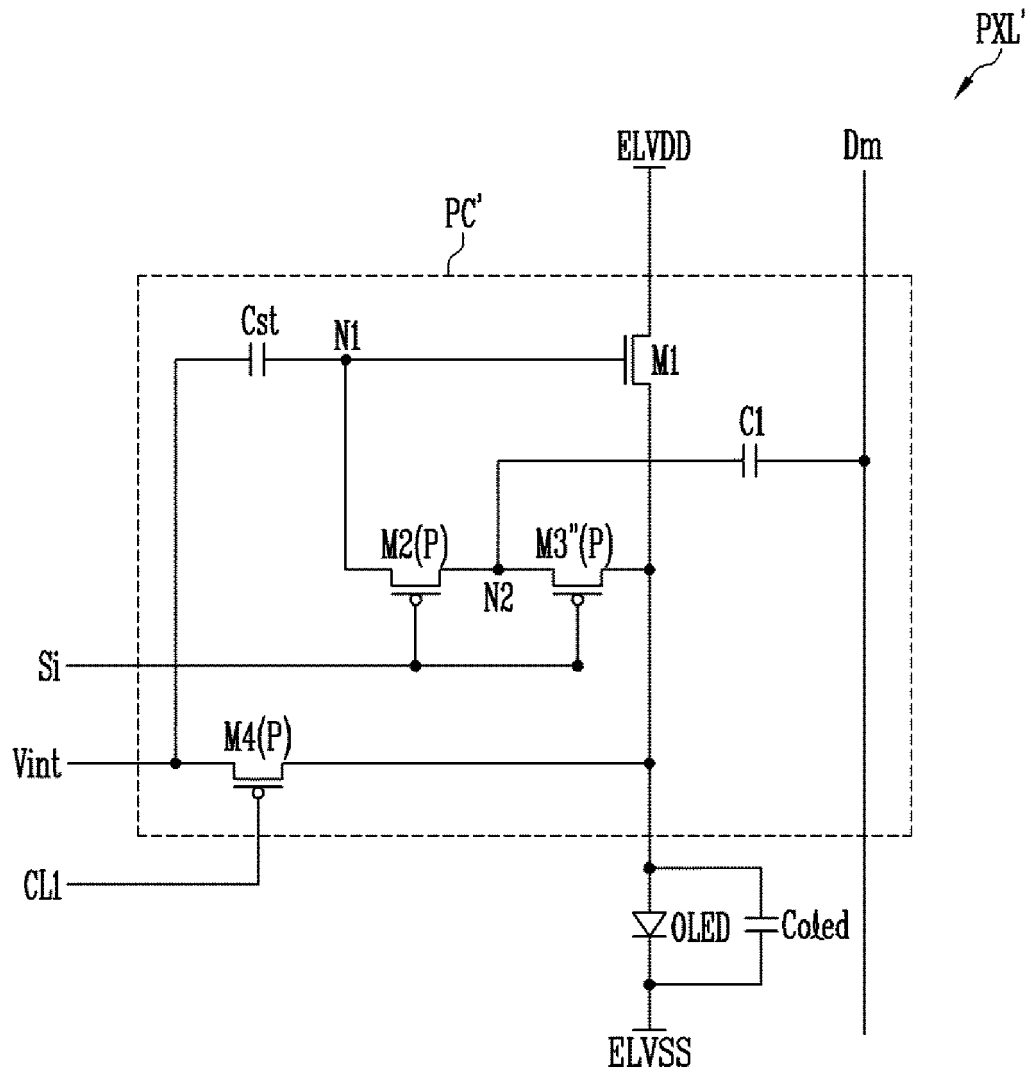


FIG. 21A

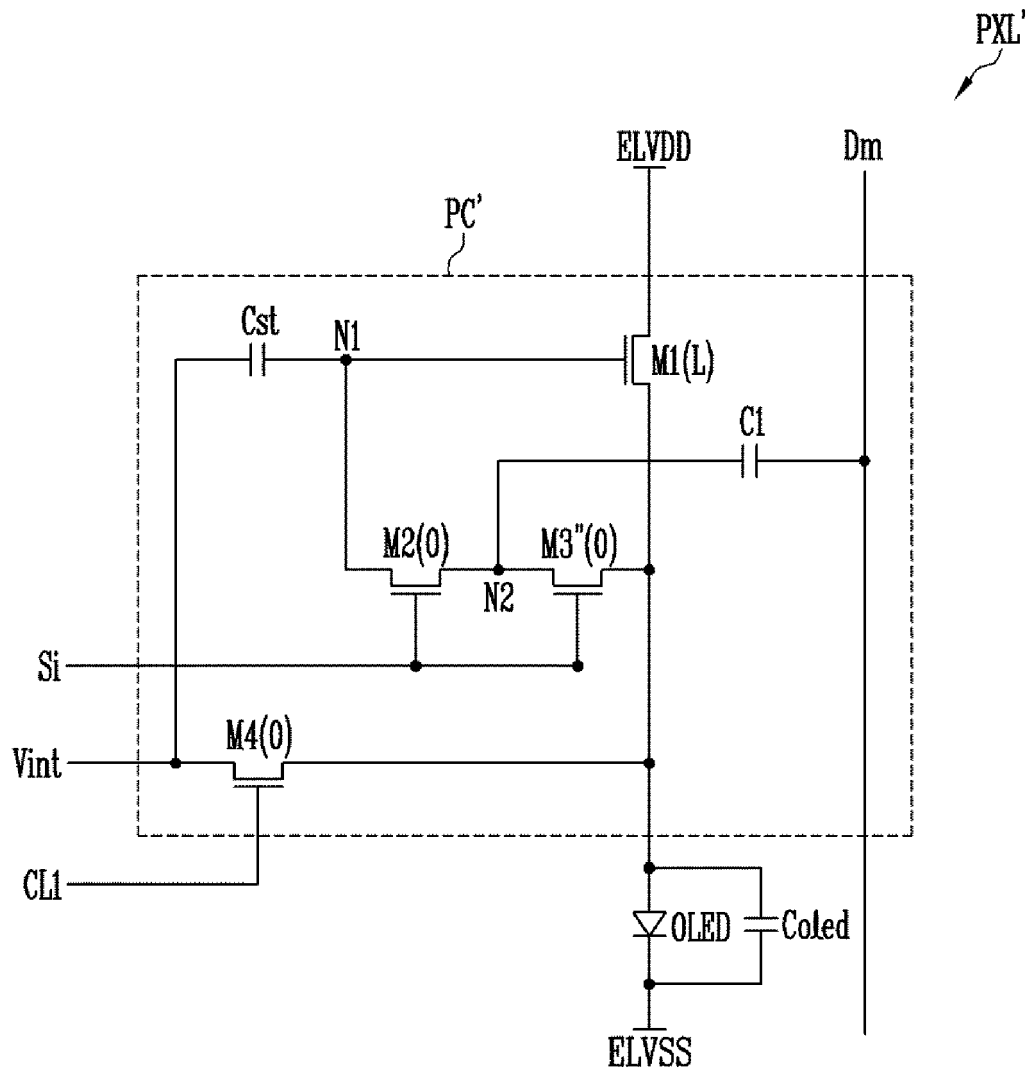


FIG. 21B

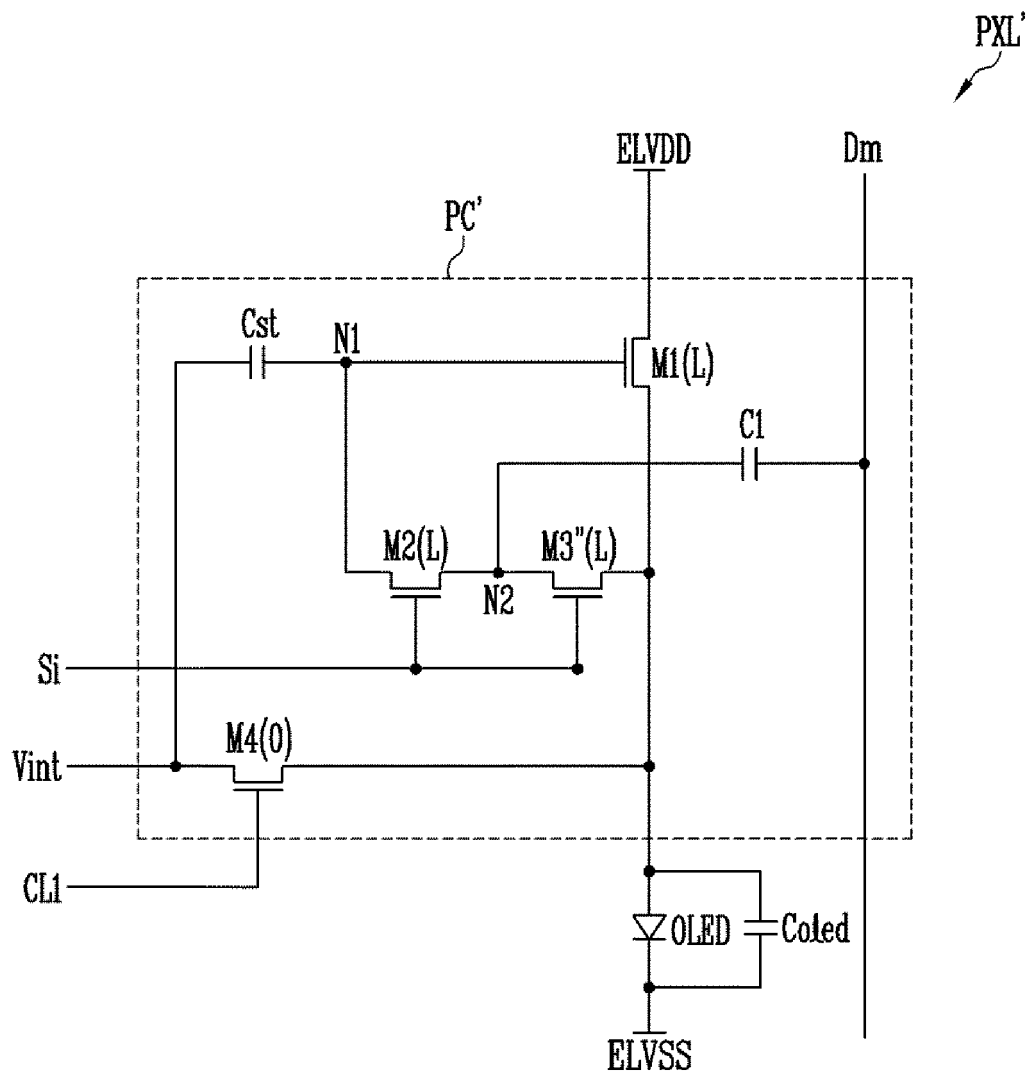


FIG. 21C

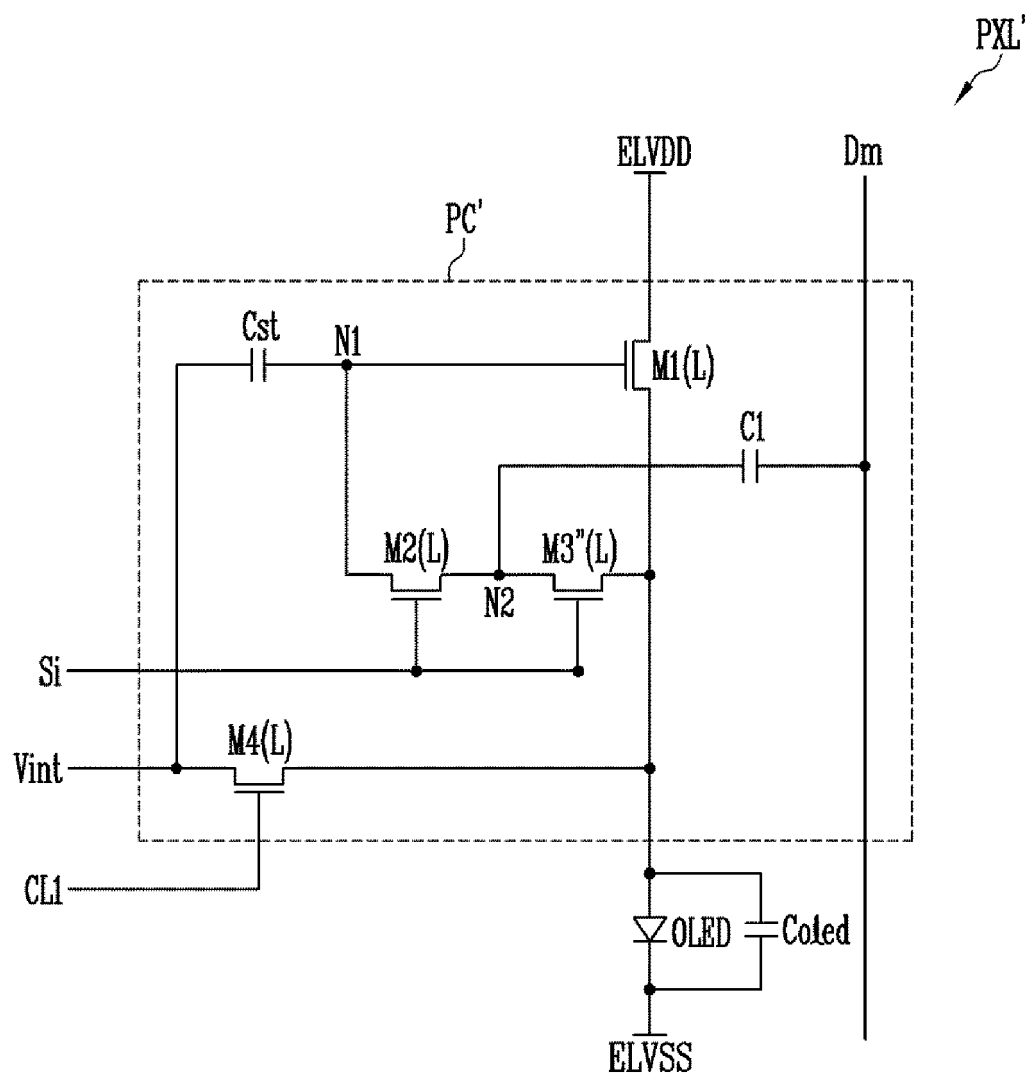


FIG. 22


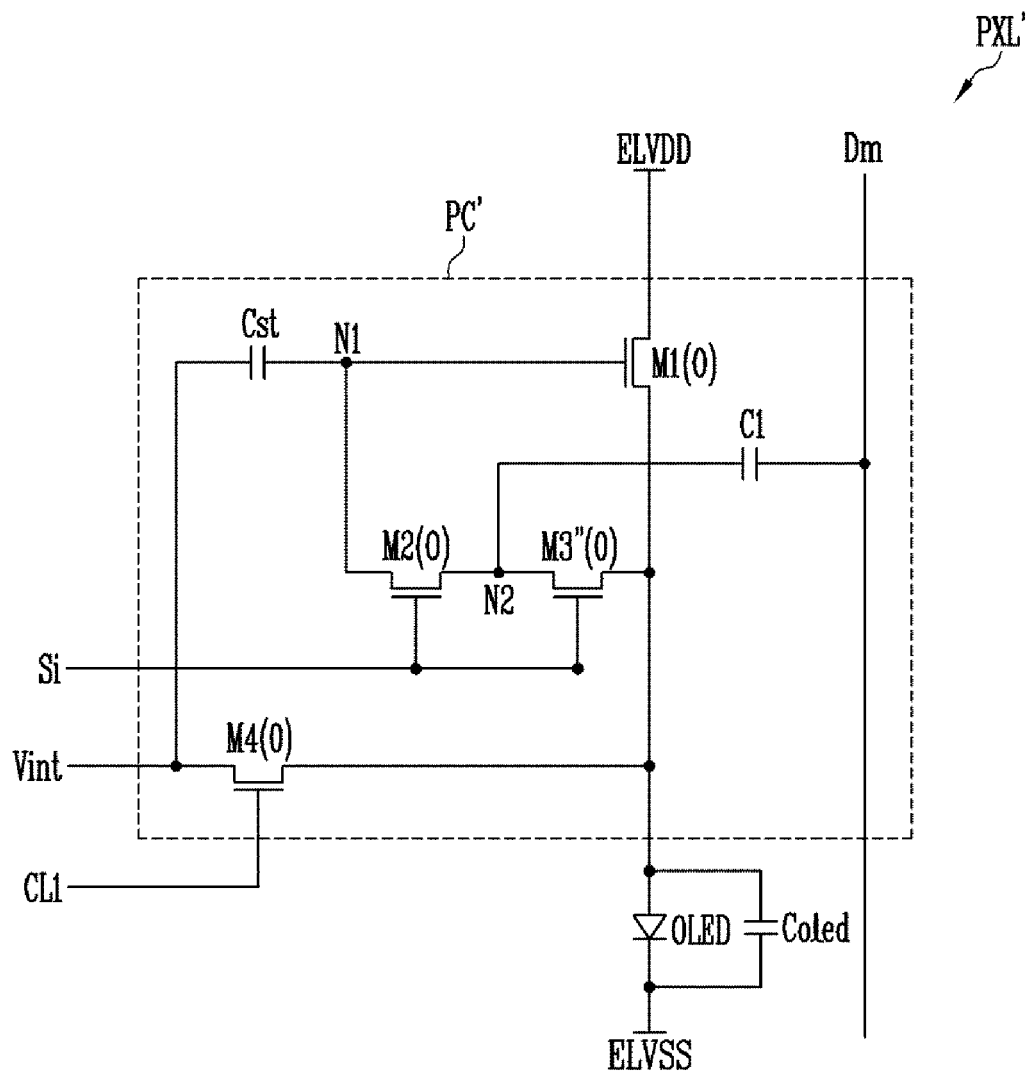


FIG. 23

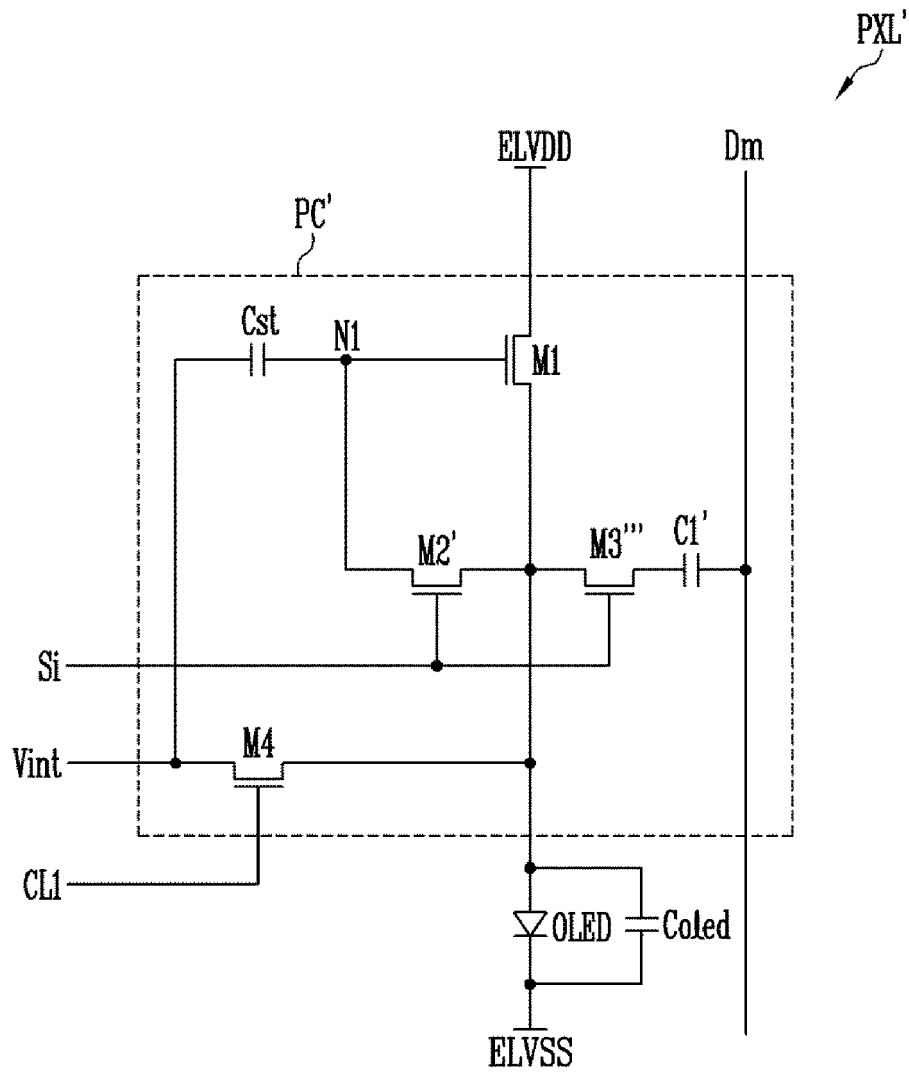

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2009117092 A [0007]
- US 2013222356 A [0008]
- US 2006044244 A [0010]

Non-patent literature cited in the description

- **MATIVENGA.** *Oxide Versus LTPS TFTs for Active-Matrix Displays* [0009]

专利名称(译)	像素和使用该像素的有机发光显示装置		
公开(公告)号	EP3349205B1	公开(公告)日	2019-10-30
申请号	EP2018151515	申请日	2018-01-12
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	CHUNG BO YONG PARK JUN HYUN SEO YOUNG WAN LEE AN SU JO KANG MOON CHAI CHONG CHUL		
发明人	CHUNG, BO YONG PARK, JUN HYUN SEO, YOUNG WAN LEE, AN SU JO, KANG MOON CHAI, CHONG CHUL		
IPC分类号	G09G3/3233		
CPC分类号	G09G3/3225 G09G3/3233 G09G2300/0417 G09G2300/0819 G09G2300/0852 G09G2300/0866 G09G2310/0251 G09G2320/043 G09G2300/0439 H01L51/5206 H01L51/5296		
优先权	1020170008251 2017-01-17 KR		
其他公开文献	EP3349205A1		
外部链接	Espacenet		

摘要(译)

像素，包括有机发光二极管；第一晶体管，用于控制与第一节点的电压相对应的，经由有机发光二极管从第一驱动电源流向第二驱动电源的电流；第二晶体管，耦合在第一节点和第二节点之间，当将扫描信号提供给第*i*个（*i*是自然数）扫描线时，第二晶体管导通；第三晶体管，耦接在第二节点与有机发光二极管的阳极之间。第一电容器，其耦合在数据线和第二节点之间；第四晶体管，其耦合在初始化电源和有机发光二极管的阳极之间。响应于将第一控制信号提供给第一控制线，第四晶体管导通。

