



(11)

EP 3 444 799 A1

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
20.02.2019 Bulletin 2019/08

(51) Int Cl.: **G09G 3/30** ^(2006.01) **G09G 3/20** ^(2006.01)
G09G 3/3233 ^(2016.01) **H05B 33/08** ^(2006.01)

(21) Application number: **18183422.7**

(22) Date of filing: **21.05.2004**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR
 Designated Extension States:
AL HR LT LV MK

- Yamashita, Junichi
Tokyo, 108-0075 (JP)
- Yamamoto, Tetsuro
Tokyo, 108-0075 (JP)

(30) Priority: **23.05.2003 JP 2003146758**

(74) Representative: **Witte, Weller & Partner**
Patentanwälte mbB
Postfach 10 54 62
70047 Stuttgart (DE)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
15192807.4 / 2 996 108
04734390.0 / 1 628 283

Remarks:

- This application was filed on 13-07-2018 as a divisional application to the application mentioned under INID code 62.
- Claims filed after the date of filing of the divisional application (Rule 68(4) EPC).

(71) Applicant: **Sony Corporation**
Tokyo
108-0075 (JP)


(72) Inventors:
• **Uchino, Katsuhide**
Tokyo, 108-0075 (JP)

(54) **PIXEL CIRCUIT, DISPLAY DEVICE, AND METHOD OF DRIVING PIXEL CIRCUIT**

(57) A pixel circuit, display device, and method of driving a pixel circuit enabling source-follower output with no deterioration of luminance even with a change of the current-voltage characteristic of the light emitting element along with elapse, enabling a source-follower circuit of n-channel transistors, and able to use an n-channel transistor as an EL drive transistor while using current

anode-cathode electrodes, wherein a source of a TFT 111 as a drive transistor is connected to an anode of a light emitting element 114, a drain is connected to a power source potential VCC, a capacitor C111 is connected between a gate and source of the TFT 111, and a source potential of the TFT 111 is connected to a fixed potential through a TFT 113 as a switching transistor.

FIG. 9

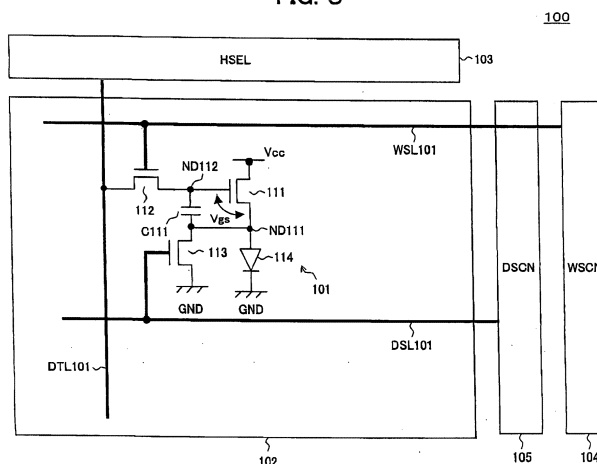

Description

TECHNICAL FIELD

[0001] The present invention relates to a pixel circuit having an electro-optic element with a luminance controlled by a current value in an organic EL (electroluminescence) display etc., an image display device comprised of such pixel circuits arrayed in a matrix, in particular a so-called active matrix type image display device controlled in value of current flowing through the electro-optic elements by insulating gate type field effect transistors provided inside the pixel circuits, and a method of driving a pixel circuit.

BACKGROUND ART

[0002] In an image display device, for example, a liquid crystal display, a large number of pixels are arranged in a matrix and the light intensity is controlled for every pixel in accordance with the image information to be displayed so as to display an image.

[0003] This same is true for an organic EL display etc. An organic EL display is a so-called self-light emitting type display having a light emitting element in each pixel circuit and has the advantages that the viewability of the image is higher in comparison with a liquid crystal display, a backlight is unnecessary, the response speed is high, etc.

[0004] Further, it greatly differs from a liquid crystal display etc. in the point that the gradations of the color generation are obtained by controlling the luminance of each light emitting element by the value of the current flowing through the light emitting element, that is, each light emitting element is a current controlled type.

[0005] An organic EL display, in the same way as a liquid crystal display, may be driven by a simple matrix and an active matrix system. While the former has a simple structure, it has the problem that realization of a large sized and high definition display is difficult. For this reason, much effort is being devoted to development of the active matrix system of controlling the current flowing through the light emitting element inside each pixel circuit by an active element provided inside the pixel circuit, generally, a TFT (thin film transistor).

[0006] FIG. 1 is a block diagram of the configuration of a general organic EL display device.

[0007] This display device 1 has, as shown in FIG. 1, a pixel array portion 2 comprised of pixel circuits (PXLC) 2a arranged in an $m \times n$ matrix, a horizontal selector (HSEL) 3, a write scanner (WSCN) 4, data lines DTL1 to DTLn selected by the horizontal selector 3 and supplied with a data signal in accordance with the luminance information, and scanning lines WSL1 to WSLm selectively driven by the write scanner 4.

[0008] Note that the horizontal selector 3 and the write scanner 4 are sometimes formed around the pixels by MOSICs etc. when formed on polycrystalline silicon.

[0009] FIG. 2 is a circuit diagram of an example of the configuration of a pixel circuit 2a of FIG. 1 (refer to for example U.S. Patent No. 5,684,365 and Patent Publication 2: Japanese Unexamined Patent Publication (Kokai) No. 8-234683).

[0010] The pixel circuit of FIG. 2 has the simplest circuit configuration among the large number of proposed circuits and is a so-called two-transistor drive type circuit.

[0011] The pixel circuit 2a of FIG. 2 has a p-channel thin film FET (hereinafter, referred to as TFT) 11 and TFT 12, a capacitor C11, and a light emitting element constituted by an organic EL element (OLED) 13. Further, in FIG. 2, DTL indicates a data line, and WSL indicates a scanning line.

[0012] An organic EL element has a rectification property in many cases, so sometimes is referred to as an OLED (organic light emitting diode). The symbol of a diode is used as the light emitting element in FIG. 2 and the other figures, but a rectification property is not always required for an OLED in the following explanation.

[0013] In the pixel circuit 2a of FIG. 2, a source of the TFT 11 is connected to a power source potential VCC, and a cathode of the light emitting element 13 is connected to a ground potential GND. The operation of the pixel circuit 2a of FIG. 2 is as follows.

<Step ST1>:

[0014] When the scanning line WSL is made a selected state (low level here) and a write potential Vdata is supplied to the data line DTL, the TFT 12 becomes conductive, the capacitor C11 is charged or discharged, and the gate potential of the TFT 11 becomes Vdata.

<Step ST2>:

[0015] When the scanning line WSL is made a non-selected state (high level here), the data line DTL and the TFT 11 are electrically separated, but the gate potential of the TFT 11 is held stably by the capacitor C11.

<Step ST3>:

[0016] The current flowing through the TFT 11 and the light emitting element 13 becomes a value in accordance with a gate-source voltage V_{gs} of the TFT 11, while the light emitting element 13 is continuously emitting light with a luminance in accordance with the current value.

[0017] As in the above step ST1, the operation of selecting the scanning line WSL and transmitting the luminance Information given to the data line to the inside of a pixel will be referred to as "writing" below.

[0018] As explained above, in the pixel circuit 2a of FIG. 2, if once the Vdata is written, the light emitting element 13 continues to emit light with a constant luminance in the period up to the next rewrite operation.

[0019] As explained above, in the pixel circuit 2a, by changing a gate application voltage of the drive transistor constituted by the TFT 11, the value of the current flowing through the EL element 13 is controlled.

[0020] At this time, the source of the p-channel drive transistor is connected to the power source potential V_{cc} , so this TFT 11 is always operating in a saturated region.

[0021] Accordingly, it becomes a constant current source having a value shown in the following equation 1.

$$I_{ds} = 1/2 \mu (W/L) C_{ox} (V_{gs} - |V_{th}|)^2 \quad (1)$$

[0022] Here, μ indicates the mobility of a carrier, C_{ox} indicates a gate capacitance per unit area, W indicates a gate width, L indicates a gate length, and V_{th} indicates the threshold value of the TFT 11.

[0023] In a simple matrix type image display device, each light emitting element emits light only at a selected instant, while in an active matrix, as explained above, each light emitting element continues emitting light even after the end of the write operation. Therefore, it becomes advantageous in especially a large sized and high definition display in the point that the peak luminance and peak current of each light emitting element can be lowered in comparison with a simple matrix.

[0024] FIG. 3 is a view of the change along with elapse of the current-voltage (I-V) characteristic of an organic EL element. In FIG. 3, the curve shown by the solid line indicates the characteristic in the initial state, while the curve shown by the broken line indicates the characteristic after change with elapse.

[0025] In general, the I-V characteristic of an organic EL element ends up deteriorating along with elapse as shown in FIG. 3.

[0026] However, since the two-transistor drive system of FIG. 2 is a constant current drive system, a constant current is continuously supplied to the organic EL element as explained above. Even if the I-V characteristic of the organic EL element deteriorates, the luminance of the emitted light will not change along with elapse.

[0027] The pixel circuit 2a of FIG. 2 is comprised of p-channel TFTs, but if it were possible to configure it by n-channel TFTs, it would be possible to use an amorphous silicon (a-Si) process in the past in the fabrication of the TFTs. This would enable a reduction in the cost of TFT boards.

[0028] Next, consider a pixel circuit replacing the transistors with n-channel TFTs.

[0029] FIG. 4 is a circuit diagram of a pixel circuit replacing the p-channel TFTs of the circuit of FIG. 2 with n-channel TFTs.

[0030] The pixel circuit 2b of FIG. 4 has an n-channel TFT 21 and TFT 22, a capacitor C21, and a light emitting element constituted by an organic EL element (OLED) 23. Further, in FIG. 4, DTL indicates a data line, and WSL indicates a scanning line.

[0031] In the pixel circuit 2b, the drain side of the drive transistor constituted by the TFT 21 is connected to the power source potential V_{cc} , and the source is connected to the anode of the organic EL light emitting element 23, whereby a source-follower circuit is formed.

[0032] FIG. 5 is a view of the operating point of a drive transistor constituted by the TFT 21 and an EL element 23 in the initial state. In FIG. 5, the abscissa indicates the drain-source voltage V_{ds} of the TFT 21, while the ordinate indicates the drain-source current I_{ds} .

[0033] As shown in FIG. 5, the source voltage is determined by the operating point of the drive transistor constituted by the TFT 21 and the EL light emitting element 23. The voltage differs in value depending on the gate voltage.

[0034] This TFT 21 is driven in the saturated region, so a current I_{ds} of the value of the above equation 1 is supplied for the V_{gs} for the source voltage of the operating point.

[0035] However, here too, similarly, the I-V characteristic of the organic EL element ends up deteriorating along with elapse. As shown in FIG. 6, the operating point ends up fluctuating due to this deteriorating along with elapse. The source voltage fluctuates even if supplying the same gate voltage.

[0036] Due to this, the gate-source voltage V_{gs} of the drive transistor constituted by the TFT 21 ends up changing and the value of the current flowing fluctuates. The value of the current flowing through the organic EL element 23

simultaneously changes, so if the I-V characteristic of the organic EL element 23 deteriorates, the luminance of the emitted light will end up changing along with elapse in the source-follower circuit of FIG. 4.

[0037] Further, as shown in FIG. 7, a circuit configuration where the source of the drive transistor constituted by the n-channel TFT 21 is connected to the ground potential GND, the drain is connected to the cathode of the organic EL light emitting element 23, and the anode of the organic EL light emitting element 23 is connected to the power source potential Vcc may be considered.

[0038] With this system, in the same way as when driven by the p-channel TFT of FIG. 2, the potential of the source is fixed, the drive transistor constituted by the TFT 21 operates as a constant current source, and a change in the luminance due to deterioration of the I-V characteristic of the organic EL element can be prevented.

[0039] With this system, however, the drive transistor has to be connected to the cathode side of the organic EL light emitting element. This cathodic connection requires development of new anode-cathode electrodes. This is considered extremely difficult with the current level of technology.

[0040] From the above, in the past systems, no organic EL light emitting element using a n-channel transistor free of change in luminance has been developed.

DISCLOSURE OF THE INVENTION

[0041] An object of the present invention is to provide a pixel circuit, display device, and method of driving a pixel circuit enabling source-follower output with no deterioration of luminance even with a change of the current-voltage characteristic of the light emitting element along with elapse, enabling a source-follower circuit of n-channel transistors, and able to use an n-channel transistor as an EL element transistor while using current anode-cathode electrodes.

[0042] To achieve the above object, according to a first aspect of the present invention, there is provided a pixel circuit for driving an electro-optic element with a luminance changing according to a flowing current, comprising a data line through which a data signal in accordance with luminance information is supplied; a first control line; first and second nodes; first and second reference potentials; a drive transistor forming a current supply line between the first terminal and the second terminal and controlling a current flowing through the current supply line in accordance with the potential of a control terminal connected to the second node; a pixel capacitance element connected between the first node and the second node; a first switch connected between the data line and either of a first terminal or second terminal of the pixel capacitance element and controlled in conduction by the first control line; and a first circuit for making a potential of the first node change to a fixed potential while the electro-optic element is not emitting light; the current supply line of the drive transistor, the first node, and the electro-optic element being connected in series between the first reference potential and second reference potential.

[0043] Preferably, the circuit further comprises a second control line; the drive transistor is a field effect transistor with a source connected to the first node, a drain connected to the first reference potential or second reference potential, and a gate connected to the second node; and the first circuit includes a second switch connected between the first node and fixed potential and is controlled in conduction by the second control line.

[0044] Preferably, when the electro-optic element is driven, as a first stage, the first switch is held in a non-conductive state by the first control line, the second switch is held in a conductive state by the second control line, and the first node is connected to a fixed potential; as a second stage, the first switch is held in a conductive state by the first control line, data to be propagated over the data line is written in the pixel capacitance element, then the first switch is held in a non-conductive state; and as a third stage, the second switch is held in a non-conductive state by the second control line.

[0045] Preferably, the circuit further comprises a second control line; the drive transistor is a field effect transistor with a drain connected to the first reference potential or second reference potential and a gate connected to the second node; and the first circuit includes a second switch connected between a source of the field effect transistor and an electro-optic element and is controlled in conduction by the second control line.

[0046] Preferably, when the electro-optic element is driven, as a first stage, the first switch is held in a non-conductive state by the first control line, and the second switch is held in a non-conductive state by the second control line; as a second stage, the first switch is held in a conductive state by the first control line, data to be propagated over the data line is written in the pixel capacitance element, then the first switch is held in a non-conductive state; and as a third stage, the second switch is held in a conductive state by the second control line.

[0047] Preferably, the circuit further comprises a second control line; the drive transistor is a field effect transistor with a source connected to the first node, a drain connected to the first reference potential or second reference potential, and a gate connected to the second node; and the first circuit includes a second switch connected between the first node and the electro-optic element and is controlled in conduction by the second control line.

[0048] Preferably, when the electro-optic element is driven, as a first stage, the first switch is held in a non-conductive state by the first control line, and the second switch is held in a non-conductive state by the second control line; as a second stage, the first switch is held in a conductive state by the first control line, data to be propagated over the data line is written in the pixel capacitance element, then the first switch is held in a non-conductive state; and as a third

stage, the second switch is held in a conductive state by the second control line.

[0049] Preferably, the circuit further has a second circuit making the first node be held at a fixed potential when the first switch is held in a conductive state and writes data propagated through the data line.

[0050] Preferably, the circuit further comprises second and third control lines and a voltage supply; the drive transistor is a field effect transistor with a drain connected to the first reference potential or second reference potential and a gate connected to the second node; the first circuit includes a second switch connected between a source of the field effect transistor and the electro-optic element and is controlled in conduction by the second control line; and the second circuit includes a third switch connected between the first node and the voltage source and is controlled in conduction by the third control line.

[0051] Preferably, when the electro-optic element is driven, as a first stage, the first switch is held in a non-conductive state by the first control line, the second switch is held in a non-conductive state by the second control line, and the third switch is held in a non-conductive state by the third control line; as a second stage, the first switch is held in a conductive state by the first control line, the third switch is held in a conductive state by the third control line, the first node is held at a predetermined potential, and, in that state, data to be propagated over the data line is written in the pixel capacitance element, then the first switch is held in a non-conductive state by the first control line; and as a third stage, the third switch is held in a non-conductive state by the third control line and the second switch is held in a conductive state by the second control line.

[0052] Preferably, the circuit further has second and third control lines and a voltage source; the drive transistor is a field effect transistor with a source connected to the first node, a drain connected to the first reference potential or second reference potential, and a gate connected to the second node; the first circuit includes a second switch connected between the first node and the electro-optic element and controlled in conduction by the second control line; and the second circuit includes a third switch connected between the first node and the voltage source and is controlled in conduction by the third control line.

[0053] Preferably, when the electro-optic element is driven, as a first stage, the first switch is held in a non-conductive state by the first control line, the second switch is held in a non-conductive state by the second control line, and the third switch is held in a non-conductive state by the third control line; as a second stage, the first switch is held in a conductive state by the first control line, the third switch is held in a conductive state by the third control line, the first node is held at a predetermined potential, and, in that state, data to be propagated over the data line is written in the pixel capacitance element, then the first switch is held in a non-conductive state by the first control line; and as a third stage, the third switch is held in a non-conductive state by the third control line and the second switch is held in a conductive state by the second control line.

[0054] Preferably, the circuit further has a second circuit making the second node be held at a fixed potential when the first switch is held in a conductive state and writes data propagated through the data line.

[0055] Further, the fixed potential is the first reference potential or second reference potential.

[0056] Preferably, the circuit further comprises second, third, and fourth control lines; the drive transistor is a field effect transistor with a source connected to the first node, a drain connected to the first reference potential or second reference potential, and a gate connected to the second node; the first circuit includes a second switch connected between the first node and the electro-optic element and is controlled in conduction by the second control line and a third switch connected between a source of the field effect transistor and the first node and is controlled in conduction by the third control line; and the second circuit includes a fourth switch connected between the first node and the fixed potential and is controlled in conduction by the fourth control line.

[0057] Further, preferably when the electro-optic element is driven, as a first stage, the first switch is held in a non-conductive state by the first control line, the second switch is held in a non-conductive state by the second control line, the third switch is held in a non-conductive state by the third control line, and the fourth switch is held in a non-conductive state by the fourth control line; as a second stage, the first switch is held in a conductive state by the first control line, the fourth switch is held in a conductive state by the fourth control line, the second node is held at a fixed potential, and, in that state, data to be propagated over the data line is written in the pixel capacitance element, then the first switch is held in a non-conductive state by the first control line, and the fourth switch is held at a non-conductive state by the fourth control line; and as a third stage, the second switch is held in a conductive state by the second control line and the third switch is held in a conductive state by the third control line.

[0058] According to a second aspect of the present invention, there is provided a display device comprising a plurality of pixel circuits arranged in a matrix; a data line arranged for each column of the matrix array of pixel circuits and through which a data signal in accordance with luminance information is supplied; a first control line arranged for each row of the matrix array of pixel circuits; and first and second reference potentials; each pixel circuit further having an electro-optic element with a luminance changing according to a flowing current, first and second nodes, a drive transistor forming a current supply line between a first terminal and a second terminal and controlling a current flowing through the current supply line in accordance with the potential of a control terminal connected to the second node, a pixel capacitance element connected between the first node and the second node, a first switch connected between the data line and the

second node and controlled in conduction by the first control line, and a first circuit for making a potential of the first node change to a fixed potential while the electro-optic element is not emitting light, the current supply line of the drive transistor, the first node, and the electro-optic element being connected in series between the first reference potential and second reference potential.

[0059] According to a third aspect of the present invention, there is provided a method of driving a pixel circuit having an electro-optic element with a luminance changing according to a flowing current; a data line through which a data signal in accordance with luminance information is supplied; first and second nodes; first and second reference potentials; a field effect transistor with a drain connected to the first reference potential or second reference potential, a source connected to the first node, and a gate connected to the second node; a pixel capacitance element connected between the first node and the second node; a first switch connected between the data line and either of a first terminal or a second terminal of the pixel capacitance element; and a first circuit for making a potential of the first node change to a fixed potential; the current supply line of the drive transistor, the first node, and the electro-optic element being connected in series between the first reference potential and second reference potential, comprising steps of making a potential of the first node change to a fixed potential by the first circuit in the state with the first switch held at a non-conductive state, holding the first switch at a conductive state, writing data propagated over the data line in the pixel capacitance element, then holding the first switch in the non-conductive, and stopping the operation for making a potential of the first node of said first circuit change to a fixed potential.

[0060] According to the present invention, since for example the source electrode of a drive transistor is connected to a fixed potential through a switch and there is a pixel capacitor between the gate and source of the drive transistor, the change in luminance due to the change in the I-V characteristic of a light emitting element along with elapse is corrected.

[0061] When the drive transistor is an n-channel transistor, by making the fixed potential a ground potential, the potential applied to the light emitting element is made the ground potential so as to create a non-emitting period of the light emitting element.

[0062] Further, by adjusting the off period of the second switch connecting the source electrode and ground potential, the emitting and non-emitting periods of the light emitting element are adjusted for duty driving.

[0063] Further, by making the fixed potential close to the ground potential or a potential lower than that or by raising the gate voltage, deterioration of the image quality due to fluctuation in the threshold voltage V_{th} of the switching transistor connected to the fixed potential is suppressed.

[0064] Further, when the drive transistor is a p-channel transistor, by making the fixed potential the potential of the power source connected to the cathode electrode of the light emitting element, the potential applied to the light emitting element is made the power source potential so as to create a non-emitting period of the EL element.

[0065] Further, by making the characteristic of the drive transistor an n-channel type, a source-follower circuit becomes possible and anodic connection becomes possible.

[0066] Further, making all of the drive transistors n-channel transistors becomes possible, introduction of a general amorphous silicon process becomes possible, and reduction of the cost becomes possible.

[0067] Further, since the second switching transistor is laid out between the light emitting element and the drive transistor, current is not supplied to the drive transistor in the non-emitting period and therefore power consumption of the panel is suppressed.

[0068] Further, by using a potential of the cathode side of the light emitting element as the ground potential, for example, the second reference potential, there is no need to provide a GND line at the TFT side inside the panel.

[0069] Further, by being able to delete the GND lines of the TFT boards in the panel, layout in the pixels and layout of the peripheral circuits become easy.

[0070] Further, by being able to delete the GND lines of the TFT boards in the panel, there is no overlap between the power source potential (first reference potential) and ground potential (second reference potential) of the peripheral circuits, the Vcc lines can be laid out with a lower resistance, and a high uniformity can be achieved.

[0071] Further, by connecting for example a pixel capacitance element to the source of a drive transistor and boosting one side of the capacitor to the power source while not emitting light, there is no longer a need for a GND line at the TFT side at the Inside of the panel.

[0072] Further, by turning the fourth switch at the power source line side on when writing in a signal line so as to lower the impedance, the coupling effect on pixel writing is corrected in a short time and an image of a high uniformity is obtained.

[0073] Further, by making the potential of the power source line the same as the Vcc potential, it is possible to reduce the panel lines.

[0074] Further, according to the present invention, by connecting the gate electrode of the drive transistor to a fixed potential through a switch and providing a pixel capacitor between the gate and source of the drive transistor, change of the luminance due to deterioration of the I-V characteristic of the light emitting element along with elapse is corrected.

[0075] For example, when the drive transistor is an n-channel, by making the fixed potential the fixed potential to which the drain electrode of the drive transistor is connected, the fixed potential is made only the power source potential in the

pixel.

[0076] Further, by raising the gate voltages of the switching transistors connected to the gate side and source side of the drive transistor or making the transistors larger in size, deterioration of the image quality due to variation in the threshold values of the switching transistors is suppressed. Further, when the drive transistor is a p-channel, by making the fixed potential the fixed potential to which the drain electrode of the driven is connected, the fixed potential is made only GND in the pixel.

[0077] Further, by raising the gate voltages of the switching transistors connected to the gate side and source side of the drive transistor or making the transistors larger in size, deterioration of the image quality due to variation in the threshold values of the switching transistors is suppressed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0078]

FIG. 1 is a block diagram of the configuration of a general organic EL display device.

FIG. 2 is a circuit diagram of an example of the configuration of a pixel circuit of FIG. 1.

FIG. 3 is a graph of the change along with elapse of the current-voltage (I-V) characteristic of an organic EL device.

FIG. 4 is a circuit diagram of a pixel circuit in which p-channel TFTs of the circuit of FIG. 2 are replaced by n-channel TFTs.

FIG. 5 is a graph showing the operating point of a drive transistor constituted by a TFT and an EL light emitting element in the initial state.

FIG. 6 is a graph showing the operating point of a drive transistor constituted by a TFT and an EL light emitting element after change along with elapse.

FIG. 7 is a circuit diagram of a pixel circuit connecting a source of a drive transistor constituted by an n-channel TFT to a ground potential.

FIG. 8 is a block diagram of the configuration of an organic EL display device employing a pixel circuit according to a first embodiment of.

FIG. 9 is a circuit diagram of a specific configuration of a pixel circuit according to the first embodiment in the organic EL display device of FIG. 1.

FIGS. 10A to 10F are views of equivalent circuits for explaining the operation of the circuit of FIG. 9.

FIGS. 11A to 11F are timing charts for explaining the operation of the circuit of FIG. 9.

FIG. 12 is a block diagram of the configuration of an organic EL display device employing a pixel circuit according to a second embodiment.

FIG. 13 is a circuit diagram of a specific configuration of a pixel circuit according to the second embodiment in the organic EL display device of FIG. 12.

FIGS. 14A to 14E are views of equivalent circuits for explaining the operation of the circuit of FIG. 13.

FIGS. 15A to 15F are timing charts for explaining the operation of the circuit of FIG. 13.

FIG. 16 is a circuit diagram of another example of the configuration of a pixel circuit according to the second embodiment.

FIG. 17 is a block diagram of the configuration of an organic EL display device employing a pixel circuit according to a third embodiment.

FIG. 18 is a circuit diagram of a specific configuration of a pixel circuit according to the third embodiment in the organic EL display device of FIG. 17.

FIGS. 19A to 19E are views of equivalent circuits for explaining the operation of the circuit of FIG. 18.

FIGS. 20A to 20F are timing charts for explaining the operation of the circuit of FIG. 18.

FIGS. 21 is a circuit diagram of another example of the configuration of a pixel circuit according to the third embodiment.

FIG. 22 is a block diagram of the configuration of an organic EL display device employing a pixel circuit according to a fourth embodiment.

FIG. 23 is a circuit diagram of a specific configuration of a pixel circuit according to the fourth embodiment in the organic EL display device of FIG. 22.

FIGS. 24A to 24E are views of equivalent circuits for explaining the operation of the circuit of FIG. 23.

FIGS. 25A to 25H are timing charts for explaining the operation of the circuit of FIG. 23.

FIG. 26 is a circuit diagram of a pixel circuit having a fixed voltage line as the power source potential VCC.

FIG. 27 is a circuit diagram of a pixel circuit having a fixed voltage line as the ground potential GND.

FIG. 28 is a circuit diagram of another example of the configuration of a pixel circuit according to the fourth embodiment.

FIG. 29 is a block diagram of the configuration of an organic EL display device employing a pixel circuit according

to a fifth embodiment.

FIG. 30 is a circuit diagram of a specific configuration of a pixel circuit according to the fifth embodiment in the organic EL display device of FIG. 29.

FIGS. 31A to 31E are views of equivalent circuits for explaining the operation of the circuit of FIG. 30.

FIGS. 32A to 32H are timing charts for explaining the operation of the circuit of FIG. 30.

FIG. 33 is a circuit diagram of a pixel circuit having a fixed voltage line as the power source potential VCC.

FIG. 34 is a circuit diagram of a pixel circuit having a fixed voltage line as the ground potential GND.

FIG. 35 is a circuit diagram of another example of the configuration of a pixel circuit according to the fifth embodiment.

FIG. 36 is a block diagram of the configuration of an organic EL display device employing a pixel circuit according to a sixth embodiment.

FIG. 37 is a circuit diagram of a specific configuration of a pixel circuit according to the sixth embodiment in the organic EL display device of FIG. 36.

FIGS. 38A to 38F are views of equivalent circuits for explaining the operation of the circuit of FIG. 37.

FIG. 39 is a view of an equivalent circuit for explaining the operation of the circuit of FIG. 37.

FIGS. 40A to 40H are timing charts for explaining the operation of the circuit of FIG. 37.

BEST MODE FOR WORKING THE INVENTION

[0079] Below, preferred embodiments of the present invention will be described with reference to the accompanying drawings.

<First Embodiment>

[0080] FIG. 8 is a block diagram of the configuration of an organic EL display device employing pixel circuits according to the first embodiment.

[0081] FIG. 9 is a circuit diagram of the concrete configuration of a pixel circuit according to the first embodiment in the organic EL display device of FIG. 8.

[0082] This display device 100 has, as shown in FIG. 8 and FIG. 9, a pixel array portion 102 having pixel circuits (PXLC) 101 arranged in an $m \times n$ matrix, a horizontal selector (HSEL) 103, a write scanner (WSCN) 104, a drive scanner (DSCN) 105, data lines DTL101 to DTL10n selected by the horizontal selector 103 and supplied with a data signal in accordance with the luminance information, scanning lines WSL101 to WSL10m selectively driven by the write scanner 104, and drive lines DSL101 to DSL10m selectively driven by the drive scanner 105.

[0083] Note that while the pixel circuits 101 are arranged in an $m \times n$ matrix in the pixel array portion 102, FIG. 9 shows an example wherein the pixel circuits are arranged in a $2 (= m) \times 3 (= n)$ matrix for the simplification of the drawing.

[0084] Further, in FIG. 9, the concrete configuration of one pixel circuit is shown for simplification of the drawing.

[0085] The pixel circuit 101 according to the first embodiment has, as shown in FIG. 9, an n-channel TFT 111 to TFT 113, a capacitor C111, a light emitting element 114 made of an organic EL element (OLED), and nodes ND111 and ND112.

[0086] Further, in FIG. 9, DTL101 indicates a data line, WSL101 indicates a scanning line, and DSL101 indicates a drive line.

[0087] Among these components, TFT 111 configures the field effect transistor according to the present invention, TFT 112 configures the first switch, TFT 113 configures the second switch, and the capacitor C111 configures the pixel capacitance element according to the present invention.

[0088] Further, the scanning line WSL101 corresponds to the first control line according to the present invention, while the drive line DSL101 corresponds to the second control line.

[0089] Further, the supply line (power source potential) of the power source voltage Vcc corresponds to the first reference potential, while the ground potential GND corresponds to the second reference potential.

[0090] In the pixel circuit 101, a light emitting element (OLED) 114 is connected between a source of the TFT 111 and the second reference potential (in this present embodiment, the ground potential GND). Specifically, the anode of the light emitting element 114 is connected to the source of the TFT 111, while the cathode side is connected to the ground potential GND. The connection point of the anode of the light emitting element 114 and the source of the TFT 111 constitutes a node ND111.

[0091] The source of the TFT 111 is connected to a drain of the TFT 113 and a first electrode of the capacitor C111, while the gate of the TFT 111 is connected to a node ND112.

[0092] The source of the TFT 113 is connected to a fixed potential (in the present embodiment, a ground potential GND), while the gate of the TFT 113 is connected to the drive line DSL101. Further, a second electrode of the capacitor C111 is connected to the node ND112.

[0093] A source and a drain of the TFT 112 as first switch are connected to the data line DTL101 and node ND112. Further, a gate of the TFT 112 is connected to the scanning line WSL101.

[0094] In this way, the pixel circuit 101 according to the present embodiment is configured with a capacitor C111 connected between the gate and source of the TFT 111 as the drive transistor and with a source potential of the TFT 111 connected to a fixed potential through the TFT 113 as the switching transistor.

[0095] Next, the operation of the above configuration will be explained focusing on the operation of a pixel circuit with reference to FIGS. 10A to 10F and FIGS. 11A to 11F.

[0096] Note that FIG. 11A shows a scanning signal $ws[101]$ applied to the first row scanning line WSL101 of the pixel array, FIG. 11B shows a scanning signal $ws[102]$ applied to the second row scanning line WSL102 of the pixel array, FIG. 11C shows a drive signal $ds[101]$ applied to the first row drive line DSL101 of the pixel array, FIG. 11D shows a drive signal $ds[101]$ applied to the second row drive line DSL102 of the pixel array, FIG. 11E shows a gate potential V_g of the TFT 111, and FIG. 11F shows a source potential V_s of the TFT 111.

[0097] First, at the time of the ordinary emitting state of the EL light emitting element 114, as shown in FIGS. 11A to 11D, the scanning signals $ws[101]$, $ws[102]$,... to the scanning lines WSL101, WSL102,... are selectively set to the low level by the write scanner 104, and the drive signals $ds[101]$, $ds[102]$,... to the drive lines DSL101, DSL102,... are selectively set to the low level by the drive scanner 105.

[0098] As a result, in the pixel circuits 101, as shown in FIG. 10A, the TFT 112 and TFT 113 are held in the off state.

[0099] Next, in the non-emitting period of the EL element 114, as shown in FIGS. 11A to 11D, the scanning signals $ws[101]$, $ws[102]$,... to the scanning lines WSL101, WSL102,... are held at the low level by the write scanner 104, and the drive signals $ds[101]$, $ds[102]$,... to the drive lines DSL101, DSL102,... are selectively set to the high level by the drive scanner 105.

[0100] As a result, in the pixel circuits 101, as shown in FIG. 10B, the TFT 112 is held in the off state and the TFT 113 is turned off.

[0101] At this time, current flows through the TFT 113 and, as shown in FIG. 11F, the source potential V_s of the TFT 111 falls to the ground potential GND. Therefore, the voltage applied to the EL light emitting element 114 also becomes 0V and the EL light emitting element 114 becomes non-emitting in state.

[0102] Next, in the non-emitting period of the EL light emitting element 114, as shown in FIGS. 11A to 11D, the drive signals $ds[101]$, $ds[102]$,... to the drive lines DSL101, DSL102,... are held at the high level by the drive scanner 105, and the scanning signals $ws[101]$, $ws[102]$,... to the scanning lines WSL101, WSL102,... are selectively set to the high level by the write scanner 104.

[0103] As a result, in the pixel circuits 101, as shown in FIG. 10C, the TFT 113 is held in the on state and the TFT 112 is turned on. Due to this, the horizontal selector 103 writes the input signal (V_{in}) propagated to the data line DTL101 into the capacitor C111 as the pixel capacitor.

[0104] At this time, as shown in FIG. 11F, the source potential V_s of the TFT 111 as the drive transistor is at the ground potential level (GND level), so, as shown in FIGS. 11E and 11F, the potential difference between the gate and source of the TFT 111 becomes equal to the voltage V_{in} of the input signal.

[0105] After this, in the non-emitting period of the EL light emitting element 114, as shown in FIGS. 11A to 11D, the drive signals $ds[101]$, $ds[102]$,... to the drive lines DSL101, DSL102,... are held at the high level by the drive scanner 105 and the scanning signals $ws[101]$, $ws[102]$,... to the scanning lines WSL101, WSL102,... are selectively set to the low level by the write scanner 104.

[0106] As a result, in the pixel circuit 101, as shown in FIG. 10D, the TFT 112 is turned off and the write operation of the input signal to the capacitor C111 as the pixel capacitor ends.

[0107] After this, as shown in FIGS. 11A to 11D, the scanning signals $ws[101]$, $ws[102]$,... to the scanning lines WSL101, WSL102,... are held at the low level by the write scanner 104 and the drive signals $ds[101]$, $ds[102]$,... to the drive lines DSL101, DSL102,... are selectively set to the low level by the drive scanner 104.

[0108] As a result, in the pixel circuit 101, as shown in FIG. 10E, the TFT 113 is turned off.

[0109] By turning the TFT 113 off, as shown in FIG. 11F, the source potential V_s of the TFT 111 as the drive transistor rises and current also flows to the EL light emitting element 114.

[0110] The source potential V_s of the TFT 111 fluctuates, but despite this, since there is a capacitor between the gate and source of the TFT 111, as shown in FIGS. 11E and 11F, the gate-source potential is constantly held at V_{in} .

[0111] At this time, the TFT 111 as the drive transistor drives in the saturated region, so the current I_{ds} flowing through the TFT 111 becomes the value shown in the above equation 1. This value is determined by the gate source potential V_{in} of the TFT 111. This current I_{ds} similarly flows to the EL light emitting element 114, whereby the EL light emitting element 114 emits light.

[0112] The equivalent circuit of the EL light emitting element 114 becomes as shown in FIG. 10F, so at this time the potential of the node ND111 rises to the gate potential by which the current I_{ds} flows through the EL light emitting element 114.

[0113] Along with this rise in potential, the potential of the node ND112 also similarly rises through the capacitor 111 (pixel capacitor C_s). Due to this, as explained above, the gate-source potential of the TFT 111 is held at V_{in} .

[0114] Here, consider the problems in the past source-follower system in the circuit of the present invention. In this

circuit as well, the EL light emitting element deteriorates in its I-V characteristic along with the increase in the emitting period. Therefore, even if the drive transistor sends the same current, the potential applied to the EL light emitting element changes and the potential of the node ND111 falls.

[0115] However, in this circuit, the potential of the node ND111 falls while the gate-source potential of the drive transistor is held constant, so the current flowing through the drive transistor (TFT 111) does not change. Accordingly, the current flowing through the EL light emitting element also does not change. Even if the I-V characteristic of the EL light emitting element deteriorates, a current corresponding to the input voltage V_{in} constantly flows. Therefore, the past problem can be solved.

[0116] As explained above, according to the present first embodiment, the source of the TFT 111 as the drive transistor is connected to the anode of the light emitting element 114, the drain is connected to the power source potential V_{cc} , a capacitor C111 is connected between the gate and source of the TFT 111, and the source potential of the TFT 111 is connected to a fixed potential through the TFT 113 as the switching transistor, so the following effects can be obtained.

[0117] Source-follower output with no deterioration in luminance even with a change in the I-V characteristic of an EL light emitting element along with elapse becomes possible.

[0118] A source-follower circuit of n-channel transistors becomes possible, so it is possible to use an n-channel transistor as a drive element of an EL light emitting element while using current anode-cathode electrodes.

[0119] Further, it is possible to configure transistors of a pixel circuit by only n-channel transistors and possible to use the a-Si process in the fabrication of the TFTs. Due to this, there is the advantage that a reduction of the cost of TFT boards becomes possible.

<Second Embodiment>

[0120] FIG. 12 is a block diagram of the configuration of an organic EL display device employing pixel circuits according to a second embodiment.

[0121] FIG. 13 is a circuit diagram of the concrete configuration of a pixel circuit according to the second embodiment in the organic EL display device of FIG. 12.

[0122] The display device 200, as shown in FIG. 12 and FIG. 13, has a pixel array portion 202 having pixel circuits (PXLC) 201 arranged in an $m \times n$ matrix, a horizontal selector (HSEL) 203, a write scanner (WSCN) 204, a drive scanner (DSCN) 205, data lines DTL201 to DTL20n selected by the horizontal selector 203 and supplied with a data signal in accordance with the luminance information, scanning lines WSL201 to WSL20m selectively driven by the write scanner 204, and drive lines DSL201 to DSL20m selectively driven by the drive scanner 205.

[0123] Note that while the pixel circuits 201 are arranged in an $m \times n$ matrix in the pixel array portion 202, FIG. 12 shows an example wherein the pixel circuits are arranged in a $2 (= m) \times 3 (= n)$ matrix for the simplification of the drawing.

[0124] Further, in FIG. 13 as well, the concrete configuration of one pixel circuit is shown for simplification of the drawing.

[0125] Each pixel circuit 201 according to the second embodiment has, as shown in FIG. 13, an n-channel TFT 211 to TFT 213, a capacitor C211, a light emitting element 214 made of an organic EL element (OLED), and nodes ND211 and ND212.

[0126] Further, in FIG. 13, DTL201 indicates a data line, WSL201 indicates a scanning line, and DSL201 indicates a drive line.

[0127] Among these components, the TFT 211 configures the field effect transistor according to the present invention, the TFT 212 configures the first switch, the TFT 213 configures the second switch, and the capacitor C211 configures the pixel capacitance element according to the present invention.

[0128] Further, the scanning line WSL 201 corresponds to the first control line according to the present invention, while the drive line DSL201 corresponds to the second control line.

[0129] Further, the supply line of the power source voltage V_{cc} (power source potential) corresponds to the first reference potential, while the ground potential GND corresponds to the reference potential.

[0130] In each pixel circuit 201, a source and a drain of the TFT 213 are connected between a source of the TFT 211 and an anode of the light emitting element 214, a drain of the TFT 211 is connected to the power source potential V_{cc} , and a cathode of the light emitting element 214 is connected to the ground potential GND. That is, the TFT 211 as the drive transistor, the TFT 213 as the switching transistor, and the light emitting element 214 are connected in series between the power source potential V_{cc} and the ground potential GND. Further, the connection point of the anode of the light emitting element 214 and the source of the TFT 213 constitutes a node ND211.

[0131] A gate of the TFT 211 is connected to the node ND212. Further, the capacitor C211 as a pixel capacitor C_s connected between the nodes ND211 and ND212, that is, between the gate of the TFT 211 and the anode of the light emitting element 214. A first electrode of the capacitor C211 is connected to the node ND211, while a second electrode is connected to the node ND212.

[0132] A gate of the TFT 213 is connected to the drive line DSL201. Further, a source and a drain of the TFT 212 as the first switch are connected to the data line DTL201 and the node ND212. Further, a gate of the TFT 212 is connected

to the scanning line WSL201.

[0133] In this way, the pixel circuit 201 according to the present embodiment is configured with the source of the TFT 211 as the drive transistor and the anode of the light emitting element 214 connected by the TFT 213 as the switching transistor, while a capacitor C211 connected between the gate of the TFT 211 and the anode of the light emitting element 214.

[0134] Next, the operation of the above configuration will be explained focusing on the operation of a pixel circuit with reference to FIGS. 14A to 14E and FIGS. 15A to 15F.

[0135] Note that FIG. 15A shows a scanning signal $ws[201]$ applied to the first row scanning line WSL201 of the pixel array, FIG. 15B shows a scanning signal $ws[202]$ applied to the second row scanning line WSL202 of the pixel array, FIG. 15C shows a drive signal $ds[201]$ applied to the first row drive line DSL201 of the pixel array, FIG. 15D shows a drive signal $ds[202]$ applied to the second row drive line DSL202 of the pixel array, FIG. 15E shows a gate potential V_g of the TFT 211, and FIG. 15F shows an anode side potential of the TFT 211, that is, the potential V_{ND211} of the node ND211.

[0136] First, at the ordinary emitting state of the EL light emitting element 214, as shown in FIGS. 15A to 15D, the scanning signals $ws[201]$, $ws[202]$,... to the scanning lines WSL201, WSL202,... are selectively set to the low level by the write scanner 204, and the drive signals $ds[201]$, $ds[202]$,... to the drive lines DSL201, DSL202,... are selectively set to the high level by the drive scanner 205.

[0137] As a result, in the pixel circuit 201, as shown in FIG. 14A, the TFT 212 is held in the off state and the TFT 213 is held in the on state.

[0138] At this time, the current I_{ds} flows to the TFT 211 as the drive transistor and the EL light emitting element 214.

[0139] Next, in the non-emitting period of the EL light emitting element 214, as shown in FIGS. 15A to 15D, the scanning signals $ws[201]$, $ws[202]$,... to the scanning lines WSL201, WSL202,... are held at the low level by the write scanner 204, and the drive signals $ds[201]$, $ds[202]$,... to the drive lines DSL201, DSL202,... are selectively set to the low level by the drive scanner 205.

[0140] As a result, in the pixel circuit 201, as shown in FIG. 14B, the TFT 212 is held in the off state and the TFT 213 is turned off.

[0141] At this time, the potential held at the EL light emitting element 214 falls since the source of supply disappears. The potential falls to the threshold voltage V_{th} of the EL light emitting element 214. However, since current also flows to the EL light emitting element 214, if the non-emitting period continues, the potential will fall to GND.

[0142] On the other hand, the TFT 211 as the drive transistor is held in the on state since the gate potential is high. This boosting is performed in a short period. After boosting to the V_{cc} , no current is supplied to the TFT 211.

[0143] That is, in the pixel circuit 201 of the second embodiment, it is possible to operate without the supply of current in the pixel circuit during the non-emitting period and therefore possible to suppress the power consumption of the panel.

[0144] Next, in the non-emitting period of the EL light emitting element 214, as shown in FIGS. 15A to 15D, the drive signals $ds[201]$, $ds[202]$,... to the drive lines DSL201, DSL202,... are held at the low level by the drive scanner 205, and the scanning signals $ws[201]$, $ws[202]$,... to the scanning lines WSL201, WSL202,... are selectively set to the high level by the write scanner 204.

[0145] As a result, in the pixel circuit 201, as shown in FIG. 14C, the TFT 213 is held in the off state and the TFT 212 is turned on. Due to this, the input signal (V_{in}) propagated to the data line DTL201 by the horizontal selector 203 is written into the capacitor C211 as the pixel capacitor C_s .

[0146] At this time, as shown in FIG. 15F, since the anode side potential V_a of the TFT 213 as the switching transistor, that is, the potential V_{ND211} of the node ND211, is at the ground potential level (GND level), the capacitor C211 as the pixel capacitor C_s is held at a potential equal to the voltage V_{in} of the input signal.

[0147] After this, in the non-emitting period of the EL light emitting element 214, as shown in FIGS. 15A to 15D, the drive signals $ds[201]$, $ds[202]$,... to the drive lines DSL201, DSL202,... are held at the low level by the drive scanner 205, and the scanning signals $ws[201]$, $ws[202]$,... to the scanning lines WSL201, WSL202,... are selectively set to the low level by the write scanner 204.

[0148] As a result, in the pixel circuit 201, as shown in FIG. 14D, the TFT 212 is turned off and the write operation of the input signal to the capacitor C211 as the pixel capacitor ends.

[0149] After this, as shown in FIGS. 15A to 15D, the scanning signals $ws[201]$, $ws[202]$,... to the scanning lines WSL201, WSL202,... are held at the low level by the write scanner 204, and the drive signals $ds[201]$, $ds[202]$,... to the drive lines DSL201, DSL202,... are selectively set to the high level by the drive scanner 205.

[0150] As a result, in the pixel circuit 201, as shown in FIG. 14E, the TFT 213 is turned on.

[0151] By turning the TFT 213 on, current flows to the EL light emitting element 214 and the source potential of the TFT 211 falls. The source potential of the TFT 211 as the drive transistor fluctuates, but despite this, since there is a capacitor between the gate of the TFT 211 and the anode of the light emitting element 214, the gate-source potential is held at V_{in} . At this time, the TFT 211 as the drive transistor is driven in the saturated region, so the current I_{ds} flowing through the TFT 211 becomes the value shown in the above equation 1. This is the gate-source voltage V_{gs} of the drive

transistor.

[0152] Here, the TFT 213 operates in the nonsaturated region, so this is viewed as a simple resistance value. Accordingly, the gate-source voltage of the TFT 211 is V_{in} minus the value of the voltage drop due to the TFT 211. That is, the current flowing through the TFT 211 can be said to be determined by the V_{in} .

[0153] Due to the above, even if the EL light emitting element 214 deteriorates in its I-V characteristic along with the increase in the emitting period, in the pixel circuit 201 of the second embodiment, the potential of the node ND211 falls while the potential between the gate and source of the TFT 211 as the drive transistor is held constant, so the current flowing through the TFT 211 does not change.

[0154] Accordingly, the current flowing through the EL light emitting element 214 also does not change. Even if the I-V characteristic of the EL light emitting element 214 deteriorates, the current corresponding to the input voltage V_{in} constantly flows and therefore the past problem can be solved.

[0155] In addition, by raising the on voltage of the gate of the TFT 213, it is possible to suppress variation in the resistance value due to variation in the threshold value V_{th} of the TFT 213.

[0156] Note that, in FIG. 13, the potential of the cathode electrode of the light emitting element 214 is made the ground potential GND, but this may be made any other potential as well.

[0157] Further, as shown in FIG. 16, the transistors of the pixel circuits need not be n-channel transistors, p-channel TFTs 221 to 223 may also be used to form each pixel circuit. In this case, the power source is connected to the anode side of the EL light emitting element 224, while the TFT 221 as the drive transistor is connected to the cathode side.

[0158] Further, the TFT 212 and TFT 213 as the switching transistors may also be transistors of different polarities from the TFT 211 as the drive transistor.

[0159] Here, the pixel circuit 201 according to the second embodiment and the pixel circuit 101 according to the first embodiment explained above will be compared.

[0160] The basic difference between the pixel circuit 201 according to the second embodiment and the pixel circuit 101 according to the first embodiment lies in the difference in the position of connection of the TFT 213 and TFT 113 as the switching transistors.

[0161] In general, the I-V characteristic of an organic EL element ends up deteriorating along with elapse. However, in the pixel circuit 101 according to the first embodiment, the potential difference V_s between the gate and source of the TFT 111 is held constant, so the current flowing through the TFT 111 is constant, therefore even if the I-V characteristic of the organic EL element deteriorates, the luminance is held.

[0162] In the pixel circuit 101 according to the first embodiment, when the TFT 112 is off and the TFT 113 is on, the source potential V_s of the drive transistor TFT 111 becomes the ground potential and the organic EL element 114 does not emit light and enters a non-emitting period. Simultaneously, the first electrode (one side) of the pixel capacitor also becomes the ground potential GND. However, even in the non-emitting period, the gate-source voltage continues to be held and current flows in the pixel circuit 101 from the power source (V_{cc}) to the GND.

[0163] In general, an organic EL element has an emitting period and a non-emitting period. The luminance of a panel is determined by the product of the intensity of the emission and the emitting period. Usually, the shorter the emitting period, the better the moving picture characteristics become, so it is preferable to use the panel in a short emitting period. To obtain the same luminance as with when shortening the emitting period, it is necessary to raise the intensity of the emission of the organic EL element and necessary to run a greater current through the drive transistor.

[0164] Here, the pixel circuit 101 according to the first embodiment will be considered further.

[0165] In the pixel circuit 101 according to the first embodiment, as explained above, current flows even during the non-emitting period. Therefore, if shortening the emitting period and raising the amount of current run, current continuously flows even during the non-emitting period, so the current consumption increases.

[0166] Further, in the pixel circuit 101 according to the first embodiment, power source potential V_{cc} and ground potential GND lines are necessary in the panel. Therefore, it is necessary to lay two types of lines inside the panel at the TFT side. The V_{cc} and GND have to be laid by a low resistance to prevent a voltage drop. Accordingly, if laying two types of lines, the layout area of the lines has to be increased. For this reason, if the pitch between pixels becomes smaller along with the higher definition of panels, laying of the transistors etc. is liable to become difficult. Simultaneously, the regions where the V_{cc} lines and GND lines overlap in the panel are liable to increase and the improvement of the yield is liable to be kept down.

[0167] As opposed to this, according to the pixel circuit 201 according to the second embodiment, the effects of the above first embodiment can be obtained of course and also the effects of reduction of the consumed current and lines and improvement of the yield can be obtained.

[0168] According to the second embodiment, source-follower output with no deterioration in luminance even with a change in the I-V characteristic of an EL light emitting element along with elapse becomes possible.

[0169] A source-follower circuit of n-channel transistors becomes possible, so it is possible to use an n-channel transistor as a drive element of an EL light emitting element while using current anode-cathode electrodes.

[0170] Further, it is possible to configure transistors of a pixel circuit by only n-channel transistors and possible to use

the a-Si process in the fabrication of the TFTs. Due to this, a reduction of the cost of TFT boards becomes possible.

[0171] Further, according to the second embodiment, it is possible to slash the number of GND lines at the TFT side and layout of the surrounding lines and layout of the pixels become easier.

[0172] Further, it is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and Vcc lines at the TFT board, and possible to improve the yield.

[0173] Further, it is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and Vcc lines at the TFT board so as to lay the Vcc lines at a low resistance, and possible to obtain an image quality of a high uniformity.

<Third Embodiment>

[0174] FIG. 17 is a block diagram of the configuration of an organic EL display device employing a pixel circuit according to a third embodiment.

[0175] FIG. 18 is a circuit diagram of the concrete configuration of a pixel circuit according to the third embodiment in the organic EL display device of FIG. 17.

[0176] The display device 200A according to the third embodiment differs from the display device 200 according to the second embodiment in the position of connection of the capacitor C211 as the pixel capacitor Cs in the pixel circuit.

[0177] Specifically, in the pixel circuit 201 according to the second embodiment, the capacitor C211 is connected between the gate of the TFT 211 as the drive transistor and the anode side of the EL light emitting element 214.

[0178] As opposed to this, in the pixel circuit 201A according to the third embodiment, the capacitor C211 is connected between the gate and source of the TFT 211 as the drive transistor. Specifically, a first electrode of the capacitor C211 is connected to the connection point (node ND211A) of the source of the TFT 211 and the TFT 213 as the switching transistor and a second electrode is connected to the node ND212.

[0179] The rest of the configuration is similar to that of the second embodiment explained above.

[0180] Next, the operation of the above configuration will be explained focusing on the operation of a pixel circuit with reference to FIGS. 19A to 19E and FIGS. 20A to 20F.

[0181] First, at the ordinary emitting state of the EL light emitting element 214, as shown in FIGS. 20A to 20D, the scanning signals ws[201], ws[202],... to the scanning lines WSL201, WSL202,... are selectively set to the low level by the write scanner 204, and the drive signals ds[201], ds[202],... to the drive lines DSL201, DSL202,... are selectively set to the high level by the drive scanner 205.

[0182] As a result, in the pixel circuit 201A, as shown in FIG. 19A, the TFT 212 is held in the off state and the TFT 213 is held in the on state.

[0183] At this time, the current Ids flows to the TFT 211 as the drive transistor and the EL light emitting element 214.

[0184] Next, in the non-emitting period of the EL light emitting element 214, as shown in FIGS. 20A to 20D, the scanning signals ws[201], ws[202],... to the scanning lines WSL201, WSL202,... are held at the low level by the write scanner 204, and the drive signals ds[201], ds[202],... to the drive lines DSL201, DSL202,... are selectively set to the low level by the drive scanner 205.

[0185] As a result in the pixel circuit 201A, as shown in FIG. 19B, the TFT 212 is held in the off state and the TFT 213 is turned off.

[0186] At this time, the potential held at the EL light emitting element 214 falls since the source of supply disappears. The potential falls to the threshold voltage Vth of the EL light emitting element 214. However, since off current also flows to the EL light emitting element 214, if the non-emitting period continues, the potential will fall to GND.

[0187] On the other hand, the TFT 211 as the drive transistor is held in the on state since the gate potential is high. As shown in FIG. 20F, the source potential Vs of the TFT 211 is boosted to the power source voltage Vcc. This boosting is performed in a short period. After boosting to the Vcc, no current is supplied to the TFT 211.

[0188] That is, in the pixel circuit 201A of the third embodiment, it is possible to operate without the supply of current in the pixel circuit during the non-emitting period and therefore possible to suppress the power consumption of the panel.

[0189] Next, in the non-emitting period of the EL light emitting element 214, as shown in FIGS. 20A to 20D, the drive signals ds[201], ds[202],... to the drive lines DSL201, DSL202,... are held at the low level by the drive scanner 205, and the scanning signals ws[201], ws[202],... to the scanning lines WSL201, WSL202,... are selectively set to the high level by the write scanner 204.

[0190] As a result, in the pixel circuit 201A, as shown in FIG. 19C, the TFT 213 is held in the off state and the TFT 212 is turned on. Due to this, the input signal (Vin) propagated to the data line DTL201 by the horizontal selector 203 is written into the capacitor C211 as the pixel capacitor Cs.

[0191] At this time, as shown in FIG. 20F, since the source Vs of the TFT 213 as the switching transistor is the power source potential Vcc, the capacitor C211 as the pixel capacitor Cs is held at a potential equal to (Vin-Vcc) with respect to the voltage Vin of the input signal.

[0192] After this, in the non-emitting period of the EL light emitting element 214, as shown in FIGS. 20A to 20D, the

drive signals ds[201], ds[202],... to the drive lines DSL201, DSL202,... are held at the low level by the drive scanner 205, and the scanning signals ws[201], ws[202],... to the scanning lines WSL201, WSL202,... are selectively set to the low level by the write scanner 204.

[0193] As a result, in the pixel circuit 201A, as shown in FIG. 19D, the TFT 212 is turned off and the write operation of the input signal to the capacitor C211 as the pixel capacitor ends.

[0194] After this, as shown in FIGS. 20A to 20D, the scanning signals ws[201], ws[202],... to the scanning lines WSL201, WSL202,... are held at the low level by the write scanner 204, and the drive signals ds[201], ds[202],... to the drive lines DSL201, DSL202,... are selectively set to the high level by the drive scanner 205.

[0195] As a result, in the pixel circuit 201A, as shown in FIG. 19E, the TFT 213 is turned on.

[0196] By turning the TFT 213 on, current flows to the EL light emitting element 214 and the source potential of the TFT 211 falls. The source potential of the TFT 211 as the drive transistor fluctuates, but despite this, since there is a capacitor between the gate and source of the TFT 211, the other transistors etc. are not connected, so the gate-source voltage of the TFT 211 is constantly held at (Vin-Vcc). At this time, the TFT 211 as the drive transistor is driven in the saturated region, so the current Ids flowing through the TFT 211 becomes the value shown in the above equation 1. This is the gate-source voltage Vgs of the drive transistor, that is, (Vin-Vcc).

[0197] That is, the current flowing through the TFT 211 can be said to be determined by the Vin.

[0198] Due to the above, even if the EL light emitting element 214 deteriorates in its I-V characteristic along with the increase in the emitting period, in the pixel circuit 201A of the third embodiment, the potential of the node ND211A falls while the potential between the gate and source of the TFT 211 as the drive transistor is held constant, so the current flowing through the TFT 211 does not change.

[0199] Accordingly, the current flowing through the EL light emitting element 214 also does not change. Even if the I-V characteristic of the EL light emitting element 214 deteriorates, the current corresponding to the input voltage Vin constantly flows and therefore the past problem can be solved.

[0200] In addition, since there is no transistor etc. other than the pixel capacitor Cs between the gate and source of the TFT 211, variation in the threshold value Vth will not cause any change of the gate-source voltage Vgs of the TFT 211 as the drive transistor like in the past system.

[0201] Note that, in FIG. 18, the potential of the cathode electrode of the light emitting element 214 is made the ground potential GND, but this may be made any other potential as well. Rather, making this the negative power source enables the potential of the Vcc to be lowered and enables the potential of the input signal voltage to be lowered. Due to this, design without burdening the external IC becomes possible.

[0202] Further, since no GND lines are required, the number of input pins to the panel can be slashed and pixel layout also becomes easier. In addition, since there are no longer intersecting parts of the Vcc and GND lines in the panel, the yield can also be easily improved.

[0203] Further, as shown in FIG. 21, the transistors of the pixel circuits need not be n-channel transistors. p-channel TFTs 231 to 233 may also be used to form each pixel circuit. In this case, the power source is connected to the anode side of the EL element 234, while the TFT 231 as the drive transistor is connected to the cathode side.

[0204] Further, the TFT 212 and TFT 213 as the switching transistors may also be transistors of different polarities from the TFT 211 as the drive transistor.

[0205] According to the third embodiment, source-follower output with no deterioration in luminance even with a change in the I-V characteristic of an EL light emitting element along with elapse becomes possible.

[0206] A source-follower circuit of n-channel transistors becomes possible, so it is possible to use an n-channel transistor as a drive element of an EL light emitting element while using current anode-cathode electrodes.

[0207] Further, it is possible to configure transistors of a pixel circuit by only n-channel transistors and possible to use the a-Si process in the fabrication of the TFTs. Due to this, a reduction of the cost of TFT boards becomes possible.

[0208] Further, according to the third embodiment, it is possible to slash the number of GND lines at the TFT side and layout of the surrounding lines and layout of the pixels become easier.

[0209] Further, it is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and Vcc lines at the TFT board, and possible to improve the yield.

[0210] Further, it is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and Vcc lines at the TFT board so as to lay the Vcc lines at a low resistance, and possible to obtain an image quality of a high uniformity.

<Fourth Embodiment>

[0211] FIG. 22 is a block diagram of the configuration of an organic EL display device employing a pixel circuit according to a fourth embodiment.

[0212] FIG. 23 is a circuit diagram of the concrete configuration of a pixel circuit according to the fourth embodiment in the organic EL display device of FIG. 22.

[0213] The display device 300, as shown in FIG. 22 and FIG. 23, has a pixel array portion 302 having pixel circuits (PXLC) 301 arranged in an $m \times n$ matrix, a horizontal selector (HSEL) 303, a first write scanner (WSCN1) 304, a second write scanner (WSCN2) 305, a drive scanner (DSCN) 306, a constant voltage source (CVS) 307, data lines DTL301 to DTL30n selected by the horizontal selector 303 and supplied with a data signal In accordance with the luminance information, scanning lines WSL301 to WSL30m selectively driven by the write scanner 304, scanning lines WSL311 to WSL31m selectively driven by the write scanner 305, and drive lines DSL301 to DSL30m selectively driven by the drive scanner 306.

[0214] Note that while the pixel circuits 301 are arranged in an $m \times n$ matrix in the pixel array portion 302, FIG. 22 shows an example wherein the pixel circuits are arranged in a $2 (= m) \times 3 (= n)$ matrix for the simplification of the drawing.

[0215] Further, in FIG. 23 as well, the concrete configuration of one pixel circuit is shown for simplification of the drawing.

[0216] Each pixel circuit 301 according to the fourth embodiment has, as shown in FIG. 23, an n-channel TFT 311 to TFT 314, a capacitor C311, a light emitting element 315 made of an organic EL element (OLED), and nodes ND311 and ND312.

[0217] Further, in FIG. 23, DTL301 indicates a data line, WSL301 and WSL311 indicate scanning lines, and DSL301 indicates a drive line.

[0218] Among these components, the TFT 311 configures the field effect transistor according to the present invention, the TFT 312 configures the first switch, the TFT 313 configures the second switch, the TFT 314 configures the third switch, and the capacitor C311 configures the pixel capacitance element according to the present invention.

[0219] Further, the scanning line WSL301 corresponds to the first control line according to the present invention, the drive line DSL301 corresponds to the second control line, and the scanning line WSL311 corresponds to the third control line.

[0220] Further, the supply line of the power source voltage V_{cc} (power source potential) corresponds to the first reference potential, while the ground potential GND corresponds to the reference potential.

[0221] In each pixel circuit 301, a source and a drain of the TFT 313 are connected between a source of the TFT 311 and an anode of the light emitting element 315, a drain of the TFT 311 is connected to the power source potential V_{cc} , and a cathode of the light emitting element 315 is connected to the ground potential GND. That is, the TFT 311 as the drive transistor, the TFT 313 as the switching transistor, and the light emitting element 315 are connected in series between the power source potential V_{cc} and the ground potential GND. Further, the connection point of the anode of the light emitting element 315 and the TFT 313 constitutes a node ND311.

[0222] A gate of the TFT 311 is connected to the node ND312. Further, the capacitor C311 as a pixel capacitor C_s is connected between the nodes ND311 and ND312, that is, between the gate of the TFT 311 and the node ND311 (anode of the light emitting element 315). A first electrode of the capacitor C311 is connected to the node ND311, while a second electrode is connected to the node ND312.

[0223] A gate of the TFT 313 is connected to the drive line DSL301. Further, a source and a drain of the TFT 312 as the first switch are connected to the data line DTL301 and the node ND312. Further, a gate of the TFT 312 is connected to the scanning line WSL301.

[0224] Further, a source and a drain of the TFT 314 are connected between the node ND311 and the constant voltage source 307. A gate of the TFT 314 is connected to the scanning line WSL311.

[0225] In this way, the pixel circuit 301 according to the present embodiment is configured with the source of the TFT 311 as the drive transistor and the anode of the light emitting element 315 connected by the TFT 313 as the switching transistor, a capacitor C311 connected between the gate of the TFT 311 and the node ND311 (anode of the light emitting element 315), and a node ND311 is connected through the TFT 314 to the constant voltage source 307 (fixed voltage line).

[0226] Next, the operation of the above configuration will be explained focusing on the operation of a pixel circuit with reference to FIGS. 24A to 24E and FIGS. 25A to 25H.

[0227] Note that FIG. 25A shows a scanning signal $ws[301]$ applied to the first row scanning line WSL301 of the pixel array, FIG. 25B shows a scanning signal $ws[302]$ applied to the second row scanning line WSL302 of the pixel array, FIG. 25C shows a scanning signal $ws[311]$ applied to the first row scanning line WSL311 of the pixel array, FIG. 25D shows a scanning signal $ws[312]$ applied to the second row scanning line WSL312 of the pixel array, FIG. 25E shows a drive signal $ds[301]$ applied to the first row drive line DSL301 of the pixel array, FIG. 25F shows a drive signal $ds[302]$ applied to the second row drive line DSL302 of the pixel array, FIG. 25G shows a gate potential V_g of the TFT 311, and FIG. 25H shows an anode side potential of the TFT 311, that is, the potential V_{ND311} of the node ND311.

[0228] First, at the ordinary emitting state of the EL light emitting element 315, as shown in FIGS. 25A to 25F, the scanning signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are selectively set to the low level by the write scanner 304, the scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are selectively set to the low level by the write scanner 305, and the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are selectively set to the high level by the drive scanner 306.

[0229] As a result, in the pixel circuit 301, as shown in FIG. 24A, the TFTs 312 and 314 are held in the off state and the TFT 313 is held in the on state.

[0230] At this time, since the TFT 311 as the drive transistor is driven in the saturated region, the current I_{ds} flows to the TFT 311 and the EL element 315 with respect to the gate-source voltage V_{gs} .

[0231] Next, in the non-emitting period of the EL light emitting element 315, as shown in FIGS. 25A to 25F, the scanning signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are held at the low level by the write scanner 304, the scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are held at the low level by the write scanner 305, and the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are selectively set to the low level by the drive scanner 306.

[0232] As a result, in the pixel circuit 301, as shown in FIG. 24B, the TFT 312 and the TFT 314 are held in the off state and the TFT 313 is turned off.

[0233] At this time, the potential held at the EL light emitting element 315 falls since the source of supply disappears. The potential falls to the threshold voltage V_{th} of the EL light emitting element 315. However, since off current also flows to the EL light emitting element 315, if the non-emitting period continues, the potential will fall to GND.

[0234] On the other hand, the TFT 311 as the drive transistor is held in the on state since the gate potential is high. As shown in FIG. 25G, the source potential of the TFT 311 is boosted to the power source voltage V_{cc} . This boosting is performed in a short period. After boosting to the V_{cc} , no current is supplied to the TFT 311.

[0235] That is, in the pixel circuit 301 of the fourth embodiment, it is possible to operate without the supply of current in the pixel circuit during the non-emitting period and therefore possible to suppress the power consumption of the panel.

[0236] Next, in the non-emitting period of the EL light emitting element 315, as shown in FIGS. 25A to 25F, the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are held at the low level by the drive scanner 306, the scanning signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are selectively set to the high level by the write scanner 304, and the scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are selectively set to the high level by the write scanner 305.

[0237] As a result, in the pixel circuit 301, as shown in FIG. 24C, the TFT 312 and TFT 314 are turned on while the TFT 313 is held in the off state. Due to this, the input signal (V_{in}) propagated to the data line DTL301 by the horizontal selector 303 is written into the capacitor C311 as the pixel capacitor C_s .

[0238] When writing this signal line voltage, it is important that the TFT 314 be turned on. If there were no TFT 314, if the TFT 312 were turned on and the video signal were written in the pixel capacitor C_s , coupling would enter the source potential V_s of the TFT 311. As opposed to this, if turning on the TFT 314 connecting the node ND311 to the constant voltage source 307, it will be connected to the low impedance line, so the voltage of the line would be written into the source potential side (node ND311) of the TFT 311.

[0239] At this time, if making the potential of the line V_o , the source potential (potential of the node ND311) of the TFT 311 as the drive transistor becomes V_o , so a potential equal to $(V_{in}-V_o)$ is held with respect to the voltage V_{in} of the input signal at the pixel capacitor C_s .

[0240] After this, in the non-emitting period of the EL light emitting element 315, as shown in FIGS. 25A to 25F, the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are held at the low level by the drive scanner 306, the scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are held at the high level by the write scanner 306, and the scanning signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are selectively set to the low level by the write scanner 304.

[0241] As a result, in the pixel circuit 301, as shown in FIG. 24D, the TFT 312 is turned off and the write operation of the input signal to the capacitor C311 as the pixel capacitor ends.

[0242] At this time, the source potential of the TFT 311 (potential of node ND311) has to hold the low impedance, so the TFT 314 is left on.

[0243] After this, as shown in FIGS. 25A to 25F, while the drive signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are held at the low level by the write scanner 304, the scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are set to the low level by the write scanner 305, then the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are selectively set to the high level by the drive scanner 306.

[0244] As a result, in the pixel circuit 301, as shown in FIG. 24E, the TFT 314 is turned off and the TFT 313 becomes on.

[0245] By turning the TFT 313 on, current flows to the EL light emitting element 315 and the source potential of the TFT 311 falls. The source potential of the TFT 311 as the drive transistor fluctuates, but despite this, since there is a capacitor between the gate and source of the TFT 311, the gate-source voltage of the TFT 311 is constantly held at $(V_{in}-V_o)$.

[0246] At this time, the TFT 311 as the drive transistor is driven in the saturated region, so the current I_{ds} flowing through the TFT 311 becomes the value shown in the above equation 1. This is the gate-source voltage V_{gs} of the drive transistor, that is, $(V_{in}-V_o)$.

[0247] That is, the current flowing through the TFT 311 can be said to be determined by the V_{in} .

[0248] In this way, by turning the TFT 314 on during a signal write period to make the source of the TFT 311 low in impedance, it is possible to make the source side of the TFT 311 of the pixel capacitor a fixed potential at all times, there is no need to consider deterioration of image quality due to coupling at the time of a signal line write operation, and it is

possible to write the signal line voltage in a short time. Further, it is possible to increase the pixel capacity to take measures against leak characteristics.

[0249] Due to the above, even if the EL light emitting element 315 deteriorates in its I-V characteristic along with the increase in the emitting period, in the pixel circuit 301 of the fourth embodiment, the potential of the node ND311 falls while the potential between the gate and source of the TFT 311 as the drive transistor is held constant, so the current flowing through the TFT 311 does not change.

[0250] Accordingly, the current flowing through the EL light emitting element 315 also does not change. Even if the I-V characteristic of the EL light emitting element 315 deteriorates, the current corresponding to the input voltage V_{in} constantly flows and therefore the past problem can be solved.

[0251] In addition, since there is no transistor etc. other than the pixel capacitor C_s between the gate and source of the TFT 311, variation in the threshold value V_{th} will not cause any change of the gate-source voltage V_{gs} of the TFT 311 as the drive transistor like in the past system.

[0252] Note that the potential of the line connected to the TFT 314 (constant voltage source) is not limited, but as shown in FIG. 26, if making the potential the same as V_{cc} , slashing the number of signal lines becomes possible. Due to this, the layout of the panel lines and pixel parts becomes easy. Further, the number of pads for panel input becomes possible.

[0253] On the other hand, the gate-source voltage V_{gs} of the TFT 311 as the drive transistor, as explained above, is determined by $V_{in}-V_o$. Accordingly, for example as shown in FIG. 27, if setting V_o to a low potential such as the ground potential GND, the input signal voltage V_{in} can be prepared by the low potential near the GND level and boosting of the signal of the nearby ICs is not required. Further, it is possible to reduce the on voltage of the TFT 313 as the switching transistor and possible to eliminate the burden on the external ICs in design.

[0254] Further, in FIG. 23, the potential of the cathode electrode of the light emitting element 315 is made the ground potential GND, but this may be made any other potential as well. Rather, making this the negative power source enables the potential of the V_{cc} to be lowered and enables the potential of the input signal voltage to be lowered. Due to this, design without burdening the external IC becomes possible.

[0255] Further, as shown in FIG. 28, the transistors of the pixel circuits need not be n-channel transistors. p-channel TFTs 321 to 324 may also be used to form each pixel circuit. In this case, the power source potential V_{cc} is connected to the anode side of the EL light emitting element 324, while the TFT 321 as the drive transistor is connected to the cathode side.

[0256] Further, the TFT 312, TFT 313, and TFT 314 as the switching transistors may also be transistors of different polarities from the TFT 311 as the drive transistor.

[0257] According to the fourth embodiment, source-follower output with no deterioration in luminance even with a change in the I-V characteristic of an EL element along with elapse becomes possible.

[0258] A source-follower circuit of n-channel transistors becomes possible, so it is possible to use an n-channel transistor as a drive element of an EL light emitting element while using current anode-cathode electrodes.

[0259] Further, it is possible to configure transistors of a pixel circuit by only n-channel transistors and possible to use the a-Si process in the fabrication of the TFTs. Due to this, a reduction of the cost of TFT boards becomes possible.

[0260] Further, according to the fourth embodiment, it is possible to write the signal line voltage in a short time even with for example a black signal and possible to obtain an image quality with a high uniformity. Simultaneously, it is possible to increase the signal line capacity and suppress leakage characteristics.

[0261] Further, it is possible to slash the number of GND lines at the TFT side and layout of the surrounding lines and layout of the pixels become easier.

[0262] Further, it is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and V_{cc} lines at the TFT board, and possible to improve the yield.

[0263] Further, It is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and V_{cc} lines at the TFT board so as to lay the V_{cc} lines at a low resistance, and possible to obtain an image quality of a high uniformity.

[0264] Still further, it is possible to make the input signal voltage near the GND and possible to lighten the load on the external drive system.

<Fifth Embodiment>

[0265] FIG. 29 is a block diagram of the configuration of an organic EL display device employing a pixel circuit according to a fifth embodiment.

[0266] FIG. 30 is a circuit diagram of the concrete configuration of a pixel circuit according to the fifth embodiment in the organic EL display device of FIG. 29.

[0267] The display device 300A according to the fifth embodiment differs from the display device 300 according to the fourth embodiment in the position of connection of the capacitor C311 as the pixel capacitor C_s in the pixel circuit.

[0268] Specifically, in the pixel circuit 301 according to the fourth embodiment, the capacitor C311 is connected between the gate of the TFT 311 as the drive transistor and the anode side of the EL light emitting element 315.

[0269] As opposed to this, in the pixel circuit 301A according to the fifth embodiment, the capacitor C311 is connected between the gate and source of the TFT 311 as the drive transistor. Specifically, a first electrode of the capacitor C311 is connected to the connection point (node ND311A) of the source of the TFT 311 and the TFT 313 as the switching transistor and a second electrode is connected to the node ND312.

[0270] The rest of the configuration is similar to that of the fourth embodiment explained above.

[0271] Next, the operation of the above configuration will be explained focusing on the operation of a pixel circuit with reference to FIGS. 31A to 31E and FIGS. 32A to 32H.

[0272] First, at the ordinary emitting state of the EL light emitting element 315, as shown in FIGS. 32A to 32F, the scanning signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are selectively set to the low level by the write scanner 304, the scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are selectively set to the low level by the write scanner 305, and the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are selectively set to the high level by the drive scanner 306.

[0273] As a result, in the pixel circuit 301, as shown in FIG. 31A, the TFTs 312 and 314 are held in the off state and the TFT 313 is held in the on state.

[0274] At this time, the TFT 311 as the drive transistor is driven in the saturated region, so the current I_{ds} flows to the TFT 311 and the EL light emitting element 315 with respect to the gate-source voltage V_{gs} .

[0275] Next, in the non-emitting period of the EL light emitting element 315, as shown in FIGS. 32A to 32F, the scanning signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are selectively held at the low level by the write scanner 304, the scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are selectively held at the low level by the write scanner 305, and the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are selectively set to the low level by the drive scanner 306.

[0276] As a result, in the pixel circuit 301, as shown in FIG. 31B, the TFT 312 and TFT 314 are held in the off state and the TFT 313 is turned off.

[0277] At this time, the potential held at the EL light emitting element 315 falls since the source of supply disappears and the EL light emitting element 315 does not emit light. The potential falls to the threshold voltage V_{th} of the EL light emitting element 315. However, since off current also flows to the EL light emitting element 315, if the non-emitting period continues, the potential will fall to GND.

[0278] On the other hand, along with the voltage drop of the anode side of the EL light emitting element 315, the gate potential of the TFT 311 as the drive transistor falls through the capacitor C311. In parallel with this, current flows to the TFT 311 and the source potential rises.

[0279] Due to this, the TFT 311 becomes cut off and no current flows to the TFT 311.

[0280] That is, in the pixel circuit 301A of the fifth embodiment, it is possible to operate without the supply of current in the pixel circuit during the non-emitting period and therefore possible to suppress the power consumption of the panel.

[0281] Next, in the non-emitting period of the EL light emitting element 315, as shown in FIGS. 32A to 32F, while the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are held at the low level by the drive scanner 306, the scanning signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are selectively set to the high level by the write scanner 304, and the scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are selectively set to the high level by the write scanner 305.

[0282] As a result, in the pixel circuit 301A, as shown in FIG. 31C, the TFT 313 is held in the off state and the TFT 312 and TFT 314 are turned on. Due to this, the input signal (V_{in}) propagated to the data line DTL301 by the horizontal selector 303 is written into the capacitor C311 as the pixel capacitor C_s .

[0283] When writing this signal line voltage, it is important that the TFT 314 be turned on. If there were no TFT 314, if the TFT 312 were turned on and the video signal were written in the pixel capacitor C_s , coupling would enter the source potential V_s of the TFT 311. As opposed to this, if turning on the TFT 314 connecting the node ND311 to the constant voltage source 307, it will be connected to the low impedance line, so the voltage of the line would be written into the source potential of the TFT 311.

[0284] At this time, if making the potential of the line V_o , the source potential of the TFT 311 as the drive transistor becomes V_o , so a potential equal to $(V_{in}-V_o)$ is held with respect to the voltage V_{in} of the input signal at the pixel capacitor C_s .

[0285] After this, in the non-emitting period of the EL light emitting element 315, as shown in FIGS. 32A to 32F, the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are held at the low level by the drive scanner 306, the scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are held at the high level by the write scanner 305, and the scanning signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are selectively set to the low level by the write scanner 304.

[0286] As a result, in the pixel circuit 301A, as shown in FIG. 31D, the TFT 312 is turned off and the write operation of the input signal to the capacitor C311 as the pixel capacitor ends.

[0287] At this time, the source potential of the TFT 311 has to hold the low impedance, so the TFT 314 is left on.

[0288] After this, as shown in FIGS. 32A to 32F, while the scanning signals $ws[301]$, $ws[302]$,... to the scanning lines WSL301, WSL302,... are held at the low level by the write scanner 304, scanning signals $ws[311]$, $ws[312]$,... to the scanning lines WSL311, WSL312,... are set to the low level by the write scanner 305, then the drive signals $ds[301]$, $ds[302]$,... to the drive lines DSL301, DSL302,... are selectively set to the high level by the drive scanner 306.

[0289] As a result, in the pixel circuit 301, as shown in FIG. 31E, the TFT 314 is turned off and the TFT 313 becomes on.

[0290] By turning the TFT 313 on, current flows to the EL light emitting element 315 and the source potential of the TFT 311 falls. The source potential of the TFT 311 as the drive transistor fluctuates, but despite this, since there is a capacity between the gate and source of the TFT 311, the gate-source voltage of the TFT 311 is constantly held at $(V_{in}-V_{cc})$.

[0291] Here, the TFT 313 drives in the non-saturated region, so this is viewed as a simple resistance value. Accordingly, the gate-source voltage of the TFT 311 is $(V_{in}-V_o)$ minus the value of the voltage drop due to the TFT 313. That is, the current flowing through the TFT 311 can be said to be determined by the V_{in} .

[0292] In this way, by turning the TFT 314 on during a signal write period to make the source of the TFT 311 low in impedance, it is possible to make the source side of the TFT 311 of the pixel capacitor a fixed potential at all times, there is no need to consider deterioration of image quality due to coupling at the time of a signal line write operation, and it is possible to write the signal line voltage in a short time. Further, it is possible to increase the pixel capacity to take measures against leak characteristics.

[0293] At this time, the TFT 311 as the drive transistor constituted by is driven in the saturated region, so the current I_{ds} flowing through the TFT 311 becomes the value shown in the above equation 1. This is the gate-source voltage V_{gs} of the drive transistor, that is, $(V_{in}-V_{cc})$.

[0294] That is, the current flowing through the TFT 311 can be said to be determined by the V_{in} .

[0295] Due to the above, even if the EL light emitting element 315 deteriorates in its I-V characteristic along with the increase in the emitting period, in the pixel circuit 201A of the fifth embodiment, the potential of the node ND311 falls while the potential between the gate and source of the TFT 311 as the drive transistor is held constant, so the current flowing through the TFT 311 does not change.

[0296] Accordingly, the current flowing through the EL light emitting element 315 also does not change. Even if the I-V characteristic of the EL light emitting element 315 deteriorates, the current corresponding to the input voltage V_{in} constantly flows and therefore the past problem can be solved.

[0297] Note that the potential of the line connected to the TFT 314 (constant voltage source) is not limited, but as shown in FIG. 33, if making the potential the same as V_{cc} , slashing the number of signal lines becomes possible. Due to this, the layout of the panel lines and pixel parts becomes easy. Further, the number of pads for panel input becomes possible.

[0298] On the other hand, the gate-source voltage V_{gs} of the TFT 311 as the drive transistor, as explained above, is determined by $V_{in}-V_o$. Accordingly, for example as shown in FIG. 34, if setting V_o to a low potential such as the ground potential GND, the input signal voltage V_{in} can be prepared by the low potential near the GND level and boosting of the signal of the nearby ICs is not required. Further, it is possible to reduce the on voltage of the TFT 313 as the switching transistor and possible to eliminate the burden on the external ICs in design.

[0299] Further, in FIG. 30, the potential of the cathode electrode of the light emitting element 315 is made the ground potential GND, but this may be made any other potential as well. Rather, making this the negative power source enables the potential of the V_{cc} to be lowered and enables the potential of the input signal voltage to be lowered. Due to this, design without burdening the external IC becomes possible.

[0300] Further, as shown in FIG. 35, the transistors of the pixel circuits need not be n-channel transistors. p-channel TFTs 321 to 324 may also be used to form each pixel circuit. In this case, the power source is connected to the anode side of the EL light emitting element 325, while the TFT 321 as the drive transistor is connected to the cathode side.

[0301] Further, the TFT 312, TFT 313, and TFT 314 as the switching transistors may also be transistors of different polarities from the TFT 311 as the drive transistor.

[0302] According to the fifth embodiment, source-follower output with no deterioration in luminance even with a change in the I-V characteristic of an EL element along with elapse becomes possible.

[0303] A source-follower circuit of n-channel transistors becomes possible, so it is possible to use an n-channel transistor as a drive element of an EL light emitting element while using current anode-cathode electrodes.

[0304] Further, it is possible to configure transistors of a pixel circuit by only n-channel transistors and possible to use the a-Si process in the fabrication of the TFTs. Due to this, a reduction of the cost of TFT boards becomes possible.

[0305] Further, according to the fifth embodiment, it is possible to write the signal line voltage in a short time even with for example a black signal and possible to obtain an image quality with a high uniformity. Simultaneously, it is possible to increase the signal line capacity and suppress leakage characteristics.

[0306] Further, it is possible to slash the number of GND lines at the TFT side and layout of the surrounding lines and layout of the pixels become easier.

[0307] Further, it is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and Vcc lines at the TFT board, and possible to improve the yield.

[0308] Further, it is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and Vcc lines at the TFT board so as to lay the Vcc lines at a low resistance, and possible to obtain an image quality of a high uniformity.

[0309] Still further, it is possible to make the input signal voltage near the GND and possible to lighten the load on the external drive system.

<Sixth Embodiment>

[0310] FIG. 36 is a block diagram of the configuration of an organic EL display device employing pixel circuits according to a sixth embodiment.

[0311] FIG. 37 is a circuit diagram of the concrete configuration of a pixel circuit according to the sixth embodiment in the organic EL display device of FIG. 36.

[0312] This display device 400 has, as shown in FIG. 36 and FIG. 37, a pixel array portion 402 having pixel circuits (PXLC) 401 arranged in an $m \times n$ matrix, a horizontal selector (HSEL) 403, a write scanner (WSCN) 404, a first drive scanner (DSCN1) 405, a second drive scanner (DSCN2) 406, a third drive scanner (DSCN3) 407, data lines DTL401 to DTL40n selected by the horizontal selector 403 and supplied with a data signal in accordance with the luminance information, scanning lines WSL401 to WSL40m selectively driven by the write scanner 404, drive lines DSL401 to DSL40m selectively driven by the first drive scanner 405, drive lines DSL411 to DSL41m selectively driven by the second drive scanner 406, and drive lines DSL421 to DSL42m selectively driven by the third drive scanner 407.

[0313] Note that while the pixel circuits 401 are arranged in an $m \times n$ matrix in the pixel array portion 402, FIG. 36 shows an example wherein the pixel circuits are arranged in a $2 (= m) \times 3 (= n)$ matrix for the simplification of the drawing.

[0314] Further, in FIG. 37, the concrete configuration of one pixel circuit is shown for simplification of the drawing.

[0315] The pixel circuit 401 according to the sixth embodiment has, as shown in FIG. 37, n-channel TFT 411 to TFT 415, a capacitor C411, a light emitting element 416 made of an organic EL element (OLED), and nodes ND411 and ND412.

[0316] Further, in FIG. 37, DTL401 indicates a data line, WSL401 indicates a scanning line, and DSL401, DSL411, and DSL421 indicate drive lines.

[0317] Among these components, TFT 411 configures the field effect transistor according to the present invention, TFT 412 configures the first switch, TFT 413 configures the second switch, TFT 414 configures the third switch, TFT 415 configures the fourth switch, and the capacitor C411 configures the pixel capacitance element according to the present invention.

[0318] Further, the scanning line WSL401 corresponds to the first control line according to the present invention, the drive line DSL401 corresponds to the second control line, the drive line DSL411 corresponds to the third control line, and the drive line DSL421 corresponds to the fourth control line.

[0319] Further, the supply line (power source potential) of the power source voltage Vcc corresponds to the first reference potential, while the ground potential GND corresponds to the second reference potential.

[0320] In each pixel circuit 401, a source and a drain of the TFT 414 are connected between a source of the TFT 411 and the node ND411, a source and a drain of the TFT 413 are connected between the node ND411 and an anode of the light emitting element 416, a drain of the TFT 411 is connected to the power source potential Vcc, and a cathode of the light emitting element 416 is connected to the ground potential GND. That is, the TFT 411 as the drive transistor, the TFT 414 and TFT 413 as the switching transistors, and the light emitting element 416 are connected in series between the power source potential Vcc and the ground potential GND.

[0321] A gate of the TFT 411 is connected to the node ND412. Further, the capacitor C411 as a pixel capacitor Cs is connected between the gate and source of the TFT 411. A first electrode of the capacitor C411 is connected to the node ND411, while a second electrode is connected to the node ND412.

[0322] A gate of the TFT 413 is connected to the drive line DSL401. Further, a gate of the TFT 414 is connected to the drive line DSL411. Further, a source and a drain of the TFT 412 as the first switch are connected between the data line DTL401 and the node ND411 (connection point with first electrode of capacitor C411). Further, a gate of the TFT 412 is connected to the scanning line WSL401.

[0323] Further, a source and a drain of the TFT 415 are connected between the node ND412 and the power source potential Vcc. A gate of the TFT 415 is connected to the drive line DSL421.

[0324] In this way, the pixel circuit 401 according to the present embodiment is configured with the source of the TFT 411 as the drive transistor and the anode of the light emitting element 416 connected by the TFT 414 and TFT 413 as the switching transistors, a capacitor C411 connected between the gate of the TFT 411 and the source side node ND411, and the gate of the TFT 411 (node ND412) connected through the TFT 415 to the power source potential Vcc (fixed voltage line).

[0325] Next, the operation of the above configuration will be explained focusing on the operation of a pixel circuit with

reference to FIGS. 38A to 38F, FIG. 39, and FIGS. 40A to 40H.

[0326] FIG. 40A shows a scanning signal $ws[401]$ applied to the first row scanning line WSL401 of the pixel array, FIG. 40B shows a scanning signal $ws[402]$ applied to the second row scanning line WSL402 of the pixel array, FIG. 40C shows drive signals $ds[401]$ and $ds[411]$ applied to the first row drive lines DSL401 and DSL411 of the pixel array, FIG. 40D shows drive signals $ds[402]$ and $ds[412]$ applied to the second row drive lines DSL402 and DSL412 of the pixel array, FIG. 40E shows a drive signal $ds[421]$ applied to the first row drive line DSL421 of the pixel array, FIG. 40F shows a drive signal $ds[422]$ applied to the second row drive line DSL421 of the pixel array, FIG. 40G shows a gate potential V_g of the TFT 411, that is, the potential VND412 of the node ND412, and FIG. 40H shows an anode side potential of the TFT 411, that is, the potential VND411 of the node ND411.

[0327] Note that there is no problem no matter which of the TFT 413 and TFT 414 turns on or off, so as shown in FIG. 40C and FIG. 40D, the drive signals $DS[401]$ and $ds[411]$ and the drive signals $ds[402]$ and $ds[412]$ applied to the drive lines DSL401 and DSL411 and the drive lines DSL402 and DSL412 are made the same timing.

[0328] First, at the ordinary emitting state of the EL light emitting element 416, as shown in FIGS. 40A to 40F, the scanning signals $ws[401]$, $ws[402]$,... to the scanning lines WSL401, WSL402,... are selectively set to the low level by the write scanner 404, the drive signals $ds[401]$, $ds[402]$,... to the drive lines DSL401, DSL402,... are selectively set to the high level by the drive scanner 405, the drive signals $ds[411]$, $ds[412]$,... to the drive lines DSL411, DSL412,... are selectively set to the high level by the drive scanner 406, and the drive signals $ds[421]$, $ds[422]$,... to the drive lines DSL421, DSL422,... are selectively set to the low level by the drive scanner 407.

[0329] As a result, in the pixel circuit 401, as shown in FIG. 38A, the TFT 414 and TFT 413 are held in the on state and the TFT 412 and TFT 415 is held in the off state.

[0330] First, at the ordinary non-emitting state of the EL light emitting element 416, as shown in FIGS. 40A to 40F, the scanning signals $ws[401]$, $ws[402]$,... to the scanning lines WSL401, WSL402,... are held at the low level by the write scanner 404, the drive signals $ds[421]$, $ds[422]$,... to the drive lines DSL421, DSL422,... are held at the low level by the drive scanner 407, the drive signals $ds[401]$, $ds[402]$,... to the drive lines DSL401, DSL402,... are selectively set to the low level by the drive scanner 405, and the drive signals $ds[411]$, $ds[412]$,... to the drive lines DSL411, DSL412,... are selectively set to the low level by the drive scanner 406.

[0331] As a result, in the pixel circuit 401, as shown in FIG. 38B, the TFT 412 and TFT 415 are held in the off state and the TFTs 413 and 414 are turned off.

[0332] At this time, the potential held at the EL light emitting element 416 falls since the source of supply disappears. The EL light emitting element 416 stops emitting light. The potential falls to the threshold voltage V_{th} of the EL light emitting element 416. However, since off current also flows to the EL light emitting element 416, if the non-emitting period continues, the potential will fall to GND.

[0333] On the other hand, the TFT 411 as the drive transistor is held in the on state since the gate potential is high. The source potential of the TFT 411 is boosted to the power source voltage V_{cc} . This boosting is performed in a short period. After boosting to the V_{cc} , no current is supplied to the TFT 411.

[0334] That is, in the pixel circuit 401 of the sixth embodiment, it is possible to operate without the supply of current in the pixel circuit during the non-emitting period and therefore possible to suppress the power consumption of the panel.

[0335] In this state, next, as shown in FIGS. 40A to 40F, the drive signals $ds[401]$, $ds[402]$,... to the drive lines DSL401, DSL402,... are held at the low level by the drive scanner 405, the drive signals $ds[411]$, $ds[412]$,... to the drive lines DSL411, DSL412,... are held at the low level by the drive scanner 406, and in that state the drive signals $ds[421]$, $ds[422]$,... to the drive lines DSL421, DSL422,... are set to the high level by the drive scanner 407, then the scanning signals $ws[401]$, $ws[402]$,... to the scanning lines WSL401, WSL402,... are selectively set to the high level by the write scanner 404.

[0336] As a result, in the pixel circuit 401, as shown in FIG. 38C, the TFT 413 and TFT 414 are held in the off state and the TFT 412 and TFT 415 are turned on. Due to this, the input signal propagated to the data line DTL401 by the horizontal selector 403 is written into the capacitor C411 as the pixel capacitor C_s .

[0337] At this time, the capacitor C411 as the pixel capacitor C_s holds a potential equal to the difference ($V_{cc}-V_{in}$) between the power source voltage V_{cc} and the input voltage V_{in} .

[0338] After this, in the non-emitting period of the EL light emitting element 416, as shown in FIGS. 40A to 40F, the drive signals $ds[401]$, $ds[402]$,... to the drive lines DSL401, DSL402,... are held at the low level by the drive scanner 405, the drive signals $ds[411]$, $ds[412]$,... to the drive lines DSL411, DSL412,... are held at the low level by the drive scanner 406, and in that state the drive signals $ds[421]$, $ds[422]$,... to the drive lines DSL421, DSL422,... are selectively set to the low level by the drive scanner 407, then the scanning signals $ws[401]$, $ws[402]$,... to the scanning lines WSL401, WSL402,... are selectively set to the low level by the write scanner 404.

[0339] As a result, in the pixel circuit 401, as shown in FIG. 38D, the TFT 415 and TFT 412 turn off and the writing of the input signal to the capacitor C411 as the pixel capacitor ends.

[0340] At this time, the capacitor C411 holds a potential equal to the difference ($V_{cc}-V_{in}$) between the power source voltage V_{cc} and the input voltage V_{in} regardless of the potential of the capacitor end.

[0341] After this, as shown in FIGS. 40A to 40F, the drive signals $ds[401]$, $ds[402]$,... to the drive lines DSL401, DSL402,... are held at the low level by the drive scanner 405, the drive signals $ds[421]$, $ds[422]$,... to the drive lines DSL421, DSL422,... are held at the low level by the drive scanner 407, the scanning signals $ws[401]$, $ws[402]$,... to the scanning lines WSL401, WSL402,... are held at the low level by the write scanner 404, and in that state the drive signals $ds[411]$, $ds[412]$,... to the drive lines DSL411, DSL412,... are selectively set to the high level by the drive scanner 406.

[0342] As a result, in the pixel circuit 401, as shown in FIG. 38E, the TFT414 turns on. By the TFT 414 turning on, the gate-source potential of the drive transistor TFT411 becomes the potential difference ($V_{cc}-V_{in}$) charged into the capacitor C411 as the pixel capacitor. Further, as shown in FIG. 40H, regardless of the value of the source potential of the TFT 411, the potential difference is held and the source potential of the drive transistor 411 rises to V_{cc} .

[0343] Further, as shown in FIGS. 40A to 40F, the drive signals $ds[421]$, $ds[422]$,... to the drive lines DSL421, DSL422,... are held at the low level by the drive scanner 407, the scanning signals $ws[401]$, $ws[402]$,... to the scanning lines WSL401, WSL402,... are held at the low level by the write scanner 404, the drive signals $ds[411]$, $ds[412]$,... to the drive lines DSL411, DSL412,... are held at the high level by the drive scanner 406, and in that state the drive signals $ds[401]$, $ds[402]$,... to the drive lines DSL401, DSL402,... are selectively held at the high level by the drive scanner 405.

[0344] As a result, at the pixel circuit 401, as shown in FIG. 38F, TFT 413 turns on.

[0345] By turning the TFT 413 on, the source potential of the TFT 411 falls. In this way, despite the fact that the source potential of the TFT 411 as the drive transistor fluctuates, since there is a capacitance between the gate of the TFT 411 and the anode of the EL light emitting element 416, the gate-source potential of the TFT 411 is constantly held at ($V_{cc}-V_{in}$).

[0346] At this time, the TFT 411 as the drive transistor is driven in the saturated region, so the current value I_{ds} flowing to the TFT 411 becomes the value shown in the above-mentioned equation 1. This is determined by the gate-source voltage V_{gs} of the drive transistor TFT 411.

[0347] This current also flows to the EL light emitting element 416. The EL light emitting element 416 emits light by a luminance proportional to the current value.

[0348] The equivalent circuit of the EL light emitting element can be described by transistors as shown in FIG. 39, so in FIG. 39, the potential of the node ND411 stops after rising to the gate potential at which the current I_{ds} flows to the light emitting element 416. Along with the change of this potential, the potential of the node ND412 also changes. If the final potential of the node ND411 is V_x , the potential of the node ND412 is described as ($V_x+V_{cc}-V_{in}$) and the gate-source potential of the TFT 411 as the drive transistor is held at (V_x+V_{cc}).

[0349] Due to the above, even if the EL light emitting element 416 deteriorates in I-V characteristic along with the increase in the emitting time, in the pixel circuit 401 of the sixth embodiment, the potential of the node ND411 drops while the gate-source potential of the TFT 411 as the drive transistor is held constant, so the current flowing through the TFT 411 does not change.

[0350] Accordingly, the current flowing through the EL light emitting element 416 also does not change. Even if the I-V characteristic of the EL light emitting element 416 deteriorates, a current corresponding to the gate-source potential ($V_{cc}-V_{in}$) constantly flows. Therefore, the past problem relating to deterioration along with elapse of the EL can be solved.

[0351] Further, in the circuit of the present invention, since the fixed potential is only the power source V_{cc} in the pixel, no GND line which has to be laid thick is necessary. Due to this, it is possible to reduce the pixel area. Further, in the non-emitting period, the TFTs 413 and 414 are off and no current is run through the circuit. That is, by not running current through the circuit during the non-emitting period, it is possible to reduce the power consumption.

[0352] As explained above, according to the sixth embodiment, the source-follower output with no deterioration in luminance even with a change in the I-V characteristic of an EL element along with elapse becomes possible.

[0353] A source-follower circuit of n-channel transistors becomes possible, so it is possible to use an n-channel transistor as a drive element of a light emitting element while using current anode-cathode electrodes.

[0354] Further, it is possible to configure transistors of a pixel circuit by only n-channel transistors and possible to use the a-Si process in the fabrication of the TFTs. Due to this, a reduction of the cost of TFT boards becomes possible.

[0355] Further, in the present invention, it is possible to use the pixel power source for the fixed potential, so it is possible to reduce the pixel area and possible to expect higher definition of the panel.

[0356] Still further, by not running a current through the circuit while the EL light emitting element is not emitting light, the power consumption can be reduced.

[0357] As explained above, according to the present invention, source-follower output with no deterioration in luminance even with a change in the I-V characteristic of an EL element along with elapse becomes possible.

[0358] A source-follower circuit of n-channel transistors becomes possible, so it is possible to use an n-channel transistor as a drive element of a light emitting element while using current anode-cathode electrodes.

[0359] Further, it is possible to configure transistors of a pixel circuit by only n-channel transistors and possible to use the a-Si process in the fabrication of the TFTs. Due to this, a reduction of the cost of TFT boards becomes possible.

[0360] Further, it is possible to write the signal line voltage in a short time even with for example a black signal and possible to obtain an image quality with a high uniformity. Simultaneously, it is possible to increase the signal line capacity and suppress leakage characteristics.

[0361] Further, it is possible to slash the number of GND lines at the TFT side and layout of the surrounding lines and layout of the pixels become easier.

[0362] Further, it is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and Vcc lines at the TFT board, and possible to improve the yield.

[0363] Further, it is possible to slash the number of GND lines at the TFT side, possible to eliminate the overlap of the GND lines and Vcc lines at the TFT board so as to lay the Vcc lines at a low resistance, and possible to obtain an image quality of a high uniformity.

[0364] Further, in the present Invention, it is possible to use the pixel power source for the fixed potential, so it is possible to reduce the pixel area and possible to look forward to higher definition of the panel.

[0365] Still further, by not running a current through the circuit while the EL light emitting element is not emitting light, the power consumption can be reduced.

[0366] Still further, it is possible to make the input signal voltage near the GND and possible to lighten the load on the external drive system.

INDUSTRIAL APPLICABILITY

[0367] According to the pixel circuit, display device, and method of driving a pixel circuit of the present invention, source-follower output with no deterioration in luminance even with a change in the I-V characteristic of an EL element along with elapse becomes possible and a source-follower circuit of n-channel transistors becomes possible, so it is possible to use an n-channel transistor as a drive element of an EL element while using current anode-cathode electrodes, therefore the invention can be applied even to a large-sized and high definition active matrix type display.

1. A pixel circuit for driving an electro-optic element with a luminance changing according to a flowing current, comprising:

a data line through which a data signal in accordance with luminance information is supplied;
 a first control line;
 first and second nodes;
 first and second reference potentials;
 a drive transistor forming a current supply line between the first terminal and the second terminal and controlling a current flowing through said current supply line in accordance with the potential of a control terminal connected to said second node;
 a pixel capacitance element connected between said first node and said second node;
 a first switch connected between said data line and either of a first terminal or second terminal of said pixel capacitance element and controlled in conduction by said first control line; and
 a first circuit for making a potential of said first node change to a fixed potential while said electro-optic element is not emitting light;
 said current supply line of the drive transistor, said first node, and said electro-optic element being connected in series between said first reference potential and second reference potential.

2. A pixel circuit as set forth in embodiment 1, wherein:

said circuit further comprises a second control line;
 said drive transistor is a field effect transistor with a source connected to said first node, a drain connected to said first reference potential or second reference potential, and a gate connected to said second node; and
 said first circuit includes a second switch connected between said first node and fixed potential and is controlled in conduction by said second control line.

3. A pixel circuit as set forth in embodiment 2, wherein when said electro-optic element is driven,
 as a first stage, said first switch is held in a non-conductive state by said first control line, said second switch is held in a conductive state by said second control line, and said first node is connected to a fixed potential;
 as a second stage, said first switch is held in a conductive state by said first control line, data to be propagated over said data line is written in said pixel capacitance element, then said first switch is held in a non-conductive state; and
 as a third stage, said second switch is held in a non-conductive state by said second control line.

4. A pixel circuit as set forth in embodiment 1, wherein:

said circuit further comprises a second control line;

said drive transistor is a field effect transistor with a drain connected to said first reference potential or second reference potential and a gate connected to said second node; and
 said first circuit includes a second switch connected between a source of said field effect transistor and an electro-optic element and is controlled in conduction by said second control line.

5
 10
 15
 20
 25
 30
 35
 40
 45
 50
 55
 60
 65
 70
 75
 80
 85
 90
 95
 100
 105
 110
 115
 120
 125
 130
 135
 140
 145
 150
 155
 160
 165
 170
 175
 180
 185
 190
 195
 200
 205
 210
 215
 220
 225
 230
 235
 240
 245
 250
 255
 260
 265
 270
 275
 280
 285
 290
 295
 300
 305
 310
 315
 320
 325
 330
 335
 340
 345
 350
 355
 360
 365
 370
 375
 380
 385
 390
 395
 400
 405
 410
 415
 420
 425
 430
 435
 440
 445
 450
 455
 460
 465
 470
 475
 480
 485
 490
 495
 500
 505
 510
 515
 520
 525
 530
 535
 540
 545
 550
 555
 560
 565
 570
 575
 580
 585
 590
 595
 600
 605
 610
 615
 620
 625
 630
 635
 640
 645
 650
 655
 660
 665
 670
 675
 680
 685
 690
 695
 700
 705
 710
 715
 720
 725
 730
 735
 740
 745
 750
 755
 760
 765
 770
 775
 780
 785
 790
 795
 800
 805
 810
 815
 820
 825
 830
 835
 840
 845
 850
 855
 860
 865
 870
 875
 880
 885
 890
 895
 900
 905
 910
 915
 920
 925
 930
 935
 940
 945
 950
 955
 960
 965
 970
 975
 980
 985
 990
 995

6. A pixel circuit as set forth in embodiment 1, wherein:

said circuit further comprises a second control line;
 said drive transistor is a field effect transistor with a source connected to said first node, a drain connected to said first reference potential or second reference potential, and a gate connected to said second node; and
 said first circuit includes a second switch connected between said first node and said electro-optic element and is controlled in conduction by said second control line.

7. A pixel circuit as set forth in embodiment 6, wherein when said electro-optic element is driven,
 as a first stage, said first switch is held in a non-conductive state by said first control line, and said second switch is held in a non-conductive state by said second control line;
 as a second stage, said first switch is held in a conductive state by said first control line, data to be propagated over said data line is written in said pixel capacitance element, then said first switch is held in a non-conductive state; and
 as a third stage, said second switch is held in a conductive state by said second control line.

8. A pixel circuit as set forth in embodiment 1, further comprising a second circuit making said first node be held at a fixed potential when said first switch is held in a conductive state and writes data propagated through the data line.

9. A pixel circuit as set forth in embodiment 8, wherein:

said circuit further comprises second and third control lines and a voltage supply;
 said drive transistor is a field effect transistor with a drain connected to said first reference potential or second reference potential and a gate connected to said second node;
 said first circuit includes a second switch connected between a source of said field effect transistor and said electro-optic element and is controlled in conduction by said second control line; and
 said second circuit includes a third switch connected between said first node and said voltage source and is controlled in conduction by said third control line.

10. A pixel circuit as set forth in embodiment 9, wherein when said electro-optic element is driven,
 as a first stage, said first switch is held in a non-conductive state by said first control line, said second switch is held in a non-conductive state by said second control line, and said third switch is held in a non-conductive state by said third control line;
 as a second stage, said first switch is held in a conductive state by said first control line, said third switch is held in a conductive state by said third control line, said first node is held at a predetermined potential, and, in that state, data to be propagated over said data line is written in said pixel capacitance element, then said first switch is held in a non-conductive state by said first control line; and
 as a third stage, said third switch is held in a non-conductive state by said third control line and said second switch is held in a conductive state by said second control line.

11. A pixel circuit as set forth in embodiment 8, wherein
 said circuit further comprises second and third control lines and a voltage source;
 said drive transistor is a field effect transistor with a source connected to said first node, a drain connected to said first reference potential or second reference potential, and a gate connected to said second node;
 said first circuit includes a second switch connected between said first node and said electro-optic element and is

controlled in conduction by said second control line; and
 said second circuit includes a third switch connected between said first node and said voltage source and is controlled in conduction by said third control line.

12. A pixel circuit as set forth in embodiment 11, wherein when said electro-optic element is driven, as a first stage, said first switch is held in a non-conductive state by said first control line, said second switch is held in a non-conductive state by said second control line, and said third switch is held in a non-conductive state by said third control line;
 as a second stage, said first switch is held in a conductive state by said first control line, said third switch is held in a conductive state by said third control line, said first node is held at a predetermined potential, and, in that state, data to be propagated over said data line is written in said pixel capacitance element, then said first switch is held in a non-conductive state by said first control line; and
 as a third stage, said third switch is held in a non-conductive state by said third control line and said second switch is held in a conductive state by said second control line.

13. A pixel circuit as set forth in embodiment 1, further comprising a second circuit making said second node be held at a fixed potential when said first switch is held in a conductive state and writes data propagated through the data line.

14. A pixel circuit as set forth in embodiment 13, wherein said fixed potential is said first reference potential or second reference potential.

15. A pixel circuit as set forth in embodiment 13, wherein:

said circuit further comprises second, third, and fourth control lines;
 said drive transistor is a field effect transistor with a source connected to said first node, a drain connected to said first reference potential or second reference potential, and a gate connected to said second node;
 said first circuit includes a second switch connected between said first node and said electro-optic element and is controlled in conduction by said second control line and a third switch connected between a source of said field effect transistor and said first node and is controlled in conduction by said third control line; and
 said second circuit includes a fourth switch connected between said first node and said fixed potential and is controlled in conduction by said fourth control line.

16. A pixel circuit as set forth in embodiment 15, wherein when said electro-optic element is driven, as a first stage, said first switch is held in a non-conductive state by said first control line, said second switch is held in a non-conductive state by said second control line, said third switch is held in a non-conductive state by said third control line, and said fourth switch is held in a non-conductive state by said fourth control line;
 as a second stage, said first switch is held in a conductive state by said first control line, said fourth switch is held in a conductive state by said fourth control line, said second node is held at a fixed potential, and, in that state, data to be propagated over said data line is written in said pixel capacitance element, then said first switch is held in a non-conductive state by said first control line, and said fourth switch is held at a non-conductive state by said fourth control line; and
 as a third stage, said second switch is held in a conductive state by said second control line and said third switch is held in a conductive state by said third control line.

17. A display device comprising:

a plurality of pixel circuits arranged in a matrix;
 a data line arranged for each column of said matrix array of pixel circuits and through which a data signal in accordance with luminance information is supplied;
 a first control line arranged for each row of said matrix array of pixel circuits; and
 first and second reference potentials;
 each said pixel circuit further having:

an electro-optic element with a luminance changing according to a flowing current,
 first and second nodes,
 a drive transistor forming a current supply line between a first terminal and a second terminal and controlling a current flowing through said current supply line in accordance with the potential of a control terminal

connected to said second node,
 a pixel capacitance element connected between said first node and said second node,
 a first switch connected between said data line and said second node and controlled in conduction by said
 first control line, and
 a first circuit for making a potential of said first node change to a fixed potential while said electro-optic
 element is not emitting light,
 said current supply line of the drive transistor, said first node, and said electro-optic element being connected
 in series between said first reference potential and second reference potential.

18. A display device as set forth in embodiment 17, further comprising a second circuit for making said first node
 be held at a predetermined potential when said first switch is held in the conductive state and writes data to be
 propagated through the data line.

19. A display device as set forth in embodiment 17, further comprising a second circuit for making said second node
 be held at a fixed potential when said first switch is held in the conductive state and writes data to be propagated
 through the data line.

20. A method of driving a pixel circuit having:

an electro-optic element with a luminance changing according to a flowing current,
 a data line through which a data signal in accordance with luminance information is supplied;
 first and second nodes;
 first and second reference potentials;
 a field effect transistor with a drain connected to said first reference potential or second reference potential, a
 source connected to said first node, and a gate connected to said second node;
 a pixel capacitance element connected between said first node and said second node;
 a first switch connected between said data line and either of a first terminal or a second terminal of said pixel
 capacitance element; and
 a first circuit for making a potential of said first node change to a fixed potential;
 said current supply line of the drive transistor, said first node, and said electro-optic element being connected
 in series between said first reference potential and second reference potential,
 said method of driving a pixel circuit comprising steps of:

making a potential of said first node change to a fixed potential by said first circuit in the state with said first
 switch held at a non-conductive state,
 holding said first switch at a conductive state, writing data propagated over said data line in said pixel
 capacitance element, then holding said first switch in the non-conductive, and
 stopping the operation for making a potential of said first node of said first circuit change to a fixed potential.

Claims

1. A display device comprising:

a plurality of pixel circuits (101) for driving electro-optic elements (114);
 a first scanner (104) configured to drive a first control line (WSL),
 a second scanner (105) configured to drive a second control line (DSL);
 first and second reference potential lines (Vcc, GND); and
 a data line (DTL101) through which a data signal in accordance with luminance information is supplied,

wherein a pixel circuit of said plurality of pixel circuits includes:

a drive transistor (111) including a first terminal, a second terminal and a control terminal, the second terminal
 being connected to one of the electro-optic elements, and the drive transistor being configured to form a current
 supply line between the first terminal and the second terminal and to control a current flowing through said
 current supply line in accordance with a potential of the control terminal,
 a pixel capacitor (C111) connected between said control terminal and said second terminal,
 a first thin film transistor, TFT, (112) connected between said data line and the control terminal and controlled

by said first control line, and

a second TFT (113) to set a potential of said second terminal to a fixed potential while said one of the electro-optic elements is not emitting light, the second TFT being controlled by said second control line, and wherein said current supply line of the drive transistor, the second terminal, and said one of the electro-optic elements are connected in series between said first reference potential line and second reference potential line.

2. The display device according to claim 1, wherein the fixed potential is different from potentials of the first and second reference potential lines.

3. The display device according to any one of the preceding claims, wherein a potential of said second reference potential line is ground.

4. The display device according to any one of the preceding claims, wherein in said pixel circuit, the drive transistor, the first and second TFTs are a same type of TFT.

5. The display device according to claim 4, wherein in said pixel circuit, the drive transistor, the first and second TFTs are n-type TFTs.

6. The display device according to any one of the preceding claims, wherein said pixel circuit includes only transistors of a same type.

7. The display device according to claim 6, wherein said pixel circuit includes only n-type transistors.

8. The display device according to any one of the preceding claims, wherein in said pixel circuit, the electro-optic element is organic EL element which emits light in response to the current flow.

9. The display device according to any one of the preceding claims, wherein in said pixel circuit, the first and second TFTs are in a conductive state during a signal write period.

10. The display device according to any one of the preceding claims, wherein in said pixel circuit, the first and second TFTs are in a non-conductive state when said one of the electro-optic elements is emitting light.

11. The display device according to any one of the preceding claims, wherein, within said pixel circuit, the second control line is connected only to the second TFT.

12. The display device according to any one of the preceding claims, wherein said pixel capacitor (C111) is directly connected between said control terminal and said second terminal.

13. A method of driving a pixel circuit, said pixel circuit including:

a drive transistor (111) including a first terminal, a second terminal and a control terminal, the second terminal being connected to an electro-optic element (114), and the drive transistor being configured to form a current supply line between the first terminal and the second terminal and to control a current flowing through the current supply line in accordance with a potential of the control terminal,

a pixel capacitor (C111) connected between said control terminal and said second terminal,

a first thin film transistor, TFT, (112) connected between a data line (DTL101) and the control terminal and controlled by a first control line (WSL), and

a second TFT (113) to set a potential of said second terminal to a fixed potential while said one of the electro-optic elements is not emitting light, the second TFT being controlled by a second control line (DSL), and

wherein said method comprises:

providing a driving signal to the second control line by a second scanner (105) to turn on the second TFT, then, providing a scanning signal to the first control line by a first scanner (104) to turn on the first TFT, then, providing said current flowing to the electro-optic elements (114) through said current supply line, wherein said current supply line of the drive transistor, the second terminal, and said one of the electro-optic elements are connected in series between a first reference potential line (Vcc) and a second reference potential line (GND).

14. The method of driving the pixel circuit according to claim 13, wherein after an input signal is written into the pixel capacitor by the first TFT, a gate-source potential of the drive transistor is held constant.
- 5 15. The method of driving the pixel circuit according to claim 14, wherein after the input signal is written into the pixel capacitor by the first TFT, a source potential of the drive TFT rises while the gate-source potential of the drive transistor is held constant.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

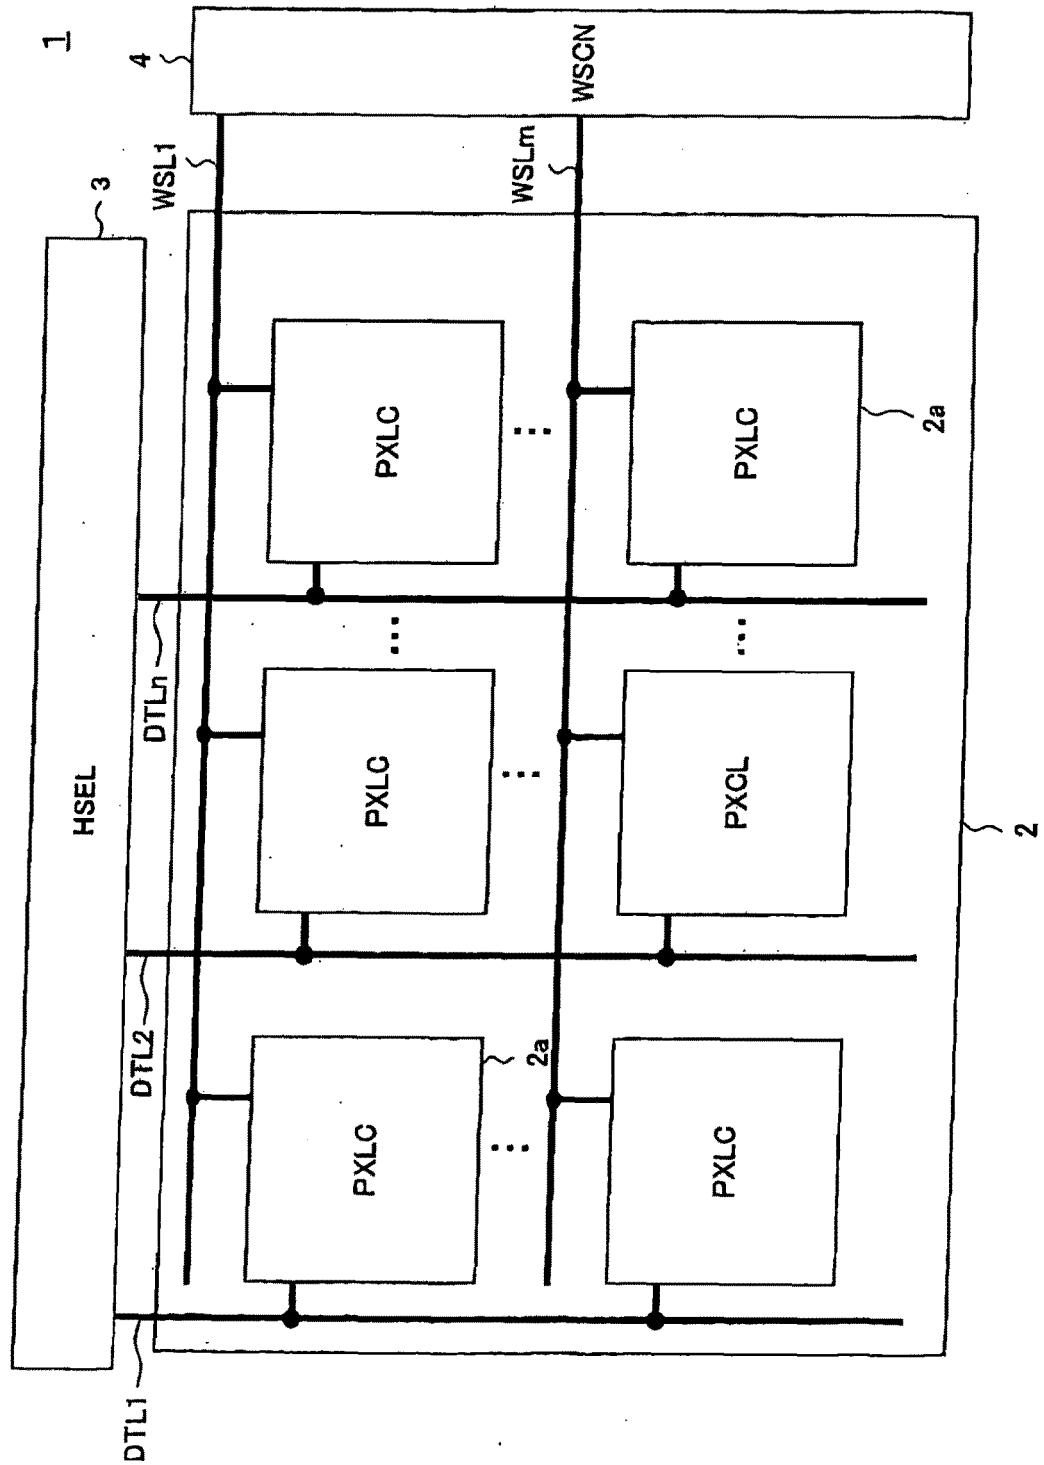


FIG. 2

2a

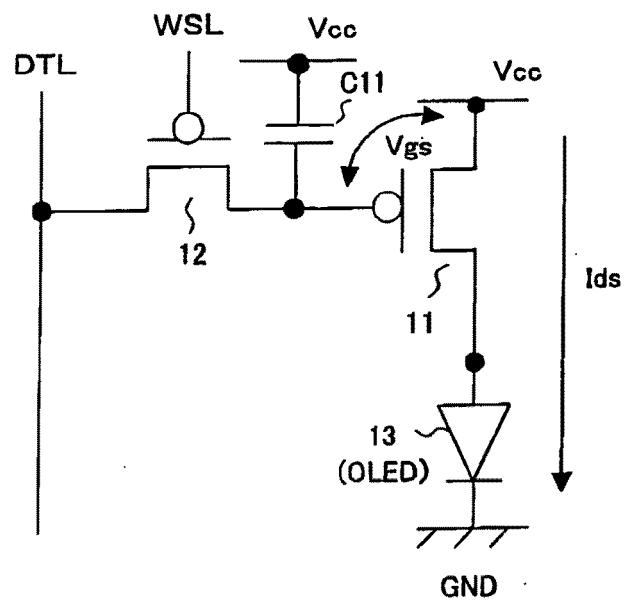


FIG. 3

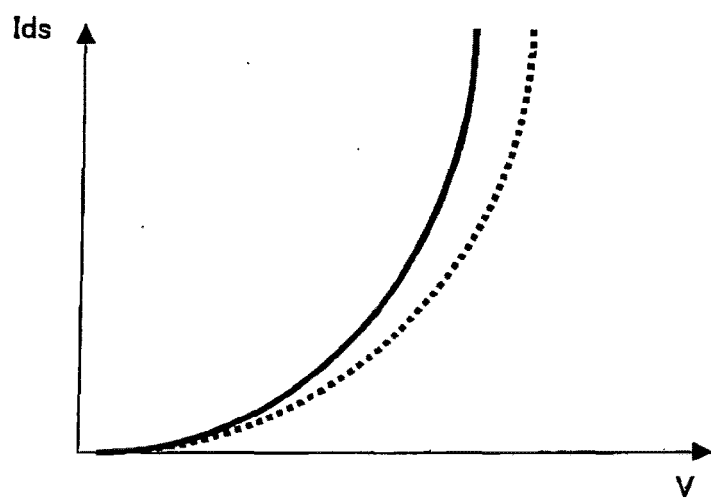


FIG. 4

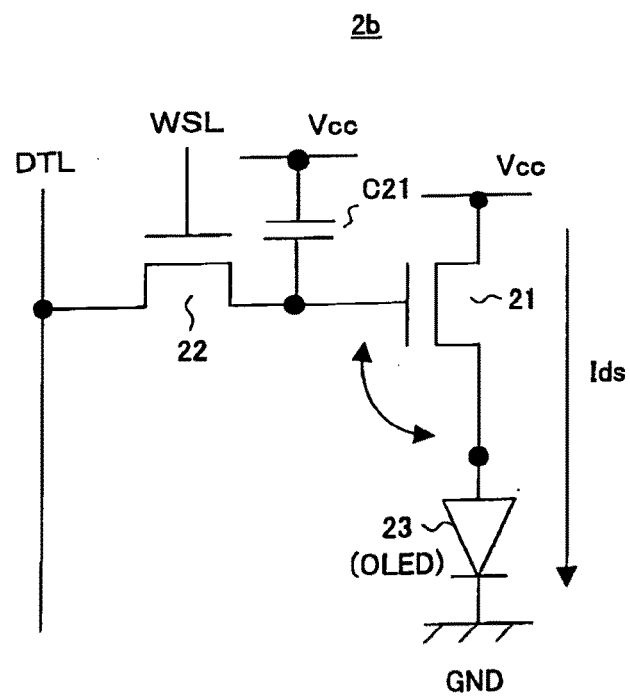


FIG. 5

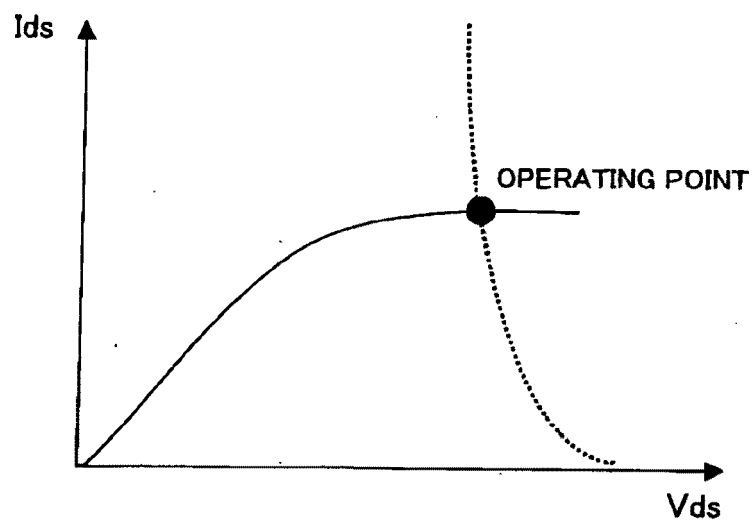


FIG. 6

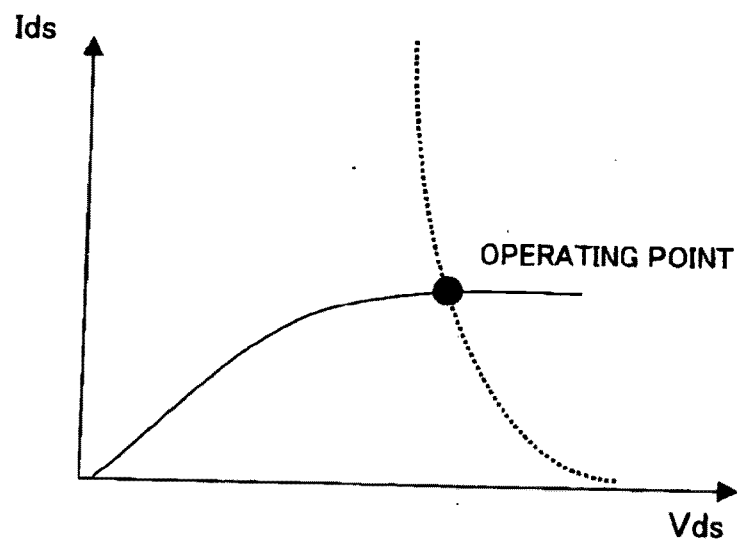


FIG. 7

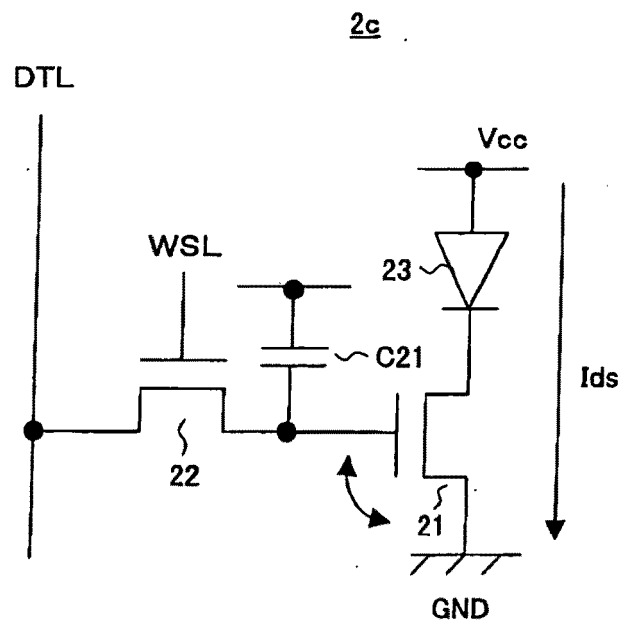


FIG. 8

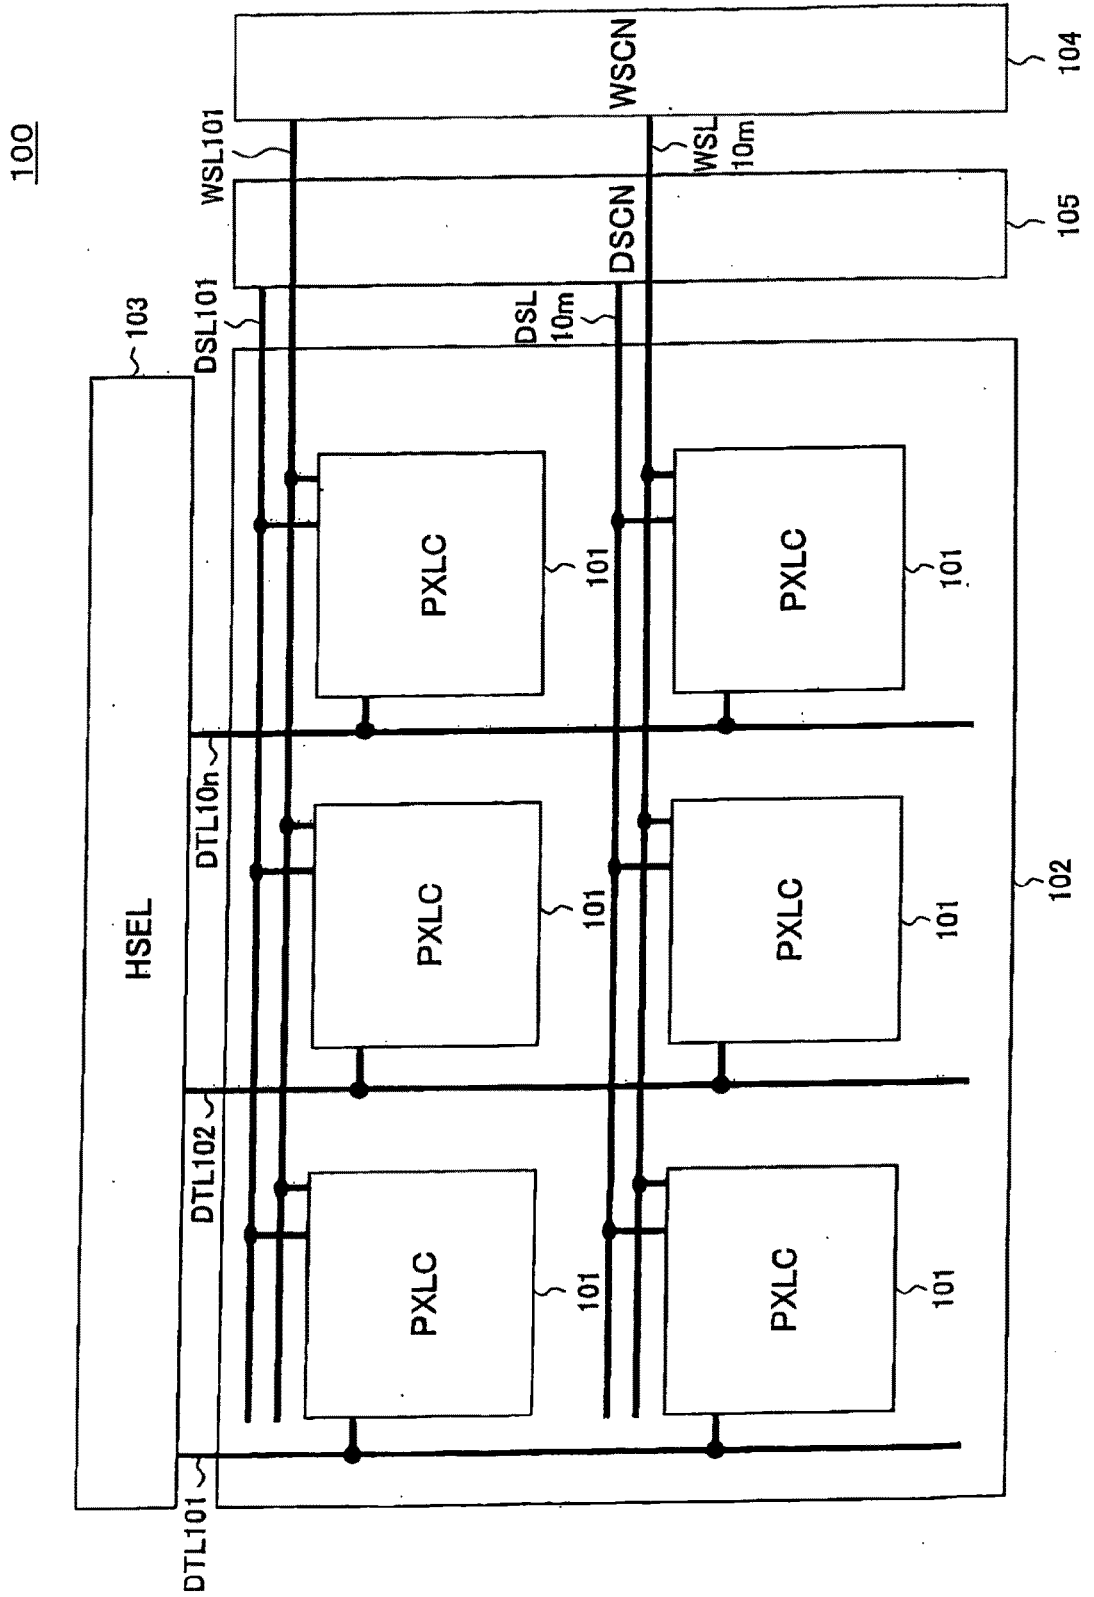


FIG. 9

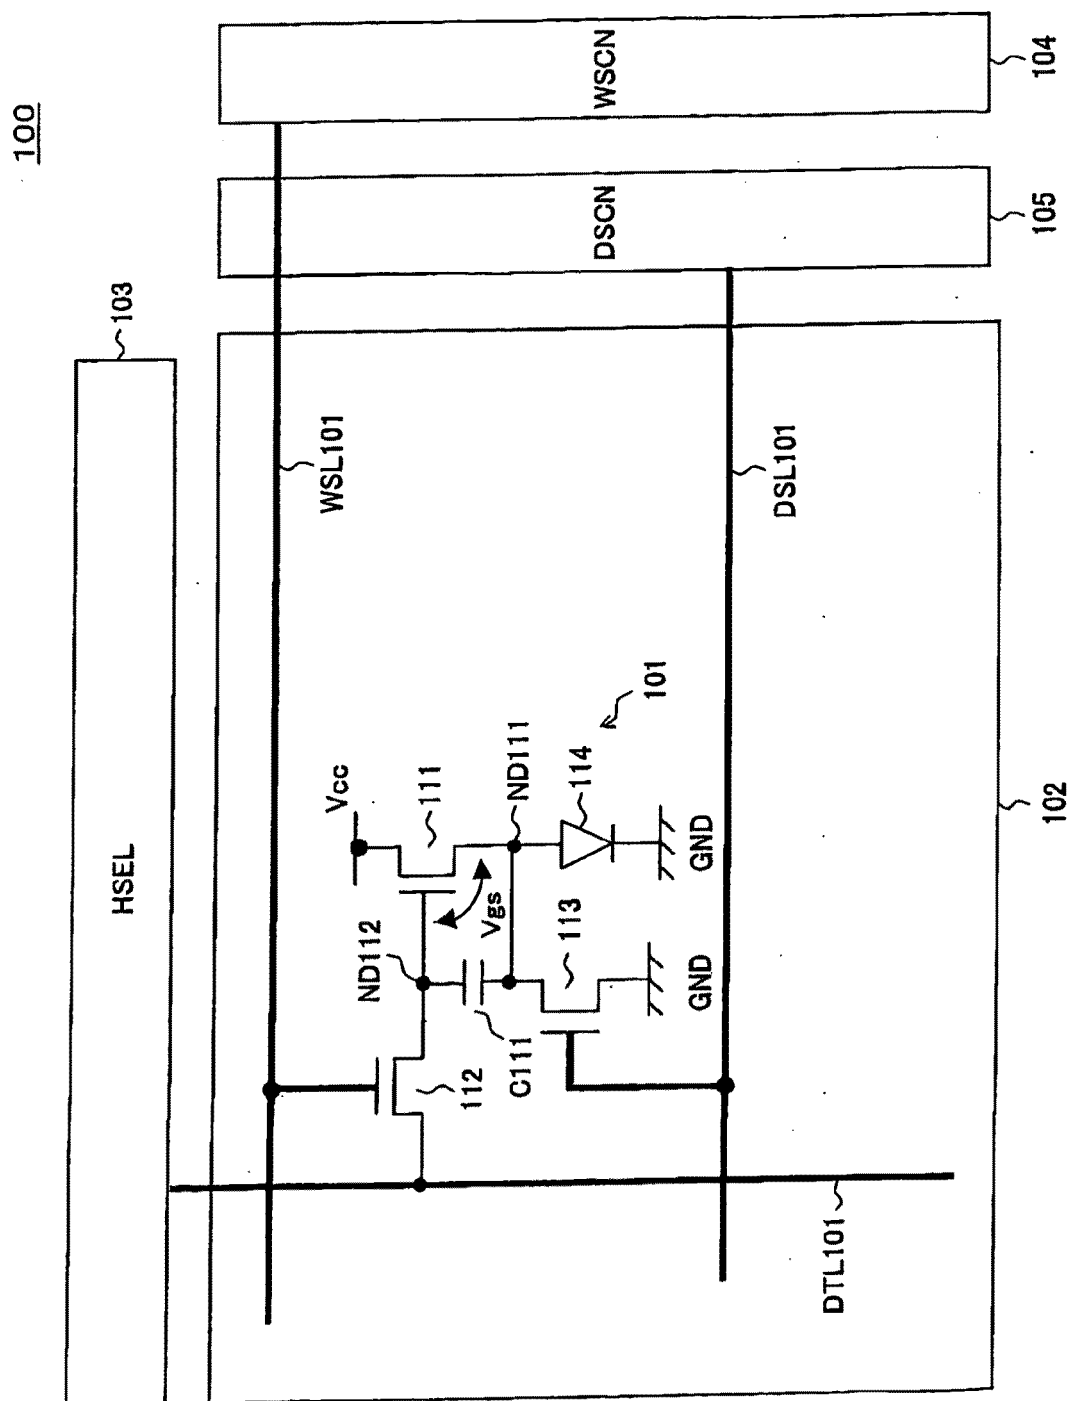


FIG. 10A

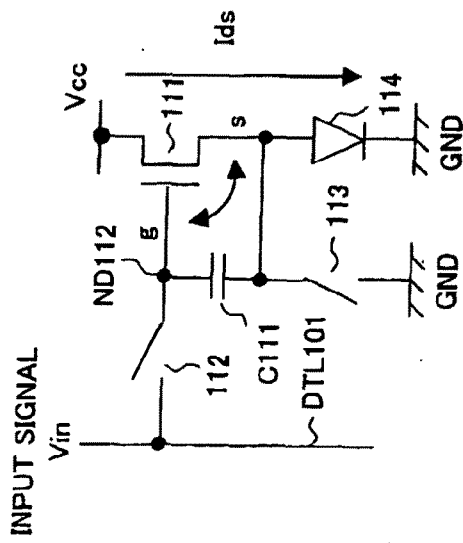


FIG. 10B

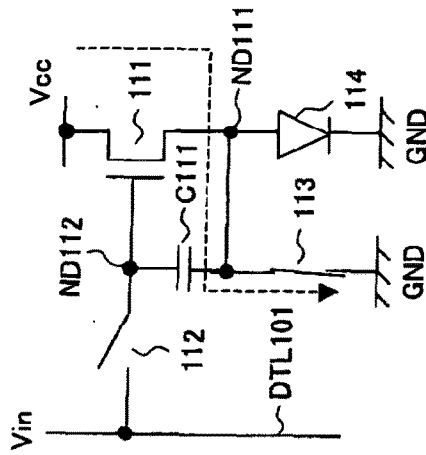


FIG. 10C

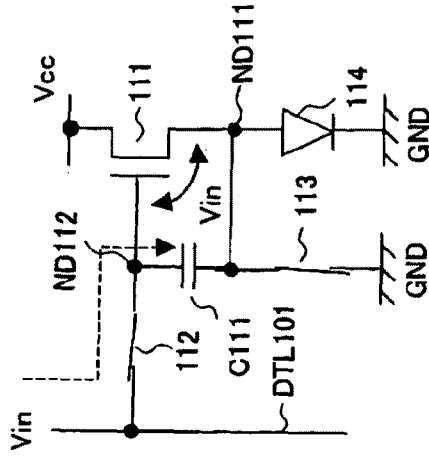


FIG. 10D

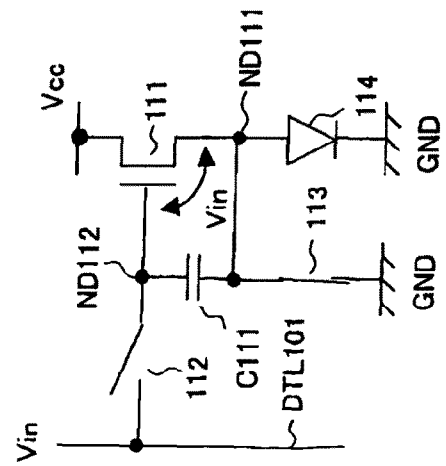


FIG. 10E

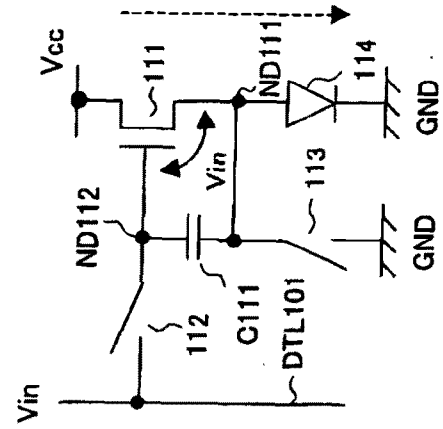
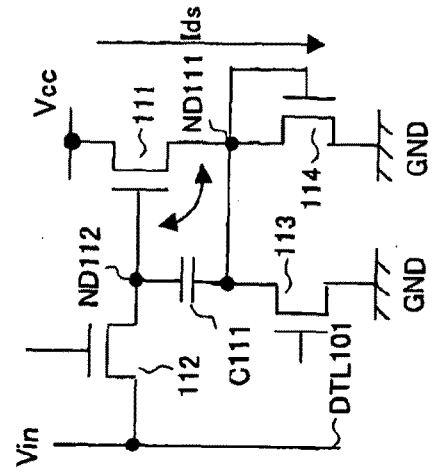


FIG. 10F



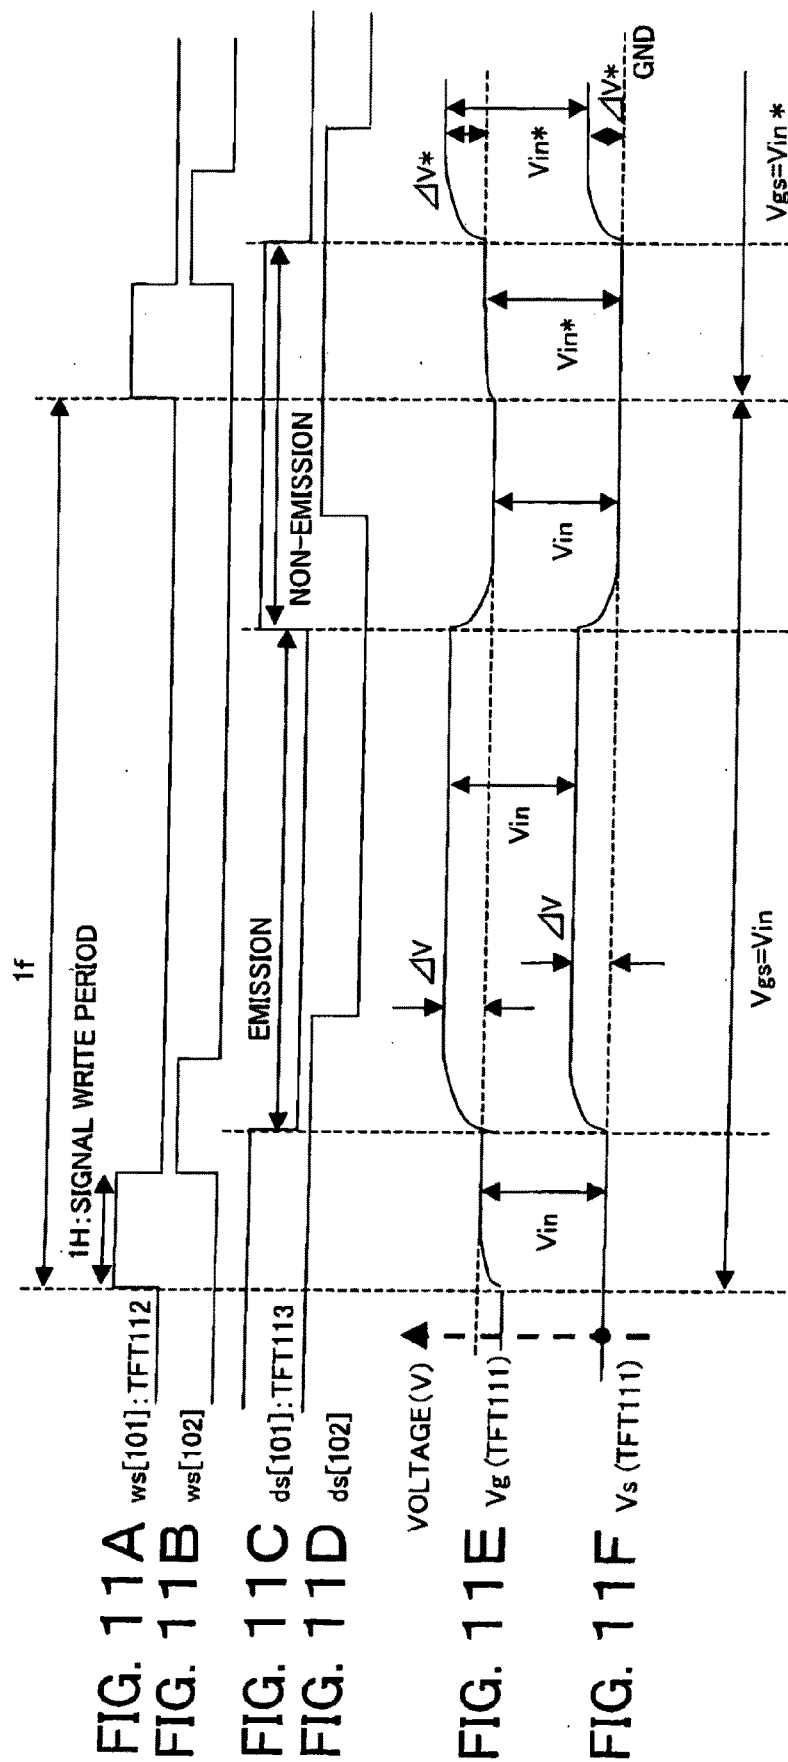


FIG. 12

200

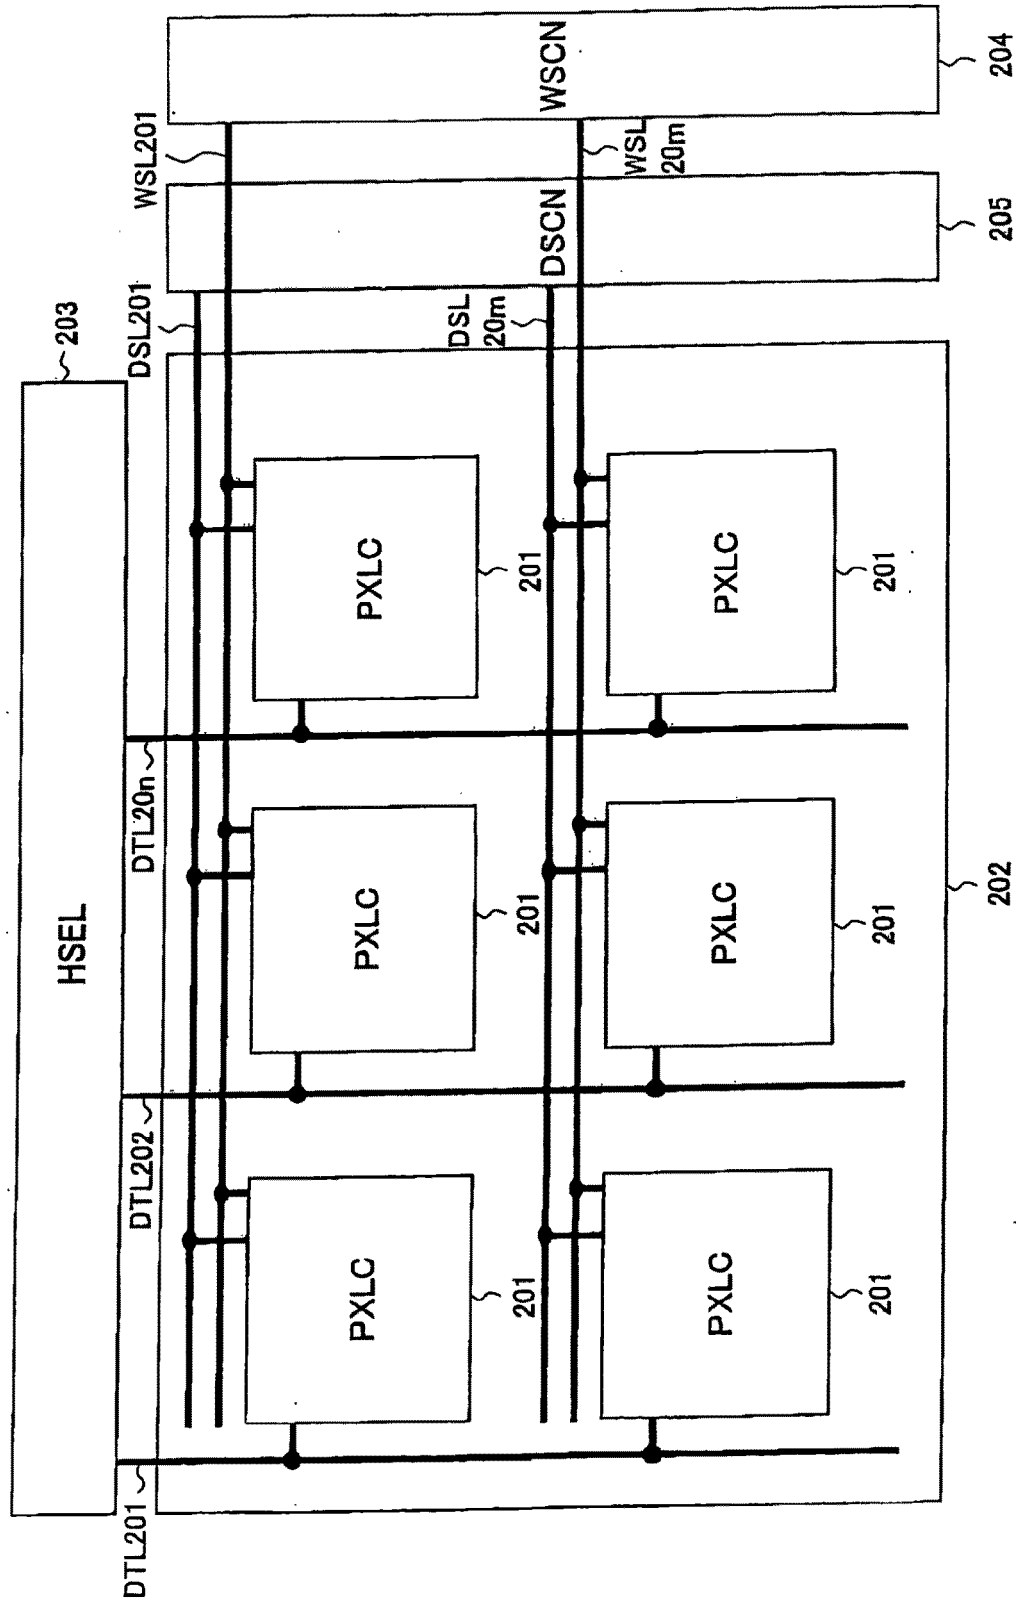
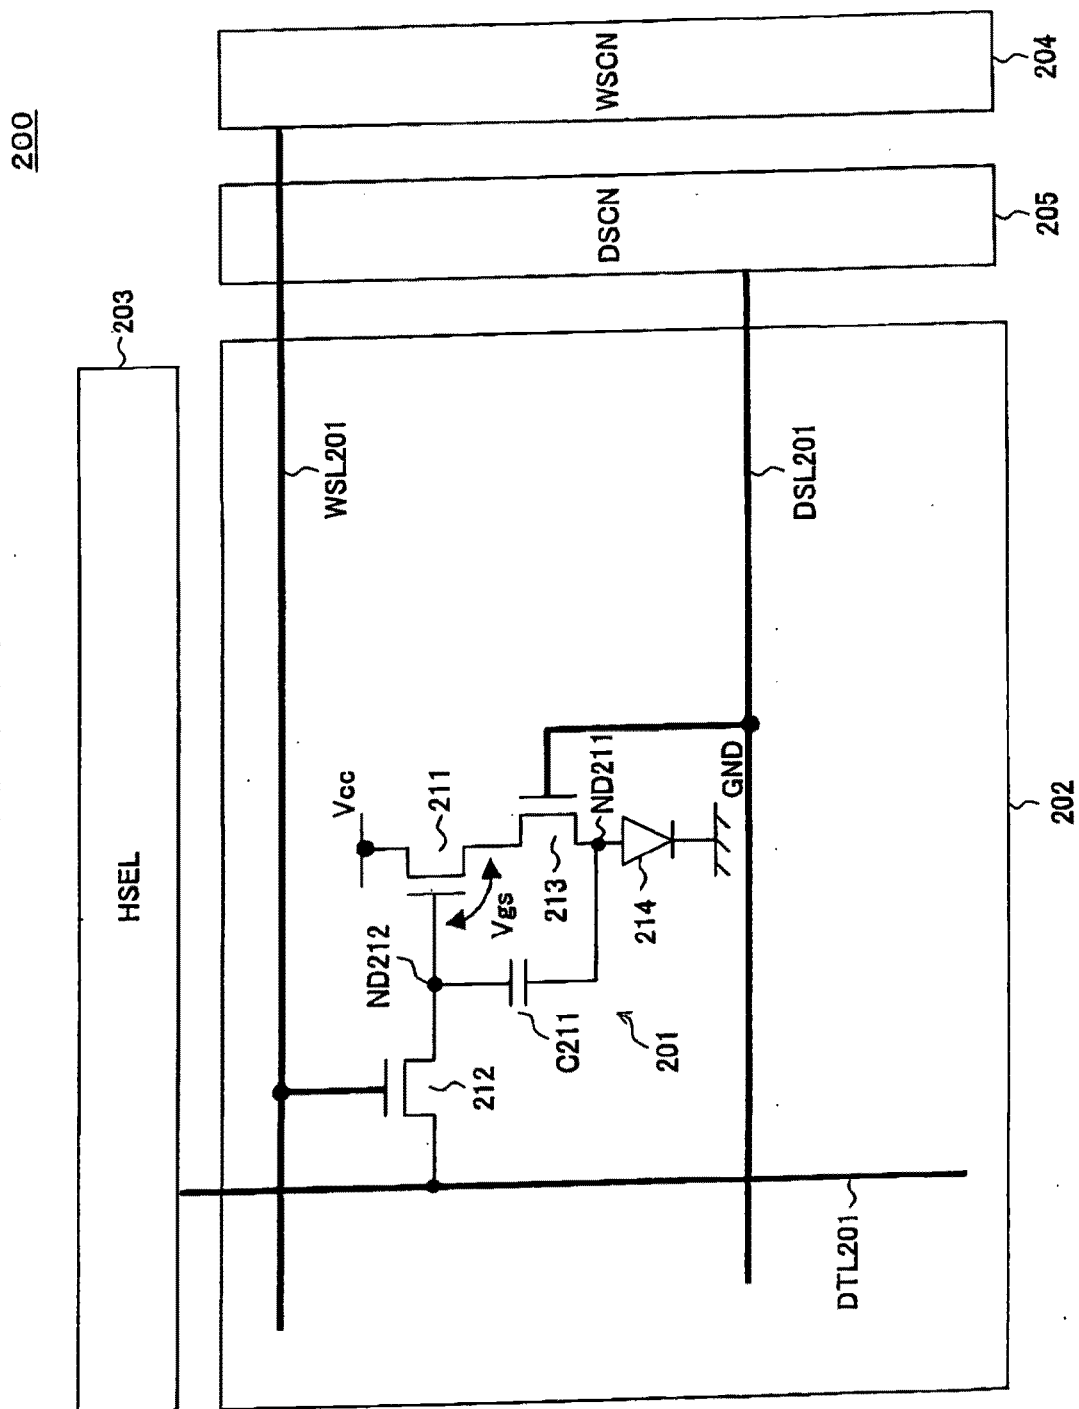
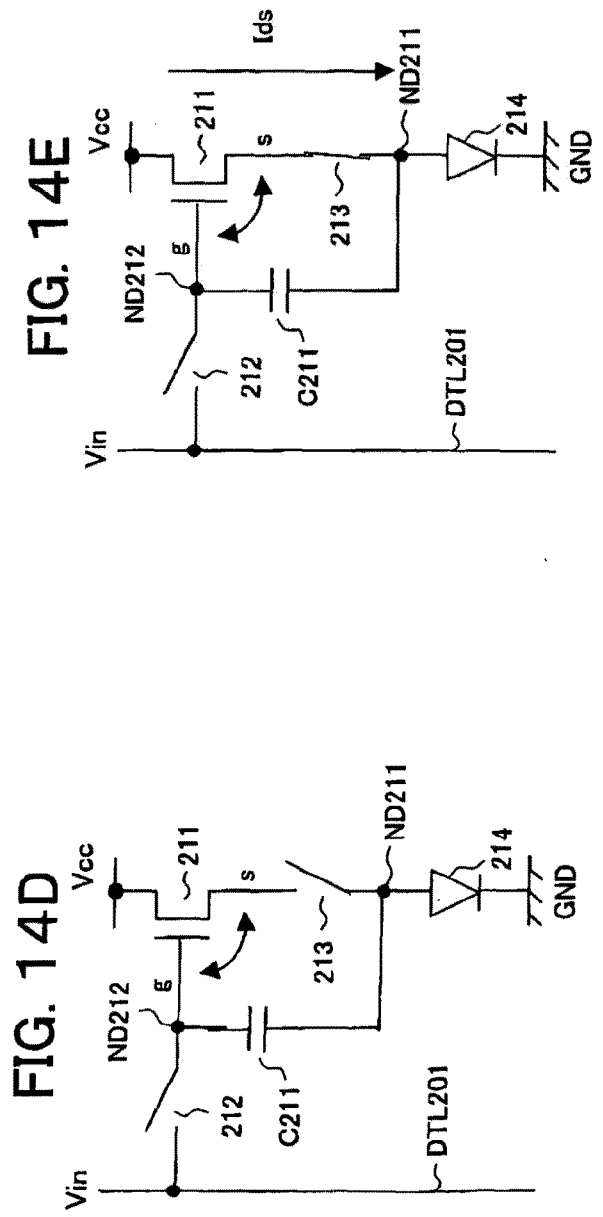
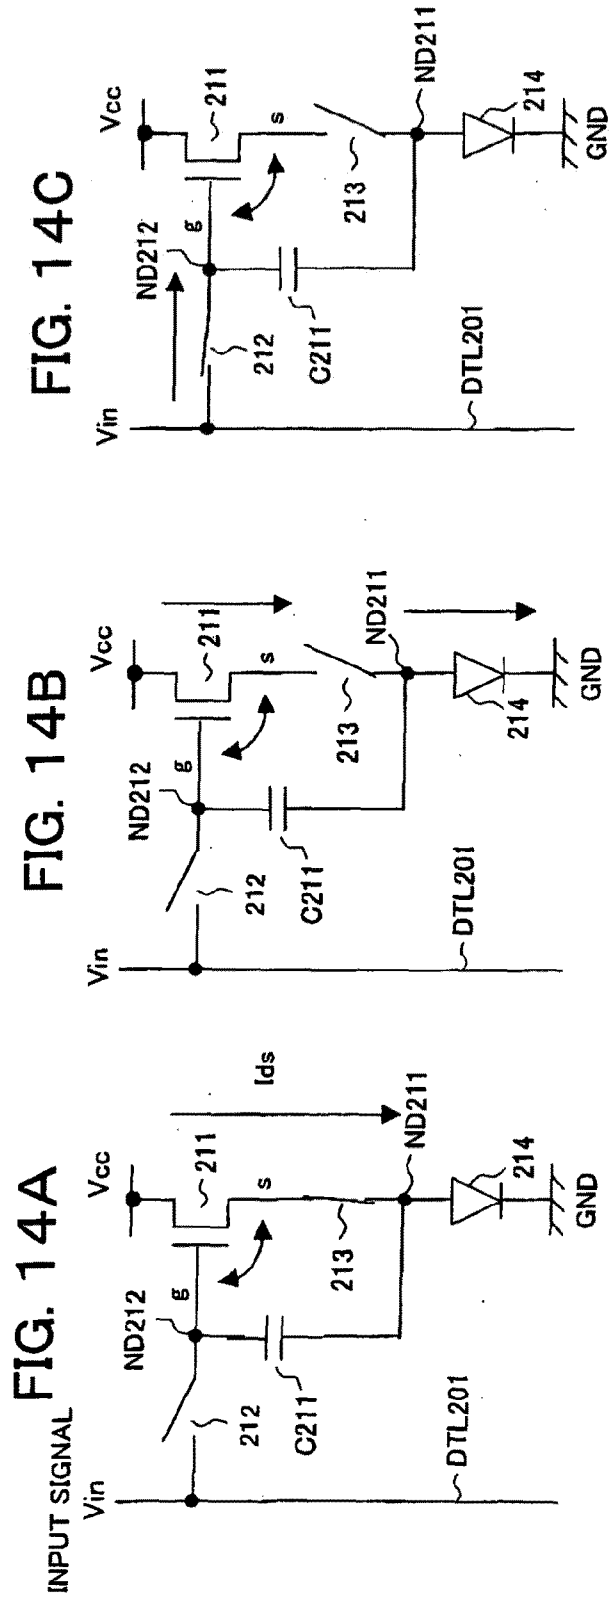


FIG. 13





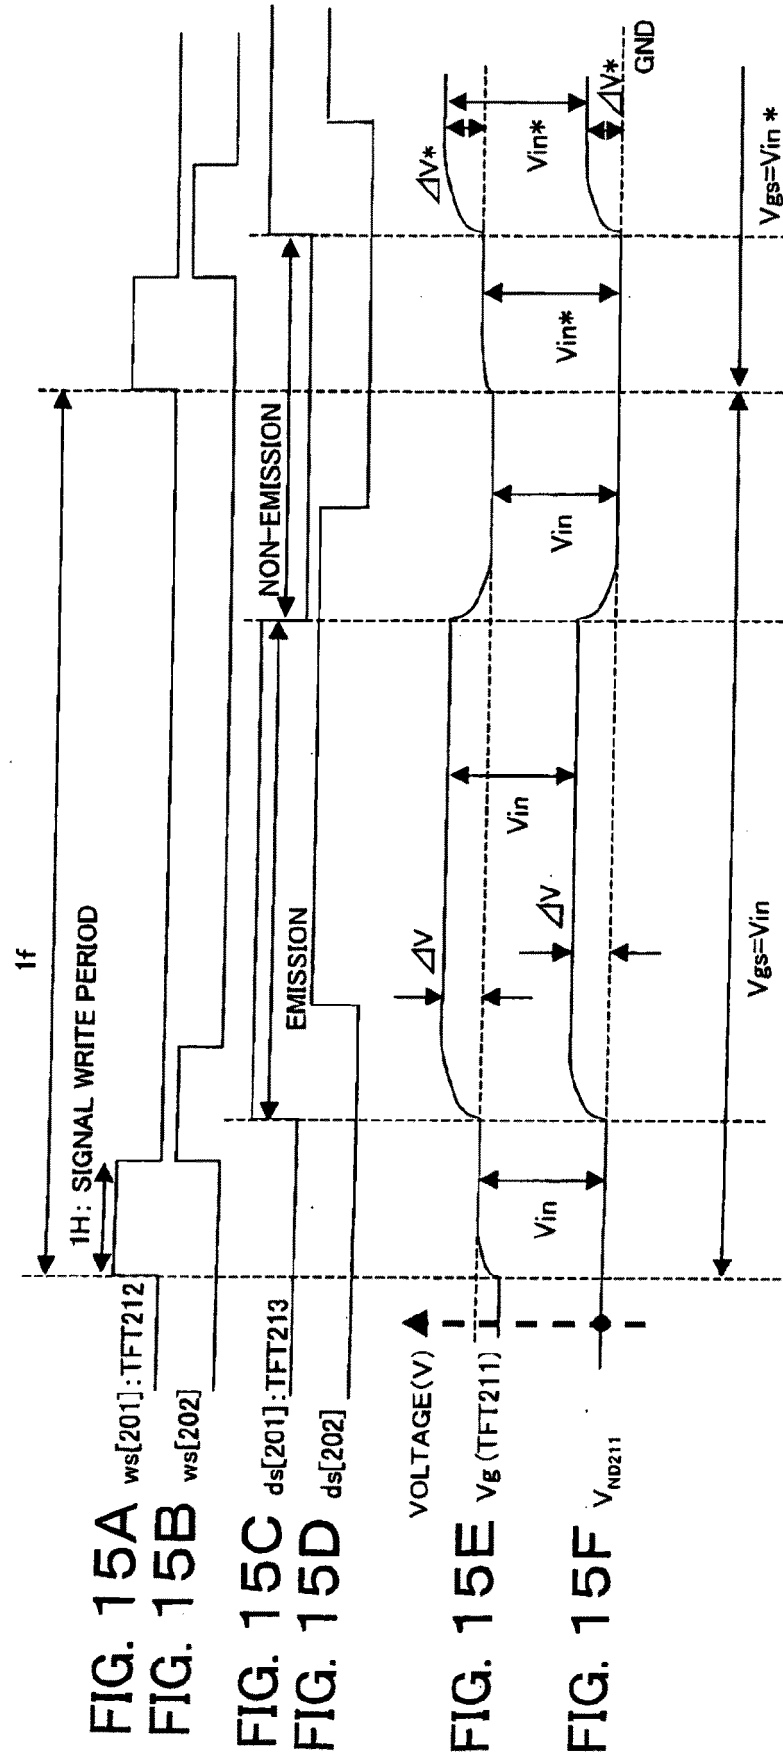


FIG. 16

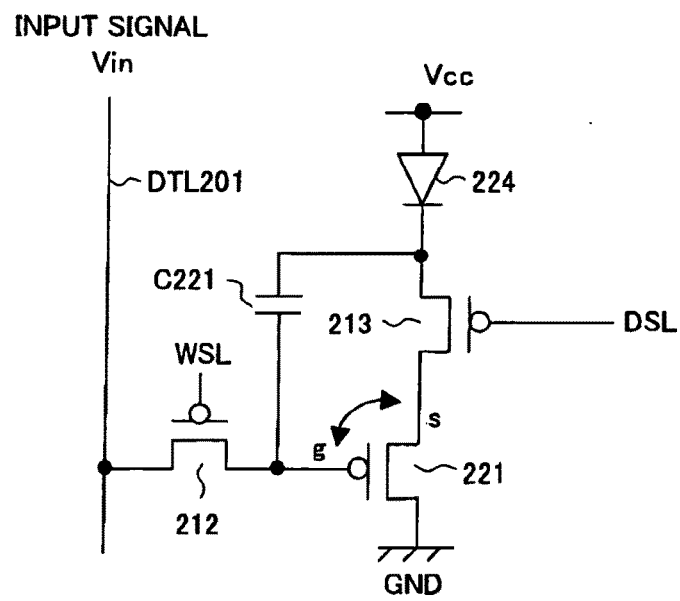


FIG. 17

200A

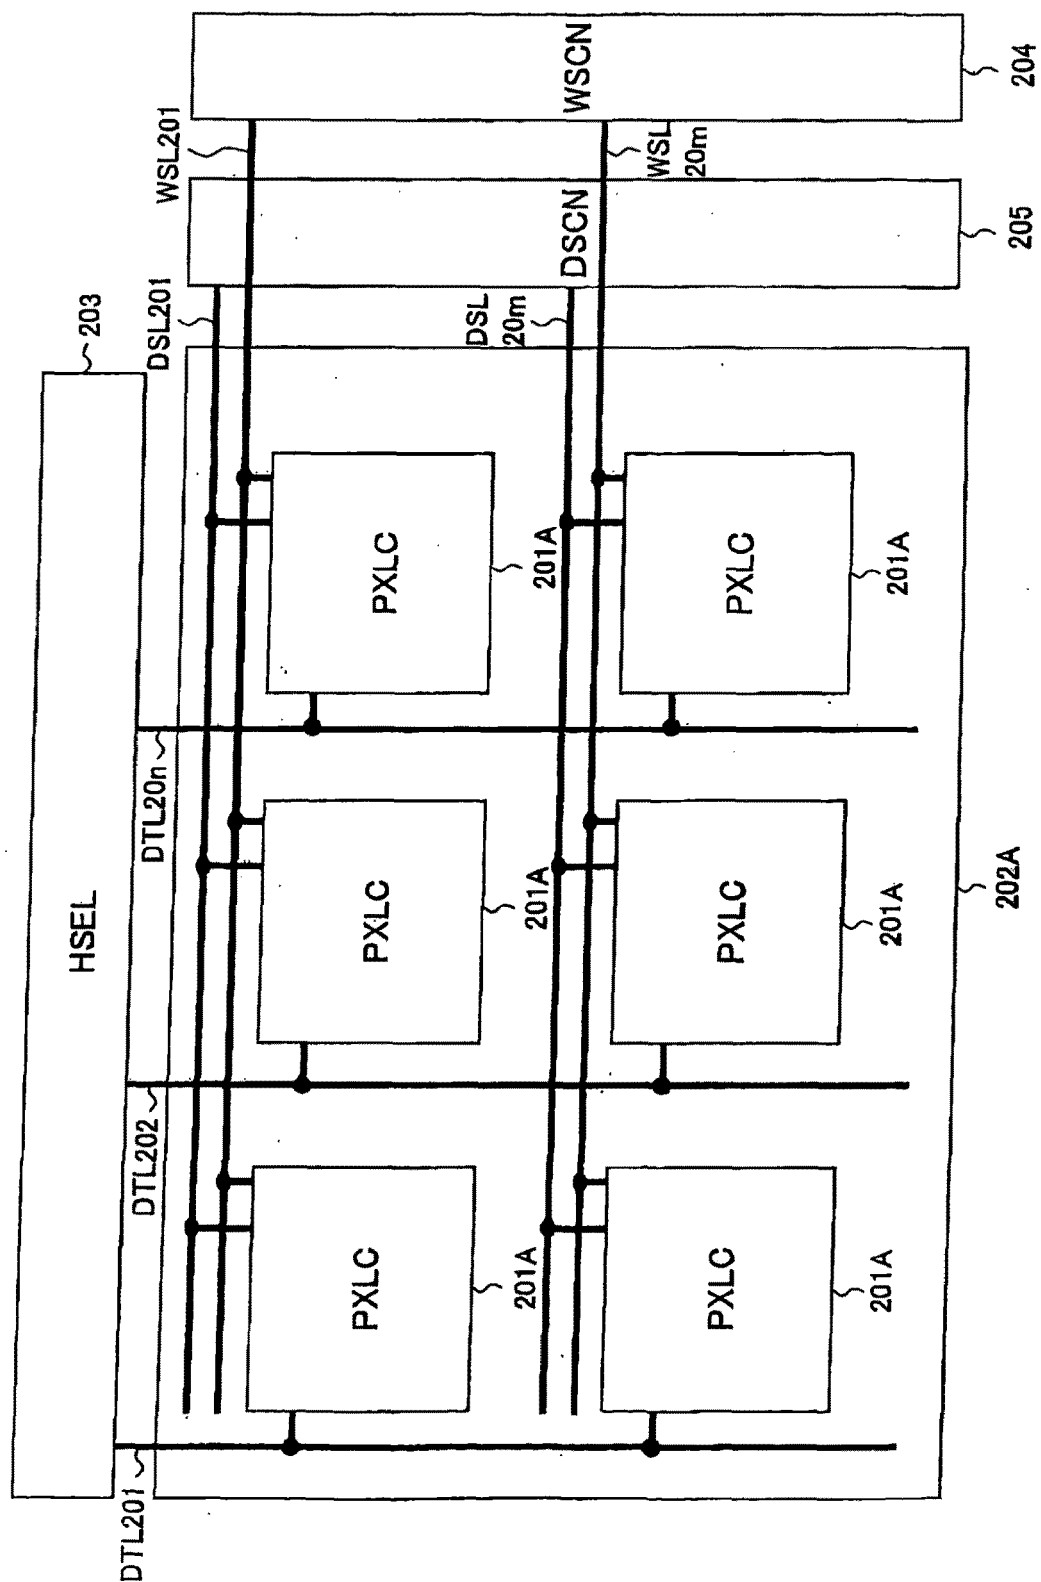


FIG. 18

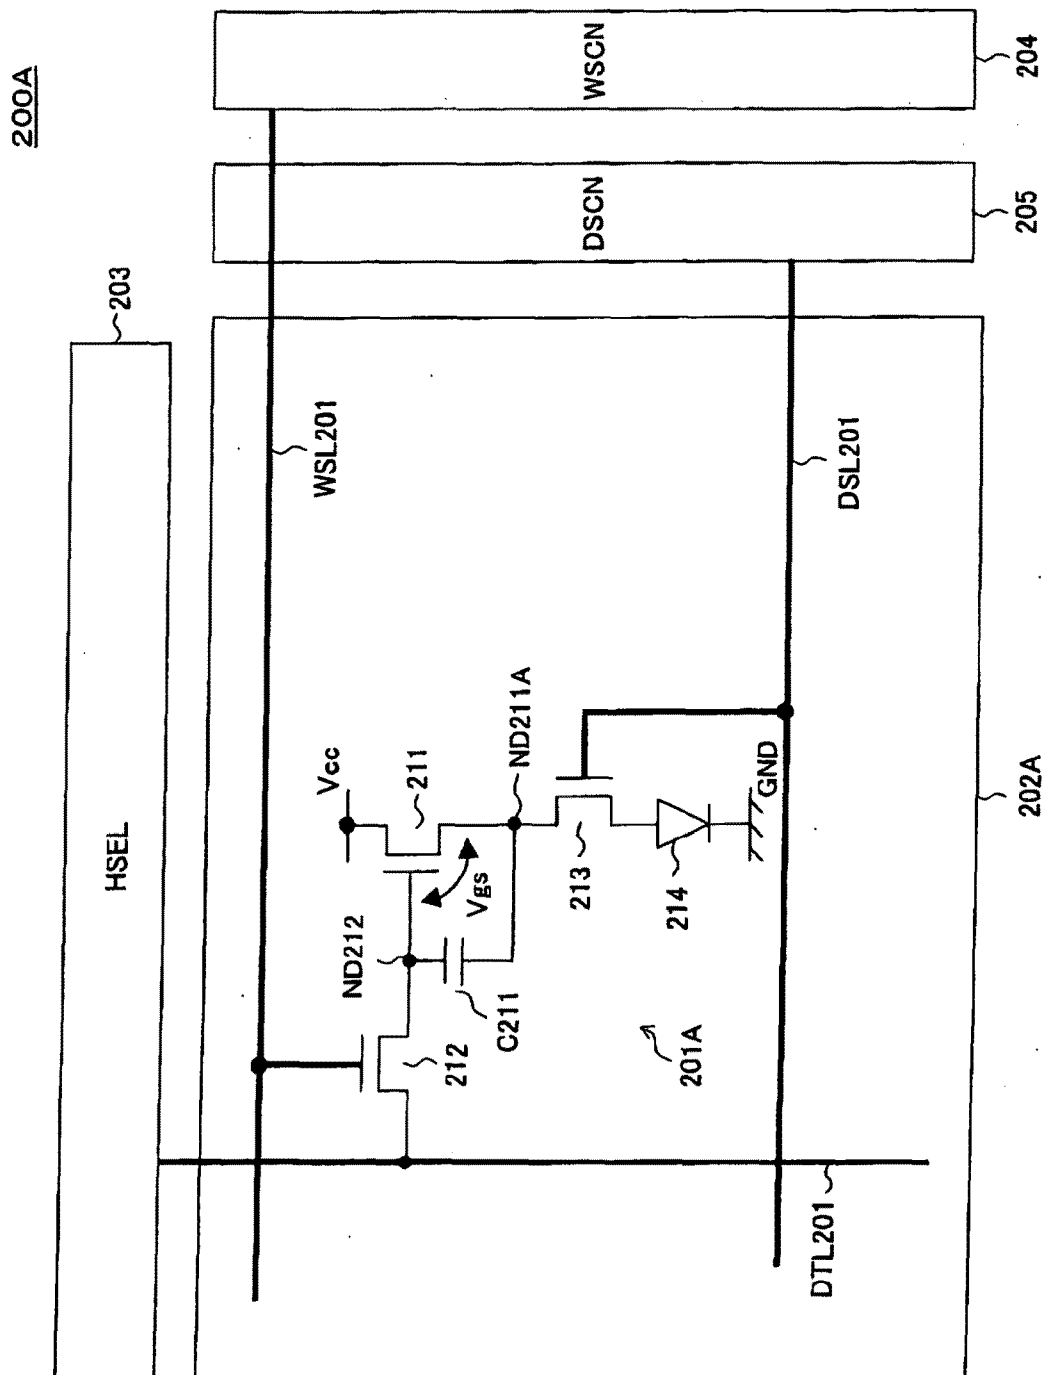


FIG. 19A

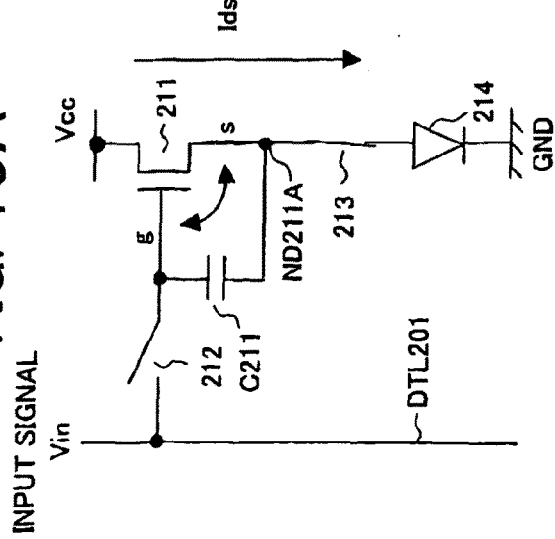


FIG. 19B

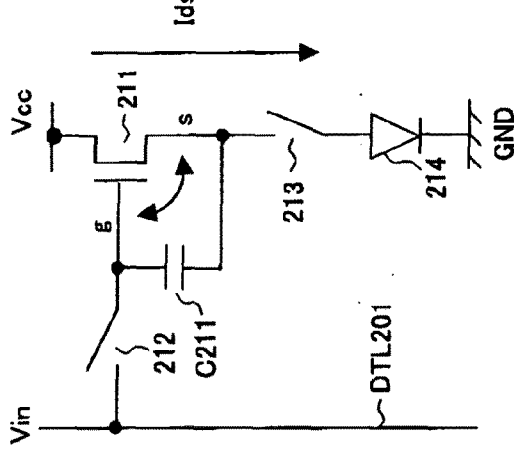


FIG. 19C

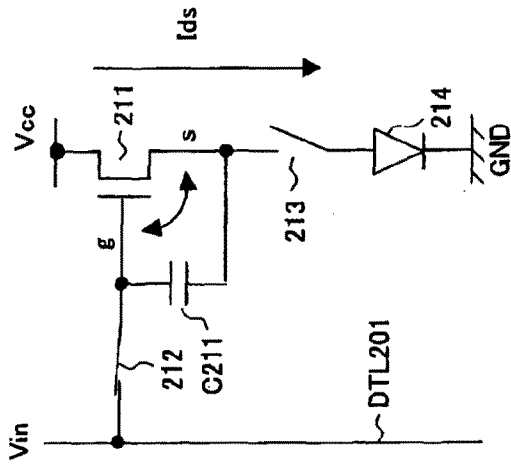


FIG. 19D

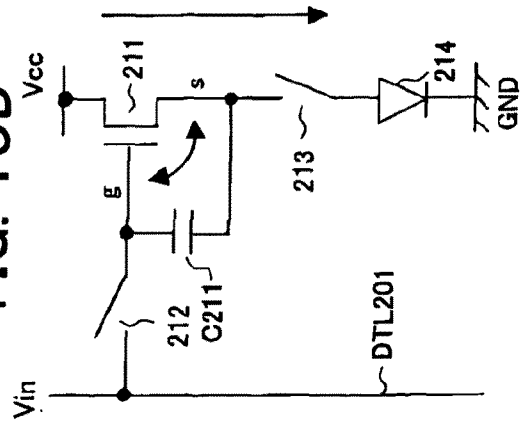
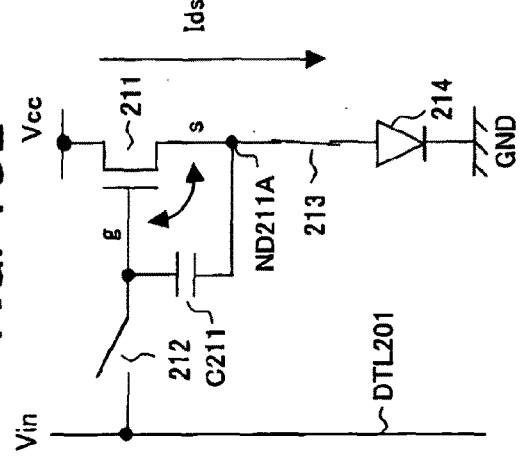


FIG. 19E



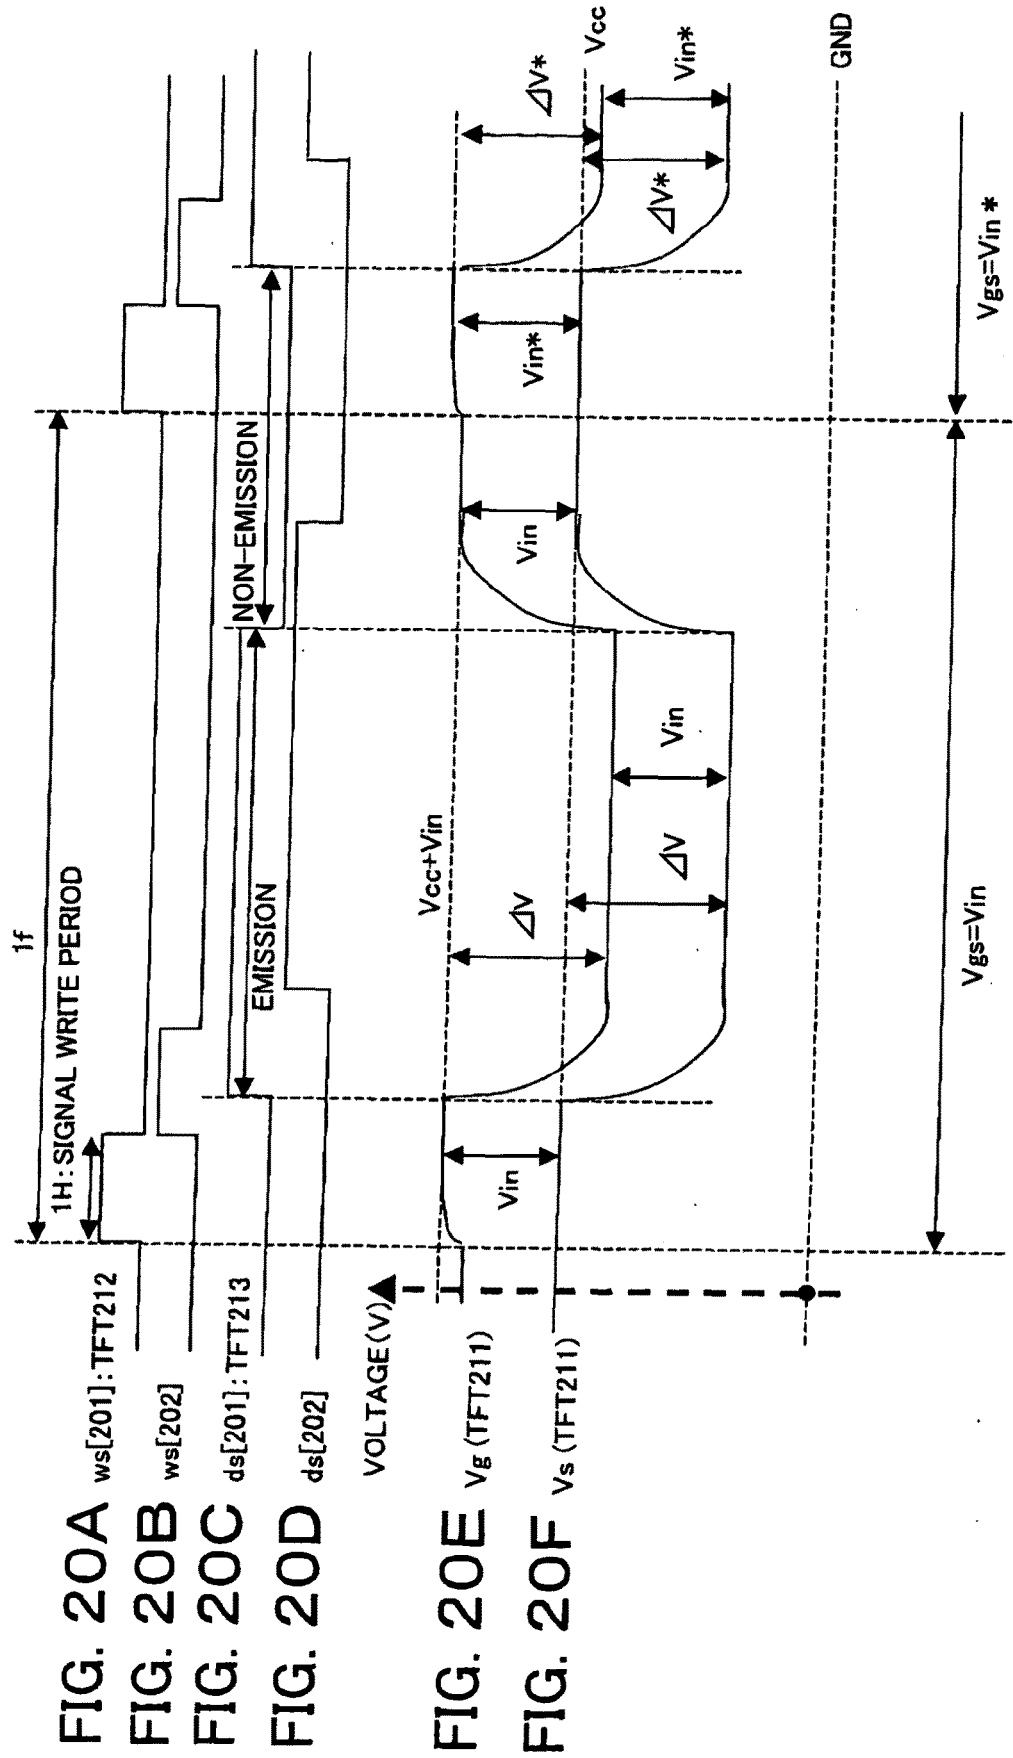


FIG. 21

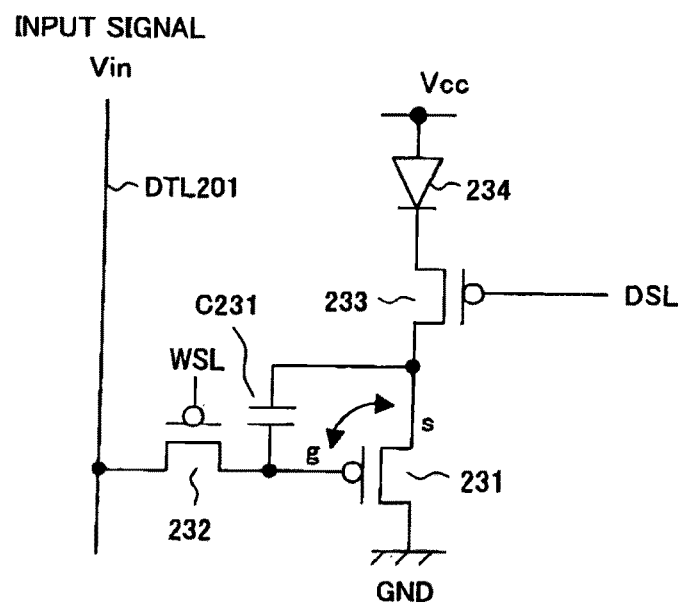


FIG. 22

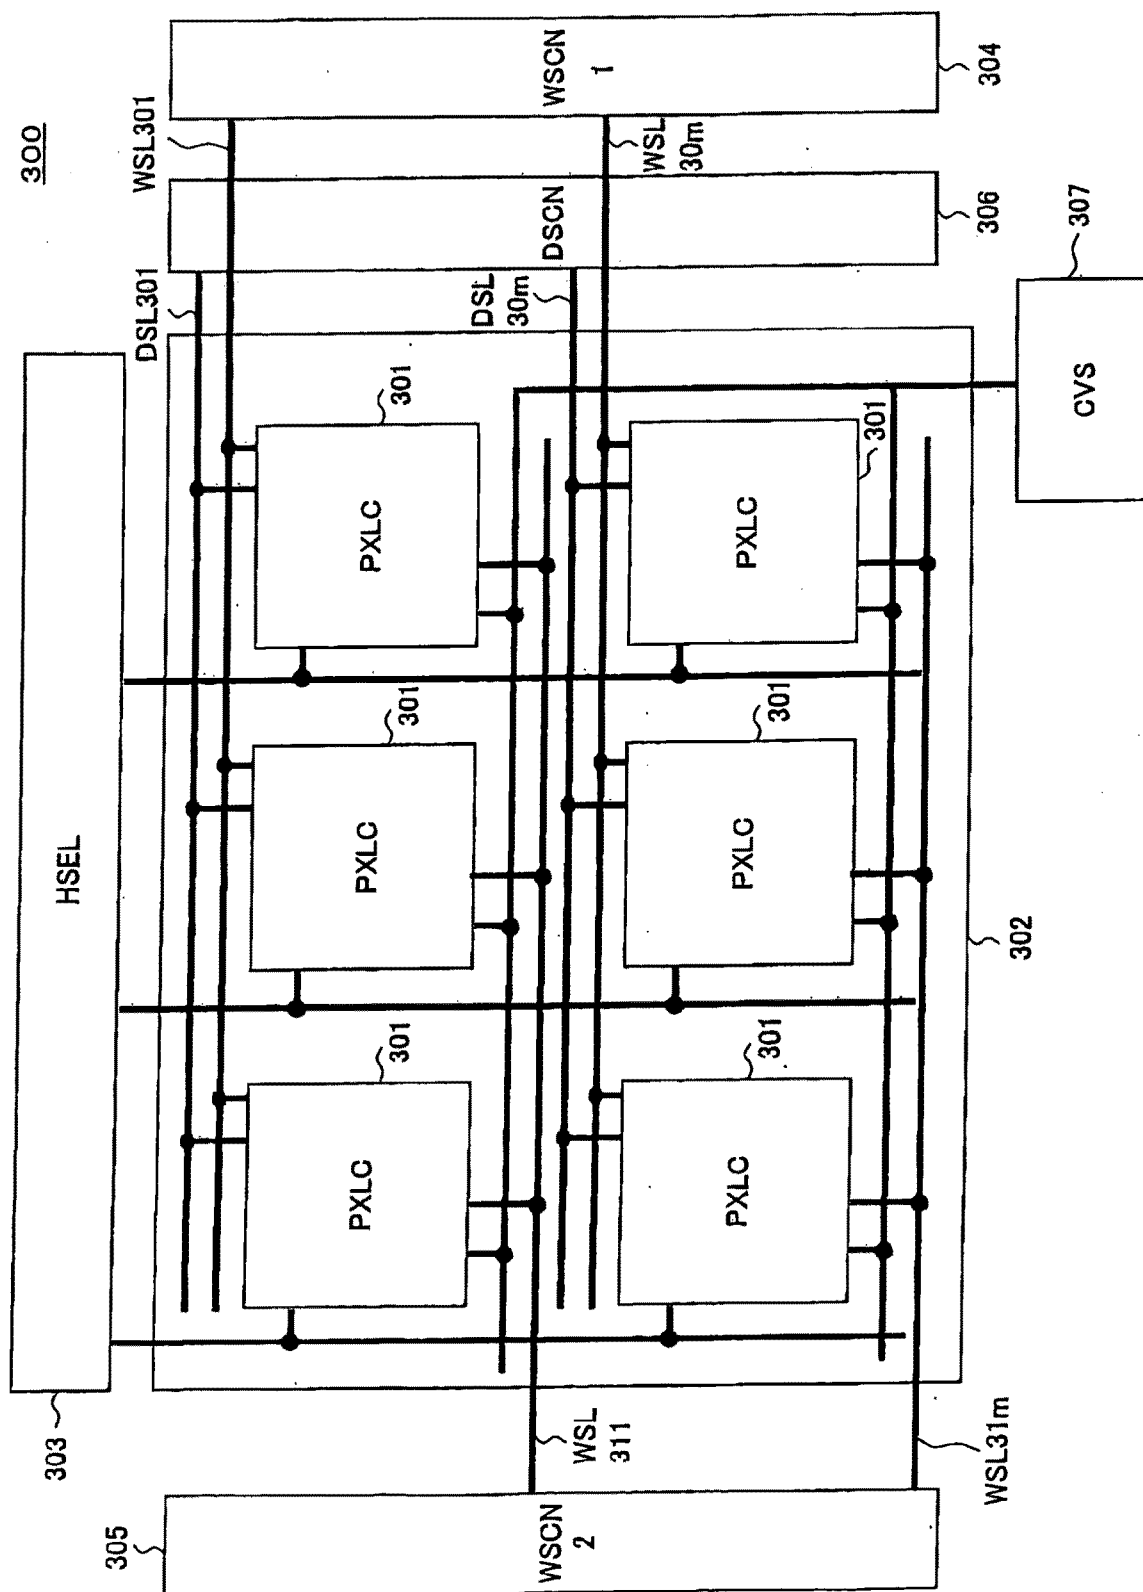


FIG. 23

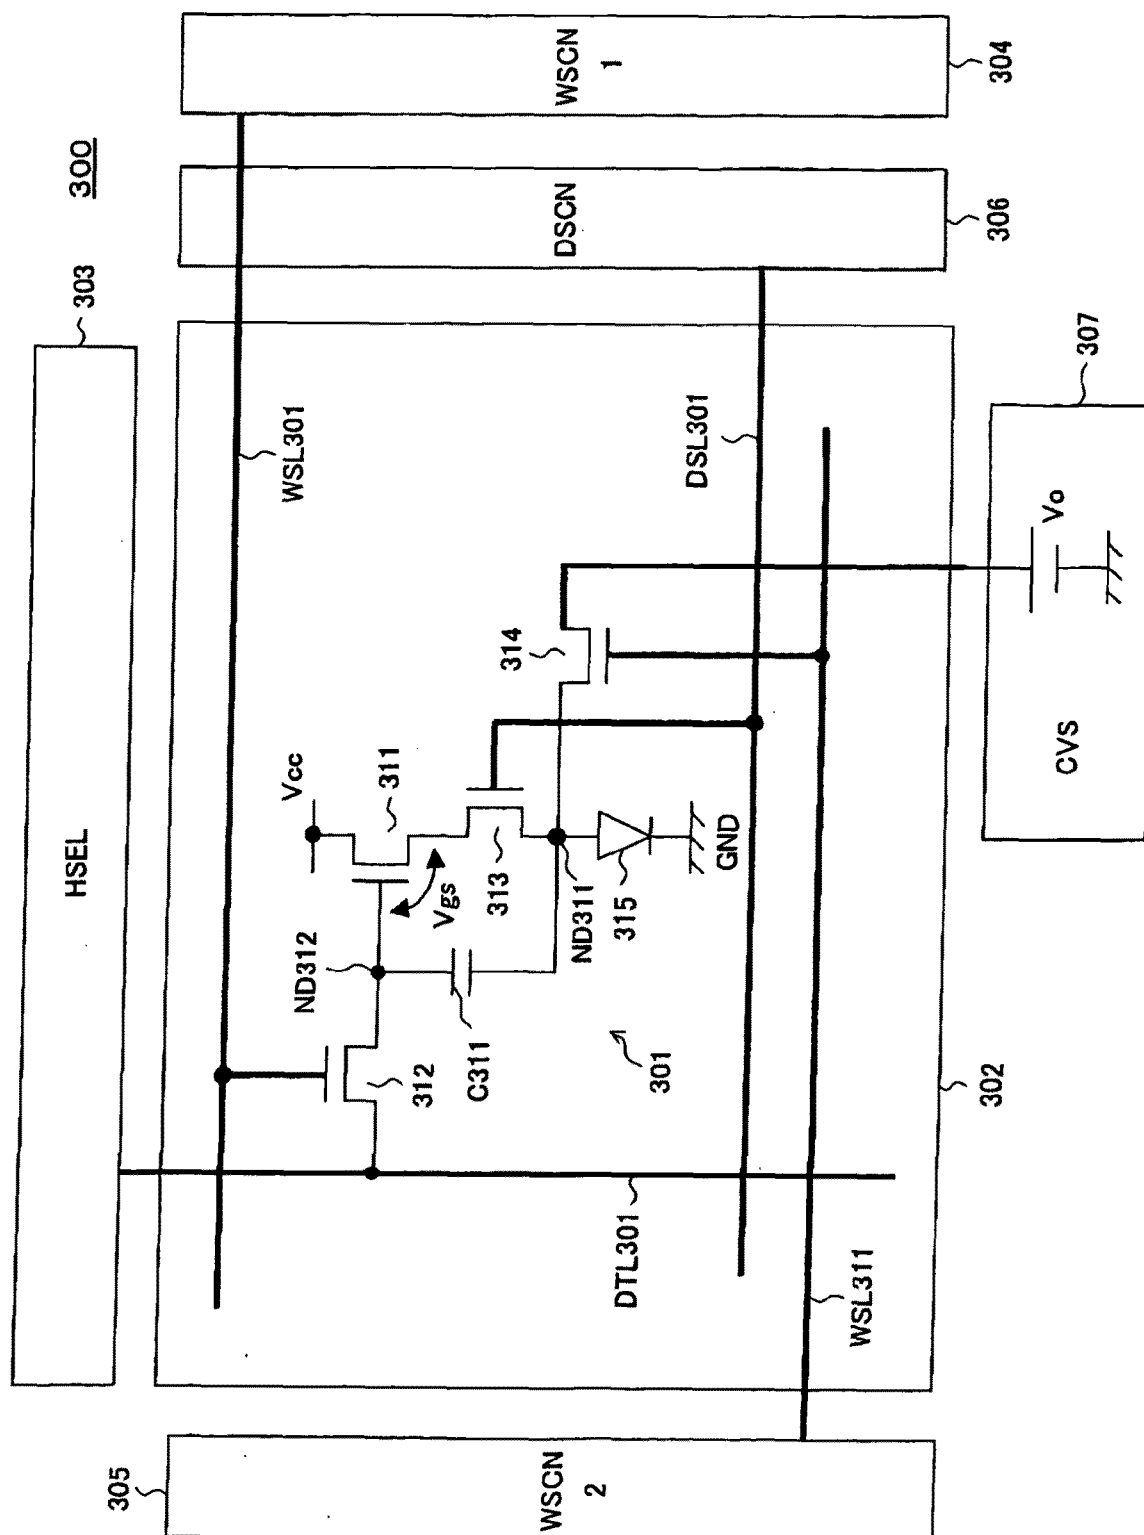


FIG. 24A

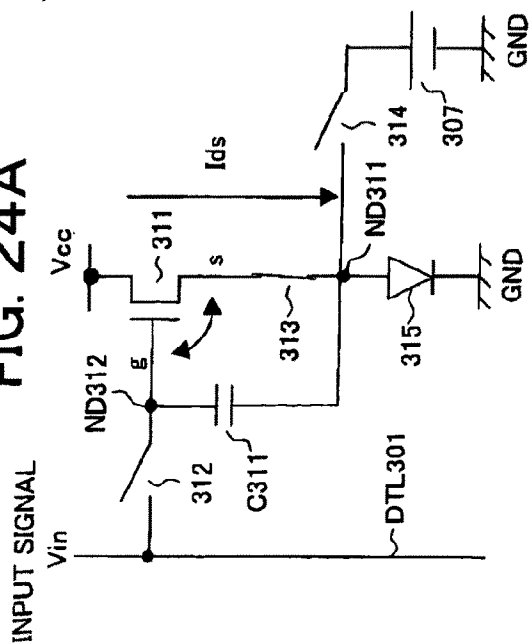


FIG. 24B

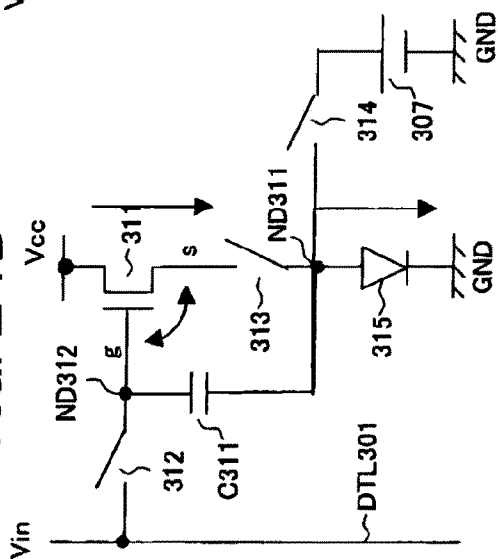


FIG. 24C

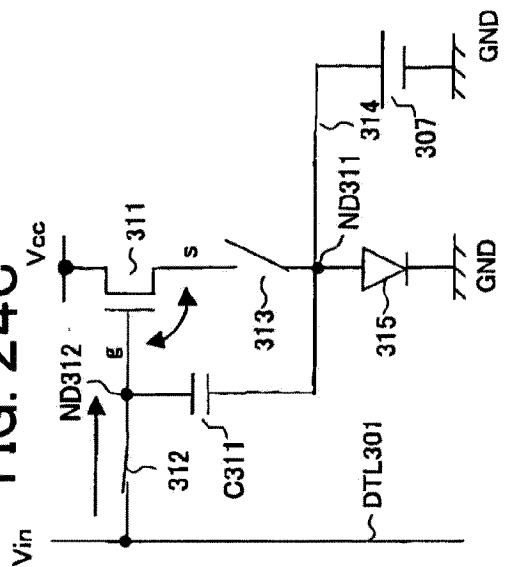


FIG. 24D

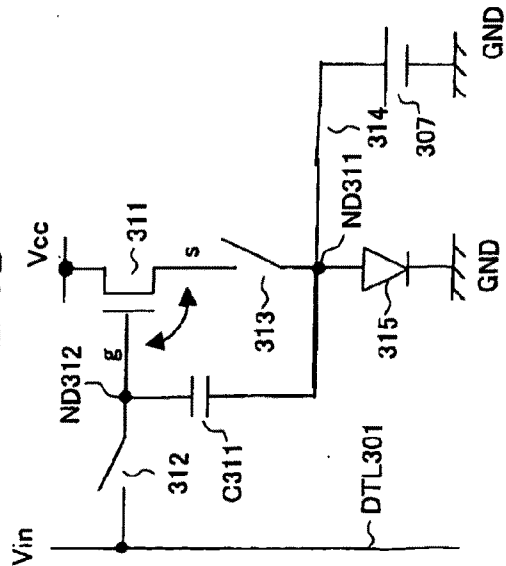
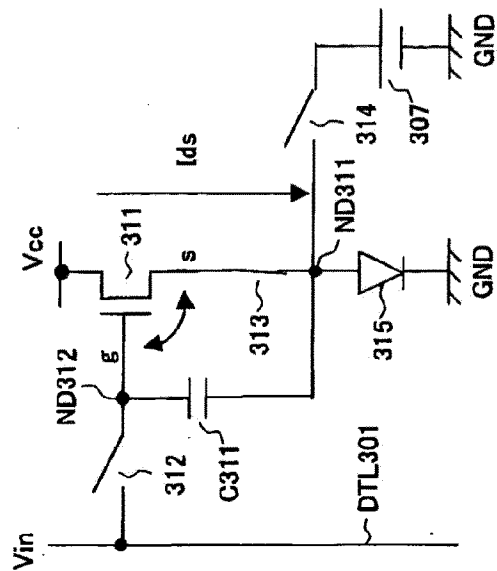


FIG. 24E



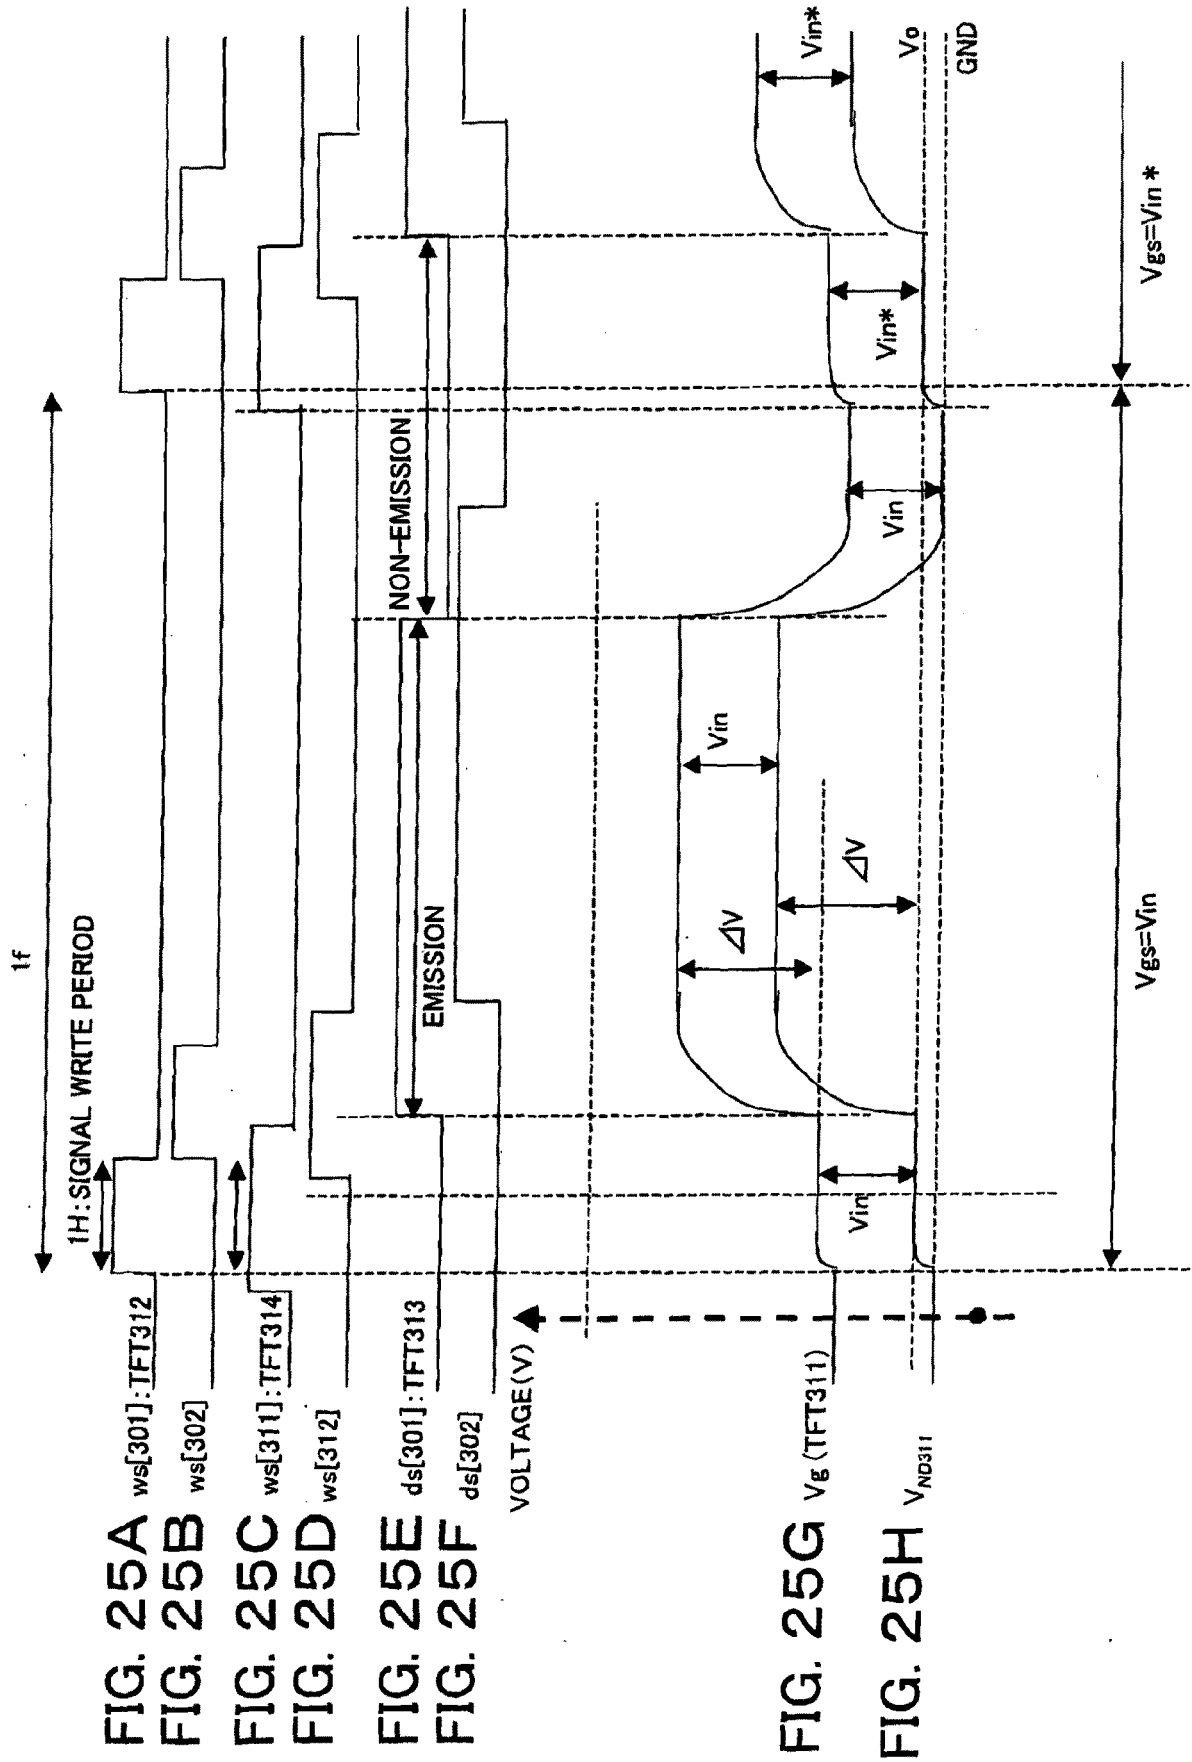


FIG. 26

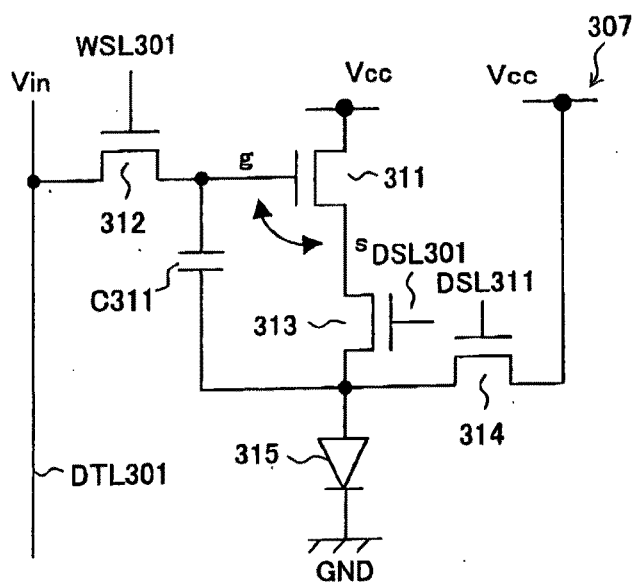


FIG. 27

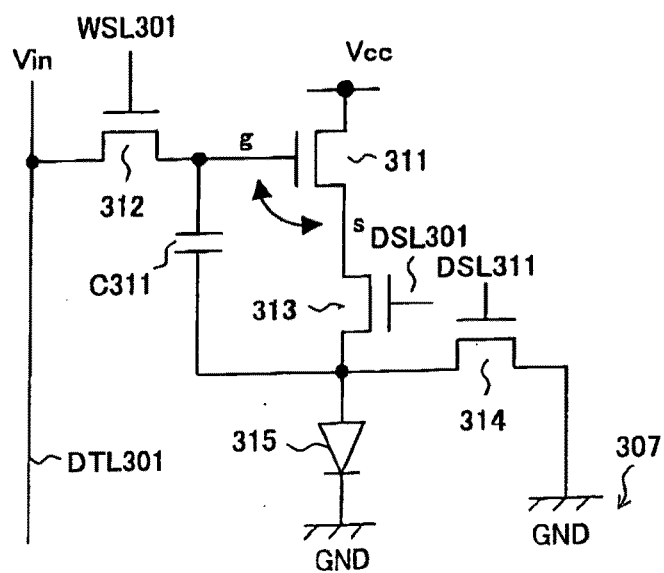


FIG. 28

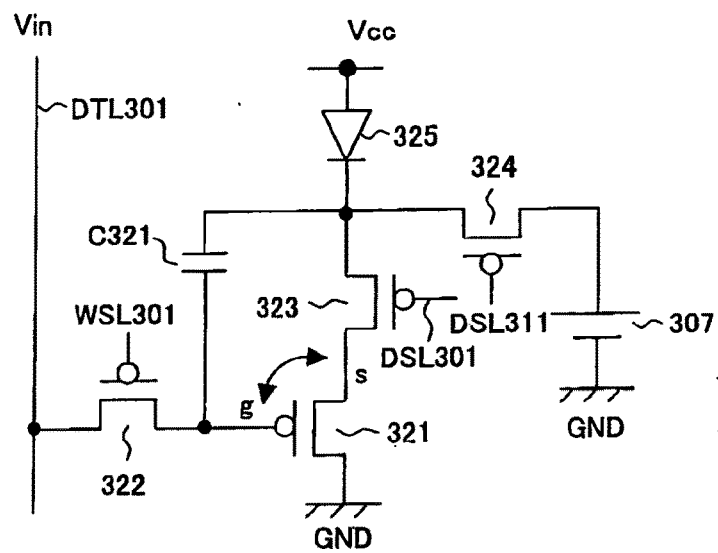


FIG. 29

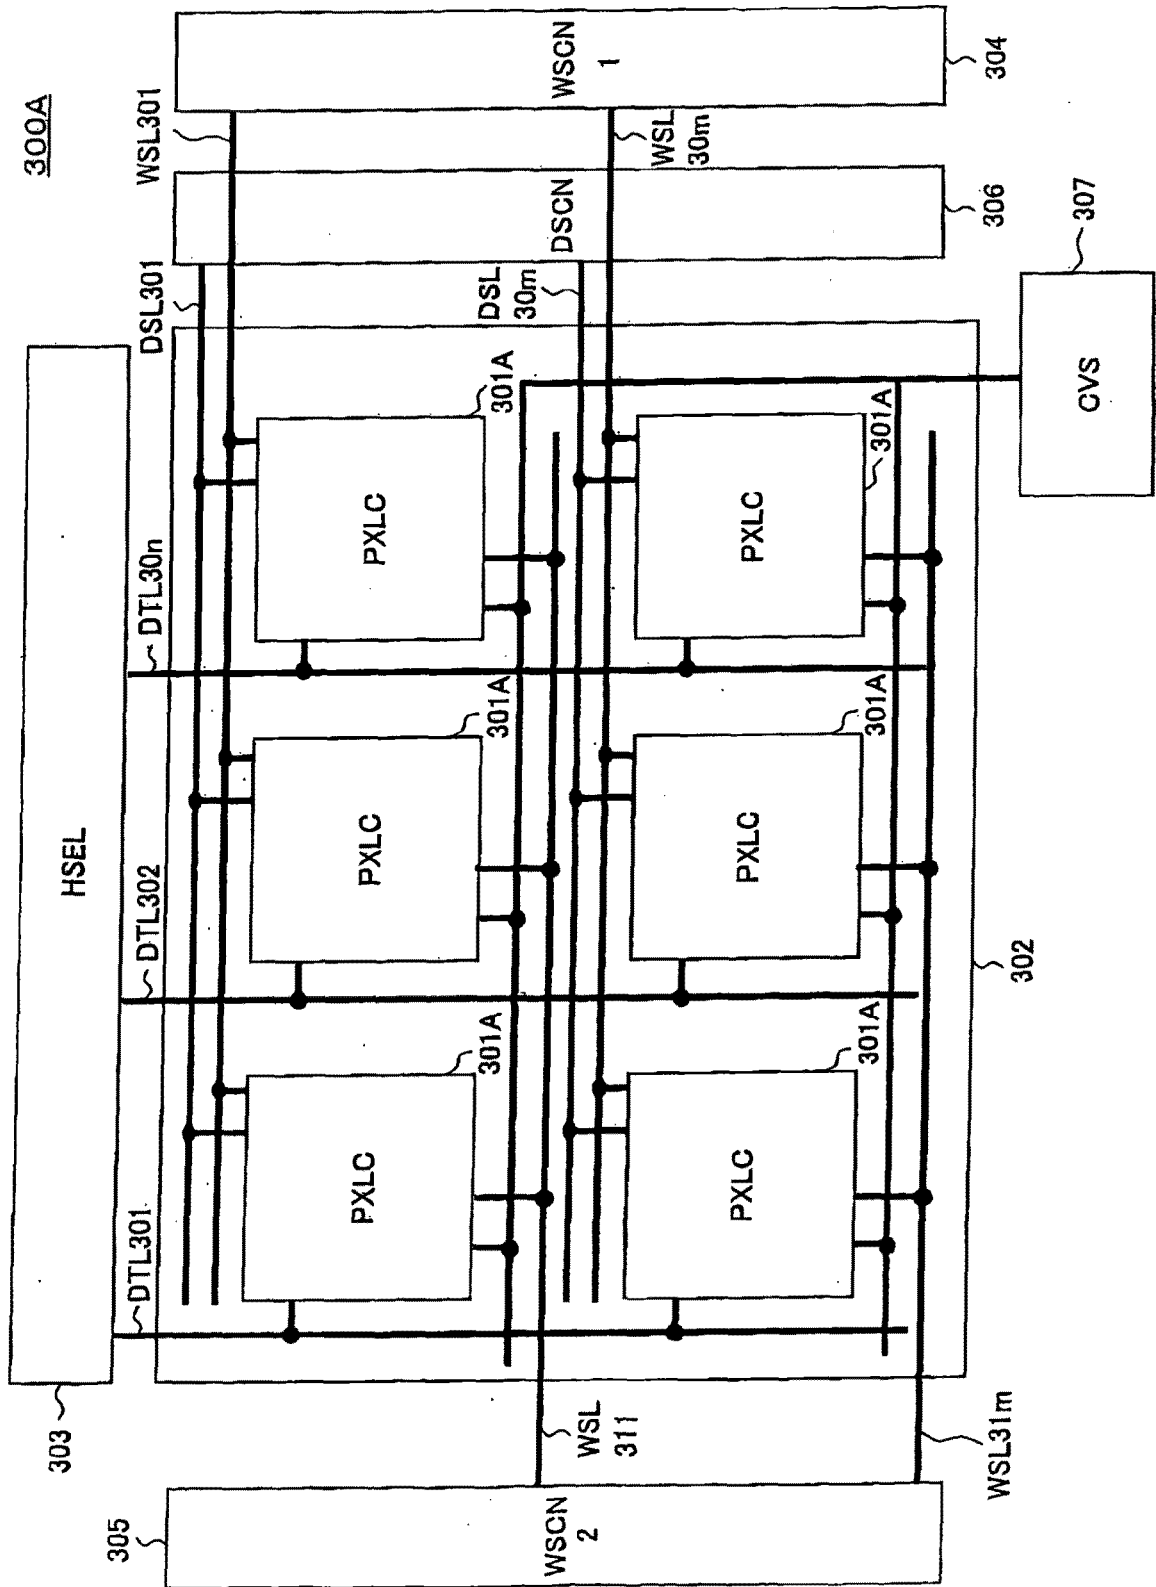


FIG. 30

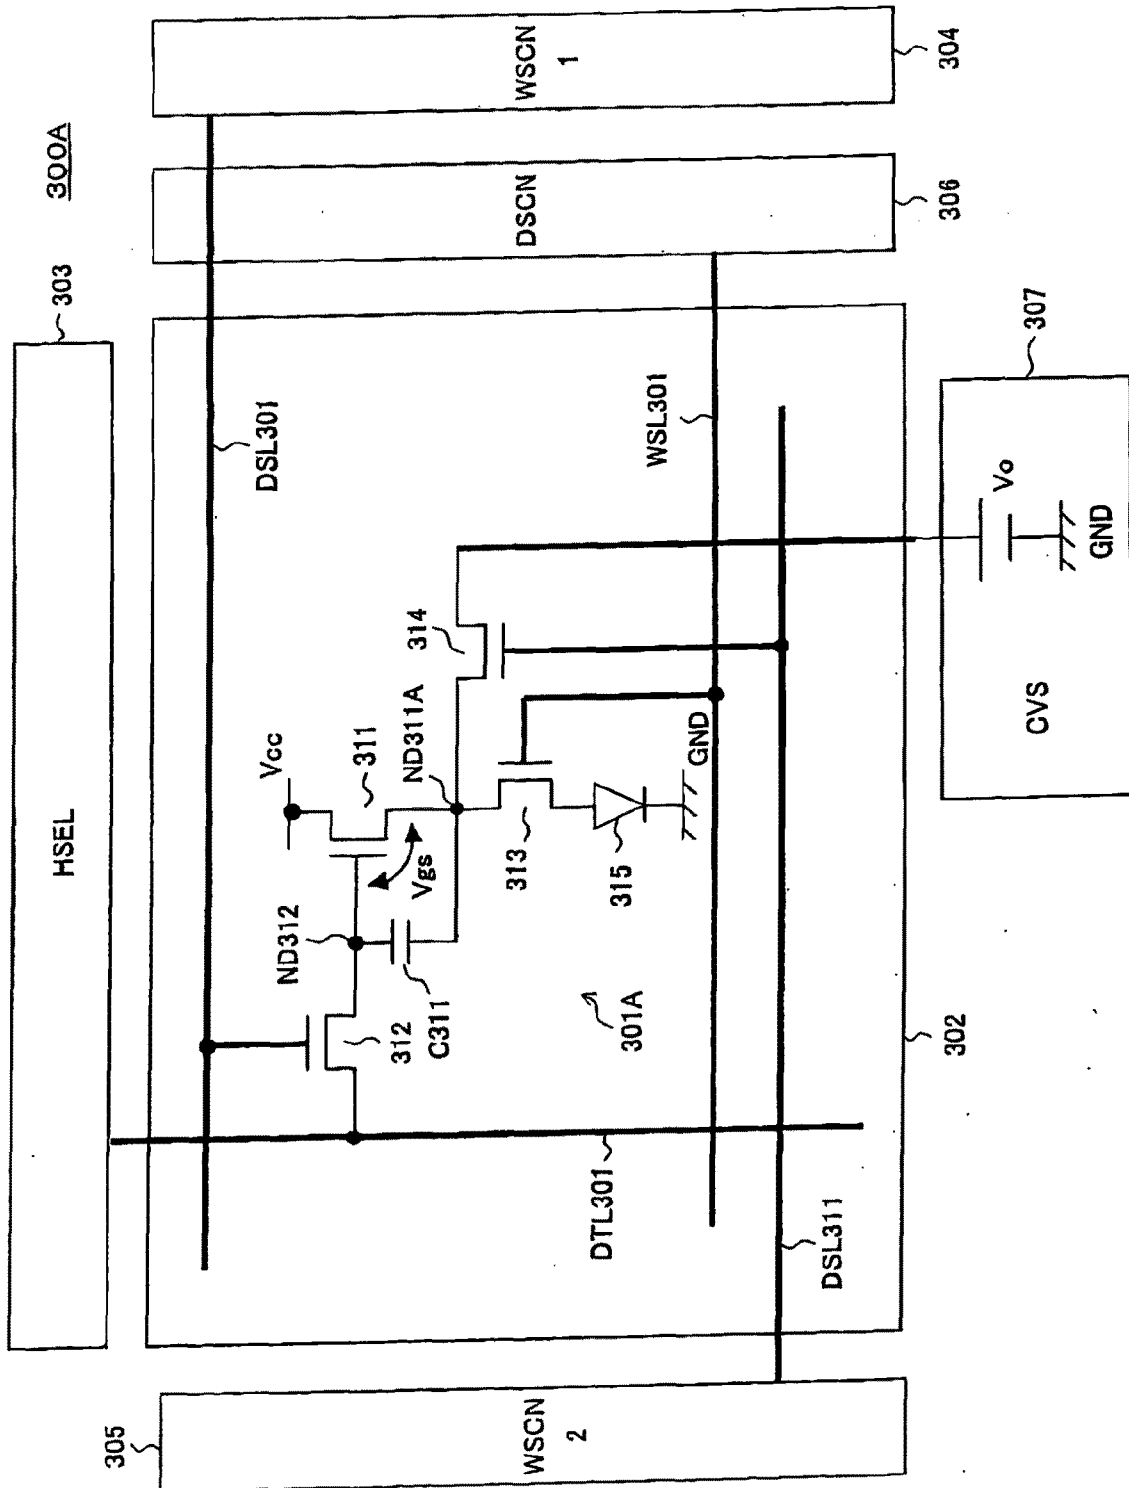


FIG. 31A

FIG. 31B

FIG. 31C

INPUT SIGNAL

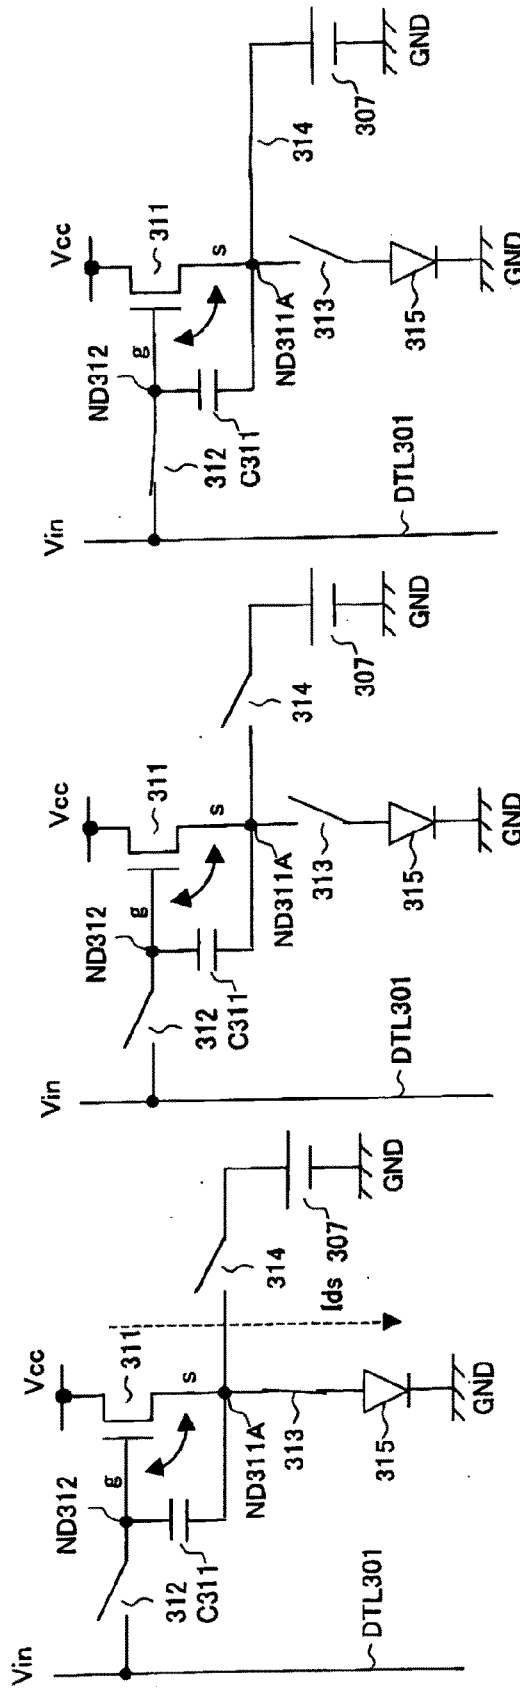
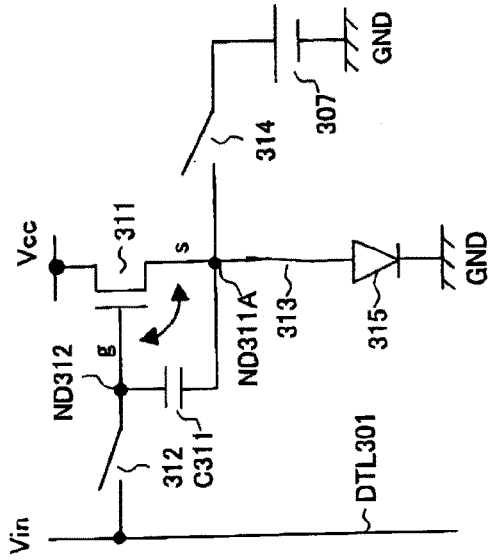
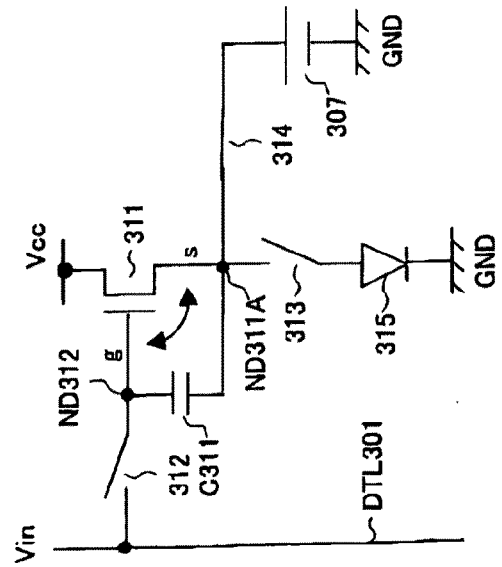


FIG. 31D

FIG. 31E



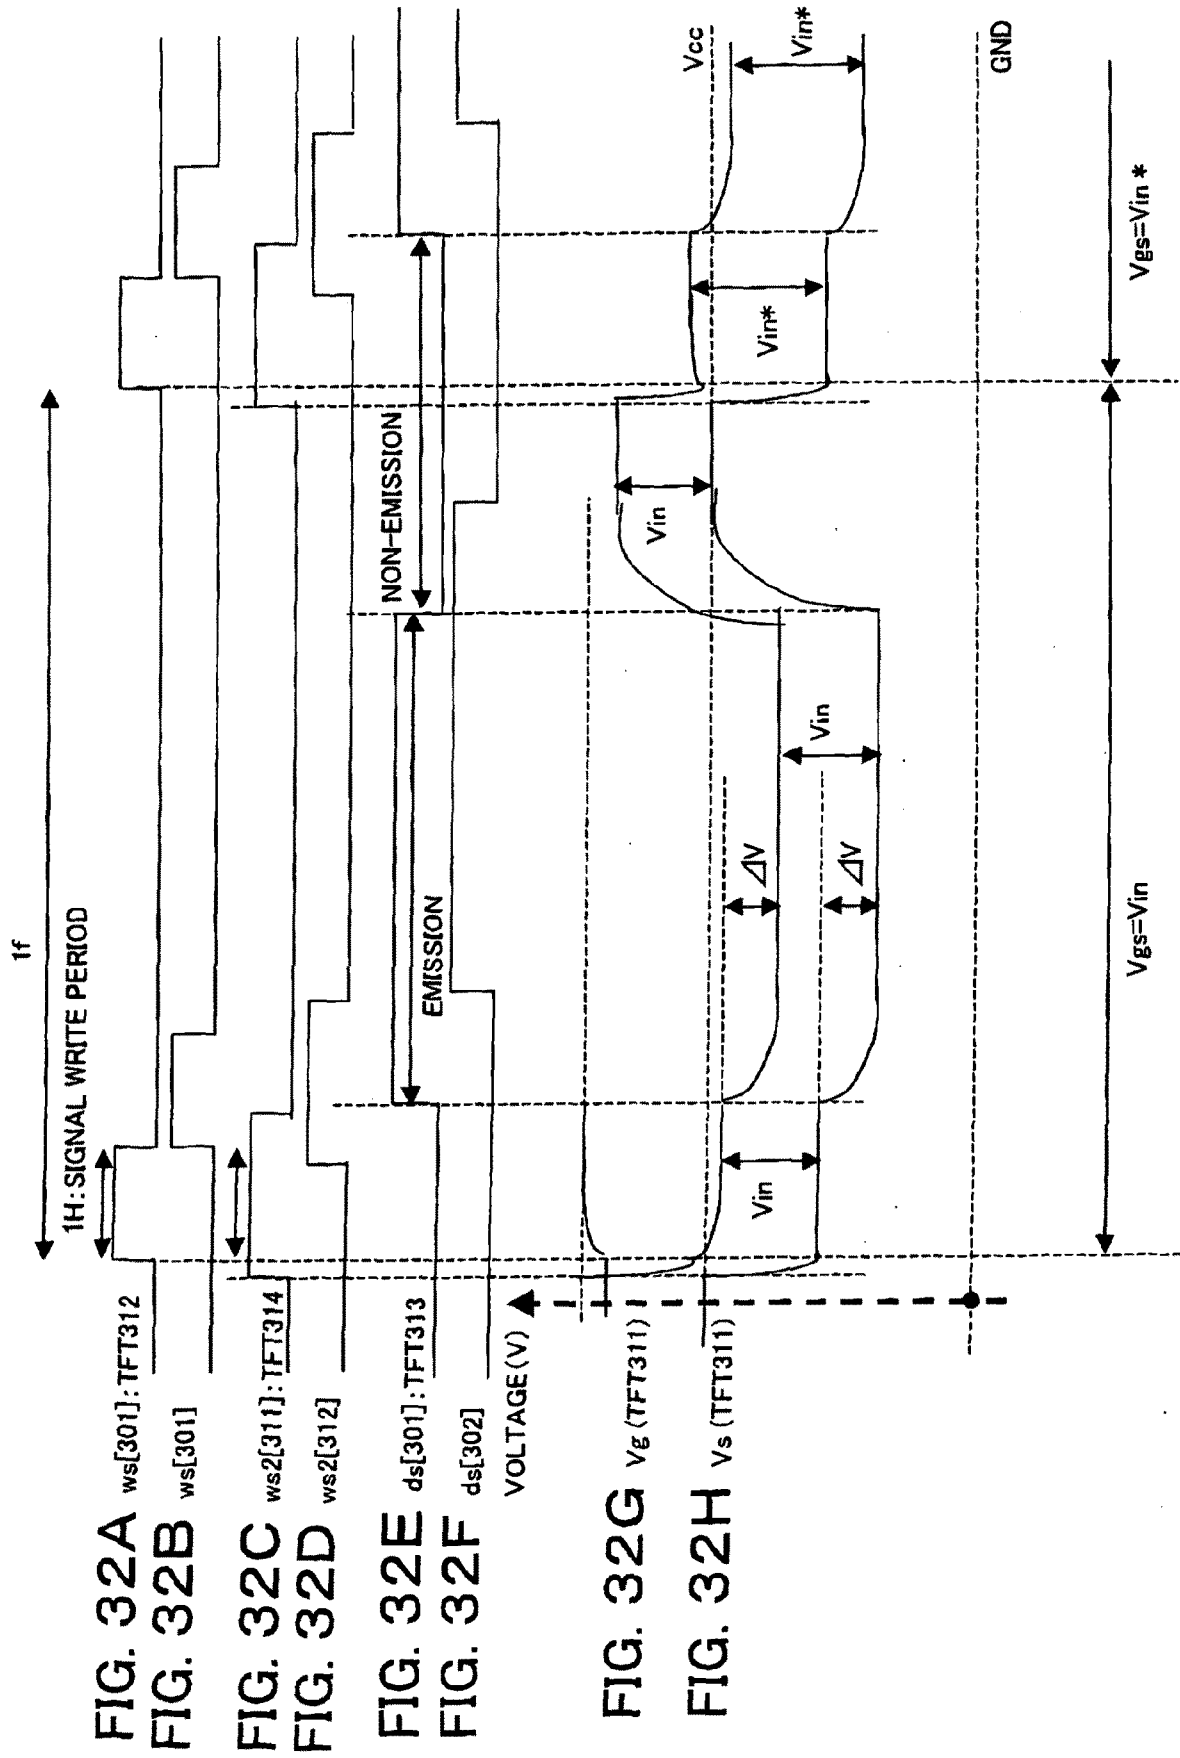


FIG. 33

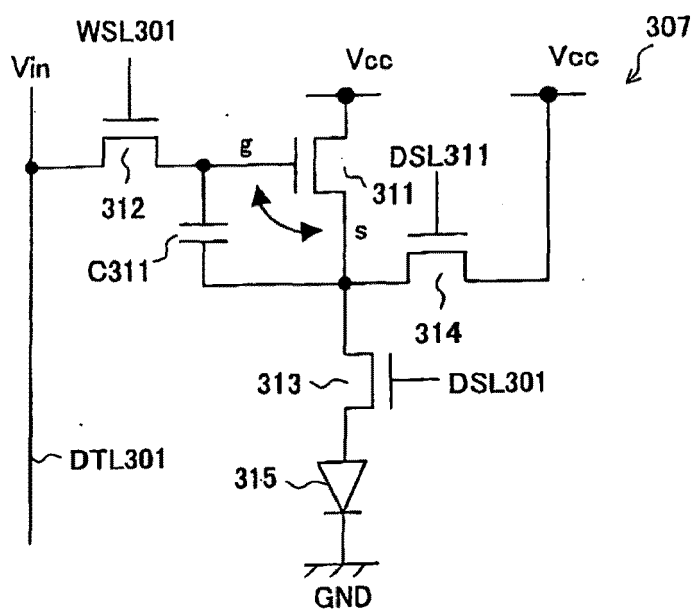


FIG. 34

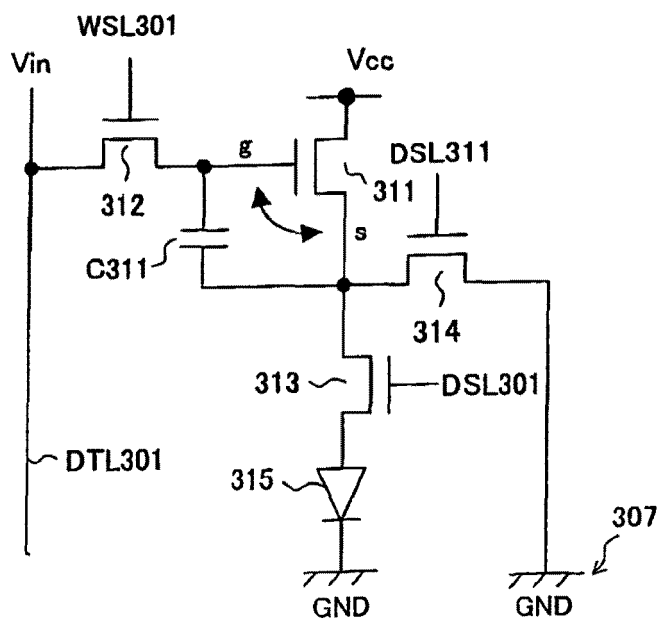


FIG. 35

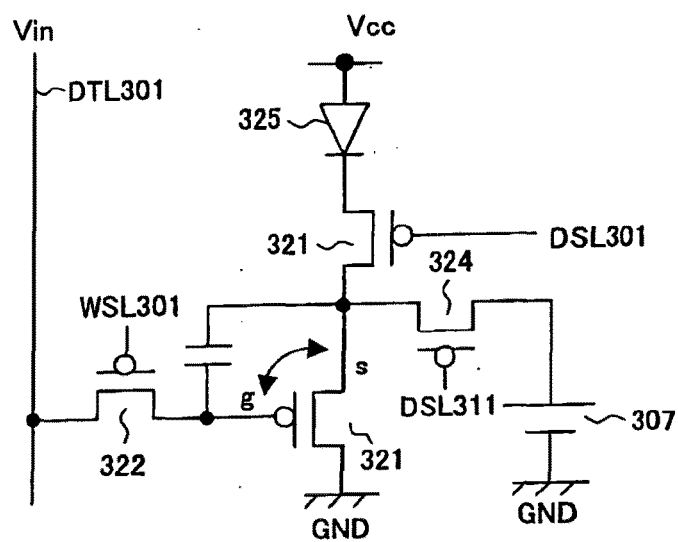


FIG. 36









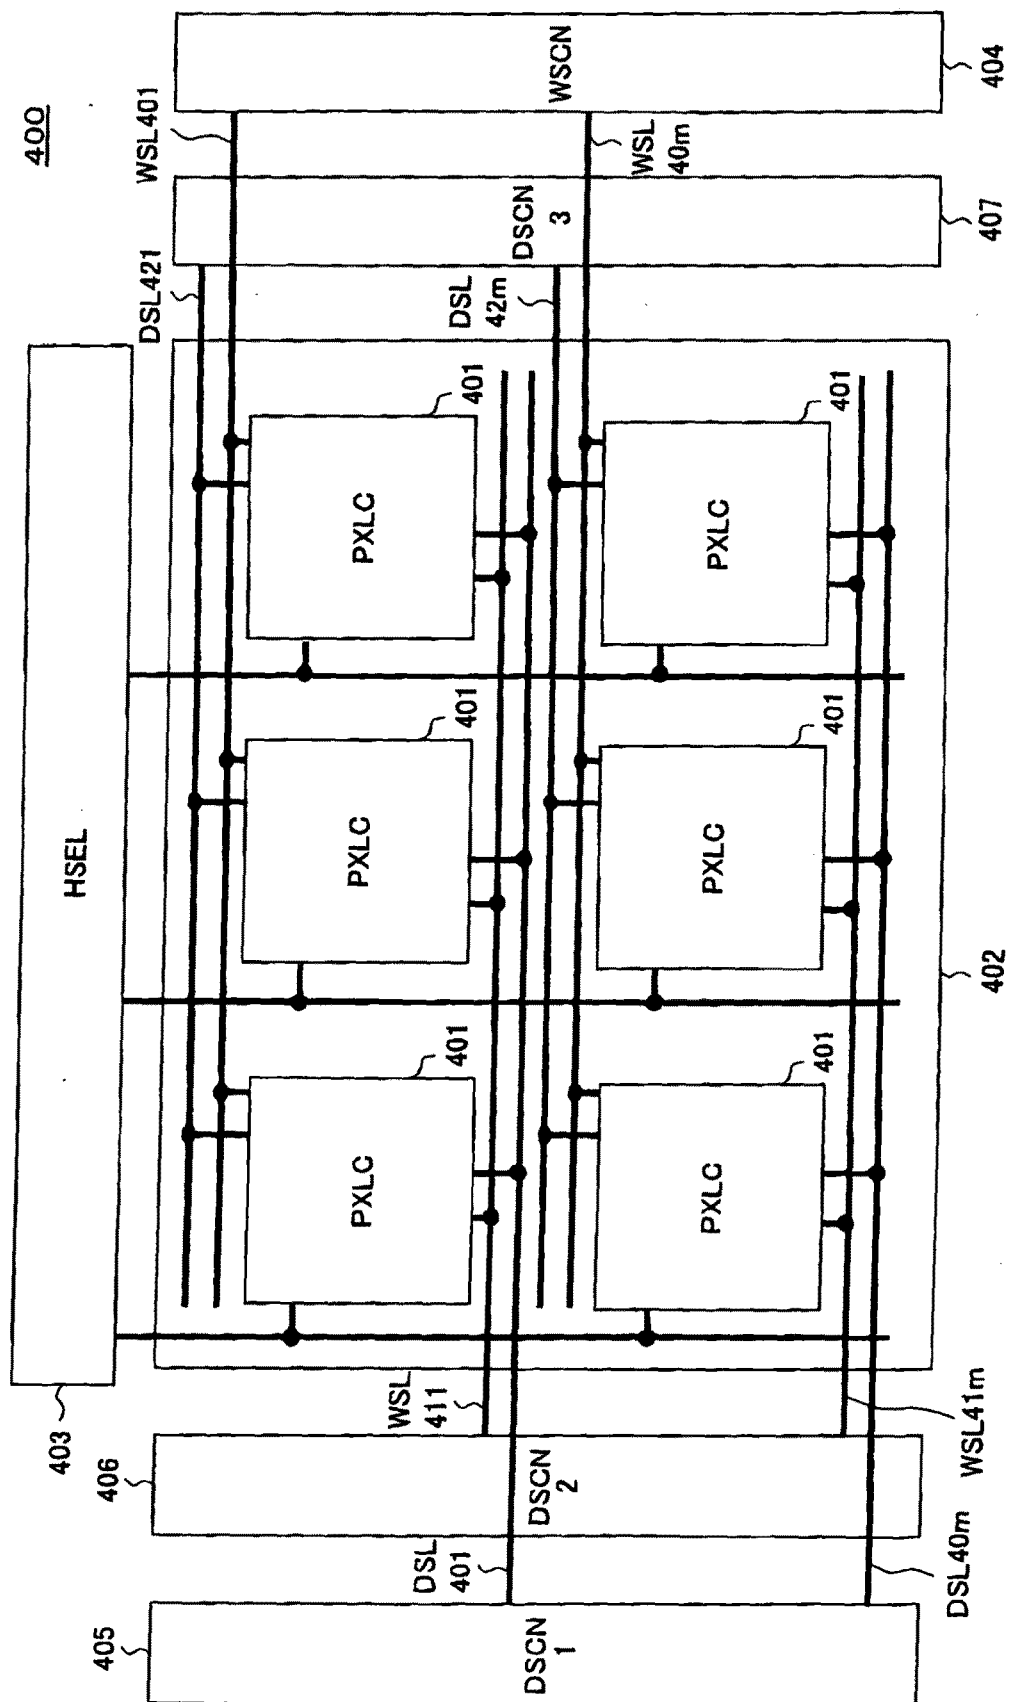


FIG. 37

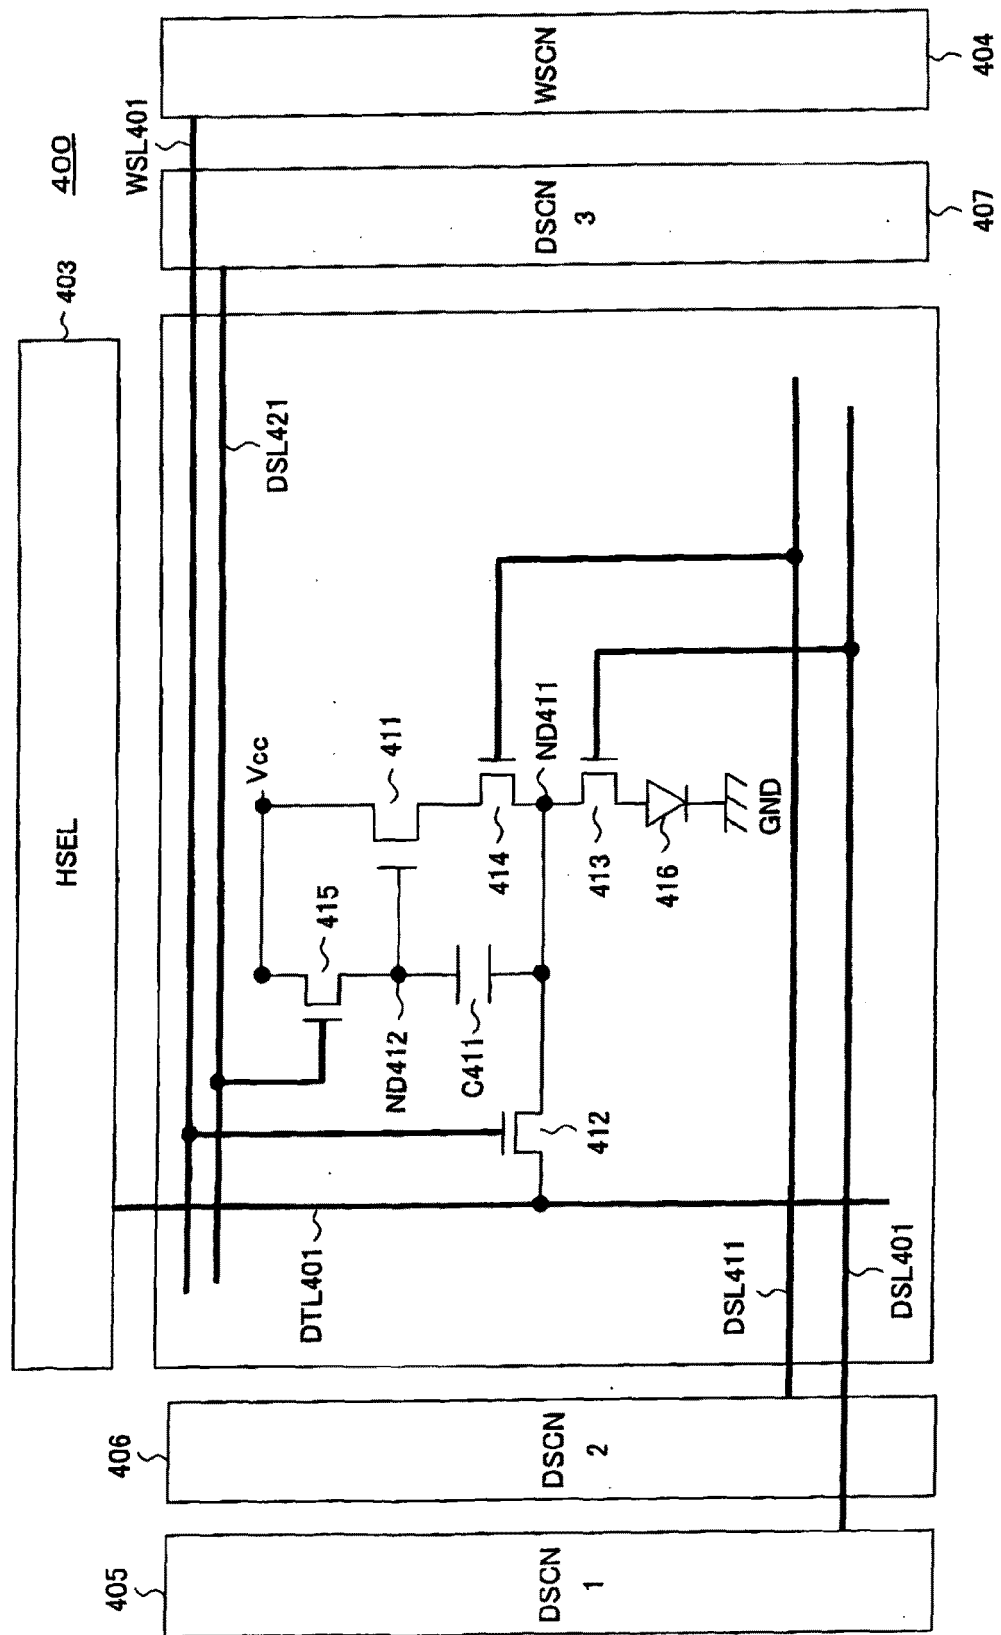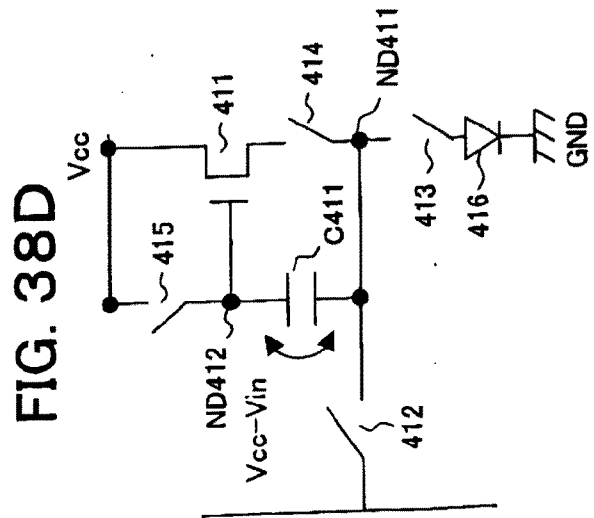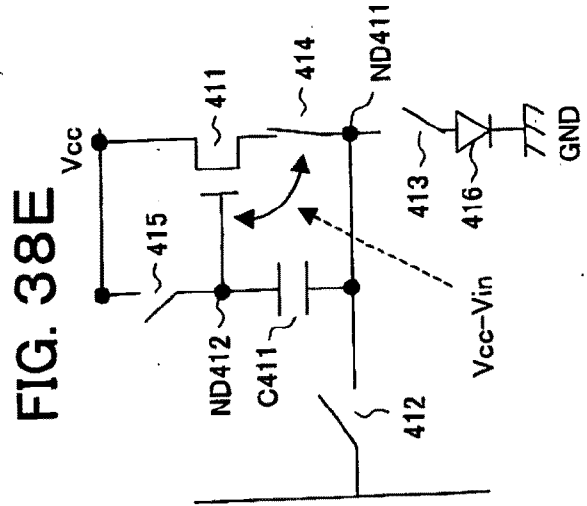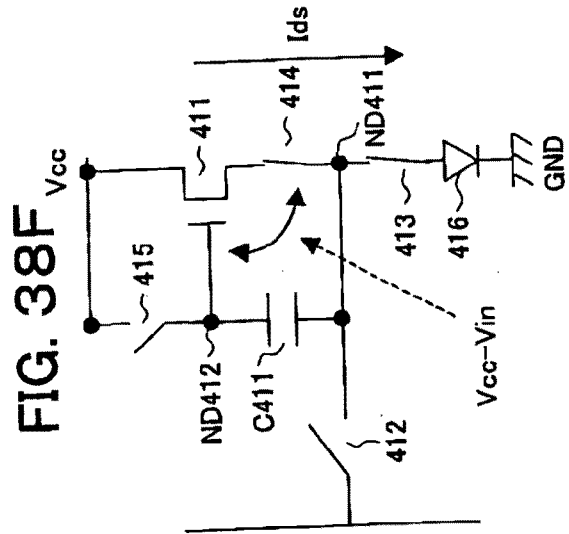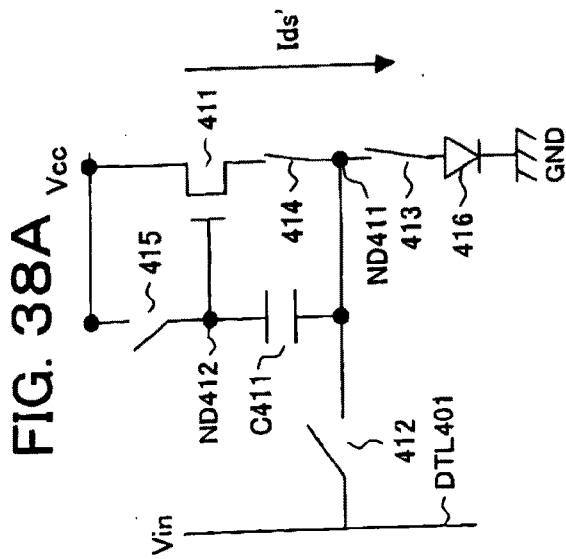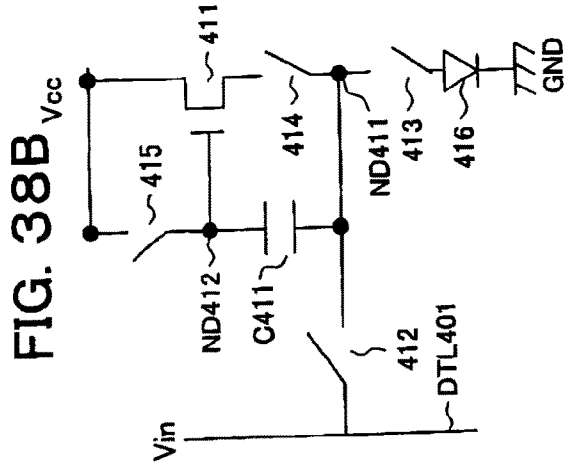

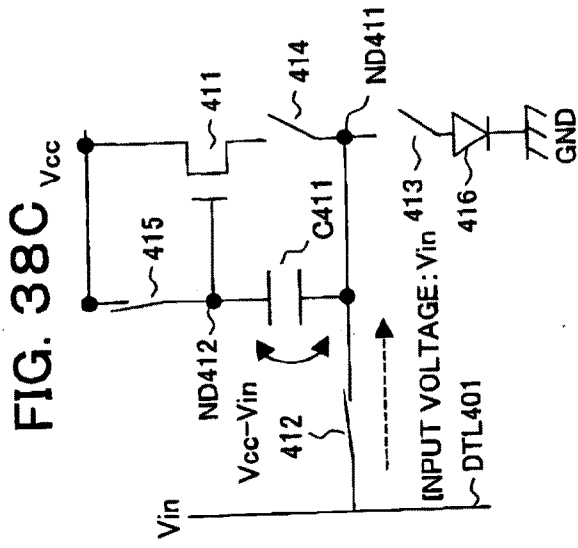

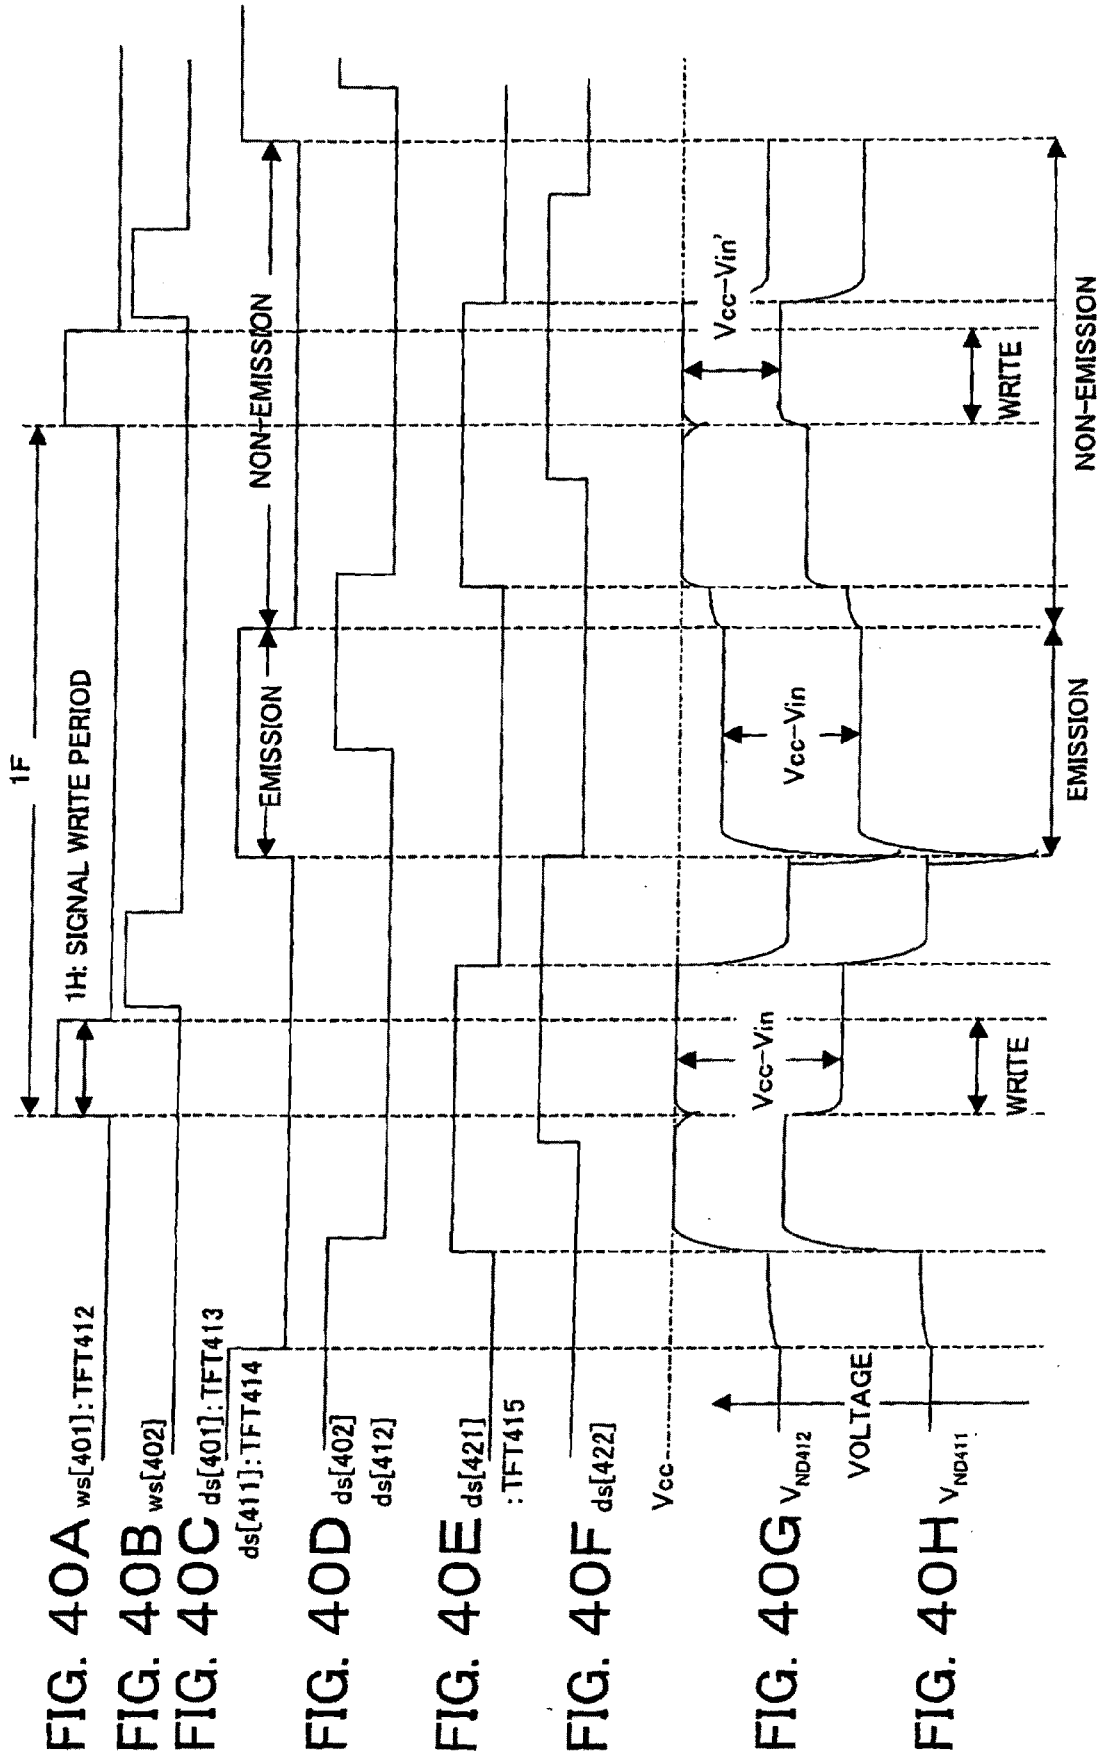

LIST OF REFERENCES

100... display device

101... pixel circuit (PXLC)

102... pixel array portion

103... horizontal selector (HSEL)

104... write scanner (WSCN)

105... drive scanner (DSCN)

DTL101 to DTL10n... data line

WSL101 to WSL10m... scanning line

DSL101 to DSL10m... drive line

111 to 113... TFT

114... light emitting element

ND111, ND112... node

200, 200A... display device

201, 201A... pixel circuit (PXLC)

202, 202A... pixel array portion

203... horizontal selector (HSEL)

204... write scanner (WSCN)

205... drive scanner (DSCN)

DTL201 to DTL210n... data line

WSL201 to WSL20m... scanning line

DSL201 to DSL20m... drive line

211 to 213... TFT

214... light emitting element

ND211, ND211A, ND212... node

300, 300A... display device
301, 301A... pixel circuit (PXLC)
302, 302A... pixel array portion
303... horizontal selector (HSEL)
304, 305... write scanner (WSCN)
306... drive scanner (DSCN)
DTL301 to DTL30n... data line
WSL301 to WSL30m, WSL311 to WSL31m... scanning line
DSL301 to DSL30m... drive line
311 to 314... TFT
ND311, ND311A, ND312... node
400... display device, 401... pixel circuit (PXLC)
402... pixel array portion
403... horizontal selector (HSEL)
404... write scanner (WSCN)
405 to 407... drive scanner (DSCN)
DTL401 to DTL40n... data line
WSL401 to WSL40m, DSL401 to DSL40m, DSL411 to DSL41m,
DSL421 to DSL42m... drive line
411 to 415... TFT
416... light emitting element



EUROPEAN SEARCH REPORT

 Application Number
 EP 18 18 3422

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2003/090481 A1 (KIMURA HAJIME [JP]) 15 May 2003 (2003-05-15) * paragraphs [0012], [0204] - [0208], [0216], [0254], [0266], [0336]; figures 1A, 3A-3C, 16A, 21A-21C *	1-15	INV. G09G3/30 G09G3/20 G09G3/3233 H05B33/08
X	----- CN 1 417 767 A (SANYO ELECTRIC CO [JP]) 14 May 2003 (2003-05-14) * figures 1, 10 * & US 2003/103022 A1 (MATSUMOTO S; NOGUCHI Y; SANO K; TSUCHIYA H) 5 June 2003 (2003-06-05) * paragraphs [0063] - [0071]; figures 1, 10 *	1-10, 12	
X	----- US 2003/016190 A1 (KONDO SHIGEKI [JP]) 23 January 2003 (2003-01-23) * paragraphs [0077] - [0081]; figures 3, 4 *	1-8, 10, 11, 13, 14	
	-----		TECHNICAL FIELDS SEARCHED (IPC)
			G09G
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 10 January 2019	Examiner Ladiray, Olivier
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 1
 EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 18 3422

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-01-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003090481 A1	15-05-2003	CN 1419228 A	21-05-2003
		CN 101042840 A	26-09-2007
		CN 101127188 A	20-02-2008
		EP 1310937 A1	14-05-2003
		EP 2302614 A2	30-03-2011
		EP 2309479 A2	13-04-2011
		JP 5171721 B2	27-03-2013
		JP 5448275 B2	19-03-2014
		JP 5648088 B2	07-01-2015
		JP 5973025 B2	17-08-2016
		JP 6077582 B2	08-02-2017
		JP 6126678 B2	10-05-2017
		JP 6126711 B2	10-05-2017
		JP 6247716 B2	13-12-2017
		JP 6315718 B2	25-04-2018
		JP 2009163268 A	23-07-2009
		JP 2012123405 A	28-06-2012
		JP 2013167880 A	29-08-2013
		JP 2013178528 A	09-09-2013
		JP 2013238861 A	28-11-2013
		JP 2014160270 A	04-09-2014
		JP 2015165305 A	17-09-2015
		JP 2015172754 A	01-10-2015
		JP 2016122193 A	07-07-2016
		JP 2016128916 A	14-07-2016
		JP 2016173580 A	29-09-2016
		JP 2016191930 A	10-11-2016
		JP 2016224452 A	28-12-2016
		JP 2018116284 A	26-07-2018
		KR 20030040056 A	22-05-2003
		KR 20070110242 A	16-11-2007
		KR 20070116763 A	11-12-2007
		TW 200303498 A	01-09-2003
		TW 200818100 A	16-04-2008
		TW 201023145 A	16-06-2010
		TW 201222515 A	01-06-2012
		TW 201337883 A	16-09-2013
		TW 201523560 A	16-06-2015
		TW 201727610 A	01-08-2017
		TW 201818553 A	16-05-2018
		US 2003090481 A1	15-05-2003
		US 2007210720 A1	13-09-2007
		US 2012327059 A1	27-12-2012
		US 2013228783 A1	05-09-2013
		US 2018138215 A1	17-05-2018

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 18 3422

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-01-2019

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 1417767 A	14-05-2003	CN 1417767 A	14-05-2003
		KR 20030038522 A	16-05-2003
		US 2003103022 A1	05-06-2003

US 2003016190 A1	23-01-2003	JP W02002075709 A1	08-07-2004
		US 2003016190 A1	23-01-2003
		WO 02075709 A1	26-09-2002

15

20

25

30

35

40

45

50

EPO FORM P0459

55

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5684365 A [0009]
- JP NO8234683 B [0009]

专利名称(译)	像素电路，显示装置和驱动像素电路的方法		
公开(公告)号	EP3444799A1	公开(公告)日	2019-02-20
申请号	EP2018183422	申请日	2004-05-21
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	索尼公司		
[标]发明人	UCHINO KATSUhide YAMASHITA JUNICHI YAMAMOTO TETSURO		
发明人	UCHINO, KATSUhide YAMASHITA, JUNICHI YAMAMOTO, TETSURO		
IPC分类号	G09G3/30 G09G3/20 G09G3/3233 H05B33/08 H01L51/50 H01L21/8234 H01L27/06 H01L27/088 H01L29/786 H03K17/687 H05B33/14		
CPC分类号	G09G3/3233 G09G2300/043 G09G2300/0809 G09G2300/0819 G09G2300/0842 G09G2300/0861 G09G2310/0256 G09G2320/0233 G09G2320/043 G09G3/30 G09G3/3258 G09G3/3426 G09G3/36 G09G3/3648 G09G2320/045 H05B45/60		
代理机构(译)	WITTE , WELLER & PARTNER专利律师MBB		
审查员(译)	LADIRAY , OLIVIER		
优先权	2003146758 2003-05-23 JP PCT/JP2004/007304 2004-05-21 WO		
外部链接	Espacenet		

摘要(译)

一种像素电路，显示装置和驱动像素电路的方法，即使随着发光元件的电流 - 电压特性的改变，也能够没有亮度劣化的情况下实现源极跟随器输出，从而实现源极跟随器电路。n沟道晶体管，并且能够在使用电流阳极 - 阴极电极的同时使用n沟道晶体管作为EL驱动晶体管，其中作为驱动晶体管的TFT 111的源极连接到发光元件114的阳极，漏极连接到电源电位VCC，电容器C111连接在TFT 111的栅极和源极之间，并且TFT 111的源极电位通过作为开关晶体管的TFT 113连接到固定电位。

FIG. 9

