



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
08.04.2015 Bulletin 2015/15

(51) Int Cl.:
G09G 3/32 ^(2006.01)

(21) Application number: **13861488.8**

(86) International application number:
PCT/CN2013/089768

(22) Date of filing: **18.12.2013**

(87) International publication number:
WO 2015/021721 (19.02.2015 Gazette 2015/07)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventors:
• **REN, Lijun**
Beijing 100176 (CN)
• **TSENG, Szu-Heng**
Beijing 100176 (CN)
• **ZHANG, Chen**
Beijing 100176 (CN)

(30) Priority: **16.08.2013 CN 201310358943**

(74) Representative: **Conti, Marco**
Bugnion S.p.A.
Via di Corticella, 87
40128 Bologna (IT)

(71) Applicant: **BOE Technology Group Co., Ltd.**
Beijing 100015 (CN)

(54) **METHOD FOR REGULATING DRIVING VOLTAGE OF PIXEL CIRCUIT, REGULATING APPARATUS THEREOF, AND DISPLAY DEVICE**

(57) The present disclosure relates to the field of display technology, in particular to a method and an apparatus for adjusting a driving voltage for a pixel circuit, and a display device comprising the apparatus. In the method, the driving voltage for the pixel circuit is dynamically adjusted in accordance with data voltages in each pixel row. According to the method and apparatus for adjusting the driving voltage for the pixel circuit provided by the

present disclosure, the driving voltage applied to the pixel circuit is dynamically adjusted in accordance with the data voltages for each pixel row in the pixel circuit, and as compared with a traditional method where a constant voltage is applied to the pixel circuit, it is able to greatly reduce a dynamic loss and a temperature rise of an OLED pixel circuit and prolong the life of the OLED while reducing the driving cost.

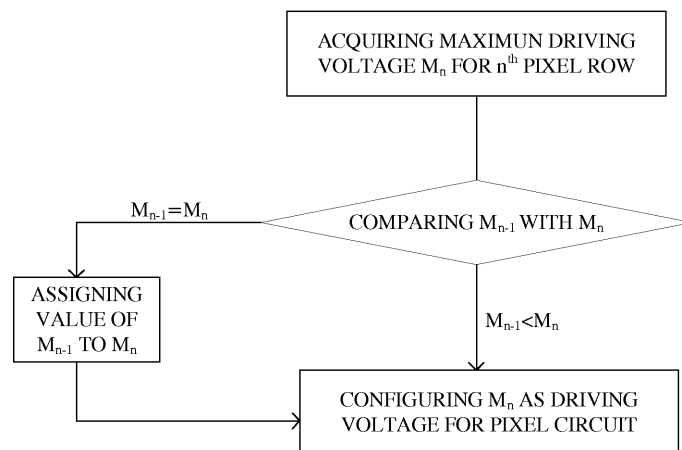


Fig. 3

Description

TECHNICAL FIELD

[0001] The present disclosure relates to the field of display technology, in particular to a method and an apparatus for adjusting a driving voltage for a pixel circuit, and a display device comprising such an apparatus.

BACKGROUND

[0002] As compared with a traditional liquid crystal panel, an active matrix/organic light-emitting diode (AMOLED) panel has such features as rapid response, high contrast and wide viewing angle, so there is a growing concern about AMOLED for display technology developers.

[0003] The AMOLED is driven by a pixel circuit to emit light. An existing 2T1C pixel circuit consists of two thin film transistors (TFTs) and one capacitor (C), i.e., a driving TFT DTFT, a switch TFT T1 and a storage capacitor Cst as shown in Fig.1. The switch TFT T1 is controlled by a scanning signal Vscan so as to control the input of a data voltage Vdata, the driving TFT DTFT is configured to control an OLED to emit light, and the storage capacitor C is configured to apply a maintaining voltage to a gate electrode of the driving TFT DTFT.

[0004] Fig.2 is a driving sequence diagram of the 2T1C pixel circuit in Fig.1. A working procedure of the 2T1C pixel circuit may be described as follows. When the scanning signal Vscan is at a high level, the switch TFT T1 is switched on, and the storage capacitor Cst is charged by a gray scale voltage Vdata on a data line. Meanwhile, the data voltage Vdata is applied to the gate electrode of the driving TFT DTFT, and the driving TFT DTFT is driven by a driving voltage ELVDD for the pixel circuit so as to operate in a saturation state, thereby to drive the OLED to emit light. When the scanning signal Vscan is at a low level, the switch TFT T1 is switched off, the maintaining voltage is applied by the storage capacitor Cst to the gate electrode of the driving TFT DTFT, and the driving TFT DTFT is driven by the driving voltage ELVDD so as to still operate in the saturation state, thereby to enable the OLED to emit light continuously. In the prior art, in order to ensure the driving TFT DTFT to operate in a saturation region and emit light normally, usually a relatively high driving voltage ELVDD is applied to a source electrode of the driving TFT DTFT of the OLED pixel circuit, and a value of the driving voltage remains unchanged, i.e., the OLED is driven at a constant voltage. However, at certain timings, e.g., when the data voltage is very low and a high driving voltage is not required, a power loss will take place and a temperature of an element will increase if a high voltage is applied. Hence, an existing method for adjusting the driving voltage for the pixel circuit may cause a great dynamic loss and a large temperature rise.

SUMMARY

[0005] An object of the present disclosure is to provide a method and an apparatus for adjusting a driving voltage for a pixel circuit, so as to reduce a dynamic loss and a temperature rise of an OLED pixel circuit and prolong the life of the OLED while reducing the driving cost.

[0006] In one aspect, the present disclosure provides a method for adjusting a driving voltage for a pixel circuit, so as to dynamically adjust the driving voltage for the pixel circuit in accordance with data voltages in each pixel row. The pixel circuit comprises a plurality of sub-pixel circuits forming a plurality of pixel rows.

[0007] According to another aspect, the method may comprise:

acquiring data voltages for each sub-pixel circuit in a pixel row to be scanned in the pixel circuit, the sub-pixel circuit comprising a driving TFT and a light-emitting element;

calculating, in accordance with the data voltages, a minimum driving voltage for each sub-pixel circuit in the pixel row to be scanned, the minimum driving voltage being a minimum voltage that ensures the driving TFT to operate in a saturation region and ensures the light-emitting element to emit light normally;

selecting a maximum value from among the minimum driving voltages for the sub-pixel circuits in the pixel row to be scanned, and configuring the maximum value as a maximum driving voltage for the pixel row to be scanned; and

configuring a maximum value from among the determined maximum driving voltage for the pixel row to be scanned and maximum driving voltages for all pixel rows before the pixel row to be scanned, as the driving voltage for the pixel circuit.

[0008] According to another aspect, the method may comprise:

acquiring a maximum driving voltage M_1 for a first pixel row in the pixel circuit;

configuring M_1 as a driving voltage for the pixel circuit;

acquiring a maximum driving voltage M_2 for a second pixel row in the pixel circuit and comparing M_1 with M_2 ;

if $M_1 < M_2$, maintaining the value of M_2 , and if $M_1 \geq M_2$, assigning the value of M_1 to M_2 ;

configuring M_2 as the driving voltage for the pixel circuit;

... ...;

acquiring a maximum driving voltage M_n for an n^{th} pixel row and comparing M_{n-1} with M_n ;

if $M_{n-1} < M_n$, maintaining the value of M_n , and if $M_{n-1} \geq M_n$, assigning the value of M_{n-1} to M_n ; and configuring M_n as the driving voltage for the pixel

circuit, wherein n is an integer greater than 2.

[0009] In another aspect, the present disclosure also provides an apparatus for adjusting a driving voltage for a pixel circuit, comprising a driving power IC coupled to the pixel circuit, and an operational processing module coupled to the driving power IC and configured to dynamically adjust a driving voltage applied by the driving power IC to the pixel circuit in accordance with data voltages for each pixel row in the pixel circuit.

[0010] The operational processing module may comprise:

a row buffering unit configured to acquire the data voltages for each sub-pixel circuit in a pixel row to be scanned in the pixel circuit; and
a calculating unit configured to calculate a minimum driving voltage for each sub-pixel circuit in the pixel row to be scanned in accordance with the data voltages, select a maximum value from among the minimum driving voltages, and configure the maximum value as a maximum driving voltage for the pixel row to be scanned, and transmit a maximum value selected from among the maximum driving voltage for the pixel row to be scanned and maximum driving voltages for all pixel rows before the pixel row to be scanned, as a value of the driving voltage for the pixel circuit, to the driving power IC.

[0011] The operational processing module may be integrated into the driving power IC.

[0012] In yet another aspect, the present disclosure also provides a display device comprising the above-mentioned apparatus for adjusting a driving voltage for a pixel circuit.

[0013] According to the method and apparatus for adjusting the driving voltage for the pixel circuit provided by the present disclosure, the driving voltage applied to the pixel circuit is dynamically adjusted in accordance with the data voltages for each pixel row in the pixel circuit. And as compared with a traditional method where a constant voltage is applied to the pixel circuit, it is able to greatly reduce the dynamic loss and the temperature rise of the OLED pixel circuit and prolong the life of the OLED while reducing the driving cost.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

Fig.1 is a schematic view showing a conventional pixel circuit;
Fig.2 is a driving sequence diagram of the pixel circuit in Fig.1;
Fig.3 is a flow chart of a method for adjusting a driving voltage for a pixel circuit according to the present disclosure; and
Fig.4 is a schematic view showing an apparatus for

adjusting a driving voltage for a pixel circuit according to the present disclosure.

DETAILED DESCRIPTION

[0015] The present disclosure will be described hereinafter in conjunction with the drawings and the embodiments. The following embodiments are merely for illustrative purposes, but shall not be used to limit the present invention.

[0016] According to a method and an apparatus for adjusting a driving voltage for a pixel circuit provided by the present disclosure, the pixel circuit driving voltage may be adjusted in accordance with a dynamic change of data voltages for each row of the pixel circuit, and as compared with a traditional method where a constant voltage is applied to the pixel circuit, it is able to greatly reduce a dynamic loss and a temperature rise of an OLED pixel circuit and prolong the life of the OLED while reducing the driving cost.

[0017] The present disclosure provides a method for adjusting a driving voltage for a pixel circuit, so as to dynamically adjust the driving voltage for the pixel circuit in accordance with data voltages for each pixel row. The pixel circuit includes a plurality of sub-pixel circuits, and the driving voltage for the pixel circuit means a driving voltage ELVDD for the whole pixel circuit, which is applied to each sub-pixel circuit.

[0018] One implementation mode of the method for adjusting the driving voltage for the pixel circuit may comprise the following steps:

acquiring data voltages for each sub-pixel circuit in a pixel row to be scanned in the pixel circuit;
calculating a minimum driving voltage for each sub-pixel circuit in the pixel row to be scanned in accordance with the acquired data voltages, the minimum driving voltage for the sub-pixel circuit being at least sufficient to ensure a driving TFT of the sub-pixel circuit to operate at a saturation region, thereby to ensure an OLED to emit light normally;
selecting a maximum value from among the calculated minimum driving voltages as a maximum driving voltage for the pixel row to be scanned, the maximum driving voltage being sufficient to ensure each sub-pixel circuit in the pixel row to be scanned to operate normally; and
comparing the maximum driving voltage for the pixel row to be scanned with a maximum driving voltage for all pixel rows before the pixel row to be scanned, which is also determined by the method, and configuring a maximum value as the driving voltage of the pixel circuit, the resultant driving voltage being sufficient to ensure the driving TFT of each sub-pixel circuit in the pixel row to be scanned to be in a saturation state, without affecting an operational state of each sub-pixel circuit in the pixel rows that have been scanned.

[0019] In this embodiment, a display panel with a resolution of 1024*768 is taken as an example. The display panel comprises an array substrate and a counterpart substrate arranged in alignment to each other. Gate scanning lines and data lines, which are arranged on the array substrate in an interweave manner, define a plurality of sub-pixel regions, each of which comprises a pixel circuit (hereinafter referred to as a sub-pixel circuit) as shown in Fig. 1. These sub-pixel circuits form the pixel circuit on the array substrate, and R, G and B sub-pixels form a pixel unit. Hence, the display panel with the resolution of 1024*768 comprises 768 gate scanning lines and 1024*3=3072 data lines. Each gate scanning line is coupled to a gate electrode of a switch TFT T1 in the sub-pixel circuit, and each data line is coupled to a source electrode of the switch TFT T1. As shown in Fig. 3, when the method is used to apply a driving voltage ELVDD to the source electrode of the driving TFT DTFT in the sub-pixel circuit, it mainly comprises the following steps.

[0020] At first, it is required to scan a first pixel row, and prior to the scanning, it is required to:

acquire data voltages for each sub-pixel circuit in the first pixel row, i.e., acquire data voltages for 3072 data lines in the first pixel row;

calculate a minimum driving voltage for each sub-pixel circuit in the first pixel row in accordance with the acquired 3072 data voltages to obtain 3072 minimum driving voltages, the minimum driving voltage for the sub-pixel circuit being at least sufficiently to ensure the driving TFT DTFT of the sub-pixel circuit to operate in a saturation region, thereby to ensure an OLED to emit light normally;

select a maximum value from among the obtained 3072 minimum driving voltages as a maximum driving voltage M_1 for the first pixel row, M_1 being sufficient to ensure all sub-pixel circuits in the first pixel row to operate normally; and

apply M_1 to the pixel circuit as the driving voltage ELVDD for the pixel circuit.

[0021] Then, the first pixel row starts to be scanned. The gate scanning line in a first row outputs a scanning signal so as to switch on the switch TFT T1 in each sub-pixel circuit in the first pixel row, and the data line writes the data voltage into a storage capacitor Cst via the switch TFT T1 in the sub-pixel circuit.

[0022] After the data voltage is written into the storage capacitor Cst, the gate scanning line in the first row stops outputting the scanning signal, the switch TFT T1 in each sub-pixel circuit in the first pixel row is switched off, and the OLED in the first pixel row emits light normally.

[0023] Next, it is required to scan a second pixel row, and prior to the scanning, it is required to:

acquire data voltages for each sub-pixel circuit in the second pixel row, i.e., acquire data voltages for 3072 data lines in the second pixel row;

calculate a minimum driving voltage for each sub-pixel circuit in the second pixel row in accordance with the acquired 3072 data voltages, to obtain 3072 minimum driving voltages, the minimum driving voltage for the sub-pixel circuit being at least sufficient to ensure the driving TFT DTFT of the sub-pixel circuit to operate in the saturation region, thereby to ensure the OLED to emit light normally;

select a maximum value from among the obtained 3072 minimum driving voltages as a maximum driving voltage M_2 for the second pixel row, M_2 being sufficient to ensure all the sub-pixel circuits in the second pixel row to operate normally;

compare the maximum driving voltage M_1 for the first pixel row with the maximum driving voltage M_2 for the second pixel row, if $M_1 < M_2$, maintain the value of M_2 , and if $M_1 \geq M_2$, assign the value of M_1 to M_2 ; and apply M_2 to the pixel circuit as the driving voltage ELVDD for the pixel circuit, so as to ensure the driving TFTs of all the sub-pixel circuits in the first and second rows to operate in the saturation region, thereby to ensure the OLEDs in the first and second rows to emit light normally.

[0024] Then, the second pixel row starts to be scanned. The gate scanning line in a second row outputs a scanning signal so as to switch on the switch TFT T1 in each sub-pixel circuit in the second pixel row, and the data line writes a data voltage into the storage capacitor Cst via the switch TFT T1 in the sub-pixel circuit.

[0025] After the data voltage is written into the storage capacitor Cst, the gate scanning line in the second row stops outputting the scanning signal, the switch TFT T1 in each sub-pixel circuit in the second pixel row is switched off, and the OLEDs in the first and second rows emit light normally.

[0026] The calculation and scanning will be performed on the subsequent pixel rows in the pixel circuit in a similar manner.

[0027] For the n^{th} pixel row, prior to the scanning, it is required to:

acquire data voltages for each sub-pixel circuit in the n^{th} pixel row, i.e., acquire data voltages for 3072 data lines in the n^{th} pixel row;

calculate a minimum driving voltage for each sub-pixel circuit in the n^{th} pixel row in accordance with the acquired 3072 data voltages, so as to obtain 3072 minimum driving voltages, the minimum driving voltage for the sub-pixel circuit being at least sufficient to ensure the driving TFTs of the sub-pixel circuit to operate in the saturation region, thereby to ensure the OLED to emit light normally;

select a maximum value from among the obtained 3072 minimum driving voltages as a maximum driving voltage M_n for the n^{th} pixel row, M_n being sufficient to ensure all the sub-pixel circuits in the n^{th} pixel row to operate normally;

compare a maximum driving voltage M_{n-1} for an $(n-1)^{\text{th}}$ pixel row with the maximum driving voltage M_n for the n^{th} pixel row, if $M_{n-1} < M_n$, maintain the value of M_n , and if $M_{n-1} \geq M_n$, assign the value of M_{n-1} to M_n ; and

apply M_n to the pixel circuit as the driving voltage ELVDD for the pixel circuit, so as to ensure the driving TFTs of all the sub-pixel circuits in the first to the n^{th} pixel rows to operate in the saturation region, thereby to ensure the OLEDs in the first to the n^{th} pixel rows to emit light normally.

[0028] Then, the n^{th} pixel row starts to be scanned. The gate scanning line in the n^{th} row outputs a scanning signal so as to switch on the switch TFT T1 in each sub-pixel circuit in the n^{th} pixel row, and the data line writes the data voltage into the storage capacitor Cst via the switch TFT T1 in the sub-pixel circuit.

[0029] After the data voltage is written into the storage capacitor Cst, the gate scanning line in the n^{th} row stops outputting the scanning signal, the switch TFT T1 in each sub-pixel circuit in the n^{th} pixel row is switched off, and the OLEDs in the first to the n^{th} pixel rows emit light normally.

[0030] The scanning is performed as mentioned above until the 768th pixel row is scanned. Here, n represents a serial number of the pixel row in the pixel circuit, and it is an integer greater than 2 and not greater than 768.

[0031] The present disclosure further provides an apparatus for adjusting a driving voltage for a pixel circuit. And as shown in Fig.4, the apparatus mainly comprises a driving power IC coupled to the pixel circuit and an operational processing module coupled to the driving power IC. The driving power IC is configured to apply a driving voltage to the pixel circuit, and the operational processing module is configured to dynamically adjust the driving voltage applied by the driving power IC to the pixel circuit in accordance with data voltages for each pixel row.

[0032] The operational processing module may comprise:

a row buffering unit configured to acquire a plurality of data voltages for a pixel row to be scanned, and store therein the data voltages from each data line in each pixel row; and

a calculating unit configured to read the data voltages in the row buffering unit, calculate a minimum driving voltage for each sub-pixel circuit in a pixel row to be scanned in accordance with the data voltages, select a maximum value from among the minimum driving voltages, and configure the maximum value as a maximum driving voltage, determine a maximum value selected from the maximum driving voltage for the pixel row to be scanned and maximum driving voltages for all pixel rows before the pixel row to be scanned as a driving voltage ELVDD for the pixel circuit, and transmit it to a driving power IC that

drives a display panel to display in accordance with the received driving voltage ELVDD.

[0033] In this embodiment, the operational processing module may be integrated into the driving power IC so as to miniaturize the apparatus and reduce the production cost.

[0034] The present disclosure further provides a display device comprising the above-mentioned apparatus for adjusting the driving voltage for the pixel circuit. According to the apparatus having the OLED pixel circuit, it is able to greatly reduce the dynamic loss and the temperature rise of the OLED pixel circuit and prolong the life of the OLED while reducing the driving cost. As a result, it is able to prolong the life of the display device and improve the reliability thereof.

[0035] The above are merely the preferred embodiments of the present invention, but shall not be used to limit the present invention. A person skilled in the art may further make improvements and modifications without departing from the principle of the present invention, and these improvements and modifications shall also fall within the scope of the present invention.

Claims

1. A method for adjusting a driving voltage for a pixel circuit, wherein the driving voltage for the pixel circuit is dynamically adjusted in accordance with data voltages in each pixel row.
2. The method according to claim 1, wherein the pixel circuit comprises a plurality of sub-pixel circuits forming a plurality of pixel rows, and the method comprises:

acquiring data voltages for each sub-pixel circuit in a pixel row to be scanned in the pixel circuit, the sub-pixel circuit comprising a driving thin film transistor (TFT) and a light-emitting element; calculating, in accordance with the data voltages, a minimum driving voltage for each sub-pixel circuit in the pixel row to be scanned, the minimum driving voltage being a minimum voltage that ensures the driving TFT to operate in a saturation region and ensures the light-emitting element to emit light normally;

selecting a maximum value from among the minimum driving voltages for the sub-pixel circuits in the pixel row to be scanned, and configuring the maximum value as a maximum driving voltage for the pixel row to be scanned; and configuring a maximum value from among the determined maximum driving voltage for the pixel row to be scanned and maximum driving voltages for all pixel rows before the pixel row to be scanned, as the driving voltage for the pixel circuit.

cuit.

3. The method according to claim 2, comprising:

acquiring a maximum driving voltage M_1 for a 5
first pixel row in the pixel circuit;
configuring M_1 as a driving voltage for the pixel
circuit;
acquiring a maximum driving voltage M_2 for a 10
second pixel row in the pixel circuit and compar-
ing M_1 with M_2 , if $M_1 < M_2$, maintaining the value
of M_2 , and if $M_1 \geq M_2$, assigning the value of M_1
to M_2 ;
configuring M_2 as the driving voltage for the pixel 15
circuit;
... ...;
acquiring a maximum driving voltage M_n for an
 n^{th} pixel row and comparing M_{n-1} with M_n , if
 $M_{n-1} < M_n$, maintaining the value of M_n , and if
 $M_{n-1} \geq M_n$, assigning the value of M_{n-1} to M_n ; and 20
configuring M_n as the driving voltage for the pixel
circuit,
wherein n is an integer greater than 2.

4. An apparatus for adjusting a driving voltage for a 25
pixel circuit comprising a plurality of sub-pixel circuits
that form a plurality of pixel rows, the apparatus com-
prising: a driving power integrated circuit (IC) cou-
pled to the pixel circuit, and an operational process- 30
ing module coupled to the driving power IC and con-
figured to dynamically adjust a driving voltage ap-
plied by the driving power IC to the pixel circuit in
accordance with data voltages for each pixel row.

5. The apparatus according to claim 4, wherein the op- 35
erational processing module comprises:

a row buffering unit configured to acquire the
data voltages for each sub-pixel circuit in a pixel
row to be scanned; and 40
a calculating unit configured to calculate a min-
imum driving voltage for each sub-pixel circuit
in the pixel row to be scanned in accordance
with the data voltages, select a maximum value
from among the minimum driving voltages, con- 45
figure the maximum value as a maximum driving
voltage for the pixel row to be scanned, and
transmit a maximum value selected from among
the maximum driving voltage for the pixel row to
be scanned and maximum driving voltages for 50
all pixel rows before the pixel row to be scanned,
as a value of the driving voltage for the pixel
circuit, to the driving power IC.

6. The apparatus according to claim 4 or 5, wherein the 55
operational processing module is integrated into the
driving power IC.

7. A display device comprising the apparatus for ad-
justing a driving voltage for a pixel circuit according
to any one of claims 4 to 6.

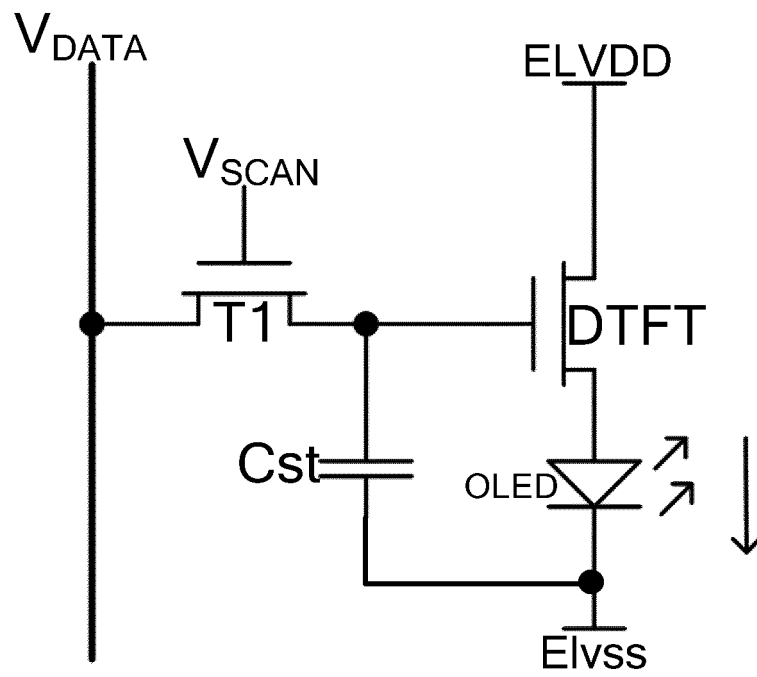


Fig. 1

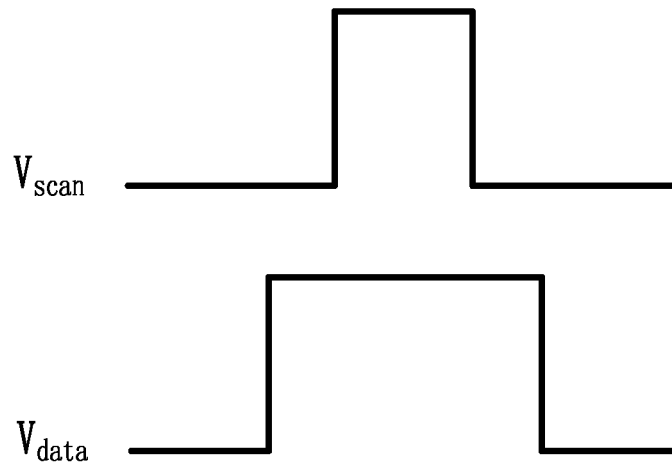


Fig. 2

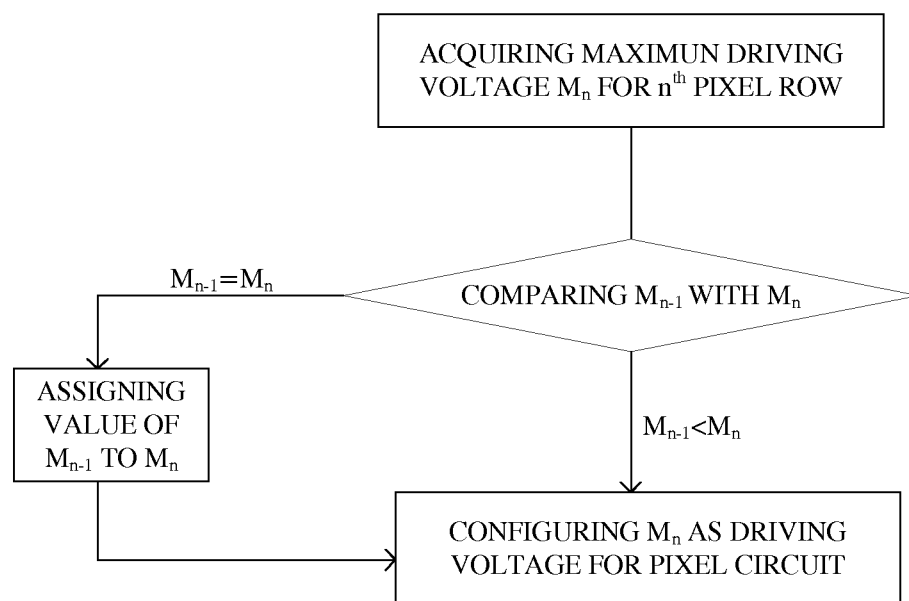


Fig. 3

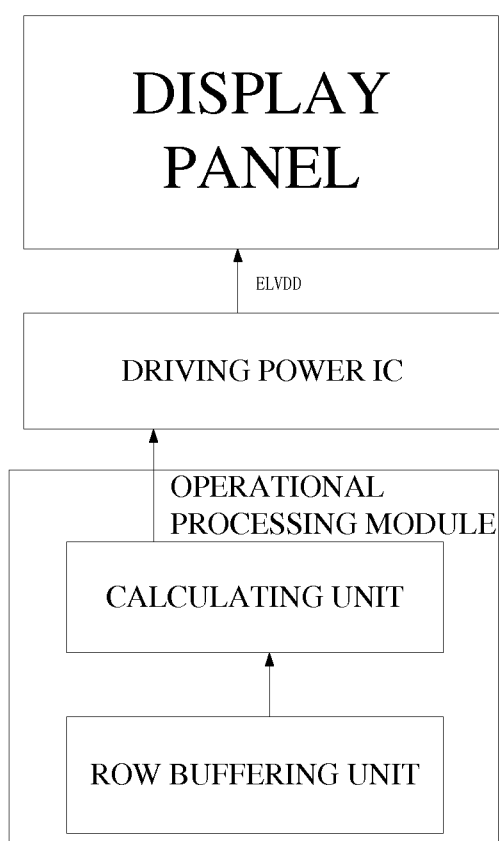


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2013/089768

A. CLASSIFICATION OF SUBJECT MATTER

G09G 3/32 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 CPRS, WPI, EPODOC, VEN: drive voltage; OLED, EL, ORGANIC LIGHT EMITTING, ORGANIC ELECTRO
 LUMINESCENCE, DYNAMIC, ALTERABLE, VOLATILE, CHANGEABLE, VARIABLE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 102203845 A (PANASONIC CORPORATION), 28 September 2011 (28.09.2011), description, paragraphs 0070-0263, and figures 1-21	1-7
X	JP 2006065148 A (SONY CORP.), 09 March 2006 (09.03.2006), description, paragraphs 0016-0075, and figures 1-19	1-7
A	JP 2008310361 A (SEIKO EPSON CORP.), 25 December 2008 (25.12.2008), the whole document	1-7
A	CN 1744180 A (LG. PHILIPS LCD CO., LTD. et al.), 08 March 2006 (08.03.2006), the whole document	1-7
A	CN 1680988 A (AU OPTRONICS CORP. et al.), 12 October 2005 (12.10.2005), the whole document	1-7
A	US 6885356 B2 (NEC ELECTRONICS CORP.), 26 April 2005 (26.04.2005), the whole document	1-7
A	CN 101014989 A (ST MICROELECTRONICS S.R.L. et al.), 08 August 2007 (08.08.2007), the whole document	1-7

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search 24 April 2014 (24.04.2014)	Date of mailing of the international search report 09 May 2014 (09.05.2014)
Name and mailing address of the ISA/CN: State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No.: (86-10) 62019451	Authorized officer WANG, Min Telephone No.: (86-10) 62085827

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/CN2013/089768

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 102203845 A	28.09.2011	KR 20120105064 A	25.09.2012
		WO 2011086597 A1	21.07.2011
		US 2011242087 A1	06.10.2011
JP 2006065148 A	09.03.2006	JP 4622389 B2	02.02.2011
JP 2008310361 A	25.12.2008	JP 4930799 B2	16.05.2012
CN 1744180 A	08.03.2006	KR 20060020502 A	06.03.2006
		US 2006043366 A1	02.03.2006
		US 7545354 B2	09.06.2009
		CN 100583210 C	20.01.2010
		KR 101130903 B1	28.03.2012
CN 1680988 A	12.10.2005	CN 100395806 C	18.06.2008
US 6885356 B2	26.04.2005	US 2003016200 A1	23.01.2003
		JP 2002032058 A	31.01.2002
CN 101014989 A	08.08.2007	US 7619598 B2	17.11.2009
		WO 2005098806 A1	20.10.2005
		US 2007171155 A1	26.07.2007
		JP 4616332 B2	19.01.2011
		JP 2007532944 A	15.11.2007
		CN 100452137 C	14.01.2009
		KR 20070053161 A	23.05.2007

Form PCT/ISA/210 (patent family annex) (July 2009)

专利名称(译)	调节像素电路的驱动电压的方法，其调节装置和显示装置		
公开(公告)号	EP2858065A1	公开(公告)日	2015-04-08
申请号	EP2013861488	申请日	2013-12-18
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	REN LIJUN TSENG SZU HENG ZHANG CHEN		
发明人	REN, LIJUN TSENG, SZU-HENG ZHANG, CHEN		
IPC分类号	G09G3/32 G06F1/32		
CPC分类号	G09G3/3233 G06F1/32 G06F1/3265 G09G2330/021 G09G2330/023 G09G2330/028 G09G2330/04 G09G2360/16 Y02D10/153		
代理机构(译)	CONTI , MARCO		
优先权	201310358943.7 2013-08-16 CN		
其他公开文献	EP2858065A4		
外部链接	Espacenet		

摘要(译)

本发明涉及显示技术领域，尤其涉及一种调整像素电路驱动电压的方法和装置，以及包括该装置的显示装置。在该方法中，根据每个像素行中的数据电压动态地调整像素电路的驱动电压。根据本发明提供的调整像素电路的驱动电压的方法和装置，根据像素电路中每个像素行的数据电压动态调整施加于像素电路的驱动电压，并进行比较。采用向像素电路施加恒定电压的传统方法，能够大大降低OLED像素电路的动态损耗和温度上升，并延长OLED的寿命，同时降低驱动成本。

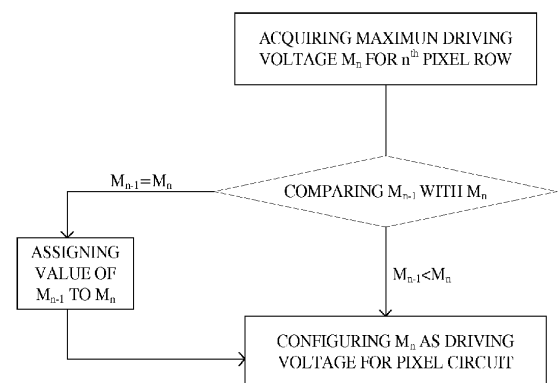


Fig. 3