



(11) **EP 2 560 157 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
20.02.2013 Bulletin 2013/08

(21) Application number: **11768897.8**

(22) Date of filing: **13.04.2011**

(51) Int Cl.:
G09G 3/36 (2006.01) **G02F 1/133** (2006.01)
G06T 11/00 (2006.01) **G09G 3/20** (2006.01)
G09G 5/28 (2006.01)

(86) International application number:
PCT/JP2011/059204

(87) International publication number:
WO 2011/129376 (20.10.2011 Gazette 2011/42)

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **14.04.2010 JP 2010093445**

(71) Applicant: **Sharp Kabushiki Kaisha**
Osaka-shi, Osaka 545-8522 (JP)


(72) Inventor: **INADA, Ken**
Osaka-shi
Osaka 545-8522 (JP)

(74) Representative: **Goddard, Heinz J.**
Boehmert & Boehmert
Pettenkoferstrasse 20-22
80336 München (DE)

(54) **LIQUID CRYSTAL DISPLAY DEVICE AND METHOD FOR DISPLAYING FONTS ON LIQUID CRYSTAL DISPLAY DEVICE**

(57) A four-color liquid crystal display device has pixels containing first to fourth subpixels (hereinafter abbreviated as "SPs" as needed) having four different colors, respectively, arranged in a two-by-two matrix, the first to fourth SPs being placed in the first row and the first column, in the first row and the second column, in the second row and the first column, and in the second row and the second column, respectively. In displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three SPs having three different colors, respectively, arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the SP in the first column takes on a tone T_x , that the SP in the second column takes on a tone T_y , and that the SP in the third column takes on a tone T_z , the liquid crystal display device specifies, for the predetermined pixel, that each of the first and fourth SPs takes on a tone which is obtained by performing rounding on $(T_x \times 2/3) + (T_y \times 1/3) = p$ and that each of the second and third SPs takes on a tone which is obtained by performing rounding on $(T_y \times 1/3) + (T_z \times 2/3) = v$. This allows the four-color liquid crystal display device to appropriately display a subpixel rendered font (e.g., Clear Type (registered trademark)).

FIG. 1

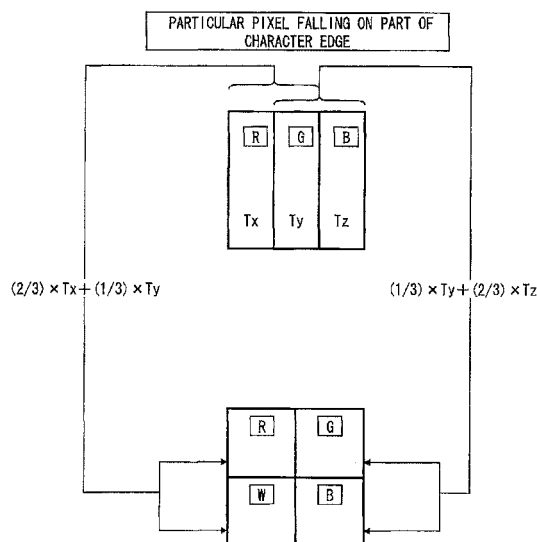

Description

Technical Field

[0001] The present invention relates to a display of characters on a liquid crystal display device having pixels each constituted by four subpixels having four different colors (e.g., red, green, blue, and white), respectively.

Background Art

[0002] As an antialiasing technique for improving the viewability of characters on a liquid crystal display device, a technique (subpixel rendering) is currently under development which produces an antialiasing effect not at a pixel level but at a subpixel level by displaying different tones in a plurality of subpixels of each of those pixels falling on a character edge.

[0003] Fig. 14 is a schematic view showing the case of a standard display of a character line on a liquid crystal display device (three-color liquid crystal display device) having pixels each constituted by three subpixels, namely an R (red), a G (green), and a B (blue) subpixels. Fig. 15 is a schematic view of the case of a display of a subpixel rendered character line on the three-color liquid crystal display device. It should be noted that each subpixel takes on any one (8-bit data) of tones of 0 to 255, and the R, G, and B subpixels are abbreviated as "RSP", "GSP", and "BSP", respectively, as needed.

[0004] As shown in Figs. 14 and 15, whereas RSP = 255, G = 255, and B = 255 in each of the pixels P1 to P3 in Fig. 14, RSP = 255, GSP = 255, and BSP = 0 in each of the pixels P1 to P3 in Fig. 15. Further, whereas RSP = 255, G = 255, and B = 255 in each of the pixels P4 to P6 in Fig. 14, RSP = 0, GSP = 255, and BSP = 0 in each of the pixels P4 to P6 in Fig. 15. This shows that an antialiasing effect is produced at a subpixel level in Fig. 15.

[0005] Meanwhile, with an aim to enhance the luminance of each pixel, a liquid crystal display device (multi-color liquid crystal display device) is also currently under development which has pixels each constituted by subpixels of four or more different colors.

[0006] Fig. 16 is a schematic view showing the case of a standard display of a character line on a four-color liquid crystal display device having matrix arrangements of four subpixels, namely an R (red), a G (green), a B (blue), and a white (W) subpixels. It should be noted here that for a display on the four-color liquid crystal display device of RGB data premised on a three-color liquid crystal display device, RGBW data is created from the RGB data in the manner shown in Fig. 17. That is, in a case where it is specified in the RGB data that RSP = TX, GSP = TY, and BSP = TZ, such tones are specified in the RGBW data that RSP = $j \times TX$ - (smallest value among the tones TX to TZ), GSP = $j \times TY$ - (smallest value among the tones TX to TZ), BSP = $j \times TZ$ - (smallest value among the tones TX to TZ), and WSP = smallest value among the tones TX to TZ (where $1 \leq j \leq 2$).

[0007] For example, in a case where it is specified in the RGB data that RSP = 0, GSP = 0, and BSP = 0, it is specified in the RGBW data that RSP = $1 \times 0 - (0) = 0$, GSP = $1 \times 0 - (0) = 0$, BSP = $1 \times 0 - (0) = 0$, and WSP = 0. Alternatively, in a case where it is specified in the RGB data that RSP = 255, GSP = 255, and BSP = 0, it is specified in the RGBW data that RSP = $1 \times 255 - (0) = 255$, GSP = $1 \times 255 - (0) = 255$, BSP = $1 \times 0 - (0) = 0$, and WSP = 0. Alternatively, in a case where it is specified in the RGB data that RSP = 0, GSP = 255, and BSP = 255, it is specified in the RGBW data that RSP = $1 \times 0 - (0) = 0$, GSP = $1 \times 255 - (0) = 255$, BSP = $1 \times 255 - (0) = 255$, and WSP = 0.

[0008] Fig. 18 is a schematic view showing the case of a standard display of a character line on a four-color liquid crystal display device having stripe arrangements of four subpixels, namely an R (red), a G (green), a B (blue), and a white (W) subpixels. It should be noted here that for a display on the four-color liquid crystal display device of RGB data premised on a three-color liquid crystal display device, RGBW data is created from the RGB data in the manner shown in Fig. 19. That is, in a case where it is specified in the RGB data that RSP = TX, GSP = TY, and BSP = TZ, such tones are specified in the RGBW data that RSP = $j \times TX$ - (smallest value among the tones TX to TZ), GSP = $j \times TY$ - (smallest value among the tones TX to TZ), BSP = $j \times TZ$ - (smallest value among the tones TX to TZ), and WSP = smallest value among the tones TX to TZ (where $1 \leq j \leq 2$).

[0009] For example, in a case where it is specified in the RGB data that RSP = 0, GSP = 0, and BSP = 0, it is specified in the RGBW data that RSP = $1 \times 0 - (0) = 0$, GSP = $1 \times 0 - (0) = 0$, BSP = $1 \times 0 - (0) = 0$, and WSP = 0. Alternatively, in a case where it is specified in the RGB data that RSP = 255, GSP = 255, and BSP = 0, it is specified in the RGBW data that RSP = $1 \times 255 - (0) = 255$, GSP = $1 \times 255 - (0) = 255$, BSP = $1 \times 0 - (0) = 0$, and WSP = 0. Alternatively, in a case where it is specified in the RGB data that RSP = 0, GSP = 255, and BSP = 255, it is specified in the RGBW data that RSP = $1 \times 0 - (0) = 0$, GSP = $1 \times 255 - (0) = 255$, BSP = $1 \times 255 - (0) = 255$, and WSP = 0.

Citation List

Patent Literature 1

[0010] Japanese Patent Application Publication, Tokukai, No. 2004-4839 A (Publication Date: January 8, 2004)

Summary of Invention

Technical Problem

[0011] Since a subpixel rendered font (e.g., Clear Type (registered trademark) of Microsoft Corporation) is created on the premise of a three-color liquid crystal display device, there is such a problem that an attempt to display

the font on such a multi-color liquid crystal display device as that described above results in failure to produce an appropriate antialiasing effect.

[0012] Fig. 20 is a schematic view showing the case of a display of RGBW data on a four-color liquid crystal display device having two-by-two matrix arrangements of an R, a G, a B, and a W subpixels, the RGBW data having been created in the manner shown in Fig. 17 from RGB data representing the subpixel rendered character line of Fig. 15. Since, in Fig. 15, it is specified in each of the pixels P1 to P3 that RSP = 255, G = 255, and B = 0, it is specified in the RGBW data, for each of the pixels P1 to P3, that RSP = 255, GSP = 255, BSP = 0, and WSP = 0. Fig. 20 shows that the R and G subpixels, which are high in luminance, are conspicuous in each of the pixels P1 to P3 (to form a jagged edge on the left side of the character as shown in Fig. 20) and an appropriate antialiasing effect is not produced.

[0013] Fig. 21 is a schematic view showing the case of a display of RGBW data on a four-color liquid crystal display device having stripe arrangements of an R, a G, a B, and a W subpixels, the RGBW data having been created in the manner shown in Fig. 19 from RGB data representing the subpixel rendered character line of Fig. 15. Since, in Fig. 15, it is specified in each of the pixels P4 to P6 that RSP = 0, G = 255, and B = 255, it is specified in the RGBW data, for each of the pixels P4 to P6, that RSP = 0, GSP = 255, BSP = 255, and WSP = 0. Fig. 21 shows that the G and B subpixels, which are high in luminance, are conspicuous in each of the pixels P4 to P6 (to form a jagged edge on the right side of the character as shown in Fig. 21) and an appropriate antialiasing effect is not produced.

[0014] The present invention is designed to produce an appropriate antialiasing effect when a four-color liquid crystal display device displays a subpixel rendered font.

Solution to Problem

[0015] A liquid crystal display device according to the present invention is a liquid crystal display device including: pixels each composed of first to fourth subpixels having four different colors, respectively, the first to fourth subpixels being arranged in a two-by-two matrix, the first subpixel being placed in the first row and the first column, the second subpixel being placed in the first row and the second column, the third subpixel being placed in the second row and the second column, the fourth subpixel being placed in the second row and the first column, in displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three subpixels having three different colors, respectively, the three subpixels being arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz, the liquid crystal display device spec-

ifying, regarding the predetermined pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times Kb + Ty \times Ka) = p$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Ty \times Kc + Tz \times Kd) = q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (Ty \times Ke + Tz \times Kf) = v$, and that the second subpixel takes on a tone which is obtained by performing rounding on $\delta \times (Tx \times Kh + Ty \times Kg) = u$, where $0 \leq Ka < Kb \leq 1$, $0 \leq Kc < Kd \leq 1$, $0 \leq Ke < Kf \leq 1$, $0 \leq Kg < Kh \leq 1$, and α , β , γ , and δ are each a positive number.

[0016] The tone of each of the first and fourth subpixels located in the first column in each pixel of a four-color liquid crystal display device (i.e., a liquid crystal display device having pixels each composed of first to fourth subpixels having four different colors, respectively, arranged in a two-by-two matrix) that falls on part of a character edge is determined with a higher degree of contribution of the tone Tx of the subpixel located in the first column in each pixel of a three-color liquid crystal display device, and the tone of each of the second and third subpixels located in the second column in each pixel of the four-color liquid crystal display is determined with a higher degree of contribution of the tone Tz of the subpixel located in the third column in each pixel of the three-color liquid crystal display device. This makes it possible to produce an appropriate antialiasing effect on a font displayed on the four-color liquid crystal display device.

Advantageous Effects of Invention

[0017] As described above, the present invention can produce an appropriate antialiasing effect when a four-color liquid crystal display device displays a subpixel rendered font.

Brief Description of Drawings

[0018]

Fig. 1

Fig. 1 is an explanatory diagram showing a method for creating RGBW data (for a particular pixel) according to Embodiment 1.

Fig. 2

Fig. 2 is an explanatory diagram showing a method for creating RGBW data (for a pixel other than the particular pixel) according to Embodiment 1.

Fig. 3

Fig. 3 is a schematic view showing a display state of RGBW data created in the manners shown in Figs. 1 and 2.

Fig. 4

Fig. 4 is an explanatory diagram showing a method for creating RGBW data (for a pixel other than the particular pixel) with a different color arrangement of subpixels.

Fig. 5

Fig. 5 is an explanatory diagram showing another method for creating RGBW data (for a particular pixel) according to Embodiment 1.

Fig. 6

Fig. 6 is an explanatory diagram showing a modification of the method of data creation (for a particular pixel) of Fig. 1.

Fig. 7

Fig. 7 is an explanatory diagram showing a method for creating RGBW data (for a particular pixel) according to Embodiment 2.

Fig. 8

Fig. 8 is an explanatory diagram showing a method for creating RGBW data (for a pixel other than the particular pixel) according to Embodiment 1.

Fig. 9

Fig. 9 is a schematic view showing a display state of RGBW data created in the manners shown in Figs. 7 and 8.

Fig. 10

Fig. 10 is an explanatory diagram showing a method for creating RGBW data (for a pixel other than the particular pixel) with a different color arrangement of subpixels.

Fig. 11

Fig. 11 is an explanatory diagram showing another method for creating RGBW data (for a particular pixel) according to Embodiment 2.

Fig. 12

Fig. 12 is an explanatory diagram showing still another method for creating RGBW data (for a particular pixel) according to Embodiment 2.

Fig. 13

Fig. 13 is a block diagram showing a configuration of a liquid crystal display device according to an embodiment of the present invention.

Fig. 14

Fig. 14 is a schematic view showing a display state of a standard font (without subpixel rendering) on a three-color liquid crystal display device.

Fig. 15

Fig. 15 is a schematic view showing a display state of a font (with subpixel rendering) on a three-color liquid crystal display device.

Fig. 16

Fig. 16 is a schematic view showing a display state of a font (without subpixel rendering) on a (matrix) four-color liquid crystal display device.

Fig. 17

Fig. 17 is an explanatory diagram showing a method for creating (matrix-compatible) RGBW data in a conventional liquid crystal display device.

Fig. 18

Fig. 18 is a schematic view showing a display state of a font (without subpixel rendering) on a (stripe) four-color liquid crystal display device.

Fig. 19

Fig. 19 is an explanatory diagram showing a method for creating (stripe-compatible) RGBW data in a conventional liquid crystal display device.

Fig. 20

Fig. 20 is a schematic view showing a display state of a font (with subpixel rendering) on a conventional (matrix) four-color liquid crystal display device.

Fig. 21

Fig. 21 is a schematic view showing a display state of a font (with subpixel rendering) on a conventional (stripe) four-color liquid crystal display device.

Description of Embodiments

[0019] An embodiment of the present invention is described below with reference to Figs. 1 to 13, 15, 20, and 21. As shown in Fig. 13, a liquid crystal display device according to the present embodiment includes a display control circuit 2, a gate driver 3, a source driver 4, and a liquid crystal panel 5. It should be noted that the gate driver 3 and the source driver 4 may be formed monolithically with the liquid crystal panel 5.

[0020] The liquid crystal display device 1 is a four-color liquid crystal display device, and the liquid crystal panel 5 has pixels each composed of four subpixels having four different colors (R, G, B, and W), respectively. The R, G, B, and W subpixels are referred to below as "BSP", "GSP", "BSP", and "WSP", respectively, as needed.

[0021] The display control circuit 2 includes a data conversion circuit 6 and a timing control circuit 7. The data conversion circuit 6 receives RGB data, creates RGBW data from the RGB data (which will be described later in detail), and then outputs the RGBW data to the timing control circuit 7. The timing control circuit 7 outputs a source start pulse SSP, a source clock SCK, etc., as well as the RGBW data, to the source driver 4, and outputs a gate start pulse GSP, a gate clock GCK, etc. to the gate driver 3.

[0022] The source driver 4 drives source lines (data signal lines, not illustrated) of the liquid crystal panel 5 with use of the source start pulse SSP, the source clock SCK, etc., as well as the RGBW data. The gate driver 3 drives gate lines (scanning signal lines, not illustrated) of the liquid crystal panel 5 with use of the gate start pulse GSP, the gate clock GCK, etc.

[0023] The following describes a method for creating RGBW data of a subpixel rendered font (e.g., Clear Type (registered trademark) of Microsoft Corporation premised on an R, a G, and a B subpixels arranged in three columns of stripe.

[Embodiment 1]

[0024] The liquid crystal panel 5 has pixels each constituted by first to fourth subpixels having four different colors, respectively, arranged in a two-by-two matrix (with the first to fourth subpixels being placed in the first row and the first column, in the first row and the second

column, in the second row and the second column, and in the second row and the first column, respectively). When it is specified in the font (RGB data), for a particular pixel falling on part of a character edge, that the subpixel in the first column takes on a tone T_x , that the subpixel in the second column takes on a tone T_y , and that the subpixel in the third column takes on a tone T_z , it is specified in the RGBW data, for the particular pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (T_x \times K_b + T_y \times K_a) = p$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (T_y \times K_c + T_z \times K_d) = q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (T_y \times K_e + T_z \times K_f) = v$, and that the fourth subpixel takes on a tone which is obtained by performing rounding on $\delta \times (T_x \times K_h + T_y \times K_g) = u$, where $0 \leq K_a < K_b \leq 1$, $0 \leq K_c < K_d \leq 1$, $0 \leq K_e < K_f \leq 1$, $0 \leq K_g < K_h \leq 1$, and α , β , γ , and δ are each a positive number.

[0025] It is preferable that $K_a = K_c = K_e = K_g = 1/3$, $K_b = K_d = K_f = K_h = 2/3$, and $\alpha = \beta = \gamma = \delta = 1$. See a case where each pixel of the liquid crystal panel 5 has an R subpixel (RSP), a G subpixel (GSP), a B subpixel (BSP), and a W subpixel (WSP) placed in the first row and the first column, in the first row and the second column, in the second row and the second column, and in the second row and the first column, respectively. In this case, when it is specified in the font (RGB data), for a particular pixel falling on part of a character edge (such a pixel as the pixels P1 to P6 of Fig. 15, which shows an example of a display of the font on a three-color liquid crystal display device), that the R subpixel in the first column takes on a tone T_x , that the G subpixel in the second column takes on a tone T_y , and that the B subpixel in the third column takes on a tone T_z , it is specified in the RGBW data, as shown in Fig. 1, that the RSP and WSP of the particular pixel each take on a tone which is obtained by rounding $(2/3) \times T_x + (1/3) \times T_y$ down to the nearest whole number and that the GSP and BSP of the particular pixel takes on a tone which is obtained by rounding $(1/3) \times T_y + (2/3) \times T_z$ down to the nearest whole number. Further, when it is specified in the font (RGB data), for a pixel other than the particular pixel, that the R subpixel in the first column takes on a tone T_X , that the G subpixel in the second column takes on a tone T_Y , and that the B subpixel in the third column takes on a tone T_Z , it is specified in the RGBW data, as shown in Fig. 2, that $RSP = j \times T_X - (\text{smallest value among the tones } T_X, T_Y, \text{ and } T_Z)$, $GSP = j \times T_Y - (\text{smallest value among the tones } T_X, \text{ and } T_Z)$, $BSP = j \times T_Z - (\text{smallest value among the tones } T_X, T_Y, \text{ and } T_Z)$, and $WSP = \text{smallest value among the tones } T_X, T_Y, \text{ and } T_Z$ (where $1 \leq j \leq 2$).

[0026] Since, in Fig. 15, it is specified in each of the pixels P1 to P3 that $RSP = 255$, $G = 255$, and $B = 0$, it is specified in the RGBW data, for each of the pixels P1 to P3, that $RSP = 255$, $GSP = 85$, $BSP = 85$, and $WSP = 255$ (see Fig. 3). Further, since, in Fig. 15, it is specified in each of the pixels P4 to P6 that $RSP = 0$, $G = 255$, and

$B = 255$, it is specified in the RGBW data, for each of the pixels P4 to P6, that $RSP = 85$, $GSP = 225$, $BSP = 225$, and $WSP = 85$ (see Fig. 3). Fig. 3 shows that a smoother character edge is displayed than in Fig. 20 and an appropriate antialiasing effect is produced.

[0027] For example, see a case where each pixel of the liquid crystal panel 5 has a W subpixel (WSP), a B subpixel (BSP), an R subpixel (RSP), and a G subpixel (GSP) placed in the first row and the first column, in the first row and the second column, in the second row and the second column, and in the second row and the first column, respectively. In this case, when it is specified in the font (RGB data), for a particular pixel falling on part of a character edge (such a pixel as the pixels P1 to P6 of Fig. 15, which shows an example of a display of the font on a three-color liquid crystal display device), that the RSP takes on a tone T_x , that the GSP takes on a tone T_y , and that the BSP takes on a tone T_z , it is specified in the RGBW data, as shown in Fig. 4, that the WSP and GSP of the particular pixel each take on a tone which is obtained by rounding $(2/3) \times T_x + (1/3) \times T_y$ down to the nearest whole number and that the BSP and RSP of the particular pixel each take on a tone which is obtained by rounding $(1/3) \times T_y + (2/3) \times T_z$ down to the nearest whole number.

[0028] The method for creating RGBW data in a case where the liquid crystal panel 5 has pixels each constituted by four subpixels having four different colors, respectively, arranged in a two-by-two matrix is not limited to that described above.

[0029] For example, let it be assumed that $K_a = K_c = K_e = K_g = 0$, $K_b = K_d = K_f = K_h = 1$, and $\alpha = \beta = \gamma = \delta = 1$, and see a case where each pixel of the liquid crystal panel 5 has an R subpixel (RSP), a G subpixel (GSP), a B subpixel (BSP), and a W subpixel (WSP) placed in the first row and the first column, in the first row and the second column, in the second row and the second column, and in the second row and the first column, respectively. In this case, when it is specified in the font (RGB data), for a particular pixel falling on part of a character edge (such a pixel as the pixels P1 to P6 of Fig. 15, which shows an example of a display of the font on a three-color liquid crystal display device), that the RSP takes on a tone T_x , that the GSP takes on a tone T_y , and that the BSP takes on a tone T_z , it can also be specified in the RGBW data, as shown in Fig. 5, that the RSP and WSP of the particular pixel each take on the tone T_x and that the GSP and BSP of the particular pixel each take on the tone T_z .

[0030] Further, when the R, G, B, and W subpixels display identical tones with a luminance ratio of $LR:LG:LB:LW$ (e.g., $0.298:0.586:0.114:1$), it can also be specified in Fig. 1 that $\alpha = 2 \times (LW)/(LR + LW)$, $\beta = 2 \times (LB)/(LG + LB)$, $\gamma = 2 \times (LG)/(LG + LB)$, and $\delta = 2 \times (LR)/(LR + LW)$. That is, it can also be specified in the RGBW data, as shown in Fig. 6, that the RSP of a particular pixel falling on part of a character edge takes on a tone which is obtained by rounding $(2/3) \times T_x + (1/3) \times T_y \times (LW/$

(LR + LW) to the nearest whole number, that the GSP of the particular pixel takes on a tone which is obtained by rounding $(1/3) \times Ty + (2/3) \times Tz \times (LB)/(LG + LB)$ to the nearest whole number, that the BSP of the particular pixel takes on a tone which is obtained by rounding $(1/3) \times Ty + (2/3) \times Tz \times (LG)/(LG + LB)$ to the nearest whole number, and that the WSP of the particular pixel takes on a tone which is obtained by rounding $(2/3) \times Tx + (1/3) \times Ty \times (LR)/(LR + LW)$ to the nearest whole number. This produces a more appropriate antialiasing effect.

[Embodiment 2]

[0031] The liquid crystal panel 5 has pixels each constituted by first to fourth subpixels having four different colors, respectively, arranged in four columns of stripe (with the first to fourth subpixels being placed in the first to fourth columns, respectively). When it is specified in the font (RGB data), for a particular pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz, it is specified in the RGBW data, for the particular pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times KB + Ty \times KA) = P$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Tx \times KC + Ty \times KD) = Q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (Ty \times KE + Tz \times KF) = V$, and that the fourth subpixel takes on a tone which is obtained by performing rounding on $\delta \times (Ty \times KG + Tz \times KH) = U$, where $0 \leq KA < KB \leq 1$, $0 \leq KC \leq 1$, $0 \leq KD \leq 1$, $0 \leq KE \leq 1$, $0 \leq KF \leq 1$, $0 \leq KG < KH \leq 1$, and α, β, γ , and δ are each a positive number.

[0032] It is preferable that $KA = KG = 0$, $KB = KH = 1$, $KC = KF = 1/3$, $KD = KE = 2/3$, and $\alpha = \beta = \gamma = \delta = 1$. See a case where each pixel of the liquid crystal panel 5 has an R subpixel (RSP), a G subpixel (GSP), a B subpixel (BSP), and a W subpixel (WSP) placed in the first to fourth columns, respectively. In this case, when it is specified in the font (RGB data), for a particular pixel falling on part of a character edge (such a pixel as the pixels P1 to P6 of Fig. 15, which shows an example of a display of the font on a three-color liquid crystal display device), that the R subpixel in the first column takes on a tone Tx, that the G subpixel in the second column takes on a tone Ty, and that the B subpixel in the third column takes on a tone Tz, it is specified in the RGBW data, as shown in Fig. 7, that the RSP of the particular pixel takes on the tone Tx, that the GSP of the particular pixel takes on a tone which is obtained by rounding $(1/3) \times Tx + (2/3) \times Ty$ down to the nearest whole number, that the BSP of the particular pixel takes on a tone which is obtained by rounding $(2/3) \times Ty + (1/3) \times Tz$ down to the nearest whole number, and that the WSP of the particular pixel takes on the tone Tz. Further, when it is specified in the

font (RGB data), for a pixel other than the particular pixel, that the R subpixel in the first column takes on a tone TX, that the G subpixel in the second column takes on a tone TY, and that the B subpixel in the third column takes on a tone TZ, it is specified in the RGBW data, as shown in Fig. 8, that $RSP = j \times TX -$ (smallest value among the tones TX, TY, and TZ), $GSP = j \times TY -$ (smallest value among the tones TX, TY, and TZ), $BSP = j \times TZ -$ (smallest value among the tones TX, TY, and TZ), and $WSP =$ smallest value among the tones TX, TY, and TZ (where $1 \leq j \leq 2$).

[0033] Since, in Fig. 15, it is specified in each of the pixels P1 to P3 that $RSP = 255$, $G = 255$, and $B = 0$, it is specified in the RGBW data, for each of the pixels P1 to P3, that $RSP = 255$, $GSP = 255$, $BSP = 170$, and $WSP = 0$ (see Fig. 9). Further, since, in Fig. 15, it is specified in each of the pixels P4 to P6 that $RSP = 0$, $G = 255$, and $B = 255$, it is specified in the RGBW data, for each of the pixels P4 to P6, that $RSP = 0$, $GSP = 170$, $BSP = 225$, and $WSP = 255$ (see Fig. 9). Fig. 9 shows that a smoother character edge is displayed than in Fig. 21 and an appropriate antialiasing effect is produced.

[0034] For example, see a case where each pixel of the liquid crystal panel 5 has a B subpixel (BSP), a W subpixel (WSP), an G subpixel (GSP), and an R subpixel (RSP) placed in the first to fourth rows, respectively. In this case, when it is specified in the font (RGB data), for a particular pixel falling on part of a character edge (such a pixel as the pixels P1 to P6 of Fig. 15, which shows an example of a display of the font on a three-color liquid crystal display device), that the RSP takes on a tone Tx, that the GSP takes on a tone Ty, and that the BSP takes on a tone Tz, it is specified in the RGBW data, as shown in Fig. 10, that the BSP of the particular pixel takes on the tone Tx, that the WSP of the particular pixel takes on a tone which is obtained by rounding $(1/3) \times Tx + (2/3) \times Ty$ down to the nearest whole number, that the GSP of the particular pixel takes on a tone which is obtained by rounding $(2/3) \times Ty + (1/3) \times Tz$ down to the nearest whole number, and that the RSP of the particular pixel takes on the tone Tz.

[0035] The method for creating RGBW data in a case where the liquid crystal panel 5 has pixels each constituted by four subpixels having four different colors, respectively, arranged in stripes is not limited to that described above.

[0036] For example, it may be that $KA = KD = KE = KG = 0$, $KB = KH = KC = KF = 1$, and $\alpha = \beta = \gamma = \delta = 1$. See a case where each pixel of the liquid crystal panel 5 has an R subpixel (RSP), a G subpixel (GSP), a B subpixel (BSP), and a W subpixel (WSP) placed in the first to fourth columns, respectively. In this case, when it is specified in the font (RGB data), for a particular pixel falling on part of a character edge (such a pixel as the pixels P1 to P6 of Fig. 15, which shows an example of a display of the font on a three-color liquid crystal display device), that the RSP takes on a tone Tx, that the GSP takes on a tone Ty, and that the BSP takes on a tone Tz,

it can also be specified in the RGBW data, as shown in Fig. 11, that the RSP and GSP of the particular pixel each take on the tone Tx and that the BSP and WSP of the particular pixel each take on the tone Tz.

[0037] Alternatively, it may also be that $KA = KC = KF = KG$, $KB = KD = KE = KH = 1$, and $\alpha = \beta = \gamma = \delta = 1$. See a case where each pixel of the liquid crystal panel 5 has an R subpixel (RSP), a G subpixel (GSP), a B subpixel (BSP), and a W subpixel (WSP) placed in the first to fourth columns, respectively. In this case, when it is specified in the font (RGB data), for a particular pixel falling on part of a character edge (such a pixel as the pixels P1 to P6 of Fig. 15, which shows an example of a display of the font on a three-color liquid crystal display device), that the RSP takes on a tone Tx, that the GSP takes on a tone Ty, and that the BSP takes on a tone Tz, it can also be specified in the RGBW data, as shown in Fig. 12, that the RSP of the particular pixel takes on the tone Tx, that the GSP and BSP of the particular pixel each take on the tone Ty, and that the WSP of the particular pixel takes on the tone Tz.

[0038] A liquid crystal display device according to the present invention is a liquid crystal display device including: pixels each composed of first to fourth subpixels having four different colors, respectively, the first to fourth subpixels being arranged in a two-by-two matrix, the first subpixel being placed in the first row and the first column, the second subpixel being placed in the first row and the second column, the third subpixel being placed in the second row and the second column, the fourth subpixel being placed in the second row and the first column, in displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three subpixels having three different colors, respectively, the three subpixels being arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz, the liquid crystal display device specifying, regarding the predetermined pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times Kb + Ty \times Ka) = p$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Ty \times Kc + Tz \times Kd) = q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (Ty \times Ke + Tz \times Kf) = v$, and that the second subpixel takes on a tone which is obtained by performing rounding on $\delta \times (Tx \times Kh + Ty \times Kg) = u$, where $0 \leq Ka < Kb \leq 1$, $0 \leq Kc < Kd \leq 1$, $0 \leq Ke < Kf \leq 1$, $0 \leq Kg < Kh \leq 1$, and α , β , γ , and δ are each a positive number.

[0039] The tone of each of the first and fourth subpixels located in the first column in each pixel of a four-color liquid crystal display device (i.e., a liquid crystal display device having pixels each composed of first to fourth subpixels having four different colors, respectively, arranged in a two-by-two matrix) that falls on part of a character

edge is determined with a higher degree of contribution of the tone Tx of the subpixel located in the first column in each pixel of a three-color liquid crystal display device, and the tone of each of the second and third subpixels located in the second column in each pixel of the four-color liquid crystal display is determined with a higher degree of contribution of the tone Tz of the subpixel located in the third column in each pixel of the three-color liquid crystal display device. This makes it possible to produce an appropriate antialiasing effect on a font displayed on the four-color liquid crystal display device.

[0040] The liquid crystal display device according to the present invention can also be configured such that $Ka/Kb = Kc/Kd = Ke/Kf = Kg/Kh = 1/2$.

[0041] The liquid crystal display device according to the present invention can also be configured such that $Ka = Kc = Ke = Kg = 0$ and $Kb = Kd = Kf = Kh = 1$.

[0042] A liquid crystal display device according to the present invention is a liquid crystal display device including: pixels each composed of first to fourth subpixels having four different colors, respectively, the first to fourth subpixels being arranged in four columns of stripe, the first subpixel being placed in the first column, the second subpixel being placed in the second column, the third subpixel being placed in the third column, the fourth subpixel being placed in the fourth column, in displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three subpixels having three different colors, respectively, the three subpixels being arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz, the liquid crystal display device specifying, regarding the predetermined pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times Kb + Ty \times Ka) = P$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Tx \times Kc + Ty \times Kd) = Q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (Ty \times Ke + Tz \times Kf) = V$, and that the fourth subpixel takes on a tone which is obtained by performing rounding on $\delta \times (Ty \times Kg + Tz \times Kh) = U$, where $0 \leq Ka < Kb \leq 1$, $0 \leq Kc \leq 1$, $0 \leq Kd \leq 1$, $0 \leq Ke \leq 1$, $0 \leq Kf \leq 1$, $0 \leq Kg < Kh \leq 1$, and α , β , γ , and δ are each a positive number.

[0043] The tone of the first subpixel located in the first column in each pixel of a four-color liquid crystal display device (i.e., a liquid crystal display device having pixels each composed of first to fourth subpixels having four different colors, respectively, arranged in stripes) that falls on part of a character edge is determined with a higher degree of contribution of the tone Tx of the subpixel located in the first column in each pixel of a three-color liquid crystal display device, and the tone of the fourth subpixels located in the fourth column in each pixel of the four-color liquid crystal display is determined

with a higher degree of contribution of the tone Tz of the subpixel located in the third column in each pixel of the three-color liquid crystal display device. This makes it possible to produce an appropriate antialiasing effect on a font displayed on the four-color liquid crystal display device.

[0044] The liquid crystal display device according to the present invention can also be configured such that $KA = KG = 0$, $KB = KH = 1$, and $KC/KD = KE/KF = 1/2$.

[0045] The liquid crystal display device according to the present invention can also be configured such that the four colors are red, green, blue, and white, and the three colors are red, green, and blue.

[0046] The liquid crystal display device according to the present invention can also be configured such that the font is Clear Type (registered trademark).

[0047] The liquid crystal display device according to the present invention can also be configured such that of the three subpixels arranged in three columns of stripe, the subpixel in the first column is of the same color as the first subpixel, the subpixel in the second column is of the same color as the second subpixel, and the subpixel in the third column is of the same color as the third subpixel.

[0048] The liquid crystal display device according to the present invention can also be configured such that in displaying a font specified, regarding a pixel not falling on a character edge, that the subpixel in the first column takes on a tone TX, that the subpixel in the second column takes on a tone TY, and that the subpixel in the third column takes on a tone TZ, the liquid crystal display device specifies, for the pixel not falling on a character edge, that the first subpixel takes on a tone which is obtained by performing rounding on $(j \times TX) \cdot TM = X$, that the second subpixel takes on a tone which is obtained by performing rounding on $(j \times TY) \cdot TM = Y$, that the third subpixel takes on a tone which is obtained by performing rounding on $(j \times TZ) \cdot TM = Z$, and that the second subpixel takes on a tone TM, where $1 \leq j \leq 2$ and the tone TM is the smallest tone among the tones TX, TY, and TZ.

[0049] The liquid crystal display device according to the present invention can also be configured such that $\alpha = \beta = \gamma = \delta = 1$.

[0050] The liquid crystal display device according to the present invention can also be configured such that when the first to fourth subpixels displays identical tones with a luminance ratio of $L1:L2:L3:L4$, $\alpha = 2 \times L4/(L1 + L4)$, $\beta = 2 \times L3/(L2 + L3)$, $\gamma = 2 \times L2/(L2 + L3)$, and $\delta = 2 \times L1/(L1 + L4)$.

[0051] The liquid crystal display device according to the present invention can also be configured such that the first to fourth subpixels are red, green, blue, and white, respectively.

[0052] The liquid crystal display device according to the present invention can also be configured such that the rounding is rounding down to a predetermined decimal place or rounding off a predetermined decimal place.

[0053] A method for displaying a font on a liquid crystal

display device according to the present invention is a method for displaying a font on a liquid crystal display device including pixels each composed of first to fourth subpixels having four different colors, respectively, the first to fourth subpixels being arranged in a two-by-two matrix, the first subpixel being placed in the first row and the first column, the second subpixel being placed in the first row and the second column, the third subpixel being placed in the second row and the second column, the fourth subpixel being placed in the second row and the first column, the method including the step of, in displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three subpixels having three different colors, respectively, the three subpixels being arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz, specifying, regarding the predetermined pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times Kb + Ty \times Ka) = p$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Ty \times Kc + Tz \times Kd) = q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (Ty \times Ke + Tz \times Kf) = v$, and that the fourth subpixel takes on a tone which is obtained by performing rounding on $\delta \times (Tx \times Kh + Ty \times Kg) = u$, where $0 \leq Ka < Kb \leq 1$, $0 \leq Kc < Kd \leq 1$, $0 \leq Ke < Kf \leq 1$, $0 \leq Kg < Kh \leq 1$, and α , β , γ , and δ are each a positive number.

[0054] A method for displaying a font on a liquid crystal display device according to the present invention is a method for displaying a font on a liquid crystal display device including pixels each composed of first to fourth subpixels having four different colors, respectively, the first to fourth subpixels being arranged in four columns of stripe, the first subpixel being placed in the first column, the second subpixel being placed in the second column, the third subpixel being placed in the third column, the fourth subpixel being placed in the fourth column, the method including the step of, in displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three subpixels having three different colors, respectively, the three subpixels being arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz, specifying, regarding the predetermined pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times Kb + Ty \times Ka) = P$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Tx \times Kc + Ty \times Kd) = Q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (Ty \times Ke + Tz \times Kf) = V$, and that the fourth subpixel takes on a tone

which is obtained by performing rounding on $\delta \times (Ty \times KG + Tz \times KH) = U$, where $0 \leq KA < KB \leq 1$, $0 \leq KC \leq 1$, $0 \leq KD \leq 1$, $0 \leq KE \leq 1$, $0 \leq KF \leq 1$, $0 \leq KG < KH \leq 1$, and α , β , γ , and δ are each a positive number.

[0055] The present invention is not limited to the description of the embodiments above. An embodiment based on a proper alteration of the embodiment or on a proper combination of the embodiments is encompassed in the embodiments of the present invention.

Industrial Applicability

[0056] A liquid crystal display device is suitably applicable, for example, to electronic books, cellular phones, laptop PCs, etc.

Reference Signs List

[0057]

Tx to Tz	Tone of RGB data
TX to TZ	Tone of RGB data
P1 to P6	Particular pixel
1	Liquid crystal display device
2	Display control circuit
5	Liquid crystal panel
6	Data conversion circuit

Claims

1. A liquid crystal display device comprising:

pixels each composed of first to fourth subpixels having four different colors, respectively, the first to fourth subpixels being arranged in a two-by-two matrix, the first subpixel being placed in the first row and the first column, the second subpixel being placed in the first row and the second column, the third subpixel being placed in the second row and the second column, the fourth subpixel being placed in the second row and the first column,

in displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three subpixels having three different colors, respectively, the three subpixels being arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz,

said liquid crystal display device specifying, regarding the predetermined pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times Kb + Ty \times$

$Ka) = p$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Ty \times Kc + Tz \times Kd) = q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (Ty \times Ke + Tz \times Kf) = v$, and that the fourth subpixel takes on a tone which is obtained by performing rounding on $\delta \times (Tx \times Kh + Ty \times Kg) = u$,

where $0 \leq Ka < Kb \leq 1$, $0 \leq Kc < Kd \leq 1$, $0 \leq Ke < Kf \leq 1$, $0 \leq Kg < Kh \leq 1$, and α , β , γ , and δ are each a positive number.

2. The liquid crystal display device as set forth in claim 1, wherein $Ka/Kb = Kc/Kd = Ke/Kf = Kg/Kh = 1/2$.

3. The liquid crystal display device as set forth in claim 1, wherein $Ka = Kc = Ke = Kg = 0$ and $Kb = Kd = Kf = Kh = 1$.

4. A liquid crystal display device comprising:

pixels each composed of first to fourth subpixels having four different colors, respectively, the first to fourth subpixels being arranged in four columns of stripe, the first subpixel being placed in the first column, the second subpixel being placed in the second column, the third subpixel being placed in the third column, the fourth subpixel being placed in the fourth column,

in displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three subpixels having three different colors, respectively, the three subpixels being arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz,

said liquid crystal display device specifying, regarding the predetermined pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times KB + Ty \times KA) = P$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Tx \times KC + Ty \times KD) = Q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (Ty \times KE + Tz \times KF) = V$, and that the fourth subpixel takes on a tone which is obtained by performing rounding on $\delta \times (Ty \times KG + Tz \times KH) = U$, where $0 \leq KA < KB \leq 1$, $0 \leq KC \leq 1$, $0 \leq KD \leq 1$, $0 \leq KE \leq 1$, $0 \leq KF \leq 1$, $0 \leq KG < KH \leq 1$, and α , β , γ , and δ are each a positive number.

5. The liquid crystal display device as set forth in claim 4, wherein $KA = KG = 0$, $KB = KH = 1$, and KC/KD

$$= KE/KF = 1/2.$$

6. The liquid crystal display device as set forth in any one of claims 1 to 5, wherein the four colors are red, green, blue, and white, and the three colors are red, green, and blue. 5
7. The liquid crystal display device as set forth in any one of claims 1 to 6, wherein the font is Clear Type (registered trademark) . 10
8. The liquid crystal display device as set forth in any one of claims 1 to 7, wherein of the three subpixels arranged in three columns of stripe, the subpixel in the first column is of the same color as the first subpixel, the subpixel in the second column is of the same color as the second subpixel, and the subpixel in the third column is of the same color as the third subpixel. 15
9. The liquid crystal display device as set forth in claim 8, wherein in displaying a font specified, regarding a pixel not falling on a character edge, that the subpixel in the first column takes on a tone TX, that the subpixel in the second column takes on a tone TY, and that the subpixel in the third column takes on a tone TZ, 20
the liquid crystal display device specifies, regarding the pixel not falling on a character edge, that the first subpixel takes on a tone which is obtained by performing rounding on $(j \times TX) - TM = X$, that the second subpixel takes on a tone which is obtained by performing rounding on $(j \times TY) - TM = Y$, that the third subpixel takes on a tone which is obtained by performing rounding on $(j \times TZ) - TM = Z$, and that the second subpixel takes on a tone TM, 25
where $1 \leq j \leq 2$ and the tone TM is the smallest tone among the tones TX, TY, and TZ. 30
10. The liquid crystal display device as set forth in any one of claims 1 to 9, wherein $\alpha = \beta = \gamma = \delta = 1$. 35
11. The liquid crystal display device as set forth in claim 1, wherein when the first to fourth subpixels displays identical tones with a luminance ratio of L1:L2:L3:L4, $\alpha = 2 \times L4/(L1 + L4)$, $\beta = 2 \times L3/(L2 + L3)$, $\gamma = 2 \times L2/(L2 + L3)$, and $\delta = 2 \times L1/(L1 + L4)$. 40
12. The liquid crystal display device as set forth in claim 6, wherein the first to fourth subpixels are red, green, blue, and white, respectively. 45
13. The liquid crystal display device as set forth in any one of claims 1 to 12, wherein the rounding is rounding down to a predetermined decimal place or rounding off a predetermined decimal place. 50
14. A method for displaying a font on a liquid crystal dis- 55

play device including pixels each composed of first to fourth subpixels having four different colors, respectively, the first to fourth subpixels being arranged in a two-by-two matrix, the first subpixel being placed in the first row and the first column, the second subpixel being placed in the first row and the second column, the third subpixel being placed in the second row and the second column, the fourth subpixel being placed in the second row and the first column, the method comprising the step of, in displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three subpixels having three different colors, respectively, the three subpixels being arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz, specifying, regarding the predetermined pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times Kb + Ty \times Ka) = p$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Ty \times Kc + Tz \times Kd) = q$, that the third subpixel takes on a tone which is obtained by performing rounding on $\gamma \times (Ty \times Ke + Tz \times Kf) = v$, and that the fourth subpixel takes on a tone which is obtained by performing rounding on $\delta \times (Tx \times Kh + Ty \times Kg) = u$, 5
where $0 \leq Ka < Kb \leq 1$, $0 \leq Kc < Kd \leq 1$, $0 \leq Ke < Kf \leq 1$, $0 \leq Kg < Kh \leq 1$, and α , β , γ , and δ are each a positive number. 10

15. A method for displaying a font on a liquid crystal display device including pixels each composed of first to fourth subpixels having four different colors, respectively, the first to fourth subpixels being arranged in four columns of stripe, the first subpixel being placed in the first column, the second subpixel being placed in the second column, the third subpixel being placed in the third column, the fourth subpixel being placed in the fourth column, 15
the method comprising the step of, in displaying a font (i) subjected to subpixel rendering premised on a pixel composed of three subpixels having three different colors, respectively, the three subpixels being arranged in three columns of stripe, and (ii) specified, regarding a predetermined pixel falling on part of a character edge, that the subpixel in the first column takes on a tone Tx, that the subpixel in the second column takes on a tone Ty, and that the subpixel in the third column takes on a tone Tz, specifying, regarding the predetermined pixel, that the first subpixel takes on a tone which is obtained by performing rounding on $\alpha \times (Tx \times KB + Ty \times KA) = P$, that the second subpixel takes on a tone which is obtained by performing rounding on $\beta \times (Tx \times KC + Ty \times KD) = Q$, that the third subpixel takes on a tone which is 20

obtained by performing rounding on $\gamma \times (Ty \times KE + Tz \times KF) = V$, and that the fourth subpixel takes on a tone which is obtained by performing rounding on $\delta \times (Ty \times KG + Tz \times KH) = U$, where $0 \leq KA < KB \leq 1$, $0 \leq KC \leq 1$, $0 \leq KD \leq 1$, $0 \leq KE \leq 1$, $0 \leq KF \leq 1$, $0 \leq KG < KH \leq 1$, and α , β , γ , and δ are each a positive number.

10

15

20

25

30

35

40

45

50

55

FIG. 1

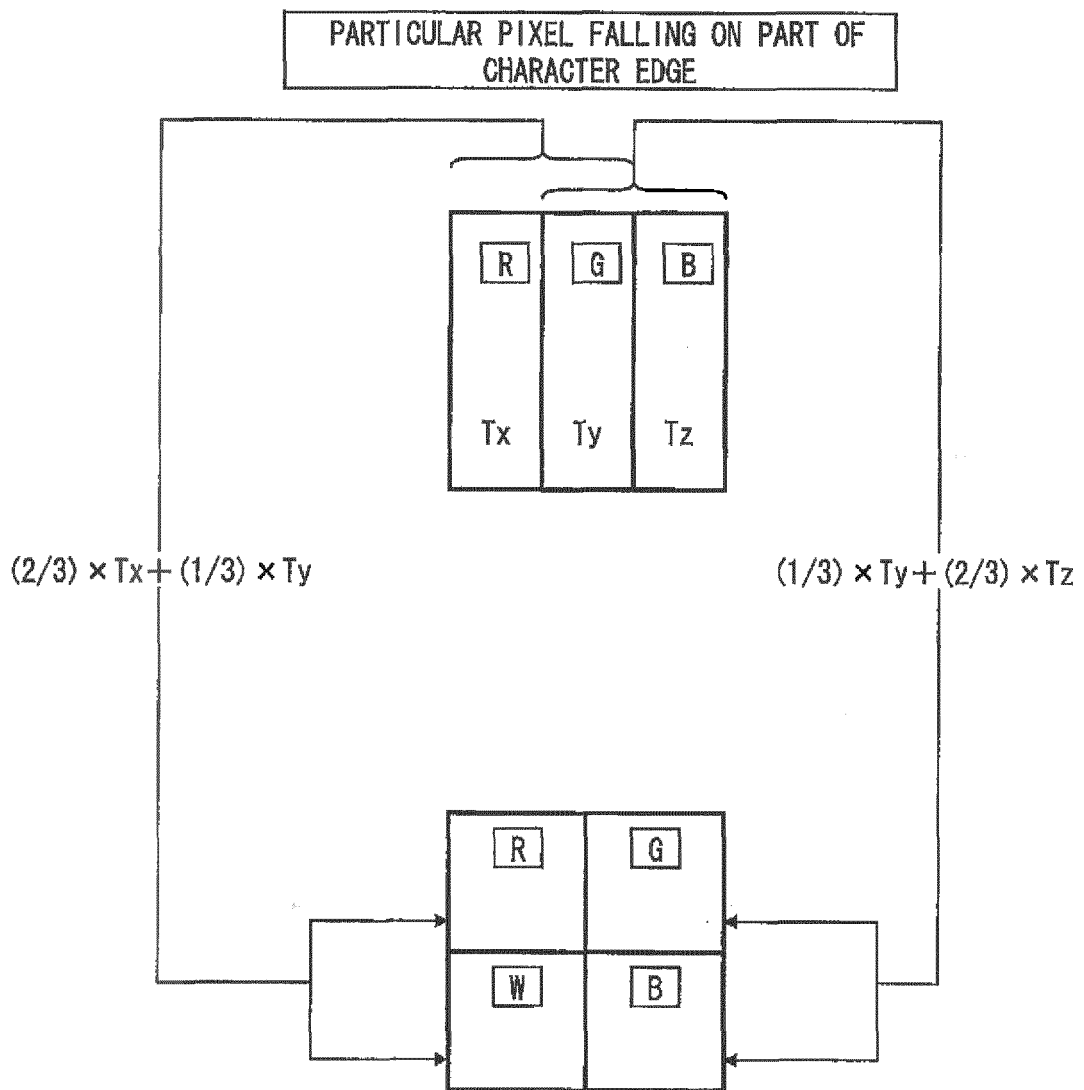


FIG. 2

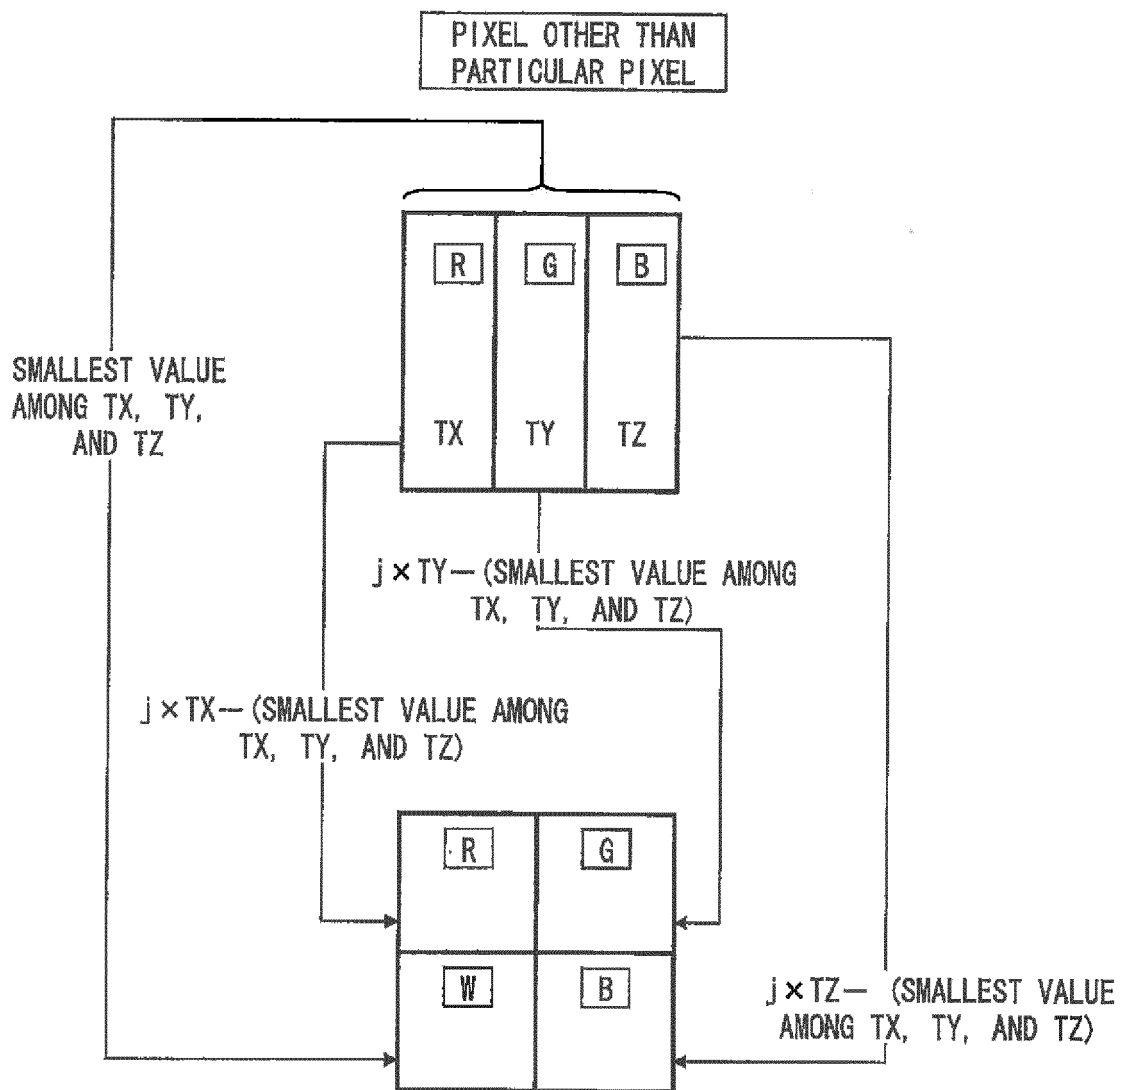


FIG. 3

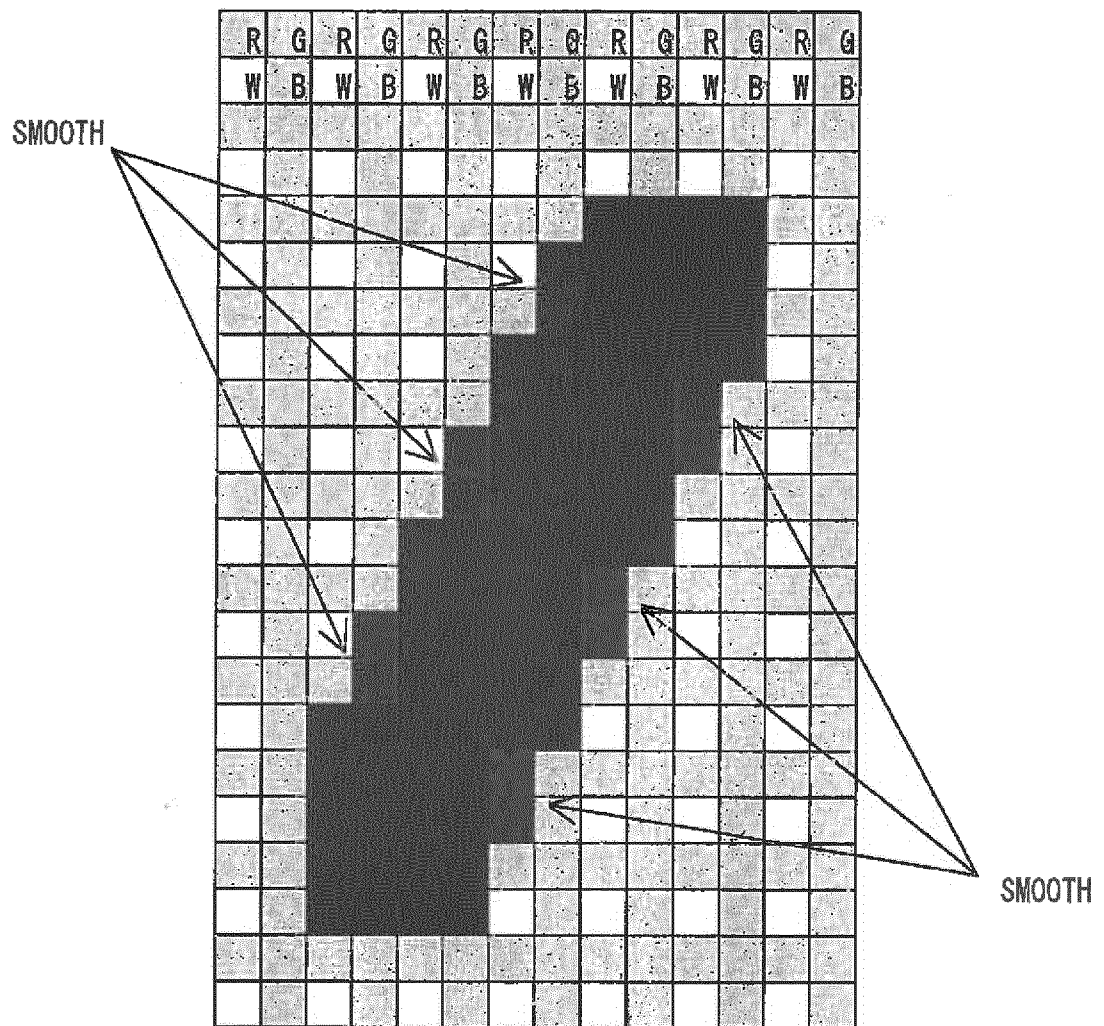


FIG. 4

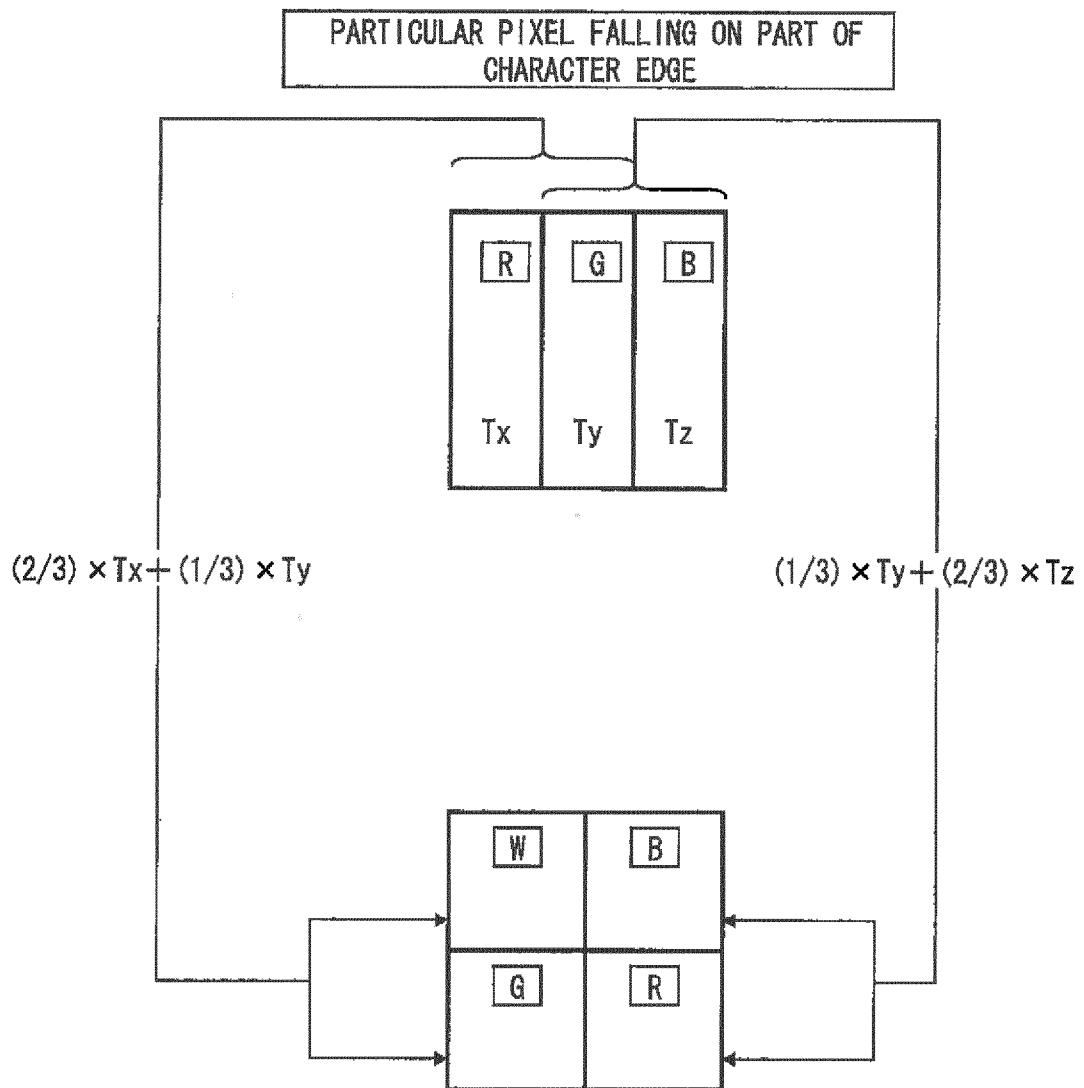


FIG. 5

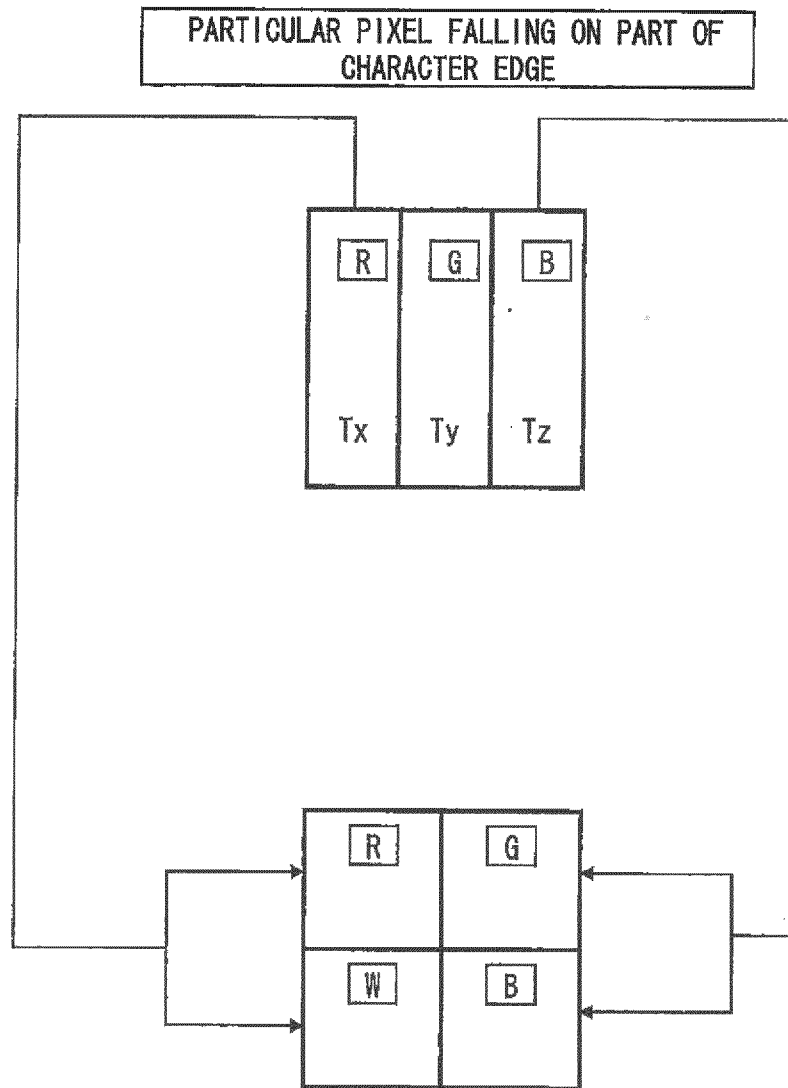


FIG. 6

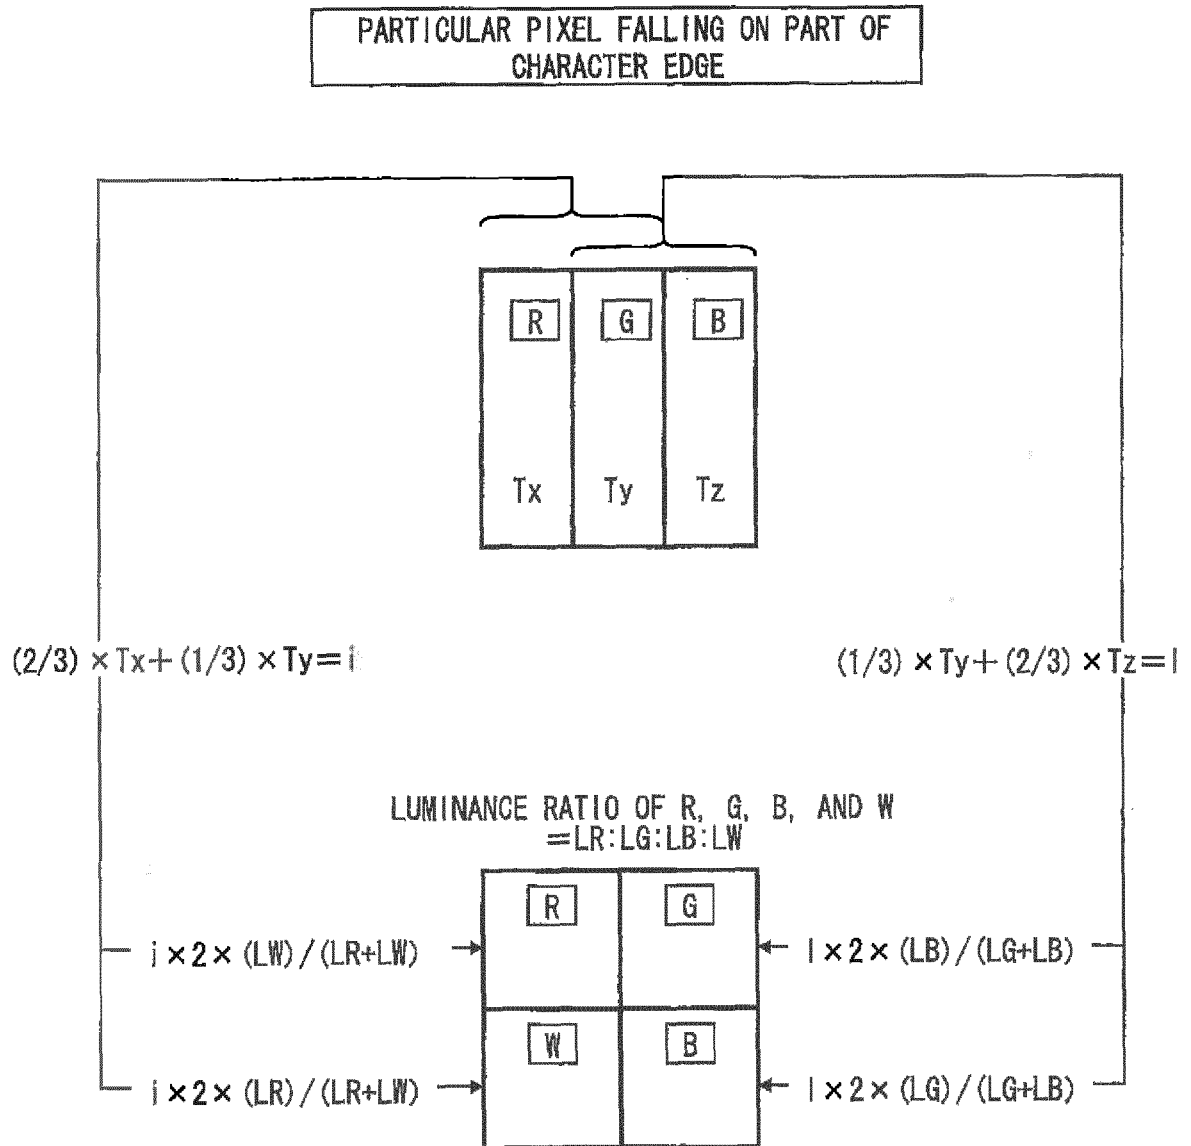


FIG. 7

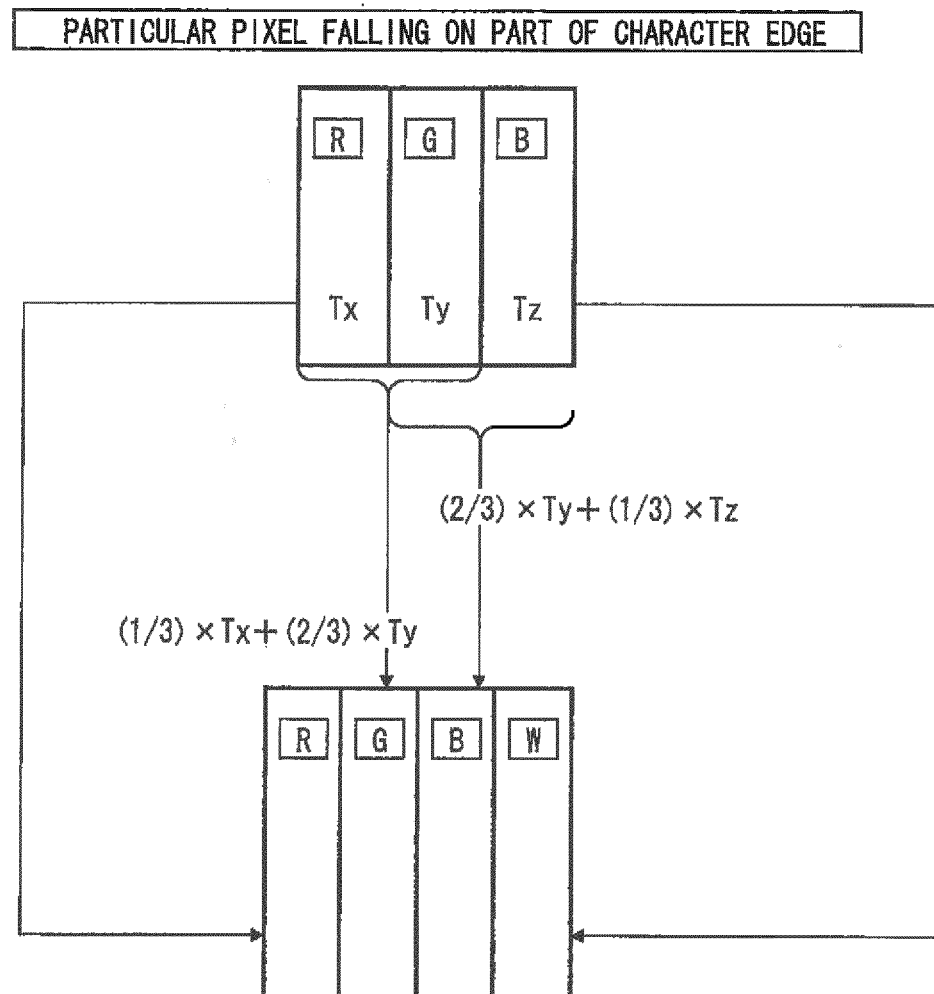


FIG. 8

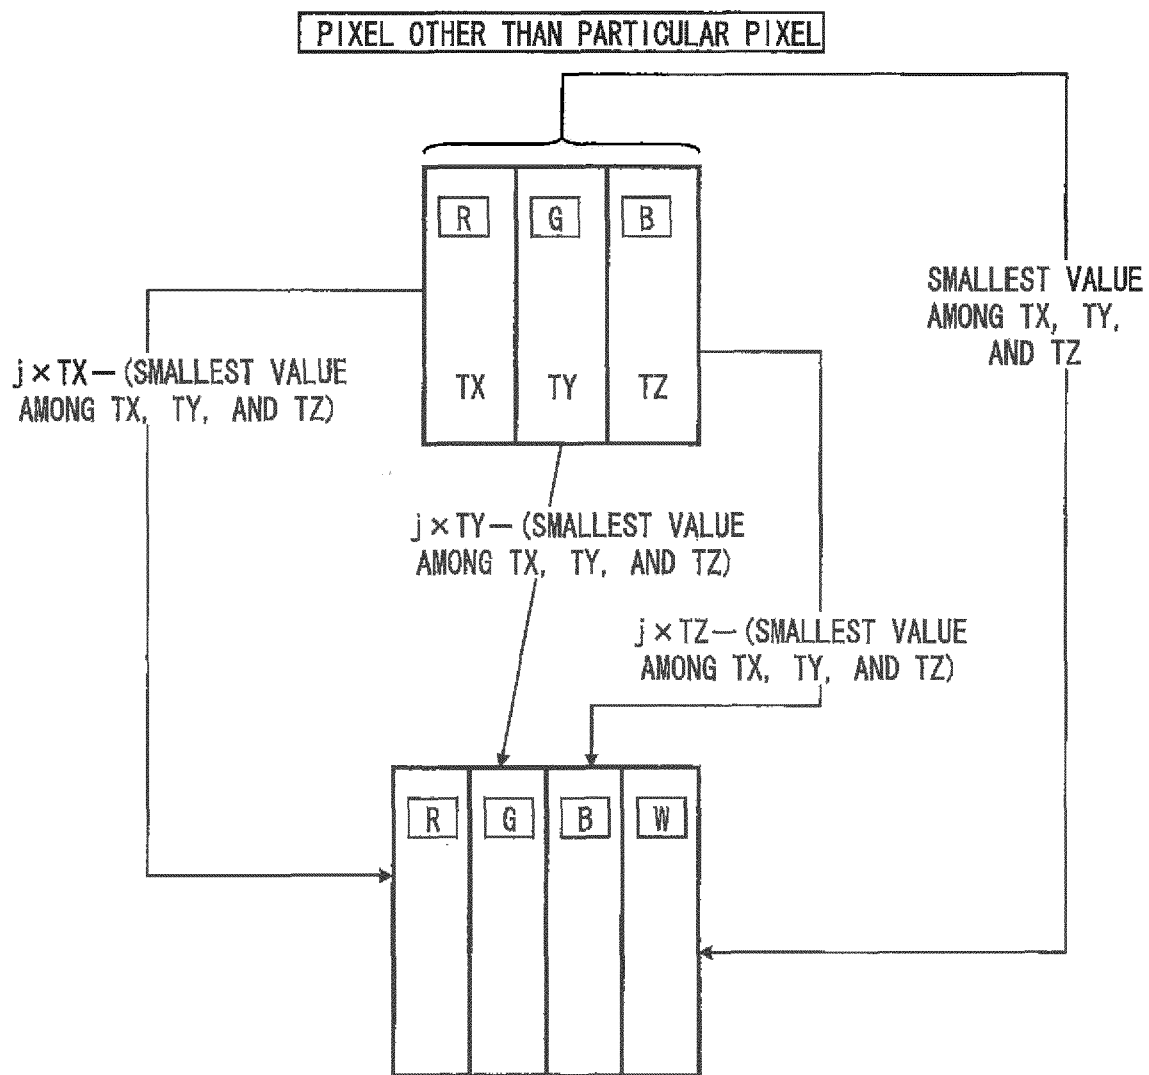


FIG. 9

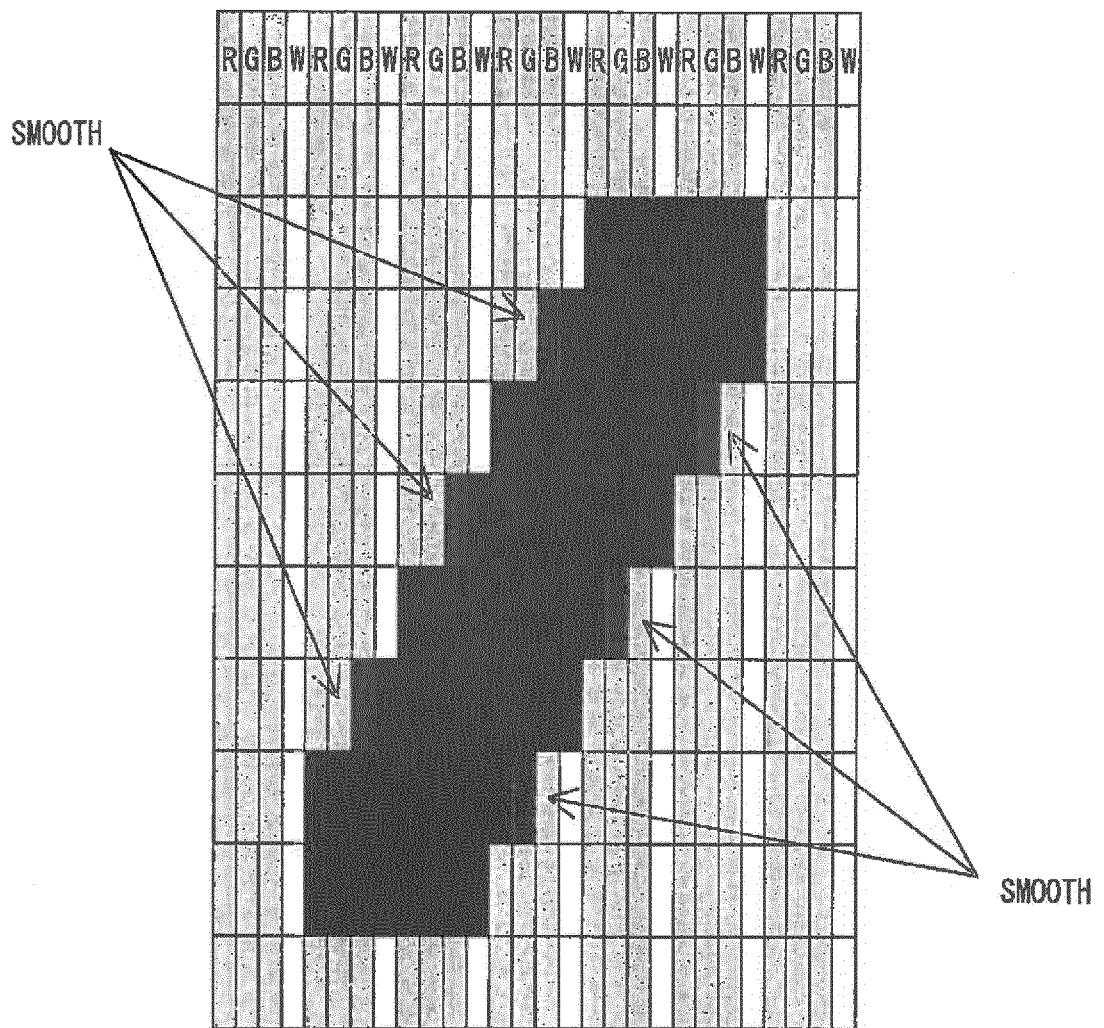


FIG. 10

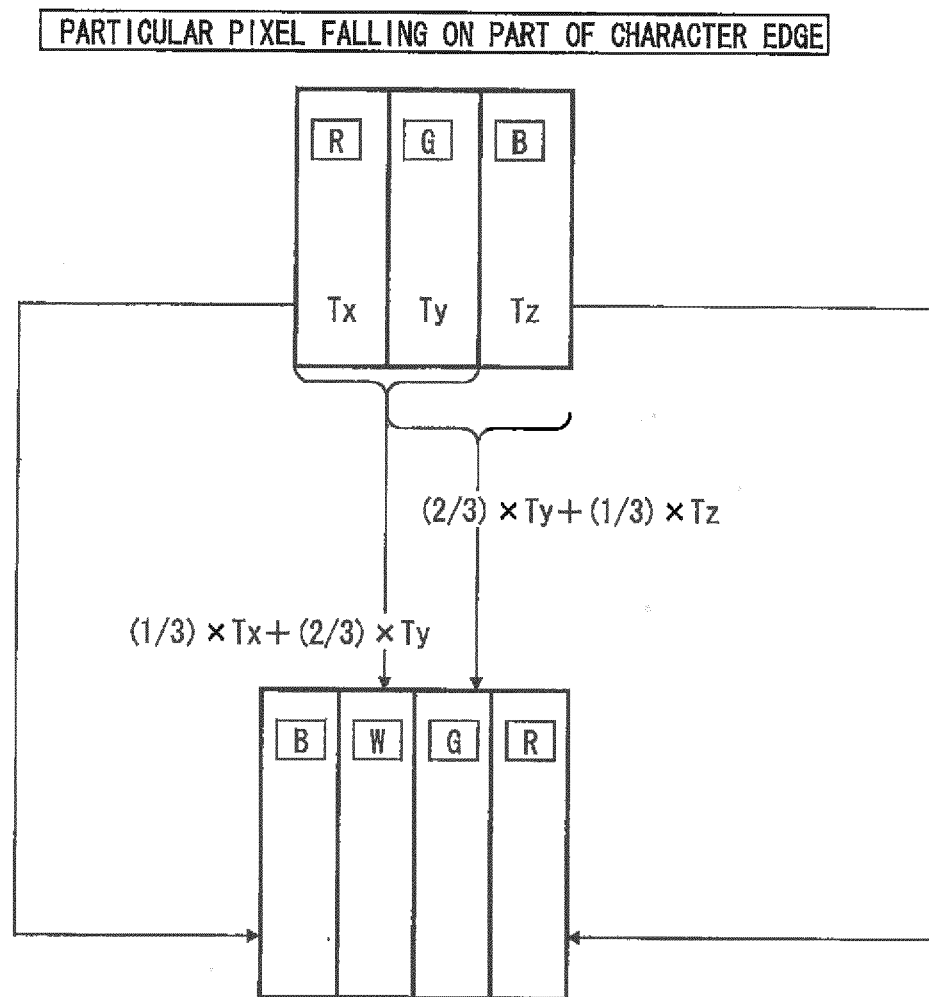


FIG. 11

PARTICULAR PIXEL FALLING ON PART OF CHARACTER EDGE

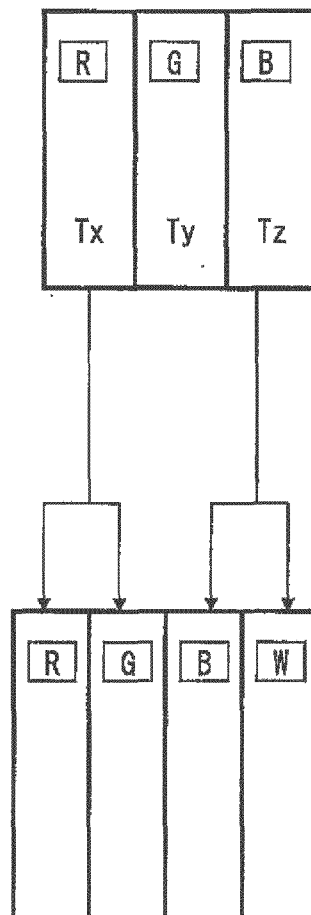


FIG. 12

PARTICULAR PIXEL FALLING ON PART OF CHARACTER EDGE

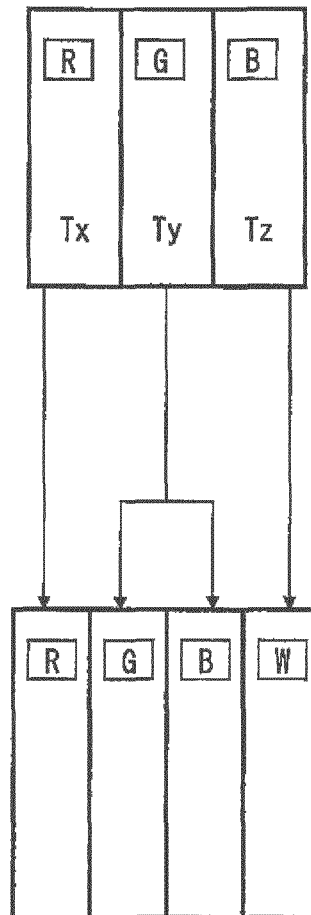


FIG. 13

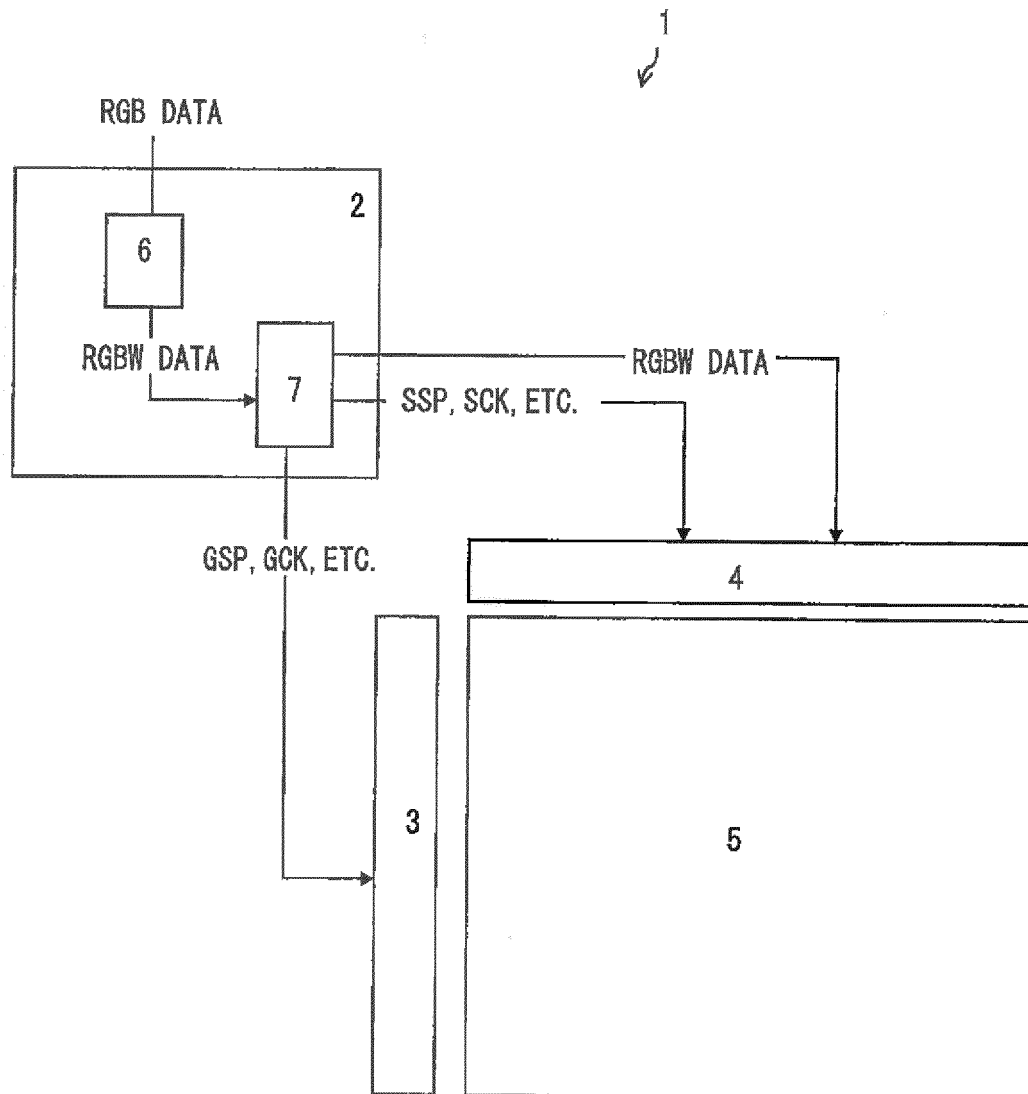


FIG. 14

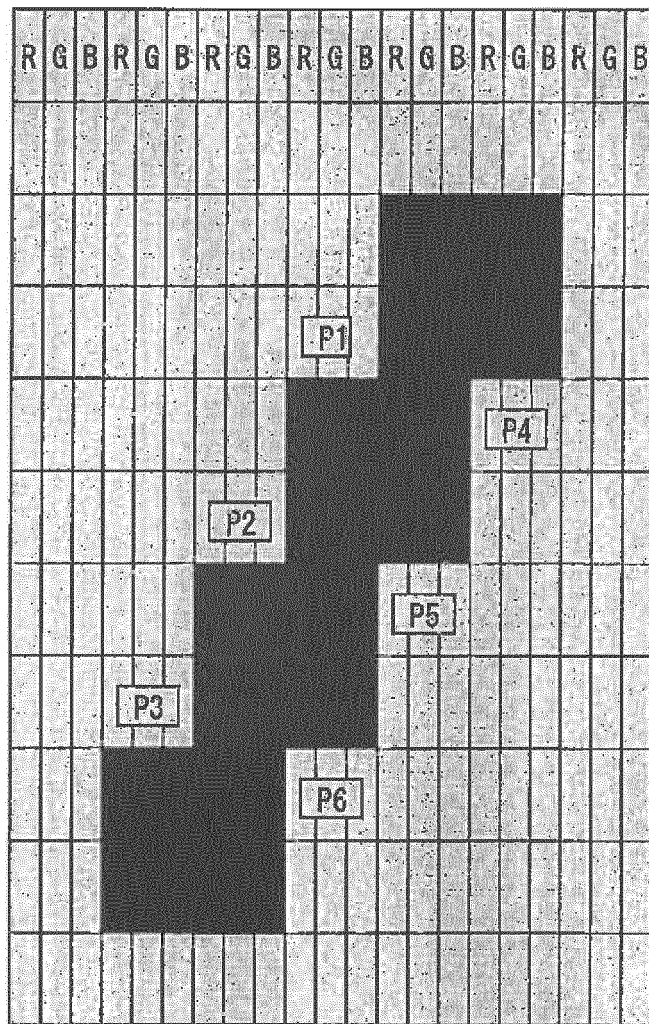


FIG. 15

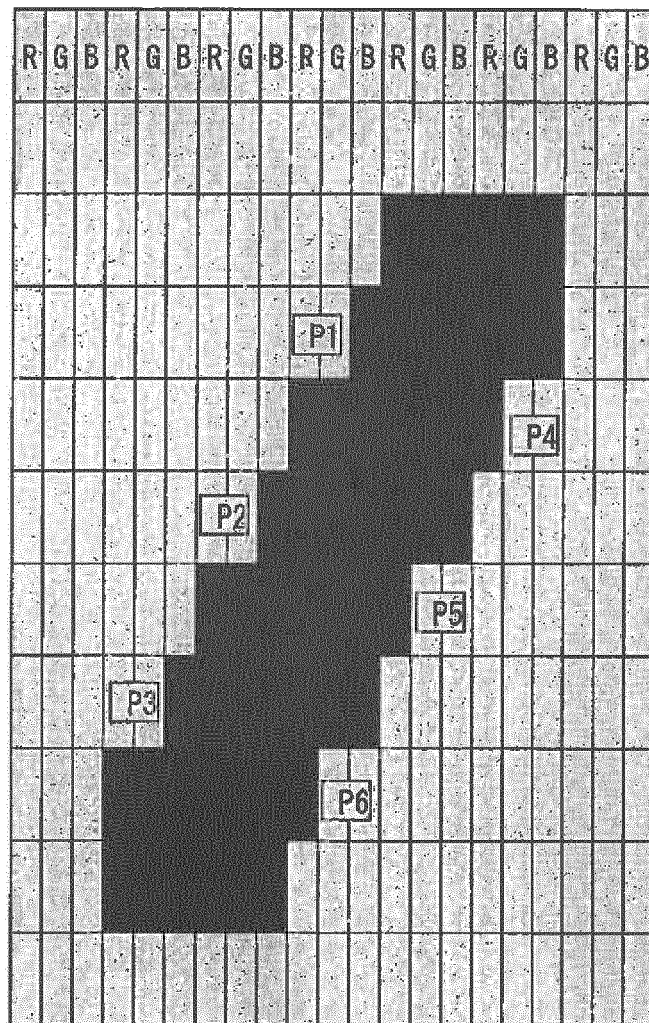


FIG. 16

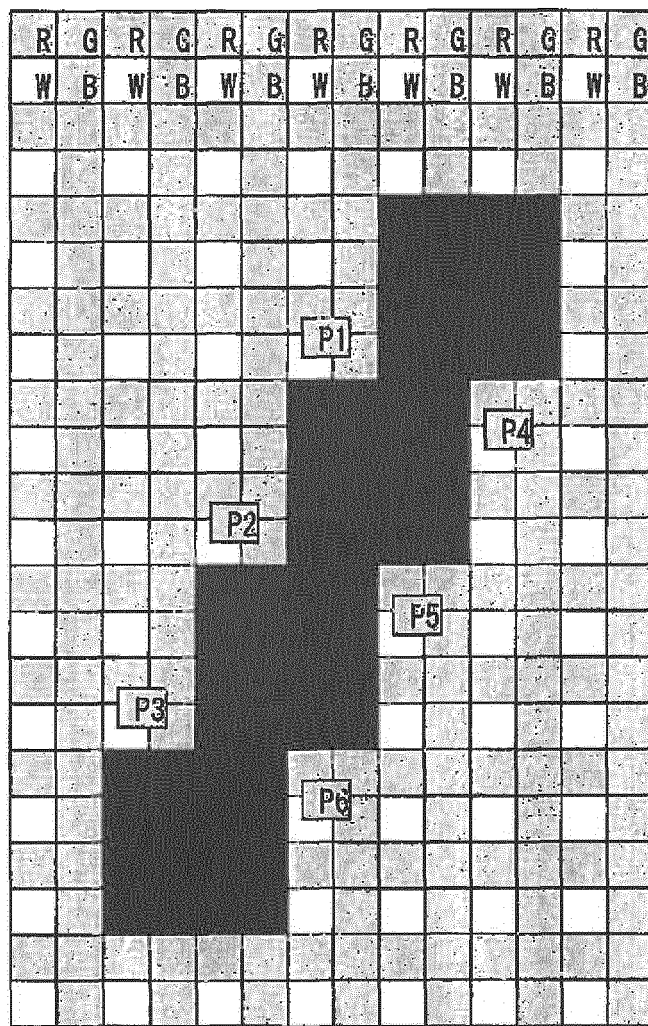


FIG. 17

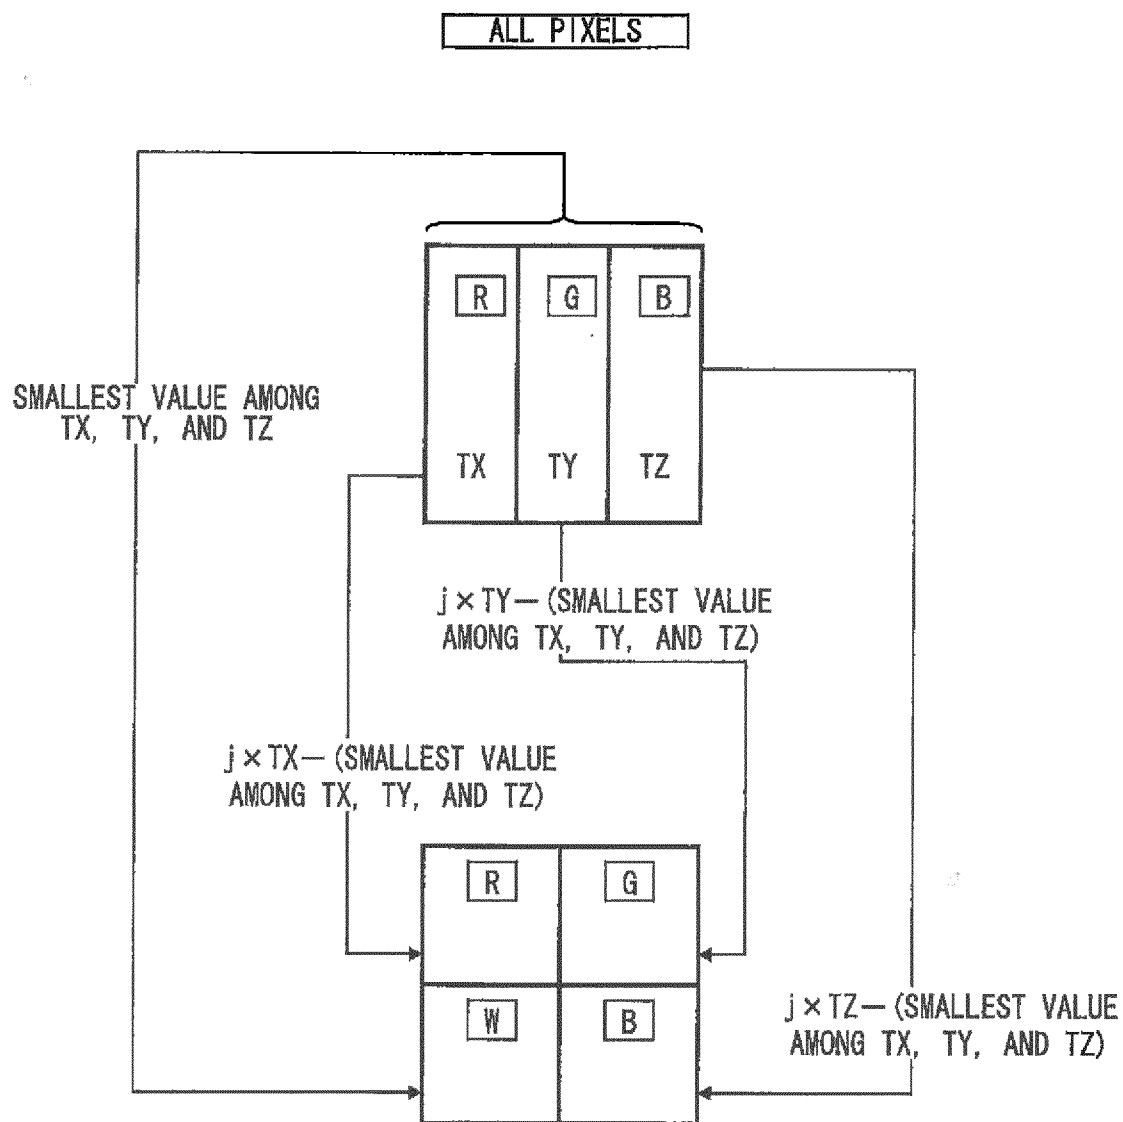


FIG. 18

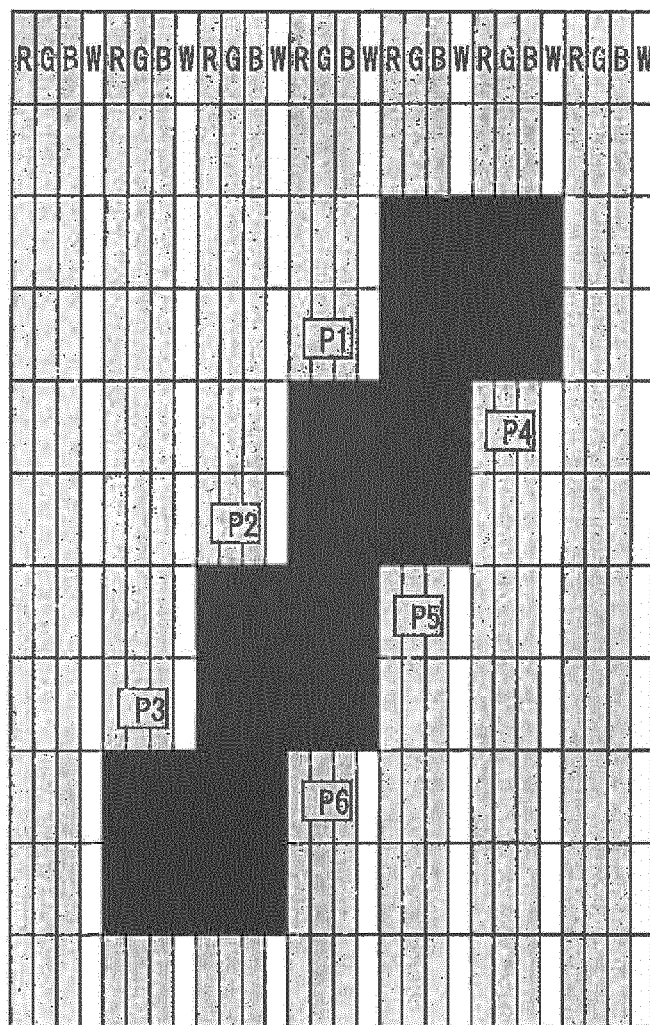


FIG. 19

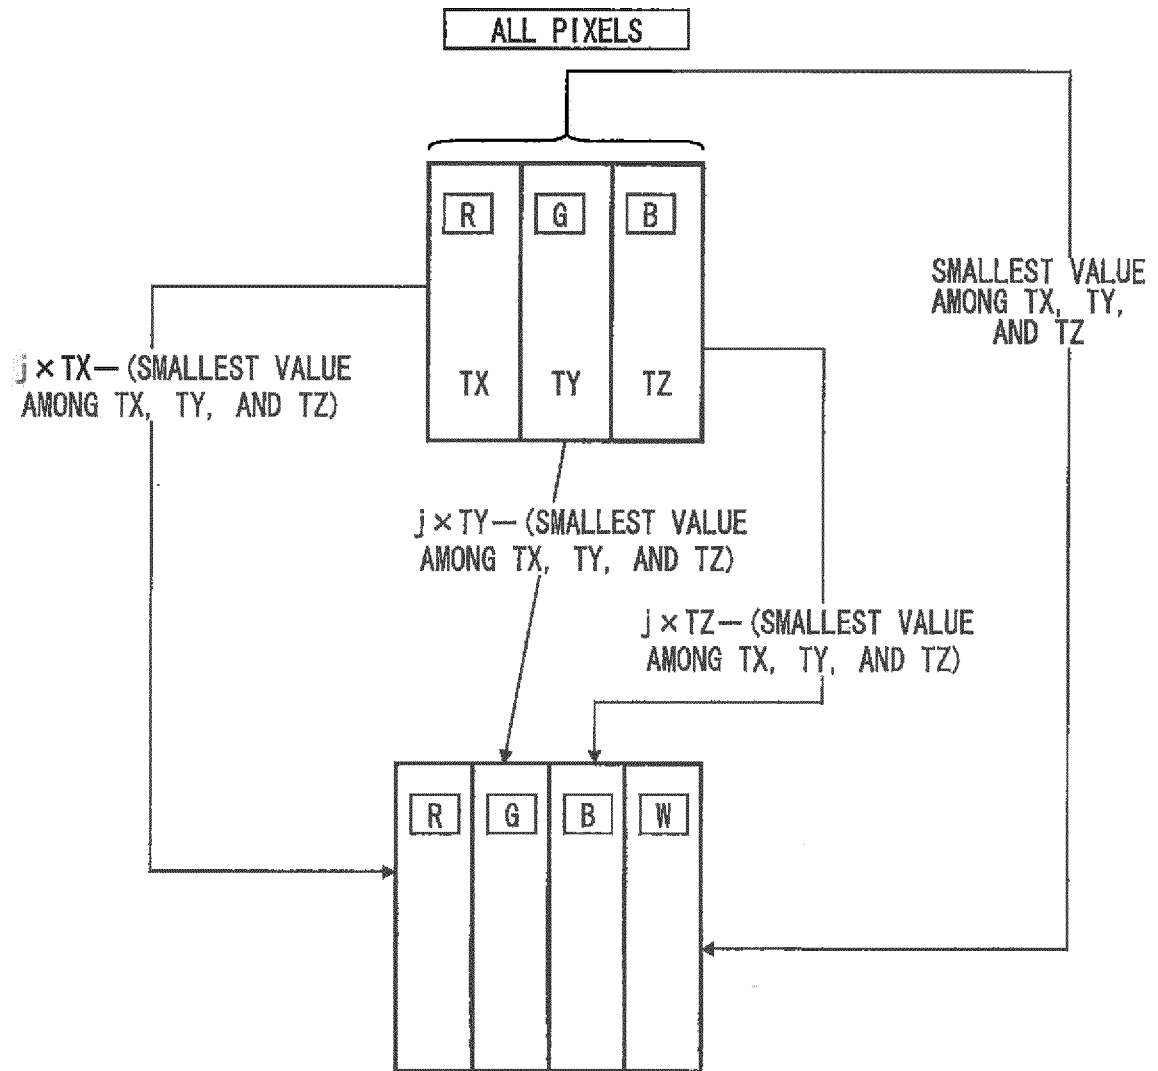


FIG. 20


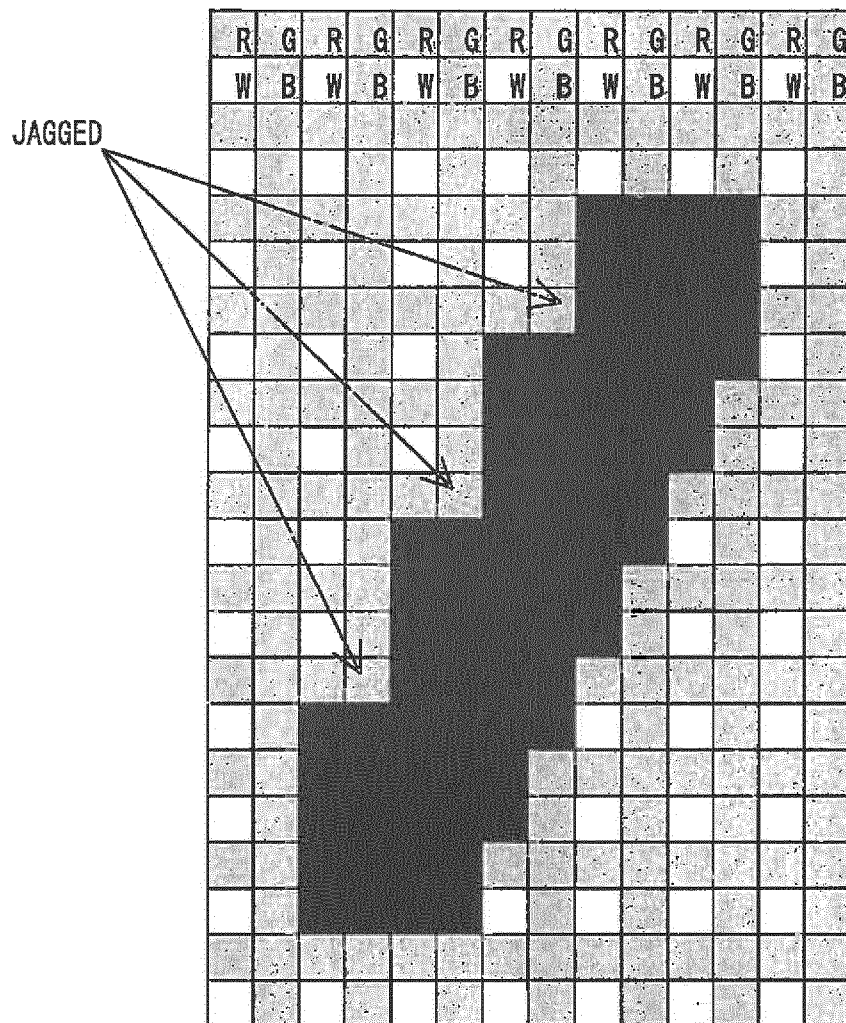


FIG. 21

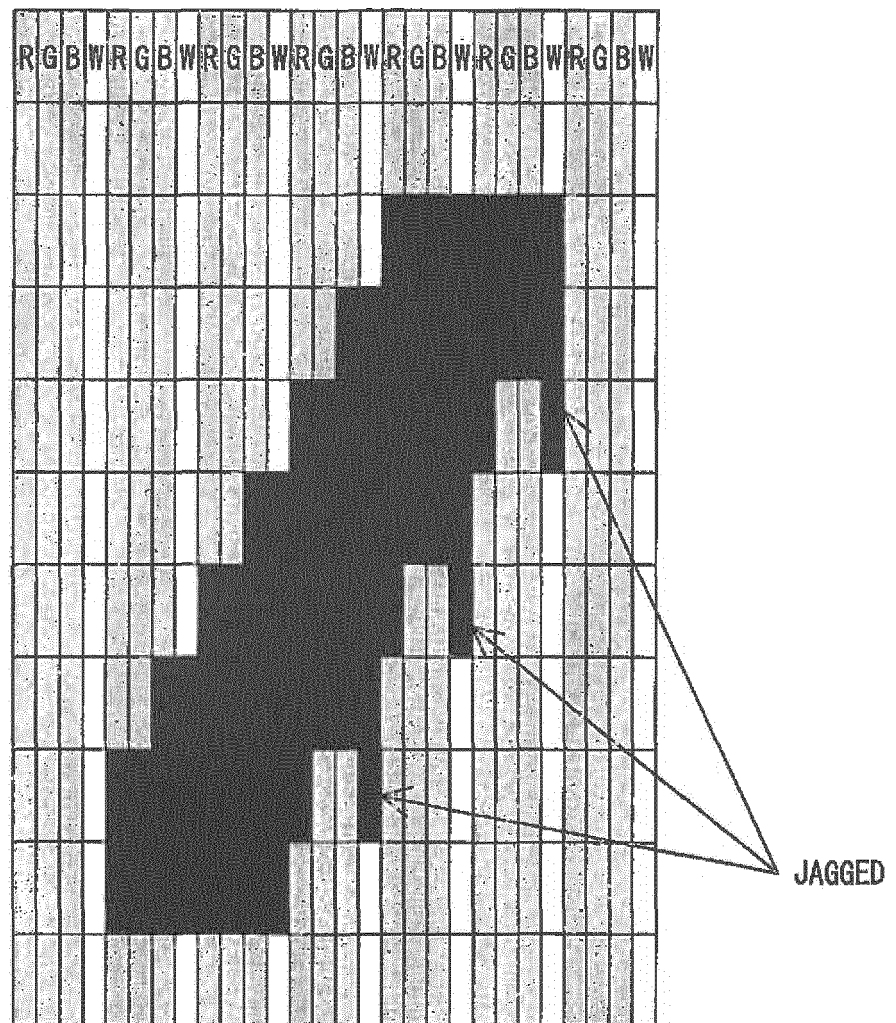

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2011/059204

A. CLASSIFICATION OF SUBJECT MATTER

G09G3/36(2006.01)i, G02F1/133(2006.01)i, G06T11/00(2006.01)i, G09G3/20(2006.01)i, G09G5/28(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G09G3/36, G02F1/133, G06T11/00, G09G3/20, G09G5/28

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2011

Kokai Jitsuyo Shinan Koho 1971-2011 Toroku Jitsuyo Shinan Koho 1994-2011

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2010-60907 A (Sharp Corp.), 18 March 2010 (18.03.2010), paragraphs [0039] to [0049]; fig. 2 to 3 (Family: none)	1-15
A	JP 2009-192887 A (Hitachi Displays, Ltd.), 27 August 2009 (27.08.2009), paragraphs [0011] to [0024]; fig. 1 to 5 & US 2009/0207182 A1 & CN 101510389 A	1-15
A	JP 2009-31384 A (Hitachi Displays, Ltd.), 12 February 2009 (12.02.2009), paragraphs [0004], [0038] to [0063]; fig. 8 to 10 & US 2009/0027410 A1	1-15

☒ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
06 July, 2011 (06.07.11)

Date of mailing of the international search report
19 July, 2011 (19.07.11)

Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2011/059204

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2004-4839 A (Microsoft Corp.), 08 January 2004 (08.01.2004), paragraphs [0022] to [0024]; fig. 3 & US 2003/0210834 A1 & EP 1363266 A2	1-15

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004004839 A [0010]

专利名称(译)	液晶显示装置和在液晶显示装置上显示字体的方法		
公开(公告)号	EP2560157A4	公开(公告)日	2013-11-27
申请号	EP2011768897	申请日	2011-04-13
[标]申请(专利权)人(译)	夏普株式会社		
申请(专利权)人(译)	夏普株式会社		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	INADA KEN		
发明人	INADA, KEN		
IPC分类号	G09G3/36 G02F1/133 G06T11/00 G09G3/20 G09G5/28 G09G5/02		
CPC分类号	G09G3/3607 G02F2201/52 G09G5/026 G09G5/28 G09G2300/0452 G09G2340/0457 G09G2340/06		
优先权	2010093445 2010-04-14 JP		
其他公开文献	EP2560157A1		
外部链接	Espacenet		

摘要(译)

四色液晶显示装置具有包含分别具有四种不同颜色的第一至第四子像素（下文中简称为“SP”）的像素，所述第一至第四子像素以二乘二矩阵排列，第一至第四SP被放置在第一行和第一列，第一行和第二列，第二行和第二列，以及第二行和第一列。在显示以由三个不同颜色的三个SP组成的像素为前提的子像素着色的字体（i），排列成三列条纹，并且（ii）指定，关于落在字符边缘的一部分上的预定像素，第一列中的SP采用音调Tx，第二列中的SP采用音调Ty，并且第三列中的SP采用音调Tz，液晶显示设备指定，用于预定像素，第一和第四SP中的每一个呈现通过在 $(Tx \times 2/3) + (Ty \times 1/3) = p$ 上执行舍入而获得的音调以及第二和第三SP中的每一个呈现的通过对 $(Ty \times 1/3) + (Tz \times 2/3) = v$ 进行舍入而获得的色调。这允许四色液晶显示装置适当地显示子像素着色字体（例如，Clear Type（注册商标））。