(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 3 588 481 A1

(12) EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:
01.01.2020 Bulletin 2020/01

(21) Application number: **17832725.0**

(22) Date of filing: **09.08.2017**

(51) Int Cl.:
G09G 3/3258 *(2016.01)* ***G09G 3/3208*** *(2016.01)*

(86) International application number:
PCT/CN2017/096532

(87) International publication number:
WO 2018/153032 (30.08.2018 Gazette 2018/35)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(30) Priority: **23.02.2017 CN 201710100112**

(71) Applicant: **BOE Technology Group Co., Ltd.**
Beijing 100015 (CN)

(72) Inventors:
- **CHEN, Yi**
  Beijing 100176 (CN)
- **HE, Min**
  Beijing 100176 (CN)

(74) Representative: **Potter Clarkson**
The Belgrave Centre
Talbot Street
Nottingham NG1 5GG (GB)

(54) OLED PIXEL COMPENSATION METHOD AND APPARATUS, AND DISPLAY DEVICE

(57) The present disclosure relates to a compensation method and a compensation apparatus for an OLED pixel and a display apparatus, which relates to the field of display technology. The compensation method for an OLED pixel includes: acquiring a threshold voltage of a driving transistor; acquiring a mobility of the driving transistor according to the threshold voltage of the driving transistor; and compensating the OLED pixel according to the mobility of the driving transistor. The present disclosure may achieve pixel compensation and improve image quality.

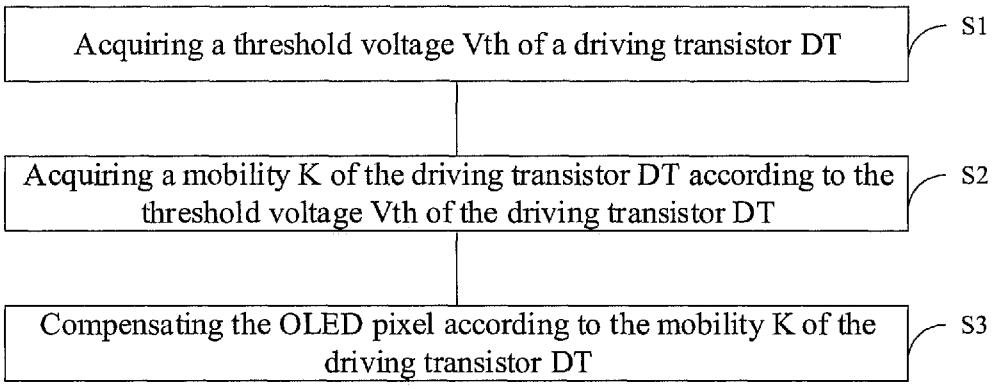

FIG. 2

EP 3 588 481 A1

Description

CROSS REFERENCE

[0001] The present application is based upon and claims priority to Chinese Patent Application No. 201710100112.8, filed on February 23, 2017, and the entire contents thereof are incorporated herein by reference.

TECHNICAL FIELD

[0002] The present disclosure relates to the field of display technology, and more particularly, to a compensation method and a compensation apparatus for an OLED pixel and a display apparatus.

BACKGROUND

[0003] An Organic Light Emitting Diode (OLED), as a current type light emitting device, has been widely used in high performance display field due to its advantages of self-luminous, fast response, wide viewing angle and being formable on a flexible substrate. According to a driving mode, the OLED may be classified into a passive matrix driving OLED (PMOLED) and an active matrix driving OLED (AMOLED). The AMOLED display is expected to become a next generation of flat panel display to replace an LCD (Liquid Crystal Display) due to its low manufacturing cost, high response speed, low power consumption, DC driving available for portable devices and wide operating temperature range.

[0004] In an existing OLED pixel, a driving transistor is usually made of semiconductor material such as amorphous silicon, polysilicon or metal oxide. However, limited by the manufacturing process, electrical parameters such as the threshold voltage Vth and the mobility K and the like of each driving transistor DT of the OLED pixel frequently fluctuate, thus causing that a current flowing through the OLED device changes with fluctuation of the threshold voltage Vth and the mobility K of the driving transistor DT, resulting in uneven luminance and affecting the display image quality.

[0005] It should be noted that, information disclosed in the above background portion is provided only for better understanding of the background of the present disclosure, and thus it may contain information that does not form the prior art known by those ordinary skilled in the art.

SUMMARY

[0006] An object of the present disclosure is to provide a compensation method and a compensation apparatus for an OLED pixel and a display apparatus.

[0007] Other features and advantages of the disclosure will become apparent from the following detailed description, or may be partly learned by practice of the present disclosure.

[0008] According to an aspect of the present disclosure, there is provided a compensation method for an OLED pixel, including:

acquiring a threshold voltage of a driving transistor;
acquiring a mobility of the driving transistor according to the threshold voltage of the driving transistor; and
compensating the OLED pixel according to the mobility of the driving transistor.

[0009] In an exemplary embodiment of the present disclosure, the acquiring a threshold voltage of a driving transistor includes:

applying a first driving voltage to a control terminal of the driving transistor to turn on the driving transistor;
detecting a critical voltage of a first terminal of the driving transistor when an output current of the driving transistor changes from non-zero to zero; and
acquiring the threshold voltage of the driving transistor according to the first driving voltage and the critical voltage.

[0010] In an exemplary embodiment of the present disclosure, the acquiring a threshold voltage of a driving transistor further includes:
setting an initial voltage of the first terminal of the driving transistor to zero while the first driving voltage is applied to the control terminal of the driving transistor.

[0011] In an exemplary embodiment of the present disclosure, the acquiring a threshold voltage of a driving transistor further includes:
increasing the voltage of the first terminal of the driving transistor through a charging capacitor before detecting the critical voltage of the first terminal of the driving transistor when the output current of the driving transistor changes from

non-zero to zero.

[0012] In an exemplary embodiment of the present disclosure, the acquiring a mobility of the driving transistor according to the threshold voltage of the driving transistor includes:

applying a second driving voltage to a control terminal of the driving transistor to turn on the driving transistor;
detecting a reference voltage of a first terminal of the driving transistor; and
acquiring the mobility of the driving transistor according to the reference voltage,
wherein a difference value between the second driving voltage and the threshold voltage of the driving transistor is at least ten times higher than the reference voltage.

[0013] In an exemplary embodiment of the present disclosure, the acquiring a mobility of the driving transistor according to the threshold voltage of the driving transistor further includes:
setting the voltage of the first terminal of the driving transistor to zero while the second driving voltage is applied to the control terminal of the driving transistor.

[0014] In an exemplary embodiment of the present disclosure, the acquiring a mobility of the driving transistor according to the threshold voltage of the driving transistor further includes:
increasing the voltage of the first terminal of the driving transistor through a charging capacitor before detecting the reference voltage of the first terminal of the driving transistor.

[0015] In an exemplary embodiment of the present disclosure, the compensating the OLED pixel according to the mobility of the driving transistor includes:
acquiring a compensation voltage according to the difference value between the second driving voltage and the threshold voltage of the driving transistor and the mobility of the driving transistor, so as to realize compensation for the OLED pixel.

[0016] In an exemplary embodiment of the present disclosure, the compensation voltage is a ratio of the difference value between the second driving voltage and the threshold voltage of the driving transistor to a square root of the mobility of the driving transistor.

[0017] In an exemplary embodiment of the present disclosure, a voltage is provided to a control terminal of the driving transistor by a data line through a first transistor, and a voltage is provided to a first terminal of the driving transistor by a detection line through a second transistor,
wherein the first transistor is turned on in response to a first scan signal and the second transistor is turned on in response to a second scan signal.
according to an aspect of the present disclosure, there is provided a compensation apparatus for an OLED pixel, including:
a threshold voltage acquiring circuit, configured to acquire a threshold voltage of a driving transistor;
a mobility acquiring circuit, configured to acquire a mobility of the driving transistor according to the threshold voltage of the driving transistor; and
a compensation circuit, configured to compensate the OLED pixel according to the mobility of the driving transistor.

[0018] According to an aspect of the present disclosure, there is provided a display apparatus, including the above pixel compensation apparatus.

[0019] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the present disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments consistent with the present disclosure and, together with the description, serve to explain the principles of the present disclosure. Apparently, the accompanying drawings in the following description are merely some embodiments of the present disclosure, and those skilled in the art may further derive other drawings based on these accompanying drawings without creative labor.

Fig. 1 schematically shows a structural schematic diagram of an OLED pixel unit in an exemplary embodiment of the present disclosure;
Fig. 2 schematically shows a flowchart of a compensation method for an OLED pixel in an exemplary embodiment of the present disclosure; and
Fig. 3 schematically shows a structural block diagram of a compensation apparatus for an OLED pixel in an exemplary embodiment of the present disclosure.

Reference numerals

[0021]

Data Line	data line
Sense Line	detection line
Switch Scan	first scan signal
Sense Scan	second scan signal
OVDD	first voltage signal terminal
OVSS	second voltage signal terminal
DT	driving transistor
T1	first transistor
T2	second transistor
C	charging capacitor

DETAILED DESCRIPTION

[0022] Example embodiments will now be described more fully with reference to the accompanying drawings. However, the example embodiments may be embodied in many forms and should not be construed as limited to the examples set forth herein; rather, these embodiments are provided to make the present disclosure more thorough and complete, and to fully convey the concepts of the example embodiments to those skilled in the art. The features, structures, or characteristics described herein may be combined in one or more embodiments in any suitable manner.

[0023] In addition, the drawings are merely schematic representations of the present disclosure and are not necessarily drawn to scale. The same reference numerals in the drawings denote the same or similar parts, and repetitive description thereof will be omitted. Some of the block diagrams shown in the drawings are functional entities and do not necessarily correspond to physically or logically separate entities. These functional entities may be implemented in a software form or implemented in one or more hardware modules or integrated circuits or implemented in different networks and/or processor devices and/or microcontroller devices.

[0024] The present exemplary embodiment provides a compensation method for an OLED pixel, for compensating a threshold voltage Vth and a mobility K of a driving transistor DT. Fig. 1 is a schematic structural diagram of an OLED pixel unit corresponding to the pixel compensation method. The OLED pixel unit includes: a driving transistor DT and an OLED device (i.e., an organic light emitting diode) connected to the driving transistor DT. A control terminal of the driving transistor DT is connected to a data line Data Line through a first transistor T1, a first terminal of the driving transistor DT is connected to a first voltage signal terminal OVDD, and a second terminal of the driving transistor DT is connected to a detection line Sense Line through a second transistor T2. The detection line Sense Line is further grounded via a charging capacitor C. The other terminal of the OLED device is connected to a second voltage signal terminal OVSS. In the embodiment, a control terminal of the first transistor T1 receives the first scan signal Switch Scan and a control terminal of the second transistor T2 receives the second scan signal Sense Scan.

[0025] Based on this, as shown in Fig. 2, the compensation method for an OLED pixel may include:

S1, acquiring a threshold voltage Vth of a driving transistor DT;
S2, acquiring a mobility K of the driving transistor DT according to the threshold voltage Vth of the driving transistor DT; and
S3, compensating the OLED pixel according to the mobility K of the driving transistor DT.

[0026] In the OLED pixel compensation method provided by the exemplary embodiment of the present disclosure, the threshold voltage Vth and the mobility K of the driving transistor DT are acquired and both of them are compensated when a driving voltage is set, to offset the influence of the threshold voltage Vth and the mobility K of the driving transistor DT on its output current Iout. In this way, the output current Iout of the driving transistor DT of each pixel unit tends to be consistent, so as to ensure uniformity of the display luminance and improve the display image quality.

[0027] It should be noted that, the driving transistor DT in the present exemplary embodiment may be an enhancement type transistor or a depletion type transistor, which is not specifically limited herein.

[0028] The OLED pixel compensation method in this exemplary embodiment will be described in detail below.

[0029] In step S1, a threshold voltage Vth of a driving transistor DT is acquired.

[0030] In this example embodiment, the threshold voltage Vth of the driving transistor DT may be acquired through following steps.

[0031] S11, a first driving voltage V1 is applied to a control terminal of the driving transistor DT to turn on the driving transistor DT, and at the same time, an initial voltage of the first terminal of the driving transistor DT is set to zero.

[0032] In the embodiment, the first driving voltage V1 may be provided by the data line Data Line through the first transistor T1, and in this case, the first transistor T1 should be turned on under control of the first scan signal Switch Scan. An initial voltage of the first terminal (i.e., the terminal connected to the second transistor T2) of the driving transistor DT may be provided by the detection line Sense Line through the second transistor T2, and in this case, the second

transistor T2 should be turned on under control of the second scan signal Sense Scan. In addition, a value of the first driving voltage V1 should be subject to being capable of fully turning on the driving transistor DT. It should be noted that, the reason to set the voltage of the first terminal of the driving transistor DT to zero is to eliminate the influence of the residual voltage on a detection result.

[0033] S12, a critical voltage Vsc of the first terminal of the driving transistor DT when an output current of the driving transistor DT changes from non-zero to zero is detected.

[0034] In this example embodiment, the critical voltage Vsc of the first terminal of the driving transistor DT may be obtained by reading a voltage signal of the detection line Sense Line.

[0035] Since the detection line Sense Line is grounded through the charging capacitor C, the voltage (i.e., a charging voltage of the second transistor T2) of the first terminal of the driving transistor DT will gradually increase as the output current of the driving transistor DT charges the charging capacitor C through the second transistor T2.

[0036] According to the I-V characteristic of the driving transistor DT, it can be seen that the output current of the driving transistor DT is:

$$Iout=K\times(Vgs-Vth)^2=K\times(Vg-Vs-Vth)^2=K\times(V1-Vs-Vth)^2;$$

wherein, K is the mobility of the driving transistor DT, Vg is the voltage of the control terminal of the driving transistor DT, Vs is the voltage of the first terminal of the driving transistor DT, and Vth is the threshold voltage of the driving transistor DT.

[0037] It can be seen that, when the voltage of the first terminal of the driving transistor DT rises to V1-Vth, the driving transistor DT is pinched off, the output current is 0, and at this time, the voltage of the first terminal of the driving transistor DT no longer changes, i.e., being the critical voltage Vsc. That is to say, the time when the output current of the driving transistor DT changes from non-zero to zero is the time when the voltage of the first terminal of the driving transistor DT rises to V1-Vth, and then the critical voltage Vsc equals V1-Vth.

[0038] S13, the threshold voltage Vth of the driving transistor DT is acquired according to the first driving voltage V1 and the critical voltage Vsc.

[0039] Specifically, when the output current of the driving transistor DT is zero, the voltage of the control terminal of the driving transistor DT is V1 and the voltage of the first terminal of the driving transistor DT is the critical voltage Vsc. Based on the above output current relationship $Iout=K\times(V1-Vsc-Vth)^2=0$ of the driving transistor DT, it may obtain that the threshold voltage Vth of the driving transistor DT equals V1-Vsc.

[0040] Based on the above steps S11-S13, the threshold voltage Vth of the driving transistor DT may be obtained.

[0041] In step S2, a mobility K of the driving transistor DT is acquired according to the threshold voltage Vth of the driving transistor DT.

[0042] In this example embodiment, the mobility K of the driving transistor DT may be specifically obtained through following steps.

[0043] S21, a second driving voltage V2 is applied to a control terminal of the driving transistor DT to turn on the driving transistor DT, and at the same time a voltage of the first terminal of the driving transistor DT is set to zero.

[0044] In the embodiment, the second driving voltage V2 may be provided by the data line Data Line through the first transistor T1, and in this case, the first transistor T1 should be turned on under control of the first scan signal Switch Scan. A voltage of the first terminal of the driving transistor DT may be provided by the detection line Sense Line through the second transistor T2, and in this case, the second transistor T2 should be turned on under control of the second scan signal Sense Scan. In addition, a value of the second driving voltage V2 is preferably a voltage that may fully turn on the driving transistor DT and is sufficiently large. For details, reference may be made to requirements in the next step. It should be noted that, the reason to set the voltage of the first terminal of the driving transistor DT to zero is to eliminate the influence of the residual voltage on a detection result.

[0045] S22, a reference voltage Vr of a first terminal of the driving transistor DT is detected.

[0046] In this example embodiment, the reference voltage Vr of the first terminal of the driving transistor DT may be obtained by reading a voltage signal of the detection line Sense Line.

[0047] Since the detection line Sense Line is grounded through the charging capacitor C, the voltage of the first terminal of the driving transistor DT will gradually increase as the output current of the driving transistor DT charges the charging capacitor C through the second transistor T2.

[0048] According to the I-V characteristic of the driving transistor DT, it can be seen that the output current of the driving transistor DT is: $Iout=K\times(Vg_s-Vth)^2=K\times(Vg-V_s-Vth)^2=K\times(V1-Vs-Vth)^2$.

[0049] Based on this, when the second driving voltage V2 is set, the threshold voltage Vth of the driving transistor DT may be compensated first, that is, let V2=V3+Vth, and then the output current of the driving transistor DT according to the above relationship becomes:

$$Iout=K\times(V3+Vth-Vs-Vth)^2=K\times(V3-Vs)^2;$$

wherein V3 is a difference value between the second driving voltage V2 and the threshold voltage Vth of the driving transistor DT; Vs is the voltage of the first terminal of the driving transistor DT, that is, the reference voltage Vr to be detected, and it is also the charging voltage of the second transistor T2.

[0050] In this case, in order to reduce the influence of the voltage Vs (ie, the reference voltage Vr) of the first terminal of the driving transistor DT on the output current thereof, it may also be required to make V3>>Vs. Specifically, the difference value V3 of the second driving voltage V2 and the threshold voltage Vth of the driving transistor DT should be at least ten times higher than the reference voltage Vr. In specific implementation, the above relationship may be satisfied by providing a large enough second driving voltage V2 to make the difference value V3 between the second driving voltage V2 and the threshold voltage Vth of the driving transistor DT sufficiently large while shortening the charging time of the second transistor T2.

[0051] S23, the mobility K of the driving transistor DT is acquired according to the reference voltage Vr.

[0052] In the related art, the output current of the driving transistor DT is related to the threshold voltage Vth and the mobility K thereof. However, in the present exemplary embodiment, the threshold voltage Vth of the driving transistor DT has been compensated when the second driving voltage V2 is set, which eliminates the influence of the threshold voltage Vth on the driving transistor DT. In this case, the output current of the driving transistor DT is only related to its mobility K. Based on this, since different mobility K of each driving transistor DT results in different output current, the charging voltage (i.e., the reference voltage Vr) obtained by the charging capacitor C is also different. That is, the charging voltage, i.e., the reference voltage Vr may reflect the difference in the mobility K.

[0053] In this way, as long as the reference voltage Vr is obtained, the mobility K of the driving transistor DT may be obtained according to the relationship between the reference voltage Vr and the mobility K of the driving transistor DT. The relationship between the reference voltage Vr and the mobility K of the driving transistor DT may be specifically obtained by analog computation or experimental means, which will not be repeated herein.

[0054] Based on the above steps S21-S23, the mobility K of the driving transistor DT may be obtained. During the acquisition of the mobility K of the driving transistor DT, the threshold voltage Vth of the driving transistor DT has been compensated.

[0055] In step S3, the OLED pixel is compensated according to the mobility K of the driving transistor DT.

[0056] In this example embodiment, the output current of the driving transistor DT obtained in the previous step is:

$$Iout=K\times(V3+Vth-Vs-Vth)^2=K\times(V3-Vs)^2.$$

When V3 >> Vs, Iout = $K\times V3^2$.

[0057] It can be seen that, when the difference value V3 between the second driving voltage V2 and the threshold voltage Vth of the driving transistor DT is fixed, the output current of the driving transistor DT is only related to the mobility K. In order to eliminate the influence of the mobility K of the driving transistor DT on the output current thereof, a compensation voltage Vo may be acquired according to the difference value V3 between the second driving voltage V2 and the threshold voltage Vth of the driving transistor DT and the mobility K of the driving transistor DT. The compensation voltage Vo may equal to a ratio of the difference value V3 between the second driving voltage V2 and the threshold voltage Vth of the driving transistor DT to a square root of the mobility K of the driving transistor DT, i.e., $Vo=(V2-Vth)/\sqrt{K}=V3/\sqrt{K}$, to achieve compensation for the mobility K of the driving transistor DT.

[0058] Based on the above steps S1-S3, the compensation for the OLED pixel may be achieved by compensating the threshold voltage Vth and the mobility K of the driving transistor DT, so as to improve the luminance uniformity between the OLED pixels to obtain excellent display image quality.

[0059] As shown in Fig. 3, the present exemplary embodiment further provides a compensation apparatus for an OLED pixel, which may include:

[0060] a threshold voltage acquiring unit 10, configured to acquire a threshold voltage Vth of a driving transistor DT; a mobility acquiring unit 20, configured to acquire a mobility K of the driving transistor DT according to the threshold voltage Vth of the driving transistor DT; and

a compensation unit 30, configured to compensate the OLED pixel according to the mobility K of the driving transistor DT.

[0061] In the embodiment, the threshold voltage Vth of the driving transistor is obtained according to the first driving voltage V1 and the critical voltage Vsc of the first terminal of the driving transistor DT. The mobility K of the driving transistor DT is obtained according to the reference voltage Vr of the first terminal of the driving transistor DT, i.e., the charging voltage of the second driving transistor T2. In one embodiment, the units such as the threshold voltage acquiring

unit 10, the mobility acquiring unit 20, the compensation unit 30 and the like may be implemented by circuits that are configured accordingly.

[0062] It should be noted that, specific details of each module unit in the OLED pixel compensation apparatus have been described in detail in the corresponding OLED pixel compensation method, and details are not described herein again.

[0063] The present example embodiment further provides a display apparatus, including the OLED pixel compensation apparatus described above. In the embodiment, the output current of the driving transistor DT in each pixel unit of the display apparatus tends to be consistent, which may ensure the luminance uniformity of the display apparatus, so as to improve the display image quality. In the present example embodiment, for example, the display apparatus may include any product or component having a display function, such as a cell phone, a tablet, a television, a notebook computer, a digital photo frame, a navigator and the like.

[0064] It should be noted that although several modules or units of the device for action execution are mentioned in the detailed description above, this division is not mandatory. In fact, according to the embodiments of the present disclosure, the features and functions of two or more modules or units described above may be embodied in one module or unit. Conversely, the features and functions of one module or unit described above may be further divided into a plurality of modules or units to be embodied.

[0065] In addition, although various steps of the methods of the present disclosure are described in the drawings in a particular order, it does not require or imply that the steps must be performed in that particular order, or that all of the illustrated steps must be performed in order to achieve the desired result. Additionally or alternatively, some steps may be omitted, a plurality of steps may be combined into one step, and/or one step may be broken down into a plurality of steps to be performed.

[0066] Based on the foregoing description of the embodiments, those skilled in the art may readily understand that the example embodiments described herein may be implemented by software, and may also be implemented by software in combination with necessary hardware. Therefore, the technical solutions according to the embodiments of the present disclosure may be embodied in the form of a software product that can be stored on a nonvolatile storage medium (which may be a CD-ROM, a USB flash drive, a removable hard disk, etc.) or a network, which includes instructions to enable a computing device (which may be a personal computer, a server, a mobile terminal, or a network device, etc.) to perform a method in accordance with an embodiment of the present disclosure.

[0067] Other embodiments of the present disclosure will readily occur to those skilled in the art upon consideration of the specification and practice of the invention disclosed herein. This application is intended to cover any variation, use, or adaptation of the present disclosure that follows the general principles of the present disclosure and includes common knowledge or conventional technological means in the art which is not disclosed in the present disclosure. It is intended that the specification and embodiments are considered as exemplary only, with the true scope and spirit of the present disclosure being indicated by following claims.

Claims

1. A compensation method for an OLED pixel, comprising:

   acquiring a threshold voltage of a driving transistor;
   acquiring a mobility of the driving transistor according to the threshold voltage of the driving transistor; and
   compensating the OLED pixel according to the mobility of the driving transistor.

2. The compensation method according to claim 1, wherein the acquiring a threshold voltage of a driving transistor comprises:

   applying a first driving voltage to a control terminal of the driving transistor to turn on the driving transistor;
   detecting a critical voltage of a first terminal of the driving transistor when an output current of the driving transistor changes from non-zero to zero; and
   acquiring the threshold voltage of the driving transistor according to the first driving voltage and the critical voltage.

3. The compensation method according to claim 2, wherein the acquiring a threshold voltage of a driving transistor further comprises:
   setting an initial voltage of the first terminal of the driving transistor to zero while the first driving voltage is applied to the control terminal of the driving transistor.

4. The compensation method according to claim 2, wherein the acquiring a threshold voltage of a driving transistor

further comprises:
increasing the voltage of the first terminal of the driving transistor through a charging capacitor before detecting the critical voltage of the first terminal of the driving transistor when the output current of the driving transistor changes from non-zero to zero.

5. The compensation method according to claim 1, wherein the acquiring a mobility of the driving transistor according to the threshold voltage of the driving transistor comprises:
applying a second driving voltage to a control terminal of the driving transistor to turn on the driving transistor;
detecting a reference voltage of a first terminal of the driving transistor; and
acquiring the mobility of the driving transistor according to the reference voltage,
wherein a difference value between the second driving voltage and the threshold voltage of the driving transistor is at least ten times higher than the reference voltage.

6. The compensation method according to claim 5, wherein the acquiring a mobility of the driving transistor according to the threshold voltage of the driving transistor further comprises:
setting the voltage of the first terminal of the driving transistor to zero while the second driving voltage is applied to the control terminal of the driving transistor.

7. The compensation method according to claim 5, wherein the acquiring a mobility of the driving transistor according to the threshold voltage of the driving transistor further comprises:
increasing the voltage of the first terminal of the driving transistor through a charging capacitor before detecting the reference voltage of the first terminal of the driving transistor.

8. The compensation method according to claim 5, wherein the compensating the OLED pixel according to the mobility of the driving transistor comprises:
acquiring a compensation voltage according to the difference value between the second driving voltage and the threshold voltage of the driving transistor and the mobility of the driving transistor, so as to realize compensation for the OLED pixel.

9. The compensation method according to claim 8, wherein the compensation voltage is a ratio of the difference value between the second driving voltage and the threshold voltage of the driving transistor to a square root of the mobility of the driving transistor.

10. The compensation method according to any one of claims 1-9, wherein a voltage is provided to a control terminal of the driving transistor by a data line through a first transistor, and a voltage is provided to a first terminal of the driving transistor by a detection line through a second transistor,
wherein the first transistor is turned on in response to a first scan signal and the second transistor is turned on in response to a second scan signal.

11. A compensation apparatus for an OLED pixel, comprising:

a threshold voltage acquiring circuit, configured to acquire a threshold voltage of a driving transistor;
a mobility acquiring circuit, configured to acquire a mobility of the driving transistor according to the threshold voltage of the driving transistor; and
a compensation circuit, configured to compensate the OLED pixel according to the mobility of the driving transistor.

12. A display apparatus, comprising the pixel compensation apparatus according to claim 11.

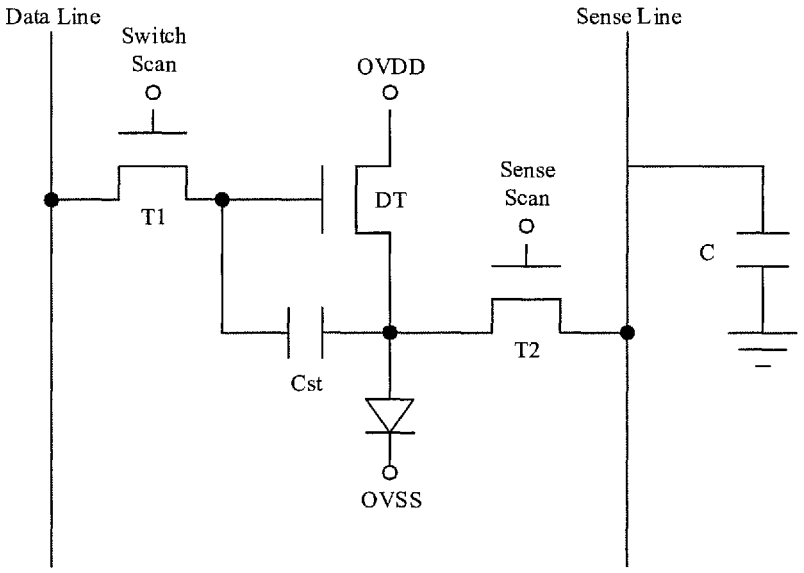

FIG. 1

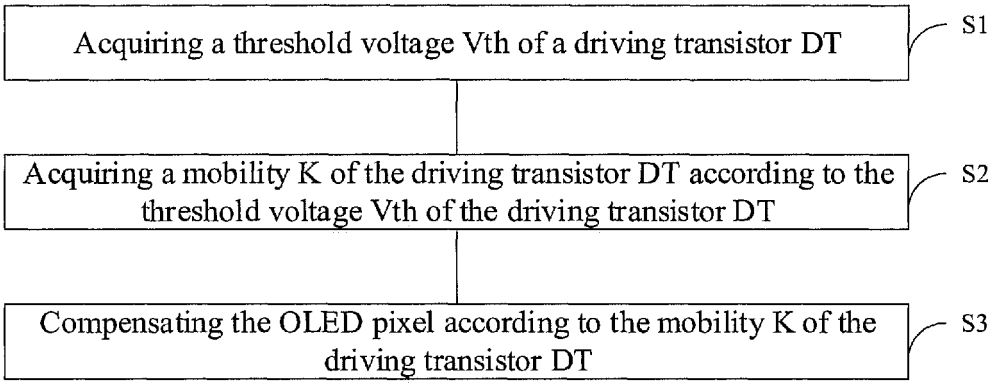

FIG. 2

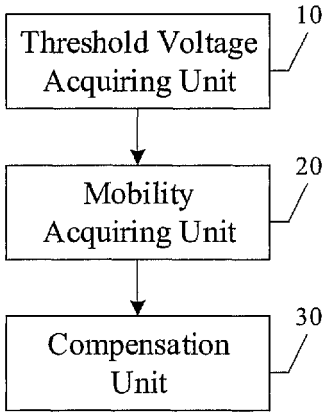

FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CN2017/096532

A. CLASSIFICATION OF SUBJECT MATTER

G09G 3/3258 (2016.01) i; G09G 3/3208 (2016.01) i
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
CNPAT, WPI, EPODOC, CNKI: 有机发光二极管, 补偿, 驱动, 晶体管, 阈值电压, 迁移率, 检测, 感测, 转变, 临界电压, 置零, 充电电容, 参考电压, 差值, 比值, OLED, compensate, transistor, threshold, voltage, mobility, detect, critical, charge, capacitance, increase, reference, difference, ratio, organic, diode, LED, zero, transition

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 106782333 A (BOE TECHNOLOGY GROUP CO., LTD.), 31 May 2017 (31.05.2017), description, paragraphs [0057]-[0106], and figures 1-3	1-12
X	CN 105096820 A (LG DISPLAY CO., LTD.), 25 November 2015 (25.11.2015), description, paragraphs [0084]-[0174], and figures 4-9	1-4, 10-12
X	CN 104637440 A (LG DISPLAY CO., LTD.), 20 May 2015 (20.05.2015), description, paragraphs [0022]-[0057], and figures 1-8	1-4, 10-12
A	CN 104700772 A (LG DISPLAY CO., LTD.), 10 June 2015 (10.06.2015), entire document	1-12
A	CN 105761677 A (LG DISPLAY CO., LTD.), 13 July 2016 (13.07.2016), entire document	1-12
A	CN 106023892 A (BOE TECHNOLOGY GROUP CO., LTD.), 12 October 2016 (12.10.2016), entire document	1-12
A	KR 101577907 B1 (LG DISPLAY CO., LTD.), 16 December 2015 (16.12.2015), entire document	1-12

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
30 October 2017	23 November 2017
Name and mailing address of the ISA State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No. (86-10) 62019451	Authorized officer WEI, Yanyan Telephone No. (86-10) 62414004

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2017/096532

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 106782333 A	31 May 2017	None	
CN 105096820 A	25 November 2015	KR 20150129931 A	23 November 2015
		US 2015325174 A1	12 November 2015
		DE 102015107326 A1	12 November 2015
CN 104637440 A	20 May 2015	CN 104637440 B	12 April 2017
		US 2015123953 A1	07 May 2015
		US 9460661 B2	04 October 2016
		KR 20150052606 A	14 May 2015
CN 104700772 A	10 June 2015	TW I547925 B	01 September 2016
		US 2015154908 A1	04 June 2015
		CN 104700772 B	06 June 2017
		JP 2015108828 A	11 June 2015
		US 9262964 B2	16 February 2016
		KR 101661016 B1	29 September 2016
		JP 5933672 B2	15 June 2016
		TW 201523564 A	16 June 2015
		KR 20150064798 A	12 June 2015
		EP 2881932 A2	10 June 2015
CN 105761677 A	13 July 2016	US 9424782 B2	23 August 2016
		CN 105761677 B	01 August 2017
		US 2016189627 A1	30 June 2016
		KR 20160083773 A	12 July 2016
CN 106023892 A	12 October 2016	None	
KR 101577907 B1	16 December 2015	None	

Form PCT/ISA/210 (patent family annex) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201710100112 **[0001]**

专利名称(译)	OLED像素补偿方法，装置及显示装置		
公开(公告)号	EP3588481A1	公开(公告)日	2020-01-01
申请号	EP2017832725	申请日	2017-08-09
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	CHEN YI HE MIN		
发明人	CHEN, YI HE, MIN		
IPC分类号	G09G3/3258 G09G3/3208		
CPC分类号	G09G3/3258 G09G2320/0233 G09G3/3266 G09G3/3291 G09G2320/0204		
代理机构(译)	POTTER CLARKSON		
优先权	201710100112.8 2017-02-23 CN		
外部链接	Espacenet		

摘要(译)

本发明涉及一种OLED像素的补偿方法，补偿装置及显示装置，涉及显示技术领域。 OLED像素的补偿方法包括：获取驱动晶体管的阈值电压；根据所述驱动晶体管的阈值电压获取所述驱动晶体管的迁移率； 根据驱动晶体管的迁移率补偿OLED像素。 本公开可以实现像素补偿并改善图像质量。

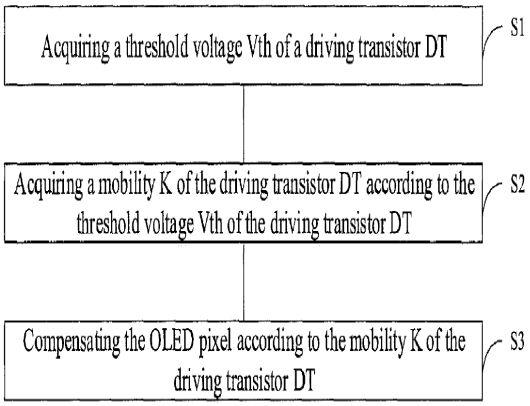

FIG. 2