

(19)



(11)

EP 2 137 716 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

30.11.2016 Bulletin 2016/48

(51) Int Cl.:

G09G 3/3216 (2016.01)

(21) Application number: **08742599.7**

(86) International application number:

PCT/US2008/004473

(22) Date of filing: **07.04.2008**

(87) International publication number:

WO 2008/130495 (30.10.2008 Gazette 2008/44)

(54) PASSIVE MATRIX ELECTRO-LUMINESCENT DISPLAY SYSTEM

ELEKTROLUMINESZENTES PASSIVMATRIXANZEIGESYSTEM

SYSTÈME D'AFFICHAGE ÉLECTROLUMINESCENT À MATRICE PASSIVE

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**

- **HAMILTON, John, Franklin, Jr.**
Rochester, New York 14617 (US)
- **ARNOLD, Daniel Andrew**
Hilton, New York 14468 (US)

(30) Priority: **20.04.2007 US 737786**

(74) Representative: **Wibbelmann, Jobst et al**

(43) Date of publication of application:
30.12.2009 Bulletin 2009/53

Wuesthoff & Wuesthoff
Patentanwälte PartG mbB
Schweigerstrasse 2
81541 München (DE)

(73) Proprietor: **Global OLED Technology LLC**
Herndon, VA 20171 (US)

(56) References cited:

EP-A- 1 408 479 EP-A- 1 457 958
WO-A-2006/035248 GB-A- 2 429 565
US-A- 4 853 592

(72) Inventors:

- **MILLER, Michael Eugene**
Honeoye Falls, New York 14472 (US)

EP 2 137 716 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a passive matrix electro-luminescent display system.

BACKGROUND OF THE INVENTION

[0002] Numerous technologies for forming flat-panel displays are known in the art. One such technology is the electro-luminescent display, which is formed by coating a thin layer of electro-luminescent material between a pair of electrodes. Displays employing this technology produce light as a function of the current between the two electrodes when the electro-luminescent materials are electrically stimulated. Electroluminescent displays are primarily classified as active-matrix or passive-matrix displays. Active-matrix displays employ a relatively complex, active circuit at each pixel in the display to control the flow of current through the electro-luminescent material layer(s). The formation of this active circuit at each pixel can be expensive and often the performance of these circuits is somewhat limited. For example, when controlling current to a light-emitting element, circuits provided in low temperature polysilicon often exhibit spatial nonuniformities while circuits provided in amorphous silicon often exhibit severe threshold shifts over time.

[0003] Passive-matrix EL displays are much simpler in their construction. The display generally includes an array of row electrodes and an array of column electrodes. EL materials are deposited between these electrodes, such that when a positive electrical potential is created between the two electrodes, the EL material between these two electrodes emit light. Therefore, each light-emitting element in the display is formed by the intersection of a row and a column electrode. As this type of display does not require the costly formation of active circuits at each pixel site, they are much less expensive to construct. In these devices, the column electrode is typically formed of ITO or some other material that is transparent but typically higher in resistivity than the row electrode, to allow light to be visible to the user.

[0004] Numerous passive matrix EL display systems have been described in the literature. For example Okuda et al. in United States Patent Number 5,844,368, entitled "Driving system for driving luminous elements" describes a system for driving a passive matrix EL display. In this method, and in most traditional passive matrix EL drive methods; it is assumed that a power is provided to one row electrode at a time and flows through the EL material to each of the column lines. This method of driving the display by providing power to only one line of light-emitting elements leads to two significant problems.

[0005] The first of these two problems, occur because each display will ideally have hundreds of lines of light-emitting elements, which implies that each light-emitting element will only emit light for a very short period of time.

Therefore each light-emitting element will be required to emit light with a very high luminance to achieve a reasonable time-averaged luminance value. Since light intensity from these devices is proportional to current, relatively high currents must be provided to each light-emitting element. This can significantly shorten the lifetime of the individual light-emitting elements and increase crosstalk between pixels in the display as described by Soh, et al, in a paper entitled "Dependence of OLED Display Degradation on Driving Conditions" and published in the proceedings of the SID Mid Europe Chapter in 2006. Further this drive method requires drive electronics to support high currents, which usually translate to larger, more expensive silicon drive chips; and leads to high resistive voltage and power losses across the electrodes, especially the row electrodes which provide current to potentially hundreds of light-emitting elements simultaneously.

[0006] The second of these two problems occur because each light-emitting element must be turned on and off during each cycle to avoid current leakage, and therefore light emission, through light-emitting elements that are supposedly not activated. This problem is particularly troubling in EL displays employing organic materials since the EL layers are very thin and are highly resistive. In such displays, each light-emitting element has a significant capacitance that must be overcome before light emission can occur. Overcoming this capacitance can require significant power that does not generate light and is therefore wasted. This issue has been discussed by Yang et al. in a paper entitled, "PMOLED Driver Design with Pre-charge Power Saving Algorithm" as published in the 2006 SID Digest. As this paper states, this power increases significantly as the number of lines in the display is increased. Specifically, this paper points out that for a PM OLED having 64 lines, nearly 80% of the power is spent driving the OLED (i.e., for light production), while 20% of the power is spent overcoming this capacitance as the lines are turned on and off. As the resolution increases, this ratio changes dramatically, such that when there are 176 lines, only 57% of the power is spent in the production of light while 43% of the power is spent overcoming this capacitance. Therefore, the display becomes significantly less energy efficient, as more lines are present on the display to be cycled from off to on.

[0007] Each of these problems can significantly limit the use of passive matrix EL displays. However, in combination, these two problems limit the application space for such displays significantly. Today, the application of passive matrix EL displays are limited to displays that generally have less than 128 lines and are typically less than 1.5 inches in diagonal.

[0008] One category of approaches for addressing at least the first of these two problems is to provide multi-line addressing of passive matrix EL displays. Such methods have the potential to reduce the peak current through any EL light-emitting element, which can extend the lifetime of the material and significantly reduce the

drive voltage. Further, since multiple rows can be engaged simultaneously, the power losses due to the resistivity of the electrodes can be reduced significantly.

[0009] In US Patent Publication No. 2004/0125046, entitled "Image Display Apparatus", by Yamazaki et al., one such multi-line addressing method is provided. While disclosed primarily for use in surface-conduction type electron emitting devices, this approach was also been discussed for EL displays. In this approach, any input image signal that has fewer vertical addressable pixels than the vertical addressability of the display is displayed by receiving the input video signal, providing a horizontal edge emphasis process (i.e., edge sharpening) across the column direction of the display, selecting two or more rows of the display, and modulating the voltage to the columns of the display in response to the processed input image signal. This approach requires relatively straightforward image processing to prepare the image signal and is able to employ drivers that are very similar to existing passive matrix drivers. While this method may reduce the drive current and voltage as compared to a display employing one line at a time drive techniques as known in the prior art, simply providing the same signal on two neighboring lines, results in an image with a substantial loss in sharpness in the vertical direction and the edge emphasis process can provide only a limited level of enhancement. Therefore, while it is possible to use this method to provide a relatively good display when simultaneously selecting two rows of the display at a time and under certain circumstances it may be useful to select three rows at a time, the number of rows that can be employed simultaneously without introducing significant levels of image blur is quite limited.

[0010] Sylvan in EP 1 739 650, entitled "Procédé de pilotage d'un dispositif d'affichage d'images à matrice passive par sélection multilignes" has proposed an enhancement to this method in which multiple rows are selected during one refresh of the display but a single row is selected during subsequent display refresh cycles. This approach overcomes at least a portion of the sharpness issues but requires that the display actually be cycled more often, further increasing the number of charge and discharge cycles and therefore increasing the power to capacitance. In a paper entitled "Multiline Addressing by Network Flow" by Eisenbrand et al., a similar approach has also been discussed. This approach allows some cycles to be completed using even more rows simultaneously but employs a hierarchical approach that once again requires the use of an increased number of charge and discharge cycles.

[0011] A different approach has more recently been discussed by Smith et al. in PCT filings WO 2006/035246 entitled "Multi-line addressing methods and apparatus", WO 2006/035248 entitled "Multi-line addressing methods and apparatus" and WO 2006/067520 entitled "Digital Signal Processing Methods and Apparatus". These disclosures provide a method for decomposing an input image into subframes, using mathematical methods such

as singular value decomposition and then displaying these subframes by controlling multiple rows and columns in an emissive display simultaneously. An interesting difference between this approach and the prior approaches is that the prior approaches provided only a single scan signal value to the selected row columns and typically provided a digital time multiplexed signal to the columns. The approach provided by Smith requires that multiple drive levels be provided on both the column and row electrodes. In fact, the method as described requires full analog control over the signals provided on the row and column electrodes and possibly requires that the current to each of these electrodes be controlled. While this adds complexity to the drivers, it also allows more control that can be used to engage more rows simultaneously with fewer artifacts. Unfortunately, the methods described in each of the disclosures by Smith, suffer from a number of shortcomings. Most importantly, the decomposition methods described are complex and difficult to realize in real time, especially when processing full frames of video information.

[0012] Document EP 1 457 958 concerns an image display apparatus and method of determining characteristic of conversion circuitry of an image display apparatus.

[0013] Document GB 2429 565 A concerns an electroluminescent display and driving method to compensate for age effects.

[0014] Document WO 2006/035248 A1 concerns methods and apparatuses for driving OLED displays using multi-line addressing techniques.

[0015] Document EP 1 408 479 A2 concerns an image display apparatus in which a scanning signal is applied to a plurality of scan interconnections.

SUMMARY OF THE INVENTION

[0016] In accordance with the present invention there is provided a passive matrix, electroluminescent display system for receiving an input image, processing such input image, and displaying such processed image, comprising the features of claim 1.

[0017] The present invention is suitable for controlling a relatively large number of row electrodes simultaneously in a passive-matrix electro-luminescent display that is computationally simple, significantly reduces the peak current to any individual light-emitting element under all conditions, and that results in reduced image quality artifacts. The present invention reduces the power loss due to IR drop along the row electrode and power losses that are due to charging and discharging the capacitance of the display. The present invention can enable higher resolution, larger, and more valuable passive matrix, electroluminescent displays.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018]

FIG. 1A is a schematic diagram of a system of the present invention;

FIG. 1B is a schematic diagram of a display driver useful in practicing the present invention;

FIG. 2 is a cross sectional diagram of an electro-luminescent display of the present invention;

FIG. 3 is a flow diagram depicting a process useful in employing the present invention;

FIG. 4 is a plot depicting the modulation transfer function of a system of the present invention with and without presharpener;

FIG. 5 is a plot depicting the modulation gain of the presharpener method employed to achieve the presharpener modulation transfer function of FIG. 4

Fig. 6 is a plot depicting the typical luminance stability of an organic light emitting diode as a function of current density;

Fig. 7 is a plot depicting drive voltage as a function of drive current for a typical organic light emitting diode useful in a display of the present invention;

Fig 8 is a plot depicting the modulation transfer function of another system of the present invention with and without presharpener;

Fig. 9 is a plot depicting the modulation transfer function of another system of the present invention with and without presharpener;

Fig. 10 is a plot showing modulation luminance ratio of a system before and after applying a horizontal blur as is useful in systems of the present invention;

Fig. 11 is a flow diagram depicting a process useful for providing the presharpener image control signal to the row and column drivers of a system of the present invention; and

Fig. 12 is a flow diagram depicting an alternate process useful for providing the presharpener image control signal to the row and column drivers of a system of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0019] By providing a passive matrix, electro-luminescent display system as shown in Fig. 1, peak drive current is reduced. As will be discussed, the display driver 20 receives an input image signal 22 and performs a presharpener step on this image signal to produce a presharpener image control signal. The one or more row drivers 16 simultaneously provide a fixed set of drive signals to a group of row electrodes 24 within the array of electrodes that form the display 2 during one time interval and at a different time interval presents separate signals to another group of row electrodes 26 within the array of row electrodes. During each time interval, the row drivers 16 provide at least two different drive levels to the group 24 of row electrodes. Preferably the at least two drive levels will be used to drive a group of at least three row electrodes and these at least two drive levels will be distributed to have a peak near their center and to have lower, nonzero values on either side of the peak. As the

at least two drive levels are provided to a group of row electrodes 24, 26, the one or more column drivers 18 will respond to the presharpener image control signal to simultaneously provide a signal to the multiple column electrodes within the array of column electrodes, such that the concurrence of the row and column signals causes individual light-emitting elements to produce light.

[0020] The display driver 20 can presharpener each subsequent line in the input image signal 22 in the same way, the one or more row drivers can provide the same fixed set of drive signals to a different group of row electrodes (i.e., 26) within the display 2, and the one or more column drivers will respond to the subsequent line of the presharpener image control signal during subsequent time intervals to simultaneously provide a signal to the multiple column electrodes within the array of column electrodes such that the concurrence of the row and column signals causes other individual light-emitting elements to produce light. By selecting proper combinations of presharpener filters and row drive signals, the passive matrix, EL display system can provide high quality images using groups 24, 26 of typically 3 or more row electrodes. Utilizing such a method to display images on a passive matrix EL display can significantly reduce the peak drive current through any EL light-emitting element 12 and along any row electrode 10, thereby reducing the power consumption of the EL display system, while requiring the display driver 20 to perform only relatively simple image processing of the input image signal 22.

[0021] A more detailed description of a passive matrix EL display system of the present invention will now be provided. As shown in Fig. 1A, this system will typically be comprised of a passive matrix, electro-luminescent display 2, one or more row drivers 16, one or more column drivers 18, a display driver 20, and a source for an input image signal 22. Generally, the display driver will perform any necessary image processing, including presharpener, and provide at least timing signals to the row drivers 16 and signals corresponding to the presharpener image control signal to the column drivers 18, which will then provide voltage or current values to the row 10 and column electrodes 6. These signals will control the current through each light-emitting element 12, which are defined by the intersection of each of the row 10 and column electrodes 6.

[0022] The display driver 20 can be any digital or analog device capable of receiving an input image signal 22, presharpener the image signal, and providing this image signal to the one or more column drivers 18 while at least providing a timing signal to one or more row drivers 16. This display driver 20 can be embedded in a higher-level processor, for instance it can be embedded within the primary digital signal processor of a cellular telephone or a digital camera. The display driver 20 can alternatively be a stand-alone device, such as a stand-alone digital signal processing ASIC or field programmable gate array. The display driver will typically include the elements shown in Fig. 1B. As shown, the display driver

20 will include an input buffer **150**. This input buffer **150** will receive and temporarily store a portion of the input image signal **22**, which will typically include multiple rows of the input image. Also shown is a sharpening unit **152**, which will then presharpener the input image signal **22**. The timing generator **158** will provide a timing signal to the sharpening unit **152**, to allow the data to be read from the input buffer at the appropriate time. Once the input image signal has been presharpener, the presharpener image control signal will be stored in an output buffer **154**. Typically, the output buffer **154** will be a full frame buffer and will store as many rows of the presharpener image control signal as there are row electrodes **10** within the display **2**. The data selector **156** will respond to a signal from the timing generator to provide the presharpener image control signal from the output buffer **154** to the column driver **18**, shown in Fig. 1A. The timing generator **158** will also provide a control signal to the row driver **16** in Fig. 1A to insure that the one or more row drivers **16** and the one or more column drivers **18** such that the concurrence of the row and column signals causes individual light-emitting elements to produce light. In some embodiments, the display driver **20** can further include a unit (not shown) for selecting row drive values and providing these row drive values to the row driver **16**.

[0023] A cross-section of the display **2** is shown in Fig. 2. This display **2** will normally be formed on a substrate **4**. An array of column electrodes **6** will typically be formed on this substrate **4**. An electro-luminescent layer **8** will then be deposited over the column electrodes **6**. Finally, an array of row electrodes **10** will be deposited over the electro-luminescent layer **8**. These row electrodes **10** will be oriented orthogonal to the array of column electrodes **6** as shown in Fig. 1. One of these electrodes, typically the row electrode **10**, will serve as a cathode while the remaining electrode, typically the column electrode **6**, will serve as the anode. The light-emitting element **12** will then produce light with an intensity that varies as a function of the current that flows from the cathode to the anode.

[0024] It should be noted that Fig. 1 shows the row electrodes **10** extending horizontally across the display **2** and the column electrodes **6** extending across the vertical dimension of the display **2**. However, one skilled in the art will recognize that the electrodes are described in this way for a matter of convenience. These orientations are not necessary as long as the two arrays of electrodes **6**, **10** are, in fact, orthogonal to one another. It should be noted further, that Fig. 2 shows the column electrodes **6** as patterned on the substrate **4** and the row electrodes **10** as deposited over the electro-luminescent layer **8**. Once again, those skilled in the art will recognize that these particular locations are shown as a matter of convenience and the relative position of the two electrodes with respect to the substrate, are of no consequence to the present invention, as long as the electro-luminescent layer **8** is located between the row electrodes **10** and the column electrodes **6**.

[0025] The display system shown in Fig. 1 will further include one or more row drivers **16**. In this system, these row drivers **16** will simultaneously provide a set of drive signals to a group of row electrodes **24** within the array of row electrodes while presenting any single image. Within this system, the row drivers **16** provide at least two different drive levels to the group of row electrodes **24** during each time interval and the at least two drive levels are preferably distributed to have a peak for the row electrode **28** near the center of the group of row electrodes **24** and to have lower, nonzero values on either side of the peak. These row drivers **16** will typically serve as current sinks. The row drivers **16** can be designed to provide only a fixed set of drive levels or they may be programmable such that different sets of drive values can be selected or input by the display driver **20**.

[0026] Further, the system will include one or more column drivers **18**. These column drivers **18** will simultaneously provide a signal to multiple column electrodes within the array of column electrodes. By providing a signal to multiple row electrodes and multiple column electrodes simultaneously, a two-dimensional array of light-emitting elements **12** will be simultaneously powered to produce light.

[0027] The display driver **20** shown in Fig. 1, will receive a two-dimensional input image signal **22** and process this input image signal to provide control signals to the row **16** and column **18** drivers. The display driver **20** of the present invention will perform the basic process shown in Fig. 3. As shown, this process includes: receiving an input image signal **30**; optionally selecting the number of row electrodes **32** to employ and their relative signal levels; presharpener the input image signal **34** in a direction that is orthogonal to the axis implied by the direction of the row electrodes **10**; and providing **36** a presharpener image control signal to the column **18** drivers for driving the display while providing a signal, typically at least a timing signal **38**, to the row drivers **16**. The row and column drivers **16**, **18** then simultaneously provide signals to multiple row electrodes **10** and column electrodes **6** that allow light-emitting elements **12** at the intersection of multiple row electrodes **10** and multiple column electrodes **6** to produce light simultaneously. Since the row electrodes have multiple drive values, they produce light simultaneously such that the light, produced orthogonal to the row electrodes, varies across the multiple row electrodes.

[0028] Typically, the input image signal **22** can include a two-dimensional array of code values for driving each color of light-emitting element **14** within the display. However, it may also be an analog signal. The presharpener step **36** will typically be performed as a digital processing step, but can also be performed within the analog domain. The steps of providing **36**, **38** signals to the row **16** and column **18** drivers may also provide digital signals. The display driver **20** will typically buffer as many lines of the input image signal as are required to perform the presharpener step **34**. The presharpener step **34** will then

be performed. The output data can then be stored within the output buffer 154 for later presentation. This output buffer 154 may be required as it is typical for the data rate of the input signal to be 30 frames per second or less and the display is often scanned at rates of 60 Hz or greater. Further, it is not necessary to scan the display lines in the same order they are received and this output buffer 154 can be useful in facilitating a change in the order of presentation of the rows within the two dimensional array of code values.

[0029] The row 16 and column 18 drivers will typically provide voltages and current signals to the row 10 and column 6 electrodes, which may also be digital or analog in nature. In an embodiment of the present invention, the row drivers 16 can switch the voltage on any row electrode 10 among a discrete set of values. One of these values will typically not allow current to flow through the light-emitting elements 12 with a forward bias when the voltage of the column drivers are switched to allow current flow through selected row electrodes 10. The row drivers 16 will also be capable of providing at least two and preferably several additional voltages that allow current to flow through the light-emitting elements 12 with a forward bias when the voltage of the column electrodes 6 is switched appropriately. However, the row drivers 16 may also provide a continuous analog voltage signal rather than a set of discrete values.

[0030] The column drivers 18 may modulate the voltage values between two voltage values and the luminance of the light-emitting elements 12 will be modulated by modulating the time that current is allowed to flow through the light-emitting elements 12 (i.e., the column drivers may employ time division multiplexing). However, the column drivers 18 may also provide an analog voltage signal to the column electrodes 6 and modulate the luminance of the light-emitting elements 12 by modulating the voltage of the signal.

[0031] The system of the present invention provides a fundamentally different approach to multi-line addressing in electro-luminescent displays than provided in the prior art. The prior art approaches described by Yamazaki and Sylvan require straight forward presharpener steps to be performed but provide only a fixed drive level for each row electrode. The restriction of providing only a fixed drive level for each row electrode prevents these approaches from utilizing more than a small group of 2 or 3 row electrodes simultaneously without introducing significant image artifacts. On the other hand, Smith and Eisenbrand each provide for multiple drive levels for each of a group of row electrodes, however, these drive levels are dependent upon the image content making it difficult to reduce reliably the current on any row electrode to a fixed level and, more importantly, these methods require relatively complex two-dimensional image processing, making it difficult to perform the necessary calculations cost effectively and in real time. The approach provided herein, requires the display driver to only perform straightforward presharpener with multiple row drive

levels. The applicants have demonstrated that by properly selecting the multiple row drive levels in concert with the proper presharpener methods, high quality images can be obtained while simultaneously driving relatively large numbers of row electrodes. In fact, to achieve large reductions in current with minimal impact on image quality, it is often useful to employ more than 5 and often more than 10 row electrodes simultaneously.

[0032] To illustrate the advantages of the current approach, examples will be provided for three separate methods of driving a passive matrix EL display. Each example will employ a different set of row electrode drive values in combination with a different presharpener kernel to achieve different levels of peak current reduction. It should be acknowledged that although a passive matrix EL display system of the present invention can apply one of these approaches for displaying a single image, the system can be adjusted in response to factors, such as the resolution of the display or the frequency content of the input image signal, to apply different presharpener kernels and sets of row drive values to achieve acceptable tradeoffs in image quality and power consumption.

[0033] In a first example, a set of row drive values and a presharpener kernel will be demonstrated that can reduce the peak current of the display device to 50% of the peak current that would be required to present an image on a traditional passive matrix display employing one line at a time to construct the output image. To attain this image, the row electrodes will be driven such that a total of 15 electrodes form a group of row electrodes 24, 26 and will be activated simultaneously. The row electrodes will further be driven such that the percentage percentage of current sunk by each of the row electrodes will be distributed as shown in Table 1. Note that there at least two different drive levels provided in Table 1. In fact, a total of 15 drive levels are shown. Further the drive levels are distributed to have a peak near their center and to have lower, nonzero values on either side of the peak. That is the maximum relative drive value is provided for the center row electrode (i.e. row electrode 8) and lower drive values are provided for row electrodes on either side of this peak. It should also be noted, however, that this function does not decrease monotonically as the distance from the center electrode increases. Note specifically that the drive value for row electrodes 5 and 11 are smaller than the drive values for row electrodes 6 and 10 but larger than the drive values for row electrodes 4 and 12. That is, as the distance from the center electrode increases, the electrode drive values decrease, increase to a secondary maximum at electrodes 4 and 12 and then decrease for the row electrodes in the group of row electrodes. When the row electrodes are driven in this way and this distribution of row electrodes is scanned down the display, the display system will have a native vertical modulation transfer function 40 as shown in Fig. 4. To interpret this function, some characteristics of this modulation transfer function should be explained.

Table 1.

Row Electrode Number	Relative Current Values
1	0.005
2	0.01
3	0.02
4	0.025
5	0.015
6	0.03
7	0.145
8	0.5
9	0.145
10	0.03
11	0.015
12	0.025
13	0.02
14	0.01
15	0.005

[0034] First, it should be understood that the modulation transfer function of a perfect display would have a value on the modulation axis **42** of 1 between zero and 0.5 cycles/sample on the frequency axis **44** and a value of zero at exactly 0.5 cycles/sample. Further, if the modulation transfer function crosses the frequency axis at any value lower than 0.5 cycles per sample, spatial information is lost in the image and cannot be recovered. However, if the modulation is decreased, this loss can be compensated through the use of presharpener, although some loss in bit depth can occur. It is also important to recognize that while the modulation transfer function of a perfect display would have a value on the modulation axis **42** of 1 between zero and 0.5 cycles/sample, no practical systems achieve this ideal goal and adequate image quality can be achieved for systems that have values on the modulation axis **42** that are significantly less than 1 for values on the frequency axis **44** that are somewhat less than 0.5.

The native modulation transfer function **40** of this system is shown in Fig. 4. For the present embodiment of this invention the modulation transfer function **40** crosses the frequency axis **44** at about 0.5 cycles/sample and is positive for all frequencies lower than 0.5 cycles/sample. Therefore, one can use presharpener to restore the modulation of the image at all spatial frequencies that the display can present. In the current invention, this presharpener is accomplished, for example, by applying a vertical presharpener kernel having the values 4, -5, -8, 4, -4, -19, -18, 220, -18, -19, -4, 4, -8, -5, 4, then normalizing the result by dividing the resulting values by 128.

Fig. 5 shows the spatial frequency response of this presharpener kernel **48**. Note that this presharpener kernel provides a modulation value significantly greater than 1 for all vertical spatial frequencies at which the native modulation transfer function of this system **40** is significantly less than 1 and, therefore, at least partially compensates for the loss of modulation at all spatial frequencies that are attenuated by driving multiple row electrodes according to the present invention. After this presharpener kernel is applied, the final system modulation transfer function **46** is greater in modulation than the native modulation transfer function of this system **40** for all spatial frequencies where the native spatial frequency response of the system **40** is less than 1. Simulations performed by the inventors have demonstrated that images having this resulting MTF are quite acceptable and often are visually lossless as compared to images displayed using the one line at a time drive method.

[0035] It is worth returning to the discussion of the row drive values shown in Table 1. As noted earlier, these row drive values do not decrease monotonically, but instead contain a valley. The presence of this valley within the row drive values has the result of flattening the system MTF **40** between the spatial frequencies of about 0.1 to 0.2 cycles per sample. The presence of this plateau allows one to obtain values on the modulation axis **42** for these mid-frequencies (i.e., 0.1 to 0.2 samples per cycle) while applying presharpener kernels with relatively small gain values. It is important that the maximum gain value for the presharpener kernel is only 2.26 and would have been much larger had the row drive values declined monotonically from the center row electrode.

[0036] This method has several advantages. First, the peak current is reduced to 50 percent of the peak value for a traditional one line at a time system. This fact allows the lifetime of EL materials to be extended. In one example, it is known that EL displays employing organic materials degrade as a function of current density as shown by the relationship **50** in Fig. 6. Notice that this relationship is highly nonlinear and therefore even a slight reduction in current density can produce a dramatic increase in the luminance stability or lifetime of the EL materials. By reducing the peak current to 50 percent of that which would be required if one were to employ a traditional 1 line at a time drive method, the maximum current density is also reduced by 50 percent, typically extending the lifetime by something on the order of a factor of 4 or more.

[0037] Second, luminance is linearly related to current in an EL display system, implying that to maintain the luminance of the current display system as compared to prior art solutions, the same time averaged current must be provided through the display system. However, the use of lower peak currents reduces the required voltage to produce this luminance. Fig. 7 shows the drive voltage function **54** between drive current (mA) and Drive Voltage (V). By reducing the peak drive current, the drive voltage is reduced and since power is computed by multiplying

the current and the voltage, the power consumed by the display to produce light is reduced as a function of the peak display current.

[0038] Third, in traditional passive matrix display systems employing one line at a time addressing, the row electrodes typically have a significant resistivity and the row currents can be on the order of several hundred milliamperes and, for larger displays, several amperes. Therefore, the loss of power due to I^2R loss along the row electrodes can be significant. By distributing this current over several row electrodes, the current on any single row electrode is reduced significantly and therefore the loss of power due to I^2R loss is reduced significantly, further reducing the power consumption of the display.

[0039] It should be noted that in this example, a total of 14 rows were driven simultaneously. Generally, the number of rows that will be driven simultaneously using this method will be five or greater but the method can be applied by driving as few as three lines simultaneously. It should also be noted that the drive level for the center electrode in the group of row electrodes that are driven simultaneously is higher than for any of the other row electrode in the group of row electrodes. Although, one can employ this method by applying two or more center electrodes which all have the same drive values, the method will often employ drive values for the row electrodes furthest from the center that are lower than the drive values for these center electrodes. Further, the drive level will generally decrease for electrodes in the group of row electrodes as the distance from the center row electrode within the group increases. This decrease in drive level may be monotonic such that the distribution of electrode drive values as a function of row electrode location approximates a gaussian function. The fact that the drive values generally decrease with increasing distance from the center electrode is an important attribute since without this attribute, the native spatial frequency response of the system **40** will be zero for a spatial frequencies less than 0.5 cycles per sample and it will therefore be difficult to construct an image having acceptable quality. It is important that the frequency response of a gaussian is a gaussian and such a system modulation transfer function response can be relatively accurately compensated for using traditional presharpener filters. However, interrupting this gaussian by imposing a secondary maximum within each of the tails of the generally gaussian-shaped function for driving the group of row electrodes provides a more advantageous system modulation transfer function.

[0040] In this embodiment only 8 different row drive values are required but one can construct a row driver according to the present invention that drives rows with as few as 2 different row drive values. To implement such a system, one can construct a row driver that is capable of providing only a few discrete voltage or current signal levels. Alternately, these row drivers may provide full analog control of the row drive voltages or current sink values. These drive values can then be programmed

and updated by the display driver to provide different sets of row drive signals to different row electrodes.

[0041] These row drivers may be used together with column drivers that either employ time division multiplexing and are capable of providing only a binary signal (i.e., voltage or current this is off and voltage or current that is on) during the drive cycle or these column drivers may provide a continuous, analog voltage or current signal.

[0042] Although the previous discussion provided a method of achieving a 50 percent reduction in peak current, the same general method can be applied to achieve even greater reductions in peak current. One method for reducing the peak current to 33% of the peak current in a traditional one line at a time passive matrix drive method can be achieved by employing the 15 relative row electrode signals shown in Table 2. As before, these relative row electrode signals, generally increase to a peak value and then decline, with the exception of one peak within each tail. When these relative row electrode signals are applied, the native vertical modulation transfer function of the system **60** shown in Fig. 8 is achieved. Once again, the presharpener step **36** can be achieved by applying a vertically oriented digital presharpener kernel having the values 2, 0, -3, 2, 2, -56, 13, 144, 13, -56, 2, 2, -3, 0, 2 and dividing the resulting values by 64. As before, this presharpener kernel compensates for the loss of modulation that occurs at middle and high spatial frequencies when the group of multiple row electrodes are driven simultaneously with the relative drive values shown in Table 2. However, this presharpener kernel applies a slightly higher maximum gain value of 4.09. The resulting system vertical modulation transfer function **62** is shown in Fig. 8 and is significantly closer to ideal than the native modulation transfer function of the system **60**.

Table 2.

Row Electrode Number	Relative Current Values
1	0.0033
2	0.0100
3	0.0167
4	0.0233
5	0.0700
6	0.0533
7	0.1567
8	0.3333
9	0.1567
10	0.0533
11	0.0700
12	0.0233
13	0.0167

(continued)

Row Electrode Number	Relative Current Values
14	0.0100
15	0.0033

[0043] These same methods can be applied to achieve even further reductions in peak current with acceptable image quality loss. For example, the peak current can be reduced to a peak current of 25% of the peak current in a traditional one line at a time passive matrix drive method by employing the 16 relative row electrode signals shown in Table 3. As before, these relative row electrode signals generally increase to a peak value and then decline. Notice that in this instance, the function is monotonic on either side of the center row electrodes. Further notice that two center electrodes, specifically row electrodes 8 and 9, share the peak value. When these relative row electrode signals are applied, the native vertical modulation transfer function **70** of the system shown in Fig. 9 is achieved. Once again, the presharpener step **36** can be achieved by applying a vertically oriented digital presharpener kernel having the values 6, 2, -12, 21, -52, -50, -62, 422, -62, -50, -52, 21, -12, 2, 6 which are divided by a normalization constant of 128 and provide a maximum modulation gain of 4.75. As before, this presharpener kernel compensates for the loss of modulation that occurs at middle and high spatial frequencies when the group of multiple row electrodes are driven simultaneously with the relative drive values shown in Table 3. The resulting vertical system modulation transfer function **72** is shown in Fig. 9 and is significantly closer to ideal than the native modulation transfer function of the system **70**.

Table3.

Row Electrode Number	Relative Current Values
1	0.0050
2	0.0075
3	0.0175
4	0.0225
5	0.0550
6	0.0675
7	0.0750
8	0.2500
9	0.2500
10	0.0750
11	0.0675
12	0.0550
13	0.0225
14	0.0175

(continued)

Row Electrode Number	Relative Current Values
15	0.0075
16	0.0050

[0044] Although the approaches as just described will generally produce images with high image quality, it is possible for these methods to create certain artifacts within the resulting images. One such artifact occurs as a direct result of the blurring that occurs, wherein horizontal edges within the image appear unnaturally sharp. This artifact can be overcome in a number of ways. However, one particularly useful method is to blur the image slightly in the horizontal direction, parallel to the row electrodes. This optional step of blurring the image should be performed prior to applying the presharpener image signal step **34**. As shown in Fig. 10, it may be assumed that the horizontal modulation transfer function ratio of the system is unity for all spatial frequencies as indicated by the horizontal line **76**. This artifact can be corrected by applying a blur kernel in the horizontal direction to provide a modulation transfer function ratio as indicated by the line **78**. This reduces the sharpness of vertical lines somewhat but because the human visual system will adapt to the sharpness level of an image, blurring these lines to match the sharpness of the horizontal lines of the display, results in a more pleasing final image.

[0045] Another potential artifact is the clipping of high-light information that occurs as a result of boosting the contrast of certain spatial frequencies using the presharpener kernel. This artifact can be addressed in a number of ways. One method is to perform the presharpener step using an extended bit depth range and to then applying a modified tonescale to bring at least a portion of the clipped information back into the tonal range of the display. This tonescale modification can include applying a simple gain factor by multiplying all values by a given constant but more preferably will apply a more complex function, which allows the contrast of the midscale to be reduced by a smaller margin than the contrast of the high-light information. Another approach is to determine the contrast range of edges within the image and to reduce the contrast of the image prior to presharpener if there are enough edges having a high enough contrast range to present significant clipping artifacts. Yet another approach is to determine the contrast range of edges within the image and to select **34** among different presharpener filters. Different row drive values can also be selected. Groups of different sizes of row electrodes can be used depending on the contrast range or the number of edges in the image. Other approaches include applying a vertical blur function or a contrast reduction to images having high instantaneous contrast in one or more color channels to reduce the amplitude of these transitions prior to presharpener.

[0046] Once the image processing is completed, including the presharpener image signal step **34**, the display driver **20** must provide **36** the presharpener image control signal to the column driver **18**, which will then provide control signals to the column **6** electrodes. Several methods of providing the control signals **36** can be performed by the data selector **156**, which has the opportunity to select different portions of the presharpener image control signal from the output buffer **154**. One method to provide the control signals **36** is shown in Fig. 11. To explain this method, we will assume that the input image signal **22** and the resulting presharpener image control signal has 1 through n rows of data where the row of data to be displayed will be indicated by i , where i is a number between 1 and n . We will further designate the selected **32** number of row electrodes as m . As this method is discussed, it will be assumed that the presharpener image control signal will be written into the output buffer **154** after it is presharpener **34** and the method of providing the control signals **36** will operate on data that is stored in this output buffer.

[0047] As shown, the display driver **20** will typically obtain a row of the presharpener image control signal from the output buffer **80**. The driver will then provide a signal to the row drivers. This signal will activate row electrodes 1 through m **82** wherein the row drivers provide at least two different drive levels to the group of m row electrodes and wherein the at least two drive levels are distributed to have a peak near their center and to have lower, non-zero values on either side of the peak. The first row of the presharpener image control signal is used to provide drive signals to the column drivers **84**, which will provide appropriate signals to the column electrodes **86**. For example, the column drivers may modulate the time a voltage is provided on the column electrodes which allows current to flow through the light emitting elements **12** in response. As such, this voltage signal will allow current to flow through the column electrodes **6** to the light-emitting elements **12** and to row electrodes **10** 1 through m . Therefore, as the first line of data is displayed, the same row and column signals will be provided to rows 1 through m during a first time interval, which we will refer to as t_i . The rows can then be deselected **88** by removing the drive value from at least row electrode 1. Within a subsequent time interval t_j the next row of the presharpener image control signal will be obtained **90**. The next group of m row electrodes, specifically row electrodes 2 through $((i-1) + m)$ will be activated **92**. Again, the presharpener image control signal will be used to provide column drive signals to the column drivers **94**, which will provide signals to the column electrodes **96**. Once again, the row electrodes will be deselected **98**. This process will be repeated for each time interval t_j during which row i of the data matrix will be displayed onto rows i through $((i-1) + m)$. A decision **100** will be made as to whether the entire presharpener image control signal has been displayed. If not, the next row of the presharpener image control signal will be obtained **90**. Once the entire pre-

sharpened image control signal has been displayed, the process will repeat. By following the procedure shown in Fig. 11, each of the n rows of information in the presharpener image control signal are displayed such that they overlap each other by $(m-1)$ rows and each of the rows are activated a total of m times.

[0048] It should be further noticed that the instantaneous peak luminance of any light-emitting element **12** is reduced and that each line emits light for m times as long as it would in a passive matrix display in which only one line is addressed at a time. In traditional passive matrix displays, it is necessary to refresh the display at a frequency of at least 72 Hz to avoid the visibility of flicker. However, the frequency required to avoid flicker varies as a function of the instantaneous luminance, the contrast of instantaneous luminance with luminance emitted during the off state, the duration of light emission, and the spatial distribution of the light emission. Because the instantaneous luminance will be reduced, the contrast will be reduced, and the duration of light emission will be increased. Therefore lower refresh rates can be employed without perceptible flicker. Reducing the refresh rate to even 60 Hz will reduce the number of on and off cycles during which the capacitance of EL displays, and especially OLED displays, must be charged, this can reduce this component of power consumption to a ratio of 5/6ths its original value.

[0049] Other methods for providing **38** presharpener image control signal can be employed to reduce the refresh rate further. For example, the rows of the presharpener image control signal can be presented in a different order. One such method can involve providing less overlap between subsequently displayed groups of row electrodes **24**, **26** and changing the order of displaying the lines of the presharpener image control signal. That is, rather than overlap the second group of row electrodes by all but one row electrode, the groups of row electrodes can be overlapped by half the width of the group of row electrodes on any two subsequent row activation steps. For instance, if one were to apply a set of 9 relative row strength signals; including 1, 2, 4, 8, 15, 8, 4, 2, 1 such that the first row electrode during a second time interval overlapped third or fourth row electrode from the previous time interval, and this pattern was repeated, a relatively uniform luminance pattern would be created within a single scan of the display. Subsequently, the display could be scanned again, employing the same overlap but having the center of the groups displaced by a row. This could be repeated until all of the rows were scanned, completing the image.

Such a method is depicted in Fig. 12. As before, we will assume that the signal has 1 through n rows of data where i will indicate the row of data to be displayed. However, in this approach i is a number between 1 and n/j , where j is the number of offset row electrodes between two subsequently drawn groups, minus 1. The selected **34** number of row electrodes per group of row electrodes will again be provided as m and we will further designate

another variable c , which will increment from 1 to j . As in the previous method, the first row of presharpened image control signal is obtained **110**. A signal is provided to the row drivers to activate **112** row electrodes 1 through m . The presharpened image control signal is then used to provide **114** a signal to the column drivers. In a display having significant capacitance, such as in the typical OLED display, the column drivers then precharge **116** the capacitance of the display. Current is then provided **118** by the column drivers to the column electrodes to create current flow through the light-emitting elements, lighting the pixels of the display. Once the necessary luminance has been created, the columns can then be discharged **120**. The primary departure between the method shown in Fig. 12 from the method shown in Fig. 11, occurs as the next row of the presharpened image control signal is obtained and displayed. In the method shown in Fig. 12, during the next time interval t , the presharpened image control signal in row $(c+(i-1)*j)$ will be obtained **122**. The row electrodes $(c+(i-1)*(j-1)-((m-1)/2))$ through $(c+i*(j-1)+((m-1)/2))$ will then be activated **124**. Note this group of row electrodes overlaps the previous group of row electrodes by j and the image data that is presented is now $(j-1)$ rows below the previous row in the data matrix. Therefore, rows of the presharpened image control signal have been skipped and can be presented in subsequent scans of the display. The presharpened image control signal values in row $(c+(i-1)*j)$ are then used to provide **126** a signal to the column drivers. Once again, the column drivers precharge **128** the display, provide **130** current to light the pixels of the display and discharge **132** the columns of the display. A decision **134** is made as to whether the first scan of is complete, that is i has reach its maximum value, i is incremented **140**, and the next row of data is obtained **122**. Once i reaches its maximum value and it is decided **134**, that the first display scan is complete a decision **136** will be made as to whether c has obtained it maximum value. If c has not obtained its maximum value, c will be incremented **138** by a value of 1, i will be set to 1 **142**, and the next row of data will be obtained **136**. If it is decided that c has reach its maximum value, the process will begin again by obtaining the first row of data **110**.

[0050] By following the procedure of Fig. 12, many of the same benefits are achieved as in the previous method. However, the difference is in the spatial luminance pattern that is drawn on the screen. Most notably, j low spatial resolution images are displayed, one after another, that when added together by the human eye results in an image with perceptibly higher spatial frequency information. Because of this spatial pattern, the refresh rate of the display can be reduced significantly. For example, when $j = 2$, the refresh rate can readily be reduced to 36 Hz as some information will still be written to each pixel on the display at a frequency of 72 Hz (e.g., 36 Hz per scan, each image refresh consisting of 2 scans). Further, when $j=3$, the refresh rate can be reduced further to 24 Hz. It should be noted that often displays of this type are

capable of receiving new image updates at a rate of 24 Hz. As such a display using this approach with $j=3$ can allow the incoming images to be processed and displayed at the same rate. As discussed before, the reduction of this refresh rate is significant as it further reduces the number of cycles that the capacitance of the display must be charged and can therefore, significantly reduce the power consumption of the display. In fact, this capacitive power dissipation can also be reduced by a factor of $1/j$.

[0051] It should be noted that in most displays, other image processing must also be performed. For example, in displays employing arrays of RGBW light-emitting elements as described in US Patent Application 10/320,195, it will be necessary to receive a RGB input image signal, linearize the RGB input image signal with respect to aim display luminance, convert the linearized RGB input image signal into a linearized RGBW input signal. Generally, the method provided in Fig. 3 will be employed after such image processing has been performed. The method in Fig. 3, can be performed on linearized data but can be performed, and often will preferably be performed on nonlinear data in which changes in small code values correspond to smaller changes in luminance than changes in large code values.

[0052] The display system of the present invention includes an EL display. This display can be any electroluminescent display that can be used to form a two dimensional array of addressable elements between a pair of electrodes. These devices can include electro-luminescent layers **8** employing purely organic small molecule or polymeric materials, typically including organic hole transport, organic light-emitting and organic electron transport layers as described in the prior art, including US 4,769,292, issued September 6, 1988 to Tang et al., and US 5,061,569, issued October 29, 1991 to VanSlyke et al. The electro-luminescent layer **8** can alternately be formed from a combination of organic and inorganic materials, typically including organic hole transport and electron transport layers in combination with inorganic light-emitting layers, such as the light-emitting layers described in US 6,861,155 issued March 1, 2005 to Bawendi et al. Alternately, the electro-luminescent layer **8** can be formed from fully inorganic materials such as the devices described in co-pending USSN 11/226,622 filed September 14, 2005, entitled "Quantum Dot Light Emitting Layer".

[0053] The display can further employ row and column electrodes, which are formed from an array of materials. The row electrodes, which typically, carry current to more light-emitting elements that are lit simultaneously, than the column electrodes will typically be formed of a metal. Commonly known and applied metal electrodes include electrodes formed from silver and aluminum. When the electrode functions as a cathode, these metals may be alloyed with low work function metals or used in combination with low work function electron injection layers. At least one of the row or column electrodes must be formed

of materials that are at transparent or semi-transparent. Appropriate electrodes include metal oxides such as ITO and IZO or very thin metals, such as thin layers of silver. To decrease the resistivity of these electrodes, additional opaque bus bars can be formed in electrical contact with these electrodes.

[0054] The substrate can also be formed of almost any material. When the transparent or semi-transparent electrode is formed directly on the substrate, it is desirable for the substrate to be formed from a transparent material, such as glass or clear plastic. Otherwise, the substrate can be either transparent or opaque. Although not shown, such displays generally will include additional layers for mechanical, oxygen, and moisture protection. Methods of providing this type of protection are well known in the art. Also not shown within the diagrams of this disclosure, are mechanical structures, such as pillars that are commonly employed during manufacturing of passive matrix OLED displays that enable the patterning of the electrode furthest from the substrate.

[0055] Although, the current invention has been discussed specifically for EL displays, the method of the present invention can be usefully employed with alternate display technologies. Particularly any display technology requiring the flow of current, as is typical in most emissive display technologies, including field emission or surface-conduction-electron-emitter displays, can benefit from aspects of the present invention. This invention will be of even greater benefit in display technologies that not only require the flow of current and have cells that are thin enough to provide capacitive losses when cycling individual light-emitting elements from on to off.

PARTS LIST

[0056]

2	display
4	substrate
6	column electrode
8	electro-luminescent layer
10	row electrode
12	EL light-emitting element
16	row driver
18	column driver
20	display driver
22	input image signal
24	group of row electrodes
26	group of row electrodes
28	row electrode near center of a group of row electrodes
30	receiving input image signal step
32	optional selecting number of row electrodes step
34	presharpening step
36	providing presharpened image control signal step
38	providing signal step
40	vertical modulation transfer function
42	modulation axis

44	frequency axis
46	final vertical modulation transfer function
48	spatial frequency response of presharpening kernel
50	luminance stability function
54	drive voltage function
60	native vertical modulation transfer function
62	resulting vertical modulation transfer function
70	native vertical modulation transfer function
72	resulting vertical modulation transfer function
76	horizontal line
78	horizontal modulation transfer function ratio
80	obtain row of presharpened image control signal from output buffer step
82	activate group of row electrodes step
84	provide column driver signals step
86	provide column electrode signals step
88	deselect rows step
90	obtain next row of presharpened image control signal step
92	activate next group of row electrodes step
94	provide next column driver signals step
96	provide next column electrode signals step
98	deselect row electrodes step
100	decision step
110	obtain row of presharpened image control signal step
112	activate group of row electrodes step
114	provide signal to column driver step
116	precharge capacitance step
118	provide current step
120	discharge step
122	obtain selected row of presharpened image control signal step
124	activate next group of row electrodes step
126	provide signal to column driver step
128	precharge step
130	provide current step
132	discharge step
134	decide first scan complete step
136	decide all scans complete step
138	increment c step
140	increment i step
142	set i step
150	input buffer
152	sharpening unit
154	output buffer
156	data selector
158	timing generator

Claims

1. A passive matrix, electro-luminescent display system for receiving an input image, processing such input image, and displaying such processed image, comprising:

a. a passive matrix, electro-luminescent display having an array of column electrodes (6), an array of row electrodes (10) oriented orthogonally to the array of column electrodes (6) and an electro-luminescent layer (8) located between the array of column electrodes (6) and the array of row electrodes (10), the intersection of each column (6) and row (10) electrode forming an individual light-emitting element (12);

b. one or more row drivers (16) adapted to provide separate drive signals at different times to different groups of row electrodes (24, 26) within the array of row electrodes (10), wherein the row electrodes of each group simultaneously receive at least two different level signals;

c. a display driver (20) adapted to receive the input image signal and process this input image signal using presharpener filtering to provide a presharpener image control signal; and

d. one or more column drivers (18) adapted to in response to the presharpener image control signal simultaneously provide a drive signal to all the column electrodes within the array of column electrodes (10) at the same time drive signals are provided to the groups of row electrodes (24, 26) so that the concurrence of row and column signals causes individual light-emitting elements (12) to produce light, wherein each group of row electrodes (24, 26) contains at least three row electrodes, and the image is displayed by modulating voltages applied to the light-emitting elements (12) through the column electrodes (6) and the row electrodes (10),

characterized in that

the row electrode signal levels within each group of row electrodes (24, 26) are distributed such that the row electrode(s) (10) at the center of the group receive(s) a peak signal level and other electrodes (10) in the group receive lower, nonzero signal levels.

2. The passive matrix, electro-luminescent display system of claim 1, wherein each group of row electrodes (24, 26) contains at least 5 row electrodes (10).
3. The passive matrix, electro-luminescent display system of claim 1, wherein the row electrode signal level for the center row electrode(s) (10) in the group of row electrodes (24, 26) is higher than for any of the other row electrodes (10) in the group of row electrodes (24, 26).
4. The passive matrix, electro-luminescent display system of claim 1, wherein the row electrode signal level received by row electrodes (10) in the group decreases, then increases to a secondary maximum and then decreases again as the distance from the

center electrode(s) (10) increases.

5. The passive matrix, electro-luminescent display system of claim 1, wherein the distribution of row electrode signal levels for each of the row electrodes (10) in a group are distributed such that they monotonically decrease as the distance from the center electrode(s) (10) increases.
6. The passive matrix electroluminescent display system of claim 5, wherein the distribution is approximately gaussian.
7. The passive matrix, electro-luminescent display system of claim 1, wherein the display driver (20) in the direction parallel to the row electrodes (10), additionally blurs the input image signal.
8. The passive matrix, electro-luminescent display system of claim 1, wherein a second group of row electrodes (26) overlaps a first group of row electrodes (24).
9. The passive matrix, electro-luminescent display system of claim 8, wherein the second group of row electrodes (26) overlaps the first group of row electrodes (24) such that the sum of the distribution of row electrode signal levels in the first group (24) and the distribution of row electrode signal levels in second group (26) form a distribution that is substantially flat in the center.
10. The passive matrix, electro-luminescent display system of claim 1, wherein the displayed image is refreshed at a rate less than 60 Hz.
11. The passive matrix, electro-luminescent display system of claim 1, wherein the control signal provided to the row electrodes (10) is a discrete multilevel signal and the control signal provided to the column electrodes (6) is pulse width modulated.

Patentansprüche

1. Passives elektrolumineszentes Matrix-Anzeigesystem zum Empfangen eines Eingabebilds, Bearbeiten eines derartigen Eingabebilds und Anzeigen eines derartigen bearbeiteten Bilds, das umfasst:
 - a. eine passive elektrolumineszente Matrix-Anzeigeeinrichtung mit einer Anordnung von Spaltenelektroden (6), einer Anordnung von Reihenelektroden (10), die orthogonal zu der Anordnung von Spaltenelektroden (6) orientiert sind, und einer elektrolumineszenten Schicht (8), die zwischen der Anordnung von Spaltenelektroden (6) und der Anordnung von Reihenelektro-

den (10) angeordnet ist, wobei der Schnittpunkt einer jeden Spalten- (6) und Reihen- (10) Elektrode ein einzelnes Licht emittierendes Element (12) bildet;

b. einen oder mehrere Reihentreiber (16), der/die dazu eingerichtet ist/sind, zu verschiedenen Zeiten verschiedenen Gruppen von Reihenelektroden (24, 26) innerhalb der Anordnung von Reihenelektroden (10) separate Antriebssignale bereitzustellen, wobei die Reihenelektroden einer jeden Gruppe gleichzeitig mindestens zwei Signale mit unterschiedlichem Niveau empfangen;

c. einen Anzeigetreiber (20), der dazu eingerichtet ist, das eingegebene Bildsignal zu empfangen und dieses eingegebene Bildsignal unter Verwendung einer vorschärfenden Filterung zu bearbeiten, um ein vorgeschärftes Bildsteuersignal bereitzustellen; und

d. einen oder mehrere Spaltentreiber (18), der/die dazu eingerichtet ist/sind, in Reaktion auf das vorgeschärftes Bildsteuersignal zum gleichen Zeitpunkt, zu dem den Gruppen von Reihenelektroden (24, 26) Antriebssignale bereitgestellt werden, allen Spaltenelektroden innerhalb der Anordnung von Spaltenelektroden (10) gleichzeitig ein Antriebssignal bereitzustellen, so dass das Zusammentreffen der Reihen- und Spaltensignale die einzelnen Licht emittierenden Elemente (12) dazu veranlasst, Licht zu erzeugen, wobei jede Gruppe von Reihenelektroden (24, 26) mindestens drei Reihenelektroden enthält und das Bild angezeigt wird, in dem Spannungen, die durch die Spaltenelektroden (6) und die Reihenelektroden (10) an die Licht emittierenden Elemente (12) angelegt werden, moduliert werden,

dadurch gekennzeichnet, dass

die Reihenelektrodensignalniveaus innerhalb einer jeden Gruppe von Reihenelektroden (24, 26) so verteilt sind, dass die Reihenelektrode(n) (10) an dem Zentrum der Gruppe ein Spitzensignalniveau empfängt/empfangen und andere Elektroden (10) in der Gruppe niedrigere, von Null verschiedene Signalniveaus empfangen.

2. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 1, bei dem jede Gruppe von Reihenelektroden (4 20, 26) mindestens 5 Reihenelektroden (10) enthält.
3. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 1, bei dem das Reihenelektrodensignalniveau für die zentrale(n) Reihenelektrode(n) (10) in der Gruppe von Reihenelektroden (24, 26) höher ist als für jede der anderen Reihenelekt-

roden (10) in der Gruppe von Reihenelektroden (24, 26).

4. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 1, bei dem das Reihenelektrodensignalniveau, das von Reihenelektroden (10) in der Gruppe empfangen wird, abnimmt, dann auf ein zweites Maximum zunimmt und dann wieder abnimmt, wenn der Abstand von der/den zentrale(n) Reihenelektrode(n) (10) zunimmt.
5. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 1, bei dem die Verteilung von Reihenelektrodensignalniveaus für jede der Reihenelektroden (10) in einer Gruppe so verteilt ist, dass sie monoton abnehmen, wenn der Abstand von der/den zentrale(n) Reihenelektrode(n) (10) zunimmt.
6. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 1, bei dem die Verteilung ungefähr eine Gaußverteilung ist.
7. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 1, bei dem der Anzeigetreiber (20) in der Richtung parallel zu den Reihenelektroden (10) das eingegebene Bildsignal zusätzlich verzerrt.
8. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 1, bei dem eine zweite Gruppe von Reihenelektroden (26) eine erste Gruppe von Reihenelektroden (24) überlappt.
9. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 8, bei dem die zweite Gruppe von Reihenelektroden (26) die erste Gruppe von Reihenelektroden (24) derart überlappt, dass die Summe der Verteilung von Reihenelektrodensignalniveaus in der ersten Gruppe (24) und die Verteilung von Reihenelektrodensignalniveaus in der zweiten Gruppe (26) eine Verteilung bilden, die im Zentrum im Wesentlichen flach ist.
10. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 1, bei dem das dargestellte Bild mit einer Frequenz von weniger als 60 Hz aktualisiert wird.
11. Passives elektrolumineszentes Matrix-Anzeigesystem nach Anspruch 1, bei dem das den Reihenelektroden (10) bereitgestellte Steuersignal ein diskretes Multiniveau-Signal ist und das den Spaltenelektroden (6) bereitgestellte Steuersignal pulswidenmoduliert ist.

Revendications

1. Système d'affichage électroluminescent, à matrice passive, destiné à recevoir une image d'entrée, traiter cette image d'entrée et afficher cette image traitée, comprenant :

a. un affichage électroluminescent, à matrice passive comportant un réseau d'électrodes de colonne (6), un réseau d'électrodes de rangée (10) orientées orthogonalement au réseau d'électrodes de colonne (6) et une couche électroluminescente (8) située entre le réseau d'électrodes de colonne (6) et le réseau d'électrodes de rangée (10), l'intersection de chaque électrode de colonne (6) et de rangée (10) formant un élément électroluminescent (12) individuel ;

b. un ou plusieurs conducteurs de rangée (16) conçus pour fournir des signaux d'excitation séparés à des moments différents aux différents groupes d'électrodes de rangée (24, 26) au sein du réseau d'électrodes de rangée (10), dans lequel les électrodes de rangée de chaque groupe reçoivent simultanément au moins deux signaux de niveaux différents ;

c. un pilote d'affichage (20) conçu pour recevoir le signal d'image d'entrée et traiter ce signal d'image d'entrée à l'aide d'un filtrage de pré-affinement pour fournir un signal de commande d'image pré-affinée ; et

d. un ou plusieurs conducteurs de colonne (18) conçus pour, en réponse au signal de commande d'image pré-affinée, fournir simultanément un signal d'excitation à toutes les électrodes de colonne au sein du réseau d'électrodes de colonne (10) en même temps que les signaux d'excitation sont fournis aux groupes d'électrodes de rangée (24, 26) de sorte que la coïncidence des signaux de rangée et de colonne amène les éléments électroluminescents (12) individuels à produire de la lumière, dans lequel chaque groupe d'électrodes de rangée (24, 26) contient au moins trois électrodes de rangée, et l'image est affichée en modulant les tensions appliquées aux éléments électroluminescents (12) à travers les électrodes de colonne (6) et les électrodes de rangée (10),

caractérisé en ce que

les niveaux de signaux d'électrodes de rangée au sein de chaque groupe d'électrodes de rangée (24, 26) sont répartis de telle sorte que l'électrode (les électrodes) de rangée (10) au centre du groupe reçoive(nt) un niveau de signal de pointe et les autres électrodes (10) dans le groupe reçoivent des niveaux de signaux intérieurs, non nuls.

2. Système d'affichage électroluminescent, à matrice passive selon la revendication 1, dans lequel chaque groupe d'électrodes de rangée (24, 26) contient au moins cinq électrodes de rangée (10).
3. Système d'affichage électroluminescent, à matrice passive selon la revendication 1, dans lequel le niveau de signal d'électrode de rangée pour l'électrode (les électrodes) de rangée (10) centrale(s) dans le groupe d'électrodes de rangée (24, 26) est plus élevé que pour l'une quelconque des autres électrodes de rangée (10) dans le groupe d'électrodes de rangée (24, 26).
4. Système d'affichage électroluminescent, à matrice passive selon la revendication 1, dans lequel le niveau de signal d'électrode de rangée reçu par les électrodes de rangée (10) dans le groupe diminue, puis augmente jusqu'à un maximum secondaire et diminue ensuite à nouveau à mesure que la distance depuis l'électrode (les électrodes) (10) centrale(s) augmente.
5. Système d'affichage électroluminescent, à matrice passive selon la revendication 1, dans lequel la répartition des niveaux de signaux d'électrode de rangée pour chacune des électrodes de rangée (10) dans un groupe sont répartis de telle sorte qu'ils diminuent de façon monotone à mesure que la distance depuis l'électrode (les électrodes) (10) centrale(s) augmente.
6. Système d'affichage électroluminescent, à matrice passive selon la revendication 5, dans lequel la distribution est approximativement gaussienne.
7. Système d'affichage électroluminescent, à matrice passive selon la revendication 1, dans lequel le pilote d'affichage (20) dans la direction parallèle aux électrodes de rangée (10), brouille en outre le signal d'image d'entrée.
8. Système d'affichage électroluminescent, à matrice passive selon la revendication 1, dans lequel un deuxième groupe d'électrodes de rangée (26) chevauche un premier groupe d'électrodes de rangée (24).
9. Système d'affichage électroluminescent, à matrice passive selon la revendication 8, dans lequel le deuxième groupe d'électrodes de rangée (26) chevauche le premier groupe d'électrodes de rangée (24) de telle sorte que la somme de la répartition des niveaux de signaux d'électrode de rangée dans le premier groupe (24) et la répartition des niveaux de signaux d'électrode de rangée dans le deuxième groupe (26) forment une distribution qui est sensiblement plate dans le centre.

10. Système d'affichage électroluminescent, à matrice passive selon la revendication 1, dans lequel l'image affichée est rafraîchie à une vitesse inférieure à 60 Hz.

5

11. Système d'affichage électroluminescent, à matrice passive selon la revendication 1, dans lequel le signal d'excitation fourni aux électrodes de rangée (10) est un signal discret multi-niveaux et le signal d'excitation fourni aux électrodes de colonne (6) est modulé en largeur d'impulsion.

10

15

20

25

30

35

40

45

50

55

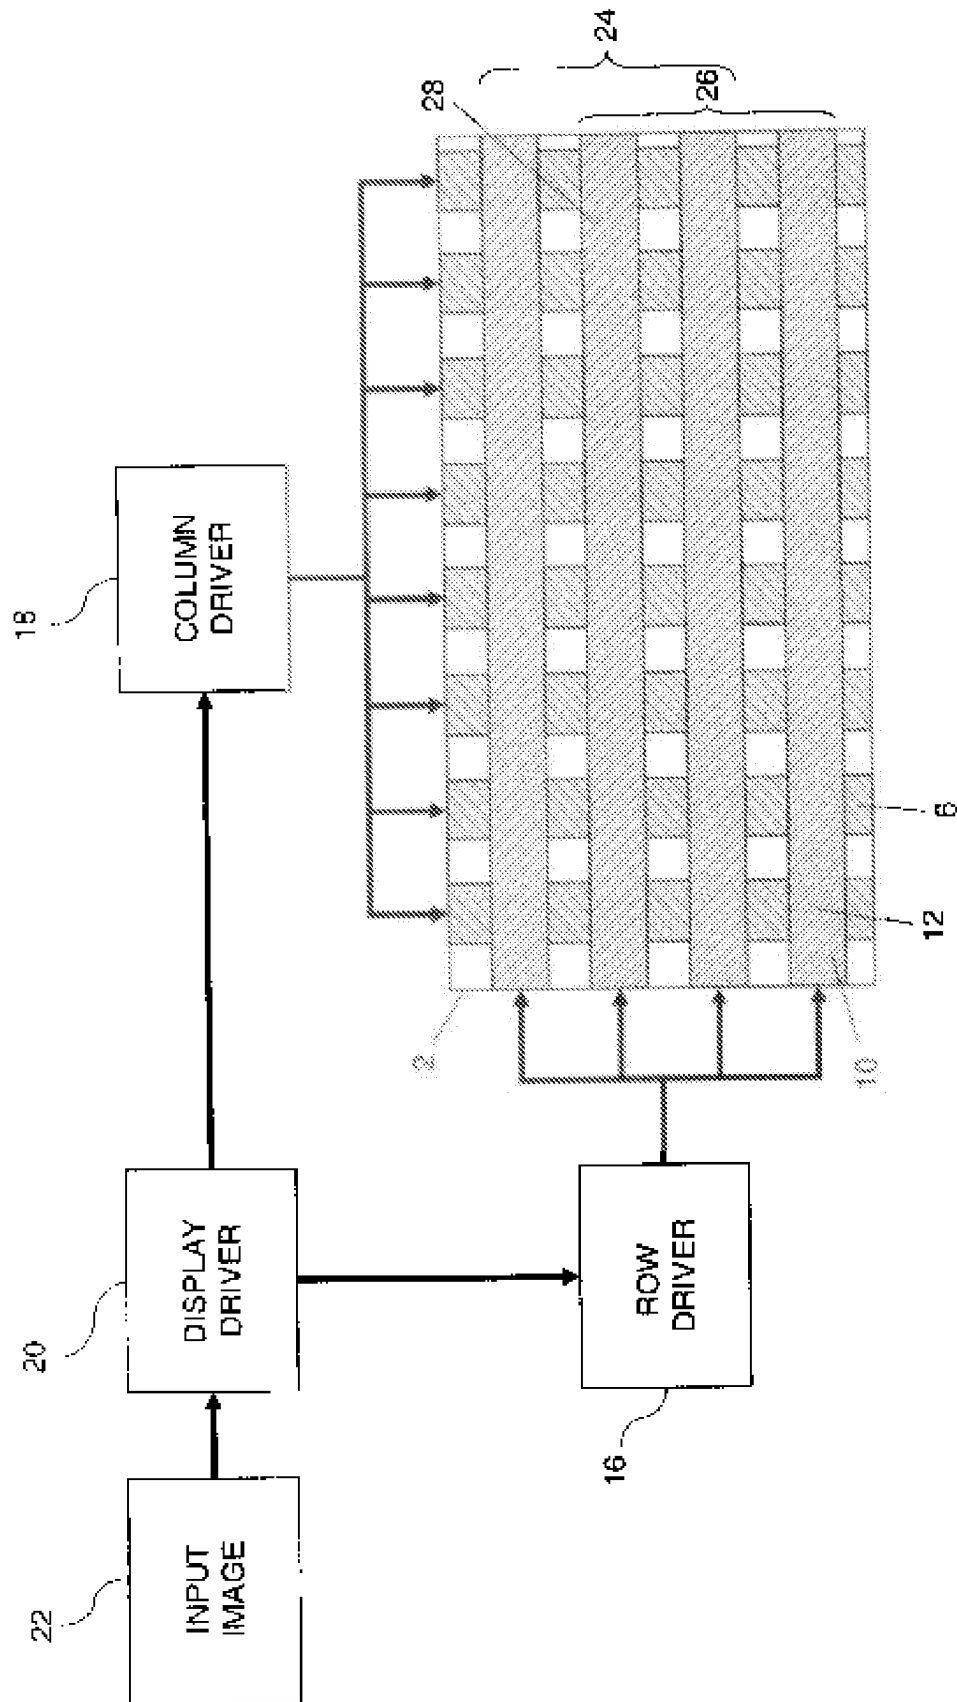
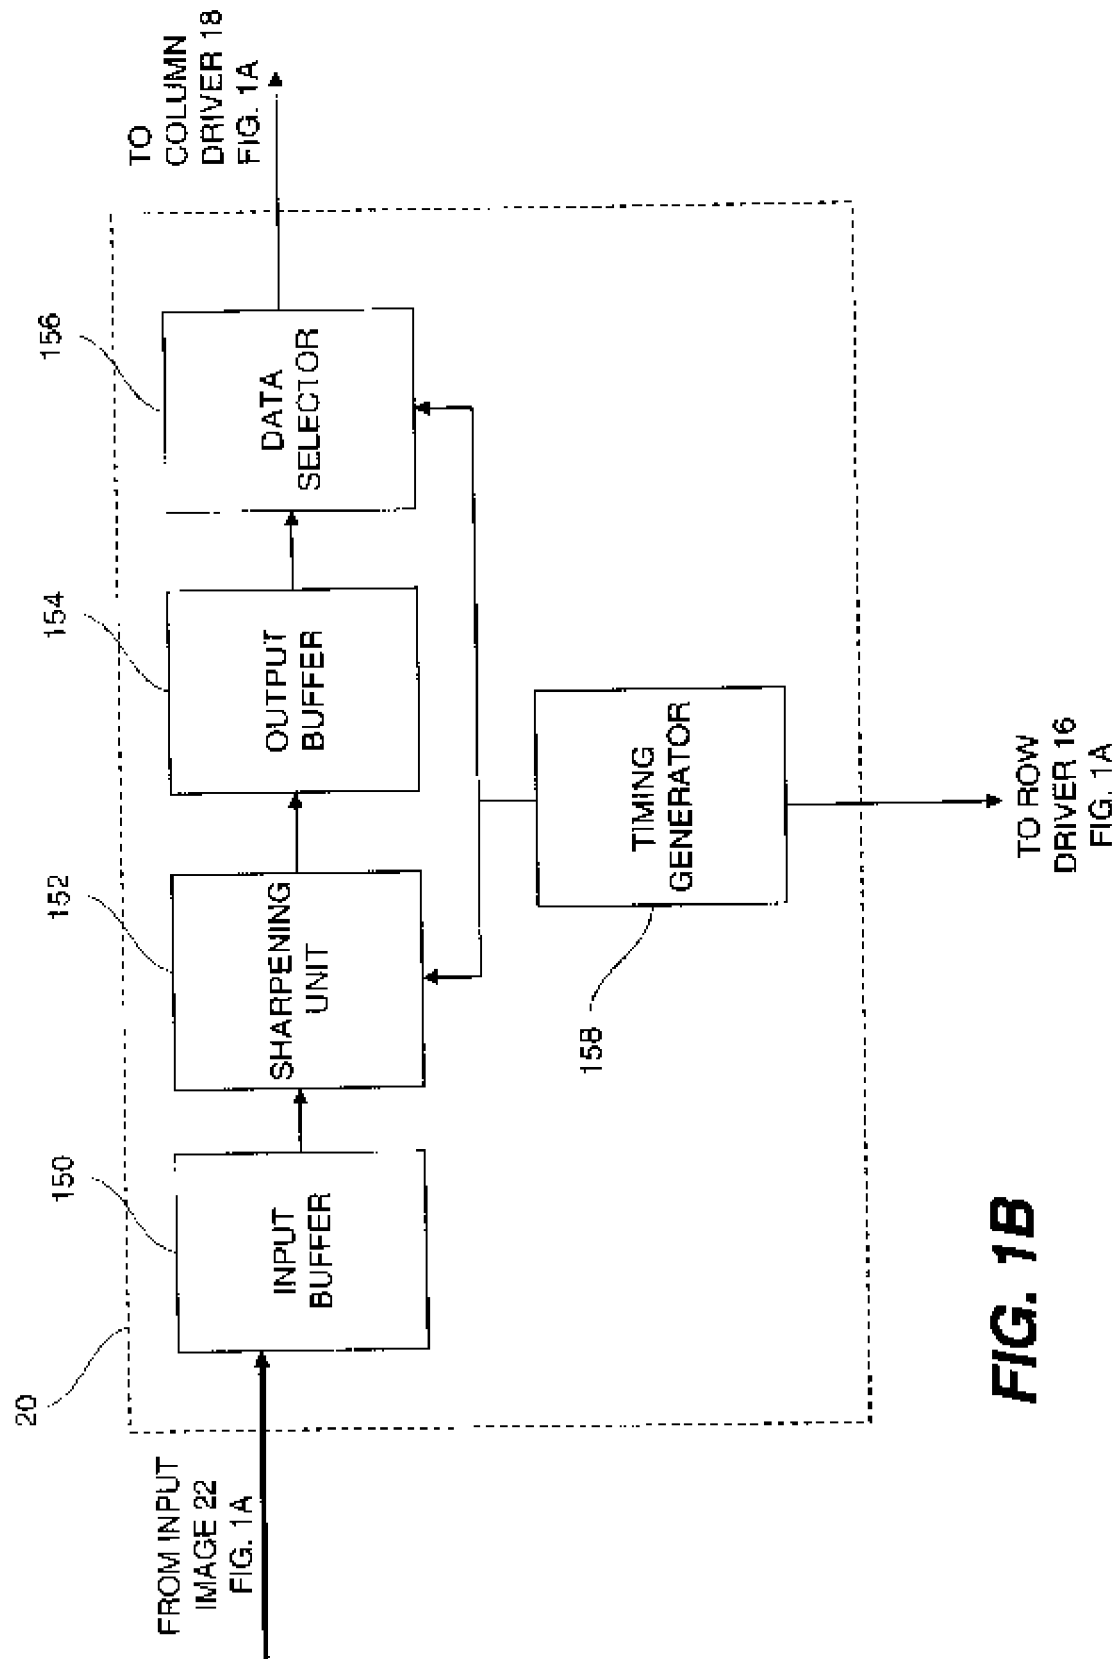


FIG. 1A

**FIG. 1B**

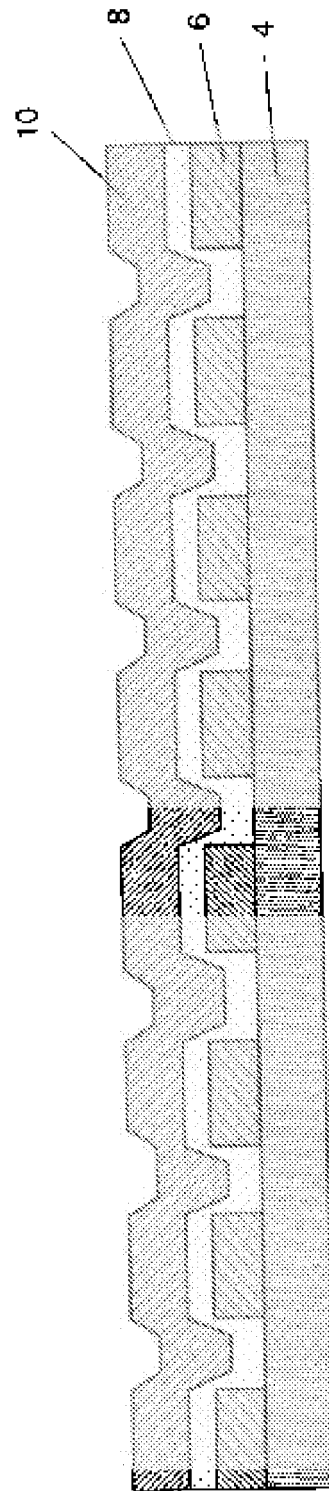


FIG. 2

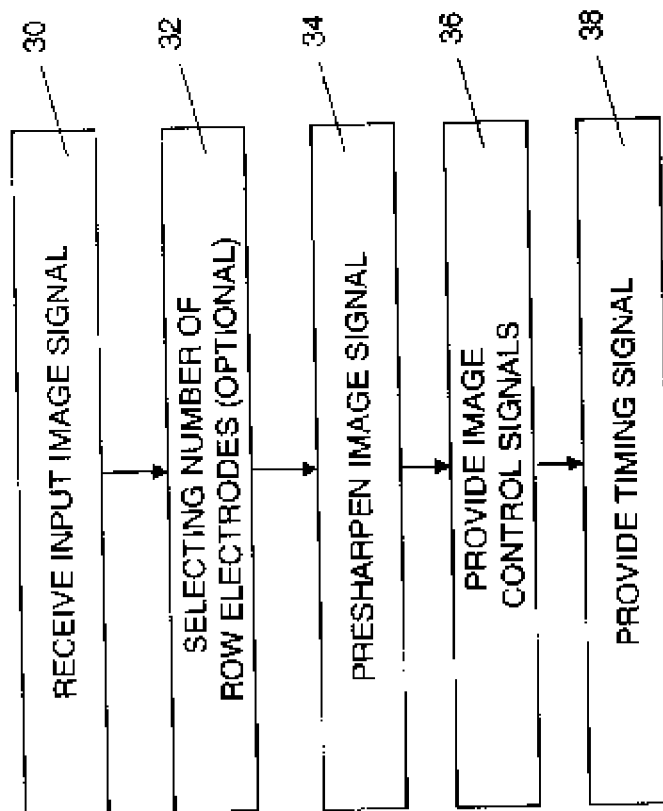


FIG. 3

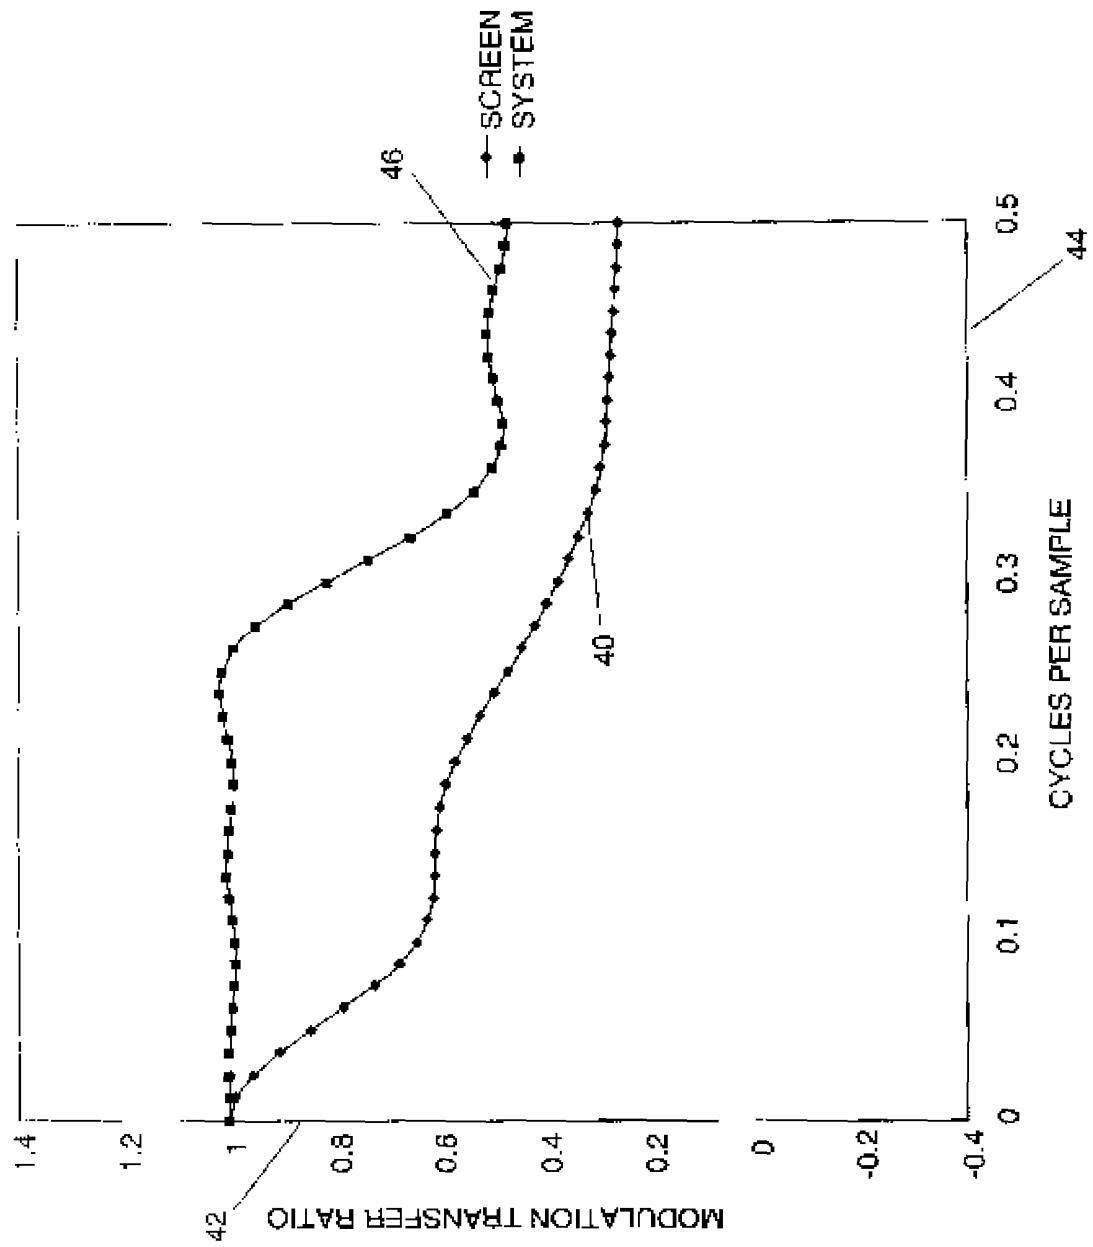


FIG. 4

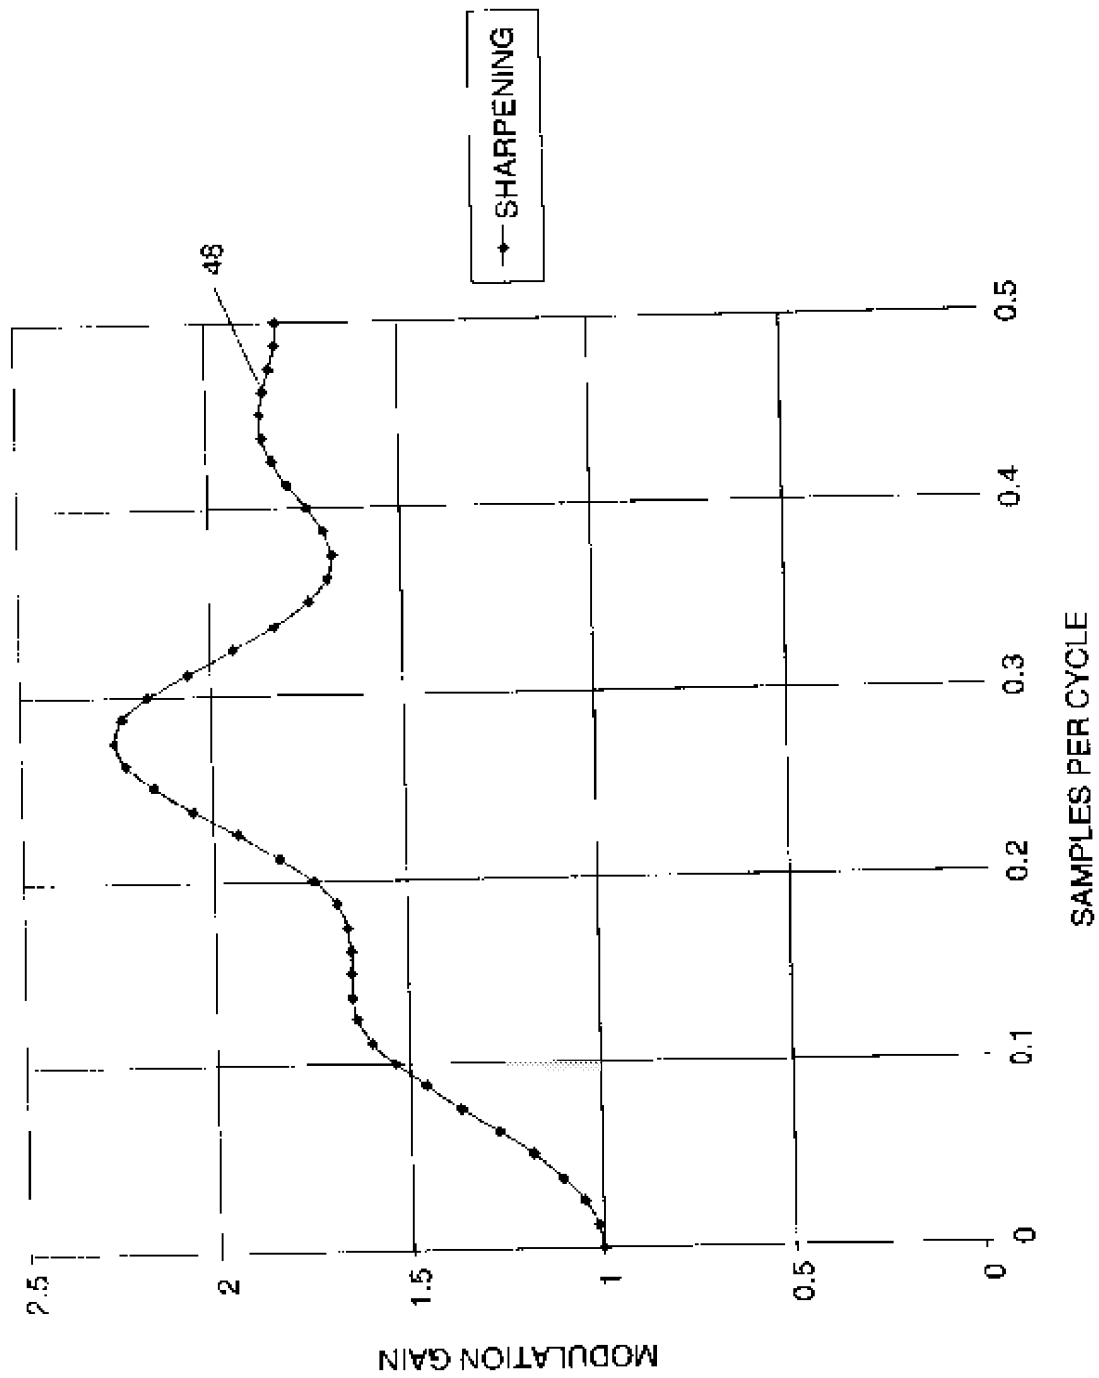


FIG. 5

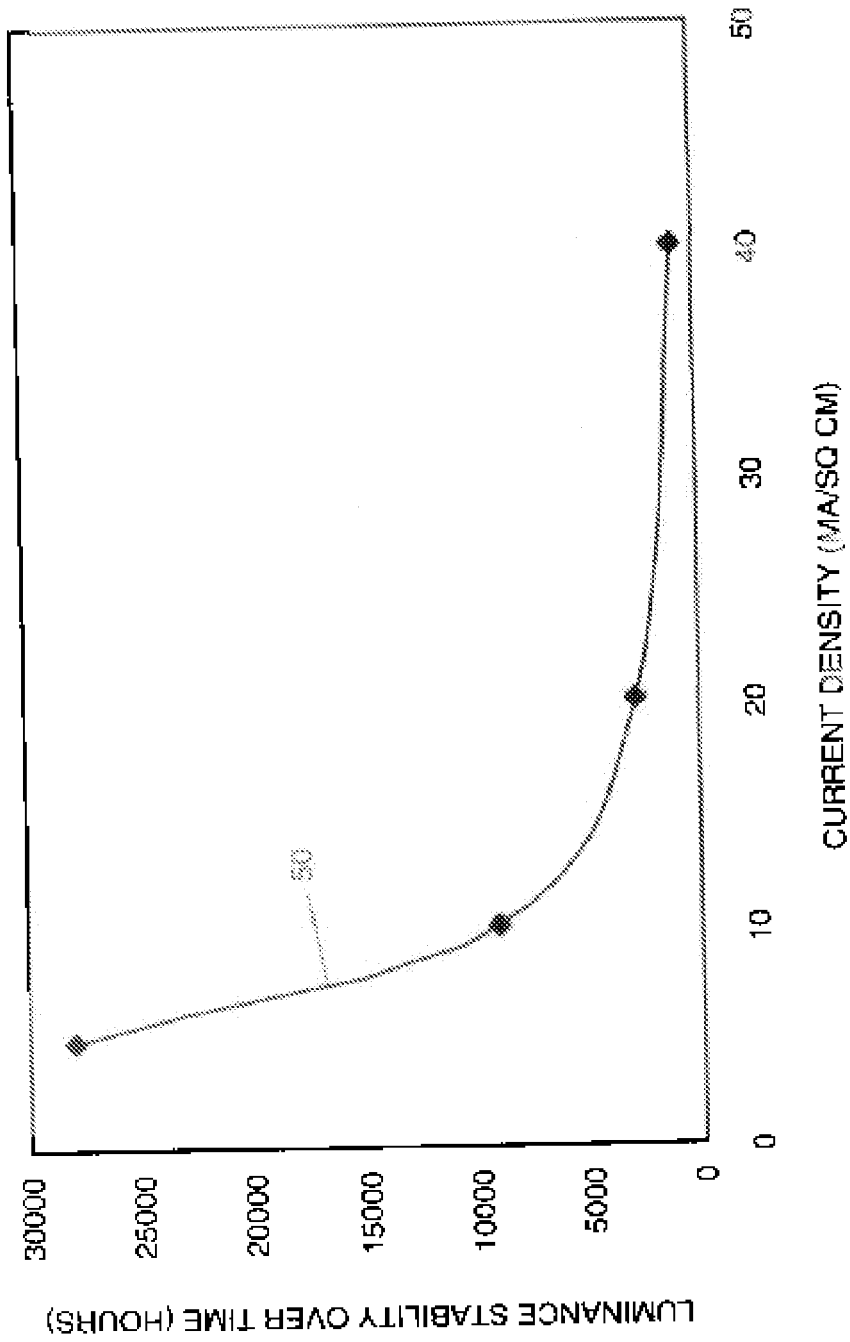


FIG. 6

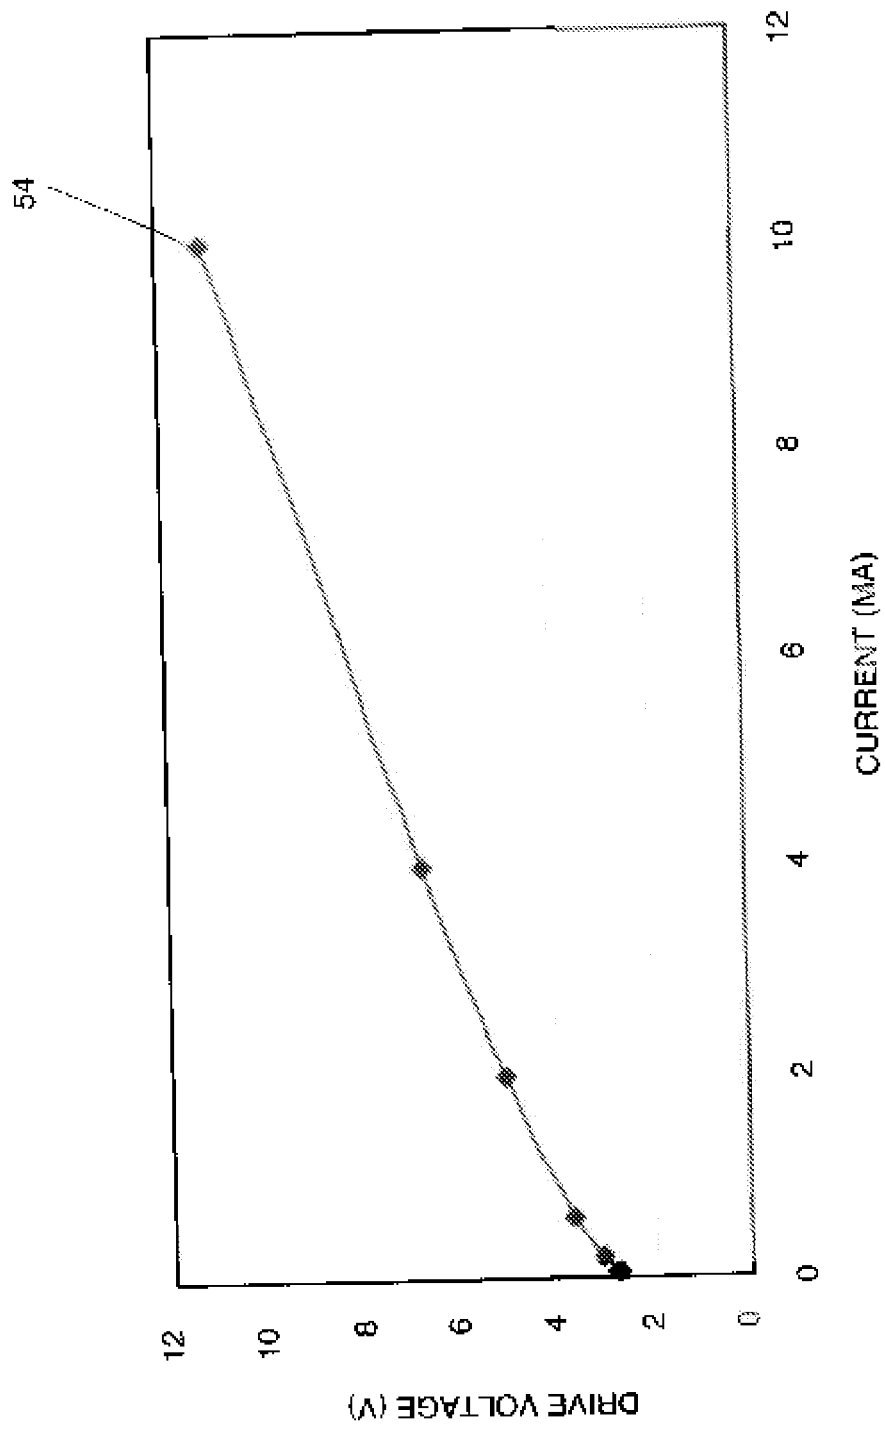
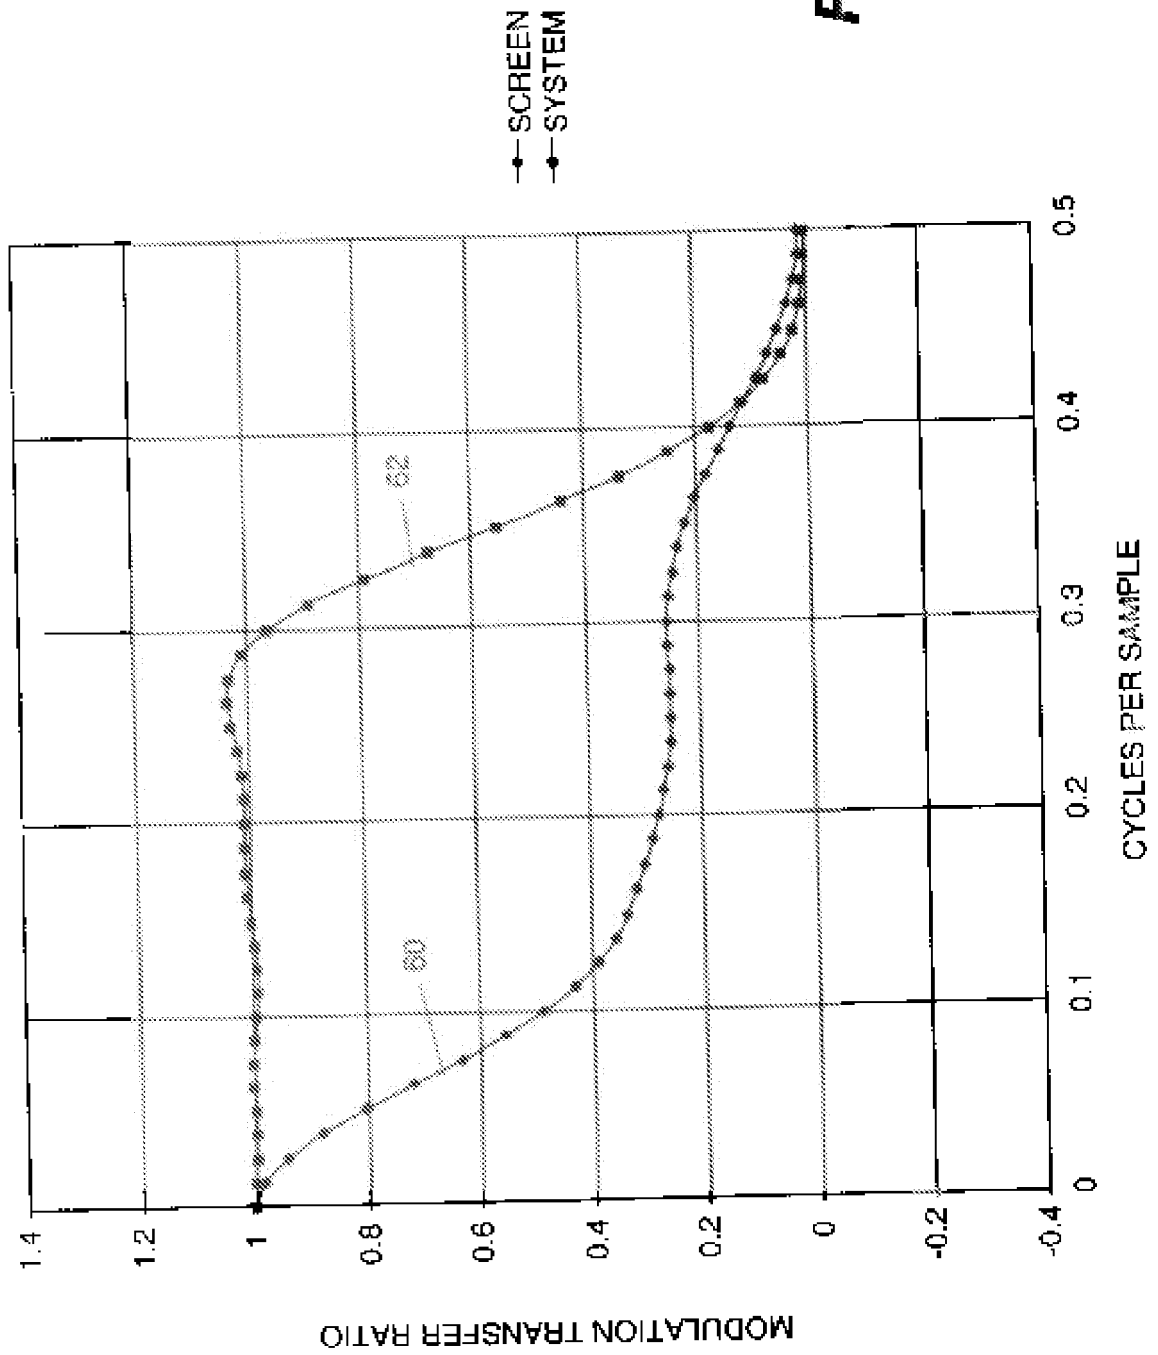
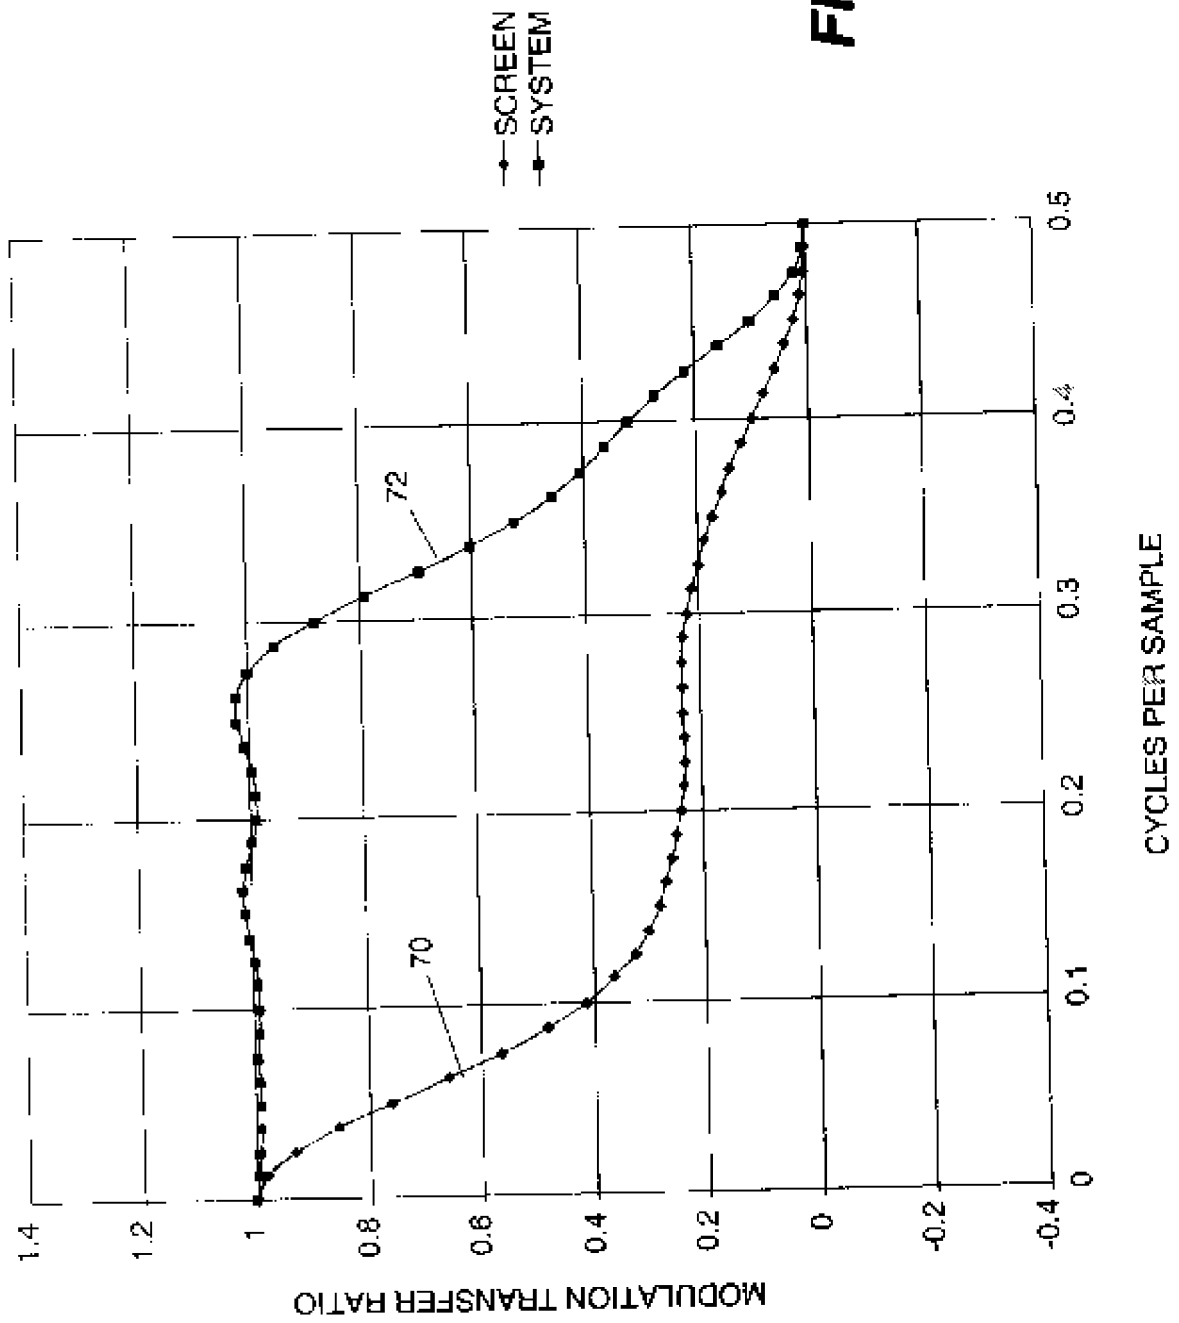


FIG. 7





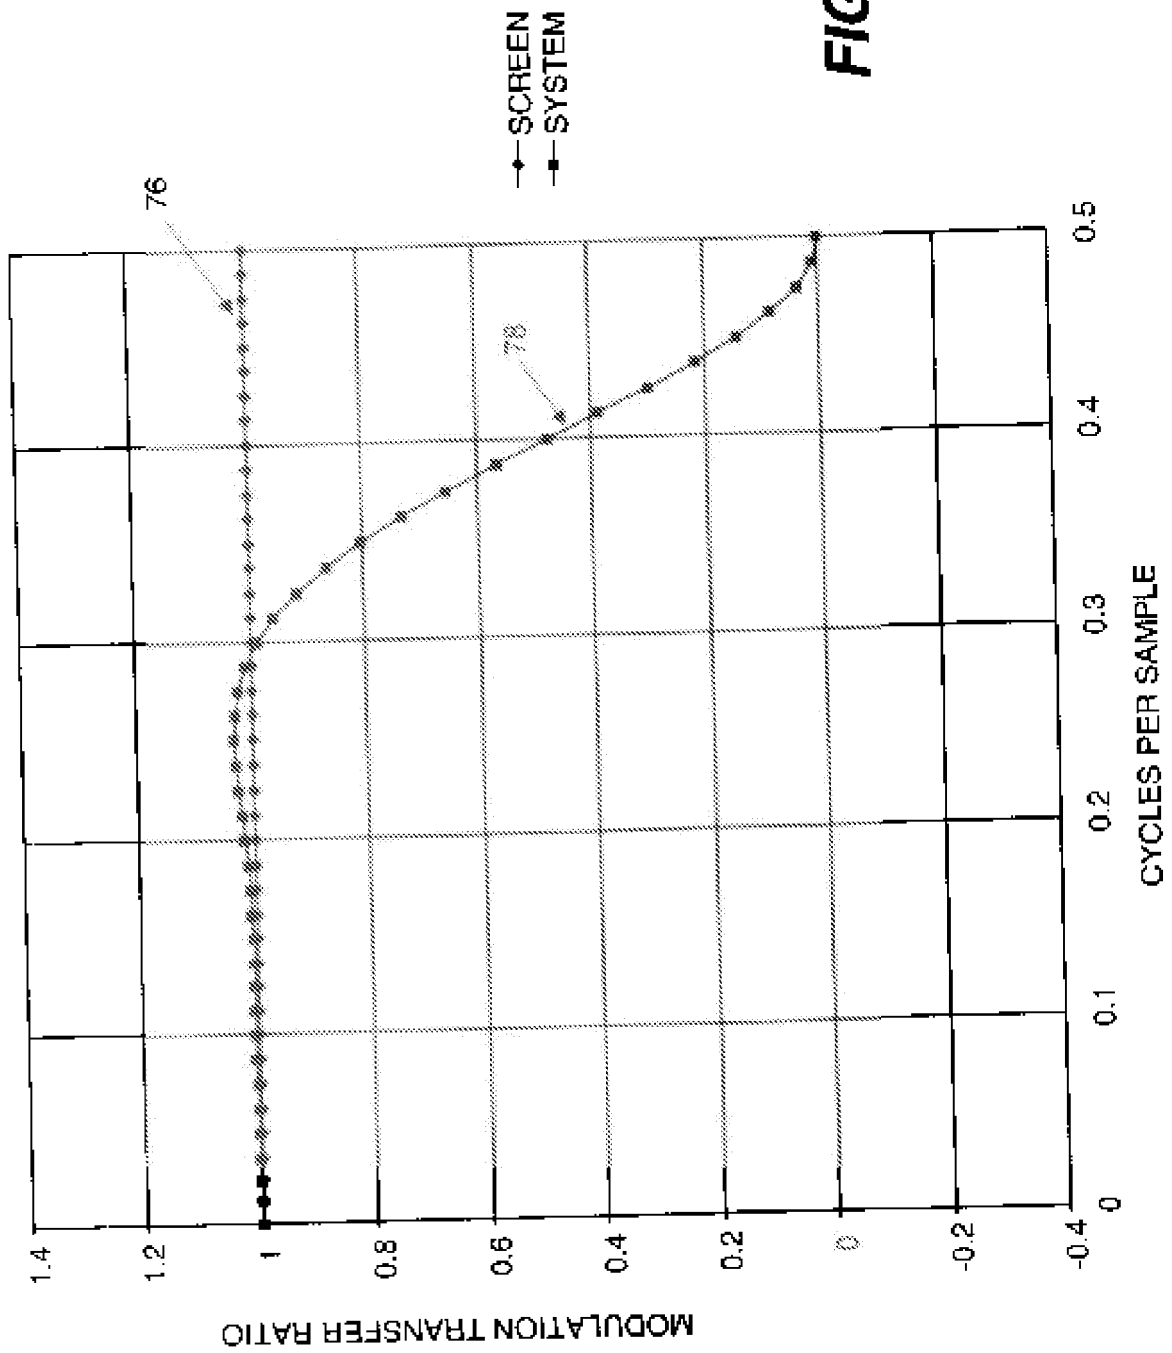


FIG. 10


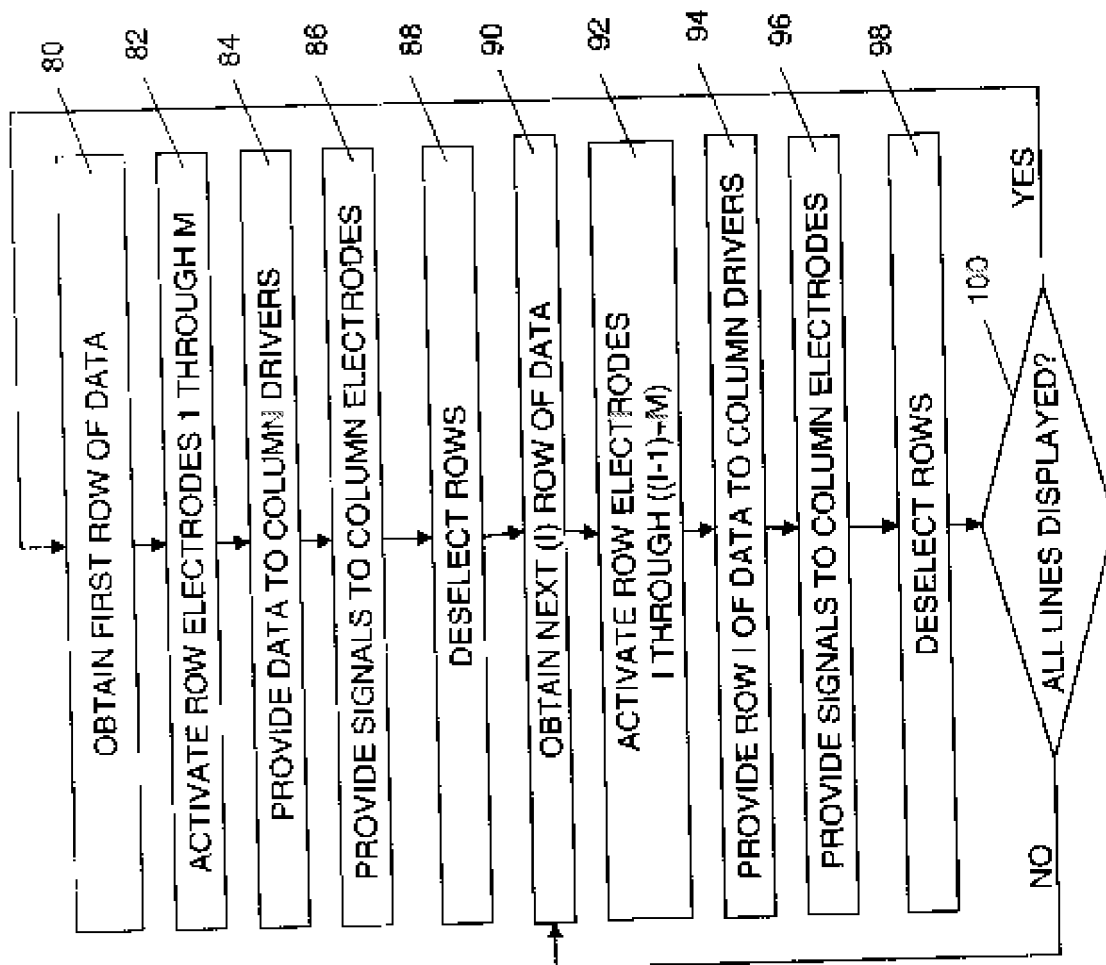
**FIG. 11**

FIG. 12

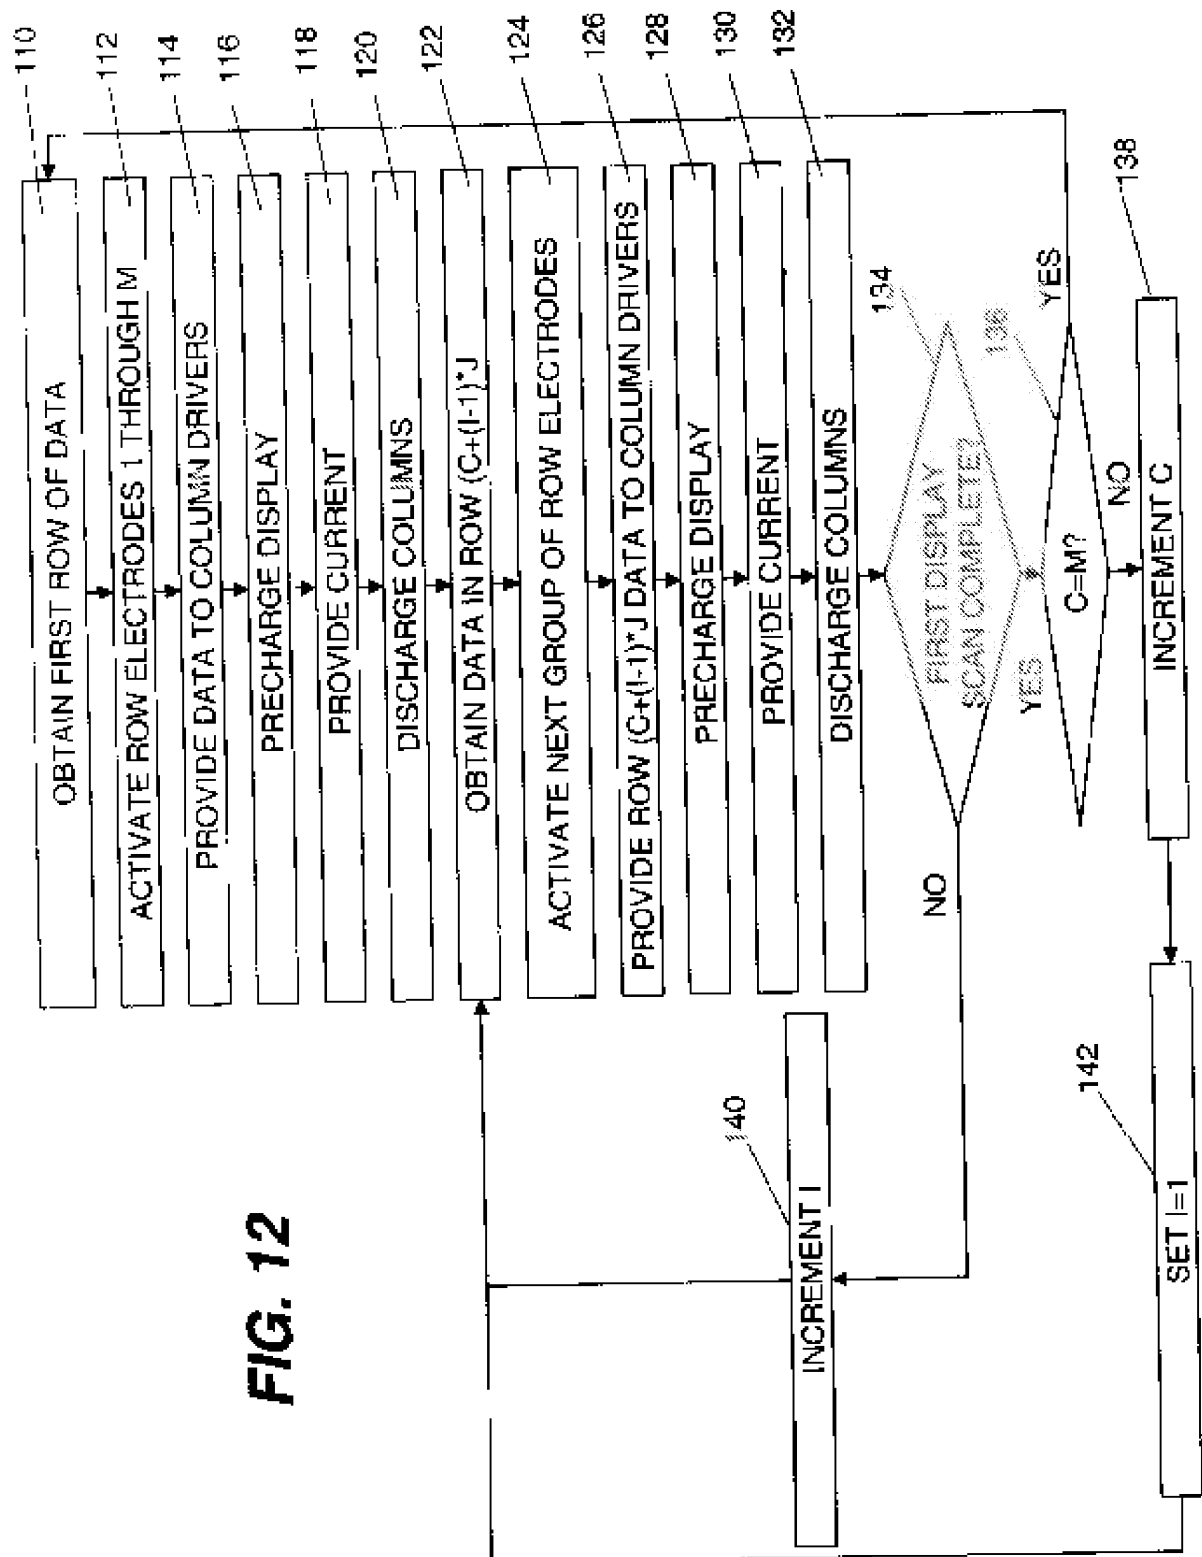

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5844368 A [0004]
- US 20040125046 A [0009]
- EP 1739650 A [0010]
- WO 2006035246 A, Smith [0011]
- WO 2006035248 A [0011]
- WO 2006067520 A [0011]
- EP 1457958 A [0012]
- GB 2429565 A [0013]
- WO 2006035248 A1 [0014]
- EP 1408479 A2 [0015]
- US 10320195 B [0051]
- US 4769292 A, Tang [0052]
- US 5061569 A, VanSlyke [0052]
- US 6861155 B, Bawendi [0052]
- US 11226622 B [0052]

Non-patent literature cited in the description

- **SOH et al.** *Dependence of OLED Display Degradation on Driving Conditions* [0005]
- **YANG et al.** *PMOLED Driver Design with Pre-charge Power Saving Algorithm* [0006]
- **EISENBRAND.** *Multiline Addressing by Network Flow* [0010]

专利名称(译)	无源矩阵电致发光显示系统		
公开(公告)号	EP2137716A1	公开(公告)日	2009-12-30
申请号	EP2008742599	申请日	2008-04-07
[标]申请(专利权)人(译)	伊斯曼柯达公司		
申请(专利权)人(译)	伊士曼柯达公司		
当前申请(专利权)人(译)	全球OLED科技有限责任公司		
[标]发明人	MILLER MICHAEL EUGENE HAMILTON JOHN FRANKLIN JR ARNOLD DANIEL ANDREW		
发明人	MILLER, MICHAEL EUGENE HAMILTON, JOHN, FRANKLIN, JR. ARNOLD, DANIEL ANDREW		
IPC分类号	G09G3/32 G09G3/3216		
CPC分类号	G09G3/3216 G09G2310/0208 G09G2320/0247 G09G2320/043 G09G2330/025		
优先权	11/737786 2007-04-20 US		
其他公开文献	EP2137716B1		
外部链接	Espacenet		

摘要(译)

无源矩阵电致发光显示系统具有无源矩阵，具有正交定向的列和行电极阵列的电致发光显示器和位于每个列和行电极的交叉处的电极之间形成个体的电致发光层发光元件。驱动器在不同时间向行电极阵列内的不同行电极组提供单独的信号；其中每组的行电极同时接收至少两个不同的电平信号。显示驱动器接收并处理输入图像信号以提供预先锐化的图像控制信号。列驱动器响应预先锐化的图像控制信号，用于同时向列电极阵列内的多个列电极提供信号，同时向行电极组提供信号，使得行和列信号的并发导致单独的光。 - 发光元件发光。