



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
26.10.2016 Bulletin 2016/43

(51) Int Cl.:
G02F 1/1343 ^(2006.01) **G02F 1/1337** ^(2006.01)
G02F 1/1362 ^(2006.01)

(21) Application number: **15189705.5**

(22) Date of filing: **14.10.2015**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

(71) Applicant: **LG Display Co., Ltd.**
Yeongdeungpo-gu
Seoul
150-721 (KR)

(72) Inventors:
• **WOO, ChangSeung**
412-020 Gyeonggi-do (KR)
• **HONG, Soonhwan**
122-802 Seoul (KR)

(30) Priority: **21.04.2015 KR 20150056172**
03.09.2015 KR 20150125102

(74) Representative: **Ter Meer Steinmeister & Partner**
Patentanwälte mbB
Nymphenburger Straße 4
80335 München (DE)

(54) **LIQUID CRYSTAL DISPLAY**

(57) A liquid crystal display is disclosed. The liquid crystal display includes an upper plate and a lower plate positioned opposite each other with a liquid crystal layer interposed therebetween, and a spacer positioned between the upper plate and the lower plate. The lower plate includes a lower electrode and an upper electrode configured to overlap each other with an insulating layer interposed therebetween, and an alignment layer configured to contact the lower electrode and the upper electrode. The alignment layer contacts the lower electrode through a hole passing through the insulating layer.

FIG. 2


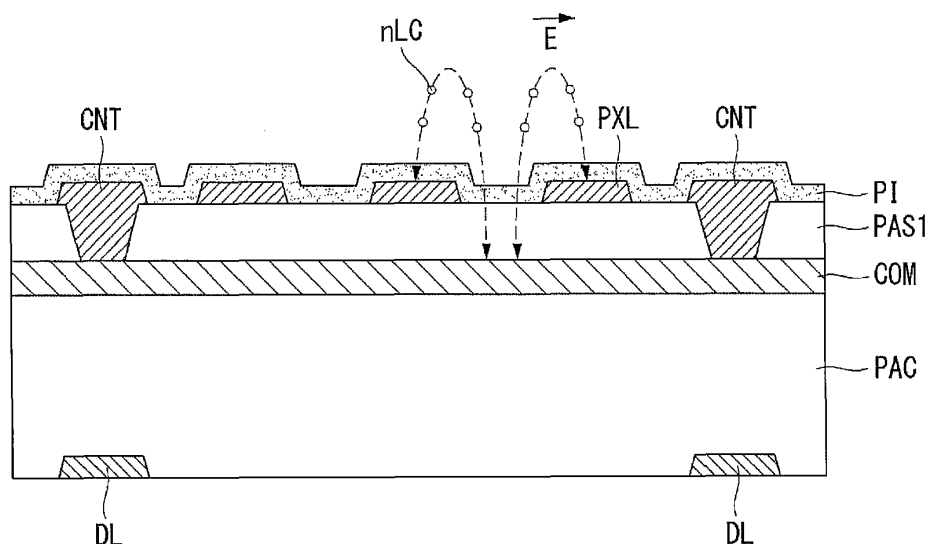


FIG. 10

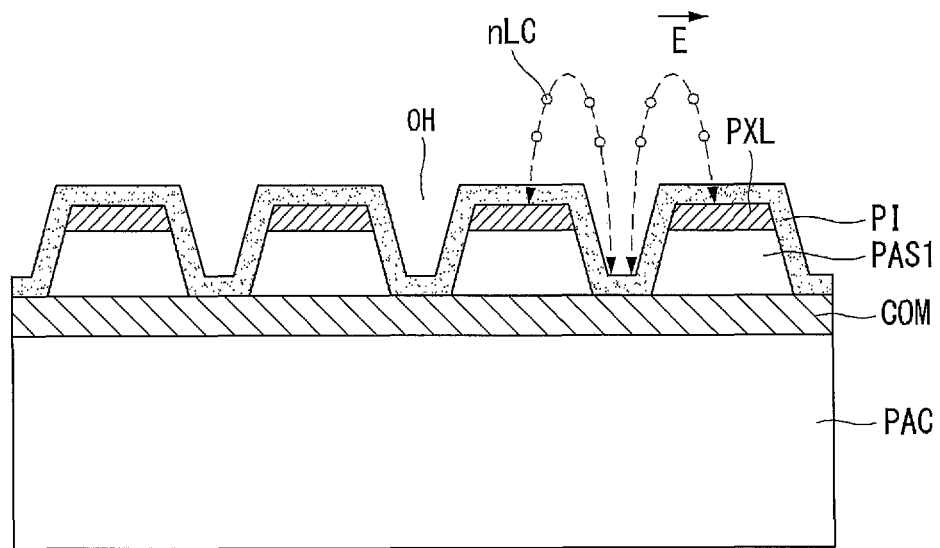

Description

[0001] This application claims the benefit of Korean Patent Application No. 10-2014-0056172 filed on April 21, 2015, the entire contents of which is incorporated herein by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION**Field of the Invention**

[0002] Embodiments of the invention relate to a liquid crystal display having a low speed driving mode.

Discussion of the Related Art

[0003] Various flat panel displays, such as a liquid crystal display (LCD), a plasma display panel (PDP), an organic light emitting diode (OLED) display, and an electrophoresis display (EPD), have been developed. The liquid crystal display displays an image by controlling an electric field applied to liquid crystal molecules based on a data voltage. An active matrix liquid crystal display includes a thin film transistor (TFT) in each pixel.

[0004] The liquid crystal display includes a liquid crystal display panel, a backlight unit irradiating light onto the liquid crystal display panel, source driver integrated circuits (ICs) for supplying a data voltage to data lines of the liquid crystal display panel, gate driver ICs for supplying gate pulses (or scan pulses) to gate lines (or scan lines) of the liquid crystal display panel, a control circuit for controlling the source driver ICs and the gate driver ICs, a light source driving circuit for driving light sources of the backlight unit, and the like.

[0005] When a DC voltage is applied to liquid crystals of the liquid crystal display, image persistence may be generated. The image persistence is a phenomenon, in which a previous image is seen although a screen image is updated. The image persistence remarkably appears when a static image is displayed on the liquid crystal display for a long period of time or an application time of the DC voltage applied to the liquid crystals increases. As an example of a mechanism generating the image persistence, there is a phenomenon, in which impurity ions in a liquid crystal layer are accumulated on an alignment layer for setting a pretilt angle of liquid crystal molecules. Negatively charged ions and positively charged ions based on a polarity of an electric field applied to the liquid crystals move along a motion vector and are polarized in opposite directions. Because the motion vector is not changed, an amount of impurity ions accumulated on the alignment layer increases as time passed. An increase in the amount of impurity ions affects a behavior characteristic returning to an initial alignment state of the liquid crystals, thereby generating the image persistence.

[0006] The liquid crystal display may operate in a low speed driving mode so as to reduce power consumption and may reduce a frame rate or a frame frequency when an input image is the static image. However, when the frame frequency is reduced, a luminance may be suddenly changed each time the data voltage is changed. Further, because a voltage discharge time of the pixel increases, a flicker phenomenon, in which the image flickers, may be generated. Thus, a method capable of preventing a reduction in image quality of the liquid crystal display in the low speed driving mode is required.

[0007] Further, the low speed driving mode is weak to the image persistence because the application time of the DC voltage applied to the liquid crystals increases. Thus, a method capable of preventing a reduction in the image quality of the liquid crystal display in the low speed driving mode is required.

SUMMARY OF THE INVENTION

[0008] Embodiments of the invention provide a liquid crystal display capable of preventing a reduction in image quality in a low speed driving mode.

[0009] In one aspect, there is a liquid crystal display comprising an upper plate and a lower plate positioned opposite each other with a liquid crystal layer interposed therebetween, and a spacer positioned between the upper plate and the lower plate.

[0010] The lower plate includes a lower electrode and an upper electrode configured to overlap each other with an insulating layer interposed therebetween, and an alignment layer configured to contact the lower electrode and the upper electrode. The alignment layer contacts the lower electrode through a hole passing through the insulating layer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

FIG. 1 is a block diagram showing a liquid crystal display according to an exemplary embodiment of the invention;
 FIG. 2 shows a structure of a lower plate of a liquid crystal display according to a first embodiment of the invention;
 FIG. 3 shows a structure of a lower plate of a liquid crystal display according to a second embodiment of the invention;
 FIGS. 4A and 4B show a result of an image persistence experiment conducted on a related art and an embodiment
 of the invention;
 FIG. 5 shows an image pattern of a sample used in an image persistence experiment;
 FIGS. 6A to 6E show various ratios of a contact area between an alignment layer and a pixel electrode to a contact
 area between the alignment layer and a common electrode;
 FIG. 7 is a plane view enlarging one subpixel in a liquid crystal display according to a first embodiment of the invention;
 FIG. 8 is a cross-sectional view taken along line I-I' of FIG. 6 and shows a cross-sectional structure of a lower plate
 of a liquid crystal display;
 FIG. 9 is a cross-sectional view showing conductive connectors overlapping a data line and a column spacer;
 FIG. 10 shows a structure of a lower plate of a liquid crystal display according to a third embodiment of the invention;
 FIG. 11 shows a structure of a lower plate of a liquid crystal display according to a fourth embodiment of the invention;
 FIG. 12 is a plane view enlarging one subpixel in a liquid crystal display according to a third embodiment of the
 invention;
 FIG. 13 is a cross-sectional view taken along line II-II' of FIG. 12 and shows a cross-sectional structure of a lower
 plate of a liquid crystal display;
 FIG. 14 is a cross-sectional view showing a method for forming an open hole in the liquid crystal display shown in
 FIG. 13;
 FIG. 15 is a plane view showing a comparison between an exemplary embodiment of the invention and a comparative
 example with respect to an open area of a pixel structure; and
 FIG. 16 is cross-sectional views taken along lines III-III' and IV-IV' of FIG. 15 and shows a cross-sectional structure
 of a lower plate of a liquid crystal display.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0012] Reference will now be made in detail to embodiments of the invention, examples of which are illustrated in the
 accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer
 to the same or like parts. It will be paid attention that detailed description of known arts will be omitted if it is determined
 that the arts can mislead the embodiments of the invention.

[0013] Referring to FIG. 1, a liquid crystal display according to an exemplary embodiment of the invention includes a
 display panel 100 including a pixel array, a display panel driver for writing data of an input image on the display panel
 100, and the like. A backlight unit for uniformly irradiating light onto the display panel 100 may be disposed under the
 display panel 100.

[0014] The liquid crystal display according to the embodiment of the invention may be implemented as any type liquid
 crystal display including a transmissive liquid crystal display, a transfective liquid crystal display, and a reflective liquid
 crystal display. The transmissive liquid crystal display and the transfective liquid crystal display require the backlight
 unit. The backlight unit may be implemented as a direct type backlight unit or an edge type backlight unit.

[0015] The display panel 100 includes an upper plate and a lower plate, which are positioned opposite each other
 with a liquid crystal layer interposed therebetween. The pixel array of the display panel 100 includes pixels arranged in
 a matrix form based on a crossing structure of data lines S1 to Sm and gate lines G1 to Gn. Each pixel adjusts a
 transmission amount of light using liquid crystal molecules driven by a voltage difference between a pixel electrode 1
 charged to a data voltage through a thin film transistor (TFT) and a common electrode 2, to which a common voltage
 Vcom is supplied.

[0016] The lower plate of the display panel 100 includes the data lines S1 to Sm, the gate lines G1 to Gn, the common
 electrode 2, thin film transistors (TFTs), the pixel electrodes 1 connected to the TFTs, storage capacitors Cst connected
 to the pixel electrodes 1, and the like. Each TFT is formed in each subpixel and is connected to the pixel electrode 1.
 The TFT may be implemented as an amorphous silicon (a-Si) TFT, a low temperature polysilicon (LTPS) TFT, an oxide
 TFT, and the like. The TFTs are respectively connected to the pixel electrodes 1 of the subpixels. The common electrode
 2 and the pixel electrode 1 are separated from each other with an insulating layer interposed therebetween.

[0017] A color filter array including black matrixes and color filters is formed on the upper plate of the display panel 100.

[0018] The liquid crystal layer is formed between the upper plate and the lower plate of the display panel 100. Polarizing
 plates are respectively attached to the upper plate and the lower plate of the display panel 100. Alignment layers for
 setting a pretilt angle of liquid crystals are respectively formed on the upper plate and the lower plate of the display panel
 100. The alignment layer is formed of a polymer material capable of being photoaligned, for example, polyimide. A
 spacer for maintaining a cell gap of a liquid crystal cell Clc may be formed between the upper plate and the lower plate
 of the display panel 100.

[0019] The embodiment of the invention brings the alignment layer into contact with the common electrode 2 and the pixel electrode 1 and forms a discharge path on the alignment layer, so as to reduce image persistence and a flicker of the liquid crystal display.

[0020] The embodiment of the invention implements the TFT of the pixel array as the oxide TFT and implements the liquid crystal layer using negative liquid crystals (nLC), so as to further improve image quality of the liquid crystal display in a low speed driving mode. Further, photoalignment processing is performed on the alignment layer.

[0021] Because a leakage current of the oxide TFT in an off-state is very low, a discharge of the pixels can be suppressed in the low speed driving mode. The oxide TFT may be applied to a liquid crystal display using an etch stopper ES (refer to FIGS. 7 and 8) and also may be applied to a back channel etch (BCE) liquid crystal display.

[0022] The photoalignment layer may improve a contrast ratio by reducing a light leakage phenomenon. Ultraviolet ray is irradiated onto the photoalignment layer in an alignment process of the liquid crystal molecules. The photoalignment layer causes the pretilt angle of the liquid crystal to be close to zero and can implement the uniform image quality irrespective of a viewing angle.

[0023] Because a transmittance of the negative liquid crystal is greater than a transmittance of a positive liquid crystal, the negative liquid crystals may improve a luminance of an image. The negative liquid crystal is a liquid crystal, in which a difference between a dielectric constant of a long axis and a dielectric constant of a short axis is a negative value. When a voltage is applied to the negative liquid crystal, a short axis of a liquid crystal molecule is parallel to an electric field E.

[0024] The display panel driver includes a data driver 102 and a gate driver 104. The display panel driver operates in the low speed driving mode when a static image is input under the control of a timing controller 106, and operates in a normal driving mode when a motion picture is input under the control of the timing controller 106. A frame frequency (or a frame rate) of the low speed driving mode is lower than a frame frequency of the normal driving mode.

[0025] The data driver 102 includes a plurality of source driver ICs. Data output channels of the source driver ICs are connected to the data lines S1 to Sm of the pixel array. The source driver ICs receive digital video data of the input image from the timing controller 106. The source driver ICs convert the digital video data of the input image into positive and negative gamma compensation voltages under the control of the timing controller 106 and output positive and negative data voltages. An output voltage of the source driver ICs is supplied to the data lines S1 to Sm. Because a frame frequency of each of the source driver ICs of the data driver 102 is reduced in the low speed driving mode, an operating frequency of each source driver IC is reduced.

[0026] Each source driver IC inverts a polarity of the data voltage to be supplied to the pixels under the control of the timing controller 106 and outputs it to the data lines S1 to Sm. The source driver ICs maintain the polarity of the data voltage applied to the data lines S1 to Sm during one frame period and then may invert the polarity of the data voltage in each frame period. A length of one frame period in the low speed driving mode increases due to the reduced frame frequency.

[0027] The gate driver 104 sequentially supplies gate pulses synchronized with the data voltage to the gate lines G1 to Gn under the control of the timing controller 106. The gate pulses output from the gate driver 104 are synchronized with the positive and negative data voltages, to which the pixels will be charged. The gate driver 104 may be directly formed on the lower plate of the display panel 100 along with the pixel array, so as to reduce the cost of gate driver ICs. Because a frame frequency of the gate driver 104 is reduced in the low speed driving mode, an operating frequency of the gate driver 104 is reduced.

[0028] The timing controller 106 transmits the digital video data of the input image received from a host system 110 to the data driver 102. The timing controller 106 receives timing signals synchronized with the data of the input image from the host system 110. The timing signals include a vertical sync signal Vsync, a horizontal sync signal Hsync, a data enable signal DE, and a clock CLK, etc. The timing controller 106 controls operation timings of the data driver 102 and the gate driver 104 based on the timing signals Vsync, Hsync, DE, and CLK received along with pixel data of the input image. The timing controller 106 may transmit a polarity control signal for controlling a polarity of the pixel array to each of the source driver ICs of the data driver 102.

[0029] The timing controller 106 may control the operation timing of the display panel driver at a frame frequency (unit: Hz) of $\{(a \text{ frame frequency of the input image}) \times N\}$ in the normal driving mode, where N is a positive integer. The frame frequency of the input image in the normal driving mode is 60 Hz in a NTSC (National Television Standards Committee) manner and is 50 Hz in a PAL (Phase-Alternating Line) manner. The frame frequency of the input image in the low speed driving mode may be reduced to 1 Hz to 30 Hz, but is not limited thereto.

[0030] The host system 110 may be implemented as one of a television system, a set-top box, a navigation system, a DVD player, a Blu-ray player, a personal computer (PC), a home theater system, and a phone system.

[0031] The liquid crystal display according to the embodiment of the invention further includes a power unit (not shown). The power unit generates voltages required to drive the display panel 100 using a DC-DC converter. The voltages includes a high potential power voltage Vdd, a logic power voltage Vcc, a gamma reference voltage, a gate high voltage VGH, a gate low voltage VGL, a common voltage Vcom, and the like. The high potential power voltage Vdd is a maximum

value of the data voltage, to which the pixels of the display panel 100 will be charged. The logic power voltage V_{cc} is a power voltage required to drive the timing controller 106, the source driver ICs of the data driver 102, and the gate driver ICs of the gate driver 104. The gate high voltage V_{GH} is a high logic voltage of the gate pulse, which is set to be equal to or greater than a threshold voltage of the TFTs of the pixel array. The gate low voltage V_{GL} is a low logic voltage of the gate pulse, which is set to be less than the threshold voltage of the TFTs of the pixel array. The gate high voltage V_{GH} and the gate low voltage V_{GL} are supplied to the gate driver 104. The gate pulse swings between the gate high voltage V_{GH} and the gate low voltage V_{GL} . The common voltage V_{com} is supplied to the common electrode 2 of the liquid crystal cells Clc. The power unit divides the high potential power voltage V_{dd} and generates the gamma reference voltage. The gamma reference voltage is supplied to the source driver ICs of the data driver 102. The source driver ICs divide the gamma reference voltage and generate positive and negative gamma compensation voltages of each gray level. The source driver ICs convert the digital video data into the positive and negative gamma compensation voltages and output the data voltage.

[0032] FIG. 2 shows a structure of a lower plate of a liquid crystal display according to a first embodiment of the invention.

[0033] Referring to FIG. 2, the liquid crystal display according to the first embodiment of the invention includes a pixel electrode PXL disposed over a common electrode COM with an insulating layer interposed therebetween, a conductive connector CNT contacting the common electrode COM, and an alignment layer PI contacting the pixel electrode PXL and the conductive connector CNT. A passivation layer PAS1 is an insulating layer formed between the common electrode COM and the pixel electrode PXL. Because the conductive connector CNT is connected to the common electrode COM, the conductive connector CNT may be a portion of the common electrode COM.

[0034] In the first embodiment of the invention, the common electrode COM is a lower electrode positioned under the pixel electrode PXL, and the pixel electrode PXL is an upper electrode.

[0035] The conductive connector CNT is formed on the same level layer as the pixel electrode PXL, is filled in a contact hole passing through the passivation layer PAS1, and contacts the common electrode COM. The conductive connector CNT contacts the alignment layer PI. The conductive connector CNT is formed of the same material as the pixel electrode PXL and may be patterned at the same time as the pixel electrode PXL, but is not limited thereto. The conductive connector CNT may be formed of a metal material different from the pixel electrode PXL. The conductive connector CNT connects the alignment layer PI to the pixel electrode PXL and the common electrode COM and forms a discharge path of ions accumulated on the alignment layer PI. The conductive connector CNT covers the common electrode COM and prevents the common electrode COM from being etched in a process for etching the pixel electrode PXL. Further, the conductive connector CNT prevents an increase in a height difference in a connection portion between the alignment layer PI and the common electrode COM.

[0036] The common electrode COM may be formed on an organic passivation layer PAC. The conductive connector CNT may overlap one of the data line DL and the spacer, so as to minimize a reduction in an aperture ratio of the pixel. Alternatively, the conductive connector CNT may overlap both the data line DL and the spacer.

[0037] The black matrix overlaps the TFT, the data line DL, the gate line GL, the spacer, and the conductive connector CNT, so that the above components are not seen.

[0038] FIG. 3 shows a structure of a lower plate of a liquid crystal display according to a second embodiment of the invention.

[0039] Referring to FIG. 3, the liquid crystal display according to the second embodiment of the invention includes a common electrode COM disposed over a pixel electrode PXL with an insulating layer interposed therebetween, a conductive connector CNT contacting the pixel electrode PXL, and an alignment layer PI contacting the common electrode COM and the conductive connector CNT. A passivation layer PAS1 is an insulating layer formed between the common electrode COM and the pixel electrode PXL. Because the conductive connector CNT is connected to the common electrode COM, the conductive connector CNT may be a portion of the common electrode COM.

[0040] In the second embodiment of the invention, the pixel electrode PXL is a lower electrode positioned under the common electrode COM, and the common electrode COM is an upper electrode.

[0041] The conductive connector CNT is formed on the same level layer as the common electrode COM, is filled in a contact hole passing through the passivation layer PAS1, and contacts the pixel electrode PXL. The conductive connector CNT contacts the alignment layer PI. The conductive connector CNT is formed of the same material as the common electrode COM and may be patterned at the same time as the common electrode COM, but is not limited thereto. The conductive connector CNT may be formed of a metal material different from the common electrode COM. The conductive connector CNT connects the alignment layer PI to the pixel electrode PXL and the common electrode COM and forms a discharge path of ions accumulated on the alignment layer PI. The conductive connector CNT covers the pixel electrode PXL and prevents the pixel electrode PXL from being etched in a process for etching the common electrode COM. Further, the conductive connector CNT prevents an increase in a height difference in a connection portion between the alignment layer PI and the common electrode COM.

[0042] The pixel electrode PXL may be formed on an organic passivation layer PAC. The conductive connector CNT may overlap the data line DL or may overlap the spacer and the conductive connector CNT, so as to minimize a reduction

in an aperture ratio of the pixel. The black matrix overlaps the TFT, the data line DL, the gate line GL, and the spacer, so that the above components are not seen.

[0043] The present inventor conducted an image persistence and flicker experiment on various alignment layers each having a different resistance. According to the image persistence experiment, because a discharge path of ions was formed when the alignment layer contacted the pixel electrode PXL and the common electrode COM, a problem of the image persistence and the flicker was improved. The present inventor confirmed an improvement effect of the image persistence and the flicker when the resistance of the alignment layer PI was high. Further, the present inventor conducted the image persistence experiment depending on changes in a ratio of a contact area between the alignment layer PI and the pixel electrode PXL to a contact area between the alignment layer and the common electrode COM. As a result of the image persistence experiment, the present inventor confirmed the improvement effect of the image persistence when the ratio is changed.

[0044] FIGS. 4A and 4B show a result of an image persistence and flicker experiment of a related art and the embodiment of the invention. In the image persistence experiment, a sample selected as the related art is a liquid crystal display, in which a common electrode COM and a pixel electrode PXL are separated from each other with an insulating layer interposed therebetween and an alignment layer PI is connected only to the pixel electrode PXL.

[0045] In the image persistence experiment, a sample selected as the embodiment of the invention is a liquid crystal display of FIGS. 7 to 9 including the lower plate of the structure shown in FIG. 2. The image persistence and flicker experiment is an experiment conforming whether or not the image persistence is generated when after white gray level blocks and black gray level blocks are displayed on the screen of the liquid crystal display and are maintained for a predetermined period of time, a gray level of pixel data is changed to a middle gray level, for example, "127" throughout the entire screen of the liquid crystal display. As a result of the image persistence experiment, the image persistence was confirmed in the related art as shown in FIG. 4A, but the image persistence was not generated in the embodiment of the invention as shown in FIG. 4B.

[0046] FIG. 5 shows an image pattern of a sample used in an image persistence experiment.

[0047] In FIG. 5, (A) shows pixels of a white gray level block in a solid pattern for inducing the image persistence in the liquid crystal display. In case of the solid pattern, after a white gray level voltage is supplied to positive pixels and negative pixels of the white gray level block, a middle gray level voltage is supplied to the positive pixels and the negative pixels of the white gray level block after a predetermined period of time passed. After a black gray level voltage is supplied to positive pixels and negative pixels of the black gray level block, a middle gray level voltage is supplied to the positive pixels and the negative pixels of the black gray level block after a predetermined period of time passed. The positive pixels are pixels, to which the positive data voltage is supplied, and the negative pixels are pixels, to which the negative data voltage is supplied. The polarity of the data voltage is inverted on a per frame basis.

[0048] In FIG. 5, (B) shows pixels of a white gray level block in a flicker pattern for inducing the flicker in the liquid crystal display. In case of the flicker pattern, a white gray level voltage is supplied to pixels of a first polarity in the white gray level block, and a black gray level voltage is supplied to pixels of a second polarity in the white gray level block. After a predetermined period of time passed, a middle gray level voltage is supplied to the pixels. The first polarity is a positive polarity or a negative polarity, and the second polarity is a polarity different from the first polarity. After a black gray level voltage is supplied to positive pixels and negative pixels of the black gray level block, a middle gray level voltage is supplied to the positive pixels and the negative pixels of the black gray level block after a predetermined period of time passed.

[0049] As shown in FIGS. 6A to 6E, the present inventor confirmed the improvement effect of the image persistence while variously changing a ratio of a contact area between the alignment layer PI and the pixel electrode PXL to a contact area between the alignment layer PI and the common electrode COM in the image persistence experiment. In FIGS. 6A to 6E, the size of the contact area between the alignment layer PI and the pixel electrode PXL is not changed, and the size of the contact area between the alignment layer PI and the common electrode COM is changed. As shown in FIGS. 6A to 6E, the size of the contact area between the alignment layer PI and the common electrode COM is changed depending on changes in the number and the size of conductive connectors CNT.

[0050] The alignment layer PI contacts the common electrode COM through conductive connectors CNT, CNT1, and CNT2 disposed on the data line DL or on a column spacer CS and directly contacts the pixel electrode PXL. In FIG. 6E, "CNT1" is a first conductive connector disposed on the data line DL, and "CNT2" is a second conductive connector overlapping the column spacer CS. The conductive connectors CNT, CNT1, and CNT2 overlap the black matrix BM and are covered by the black matrix BM. FIG. 9 is a cross-sectional view showing the conductive connectors CNT1 and CNT2 shown in FIG. 6E.

[0051] According to the result of the image persistence and flicker experiment, the present inventor confirmed the improvement effect of the image persistence as indicated by the following Table 1 when the ratio of the contact area between the alignment layer PI and the pixel electrode PXL to the contact area between the alignment layer PI and the common electrode COM was 2:1 to 6:1.

[Table 1]

Drawing		FIG. 6A	FIG. 6B	FIG. 6C	FIG. 6D	FIG. 6E
Contact area of alignment layer	Pixel electrode (PXL)	4776.0 μm^2	4776.0 μm^2	4776.0 μm^2	4776.0 μm^2	4776.0 μm^2
	Common electrode (COM)	729.1 μm^2	727.4 μm^2	1212.8 μm^2	1480.6 μm^2	2303.9 μm^2
Ratio of contact area (PXL : COM)		6 : 1	6 : 1	4 : 1	3 : 1	2 : 1
Contact location		Contact on both sides of data line in each subpixel	Contact on one side of data line in each subpixel	Increase in contact area on both sides of data line in each subpixel	Further increase in contact area on both sides of data line in each subpixel	Contact on both sides of data line and contact at a location of spacer in each subpixel

[0052] FIG. 7 is a plane view enlarging one subpixel in the liquid crystal display according to the first embodiment of the invention. FIG. 8 is a cross-sectional view taken along line I-I' of FIG. 7 and shows a cross-sectional structure of the lower plate of the liquid crystal display. FIG. 9 is a cross-sectional view showing the conductive connectors CNT1 and CNT2 shown in FIG. 6E. The liquid crystal display shown in FIGS. 7 to 9 includes the lower plate of the structure shown in FIG. 2.

[0053] Referring to FIGS. 7 to 9, the lower plate includes a TFT, a gate insulating layer GI, an etch stopper ES, a first inorganic passivation layer PAS0, an organic passivation layer PAC, a common electrode COM, a second inorganic passivation layer PAS1, a conductive connector CNT, a pixel electrode PXL, and a lower alignment layer PI.

[0054] The gate line GL and a gate G of the TFT are formed on a lower substrate SUBS1. The gate insulating layer GI is formed of an inorganic insulating material such as SiOx and SiNx and covers the gate G of the TFT. The gate G of the TFT is integrated with the gate line GL. A semiconductor pattern ACT is formed on the gate insulating layer GI and overlaps the gate G of the TFT. The semiconductor pattern ACT is formed of a semiconductor material, such as amorphous silicon (a-Si), low temperature polysilicon (LTPS), and oxide semiconductor, and is used as an active channel layer of the TFT. A source S and a drain D of the TFT are formed on the semiconductor pattern ACT and overlap the gate G of the TFT. The drain D of the TFT is integrated with the data line DL. The source S of the TFT contacts the pixel electrode PXL through a contact hole CH passing through the first inorganic passivation layer PAS0, the organic passivation layer PAC, and the second inorganic passivation layer PAS1. The etch stopper ES is formed of an inorganic insulating material such as SiOx and is formed on the semiconductor pattern ACT and the gate insulating layer GI. The etch stopper ES protects the semiconductor pattern ACT from an etchant when the source S and the drain D of the TFT are etched. The first inorganic passivation layer PAS0 is formed of an inorganic insulating material, such as SiOx and SiNx, and covers the TFT and the etch stopper ES. The organic passivation layer PAC is formed of an organic insulating material, such as photo-acryl, and covers the first inorganic passivation layer PAS0. The common electrode COM, the conductive connector CNT, and the pixel electrode PXL may be formed of a transparent electrode material, such as indium tin oxide (ITO).

[0055] The common electrode COM is formed on the organic passivation layer PAC. The second inorganic passivation layer PAS1 is formed of an inorganic insulating material, such as SiOx and SiNx, and covers the common electrode COM. The conductive connector CNT is connected to the common electrode COM through a contact hole passing through the second inorganic passivation layer PAS1. The pixel electrode PXL is formed on the second inorganic passivation layer PAS1 and overlaps the common electrode COM. The pixel electrode PXL and the conductive connector CNT may be simultaneously formed using the same material. The pixel electrode PXL contacts the source S of the TFT through the contact hole CH.

[0056] The lower alignment layer PI is formed on the second inorganic passivation layer PAS1 and covers the pixel electrode PXL and the conductive connector CNT. The lower alignment layer PI directly contacts the pixel electrode PXL and is connected to the common electrode COM through the conductive connector CNT. The lower alignment layer PI contacts the negative liquid crystal nLC on the lower plate and is photoaligned. Hence, the lower alignment layer PI sets the pretilt angle of the liquid crystal molecules.

[0057] The upper plate includes a black matrix BM, a color filter CF, an upper alignment layer PI, and a column spacer CS. The black matrix BM and the color filter CF are formed on an upper substrate SUBS2. The upper alignment layer

PI contacts the negative liquid crystal nLC on the upper plate and is photoaligned. Hence, the upper alignment layer PI sets the pretilt angle of the liquid crystal molecules. The column spacer CS is formed between the upper plate and the lower plate and maintains a cell gap of a negative liquid crystal layer.

[0058] A position of the pixel electrode PXL and the common electrode COM in the liquid crystal display according to the second embodiment of the invention and a position of the pixel electrode PXL and the common electrode COM in the liquid crystal display shown in FIGS. 7 to 9 are reversed. Thus, in FIGS. 7 to 9, the pixel electrode PXL is connected to the TFT.

[0059] FIG. 10 shows a structure of a lower plate of a liquid crystal display according to a third embodiment of the invention.

[0060] Referring to FIG. 10, the liquid crystal display according to the third embodiment of the invention includes a pixel electrode PXL disposed over a common electrode COM with an insulating layer interposed therebetween and an alignment layer PI contacting the pixel electrode PXL and the common electrode COM. A passivation layer PAS1 is an insulating layer formed between the common electrode COM and the pixel electrode PXL.

[0061] In the third embodiment of the invention, the common electrode COM is a lower electrode positioned under the pixel electrode PXL, and the pixel electrode PXL is an upper electrode.

[0062] The passivation layer PAS 1 has an open hole OH exposing the common electrode COM. The open hole OH exposes the common electrode COM in all of areas except the pixel electrode PXL. For example, the open hole OH exposes the common electrode COM between the pixel electrodes PXL in an open area of the pixel and also exposes the common electrode COM in a unopened area covered by the black matrix. The alignment layer PI contacts the pixel electrode PXL and contacts the common electrode COM through the open hole OH. Because the alignment layer PI is directly connected to the pixel electrode PXL and the common electrode COM, ions accumulated on the alignment layer PI are discharged through the pixel electrode PXL and the common electrode COM.

[0063] Because the open hole OH exposes the common electrode COM in a portion other than the pixel electrode PXL, a contact area between the alignment layer PI and the common electrode COM in the third embodiment may increase compared to the above-described embodiments. When the contact area between the alignment layer PI and the common electrode COM decreases or a contact resistance therebetween increases, there is a change in an improvement effect of the image persistence and the flicker depending on a material of the alignment layer PI. According to the result of experiment, as shown in FIG. 10, when the contact area between the alignment layer PI and the common electrode COM increases, the image persistence and the flicker may be remarkably improved even if there is a change in a composition or the physical properties of the alignment layer PI.

[0064] FIG. 11 shows a structure of a lower plate of a liquid crystal display according to a fourth embodiment of the invention.

[0065] Referring to FIG. 11, the liquid crystal display according to the fourth embodiment of the invention includes a common electrode COM disposed over a pixel electrode PXL with an insulating layer interposed therebetween and an alignment layer PI contacting the pixel electrode PXL and the common electrode COM. A passivation layer PAS1 is an insulating layer formed between the common electrode COM and the pixel electrode PXL.

[0066] In the fourth embodiment of the invention, the pixel electrode PXL is a lower electrode positioned under the common electrode COM, and the common electrode COM is an upper electrode.

[0067] A passivation layer PAS1 has an open hole OH exposing the pixel electrode PXL. For example, the open hole OH exposes the pixel electrode PXL between the common electrodes COM in an open area of the pixel. The alignment layer PI contacts the pixel electrode PXL and contacts the common electrode COM through the open hole OH. Because the alignment layer PI is directly connected to the pixel electrode PXL and the common electrode COM, ions accumulated on the alignment layer PI are discharged through the pixel electrode PXL and the common electrode COM.

[0068] The fourth embodiment of the invention is substantially the same as the third embodiment of the invention except that positions of the common electrode COM and the pixel electrodes PXL are reversed.

[0069] FIG. 12 is a plane view enlarging one subpixel in the liquid crystal display according to the third embodiment of the invention. FIG. 13 is a cross-sectional view taken along line II-II' of FIG. 12 and shows a cross-sectional structure of a lower plate of the liquid crystal display.

[0070] Referring to FIGS. 12 and 13, the liquid crystal display includes an upper plate and a lower plate, which are attached to each other with a liquid crystal layer interposed therebetween. The structure of the upper plate is substantially the same as the above-described embodiments. The lower plate includes a TFT, a gate insulating layer GI, an etch stopper ES, a first inorganic passivation layer PAS0, an organic passivation layer PAC, a common electrode COM, a second inorganic passivation layer PAS1, a pixel electrode PXL, and a lower alignment layer PI.

[0071] The gate line GL and a gate G of the TFT are formed on a lower substrate SUBS1. The gate insulating layer GI is formed of an inorganic insulating material such as SiO_x and SiN_x and covers the gate G of the TFT. The gate G of the TFT is integrated with the gate line GL. A semiconductor pattern ACT is formed on the gate insulating layer GI and overlaps the gate G of the TFT. The semiconductor pattern ACT is formed of a semiconductor material, such as amorphous silicon (a-Si), low temperature polysilicon (LTPS), and oxide semiconductor, and is used as an active channel

layer of the TFT. A source S and a drain D of the TFT are formed on the semiconductor pattern ACT and overlap the gate G of the TFT. The drain D of the TFT is integrated with the data line DL. The source S of the TFT contacts the pixel electrode PXL through a contact hole CH passing through the first inorganic passivation layer PAS0, the organic passivation layer PAC, and the second inorganic passivation layer PAS1. The etch stopper ES is formed of an inorganic insulating material such as SiOx and is formed on the semiconductor pattern ACT and the gate insulating layer GI. The etch stopper ES protects the semiconductor pattern ACT from an etchant when the source S and the drain D of the TFT are etched. The first inorganic passivation layer PAS0 is formed of an inorganic insulating material, such as SiOx and SiNx, and covers the TFT and the etch stopper ES. The organic passivation layer PAC is formed of an organic insulating material, such as photo-acryl, and covers the first inorganic passivation layer PAS0. The common electrode COM and the pixel electrode PXL may be formed of a transparent electrode material, such as indium tin oxide (ITO).

[0072] The common electrode COM is formed on the organic passivation layer PAC. The second inorganic passivation layer PAS1 is formed of an inorganic insulating material, such as SiOx and SiNx, and covers a portion of the common electrode COM. The second inorganic passivation layer PAS1 has the open hole OH exposing the common electrode COM. Because the open hole OH is patterned using a pixel electrode pattern as a mask, the open hole OH exposes the common electrode COM in all of areas except the pixel electrode PXL.

[0073] The pixel electrode PXL is formed on the second inorganic passivation layer PAS1 and overlaps the common electrode COM. The pixel electrode PXL contacts the source S of the TFT through the contact hole CH.

[0074] The lower alignment layer PI is formed on the second inorganic passivation layer PAS1 to cover the pixel electrode PXL and to cover the common electrode COM through the open hole OH. The lower alignment layer PI directly contacts the pixel electrode PXL and the common electrode COM. The lower alignment layer PI contacts the negative liquid crystal nLC on the lower plate and is photoaligned. Hence, the lower alignment layer PI sets the pretilt angle of the liquid crystal molecules.

[0075] When the positions of the pixel electrode PXL and the common electrode COM are reversed and the pixel electrode PXL is connected to the TFT in the liquid crystal display according to the third embodiment of the invention shown in FIGS. 12 and 13, the structure of the liquid crystal display according to the third embodiment is substantially the same as the structure of the liquid crystal display according to the fourth embodiment shown in FIG. 11.

[0076] FIG. 14 is a cross-sectional view showing a method for forming the open hole in the liquid crystal display shown in FIG. 13.

[0077] Referring to FIG. 14, the passivation layer PAS1 and a pixel electrode material layer are stacked on the common electrode COM.

[0078] The passivation layer PAS1 and the pixel electrode PXL may be patterned through one photolithography process. A photoresist is applied to the pixel electrode material layer, and a photomask is aligned on the photoresist. An exposure process and a development process are performed to pattern the photoresist. Hence, a photoresist pattern PR is formed on the pixel electrode material layer.

[0079] The embodiment of the invention performs a wet etching process to remain only the pixel electrode material layer underlying the photoresist pattern PR and to remove other pixel electrode material layer. Hence, the pixel electrode PXL is formed on the passivation layer PAS 1. Subsequently, the embodiment of the invention performs a dry etching process in a state where the photoresist pattern PR remains, to etch other passivation layer except the passivation layer covered by the photoresist pattern PR. Hence, the open hole OH exposing the common electrode COM is formed. The alignment layer PI (not shown in FIG. 14) is entirely applied to the lower plate. The alignment layer PI contacts the pixel electrode PXL and also contacts the common electrode COM through the open hole OH.

[0080] When the positions of the pixel electrode PXL and the common electrode COM in FIG. 14 are reversed, the structure of the liquid crystal display shown in FIG. 14 is substantially the same as the structure of the liquid crystal display shown in FIG. 11.

[0081] The liquid crystal display according to the embodiment of the invention overlaps the pixel electrode PXL and the common electrode COM in a vertical direction and forms the storage capacitor Cst between the pixel electrode PXL and the common electrode COM. As a result, the embodiment of the invention brings the alignment layer PI into contact with the pixel electrode PXL and the common electrode COM, thereby improving the image persistence and the flicker of the liquid crystal display. Further, because the embodiment of the invention does not separately form the wide storage capacitor Cst in the pixel, the aperture ratio of the pixel may increase. An increase effect of the aperture ratio is described in detail with reference to FIGS. 15 and 16.

[0082] FIGS. 15 and 16 show a comparison between a pixel structure according to the embodiment of the invention and a pixel structure according to a comparative example. In the comparative example, the common electrode COM is exposed through the open hole passing through the insulating layer PAS1, and the pixel electrode PXL and the common electrode COM do not overlap each other. The comparative example has the pixel structure similar to the embodiment of the invention, but is different from the embodiment of the invention in the structure of the storage capacitor. It should be noted that the comparative example is not a widely known related art.

[0083] FIG. 15 is a plane view showing a comparison between the embodiment of the invention and a comparative

example with respect to an open area of a pixel structure. FIG. 16 is cross-sectional views taken along lines III-III' and IV- IV' of FIG. 15 and shows a cross-sectional structure of a lower plate of the liquid crystal display.

[0084] FIG. 15 (A) and FIG. 16 (B) show the pixel structure according to the embodiment of the invention shown in FIGS. 11 and 12, and FIG. 15 (B) and FIG. 16 (B) show the pixel structure according to the comparative example.

[0085] In the pixel structure according to the embodiment of the invention, because the pixel electrode PXL and the common electrode COM overlap each other, the storage capacitor Cst is formed between the pixel electrode PXL and the common electrode COM. On the other hands, in the pixel structure according to the comparative example, because the pixel electrode PXL and the common electrode COM do not overlap each other, the storage capacitor Cst having a wide area has to be provided. Thus, the embodiment of the invention may further increase the open area of the pixel compared to the comparative example, thereby increasing the aperture ratio and the transmittance of the pixel.

[0086] Further, because a fringe field capacitance between the pixel electrode PXL and the common electrode COM in the embodiment of the invention is greater than that in the comparative example, a fringe field driving the liquid crystals may be applied more strongly than the comparative example.

[0087] As described above, the liquid crystal display according to the embodiment of the invention, in which the upper electrode and the lower electrode overlap each other with the insulating layer interposed therebetween, brings the alignment layer into contact with the lower electrode through the contact hole passing through the insulating layer. Hence, the embodiment of the invention brings the alignment layer into contact with the upper electrode and the lower electrode and forms the discharge path of ions accumulated on the alignment layer, thereby preventing the accumulation of ions in the normal driving mode and the low speed driving mode. As a result, the embodiment of the invention can prevent a reduction in the image quality resulting from the image persistence and the flicker. Further, the embodiment of the invention may improve the image quality in the low speed driving mode using the negative liquid crystal, the photoalignment layer, and the oxide TFT.

[0088] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the scope of the principles of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

Claims

1. A liquid crystal display comprising:

an upper plate and a lower plate positioned opposite each other with a liquid crystal layer interposed therebetween;

wherein the lower plate includes:

a lower electrode and an upper electrode configured to overlap each other with an insulating layer interposed therebetween; and

an alignment layer configured to be in contact with the lower electrode and the upper electrode, wherein the alignment layer is in contact with the lower electrode through a hole passing through the insulating layer.

2. The liquid crystal display of claim 1, further comprising a conductive connector configured to contact the lower electrode through the hole.

3. The liquid crystal display of claim 2, wherein the lower plate further includes a data line and a gate line configured to cross each other, and wherein the conductive connector overlaps the data line.

4. The liquid crystal display of claim 2, further comprising a spacer positioned between the upper plate and the lower plate, wherein the conductive connector overlaps the spacer.

5. The liquid crystal display of claim 2, further comprising a spacer positioned between the upper plate and the lower plate, wherein the lower plate further includes a data line and a gate line configured to cross each other, and wherein the conductive connector overlaps both the data line and the spacer.

EP 3 086 170 A1

6. The liquid crystal display of any one of claims 2 to 5, wherein the conductive connector is formed of the same material as the upper electrode and is patterned at the same time as the upper electrode.
7. The liquid crystal display of claim 1, wherein the hole exposes the lower electrode in an area other than the upper electrode so that the alignment layer contacts the lower electrode through the hole.
8. The liquid crystal display of any one of the preceding claims, wherein the liquid crystal layer includes a negative liquid crystal.
9. The liquid crystal display of any one of the preceding claims, wherein the alignment layer is a photoalignment layer.
10. The liquid crystal display of any one of the preceding claims claim, wherein the lower electrode is a common electrode, to which a common voltage is supplied, and wherein the upper electrode is a pixel electrode, to which a data voltage is supplied.
11. The liquid crystal display of any one of claims 1 to 9, wherein the upper electrode is a common electrode, to which a common voltage is supplied, and wherein the lower electrode is a pixel electrode, to which a data voltage is supplied.

FIG. 1

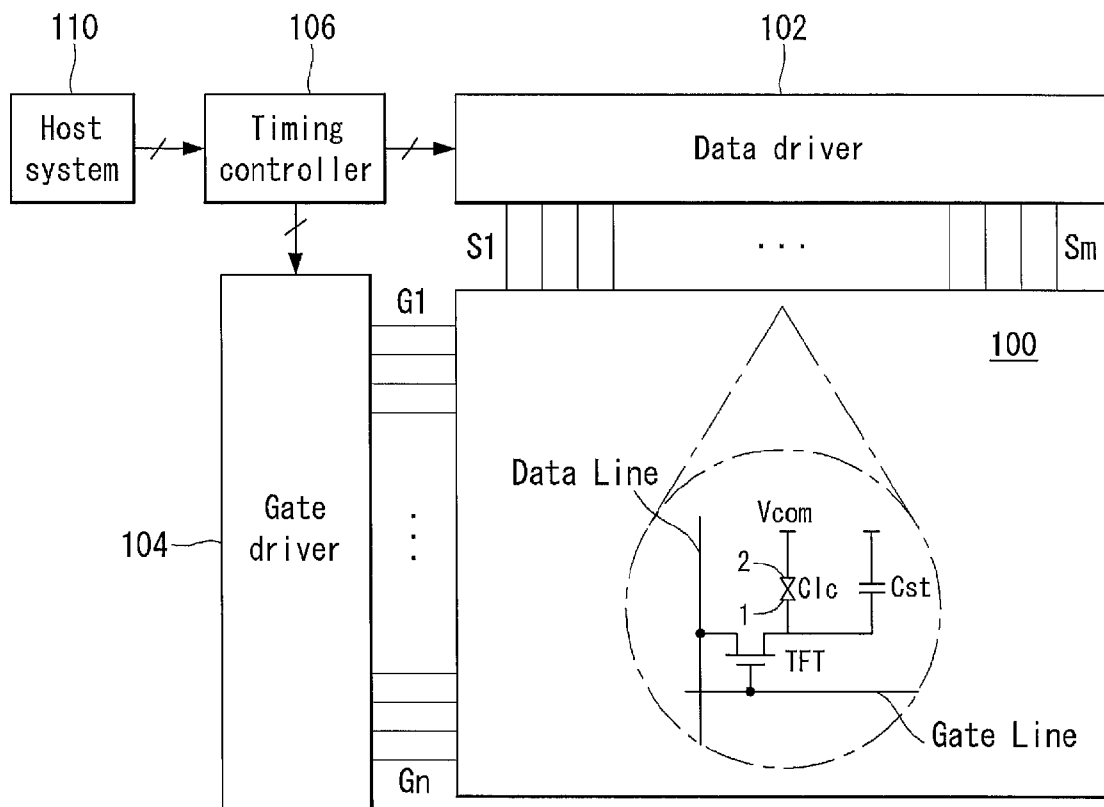


FIG. 2

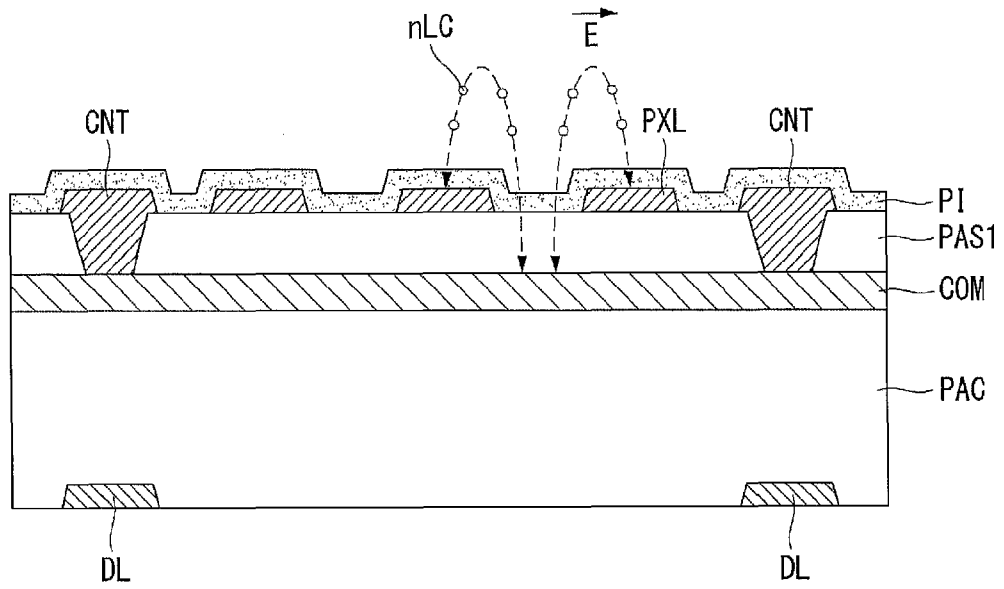


FIG. 3

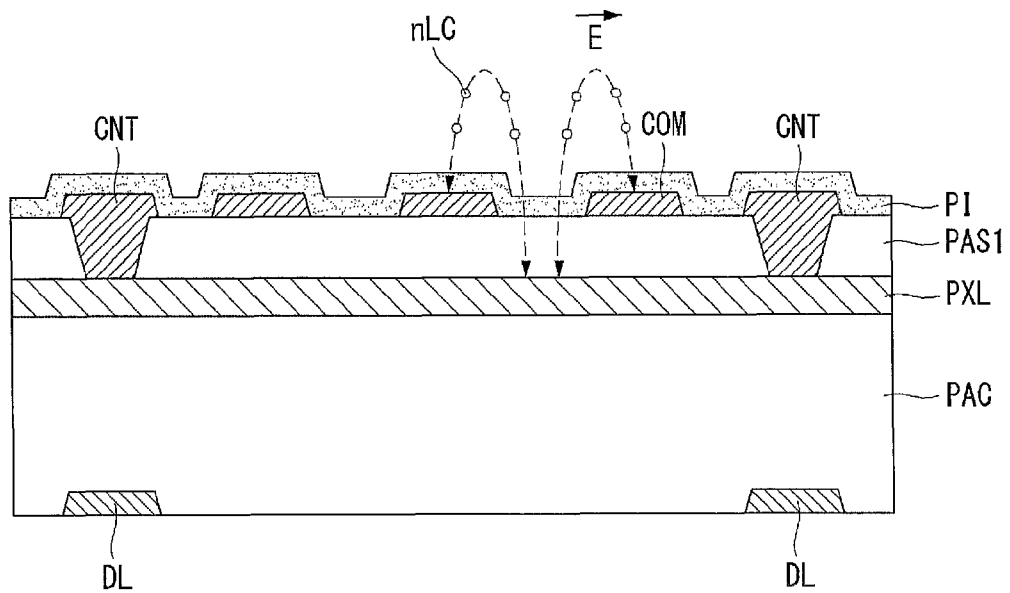


FIG. 4A

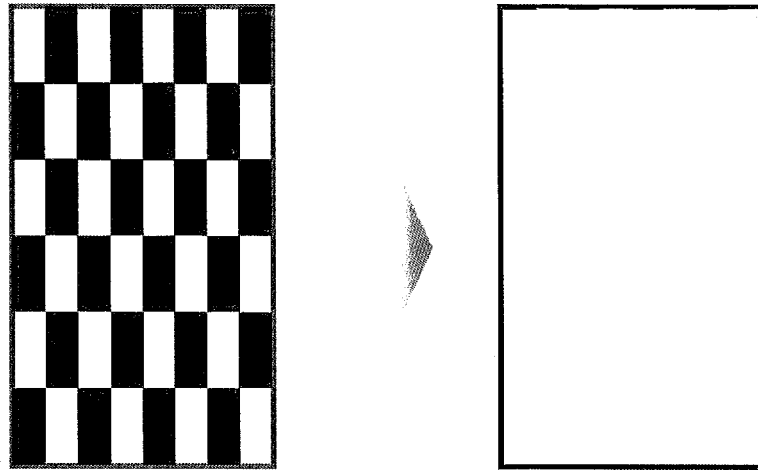


FIG. 4B



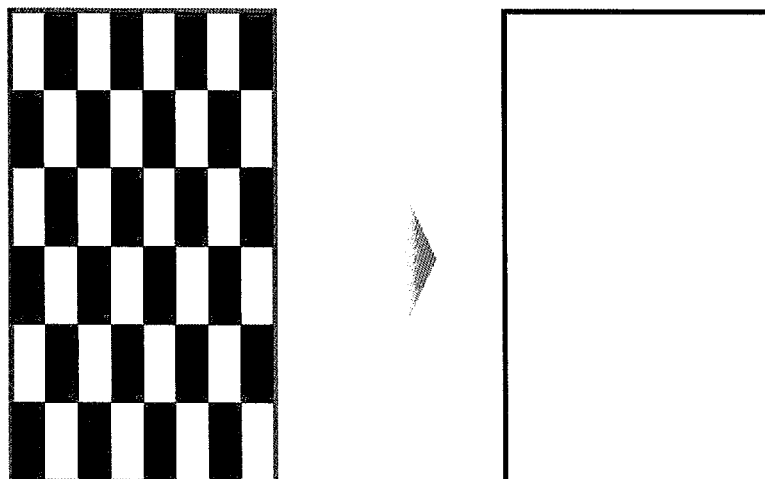


FIG. 5

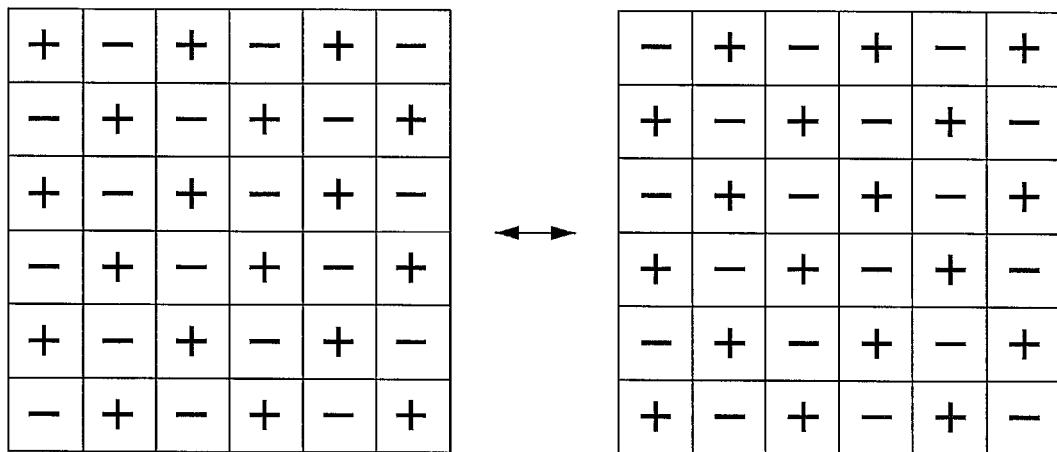

(A)

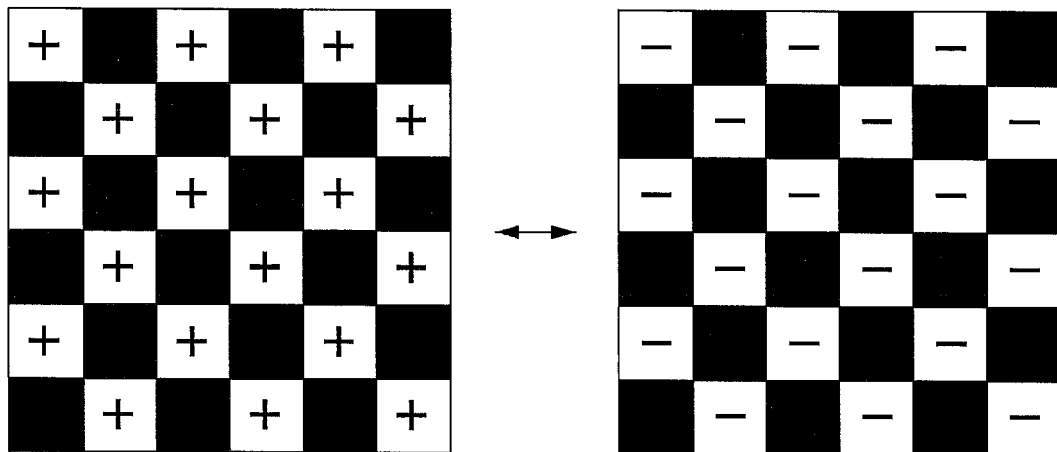

(B)

FIG. 6A

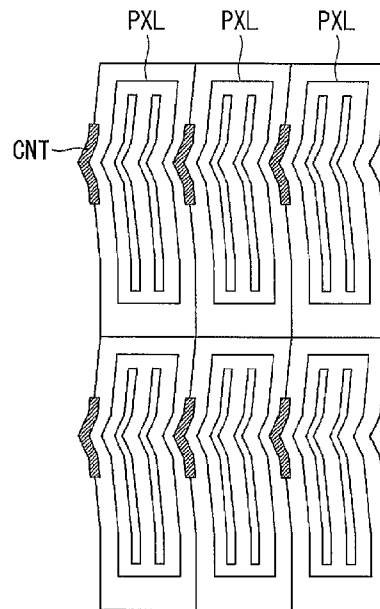


FIG. 6B

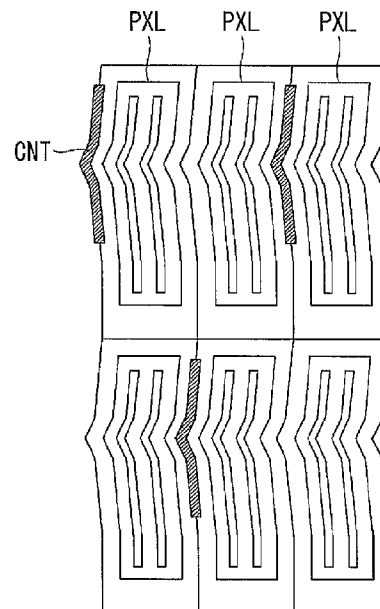


FIG. 6C

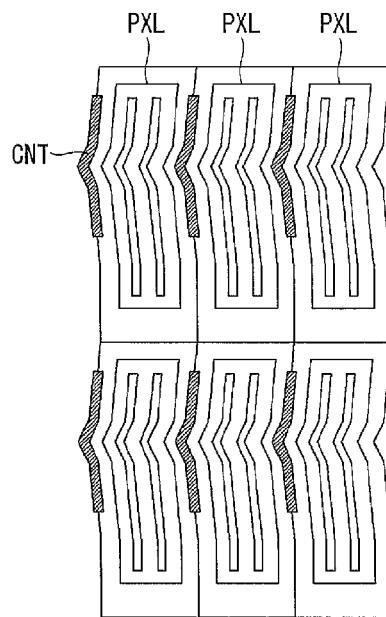


FIG. 6D

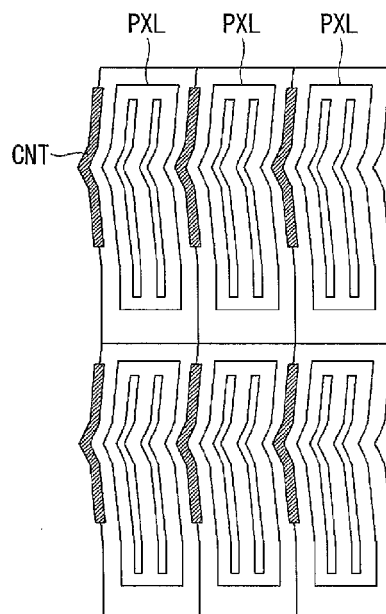


FIG. 6E

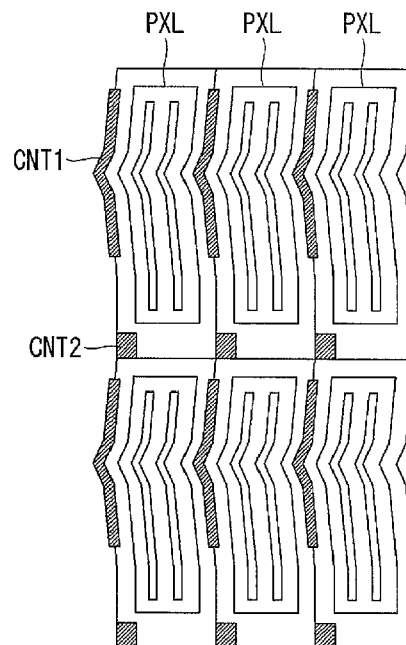


FIG. 7

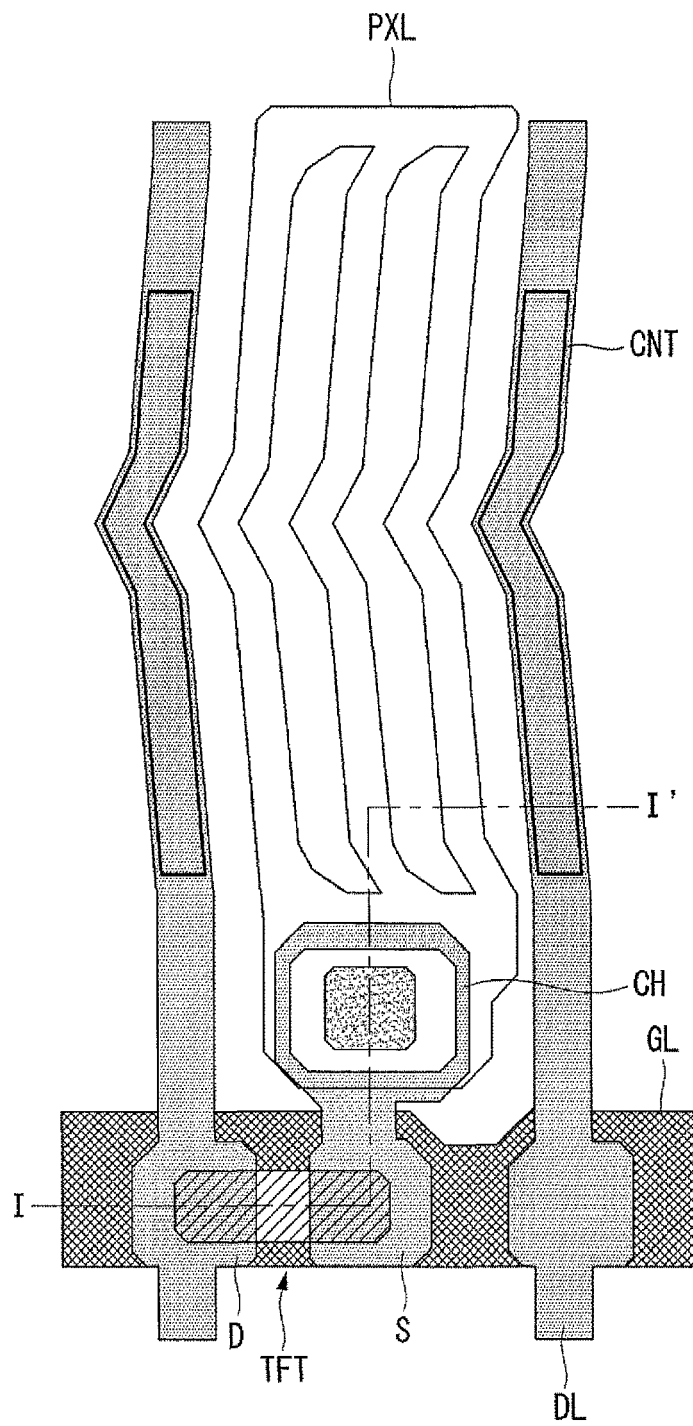


FIG. 8

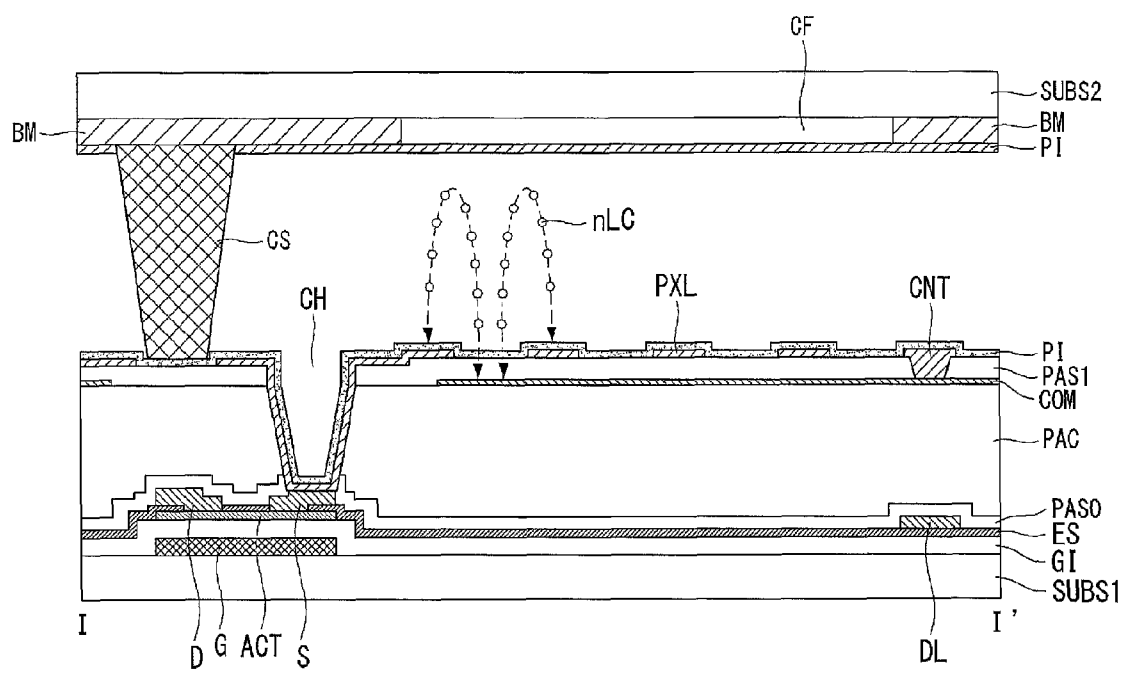


FIG. 9

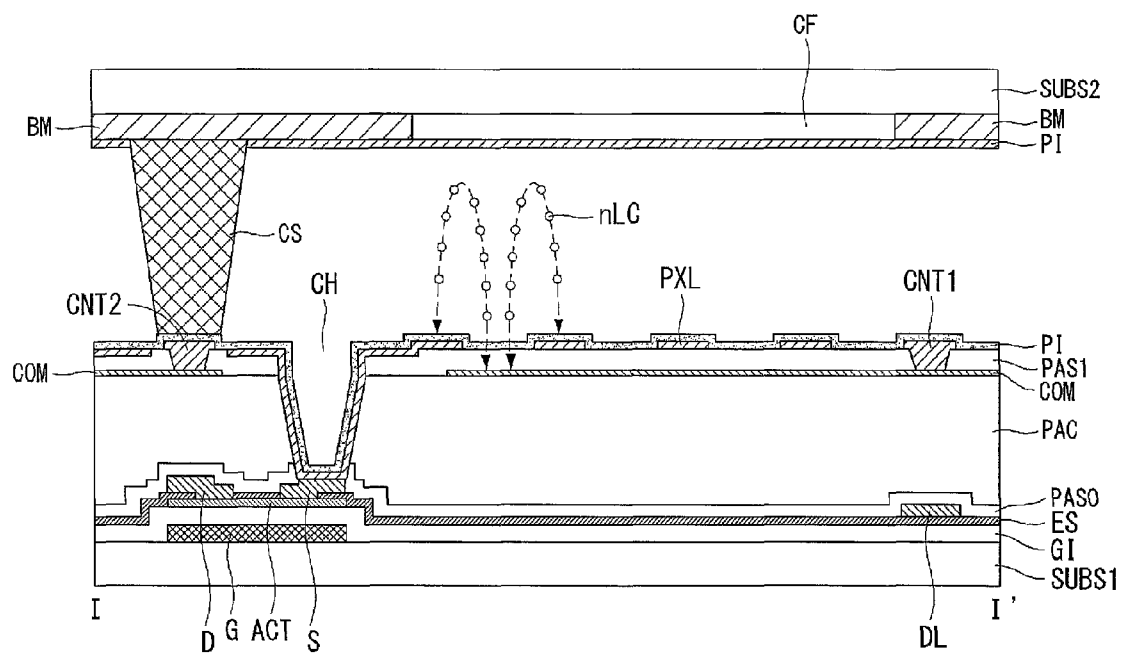


FIG. 10

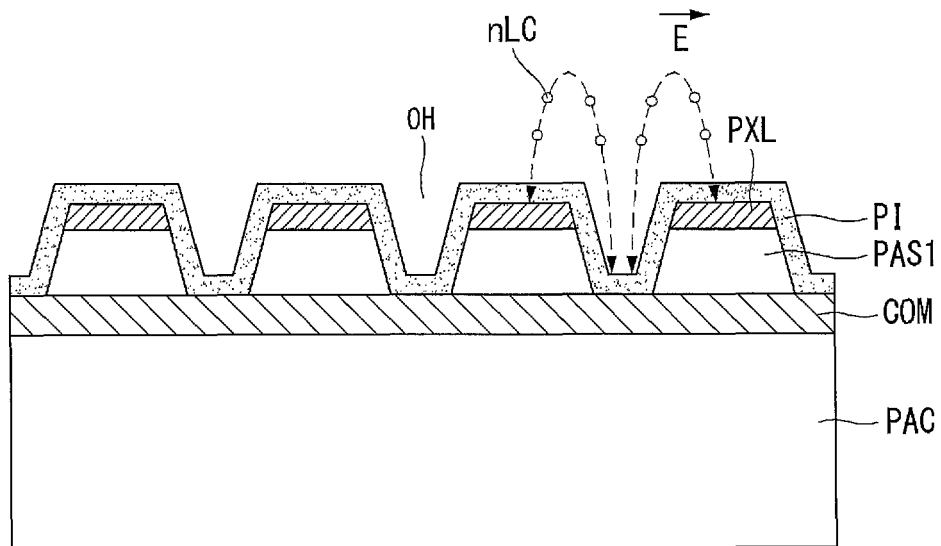


FIG. 11

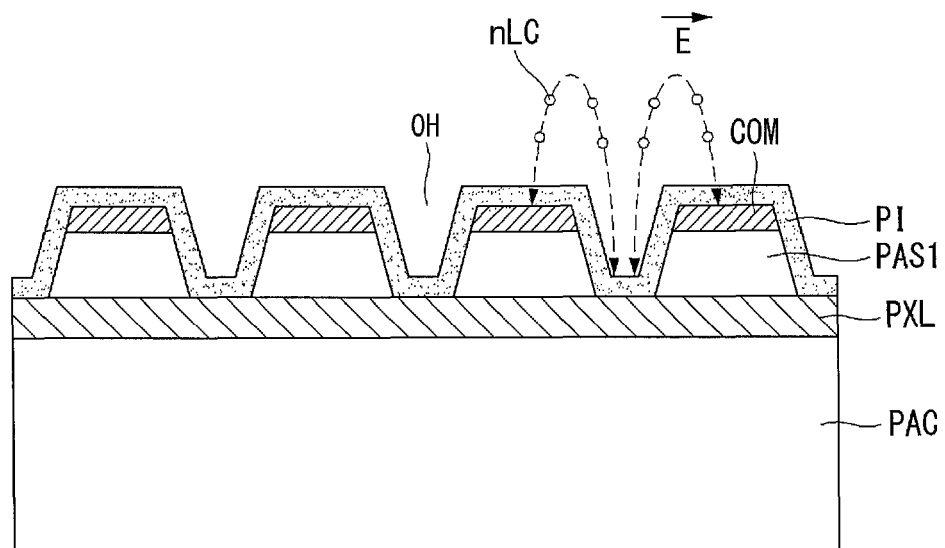


FIG. 12

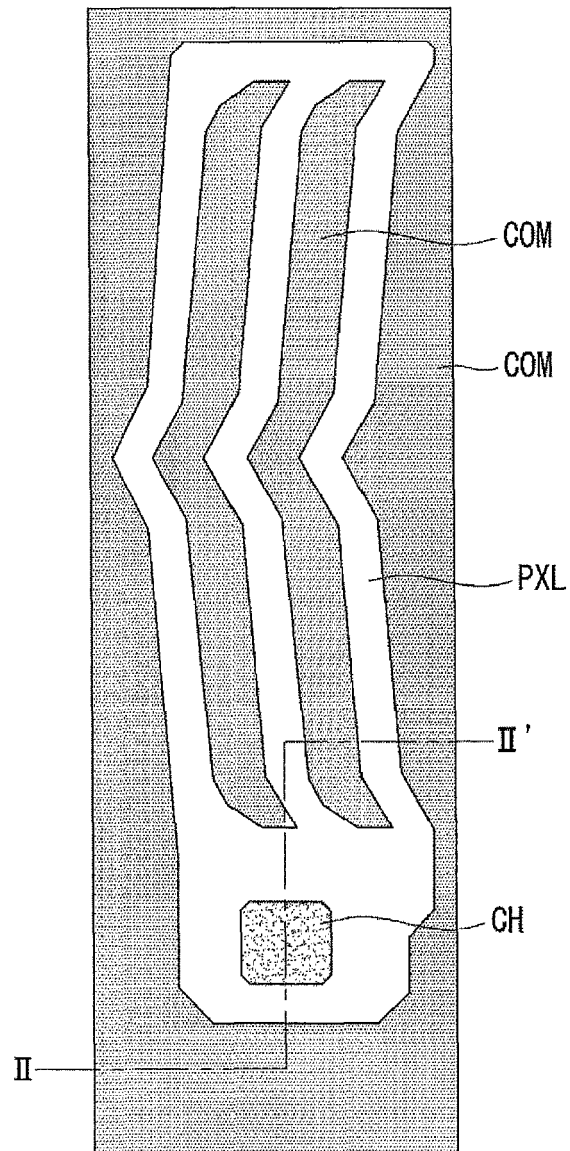


FIG. 13

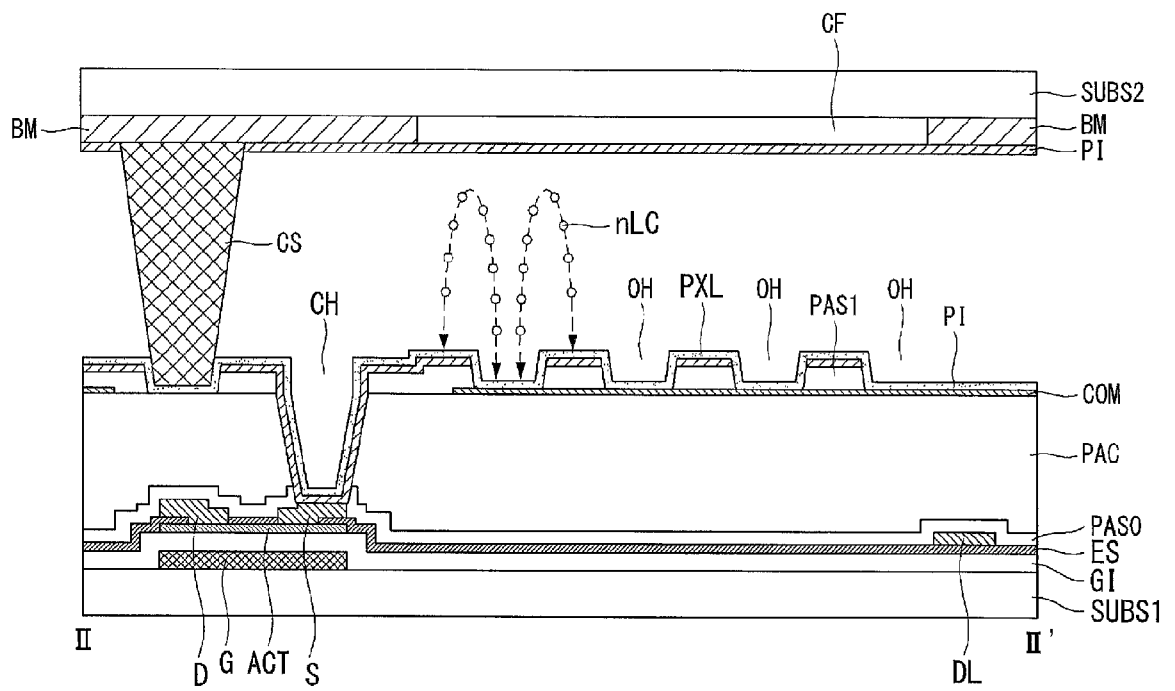


FIG. 14

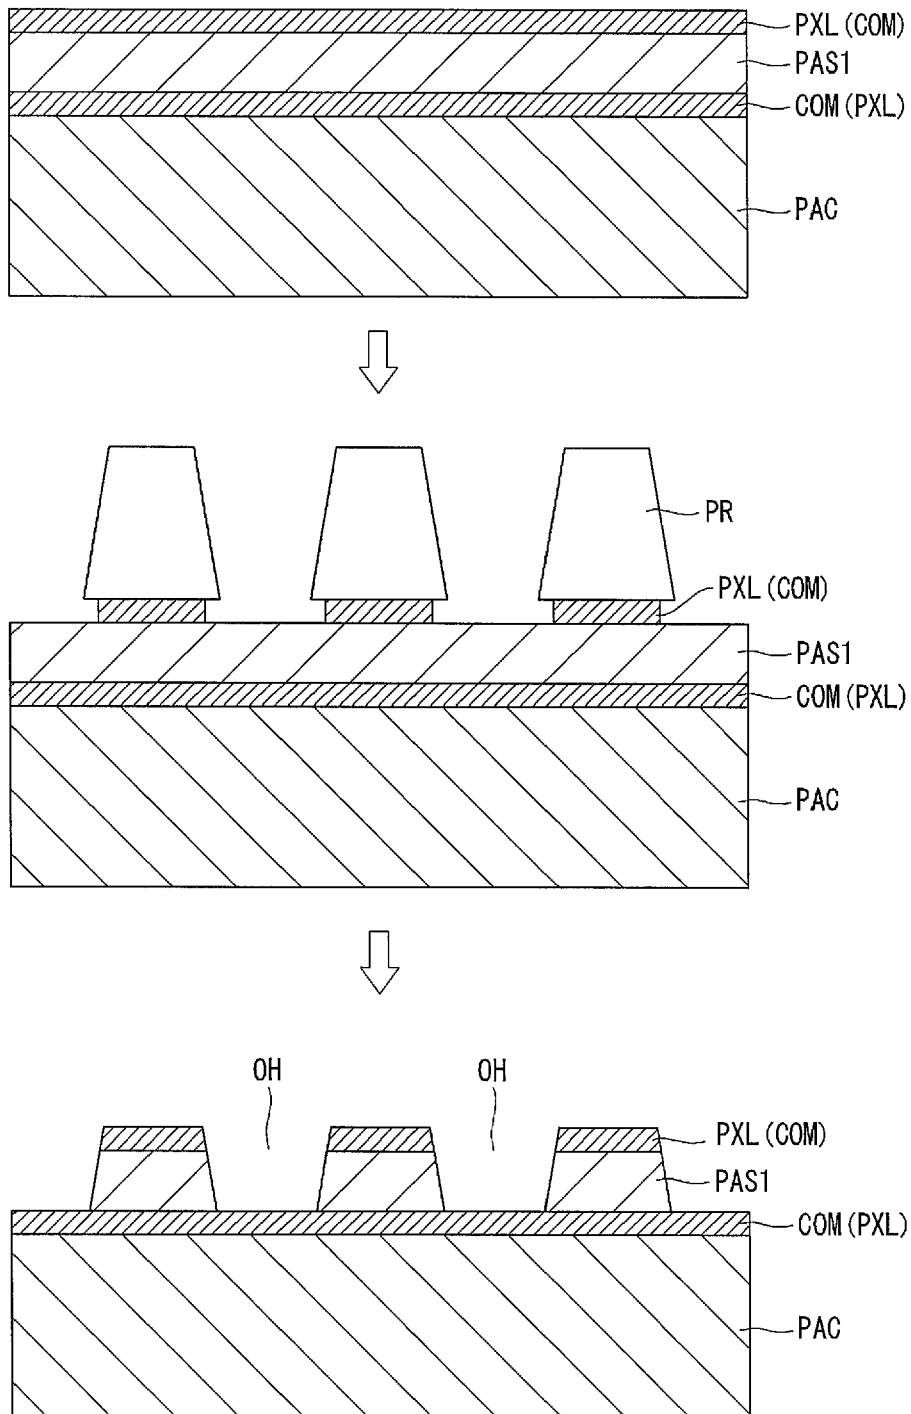


FIG. 15



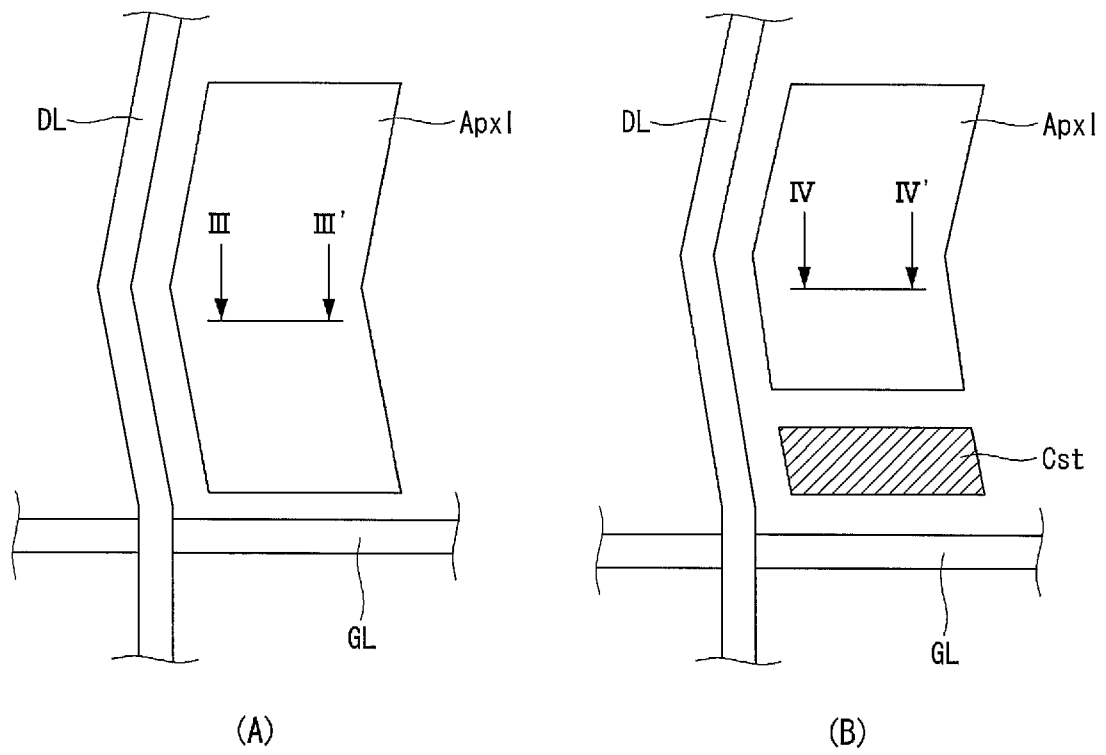


FIG. 16

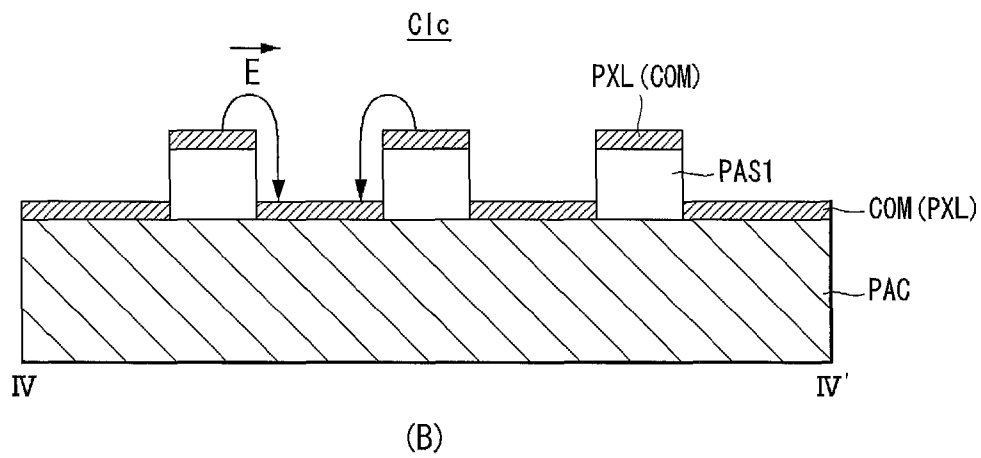

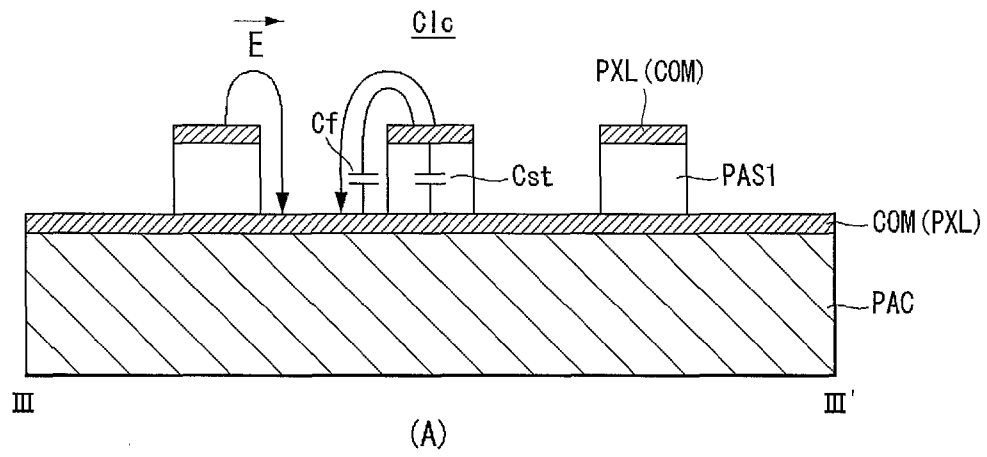

EUROPEAN SEARCH REPORT

Application Number
EP 15 18 9705

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2014/139796 A1 (CAO BINBIN [CN] ET AL) 22 May 2014 (2014-05-22)	1-7,9-11	INV. G02F1/1343
Y	* abstract; figures 2-8 * * paragraphs [0037], [0041] - [0049], [0063] *	8	G02F1/1337 G02F1/1362
X	US 2011/216278 A1 (NAGANO SHINGO [JP] ET AL) 8 September 2011 (2011-09-08)	1-7,9-11	
Y	* abstract; figures 1-3 * * paragraphs [0009], [0011] - [0014], [0039] - [0047], [0060] - [0066] *	8	
X	US 2014/247411 A1 (KIM SUNG MAN [KR] ET AL) 4 September 2014 (2014-09-04)	1,4,5,7,9-11	
Y	* paragraph [0097]; figures 1, 2, 5 *	8	
Y	Falu Yang ET AL: "High Performance Advanced Super Dimension Switch (ADS) Mode LCD with Negative Dielectric Anisotropy LC Optimization", 6 June 2014 (2014-06-06), XP055166777, Retrieved from the Internet: URL:http://onlinelibrary.wiley.com/store/10.1002/j.2168-0159.2014.tb00086.x/asset/sdtp00086.pdf?v=1&t=i5p293xs&s=c333236b1c76212d517e959bf896dd8a8659beel [retrieved on 2015-02-03] * the whole document *	8	TECHNICAL FIELDS SEARCHED (IPC) G02F G09G
A	WO 2004/029921 A2 (ILJIN DIAMOND CO LTD [KR]; YUH JINTAE [KR]) 8 April 2004 (2004-04-08) * abstract; figure 6 *	4,5	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 31 August 2016	Examiner Lutz, Christoph
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 15 18 9705

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

31-08-2016

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014139796 A1	22-05-2014	CN 102998856 A	27-03-2013
		US 2014139796 A1	22-05-2014
US 2011216278 A1	08-09-2011	JP 5585127 B2	10-09-2014
		JP 2011186138 A	22-09-2011
		US 2011216278 A1	08-09-2011
US 2014247411 A1	04-09-2014	CN 104035228 A	10-09-2014
		EP 2775347 A2	10-09-2014
		KR 20140108967 A	15-09-2014
		US 2014247411 A1	04-09-2014
WO 2004029921 A2	08-04-2004	AU 2003263650 A1	19-04-2004
		TW 200405106 A	01-04-2004
		WO 2004029921 A2	08-04-2004

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020140056172 [0001]

专利名称(译)	液晶显示器		
公开(公告)号	EP3086170A1	公开(公告)日	2016-10-26
申请号	EP2015189705	申请日	2015-10-14
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	WOO CHANGSEUNG HONG SOONHWAN		
发明人	WOO, CHANGSEUNG HONG, SOONHWAN		
IPC分类号	G02F1/1343 G02F1/1337 G02F1/1362		
CPC分类号	G02F1/1339 G02F1/134309 G02F1/136227 G02F1/136286 G02F1/133345 G02F1/133707 G02F1/133711 G02F1/133788 G02F1/13394 G02F1/134363 G02F1/136204 G02F2001/134318 G02F2001/134372 G02F2201/40 G09G3/3614 G02F1/133512 G02F1/1337 G09G2300/0426		
审查员(译)	LUTZ , CHRISTOPH		
优先权	1020150056172 2015-04-21 KR 1020150125102 2015-09-03 KR		
外部链接	Espacenet		

摘要(译)

公开了一种液晶显示器。液晶显示器包括：上板和下板，彼此相对设置，其间插入有液晶层；以及间隔件，位于上板和下板之间。下板包括下电极和上电极，配置成彼此重叠并且绝缘层插入其间，以及配置层，配置为接触下电极和上电极。取向层通过穿过绝缘层的孔与下电极接触。

FIG. 2

