

(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0145964 A1**
Park et al. (43) **Pub. Date: Jul. 6, 2006**

Jan. 5, 2005 (KR) 10-2005-0000759

Publication Classification

(51) **Int. Cl.**
G09G 3/30 (2006.01)

(52) **U.S. Cl.** 345/76

(57) **ABSTRACT**

In an organic light emitting diode display, a plurality of sub-pixels sharing a select scan line that extends in a row direction forms a unit pixel, and the plurality of sub-pixels are arranged in a column direction in the unit pixel. A field is divided into a plurality of subfields, and corresponding one of the plurality of sub-pixels emits light in each of the plurality of subfields.

(22) Filed: **Dec. 19, 2005**

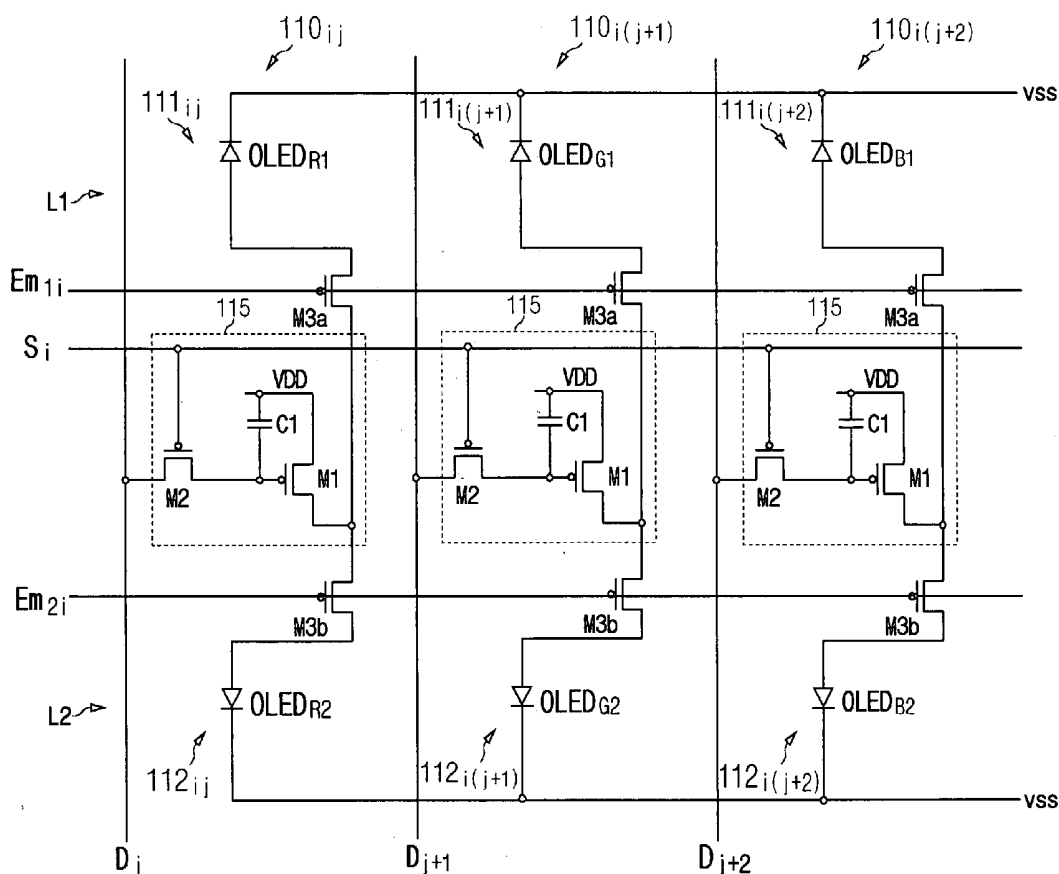


Fig. 1

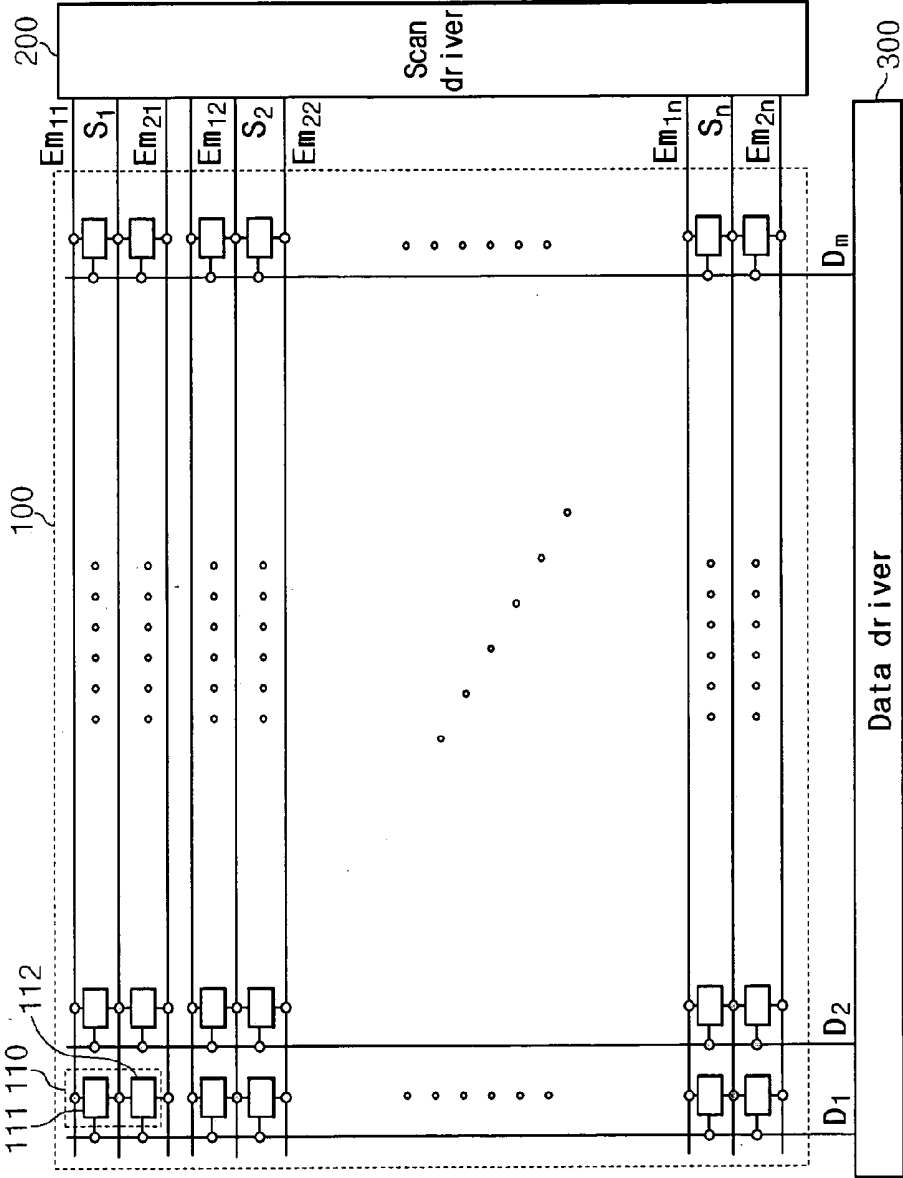


Fig. 2

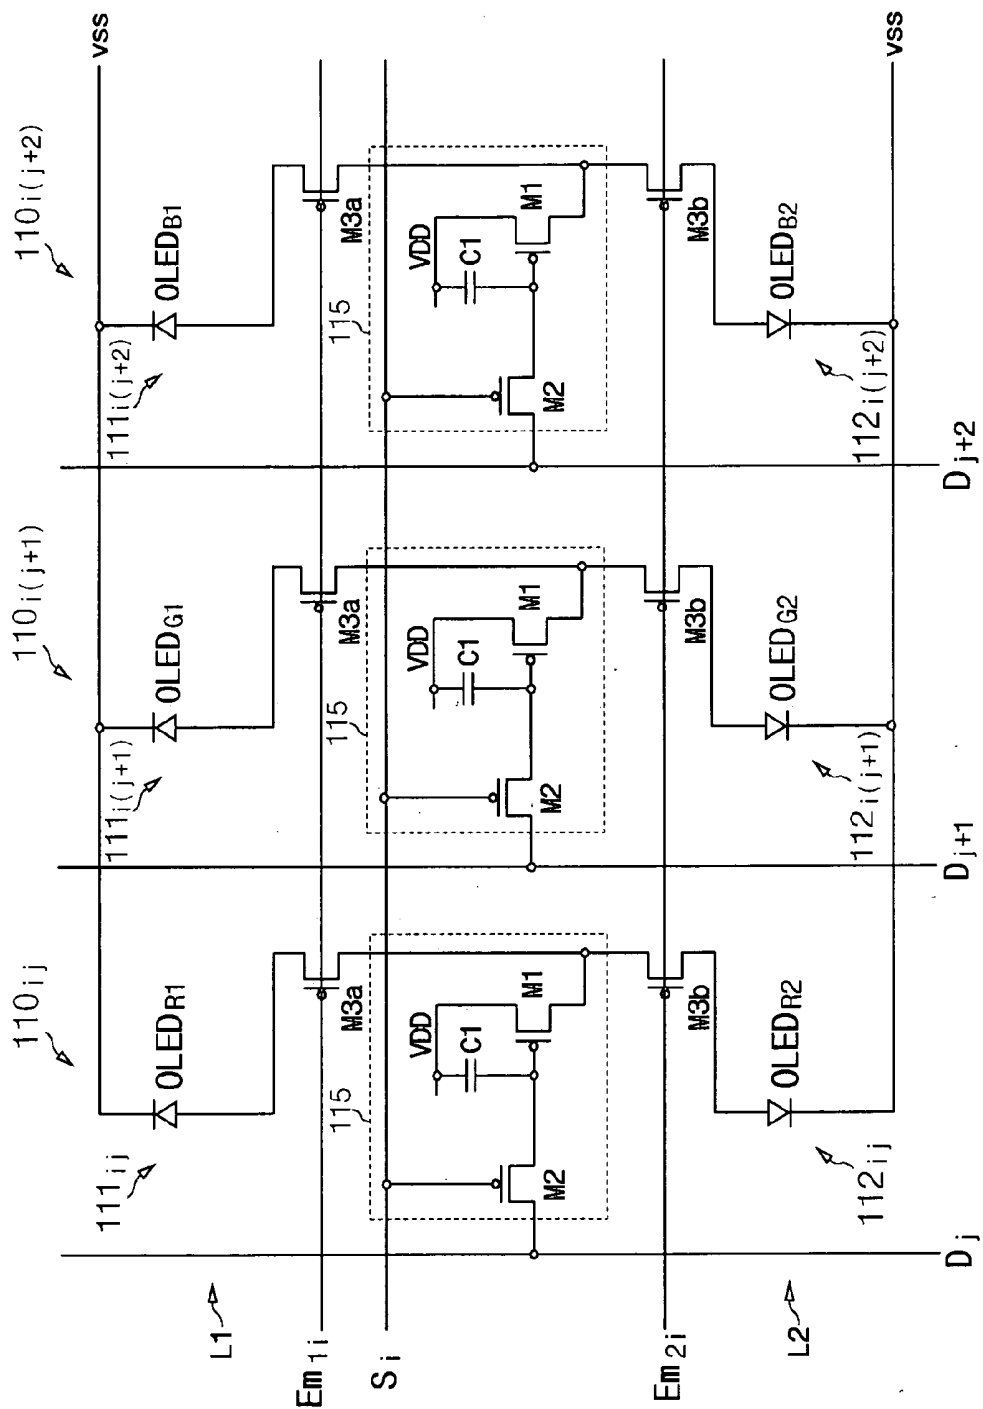
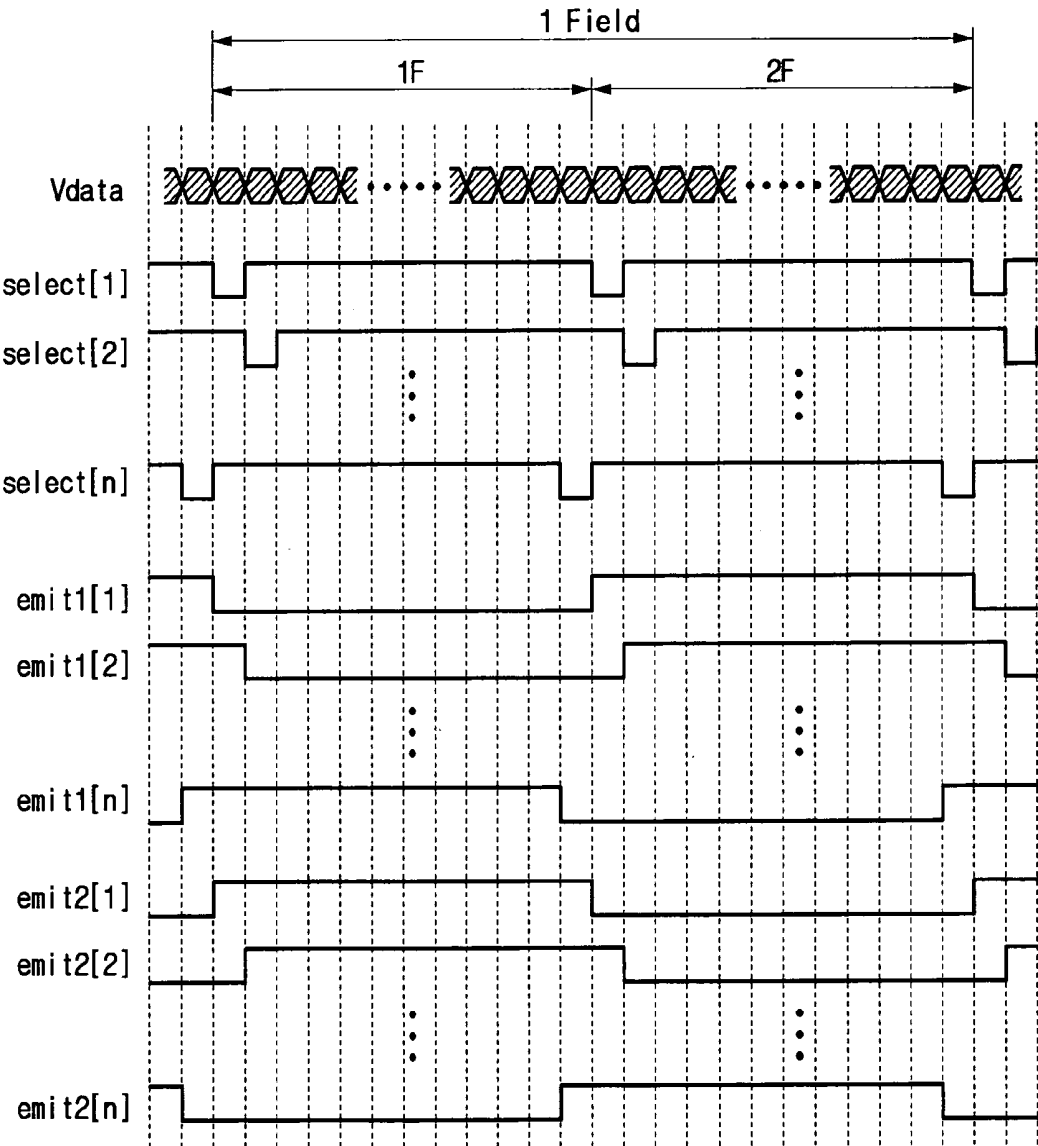
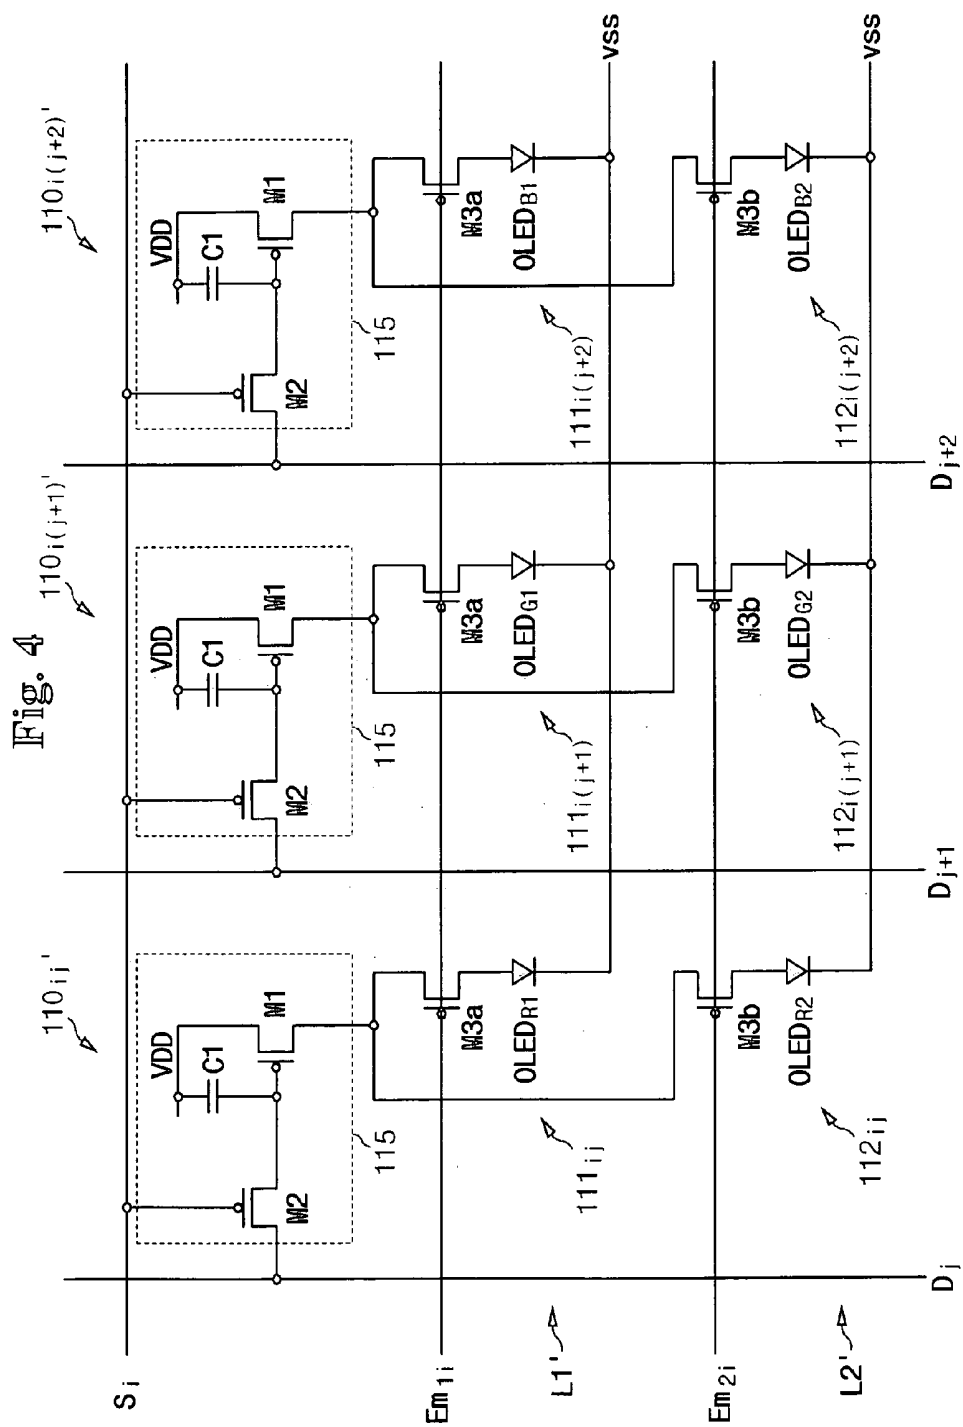


Fig. 3





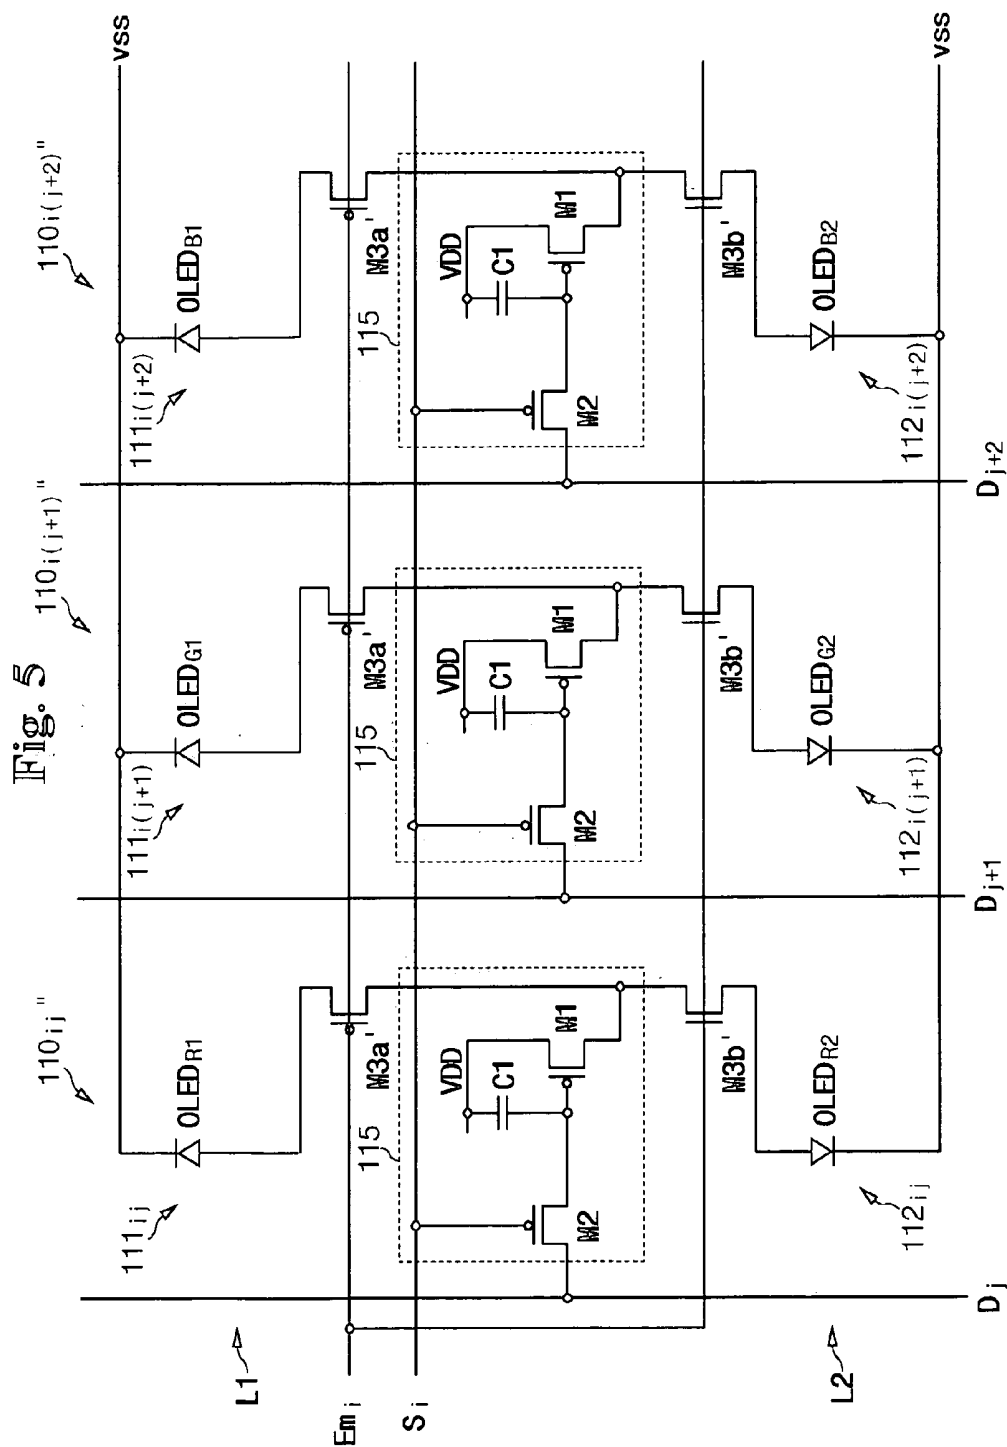


Fig. 6

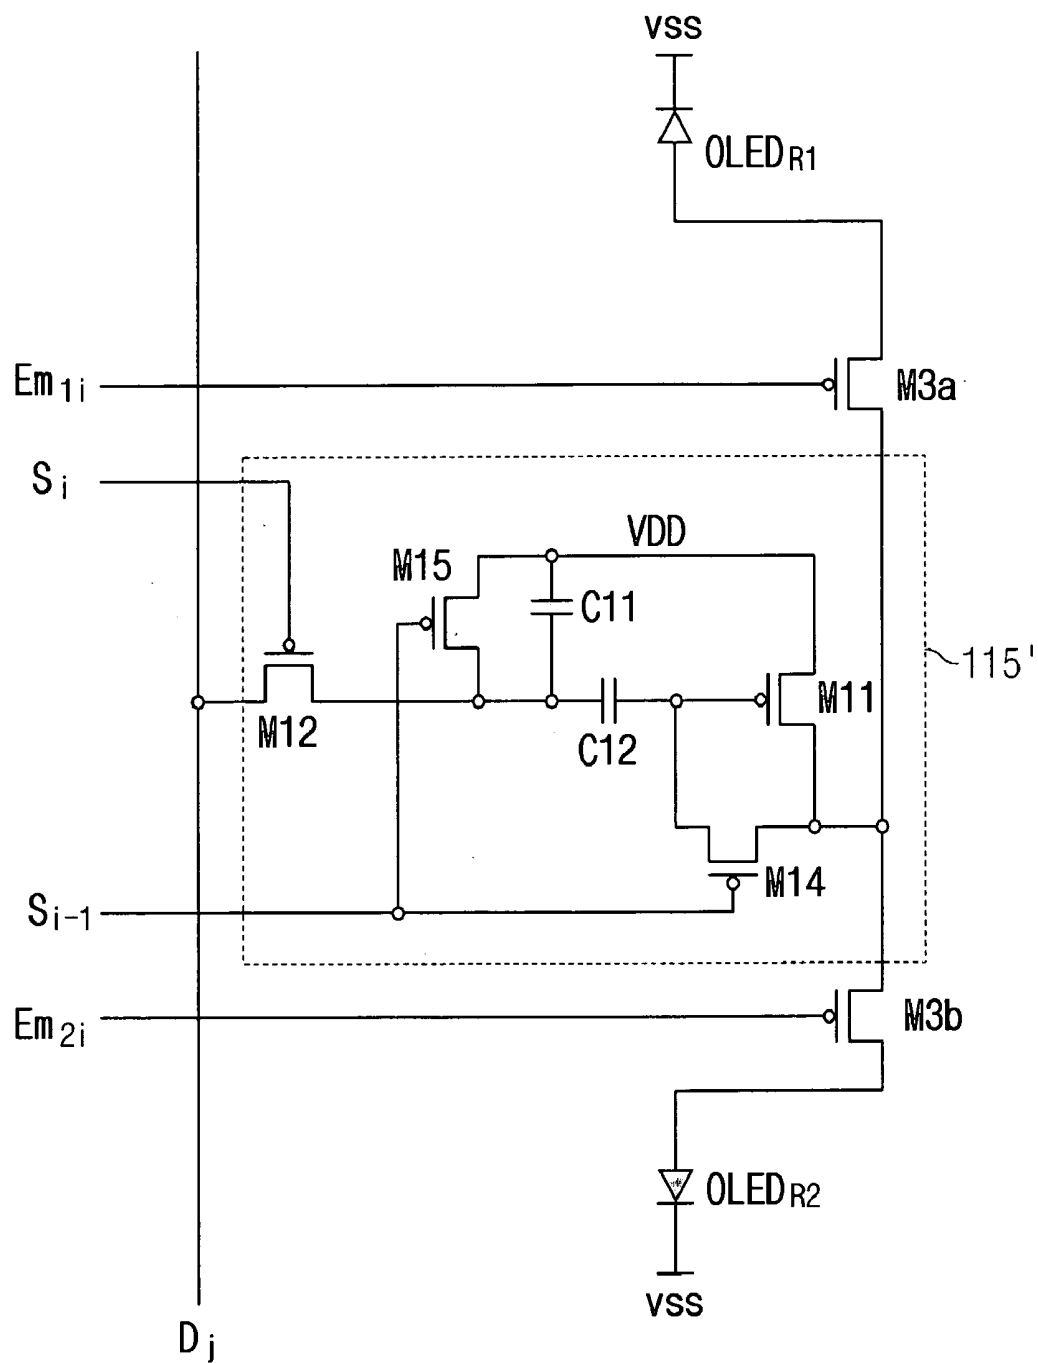


Fig. 7

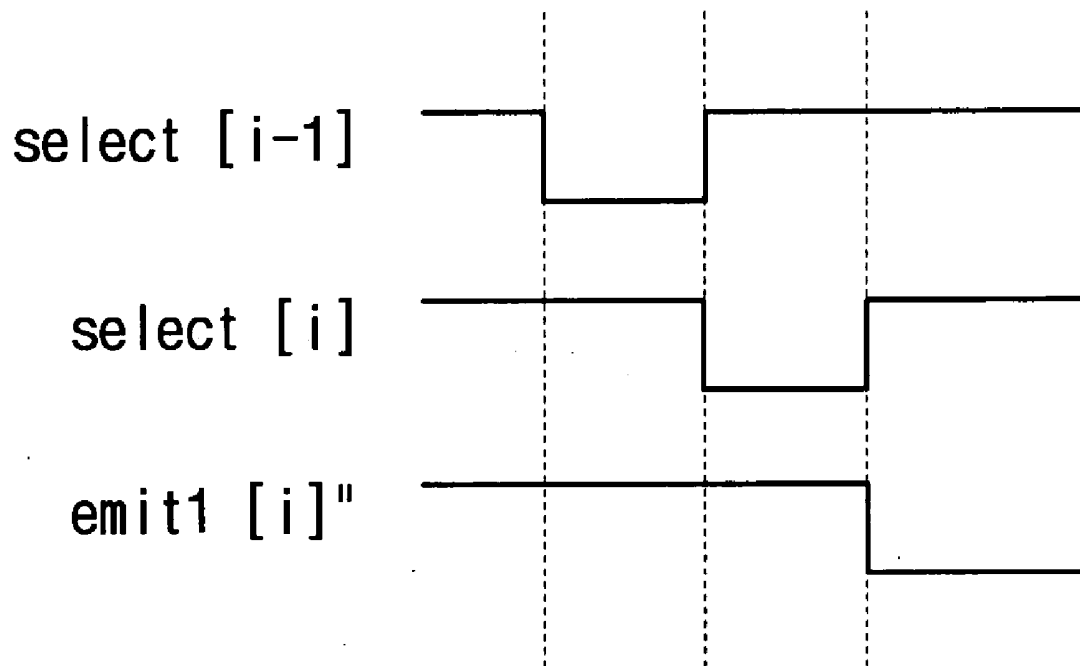


Fig. 8

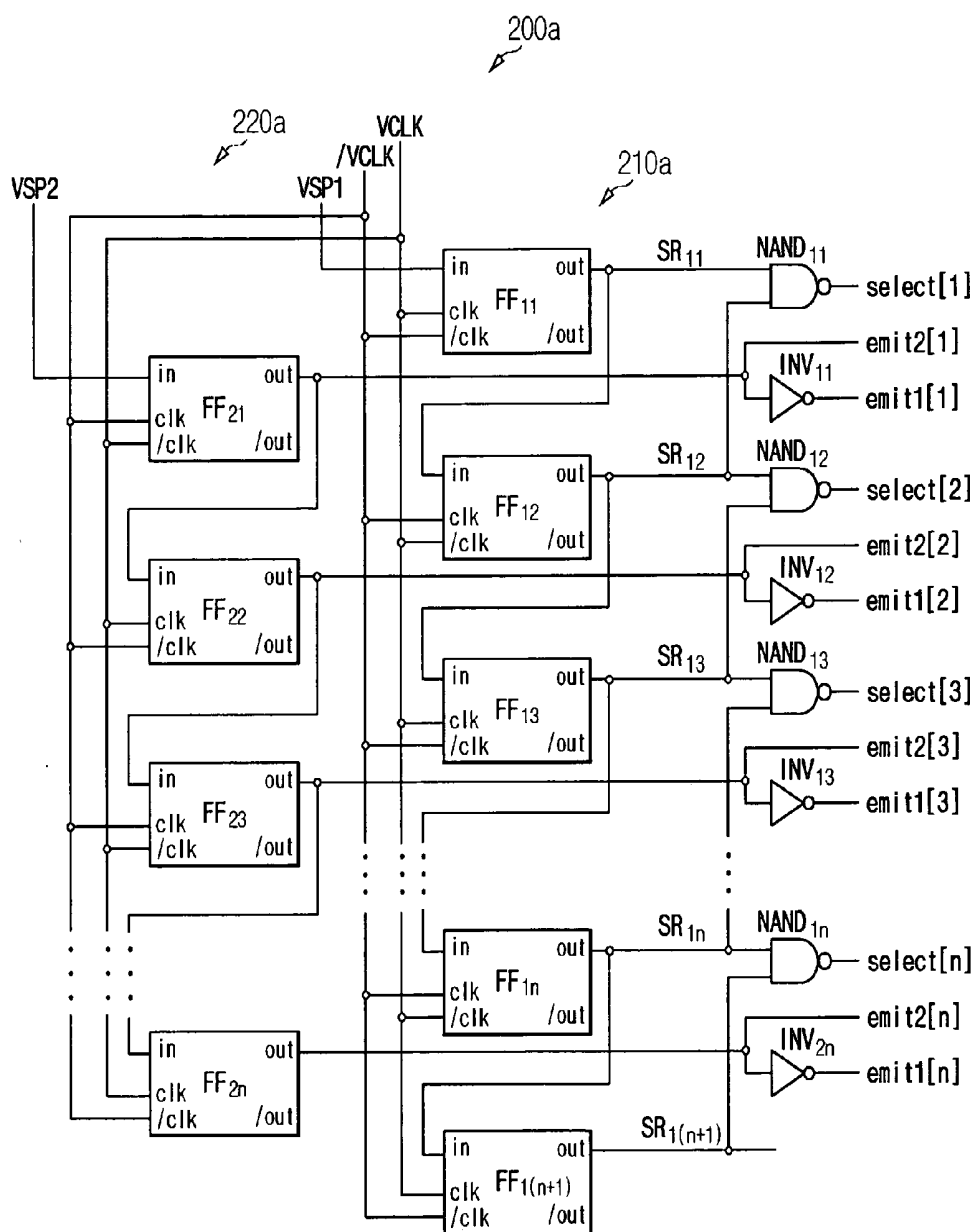


Fig. 9

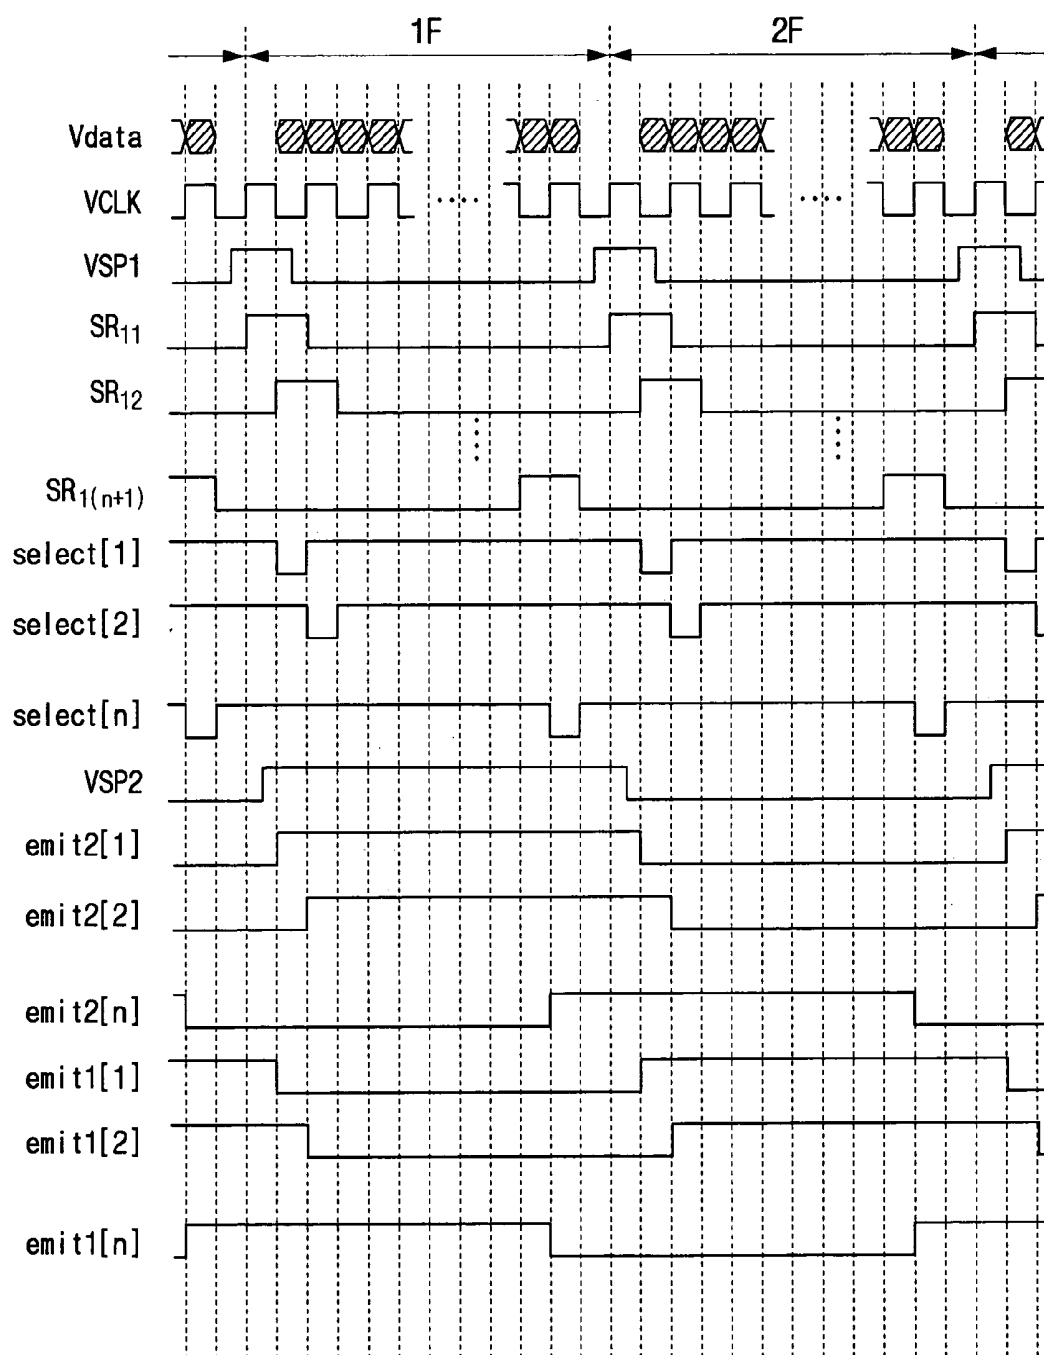


Fig. 10

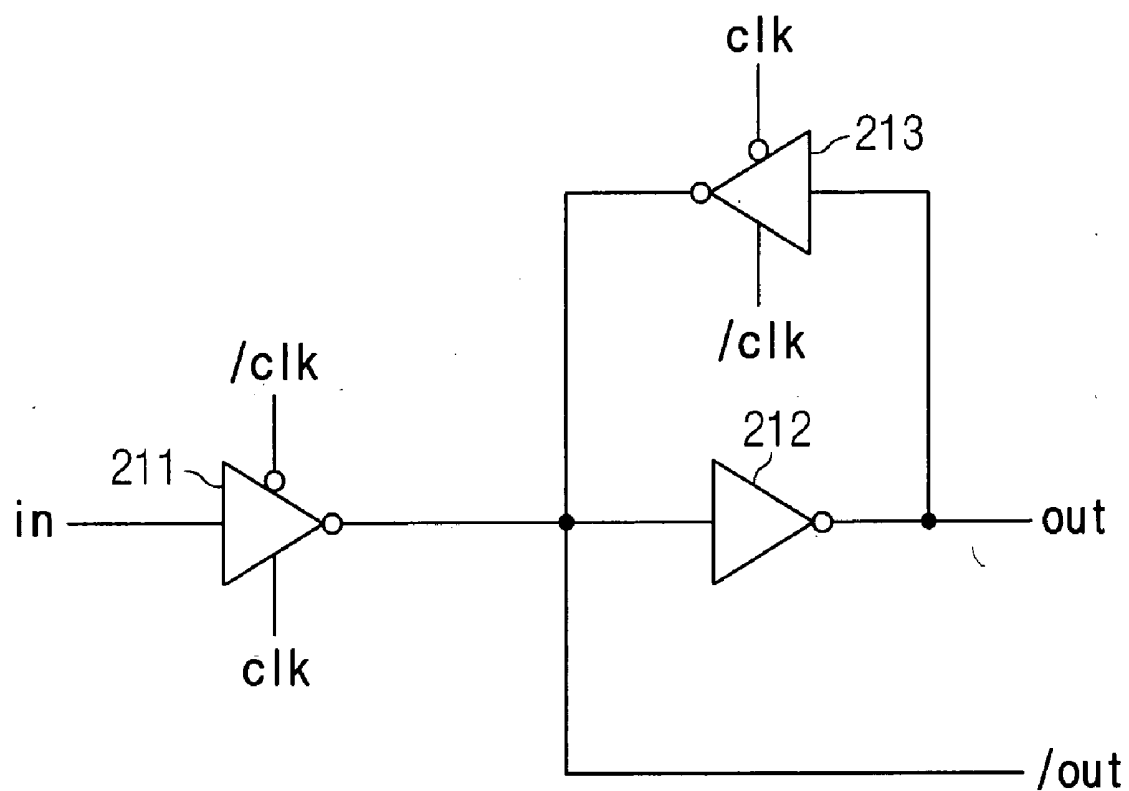


Fig. 11

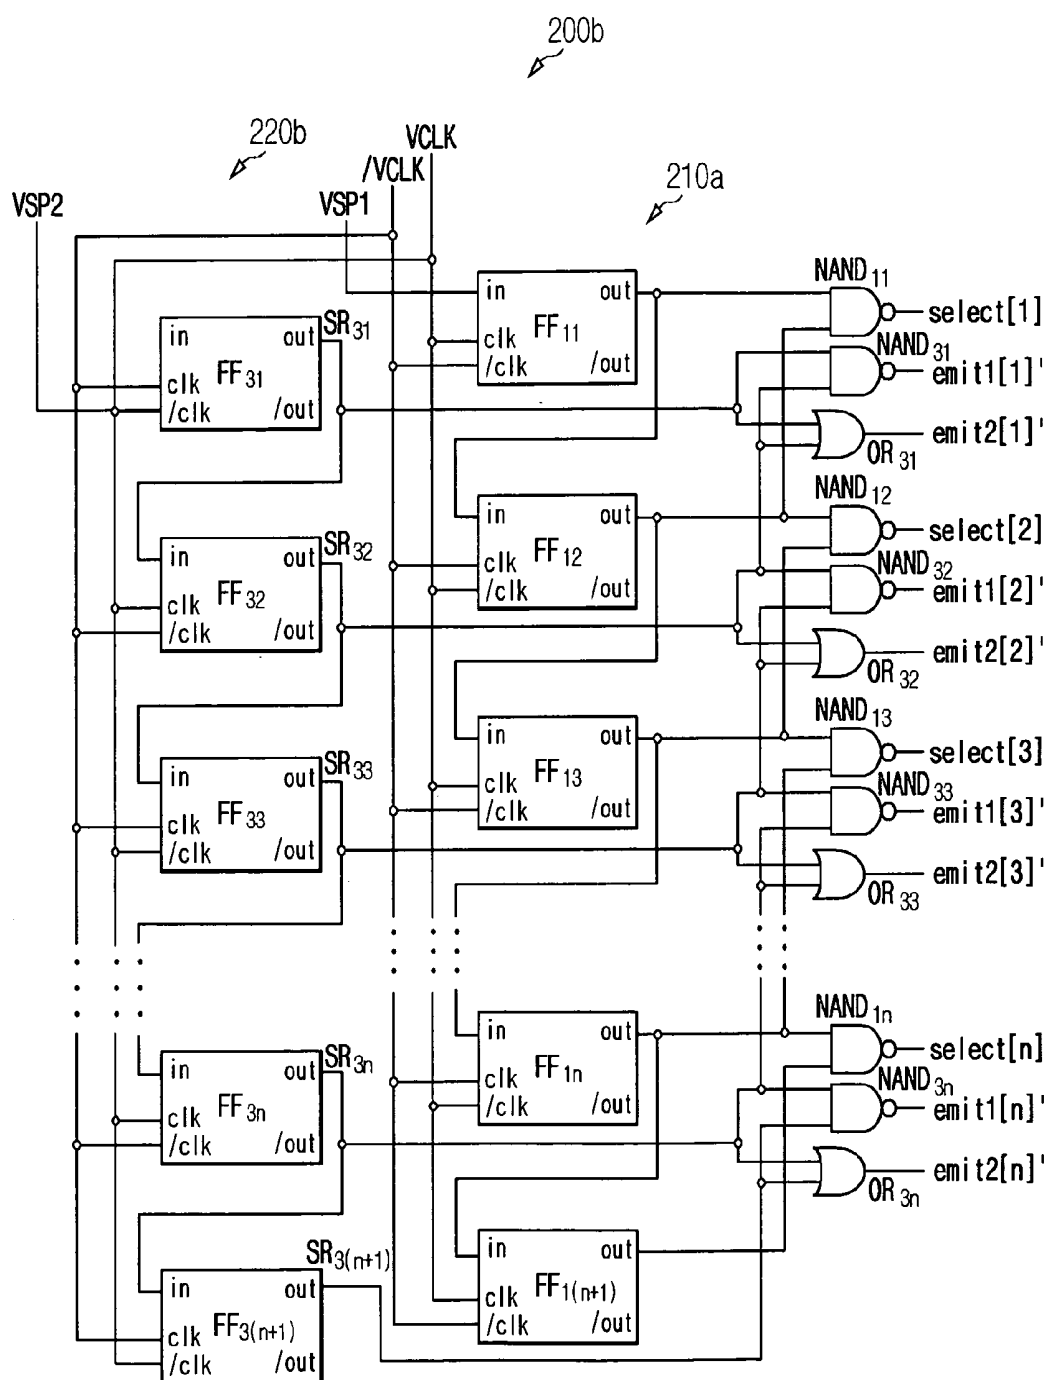


Fig. 12

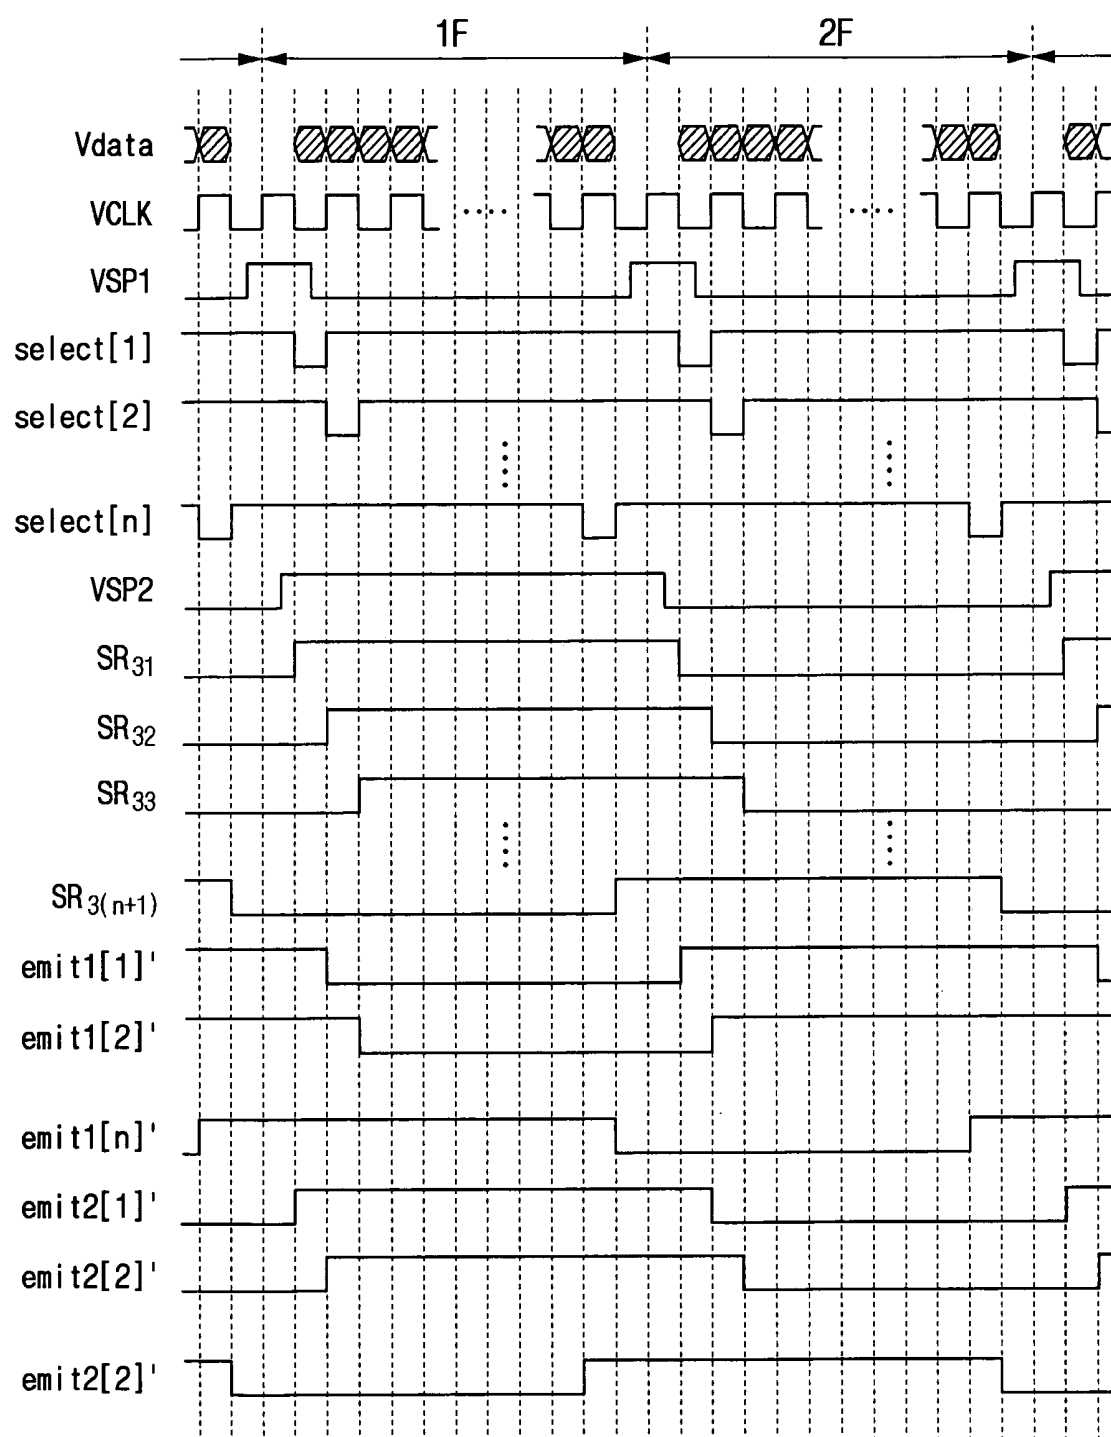


Fig. 13

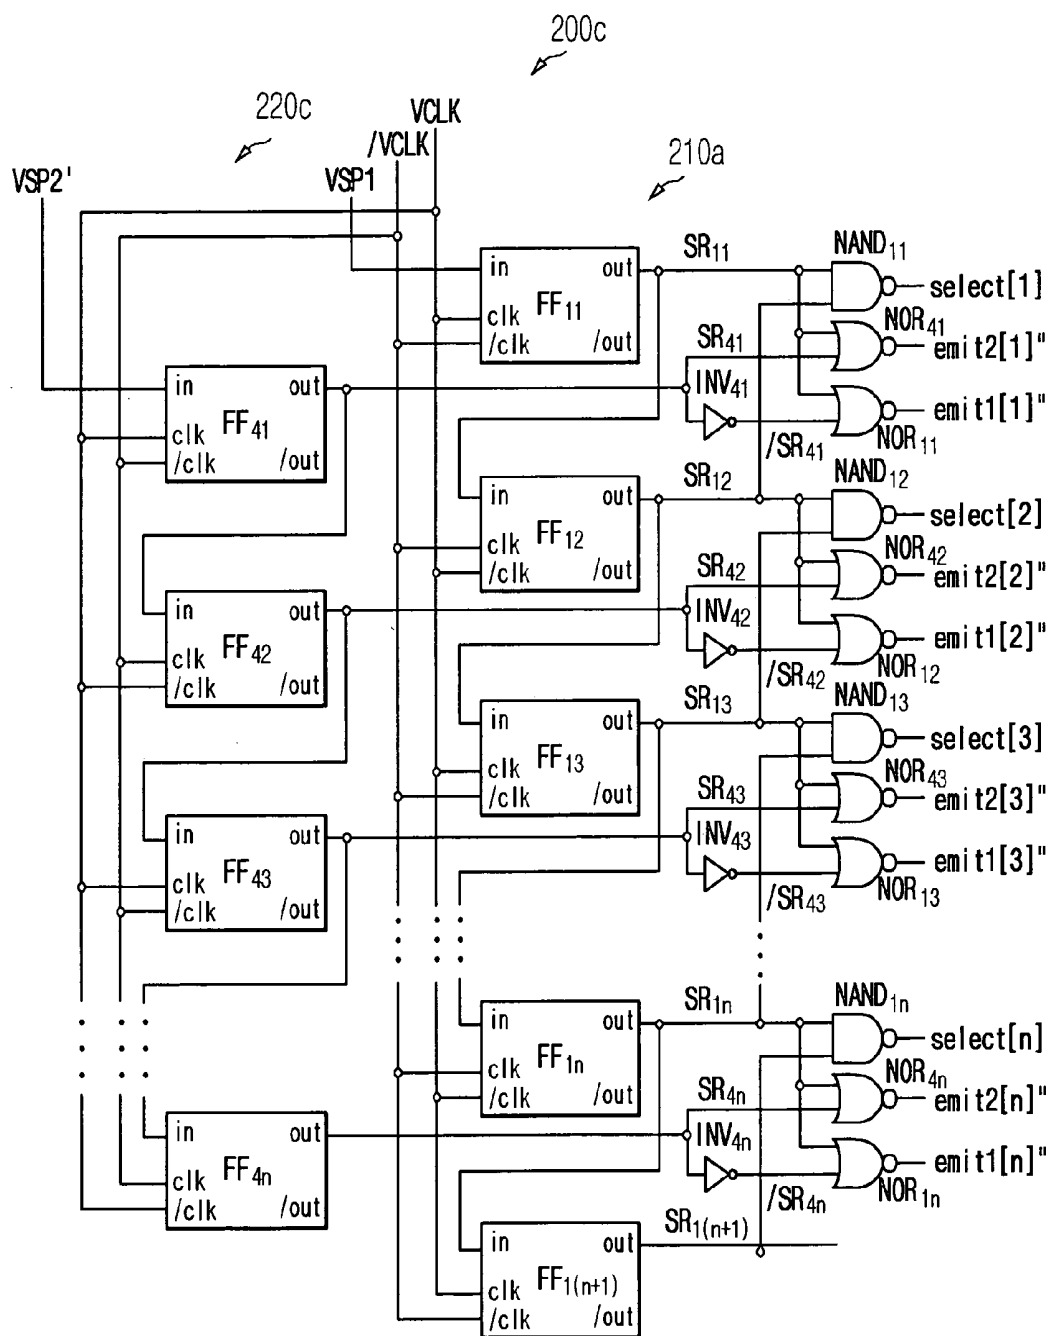


Fig. 14

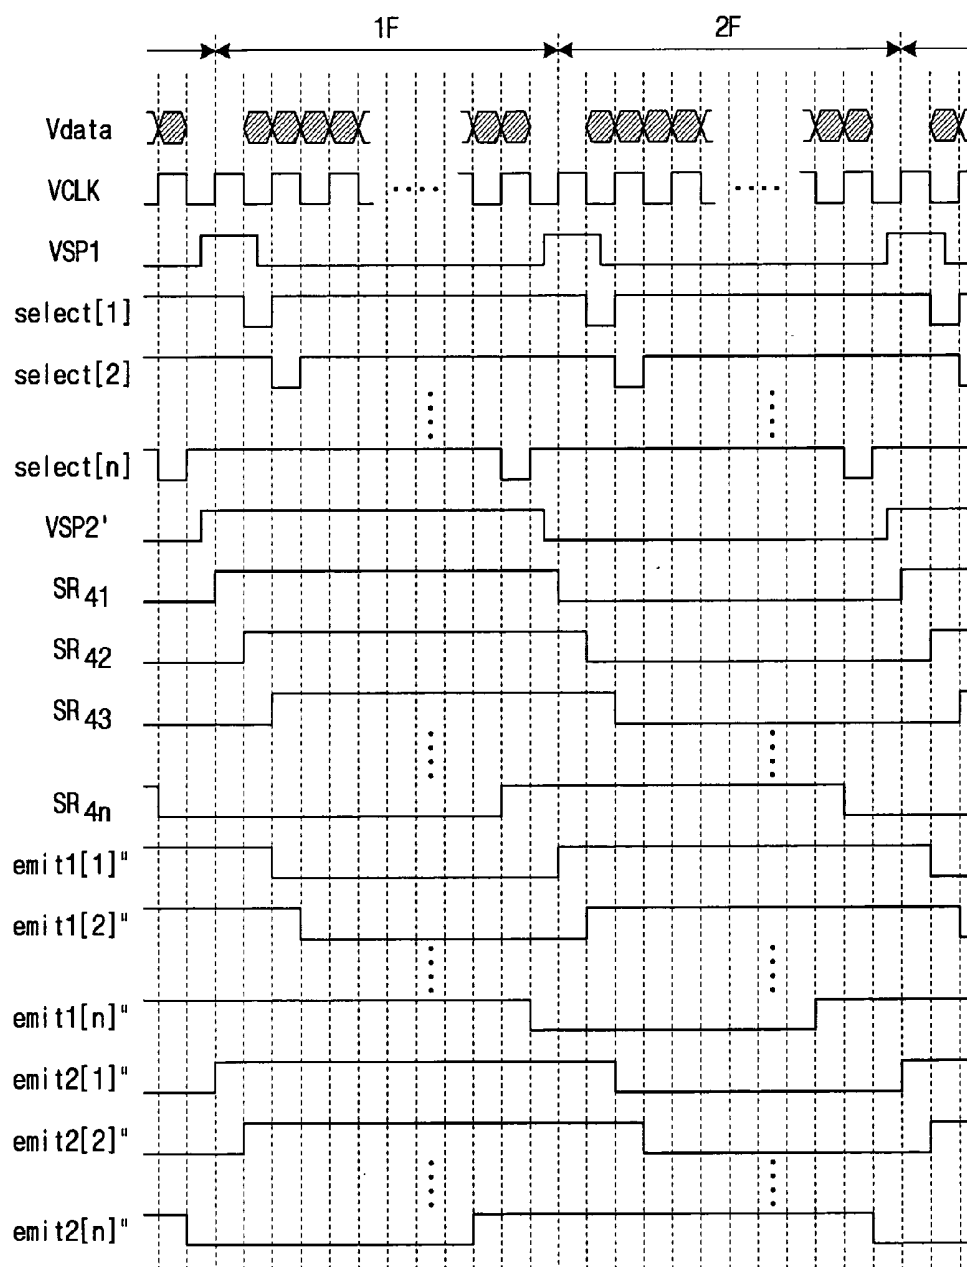


Fig. 15

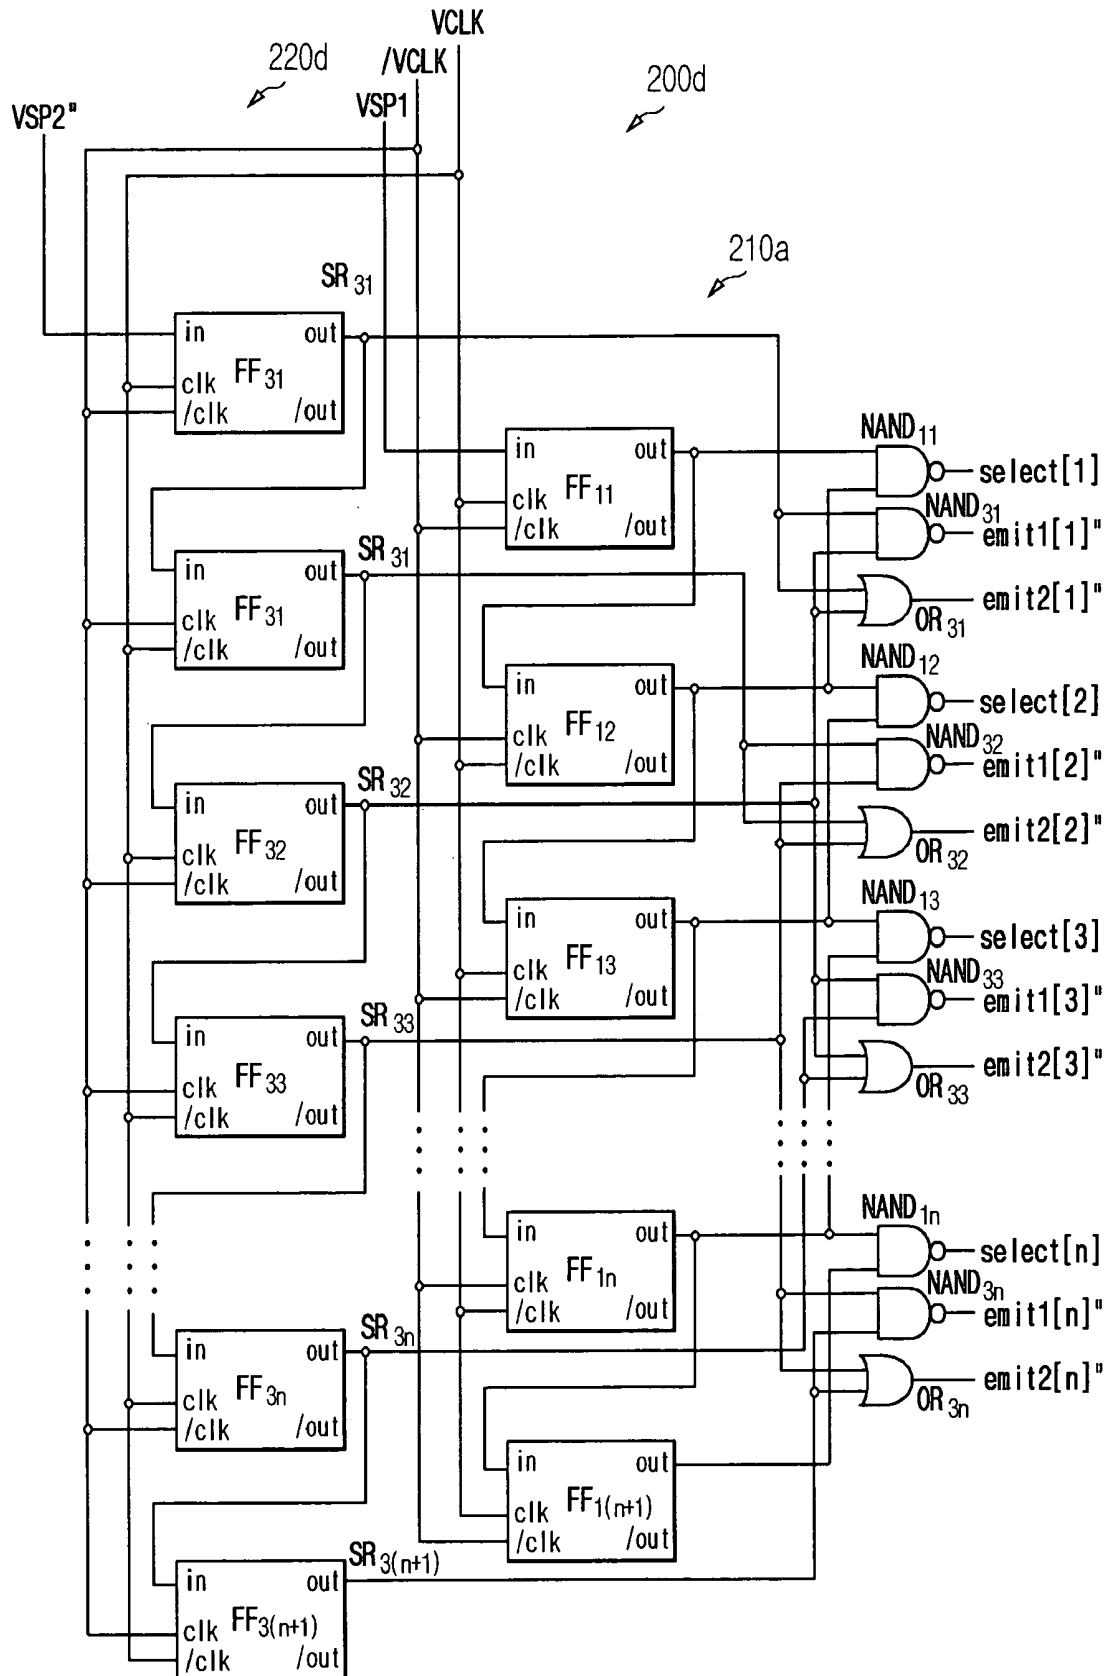


Fig. 16

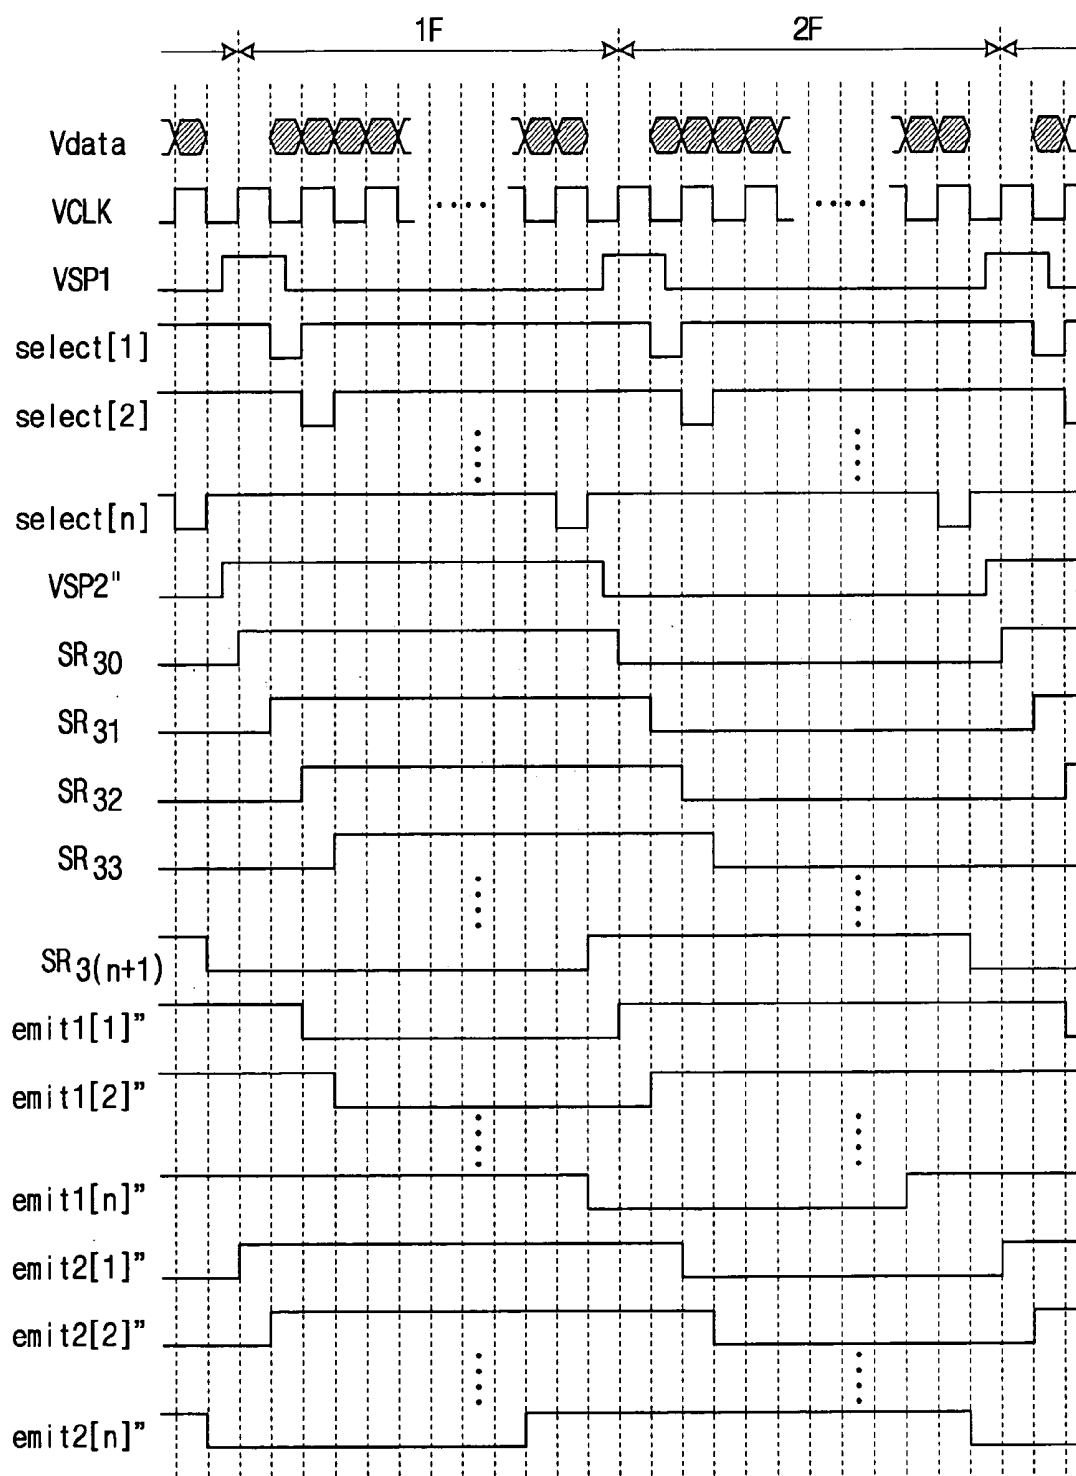


Fig. 17

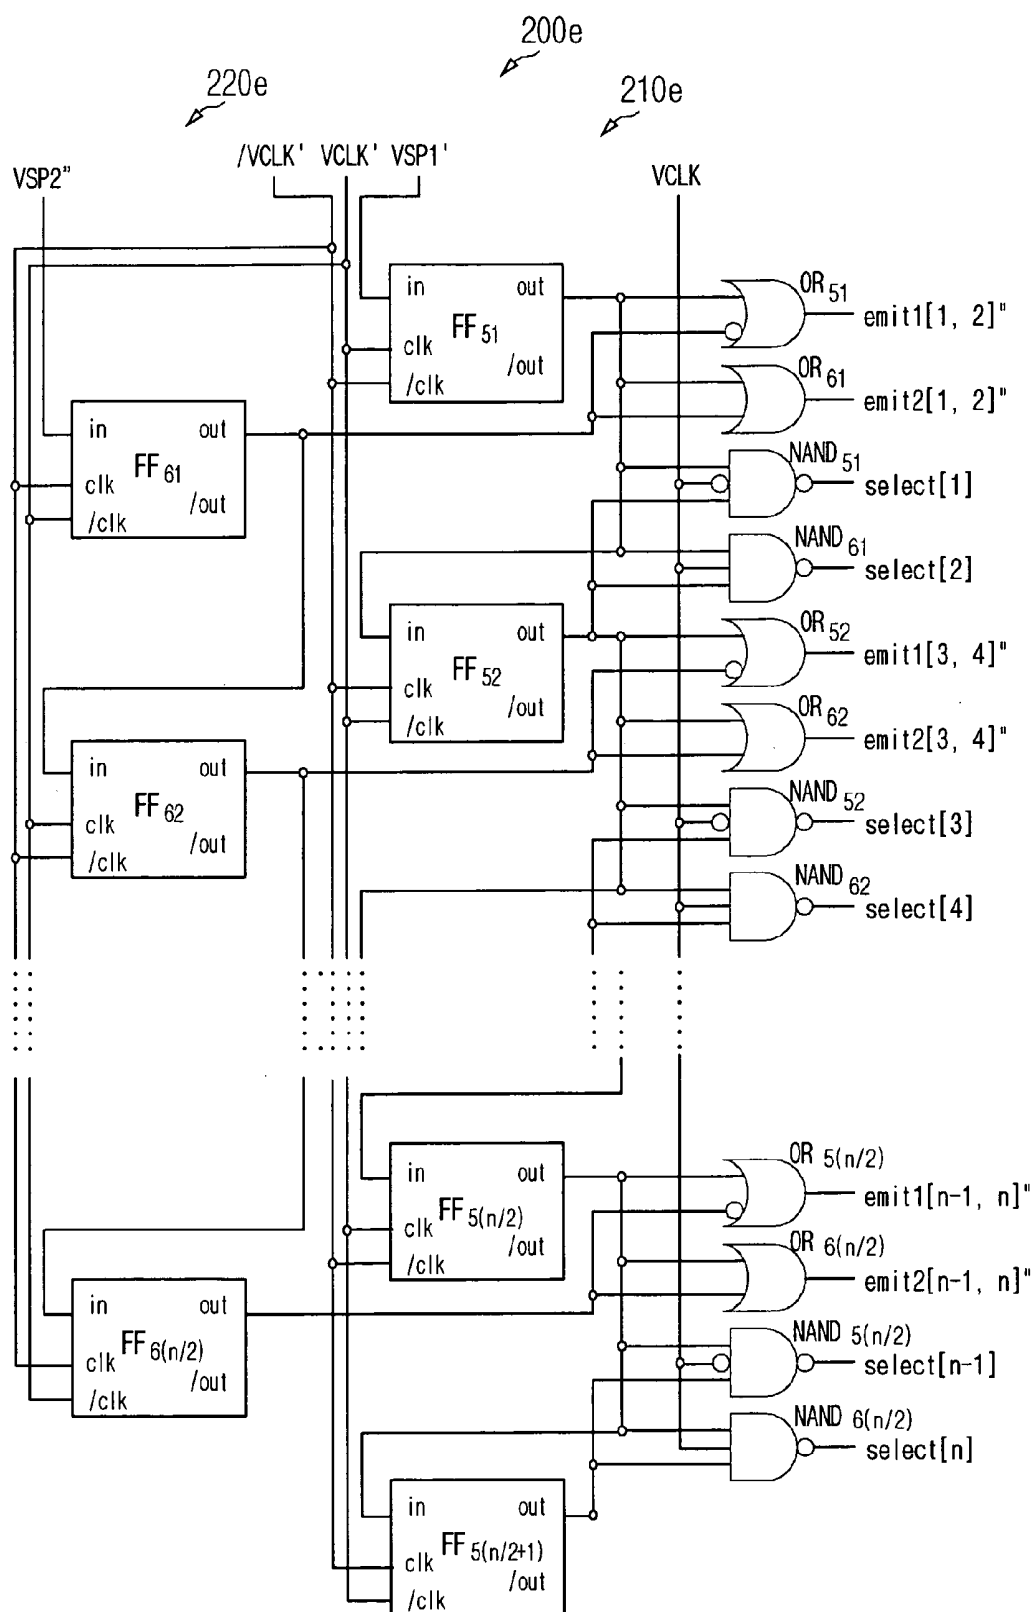


Fig. 18

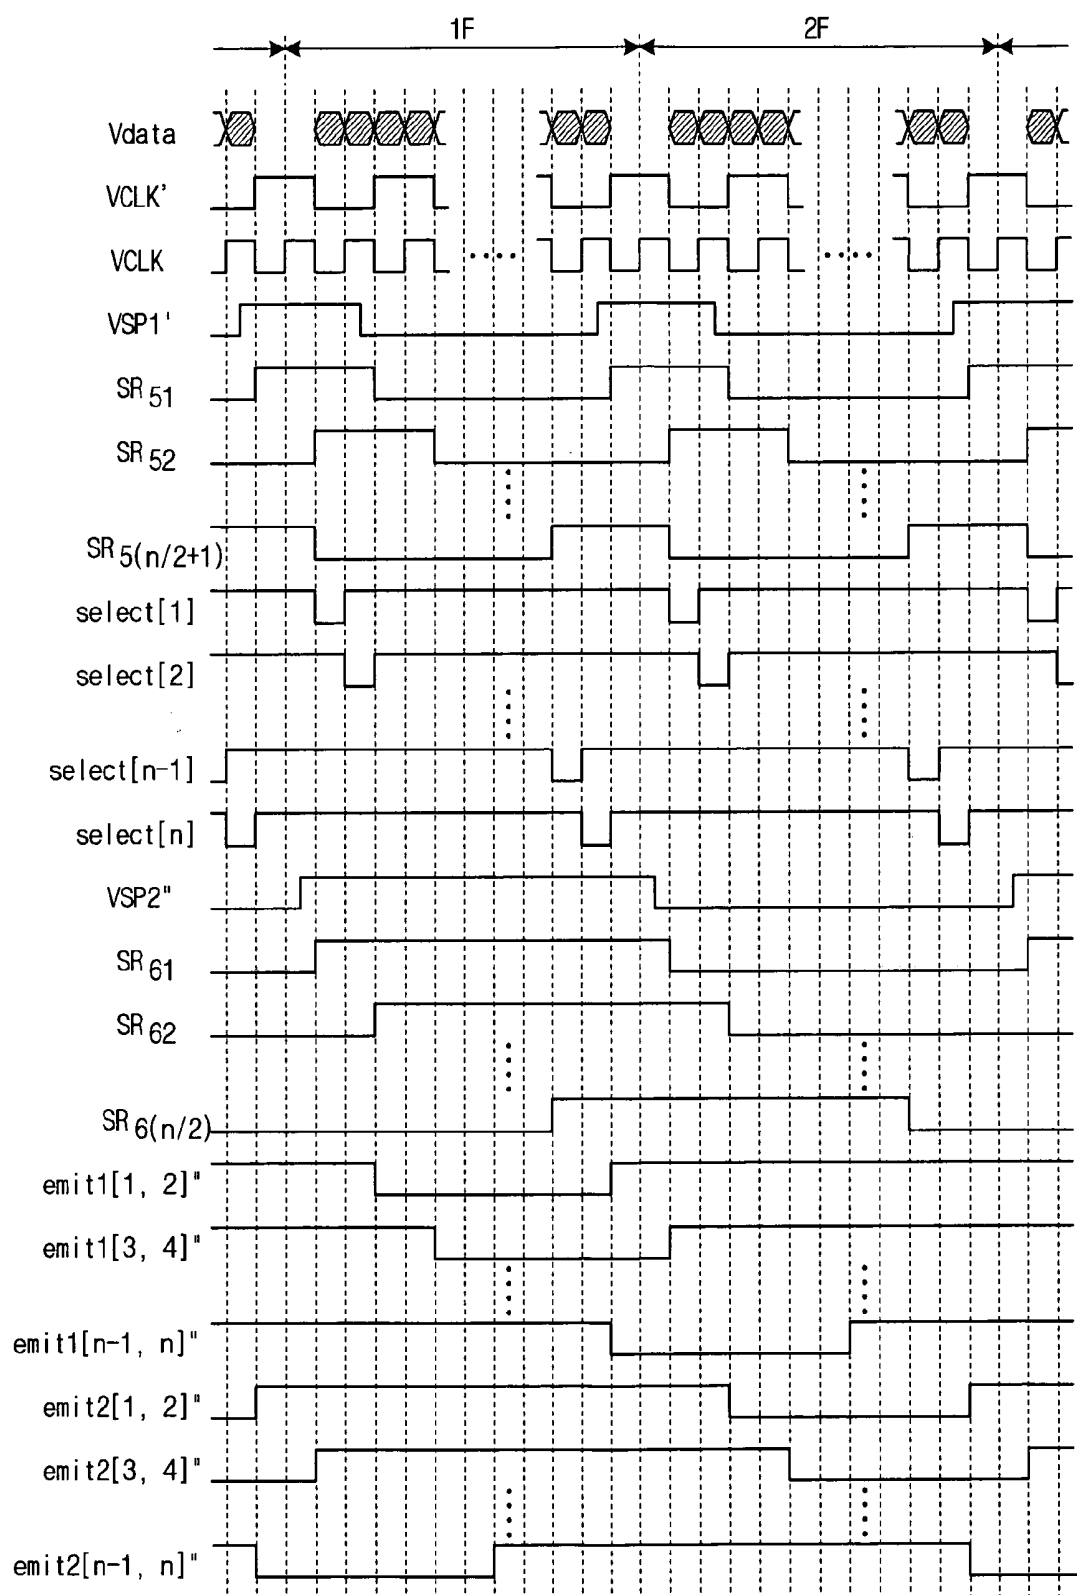


Fig. 19

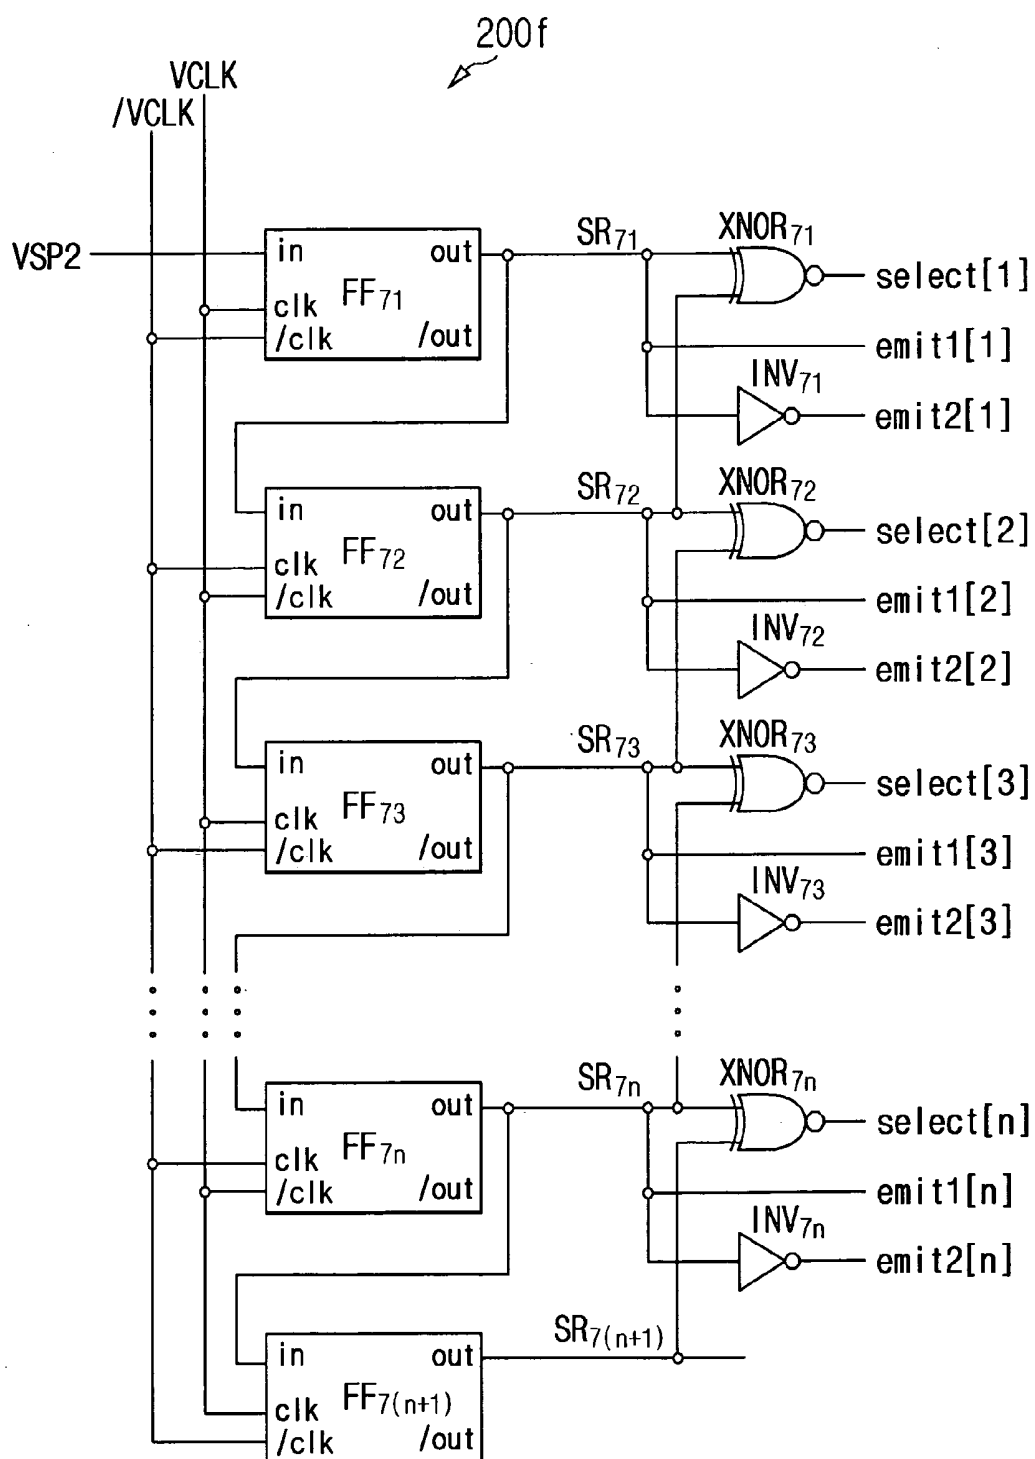


Fig. 20

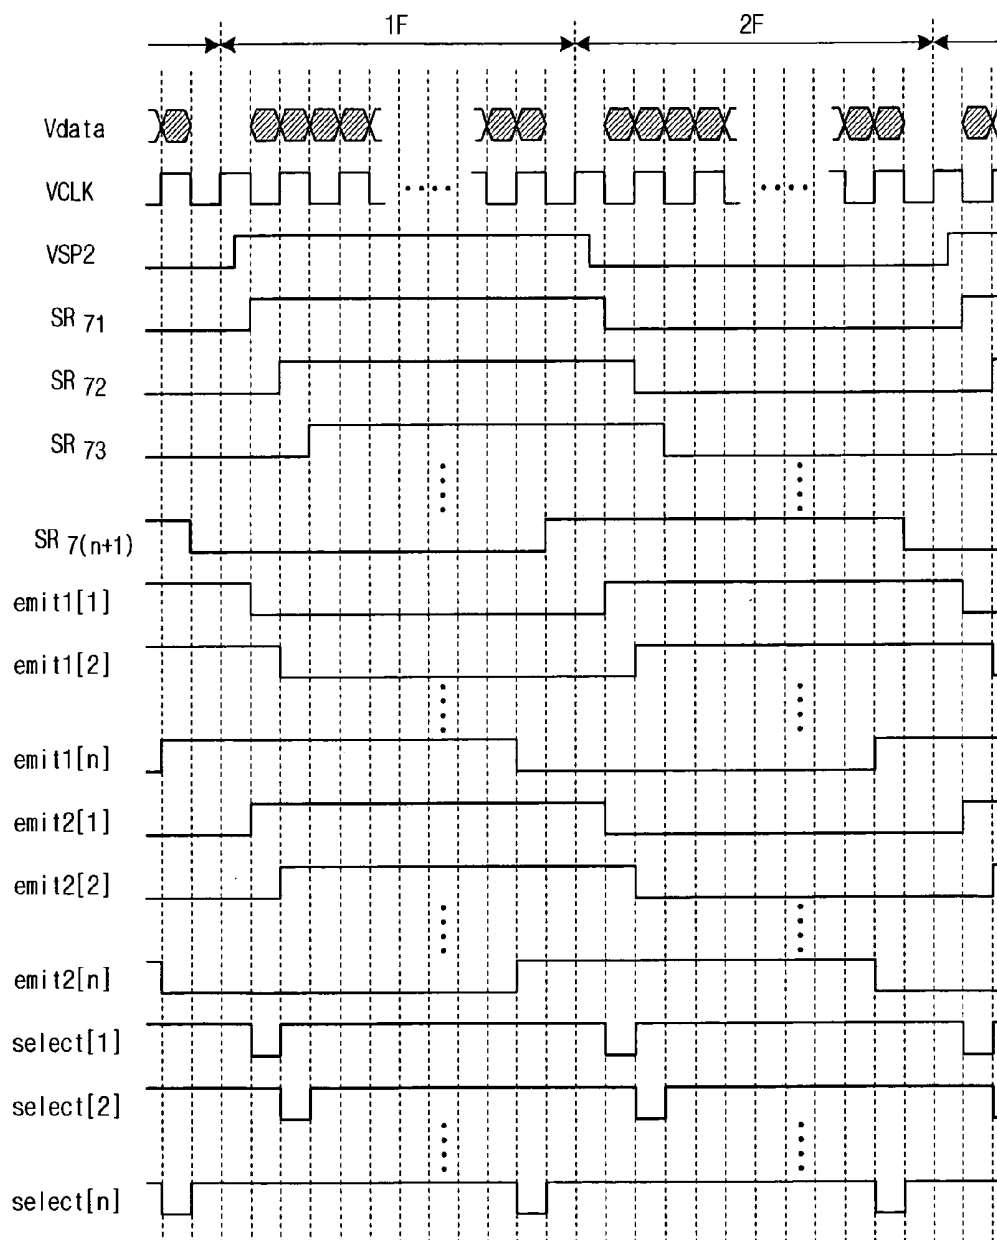


Fig. 21

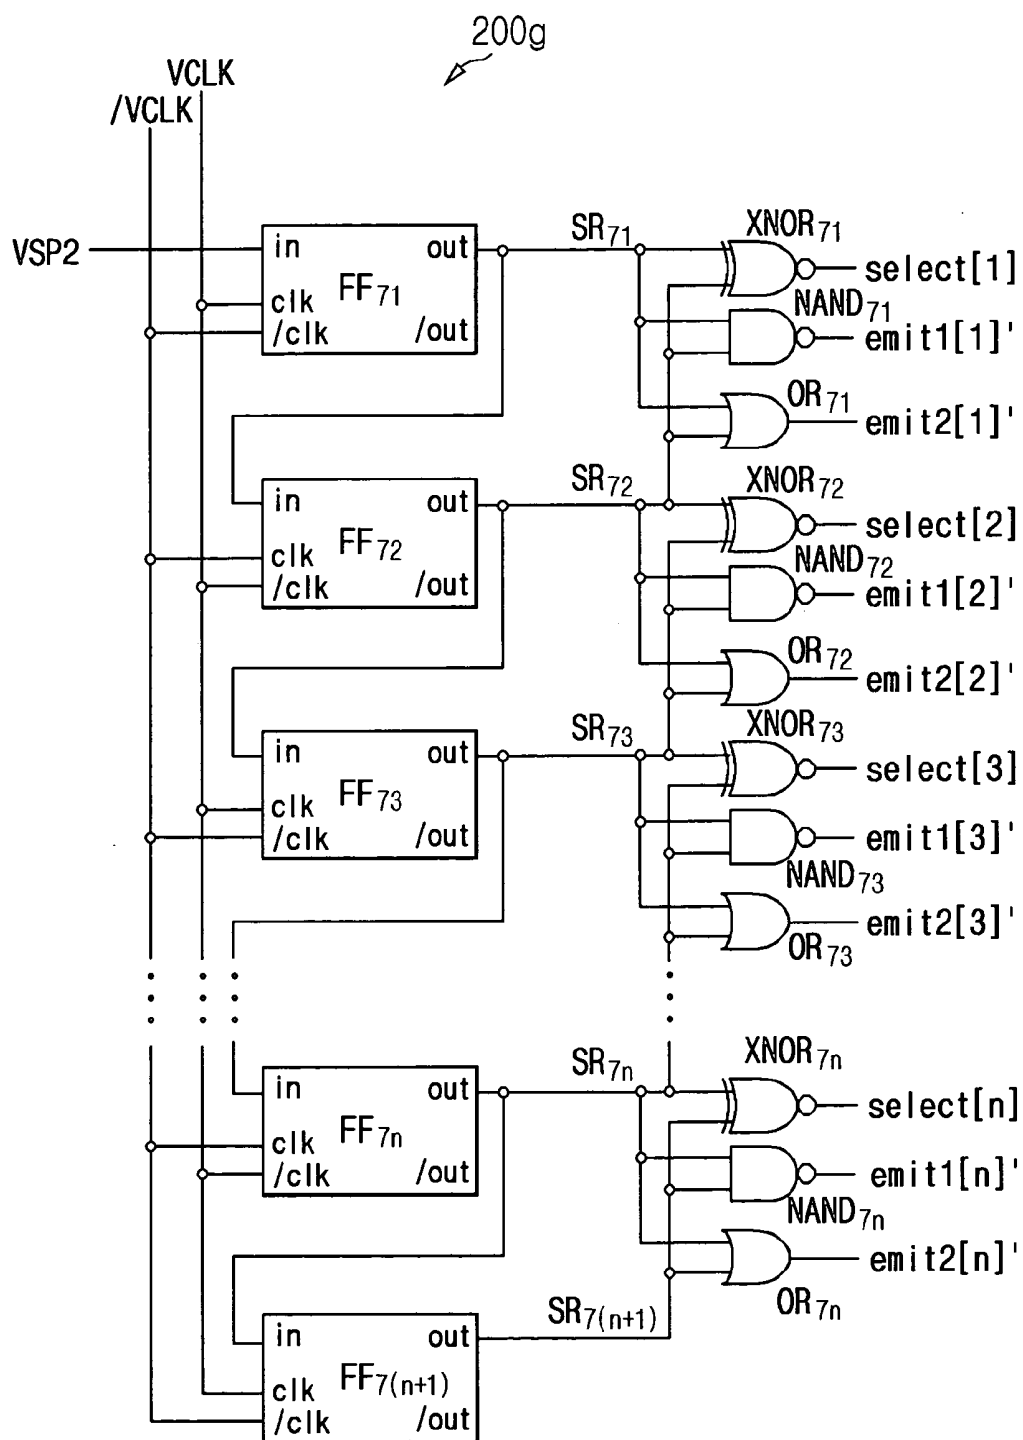


Fig. 22

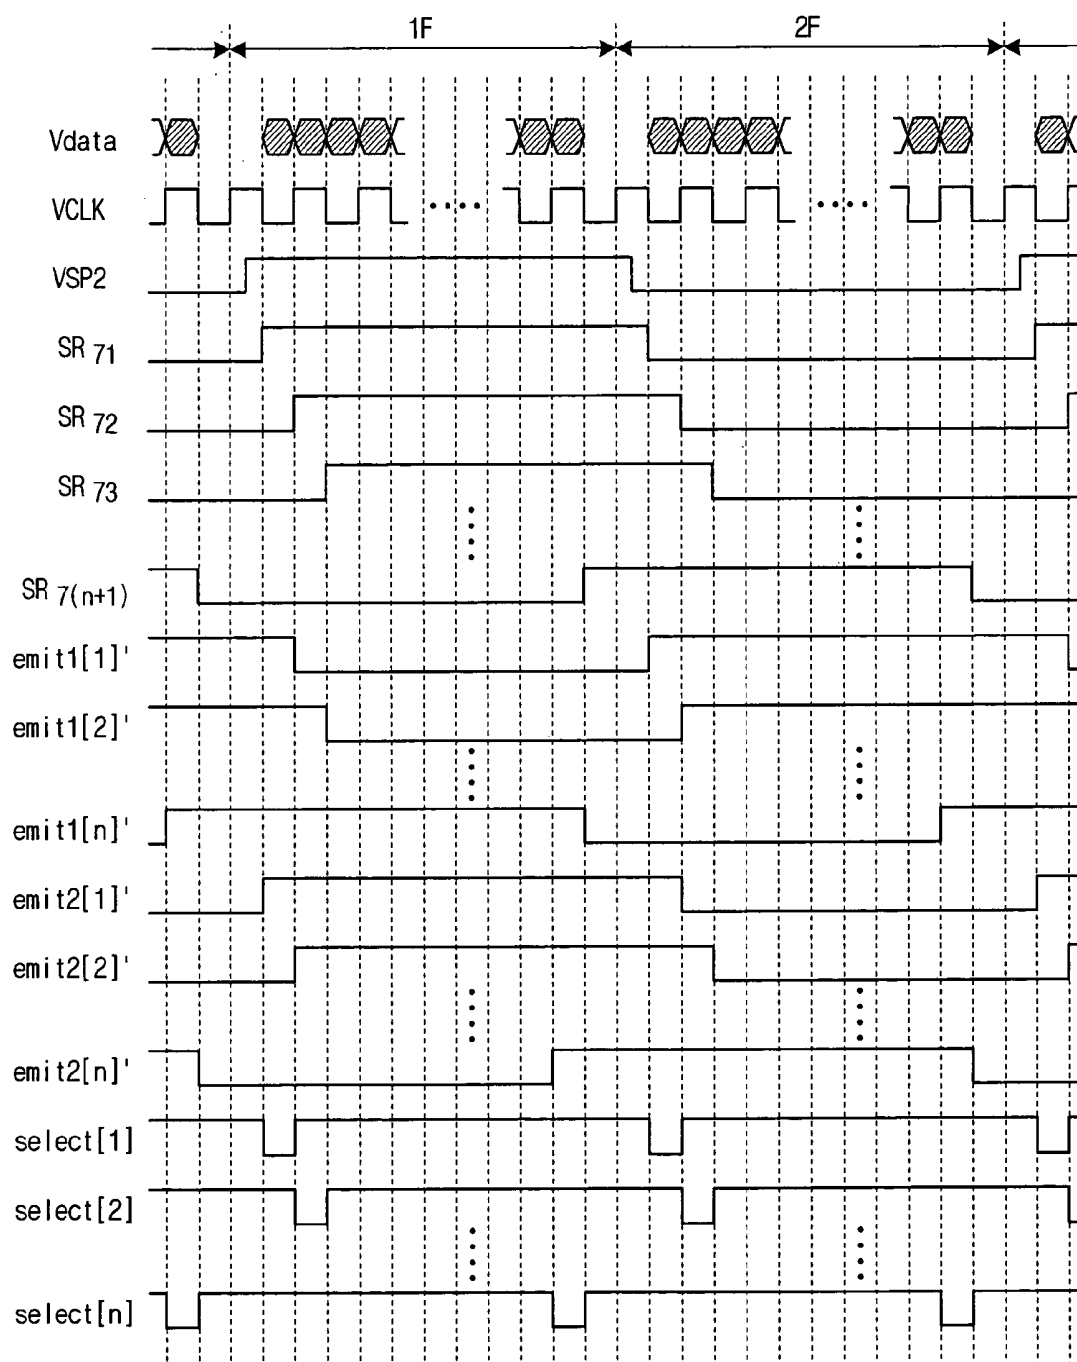


Fig. 23

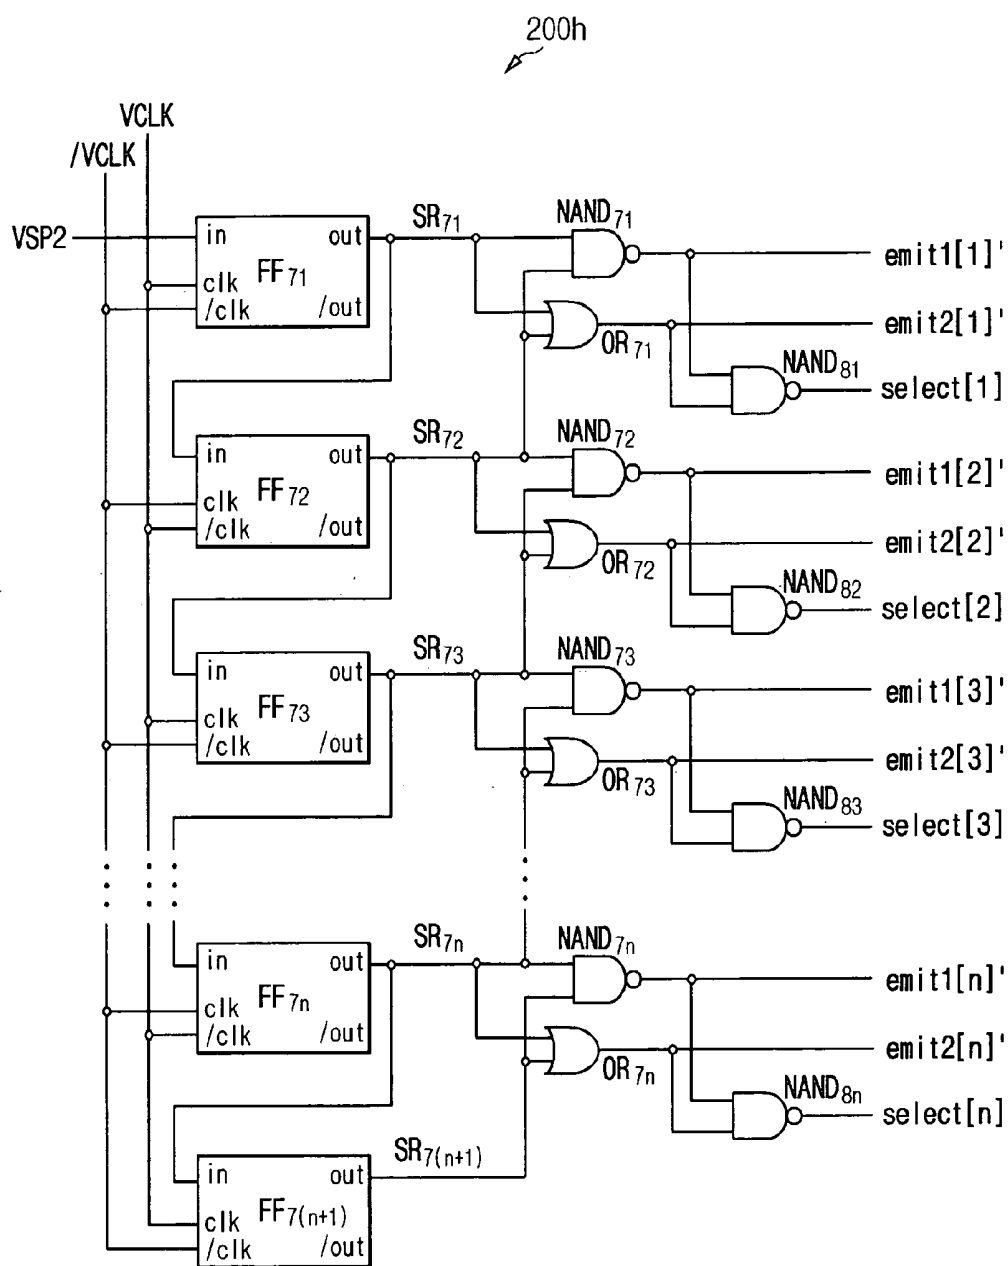


Fig. 24

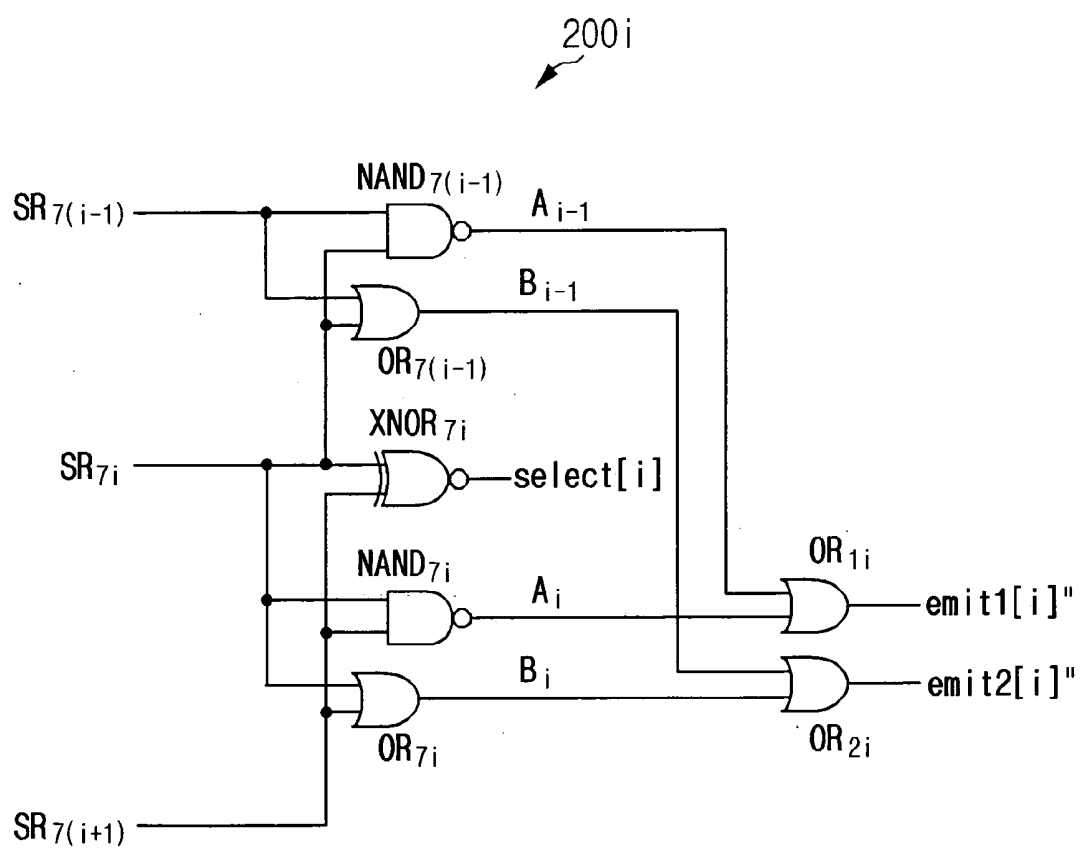


Fig. 25

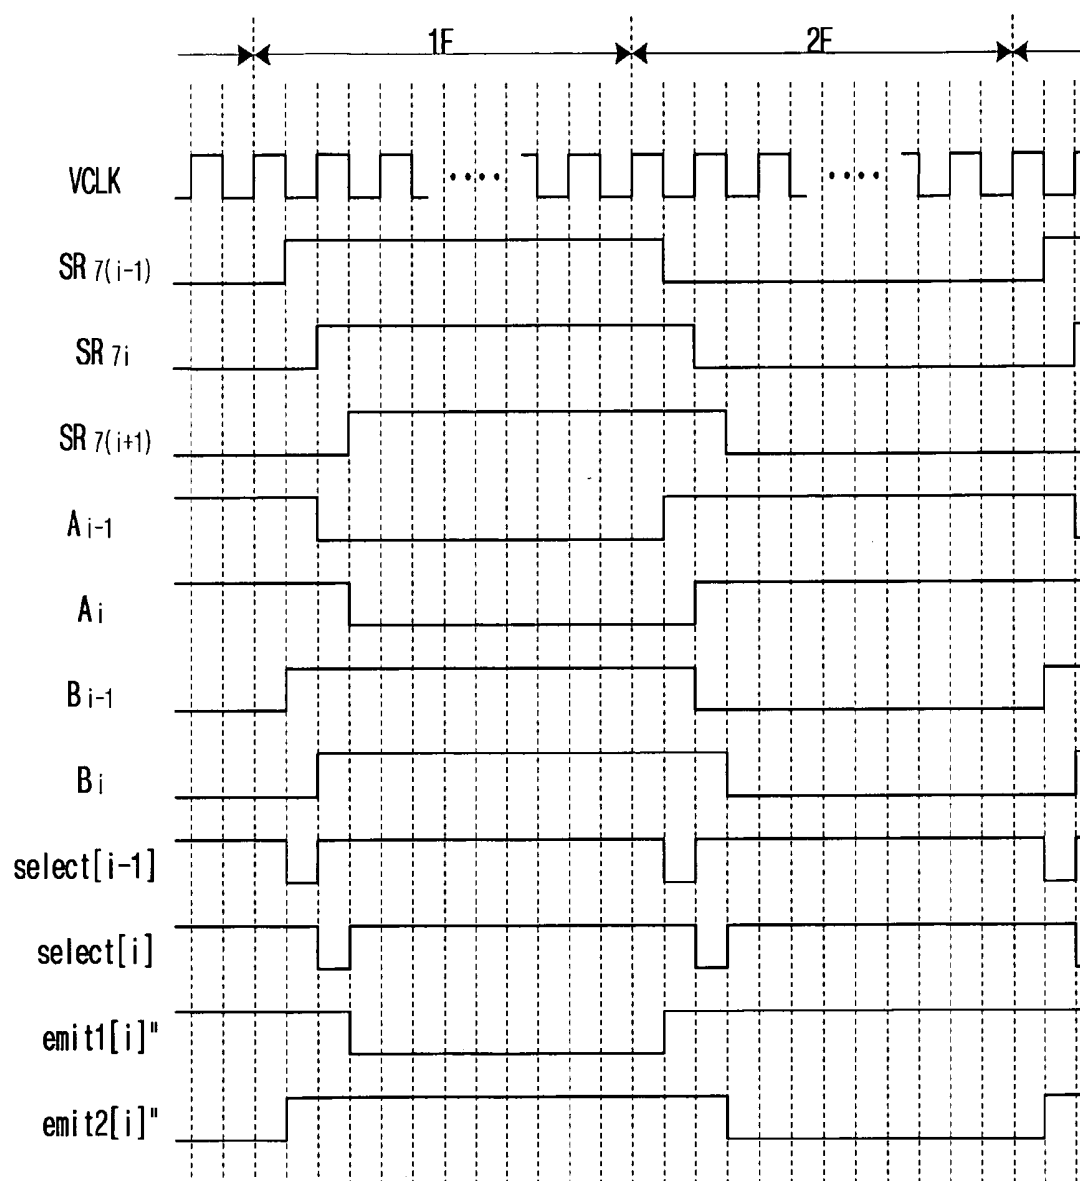


Fig. 26

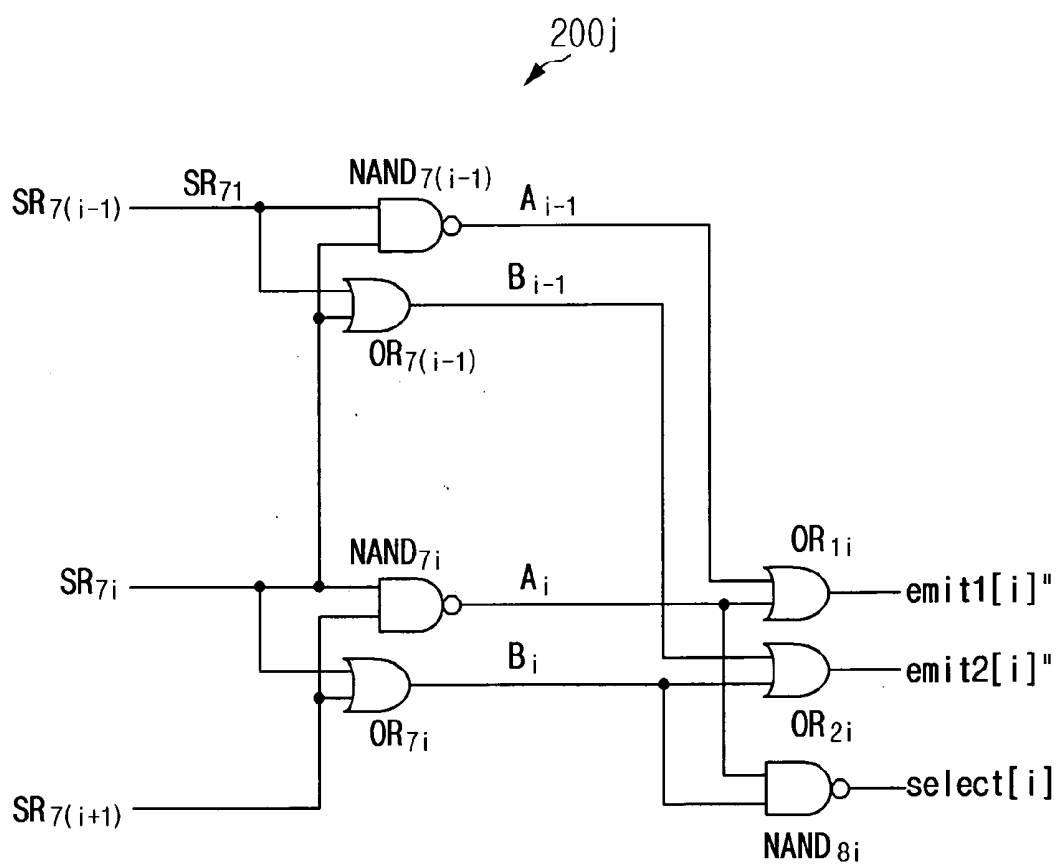


Fig. 27

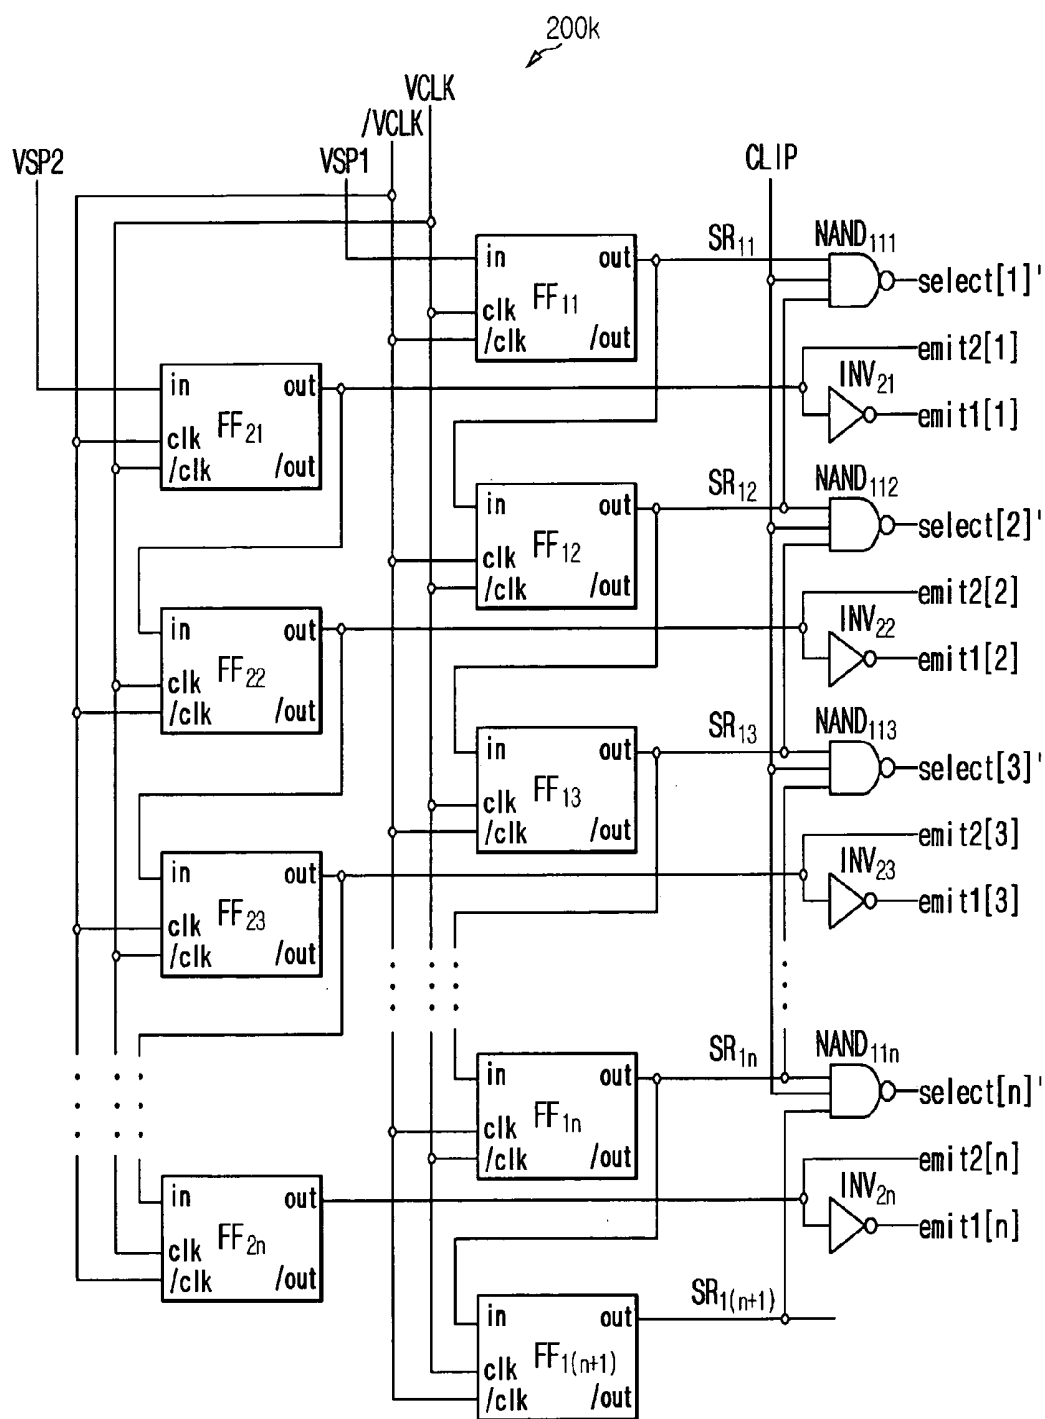


Fig. 28

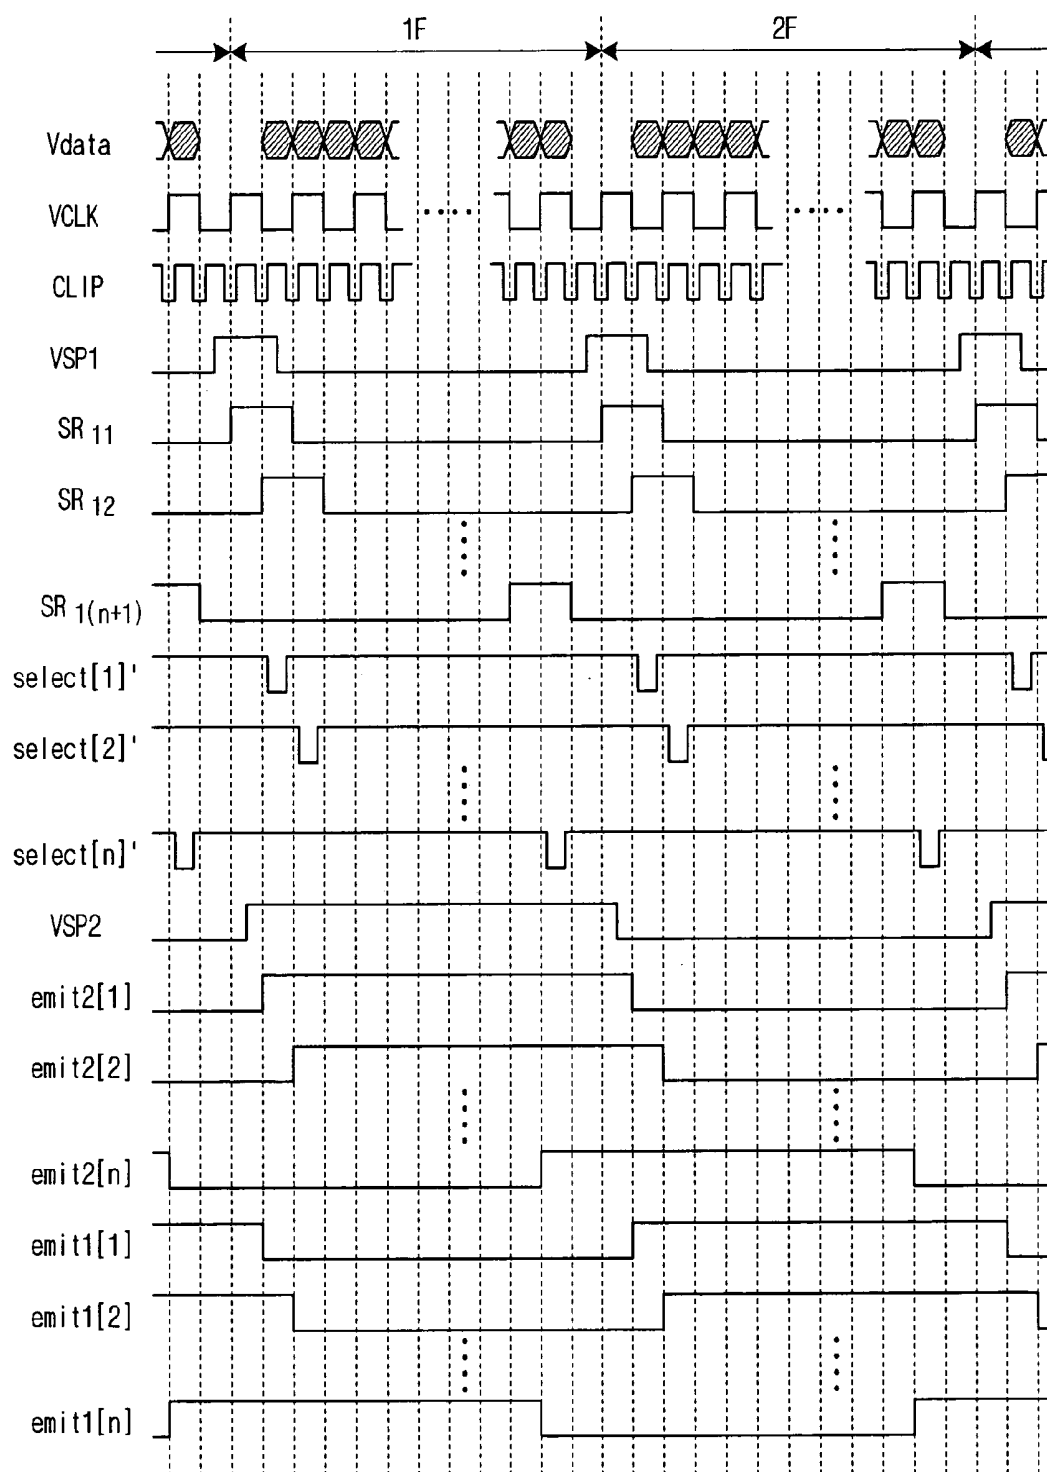


Fig. 29

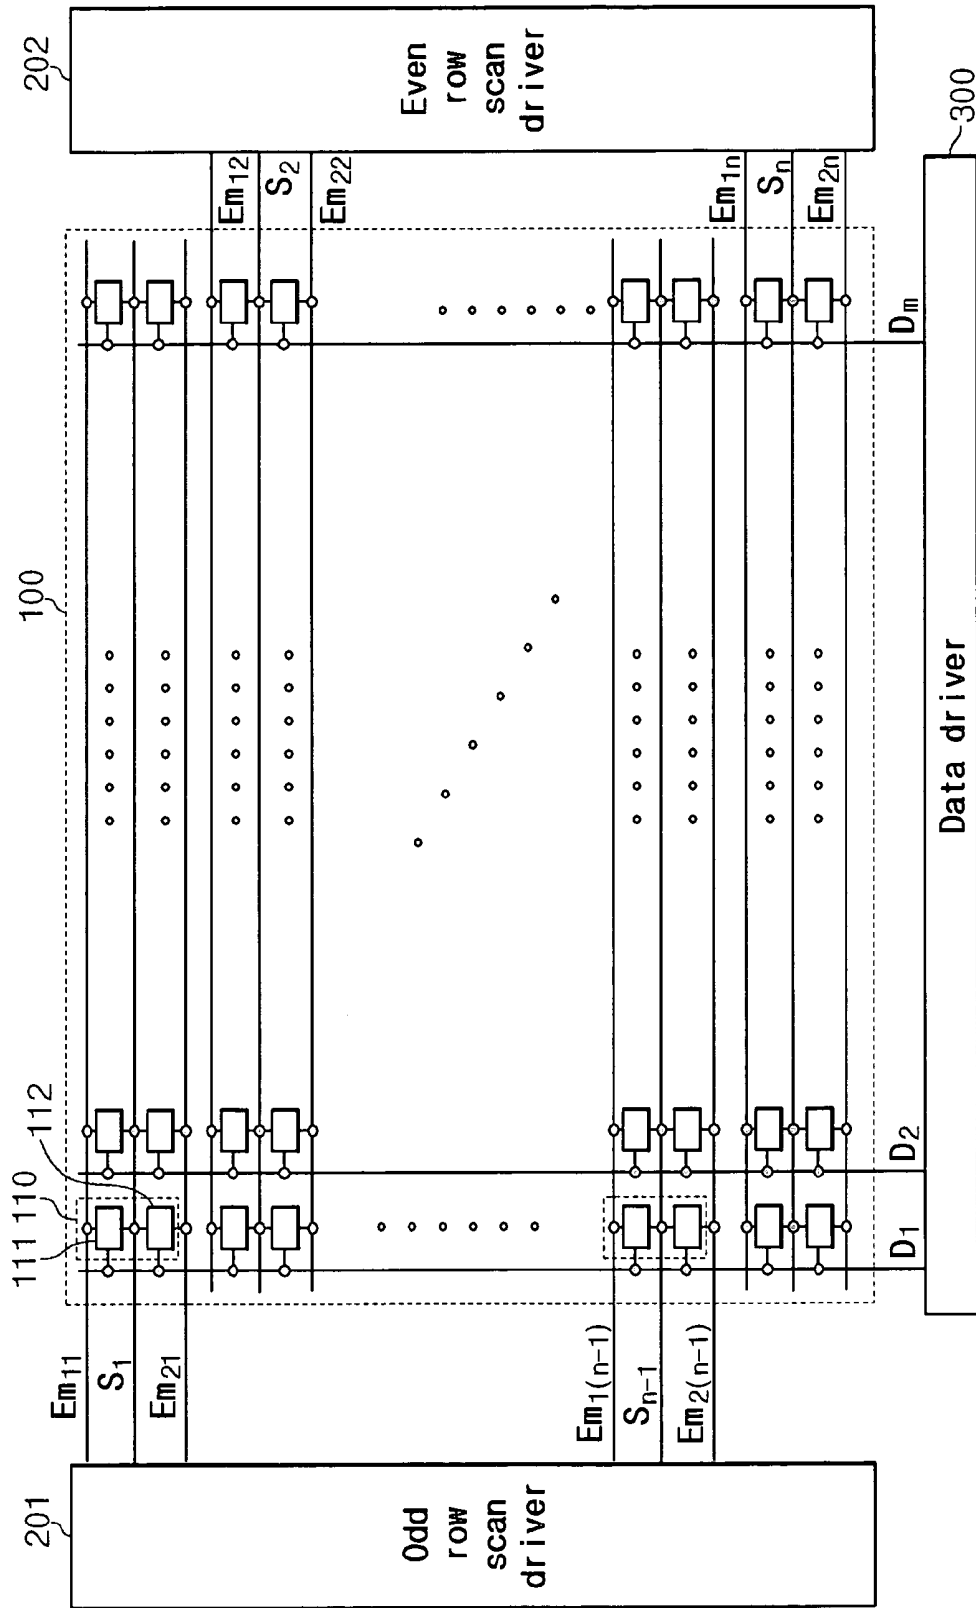


Fig. 30A

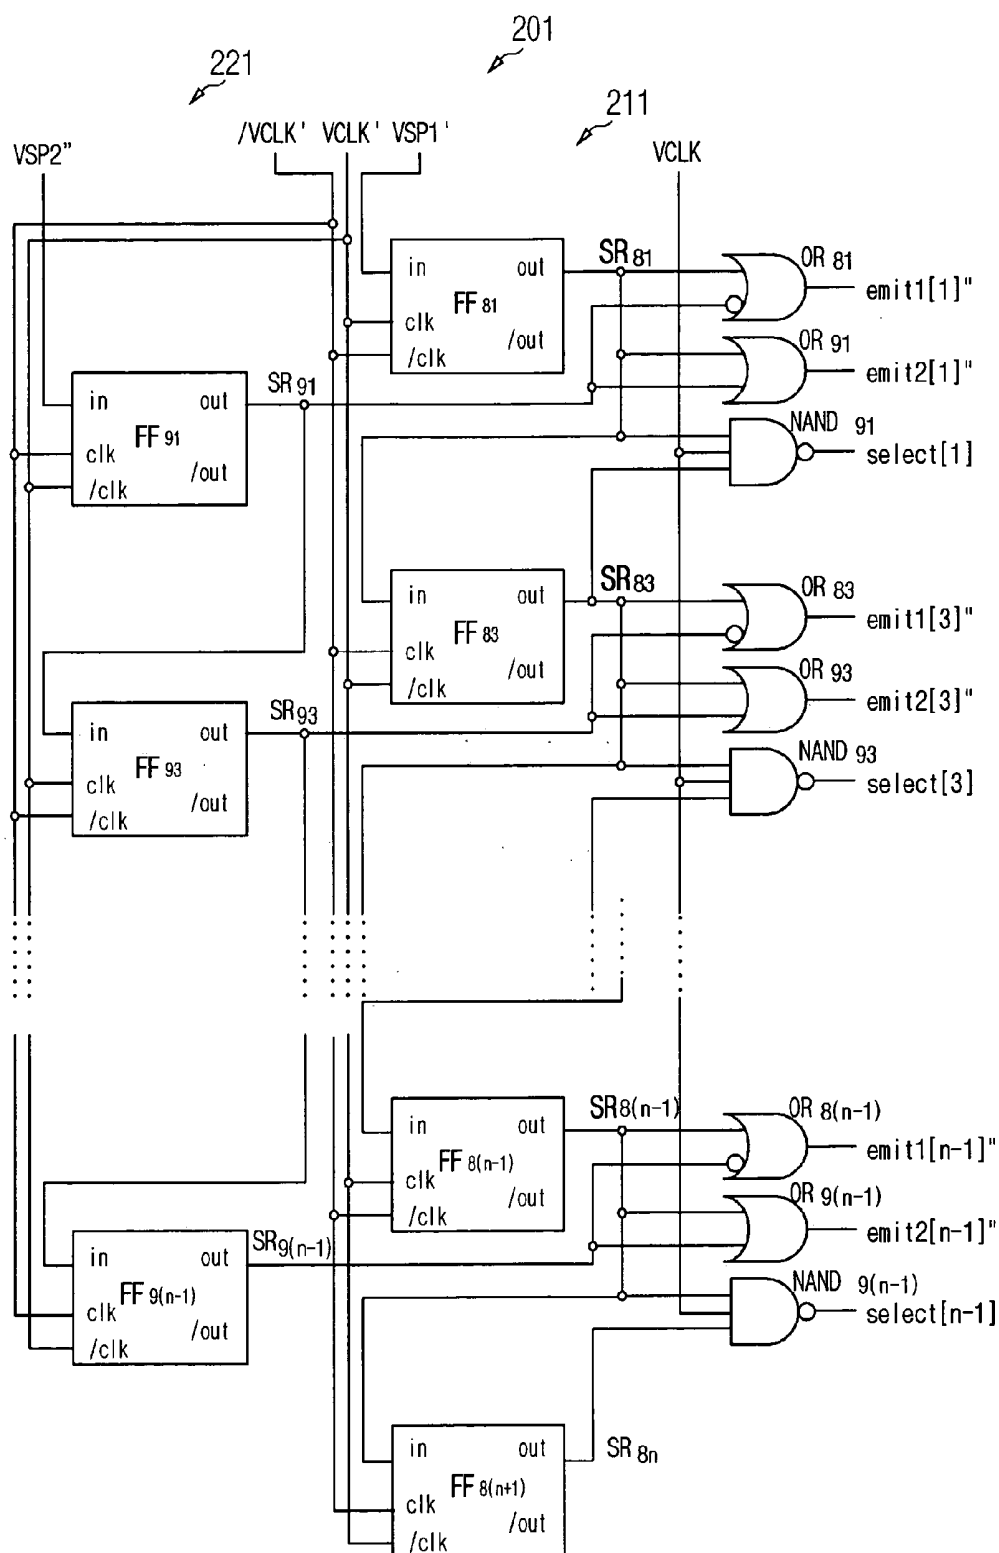


Fig. 30B


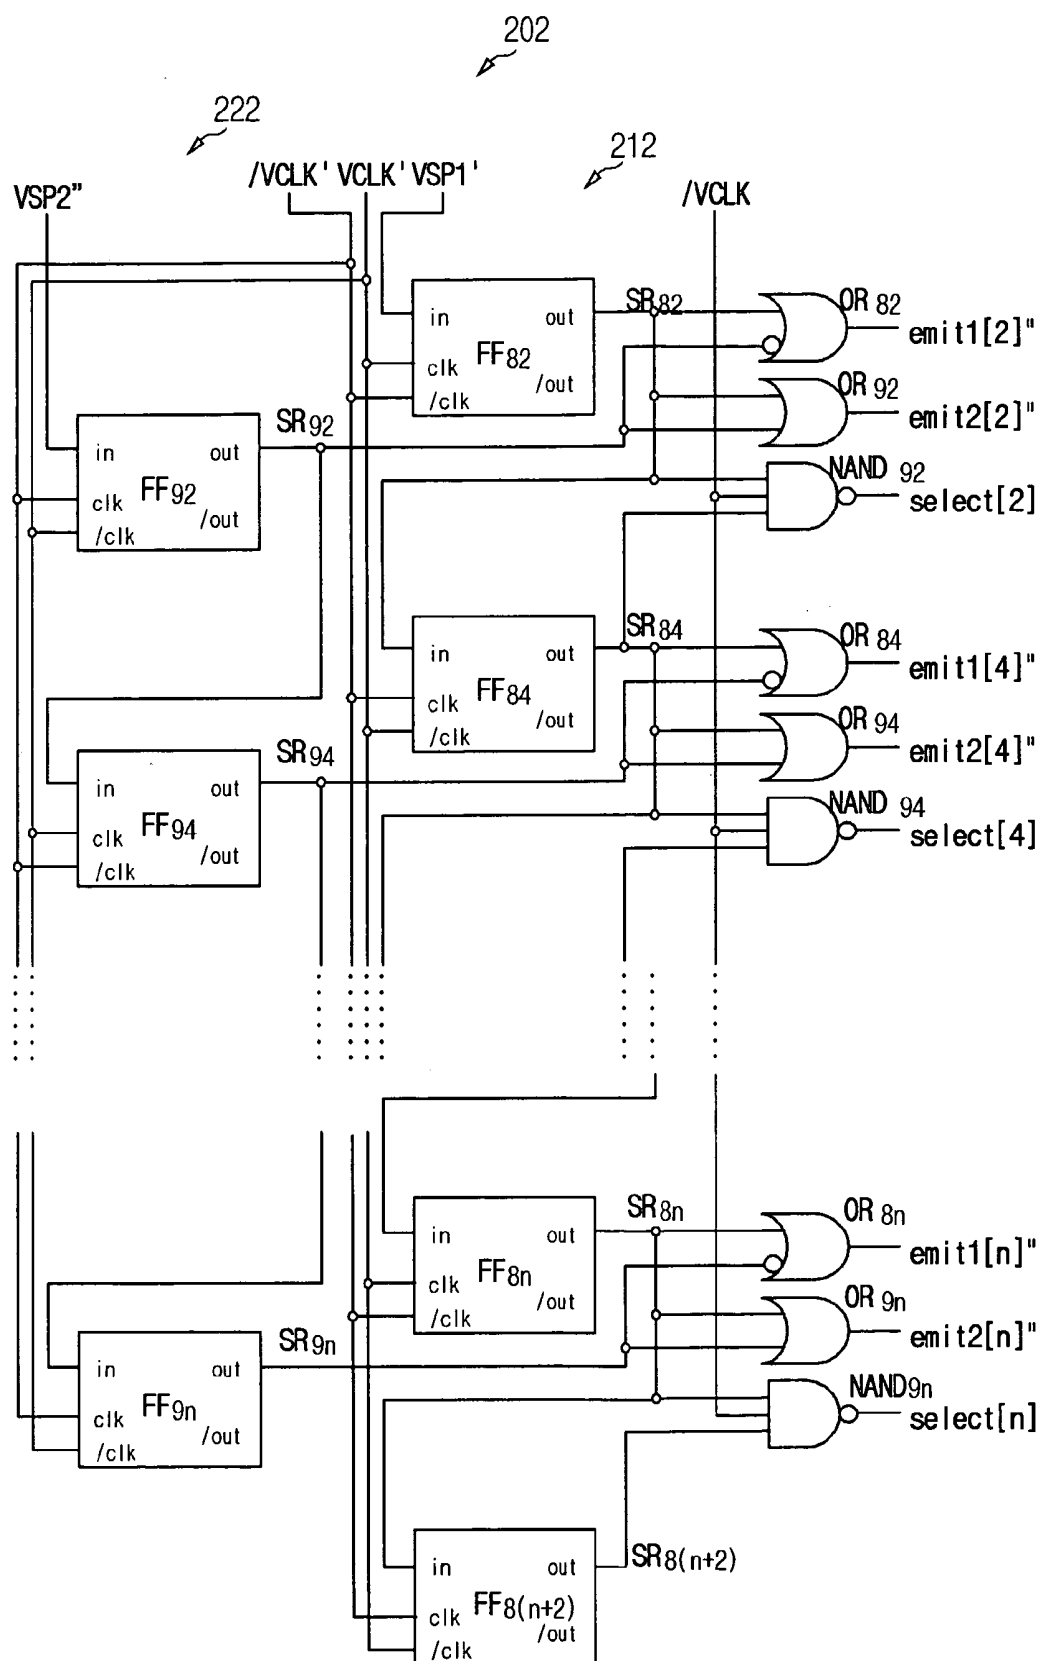


Fig. 31

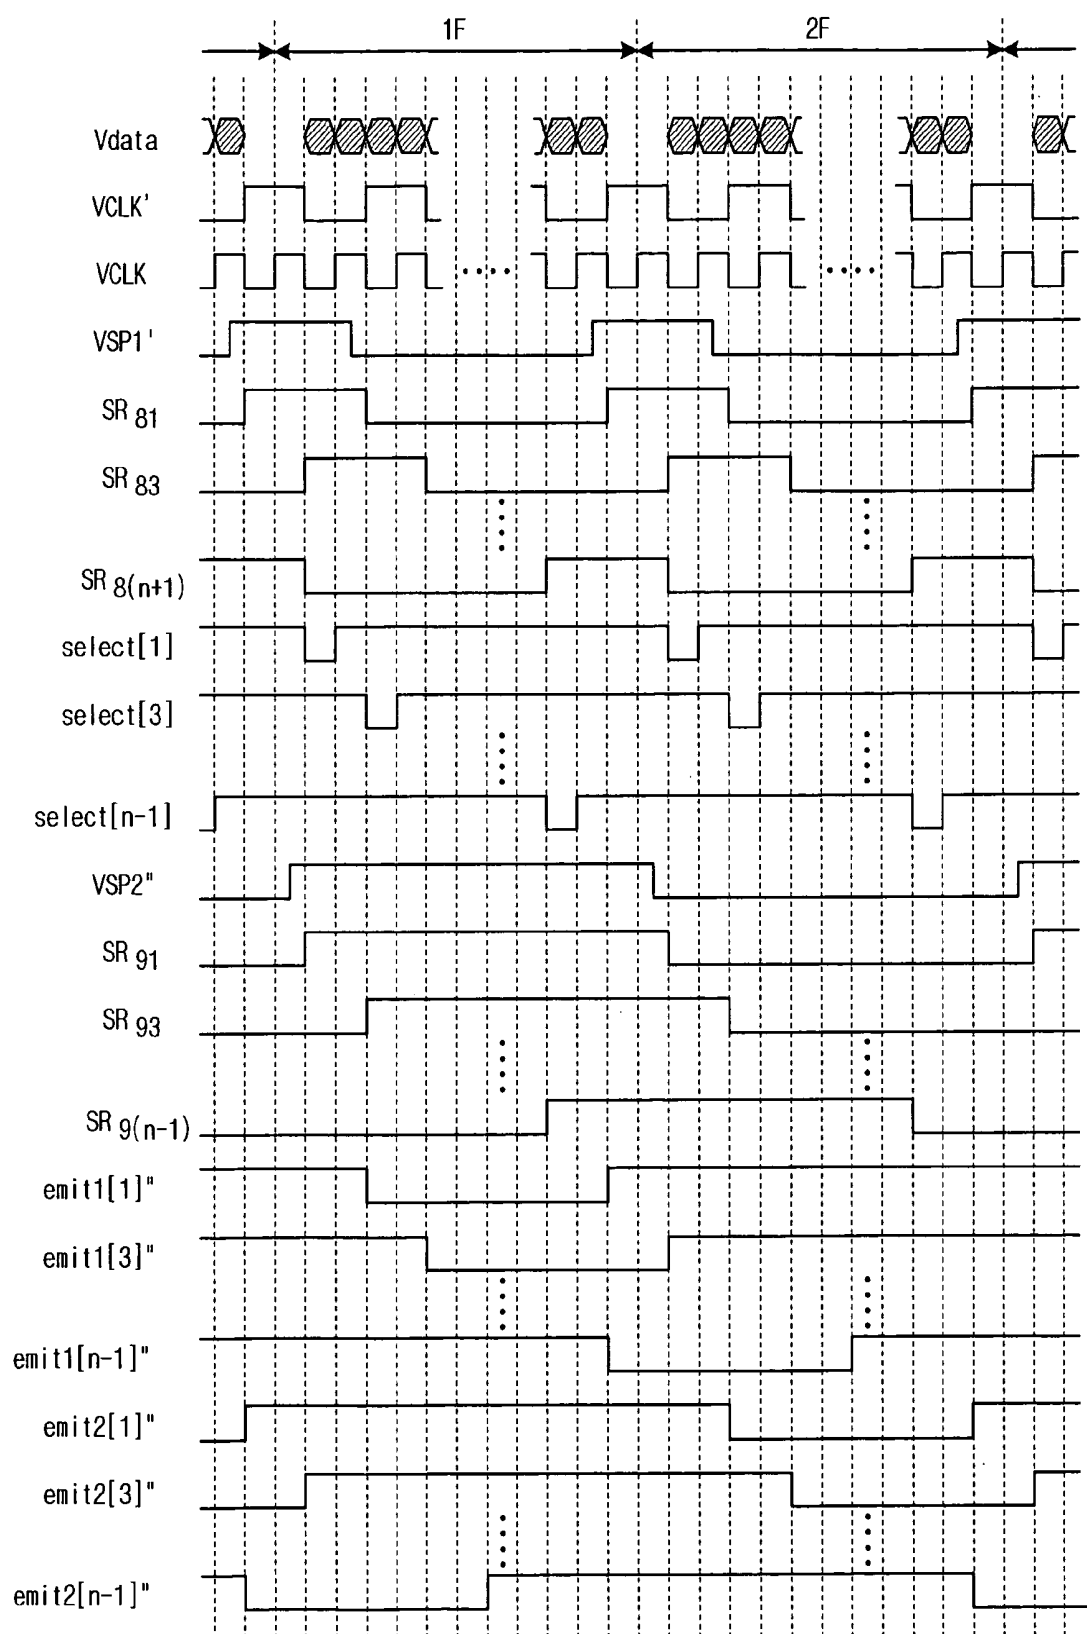

DISPLAY DEVICE AND DRIVING METHOD THEREOF

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to and the benefit of Korean Patent Application No. 10-2005-0000759 filed on Jan. 5, 2005 in the Korean Intellectual Property Office, the entire content of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a display device and a driving method thereof, and more particularly, to an organic light emitting diode (OLED) display device and a driving method thereof.

[0004] 2. Description of the Related Art

[0005] In general, the organic light emitting diode display device is a display device for electrically exciting phosphorous organic matter and emitting light. The organic light emitting diode display device drives organic light emission cells arranged in a matrix format to represent images. An organic light emission cell having a diode characteristic is referred to as an organic light emitting diode (OLED) and has a structure including an anode electrode layer, an organic thin film, and a cathode electrode layer. Holes and electrons injected through the anode electrode and the cathode electrode are combined on the organic thin film, and emit light. The organic light emission cell emits different amounts of light according to injected amounts of electrons and holes, that is, depending on the applied current.

[0006] In a display device such as the organic light emitting diode display device, a pixel includes a plurality of sub-pixels each of which has one of a plurality of colors (e.g., primary colors of light), and colors are represented through combinations of the colors emitted by the sub-pixels. In general, a pixel includes a sub-pixel for displaying red (R), a sub-pixel for displaying green (G), and a sub-pixel for displaying blue (B), and the colors are displayed by combinations of red, green, and blue (RGB) colors. Generally, the sub-pixels are arranged in an order of R, G, and B along a row direction.

[0007] Each sub-pixel in the organic light emitting diode display device includes a driving transistor for driving the organic light emitting diode, a switching transistor, and a capacitor. Also, each sub-pixel has a data line for transmitting (or applying) a data signal, and a power line for transmitting (or applying) a power supply voltage. Therefore, many wires are required for transmitting (or applying) voltages or signals to the transistors and capacitors formed at each pixel. It is difficult to arrange such wires in the pixel, and the aperture ratio corresponding to a light emission area of the pixel is reduced.

SUMMARY OF THE INVENTION

[0008] One exemplary embodiment of the present invention provides a display device for improving an aperture ratio.

[0009] Another exemplary embodiment of the present invention provides a display device for simplifying the arrangement of wires and elements in unit pixels.

[0010] Still another exemplary embodiment of the present invention provides a display device for reducing a number of select scan lines.

[0011] Further, another exemplary embodiment of the present invention provides a scan driver for reducing a number of flip-flops.

[0012] In one aspect of the present invention, a display device including a plurality of unit pixels, a plurality of data lines, a plurality of select scan lines, a plurality of emit scan lines, and a scan driver is provided. A field is divided into a plurality of subfields. The plurality of unit pixels are arranged in rows and display an image during the field. Each of the unit pixels includes a plurality of light emitting elements arranged in a column direction. The plurality of data lines extend in the column direction, and transmit data signals. The plurality of select scan lines extend in a row direction and transmit select signals, and each of the select scan lines is coupled to a corresponding one of the rows of the unit pixels. The plurality of emit scan lines transmit emission control signals, and each of the emit scan lines is coupled to a corresponding one of the rows of the unit pixels. The scan driver applies the select signals to the select scan lines, and applies the emission control signals to the emit scan lines, in each of the plurality of subfields. At least one of the unit pixels uses a corresponding one of the data signals in response to a first signal of a corresponding one of the select signals, and each of the plurality of light emitting elements of the at least one of the unit pixels emits light in response to an emit signal of a corresponding one of the emission control signals in a corresponding one of the subfields.

[0013] In another aspect of the present invention, a display device including a plurality of unit pixels, a plurality of data lines, a plurality of select scan lines, a plurality of emit scan lines, a first scan driver, and a second scan driver is provided. A field is divided into a plurality of subfields. The plurality of unit pixels are arranged in rows and display an image during the field. Each of the unit pixels includes a plurality of light emitting elements arranged in a column direction. The plurality of data lines extend in the column direction and transmit data signals. The plurality of select scan lines extend in a row direction and transmit select signals, and each of the select scan lines is coupled to a corresponding one of the rows of the unit pixels. The plurality of emit scan lines transmit emission control signals, and each of the emit scan lines is coupled to a corresponding one of the rows of the unit pixels. The first scan driver applies the select signals to the select scan lines of a first row group from among the rows of the unit pixels and applies the emission control signals to the emit scan lines of the first row group, in each of the plurality of subfields. The second scan driver applies the select signals to the select scan lines of a second row group from among the rows of the unit pixels and applies the emission control signals to the emit scan lines of the second row group, in each of the plurality of subfields. At least one of the unit pixels uses a corresponding one of the data signals in response to a first signal of a corresponding one of the select signals, and each of the plurality of light emitting elements of the at least one of the unit pixels emits light in response to an emit signal of a corresponding one of the emission control signals in a corresponding one of the subfields.

[0014] In still another aspect of the present invention, a pixel circuit driving method of a display device is provided. The display device includes a plurality of data lines that extend in a first direction and transmitting data signals, a plurality of select scan lines that extend in a second direction and transmitting select signals, and a plurality of unit pixels. Each of the unit pixels includes a plurality of sub-pixels. At least one of the select signals is applied to a corresponding one of the plurality of select scan lines in a first subfield of a field, and at least one of the data signals is applied to at least one of the plurality of data lines. A first emission control signal is applied to at least one of the unit pixels to which a corresponding one of the select signals and a corresponding one of the data signals are applied, so that a first sub-pixel of the plurality of sub-pixels emits light. At least one of the select signals is applied to a corresponding one of the plurality of select scan lines in a second subfield of the field, and at least one of the data signals is applied to at least one of the plurality of data lines. A second emission control signal is applied to at least one of the unit pixels to which a corresponding one of the select signals and a corresponding one of the data signals are applied so that a second sub-pixel of the plurality of sub-pixels emits light, and the first and second sub-pixels are arranged in the first direction.

[0015] In a further aspect of the present invention, a display device including a display area, a first driver, and a second driver is provided. The display area includes a plurality of data lines that extend in a first direction, a plurality of select scan lines that extend in a second direction, and a plurality of unit pixels. Each of the unit pixels includes a plurality of sub-pixels arranged in the first direction. The first driver sequentially transmits select signals to the plurality of select scan lines in each of a plurality of subfields that form a field, and transmits emission control signals to corresponding at least one of the plurality of sub-pixels in each of the plurality of subfields to emit light in the corresponding at least one of the plurality of sub-pixels. The second driver transmits a data signal to at least one of the data lines of the unit pixels coupled to a corresponding one of the select scan lines to which one of the select signals is applied. The first driver generates the emission control signals respectively corresponding to the plurality of subfields using a first shift signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The accompanying drawings illustrate exemplary embodiments of the present invention, and, together with the description, serve to explain the principles of the invention, wherein:

[0017] **FIG. 1** shows a plan view of an organic light emitting diode display device according to a first exemplary embodiment of the present invention;

[0018] **FIG. 2** shows a simplified circuit diagram of unit pixels of the organic light emitting diode display device shown in **FIG. 1**;

[0019] **FIG. 3** shows a signal timing diagram of the organic light emitting display device according to the first exemplary embodiment of the present invention;

[0020] **FIGS. 4 to 6** respectively show simplified circuit diagrams of unit pixels of organic light emitting diode

display devices according to second to fourth exemplary embodiments of the present invention;

[0021] **FIG. 7** shows a signal timing diagram in the unit pixel of **FIG. 6**;

[0022] **FIGS. 8, 11, 13, 15, 17, 19, 21, 23, 24, 26 and 27** respectively show scan drivers in organic light emitting diode display devices according to fifth to fifteenth exemplary embodiments;

[0023] **FIGS. 9, 12, 14, 16, 18, 20, 22, 25, 28** respectively show signal timing diagrams in the scan drivers of **FIGS. 8, 11, 13, 15, 17, 19, 21, 24, 26**;

[0024] **FIG. 10** shows a flip-flop used in a select scan driver of **FIG. 8**;

[0025] **FIG. 29** shows a plan view of an organic light emitting diode display device according to a sixteenth exemplary embodiment of the present invention;

[0026] **FIGS. 30A and 30B** respectively show odd row and even row scan drivers in the organic light emitting diode display device according to the sixteenth exemplary embodiment; and

[0027] **FIG. 31** shows a signal timing diagram of the odd row scan driver of **FIG. 30A**.

DETAILED DESCRIPTION

[0028] In the following detailed description, only certain exemplary embodiments of the present invention are shown and described, simply by way of illustration. As those skilled in the art would realize, the described embodiments may be modified in various different ways, all without departing from the spirit or scope of the present invention.

[0029] Accordingly, the drawings and description are to be regarded as illustrative in nature, and not restrictive. There may be parts shown in the drawings, or parts not shown in the drawings, that are not discussed in the specification as they are not essential to a complete understanding of the invention. Like reference numerals designate like elements. Phrases such as "one thing is coupled to another" can refer to either "a first one is directly coupled to a second one" or "the first one is coupled to the second one with a third one provided therebetween".

[0030] A display device and a driving method thereof according to exemplary embodiments of the present invention will be described in detail with reference to the drawings, and an organic light emitting diode display device using an organic light emitting diode as a light emitting element will be exemplified and described in the exemplary embodiments.

[0031] **FIG. 1** shows a plan view of an organic light emitting diode display device according to a first exemplary embodiment of the present invention.

[0032] As shown in **FIG. 1**, the organic light emitting diode display device includes a display area **100** seen as a screen to a user, a scan driver **200**, and a data driver **300**.

[0033] The display area **100** includes a plurality of data lines D_1 to D_m , a plurality of select scan lines S_1 to S_n , a plurality of emit scan lines Em_{11} to Em_{1n} and Em_{21} to Em_{2n} , and a plurality of unit pixels **110**. Each unit pixel **110** includes two sub-pixels **111** and **112** which are arranged in

a column direction. The data lines D_1 to D_m are extended in a column direction and transmit data signals representing images to the corresponding unit pixels. The select scan lines S_1 to S_n are extended in a row direction and transmit select signals for selecting corresponding lines to the select scan lines S_1 to S_n in order to apply data signals to the unit pixels of the corresponding lines. The emit scan lines Em_{11} to Em_{1n} and Em_{21} to Em_{2n} are extended in a row direction and transmit emission control signals for controlling light emission of the respective sub-pixels **111** or **112** to the corresponding unit pixels **110**. The unit pixel **110** is defined in an area where the select scan lines S_1 to S_n and the data lines D_1 to D_m are crossed. The scan lines S_1 to S_n are coupled to the sub-pixels **111** and **112** in the respective unit pixels **110**.

[0034] One field is divided into two subfields, and the scan driver **200** sequentially transmits select signals to the select scan lines S_1 to S_n in the respective subfields. The scan driver **200** sequentially transmits emission control signals for controlling light emission of the sub-pixels **111** to the emit scan lines Em_{11} to Em_{1n} in one subfield, and sequentially transmits emission control signals for controlling light emission of the sub-pixels **112** to the emit scan lines Em_{21} to Em_{2n} in the other subfield. The data driver **300** applies data signals corresponding to the pixels of lines to which select signals are applied to the data lines D_1 to D_m each time the select signals are sequentially applied. In addition, the data driver **300** applies data signals corresponding to the sub-pixels **111** in the one subfield, and applies data signals corresponding to the sub-pixels **112** in the other subfield.

[0035] The scan driver **200** and the data driver **300** are coupled to a substrate in which the display area **100** is formed. Alternatively, the scan driver **200** and/or the data driver **300** may be installed directly on the substrate, and they may be substituted with a driving circuit which is formed on the same layer on the substrate as the layer on which scan lines, data lines, and transistors are formed. Alternatively, the scan driver **200** and/or the data driver **300** may be installed in a chip format on a tape carrier package (TCP), a flexible printed circuit (FPC), or a tape automatic bonding unit (TAB) coupled to the substrate.

[0036] FIG. 2 shows a simplified circuit diagram of the unit pixels of the organic light emitting diode display device shown in FIG. 1. The three unit pixels **110_{ij}**, **110_{i(j+1)}**, and **110_{i(j+2)}** coupled to the scan line S_i of the i^{th} row (where ' i ' is a positive integer less than or equal to ' n ') and the data lines D_j to D_{j+2} of the j^{th} to $(j+2)^{\text{th}}$ columns (where ' j ' is a positive integer less than or equal to ' $m-2$ ') will be exemplified in FIG. 2. It is assumed that the sub-pixels are arranged in an order of R, G, and B along the row direction, and the same color sub-pixels are arranged along the column direction in FIG. 2.

[0037] As shown in FIG. 2, the two sub-pixels **111** and **112** of the one unit pixel **110** are coupled to one of the select scan lines S_1 to S_n in common and have a pixel driver **115** in common, and the pixel driver **115** includes a driving transistor M1, a switching transistor M2, and a capacitor C1.

[0038] In more detail, the unit pixel **110_{ij}** coupled to the i^{th} select scan line S_i and the j^{th} data line D_j includes the pixel driver **115**, a switching unit, and two organic light emitting diodes $OLED_{R1}$ and $OLED_{R2}$ that emit red light. The switching unit includes two emission control transistors

M3a and **M3b** to selectively transmit a driving current from the pixel driver **115** to the two organic light emitting diodes $OLED_{R1}$ and $OLED_{R2}$. In addition, the sub-pixels **111_{ij}** and **112_{ij}** respectively include the two organic light emitting diodes $OLED_{R1}$ and $OLED_{R2}$ in the unit pixel **110_{ij}**.

[0039] The unit pixel **110_{i(j+1)}** coupled to the i^{th} select scan line S_i and the $(j+1)^{\text{th}}$ data line D_{j+1} , and the unit pixel **110_{i(j+2)}** coupled to the i^{th} select scan line S_i and the $(j+2)^{\text{th}}$ data line D_{j+2} have the same structures as the unit pixel **110_{ij}**. In addition, the sub-pixels **111_{i(j+1)}** and **112_{i(j+1)}** respectively include two organic light emitting diodes $OLED_{G1}$ and $OLED_{G2}$ that emit green light in the unit pixel **110_{i(j+1)}**, and the sub-pixels **111_{i(j+2)}** and **112_{i(j+2)}** respectively include two organic light emitting diodes $OLED_{B1}$ and $OLED_{B2}$ that emit blue light in the unit pixel **110_{i(j+2)}**.

[0040] In the unit pixel **110_{ij}**, the driving transistor M1 has a source coupled to a power line for supplying a power supply voltage VDD, and a gate coupled to a drain of the switching transistor M2. The capacitor C1 is coupled between the source and the gate of the driving transistor M1. The switching transistor M2 having a gate coupled to the select scan line S_i and a source coupled to the data line D_j , transmits (or applies) the data signal converted to analog voltage (hereinafter, "data voltage") provided by the data line D_j in response to the select signal provided by the select scan line S_i . The driving transistor M1 has a drain coupled to sources of the emission control transistors **M3a** and **M3b**, and gates of the emission control transistors **M3a** and **M3b** are coupled to the emit scan lines Em_{1i} and Em_{2i} , respectively. Drains of the emission control transistors **M3a** and **M3b** are coupled, respectively, to anodes of the organic light emitting diodes $OLED_{R1}$ and $OLED_{R2}$, and a power supply voltage VSS is applied to cathodes of the organic light emitting diodes $OLED_{R1}$ and $OLED_{R2}$. The power supply voltage VSS in the first exemplary embodiment is lower than the voltage VDD, and can be a negative voltage or a ground voltage. As shown in FIG. 2, the unit pixels **110_{i(j+1)}** and **110_{i(j+2)}** have the same connecting structure as the unit pixel **110_{ij}**.

[0041] In the unit pixel **110_{ij}**, the one emit scan line Em_{1i} of the emit scan lines Em_{1i} and Em_{2i} is coupled to the gates of the transistors **M3a** respectively coupled to the organic light emitting diodes $OLED_{R1}$, $OLED_{G1}$ and $OLED_{B1}$, and the other emit scan line Em_{2i} is coupled to the gates of the transistors **M3b** respectively coupled to the organic light emitting diodes $OLED_{R2}$, $OLED_{G2}$ and $OLED_{B2}$.

[0042] A low-level emission control signal is applied to the emit scan line Em_{1i} in one subfield of two subfields forming a field, and therefore, the transistor **M3a** is turned on. Then, a current I_{OLED} as expressed in Equation 1 flows from the transistor M1 to the organic light emitting diode so that the organic light emitting diodes $OLED_{R1}$, $OLED_{G1}$ and $OLED_{B1}$ emit light corresponding to the magnitude of the current I_{OLED} . A low-level emission control signal is applied to the emit scan line Em_{2i} in the other subfield, and therefore, the transistor **M3b** is turned on. Then, a current I_{OLED} flows from the transistor M1 to the organic light emitting diode so that the organic light emitting diodes $OLED_{R2}$, $OLED_{G2}$ and $OLED_{B2}$ emit light.

$$I_{OLED} = \frac{\beta}{2} (|V_{SG}| - |V_{TH}|)^2 \quad \text{Equation 1}$$

where β is a constant determined by a channel width and a channel length of the transistor M1, V_{SG} is a voltage between the source and the gate of the transistor M1, and V_{TH} is a threshold voltage of the transistor M1.

[0043] Referring to FIG. 2, an upper line L1 is formed by the organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1}, and a lower line L2 is formed by the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2}. The organic light emitting diodes of the upper line L1 start emitting light in one subfield of the fields, and the organic light emitting diodes of the lower line L2 start emitting light in the other subfield of the fields.

[0044] A driving method of the organic light emitting diode display device according to the first exemplary embodiment of the present invention will be described in detail with reference to FIG. 3. In FIG. 3, the select signal applied to the select scan line S_i is depicted as 'select[i]', and the emission control signals applied to the emit scan lines Em_i and Em_{2i} are depicted as 'emit1[i]' and 'emit2[i]', respectively.

[0045] As shown in FIG. 3, one field includes two subfields 1F and 2F, and low-level select signals are sequentially applied to the select scan lines S₁ to S_n in each subfield 1F or 2F. The two organic light emitting diodes of the unit pixel that share the select scan line emit light during periods corresponding to subfields 1F and 2F, respectively. In FIG. 3, widths of low-level signals (e.g., pulses) of the emission control signals emit1[i] and emit2[i] are the same as periods corresponding to the subfields 1F and 2F, respectively.

[0046] In the first subfield 1F, when a low-level select signal select[1] is applied to the select scan line S₁ on the first row, data voltages corresponding to the organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1} of the unit pixels on the first row are applied to the corresponding data lines D₁-D_m. A low-level emission control signal emit1[1] is applied to the emit scan line Em₁₁ on the first row, and the emission control transistors M3a of the unit pixels on the first row are turned on. Then, currents corresponding to the data voltages are transmitted to the corresponding organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1} from the driving transistors M1 to thus emit light in the upper line L1 on the first row. The light is emitted during the period in which the emission control signal emit1[1] is low-level.

[0047] Next, when a low-level select signal select[2] is applied to the select scan line S₂

[0048] on the second row, data voltages corresponding to the organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1} of the unit pixels on the second row are applied to the corresponding data lines D₁-D_m. A low-level emission control signal emit1[2] is applied to the emit scan line Em₁₂ on the second row, and the emission control transistors M3a of the unit pixels on the second row are turned on. Then, the organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1} on the upper line L1 of the second row emit light in response to the low-level emission control signal emit1[2].

The light is emitted during the period in which the emission control signal emit1[2] is low-level.

[0049] In a like manner, low-level select signals select[1] to select[n] are sequentially applied to the select scan lines S₁ to S_n on the first to nth rows in the first subfield 1F. When the low-level select signal select[i] is applied to the select scan line S_i on the ith row, the data voltages corresponding to the organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1} of the unit pixels on the ith row are applied to the corresponding data line D₁ to D_m, and a low-level emission control signal emit1[i] is applied to the emit scan line Em_{1i} of the ith row. Then, the organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1}, which are formed on the upper line L1 of the ith row, emit light during a period corresponding to the width of the low-level emission control signal emit1[i].

[0050] In the second subfield 2F, a low-level select signal select[1] is applied to the select scan line S₁ on the first row, and data voltages corresponding to the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2} of the unit pixels on the first row are applied to the corresponding data lines D₁-D_m. A low-level emission control signal emit2[1] is applied to the emit scan line Em₂₁ on the first row, and the emission control transistors M3b of the unit pixels on the first row are turned on. Then, the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2} on the lower line L2 of the first row emit light during the period in which the emission control signal emit2[1] is low-level.

[0051] Next, a low-level select signal select[2] is applied to the select scan line S₂ on the second row, and data voltages corresponding to the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2} of the unit pixels on the second row are applied to the corresponding data lines D₁-D_m. A low-level emission control signal emit2[2] is applied to the emit scan line Em₂₂ on the second row, and the emission control transistors M3b of the unit pixels on the second row are turned on. Then, the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2} on the lower line L2 of the second row emit light during the period in which the emission control signal emit2[2] is low-level.

[0052] In a like manner, low-level select signals select[1] to select[n] are sequentially applied to the select scan lines S₁ to S_n on the first to nth rows in the second subfield 2F. When the low-level select signal select[i] is applied to the select scan line S_i on the ith row, the data voltages corresponding to the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2} of the unit pixels on the ith row are applied to the corresponding data line D₁ to D_m, and a low-level emission control signal emit2[i] is applied to the emit scan line Em_{2i} of the ith row. Then, the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2}, which are formed on the lower line L2 of the ith row, emit light in during a period corresponding to the width of the low-level emission control signal emit2[i].

[0053] As described above, one field is divided into the two subfields, and the subfields are sequentially driven in the organic light emitting diode display device driving method according to the first exemplary embodiment. The organic light emitting diodes formed on the upper line L1 of the each row start emitting light in one subfield, and the organic light emitting diodes formed on the lower line L2 of the each row start emitting light in the other subfield. As a result, the

organic light emitting diodes of all sub-pixels formed on 2n lines of n rows can emit light in the one field. In addition, the number of select scan lines and the number of pixel drivers (e.g., the transistors and the capacitors) can be reduced since the two sub-pixels share the select scan line and the pixel driver. As a result, the number of integrated circuits for driving the select scan lines can be reduced, and the elements can be easily arranged in the unit pixel.

[0054] Further, the scan driver and the data driver of the interlace scan method may be applicable to those according to the first exemplary embodiment of the present invention because the lower lines L2 are scanned after the upper lines L1 are scanned in the first exemplary embodiment. In addition, the single scan method is applicable to the organic light emitting diode display device in FIG. 3, but the dual scan method may also be applicable to the organic light emitting diode display device according to the first exemplary embodiment by using two scan drivers. Further, another scan method, in which the select scan signals are selectively applied to the plurality of select scan lines, may also be applicable to the organic light emitting diode display device according to the first exemplary embodiment.

[0055] Referring back to FIGS. 1 and 2, in the first exemplary embodiment, one sub-pixel 111_{ij} (including the organic light emitting diode OLED_{R1}) of the unit pixel 110_{ij} is arranged on the upper side of the select scan line S_i, and the other sub-pixel 112_{ij} (including the organic light emitting diode OLED_{R2}) of the unit pixel 110_{ij} is arranged on the lower side of the select scan line S_i. Alternatively, as shown in FIG. 4, the two sub-pixels 111_{ij} and 112_{ij} may be arranged on the lower side (or the upper side) of the select scan line S_i.

[0056] FIG. 4 shows a simplified circuit diagram of unit pixels 110_{ij}', 110_{i(j+1)'} and 110_{i(j+2)'} of an organic light emitting diode display device according to a second exemplary embodiment of the present invention.

[0057] As shown in FIG. 4, the organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1} are arranged below the pixel driver 115 to form the upper line L1', and the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2} are arranged below the upper line L1' to form the lower line L2'.

[0058] However, when the organic light emitting diodes are arranged as shown in FIG. 4, length of a wire for transmitting current from the pixel driver 115 to the organic light emitting diode OLED_{R2}, OLED_{G2} or OLED_{B2} is longer than length of a wire for transmitting current from the pixel driver 115 to the organic light emitting diode OLED_{R1}, OLED_{G1} or OLED_{B1}. Then, the brightness of the upper line L1' may be different from the brightness of the lower line L2' by parasitic components present in the wire.

[0059] The transistors M1, M2, M3a, and M3b are depicted as PMOS transistors in FIGS. 2 and 4, but another conductive type of transistors may be applicable to the transistors M1, M2, M3a, and M3b.

[0060] In addition, while the two emission control transistors M3a and M3b are respectively controlled by the two emit scan lines Em_{1i} and Em_{2i} in the first and second exemplary embodiments, emission control transistors in other embodiments may be controlled by one emit scan line as shown in FIG. 5.

[0061] FIG. 5 shows a simplified circuit diagram of unit pixels 110_{ij}", 110_{i(j+1)''} and 110_{i(j+2)''} of an organic light emitting diode display device according to a third exemplary embodiment of the present invention.

[0062] As shown in FIG. 5, the unit pixel 110_{ij}" according to the third exemplary embodiment has the same structure as that according to the first exemplary embodiment, except for emission control transistors M3a' and M3b' and an emit scan line Em_i.

[0063] In more detail, an emission control transistor M3a' has the opposite conductive type to an emission control transistor M3b', and the emit scan line Em_i on ith row is coupled to gates of the two emission control transistors M3a' and M3b'. In FIG. 5, the emission control transistors M3a' respectively coupled to the organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1} of the upper line L1 are depicted as PMOS transistors, and the emission control transistors M3b' coupled to the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2} of the lower line L2 are depicted as NMOS transistors. In addition, an emission control signal applied to the emit scan line Em_i has the same signal timing as the emission control signal emit1[i] shown in FIG. 3.

[0064] Then, emission timings of the organic light emitting diodes OLED_{R1}, OLED_{G1} and OLED_{B1} coupled to the transistors M3a', which have the same conductive type as the transistors M3a shown in FIG. 2, are the same as those of the first exemplary embodiment. Referring to FIG. 3, since the emission control signal emit2[i] has an inverted waveform of the emission control signal emit1[i], and the transistor M3b' has the opposite conductive type to the transistor M3b shown in FIG. 2, emission timings of the organic light emitting diodes OLED_{R2}, OLED_{G2} and OLED_{B2} coupled to the transistors M3b' are the same as those of the first exemplary embodiment.

[0065] As a result, the number of the emit scan lines Em_i according to the third exemplary embodiment can be reduced as compared with those according to the first and second exemplary embodiments.

[0066] The two sub-pixels share the select scan line in the first to third exemplary embodiments, but three or more sub-pixels may share the select scan line in other embodiments. Assuming that three sub-pixels (respectively including three organic light emitting diodes) arranged in a column direction share a select scan line, three emission control transistors are coupled to the three organic light emitting diodes, respectively. The three emit scan lines may be respectively coupled to gates of the three emission control transistors, and may respectively transmit (or apply) emission control signals for controlling the three emission control transistors. In addition, one field may be divided into three subfields, and the three emission control transistors may be respectively turned on in the three subfields. Then, one row may be divided into the three lines, and the three lines may emit light in the three subfields, respectively.

[0067] The sub-pixels having the same color are coupled to the pixel driver 115 in the first to third exemplary embodiment, but the sub-pixels having different colors may be coupled to the pixel driver 115. For example, R organic light emitting diode may be coupled to the upper side of the pixel driver 115 in the unit pixel 110_{ij} shown in FIG. 2, and G organic light emitting diode may be coupled to the lower side of the pixel driver 115.

[0068] However, since the R, G, and B organic light emitting diodes generally require different current ranges for representing gray levels, the driving voltages which are respectively transmitted from the driving transistors to the R, G, and B organic light emitting diodes are set to the different ranges. In order to set the different ranges, the ranges of the data voltages which are transmitted through the data lines to the driving transistors may be set to be different in R, G, and B sub-pixels, or the sizes of the driving transistors may be set to be different in the R, G, and B sub-pixels. However, if the colors represented in the sub-pixels sharing the pixel driver are different, the data voltages corresponding to the sub-pixels having the different colors are respectively transmitted to the data line in the respective subfields. Then, the data voltage of the data driver is difficult to be optimized because the data voltage range of the data driver is not optimized to the sub-pixels having the same color and is optimized to or made suitable for the sub-pixels having different colors.

[0069] On the other hand, when the sub-pixels sharing the pixel driver have the same color as shown in FIGS. 2, 4, and 5, each output of the data driver can be optimized to the data voltage corresponding to each color. Accordingly, the data voltage transmitted to the one data line can be set to the voltage range corresponding to the one color, and the desired brightness can be represented in the respective sub-pixels. As a result, a white balance can be realized in the display area.

[0070] In addition, the pixel driver using the switching and driving transistors and the capacitor is described in the first to third exemplary embodiments, but the plurality of sub-pixels may share a pixel driver which uses at least one transistor and/or at least one capacitor in addition to the switching and driving transistors to compensate variation of the threshold voltage of the driving transistor or the voltage drop. That is, since the driving current outputted from the pixel driver generally depends on the threshold voltage of the driving transistor in the unit pixel shown in FIG. 2, the driving currents may be different if the threshold voltages of the driving transistors are different. Then, the brightness between the unit pixels may be different. A unit pixel which can compensate for a variation of the threshold voltage of the driving transistor will be described with reference to FIG. 6.

[0071] FIG. 6 shows a simplified circuit diagram of a unit pixel of an organic light emitting diode display device according to a fourth exemplary embodiment of the present invention. The unit pixel coupled to the scan line S_i of the i^{th} row and the data line D_j will be exemplified in FIG. 6. When referring to the select scan lines, a scan line for transmitting a current select signal will be referred to as a "current select scan line" and a scan line which has transmitted a select signal before the current select signal is transmitted will be referred to as a "previous select scan line."

[0072] As shown in FIG. 6, a pixel driver 115' of the unit pixel according to the fourth exemplary embodiment further includes a threshold voltage compensator for compensating a threshold voltage of a driving transistor. Hence, the unit pixel of FIG. 6 is different from the unit pixel according to the first exemplary embodiment. The threshold voltage compensator includes two transistors M14 and M15, and a capacitor C12.

[0073] In more detail, transistors M11, M12, M13a, and M13b correspond to the transistors M1, M2, M3a, and M3b shown in FIG. 2, respectively, and capacitors C11 and C12 correspond to the capacitor C1 shown in FIG. 2. A first electrode of the capacitor C11 is coupled to a power supply voltage VDD, and a second electrode of the capacitor C11 is coupled to a first electrode of the capacitor C12. A second electrode of the capacitor C12 is coupled to a gate electrode of the driving transistor M11, and the switching transistor M12 is coupled to the first electrode of the capacitor C12. The transistor M14 is coupled between gate and drain electrodes of the transistor M11, and diode-connects the transistor M11 in response to the select signal of the previous select scan line S_{i-1} . The transistor M15 is coupled between the power supply voltage VDD and the first electrode of the capacitor C12, and couples the first electrode of the capacitor C12 to the power supply voltage VDD in response to the select signal of the previous select scan line S_{i-1} .

[0074] An operation of the unit pixel 115' shown in FIG. 6 will be described with reference to FIG. 7. In reference to FIG. 7, a first subfield in which the organic light emitting diodes formed on the upper line L1 are emitted by turn-on of the transistors M13a will be described only. Therefore, the emission control signal, which is applied to the emit scan line Em_{2i} and is high-level in the first subfield, is not shown in FIG. 7.

[0075] Referring to FIG. 7, the transistors M14 and M15 are turned on during a period in which the select signal select[i-1] of the previous select scan line S_{i-1} , is low-level, and the emission control signal emit1[i] of the emit scan line Em_{1i} is high-level. Then, the transistor M14 is diode-connected while the transistor M13a and M13b are turned off, and a voltage between the gate and source-electrodes of the transistor M11 becomes the threshold voltage V_{th} of the transistor M11. In addition, since the capacitor C12 is coupled between the gate and source electrodes of the transistor M11, a voltage at the gate electrode of the transistor M11, i.e., the second electrode of the capacitor C12, becomes "VDD+ V_{th} " voltage.

[0076] Next, the transistor M12 is turned on and the transistors M14 and M15 are turned off during a period in which the select signal select[i] of the current select scan line S_i is low-level, and the emit control signal emit1[i] is high-level. Then, since the data voltage Vdata is applied to the first electrode of the capacitor C12 through the switching transistor M12, a voltage at the second electrode of the capacitor C12 is changed by the variation "Vdata-VDD" of the voltage at the first electrode of the capacitor C12. That is, the voltage at the second electrode of the capacitor C12 becomes "Vdata+ V_{th} " voltage, and therefore, the voltage between the gate and source electrodes of the transistor M11 becomes "Vdata+ V_{th} -VDD" voltage. In addition, the "Vdata+ V_{th} -VDD" voltage is stored in the capacitors C11 and C12.

[0077] Next, when the emission control signal becomes low-level, a current I_{OLED} expressed in Equation 2 flows from the transistor M11 to the organic light emitting diode $OLED_{R1}$, and then, the organic light emitting diode $OLED_{R1}$ emits light.

$$I_{OLED} = \frac{\beta}{2}(V_{DD} - V_{data})^2 \quad \text{Equation 2}$$

[0078] In addition, a unit pixel which can compensate the threshold voltage of the driving transistor by adding at least one transistor and/or at least one capacitor to the unit pixel of FIG. 2 may be used instead of the unit pixel shown in FIG. 6.

[0079] Further, the low-level period of the emission control signal may be set differently from the period shown in FIG. 3. For example, when the brightness is high, the low-level period of the emission control signal may be set to be shorter than a period corresponding to the subfield. That is, the rising edge of the emission control signal may be set to be later than the rising edge of the select signal, and/or the falling edge of the emission control signal may be set to be faster (or earlier) than the rising edge of the select signal in the next subfield.

[0080] The organic light emitting diode display device using the voltage programming method is described in the first to fourth exemplary embodiments, but the above-described exemplary embodiments can be applicable to the organic light emitting diode display device using the current programming method.

[0081] Next, scan drivers (e.g., the scan driver 200 of FIG. 1) of organic light emitting diode display devices according to exemplary embodiments of the present invention will be described with reference to FIGS. 8 to 25.

[0082] FIG. 8 shows a scan driver 200a in an organic light emitting diode display device according to a fifth exemplary embodiment, FIG. 9 shows a signal timing diagram in the scan driver 200a of FIG. 8, and FIG. 10 shows a flip-flop used in the select scan driver 200a of FIG. 8. An inverted signal of a clock VCLK is depicted as /VCLK in FIG. 8, and is not shown in FIG. 9.

[0083] As shown in FIG. 8, the scan driver 200a includes two shift registers 210a and 220a. The shift register 210a includes (n+1) flip-flops FF_{1,2} to FF_{1(n+1)} and n NAND gates NAND_{1,1} to NAND_{1,n}, and the shift register 220a includes n flip-flops FF_{2,1} to FF_{2,n} and n inverters INV_{2,1} to INV_{2,n}.

[0084] In the shift register 210a, a start signal VSP1 is inputted to the first flip-flop FF_{1,1}, and an output signal SR_{1,i} of the ith flip-flop FF_{1,i} is inputted to the (i+1)th flip-flop FF_{1(i+1)}. The ith NAND gate NAND_{1,i} performs a NAND operation to the output signals SR_{1,i} and SR_{1(i+1)} of the two adjacent flip-flops FF_{1,i} and FF_{1(i+1)} and outputs a select signal select[i].

[0085] In the shift register 220a, a start signal VSP2 is inputted to the first flip-flop FF_{2,1}, and an output signal of the ith flip-flop FF_{2,i} is inputted to the (i+1)th flip-flop FF_{2(i+1)}. In addition, the output signal of the ith flip-flop FF_{2,i} is the emission control signal emit2[i], and the inverter INV_{2,i} inverts the output signal of the ith flip-flop FF_{2,i} to output the emission control signal emit1[i].

[0086] The flip-flops FF_{1,i} and FF_{2,i} output input signals (in) in response to a high-level clock (clk), and latch and output the input signals (in) of the high-level period of the

clock (clk) in response to a low-level clock (clk). That is, the flip-flops FF_{1,i} and FF_{2,i} output the input signals (in) of the high-level period of the inner clock (clk) during one clock VCLK cycle.

[0087] Referring to FIG. 8, the clock /VCLK or VCLK inverted to the clock VCLK or /VCLK, which are used in the flip-flop FF_{1,i}, are used in the flip-flops FF_{1(i+1)} adjacent to the flip-flop FF_{1,i}. In more detail, the flip-flops FF_{1,i} that are located at odd-numbered positions in a longitudinal direction use the clocks VCLK as inner clocks (clk). The flip-flops FF_{1,i} that are located at even-numbered positions in the longitudinal direction use the inverted clocks /VCLK as inner clocks (clk). Since the output signal SR_{1,i} of the flip-flop FF_{1,i} is inputted to the flip-flop FF_{1(i+1)}, the output signal SR_{1(i+1)} of the flip-flop FF_{1(i+1)} is shifted from the output signal SR_{1,i} of the flip-flop FF_{1,i} by a half clock VCLK cycle.

[0088] As shown in FIG. 9, the start signal VSP1 has a high-level signal (e.g., high-level pulse) in the high-level period of the one clock VCLK cycle in each of the subfields 1F and 2F, and the flip-flop FF_{1,1} outputs the high-level signal during one clock VCLK cycle in each of the subfields 1F and 2F. As a result, the flip-flops FF_{1,1} to FF_{1(n+1)} may sequentially output each output signal SR_{1,i} by shifting the high-level signal by the half clock VCLK cycle.

[0089] The NAND gate NAND_{1,i} performs a NAND operation of the output signals SR_{1,i} and SR_{1(i+1)} of the flip-flops FF_{1,i} and FF_{1(i+1)}, and outputs a low-level signal (e.g., low-level pulse) when both output signals SR_{1,i} and SR_{1(i+1)} are high-level. Here, since the output signal SR_{1(i+1)} of the flip-flop FF_{1(i+1)} is shifted from the output signal SR_{1,i} of the flip-flop FF_{1,i} by the half clock VCLK cycle, the output signal select[i] of the NAND gate NAND_{1,i} has a low-level signal during a period in which the both output signals SR_{1,i} and SR_{1(i+1)} have the high-level signal in common in each of the subfields 1F and 2F. In addition, the output signal select[i+1] of the NAND gate NAND_{1(i+1)} is shifted from the output signal select[i] of the NAND gate NAND_{1,i} by half the clock VCLK cycle. Therefore, the shift register 210a may sequentially output each select signal select[i] by shifting the low-level signal by the half clock VCLK cycle.

[0090] The flip-flop FF_{2,i} of the shift register 220a has the same structure as the flip-flop FF_{1,i} of the shift register 210a except for the clocks VCLK and /VCLK. That is, the flip-flops FF_{2,i} that are located at odd-numbered positions in the longitudinal direction use the inverted clocks /VCLK as inner clocks (clk), and the flip-flops FF_{2,i} that are located at the even-numbered positions use the clocks VCLK as inner clocks (clk). Therefore, the emission control signal emit1[i+1] which is the output signal of the flip-flop FF_{2(i+1)} is shifted from the emission control signal emit1[i], which is the output signal of the flip-flop FF_{2,i}, by the half clock VCLK cycle.

[0091] In addition, the start signal VSP2 is high-level in the low-level period of all clock VCLK cycles in the subfield 1F and is low-level in the low-level period of all clock VCLK cycles in the subfield 2F. As a result, the emission control signal emit2[1] becomes high-level when the select signal select[1] becomes low-level in the first subfield 1F, and becomes low-level when the select signal select[1] becomes low-level in the second subfield 2F. Therefore, the shift register 220a can sequentially output each emission

control signal emit2[i], which becomes low-level together with the select signal select[i] in the second subfield 2F, by shifting the half clock VCLK cycle.

[0092] Since the output signal emit1[i] of the inverter INV_{2i} has an inverted waveform of the emission control signal emit2[i], the shift register 220a can sequentially output each emission control signal emit1[i], which becomes low-level together with the select signal select[i] in the first subfield 1F, by shifting the half clock VCLK cycle.

[0093] Since the flip-flops FF_{1i} and the flip-flops FF_{2i} have the same structure, a flip-flop of FIG. 10 can be used to represent both the flip-flops FF_{1i} and the flip-flops FF_{2i}. Referring to FIG. 10, the flip-flop (e.g., FF_{1i}) includes a clocked inverter 211, and a latch including an inverter 212 and a clocked inverter 213. The clocked inverter 211 inverts an input signal (in) when the clock (clk) is high-level, and the inverter 212 inverts the output signal (/out) of the clocked inverter 211. When the clock (clk) is low-level, the output of the clocked inverter 211 is blocked, the output signal of the inverter 212 is inputted to the clocked inverter 213, and the output signal (/out) of the clocked inverter 213 is inputted to the inverter 212. As a result, the latch is formed. At this time, the output signal (out) of the inverter 212 is the output signal of the flip-flop, and the input signal (/out) of the inverter 212 is the inverted signal to the output signal (out). Therefore, the flip-flop can output the input signal (in) when the clock (clk) is high-level, and latch and output the input signal (in) in the high-level period of the clock (clk) when the clock (clk) is low-level.

[0094] As shown in FIG. 10, the signal (/out) inverted to the output signal (out) is outputted from the flip-flop (e.g., FF_{2i}) of the shift register 220a. Therefore, the inverted output signal (/out) of the flip-flop of FIG. 10 may be used as the emission control signal emit1[i] of the first subfield 1F, and the inverter INV_{2i} can be eliminated in the shift register 220a. In addition, the signal having the high-level signal in the first subfield 1F is used as the start signal VSP2 in FIGS. 8 and 9, but a signal inverted to the start signal VSP2 may be used as the start signal of the shift register 220a. Then, the output signal of the flip-flop becomes the emission control signal emit1[i] of the first subfield 1F, and the output signal of the inverter INV_{2i} becomes the emission control signal emit2[i] of the second subfield 2F.

[0095] As described above, the emission control signal emit1[i] or emit2[i] is low-level when the select signal select[i] is low-level in the scan driver 200a. This signal timing can be applicable to the organic light emitting diode display device using the voltage programming method in which the data voltage is transmitted to the data line to be stored in the capacitor. However, in the organic light emitting diode display device using the current programming method, the current from the driving transistor needs to be blocked from the organic light emitting diodes when the data current are programmed to the pixel driver. That is, emission control signals emit1[i] and emit2[i] should be high-level when the select signal select[i] is low-level. In addition, this signal timing may be applicable to the organic light emitting diode display device using the voltage programming method. These exemplary embodiments will be described with reference to FIGS. 11 and 12.

[0096] FIG. 11 shows a scan driver 200b in an organic light emitting diode display device according to a sixth

exemplary embodiment, and FIG. 12 shows a signal timing diagram in the scan driver 200b of FIG. 11. The scan driver 200b of FIGS. 11 and 12 use the same clock VCLK as the scan driver 200a shown in FIGS. 8 and 9.

[0097] As shown in FIG. 11, the scan driver 200b includes the shift register 210a for outputting the select signal select[i] and a shift register 220b for outputting the emission control signals emit1[i] and emit2[i]. The shift register 220b includes (n+1) flip-flops FF_{3i} to FF_{3(n+1)}, n NAND gates NAND_{3i} to NAND_{3n}, and n OR gates OR_{3i} to OR_{3n}. Here, a NAND gate and an inverter may be used instead of the OR gate OR_{3i}.

[0098] The clock VCLK is inputted to the flip-flops FF_{3i}, and the NAND gate NAND_{3i} performs a NAND operation between the output signals SR_{3i} and SR_{3(i+1)} of the flip-flops FF_{3i} and FF_{3(i+1)} to output the emission control signal emit1[i]. The OR gate OR_{3i} performs an OR operation between the output signals SR_{3i} and SR_{3(i+1)} of the flip-flops FF_{3i} and FF_{3(i+1)} to output the emission control signal emit2[i].

[0099] As shown in FIG. 12, the start signal VSP2 shown in FIG. 9 is inputted to the flip-flop FF_{3i}. Therefore, the output signal SR_{3i} of the flip-flop FF_{3i} becomes high-level when the select signal select[i] becomes low-level in the first subfield 1F, and becomes low-level when the select signal select[i] becomes low-level in the second subfield 2F. Since the NAND gate NAND_{3i} outputs the low-level signal while both the output signal SR_{3i} and SR_{3(i+1)} of the flip-flops FF_{3i} and FF_{3(i+1)} are high-level, the emission control signal emit1[i] becomes low-level when the select signal select[i] becomes high-level in the first subfield 1F. In addition, since the OR gate OR_{3i} outputs the high-level signal while both the output signal SR_{3i} and SR_{3(i+1)} of the flip-flops FF_{3i} and FF_{3(i+1)} are low-level, the emission control signal emit2[i] becomes low-level when the select signal select[i] becomes high-level in the second subfield 2F.

[0100] As described above, the emission control signals emit1[i] and emit2[i] are high-level in the sixth exemplary embodiment when the select signal select[i] has the low-level signal. In addition, emission control signals emit1[i] and emit2[i] may be high-level when the previous and current select signals select[i-1] and select[i] have the low-level signals. This exemplary embodiment will be described with reference to FIGS. 13 and 14.

[0101] FIG. 13 shows a scan driver 200c in an organic light emitting diode display device according to a seventh exemplary embodiment, and FIG. 14 shows a signal timing diagram of the scan driver 200c shown in FIG. 13. The scan driver 200c of FIGS. 13 and 14 use the same clock VCLK as the scan driver 200a shown in FIGS. 8 and 9.

[0102] As shown in FIG. 13, the scan driver 200c includes the shift register 210a for outputting the select signal select[i] and a shift register 220c for outputting the emission control signals emit1[i] and emit2[i]. The shift register 220c includes n flip-flops FF_{4i} to FF_{4n}, n inverters INV_{4i} to INV_{4n}, and 2n NOR gates NOR_{1i} to NOR_{1n}, and NOR_{4i} to NOR_{4n}.

[0103] The flip-flops FF_{4i} to FF_{4n} and the inverters INV_{4i} to INV_{4n} have the same structure as the flip-flops FF_{2i} to FF_{2n} and the inverters INV_{2i} to INV_{2n} of FIG. 8 except for the clocks VCLK and /VCLK. That is, the flip-flop FF_{4i} uses

the clock VCLK or /VCLK inverted to the clock /VCLK or VCLK of the flip-flop FF_{2i} shown in FIG. 8. The NOR gate NOR_{1i} performs a NOR operation between the output signal SR_{1i} of the flip-flop FF_{1i} and the inverted output signal /SR_{4i} of the flip-flop FF_{4i} to output the emission control signal emit1[i]" in the first subfield 1F. The NOR gate NOR_{4i} performs a NOR operation between the output signals SR_{1i} and SR_{4i} of the flip-flops FF_{1i} and FF_{4i} to output the emission control signal emit2[i]" in the second subfield 2F.

[0104] As shown in FIG. 14, a start signal VSP2" is high-level in the high-level period of the clock VCLK in the first subfield 1F and is low-level in the high-level period of the clock VCLK in the second subfield 2F. As a result, the output signal SR_{4i} of the flip-flop FF_{4i} has the high-level signal during a period corresponding to the first subfield 1F and has the low-level signal during a period corresponding to the second subfield 2F. Therefore, the output signal SR_{4i} of the flip-flop FF_{4i} becomes high-level when the output signal SR_{1i} of the flip-flop FF_{1i} becomes high-level in the first subfield 1F, and becomes low-level when the output signal SR_{1i} of the flip-flop FF_{1i} becomes high-level in the second subfield 2F.

[0105] Since the NOR gate NOR_{1i} outputs the low-level signal while both the output signal SR_{1i} of the flip-flop FF_{1i} and the inverted output signal /SR_{4i} of the flip-flop FF_{4i} are low-level, the output signal emit1[i]" of the NOR gate NOR_{1i} becomes low-level together with the output signal SR_{1i} in the first subfield 1F and becomes high-level together with the output signal SR_{1i} in the second subfield 2F. Since the NOR gate NOR_{4i} outputs the low-level signal while both the output signals SR_{1i} and SR_{4i} of the flip-flops FF_{1i} and FF_{4i} are low-level, the output signal emit2[i]" of the NOR gate NOR_{4i} becomes low-level together with the output signal SR_{1i} in the second subfield 2F and becomes high-level together with the output signal SR_{4i} in the first subfield 1F. Therefore, the emission control signals emit1[i]" and emit2[i]" are high-level when the previous and current select signals select[i-1] and select[i] have the low-level signals.

[0106] In addition, the emission control signals emit1[i]" and emit2[i]" shown in FIG. 14 may be generated from the scan driver shown in FIG. 11. This exemplary embodiment will be described with reference to FIGS. 15 and 16.

[0107] FIG. 15 shows a scan driver 200d in an organic light emitting diode display device according to an eight exemplary embodiment, and FIG. 16 shows a signal timing diagram of the scan driver 200d shown in FIG. 15.

[0108] As shown in FIG. 15, the scan driver 200d includes the shift register 210a for outputting the select signal select[i] and a shift register 220d for outputting the emission control signals emit1[i]" and emit2[i]". The shift register 220d further includes a flip-flop FF₃₀ before the flip-flop FF₃₁, which is different from the shift register 220b of FIG. 11, and a start signal VSP2" is inputted to the flip-flop FF₃₀. The flip-flop FF₃₀ receives the clock VCLK as the inner clock (clk).

[0109] In the shift register 220d, the ith NAND gate NAND_{3i} performs a NAND operation between the output signals SR_{3(i-1)}} and SR_{3(i+1)}} of the (i-1)th and (i+1)th flip-flops FF_{3(i-1)}} and FF_{3(i+1)}} to output the emission control signal emit1[i]". The ith OR gate OR_{3i} performs an OR operation between the output signals SR_{3(i-1)}} and SR_{3(i+1)}} of

the (i-1)th and (i+1)th flip-flops FF_{3(i-1)}} and FF_{3(i+1)}} to output the emission control signal emit2[i]".

[0110] Referring to FIG. 16, the start signal VSP2" is high-level when the clock VCLK is high-level in the first subfield 1F, and is low-level when the clock VCLK is high-level in the second subfield 2F. Then, the output signal SR_{3i} of the flip-flop FF_{3i} is same as that SR_{3i} shown in FIG. 12. Therefore, the emission control signals emit1[i]" and emit2[i]" are high-level when the previous and current select signal select[i-1] and select[i] have the low-level signals.

[0111] As described above, the select signals and the emission control signals are generated from the two shift registers each including the plurality of flip-flops. Next, exemplary embodiment which may reduce the number of the flip-flops compared to these exemplary embodiments, will be described.

[0112] FIG. 17 shows a scan driver 200e in an organic light emitting diode display device according to a ninth exemplary embodiment, and FIG. 18 shows a signal timing diagram of the scan driver 200e shown in FIG. 17. A clock VCLK' used in the scan driver 200e of FIGS. 17 and 18 has twice the period of the clock VCLK of FIGS. 8 to 16, and the inverted clock /VCLK' is not shown in FIG. 18.

[0113] As shown in FIG. 17, the scan driver 200e includes a shift register 210e for outputting the select signal select[i] and a shift register 220e for outputting the emission control signals emit1[i]" and emit2[i]". The shift register 210e includes ((n/2)+1) flip-flops FF₅₁ to FF_{5(n/2+1)}}, n NAND gates NAND₅₁ to NAND_{5(n/2)}}, and NAND₆₁ to NAND_{6(n/2)}}, and the shift register 220e includes (n/2) flip-flops FF₆₁ to FF_{6(n/2)}}, and n OR gates OR₅₁ to OR_{5(n/2)}}, and OR₆₁ to OR_{6(n/2)}} (where 'n' is assumed to an even number).

[0114] The clocks VCLK' and /VCLK' of the flip-flop FF_{5(j+1)}} are inverted to the clocks /VCLK' and VCLK' of the adjacent flip-flops FF_{5j} in the shift register 210e (where 'j' is a positive integer less than or equal to 'n/2'), and the clock VCLK' is inputted to the flip-flop FF₅₁ as the inner clock (clk). As shown in FIG. 18, since the start signal VSP1' has the high-level signal in the high-level period of the one clock VCLK cycle in each of the subfields 1F and 2F, the flip-flops FF₅₁ to FF_{5(n/2+1)}} may sequentially output each output signal SR_{5i} by shifting the high-level signal by the half clock VCLK' cycle. Here, the output signal SR_{5i} has the high-level signal during one clock VCLK' cycle in each of the subfields 1F and 2F.

[0115] The jth NAND gate NAND_{5j} performs a NAND operation of the output signals SR_{5j} and SR_{5(j+1)}} of the flip-flops FF_{5j} and FF_{5(j+1)}}, and the inverted clock /VCLK' to output the (2j-1)th select signal select[2j-1]. Therefore, the select signal select[2j-1] has the low-level signal during a low-level period of the clock VCLK of a period in which the both output signals SR_{5j} and SR_{5(j+1)}} are high-level. The jth NAND gate NAND_{6j} performs the NAND operation of the output signals SR_{5j} and SR_{5(j+1)}} of the flip-flops FF_{5j} and FF_{5(j+1)}}, and the clock VCLK to output the (2j)th select signal select[2j]. Therefore, the select signal select[2j] has the low-level signal during a high-level period of the clock VCLK of the period in which the both output signals SR_{5j} and SR_{5(j+1)}} are high-level.

[0116] The clocks VCLK' and /VCLK' of the flip-flop FF_{6(j+1)}} are inverted to the clocks /VCLK' and VCLK' of the

adjacent flip-flops FF_{6i} in the shift register **212e**, and the inverted clock /VCLK' is inputted to the flip-flop FF_{6i} as the inner clock (clk). As shown in **FIG. 18**, since the start signal VSP2" has the high-level signal in the first subfield 1F, the flip-flops FF_{6i} to $FF_{6(n/2)}$ may sequentially output each output signal SR_{6i} by shifting the high-level signal by the half clock VCLK' cycle. Here, the output signal SR_{6i} has the high-level signal during a period corresponding to the first subfield 1F.

[0117] The j^{th} OR gate OR_{5j} performs an OR operation of the output signal SR_{5j} of the flip-flop FF_{5j} and the inverted output signal / SR_{6j} of the flip-flop FF_{6j} to output the $(2j-1)^{th}$ and $(2j)^{th}$ emission control signals $emit1[2j-1]'$ and $emit1[2j]'$ (shown as $emit1[2j-1, 2j]$ in **FIG. 17**) in the first subfield 1F. Therefore, the emission control signals $emit1[2j-1]'$ and $emit1[2j]'$ have the low-level signal during a period in which the both output signal SR_{5j} of the flip-flop FF_{5j} and inverted output signal / SR_{6j} of the flip-flop FF_{6j} are low-level. The j^{th} OR gate OR_{6j} performs the OR operation of the output signal SR_{5j} of the flip-flop FF_{5j} and the output signal SR_{6j} of the flip-flop FF_{6j} to output the $(2j-1)^{th}$ and $(2j)^{th}$ emission control signals $emit2[2j-1]'$ and $emit2[2j]'$ (shown as $emit2[2j-1, 2j]$ in **FIG. 17**) in the second subfield 2F. Therefore, the emission control signals $emit2[2j-1]'$ and $emit2[2j]'$ have the low-level signal during a period in which the both output signals SR_{5j} and SR_{6j} of the flip-flops FF_{5j} and FF_{6j} are low-level.

[0118] As a result, as shown in **FIG. 18**, the emission control signals $emit1[2j-1]'$ and $emit2[2j-1]'$ are high-level when the previous and current select signals $select[2j-2]$ and $select[2j-1]$ have the low-level signals, and the emission control signals $emit1[2j]'$ and $emit2[2j]'$ are high-level when the previous and current select signals $select[2j-1]$ and $select[2j]$ have the low-level signal.

[0119] Next, exemplary embodiments which use one shift register to output the select signals and the emission control signals will be described with reference to **FIGS. 19 to 26**.

[0120] First, a scan driver **200f** for outputting the emission control signals $emit1[i]'$ and $emit2[i]'$ shown in **FIG. 9** will be described with reference to **FIGS. 19 and 20**.

[0121] **FIG. 19** shows the scan driver **200f** in an organic light emitting diode display device according to a tenth exemplary embodiment, and **FIG. 20** shows a signal timing diagram of the scan driver **200f** shown in **FIG. 19**.

[0122] As shown in **FIG. 19**, the scan driver **200f** includes $(n+1)$ flip-flops FF_{71} to $FF_{7(n+1)}$, n XNOR gates $XNOR_{71}$ to $XNOR_{7n}$, and n inverters INV_{71} to INV_{7n} , and operates as a shift register. The flip-flops FF_{71} to $FF_{7(n+1)}$ and the n inverters INV_{71} to INV_{7n} have the same structure as the flip-flops FF_{11} to $FF_{1(n+1)}$ and the n inverters INV_{21} to INV_{2n} shown in **FIG. 8**. In addition, the flip-flops FF_{71} to $FF_{7(n+1)}$ use the clock VCLK and the start signal VSP2 shown in **FIG. 9**.

[0123] Therefore, an output signal SR_{7i} of the flip-flop FF_{7i} is same as the emission control signal $emit1[i]'$ of the first subfield 1F, and the output signal of the inverter INV_{7i} is same as the emission control signal $emit2[i]'$ of the second subfield 2F. In addition, the inverted output signal (/out) of the flip-flop FF_{7i} may be used as the emission control signal $emit2[i]'$ instead of the output signal of the inverter INV_{7i} .

[0124] The XNOR gate $XNOR_{7i}$ performs XNOR operation between the output signals SR_{7i} and $SR_{7(i+1)}$ of the flip-flops FF_{7i} and $FF_{7(i+1)}$ to output the select signal $select[i]$. That is, the XNOR gate $XNOR_{7i}$ outputs the low-level select signal $select[i]$ while the output signals SR_{7i} and $SR_{7(i+1)}$ of the flip-flops FF_{7i} and $FF_{7(i+1)}$ have the different levels. Accordingly, the select signal $select[i]$ has the low-level signals during a period corresponding to the half clock VCLK cycle from the falling edge of the output signal SR_{7i} and a period corresponding to the half clock VCLK cycle from the rising edge of the output signal SR_{7i} . As a result, the emission control signals $emit1[i]'$ and $emit2[i]'$ become low-level together with the select signal $select[i]$ in the first and second subfields 1F and 2F, respectively.

[0125] Next, scan drivers **200g** and **220h** for outputting the emission control signals $emit1[i]'$ and $emit2[i]'$ shown in **FIG. 12** will be described with reference to **FIGS. 21 to 23**.

[0126] **FIG. 21** shows the scan driver **200g** in an organic light emitting diode display device according to an eleventh exemplary embodiment, and **FIG. 22** shows a signal timing diagram of the scan driver **200g** shown in **FIG. 21**.

[0127] As shown in **FIG. 21**, the scan driver **200g** has the same structure as the scan driver **200f** of **FIG. 19** except that the emission control signals $emit1[i]'$ and $emit2[i]'$ are generated from a NAND gate $NAND_{7i}$ and an OR gate OR_{7i} .

[0128] In more detail, the i^{th} NAND gate $NAND_{7i}$ performs a NAND operation between the output signals SR_{7i} and $SR_{7(i+1)}$ of the flip-flops FF_{7i} and $FF_{7(i+1)}$ to output the emission control signal $emit1[i]'$ of the first subfield 1F, and the i^{th} OR gate OR_{7i} performs an OR operation between the output signals SR_{7i} and $SR_{7(i+1)}$ of the flip-flops FF_{7i} and $FF_{7(i+1)}$ to output the emission control signal $emit2[i]'$ of the second subfield 2F. Then, since the emission control signals $emit1[i]'$ and $emit2[i]'$ are at high-level in a period corresponding to the low-level signal of the select signal $select[i]$, the emission control signals $emit1[i]'$ and $emit2[i]'$ shown in **FIG. 22** can be outputted.

[0129] **FIG. 23** shows the scan driver **200h** in an organic light emitting diode display device according to a twelfth exemplary embodiment.

[0130] As shown in **FIG. 23**, the scan driver **200h** has the same structure as the scan driver **200g** of **FIG. 21** except that the select signal $select[i]$ are generated from a NAND gate $NAND_{8i}$.

[0131] Referring to **FIG. 22**, the two emission control signal $emit1[i]'$ and $emit2[i]'$ have high-levels during a period in which the select signal $select[i]$ has low-level. Therefore, the select signal $select[i]$ can be generated by the NAND operation of the emission control signals $emit1[i]'$ and $emit2[i]'$ which is performed by the NAND gate $NAND_{8i}$.

[0132] Next, a scan driver **200i** for outputting the emission control signals $emit1[i]'$ and $emit2[i]'$ shown in **FIG. 14** will be described with reference to **FIGS. 24 to 26**.

[0133] **FIG. 24** shows the scan driver **200i** in an organic light emitting diode display device according to a thirteenth exemplary embodiment, and **FIG. 25** shows a signal timing diagram of the scan driver **200i** shown in **FIG. 24**.

[0134] The scan driver **200i** of **FIG. 24** further includes $2n$ OR gates OR_{11} to OR_{1n} and OR_{21} to OR_{2n} in addition to the

elements of the scan driver **200g** of **FIG. 21**, and the flip-flops FF_{71} to FF_{7n} are not shown in **FIG. 24**. In addition, the i^{th} OR gates OR_{1i} and OR_{2i} , $(i-1)^{\text{th}}$ and i^{th} NAND gates $NAND_{7(i-1)}$ and $NAND_{7i}$, $(i-1)^{\text{th}}$ and i^{th} OR gates $OR_{7(i-1)}$ and OR_{7i} , and i^{th} XNOR gate $XNOR_{7i}$ are shown in **FIG. 24**. In **FIGS. 24 and 25**, the signals $SR_{7(i-1)}$, SR_{7i} , and $SR_{7(i+1)}$ respectively correspond to the output signals of the flip-flops $FF_{7(i-1)}$, FF_{7i} , and $FF_{7(i+1)}$; and signals A_i and B_i respectively correspond to the emission control signals $emit1[i]$ and $emit2[i]$ of the scan driver **200g** shown in **FIG. 21**.

[0135] As shown in **FIG. 25**, the OR gate OR_{1i} performs an OR operation of the signals A_{i-1} and A_i to output the emission control signals $emit1[i]$ during a period in which the both signals A_{i-1} and A_i are low-level. In addition, the OR gate OR_{2i} performs an OR operation of the signals B_{i-1} and B_i to output the emission control signals $emit2[i]$ during a period in which the both signals B_{i-1} and B_i are low-level. These emission control signals $emit1[i]$ and $emit2[i]$ are same as those shown in **FIG. 14**.

[0136] In addition, if the output signals A_{i-k} and A_{i+p} of the $(i-k)^{\text{th}}$ and $(i+p)^{\text{th}}$ NAND gates $NAND_{i-k}$ and $NAND_{i+p}$ are inputted to the i^{th} OR gates OR_{1i} and OR_{2i} (where 'k' and 'p' are respectively positive integers), the low-level periods of the emission control signals $emit1[i]$ and $emit2[i]$ may be controlled by an integral multiple of the half clock VCLK cycle.

[0137] **FIG. 26** shows a scan driver **200j** in an organic light emitting diode display device according to a fourteenth exemplary embodiment.

[0138] As shown in **FIG. 26**, the scan driver **200j** includes a NAND gate $NAND_{8i}$ instead of the XNOR gate $XNOR_{7i}$ in the scan driver **200i** of **FIG. 24**. The i^{th} NAND gate $NAND_{8i}$ performs a NAND operation of the output signal A_i of the i^{th} NAND gate $NAND_{7i}$ and the output signal B_i of the i^{th} OR gate OR_{7i} to output the select signal $select[i]$ as described in reference to **FIG. 23**.

[0139] In the above exemplary embodiments, the cases in which the width of the low-level signal of the select signal $select[i]$ is same as the half clock VCLK cycle have been described. That is, the rising edge of the select signal $select[i-1]$ corresponds to the falling edge of the select signal $select[i]$. In other embodiment, however, the falling edge of the select signal $select[i]$ may be apart from the rising edge of the select signal $select[i-1]$. That is, the width of the low-level signal of the select signal $select[i]$ may be shorter than the half clock VCLK cycle. One such exemplary embodiment will be described with reference to **FIGS. 27 and 28**.

[0140] **FIG. 27** shows a scan driver **200k** in an organic light emitting diode display device according to a fifteenth exemplary embodiment, and **FIG. 28** shows a signal timing diagram of the scan driver **200k** shown in **FIG. 27**. In **FIGS. 27 and 28**, the case in which the low-level signal width (e.g., low-level pulse width) of the select signal is reduced in the scan driver **200a** of **FIGS. 8 and 9** will be described.

[0141] As shown in **FIGS. 27 and 28**, the scan driver **200k** has the same structure as the scan driver **200a** of **FIGS. 8 and 9** except for a clip signal CLIP, and NAND gates $NAND_{11i}$ (i.e., $NAND_{111}$ to $NAND_{11n}$), to which the clip signal CLIP is applied in addition to the output signals SR_{1i} and $SR_{1(i+1)}$. The clip signal CLIP has a cycle corresponding

to the half clock VCLK cycle, and has the low-level signal whose width is shorter than the half clock VCLK cycle. In addition, the low-level period of the clip signal CLIP includes the falling edge or the rising edge of the clock VCLK.

[0142] Then, the NAND gate $NAND_{11i}$ outputs the low-level signal of the select signal $select[i]$ (i.e., one of select signals $select[1]$ to $select[n]$) during a period in which the clip signal CLIP is high-level. That is, the falling edge of the select signal $select[i]$ is apart from the rising edge of the select signal $select[i-1]$ by the low-level signal width (e.g., low-level pulse width) of the clip signal CLIP.

[0143] The principles of the exemplary embodiment described in **FIGS. 27 and 28** may also be applicable to the other exemplary embodiments described above.

[0144] In addition, the scan driver may be divided into a scan driver for driving the unit pixels formed on the odd row (hereinafter, "an odd row scan driver") and a scan driver for driving the unit pixels formed on the even row (hereinafter, "an even row scan driver"). This exemplary embodiment will be described with reference to **FIGS. 29 to 31**.

[0145] **FIG. 29** shows a plan view of an organic light emitting diode display device according to a sixteenth exemplary embodiment of the present invention, **FIGS. 30A and 30B** respectively show odd row and even row scan drivers **201** and **202** in the organic light emitting diode display device according to the sixteenth exemplary embodiment, and **FIG. 31** shows a signal timing diagram of the odd row scan driver **201** shown in **FIG. 30A**.

[0146] As shown in **FIG. 29**, the organic light emitting diode display device according to the sixteenth exemplary embodiment has the same structure as that of **FIG. 1** except for the scan drivers **201** and **202**.

[0147] The odd row scan driver **201** is formed on one side of the display area **100**, and sequentially transmits the select signals $select[2j-1]$ to the odd-numbered select scan lines S_{2j-1} (where 'j' is a positive integer less than or equal to $n/2$). The even row scan driver **202** is formed on the other side of the display area **100**, and sequentially transmits the select signals $select[2j]$ to the even-numbered select scan lines S_{2j} . In addition, the odd row scan driver **201** sequentially transmits emission control signals $emit1[2j-1]$ to the odd-numbered emit scan lines $Em_{1(2j-1)}$ in the first subfield **1F**, and sequentially transmits emission control signals $emit2[2j-1]$ to the odd-numbered emit scan lines $Em_{2(j-1)}$ in the second subfield **2F**. The even row scan driver **202** sequentially transmits emission control signals $emit1[2j]$ to the even-numbered emit scan lines $Em_{1(2j)}$ in the first subfield **1F**, and sequentially transmits emission control signals $emit2[2j]$ to the even-numbered emit scan lines $Em_{2(2j)}$ in the second subfield **2F**.

[0148] Referring to **FIG. 30A**, the odd row scan driver **201** has a structure in which NAND gates $NAND_{61}$ to $NAND_{6(n/2)}$ for even-numbered select signals are eliminated from the scan driver **200e** shown in **FIG. 17**. In more detail, the odd row scan driver **201** includes a shift register **211** for outputting the odd-numbered select signals $select[2j-1]$ and a shift register **221** for outputting the odd-numbered emission control signals $emit1[2j-1]$ and $emit2[2j-1]$. The shift register **211** includes $((n/2)+1)$ flip-flops FF_{81} , FF_{83} , . . . , $FF_{8(n+1)}$, and $(n/2)$ NAND gates $NAND_{91}$, $NAND_{93}$, . . .

, NAND_{9(n-1)}, and the shift register 221 includes (n/2) flip-flops FF₉₁, FF₉₃, . . . , FF_{9(n-1)}, and n OR gates OR₈₁, OR₈₃, . . . , OR_{8(n-1)}, and OR₉₁, OR₉₃, . . . , OR_{9(n-1)}.

[0149] Referring to FIG. 30B, the even row scan driver 202 has a structure in which the NAND gates NAND₅₁ to NAND_{5(n/2)} for odd-numbered select signals are eliminated from the scan driver 200e shown in FIG. 17. In more detail, the even row scan driver 202 includes a shift register 212 for outputting the even-numbered select signal select[2j] and a shift register 222 for outputting the even-numbered emission control signals emit1[2j] and emit2[2j]. The shift register 212 includes ((n/2)+1) flip-flops FF₈₂, FF₈₄, . . . , FF_{8(n+2)}, and (n/2) NAND gates NAND₉₂, NAND₉₄, . . . , NAND_{9n}, and the shift register 212 includes (n/2) flip-flops FF₉₂, FF₉₄, . . . , FF_{9n}, and n OR gates OR₈₂, OR₈₄, . . . , OR_{8n}, and OR₉₂, OR₉₄, . . . , OR_{9n}.

[0150] Referring to FIGS. 30A, 30B and 31, the start signal VSP1' shown in FIG. 18 is inputted to the flip-flops FF₈₁ and FF₈₂, and the start signal VSP2' shown in FIG. 18 is inputted to the flip-flops FF₉₁ and FF₉₂. The NAND gate NAND_{9(2j-1)} of the scan driver 201 performs a NAND operation of the output signals SR_{8(2j-1)} and SR_{8(2j+1)} of the flip-flops FF_{8(2j-1)} and FF_{8(2j+1)} and the clock VCLK to output the (2j-1)th select signal select[2j-1]. In addition, the NAND gate NAND_{9(2j)} of the scan driver 202 performs a NAND operation of the output signals SR_{8(2j)} and SR_{8(2j+2)} of the flip-flops FF_{8(2j)} and FF_{8(2j+2)} and the inverted clock /VCLK to output the (2j)th select signal select[2j].

[0151] In the scan driver 201, the OR gate OR_{8(2j-1)} performs an OR operation of the output signal SR_{8(2j-1)} of the flip-flop FF_{8(2j-1)} and the inverted output signal /SR_{9(2j-1)} of the flip-flop FF_{9(2j-1)} to output the (2j-1)th emission control signal emit1[2j-1], and the OR gate OR_{9(2j-1)} performs an OR operation of the output signals SR_{8(2j-1)} and SR_{9(2j-1)} of the flip-flops FF_{8(2j-1)} and FF_{9(2j-1)} to output the (2j-1)th emission control signal emit2[2j-1]. In the scan driver 202, the OR gate OR_{8(2j)} performs an OR operation of the output signal SR_{8(2j)} of the flip-flop FF_{8(2j)} and the inverted output signal /SR_{9(2j)} of the flip-flop FF_{9(2j)} to output the (2j)th emission control signal emit1[2j], and the OR gate OR_{9(2j)} performs an OR operation of the output signals SR_{8(2j)} and SR_{9(2j)} of the flip-flops FF_{8(2j)} and FF_{9(2j)} to output the (2j)th emission control signal emit2[2j].

[0152] The principles of the exemplary embodiment described in FIGS. 29 to 31 may also be applicable to the other exemplary embodiments described above.

[0153] In the above exemplary embodiments, the cases in which the select signals and the emission control signals provided by the scan driver are directly applied to the select scan lines and the emit scan lines have been shown. In other embodiments, however, one or more buffers may be formed between the display area 100 and the scan driver 200 (or the scan drivers 201 and 202). In addition, one or more level shifters which change the levels of the select signals and the emission control signals may also be formed between the display area 100 and the scan driver 200 (or the scan drivers 201 and 202).

[0154] According to the exemplary embodiments of the present invention, the plurality of sub-pixels share the select scan line and the pixel driver in the unit pixel. As a result, the sub-pixels can be easily arranged in the unit pixel, and

the aperture ratio of the unit pixel can be improved. In addition, since the number of the select scan lines is reduced compared to that of the number of the row lines, the number of the output terminals and the dimension of the scan driver can be reduced. Further, since the dimension of the scan driver is reduced, the non-emission area can be reduced when the scan driver and the unit pixels are formed on the same substrate.

[0155] According to the other exemplary embodiments of the present invention, the number of the flip-flops can be reduced in the scan driver for outputting the select signals and the emission control signals of the first and second subfields.

[0156] While this invention has been described in connection with certain exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims and their equivalents.

What is claimed is:

1. A display device comprising:

a plurality of unit pixels arranged in rows and for displaying an image during a field, the field being divided into a plurality of subfields, and each of the unit pixels including a plurality of light emitting elements arranged in a column direction;

a plurality of data lines extending in the column direction and for transmitting data signals;

a plurality of select scan lines extending in a row direction and for transmitting select signals, each of the select scan lines being coupled to a corresponding one of the rows of the unit pixels;

a plurality of emit scan lines for transmitting emission control signals, each of the emit scan lines being coupled to a corresponding one of the rows of the unit pixels; and

a scan driver for applying the select signals to the select scan lines and for applying the emission control signals to the emit scan lines, in each of the plurality of subfields,

wherein at least one of the unit pixels uses a corresponding one of the data signals in response to a first signal of a corresponding one of the select signals, and each of the plurality of light emitting elements of the at least one of the unit pixels emits light in response to an emit signal of a corresponding one of the emission control signals in a corresponding one of the subfields.

2. The display device of claim 1, wherein each of the unit pixels comprises:

a pixel driver for storing the corresponding one of the data signals in response to the first signal of the corresponding one of the select signals in each of the plurality of subfields, and for outputting a driving current corresponding to the corresponding one of the data signals; and

a switching unit for selectively transmitting the driving current from the pixel driver to corresponding at least one of the plurality of light emitting elements.

3. The display device of claim 2, wherein the plurality of light emitting elements of the at least one of the unit pixels emit lights of a same color.

4. The display device of claim 2, wherein the switching unit comprises a plurality of first transistors, each of the plurality of first transistors being coupled between an output terminal of the pixel driver and a corresponding one of the plurality of light emitting elements and being turned on in response to the emit signal of the corresponding one of the emission control signals, and

wherein the plurality of first transistors are selectively turned on so that the driving current is selectively transmitted to the plurality of light emitting elements.

5. The display device of claim 4, wherein the pixel driver further comprises:

a second transistor having first, second, and third electrodes, wherein the driving current corresponding to a voltage between the first and second electrodes flows from the third electrode;

a first capacitor for storing a voltage corresponding to the corresponding one of the data signals; and

a third transistor for transmitting the corresponding one of the data signals to the first capacitor in response to the first signal of the corresponding one of the select signals.

6. The display device of claim 5, wherein the pixel driver further comprises a second capacitor for storing a threshold voltage of the second transistor, and

wherein the voltage between the first and second electrodes of the second transistor is determined by a voltage stored in the first and second capacitors.

7. The display device of claim 1, wherein each of the plurality of emission control signals includes a first emission control signal having a second signal as the emit signal and a second emission control signal having a third signal as the emit signal, and

wherein each of the plurality of emit scan lines includes a first emit scan line for transmitting the first emission control signal and a second emit scan line for transmitting the second emission control signal.

8. The display device of claim 7, wherein the scan driver comprises:

a first shift register for sequentially outputting the plurality of select signals in each of the plurality of subfields; and

a second shift register for sequentially outputting the first and second emission control signals.

9. The display device of claim 8, wherein the first shift register comprises:

a first driver for shifting at least one of first shift signals by a first period to sequentially output a plurality of the first shift signals, the first shift signals each having a fourth signal in each of the plurality of subfields; and

a second driver for generating the first signal of the select signals during at least a part of a second period in which the fourth signal of one of the first shift signals at least partly overlaps with the fourth signal of another one of the first shift signals.

10. The display device of claim 9, wherein the second driver receives a signal having a plurality of fifth signals whose cycle is the first period, and generates the first signal of at least one of the select signals during a period in which the received signal has the fifth signal, of the second period.

11. The display device of claim 9, wherein a width of the fourth signal is twice that of the first period.

12. The display device of claim 9, wherein the second shift register comprises:

a third driver for shifting at least one of second shift signals by the first period to sequentially output a plurality of the second shift signals, the second shift signals each having a fifth signal and a sixth signal in the field;

a fourth driver for generating the second signal of the first emission control signal during a period in which a corresponding one of the second shift signals has the fifth signal and a corresponding one of the first shift signals does not have the fourth signal; and

a fifth driver for generating the third signal of the second emission control signal during a period in which a corresponding one of the second shift signals has the sixth signal and a corresponding one of the first shift signals does not have the fourth signal.

13. The display device of claim 8, wherein the second shift register comprises:

a first driver for sequentially outputting the first emission control signal; and

a second driver for inverting the first emission control signal to sequentially output the second emission control signal.

14. The display device of claim 8, wherein the second shift register comprises:

a first driver for shifting at least one of first shift signals by a first period to sequentially output a plurality of the first shift signals, the first shift signals each having a fourth signal and a fifth signal in the field;

a second driver for generating the second signal of the first emission control signal during a period in which the fourth signal of one of the first shift signals at least partly overlaps with the fourth signal of another one of the first shift signals; and

a third driver for generating the third signal of the second emission control signal during a period in which the fifth signal of one of the first shift signals at least partly overlaps with the fifth signal of another one of the first shift signals.

15. The display device of claim 8, wherein the first shift register shifts at least one of the select signals by a first period to sequentially output the plurality of select signals in each of the plurality of subfields, and

wherein the second shift register shifts at least one of the emission control signals by a second period corresponding to twice the first period, to sequentially output the plurality of emission control signals, and applies a same one of the emission control signals to two of the unit pixels to which first and second select signals of the plurality of select signals are applied, the second select signal being shifted by the first period from the first select signal.

16. The display device of claim 15, wherein the first shift register receives a first shift signal having a fourth signal and a fifth signal in turn with a cycle of the second period, and comprises:

- a first driver for shifting at least one of second shift signals by the second period to sequentially output a plurality of the second shift signals, the second shift signals each having a sixth signal in each of the plurality of sub-fields;
- a second driver for generating the first signal of the first select signal during at least a part of a period in which the sixth signals of two of the second shift signals at least partly overlap and the first shift signal has the fourth signal; and
- a third driver for generating the first signal of the second select signal during at least a part of a period in which the sixth signals of two of the second shift signals at least partly overlap and the first shift signal has the fifth signal.

17. The display device of claim 16, wherein the second shift register comprises:

- a fourth driver for shifting at least one of third shift signals by the second period to sequentially output a plurality of the third shift signals, the third shift signals each having a seventh signal and an eighth signal in the field;
- a fifth driver for generating the second signal of the first emission control signal during a period in which a corresponding one of the third shift signals has the seventh signal and a corresponding one of the second shift signals does not have the sixth signal; and
- a sixth driver for generating the second signal of the second emission control signal during a period in which a corresponding one of the third shift signals has the eighth signal and a corresponding one of the second shift signals does not have the sixth signal.

18. The display device of claim 7, wherein the scan driver comprises a shift register for sequentially outputting the plurality of select signals in each of the plurality of subfields and for sequentially outputting the plurality of emission control signals.

19. The display device of claim 18, wherein the shift register comprises:

- a first driver for shifting at least one of first shift signals by a first period to sequentially output a plurality of the first shift signals, the first shift signals each having a fourth signal and a fifth signal in the field; and
- a second driver for generating the first signal of at least one of the select signals during at least a part of a period in which two of the first shift signals shifted from each other by the first period have different signals.

20. The display device of claim 19, wherein the shift register further comprises:

- a third driver for generating the second signal of the first emission control signal in response to the fourth signal of a corresponding one of the first shift signals; and
- a fourth driver for generating the third signal of the second emission control signal in response to the fifth signal of a corresponding one of the first shift signals.

21. The display device of claim 19, wherein the shift register further comprises:

- a third driver for generating the second signal of the first emission control signal during a period in which the fourth signal of one of the first shift signals at least partly overlaps with the fourth signal of another one of the first shift signals; and
- a fourth driver for generating the third signal of the second emission control signal during a period in which the fifth signal of one of the first shift signals at least partly overlaps with the fifth signal of another one of the first shift signals.

22. The display device of claim 18, wherein the shift register comprises:

- a first driver for shifting at least one of first shift signals by a first period to sequentially output a plurality of the first shift signals, the first shift signals each having a fourth signal and a fifth signal in the field;
- a second driver for generating the second signal of the first emission control signal during a period in which the fourth signal of one of the first shift signals at least partly overlaps with the fourth signal of another one of the first shift signals;
- a third driver for generating the third signal of the second emission control signal during a period in which the fifth signal of one of the first shift signals at least partly overlaps with the fifth signal of another one of the first shift signals; and
- a fourth driver for generating the first signal of at least one of the select signals during at least a part of a period in which the first emission control signal does not have the second signal and the second emission control signal does not have the third signal.

23. The display device of claim 18, wherein the shift register comprises:

- a first driver for shifting at least one of first shift signals by a first period to sequentially output a plurality of the first shift signals, the first shift signals each having a fourth signal and a fifth signal in the field;
- a second driver for generating a sixth signal of at least one of the second shift signals during a period in which the fourth signal of one of the first shift signals at least partly overlaps with the fourth signal of another one of the first shift signals;
- a third driver for generating a seventh signal of at least one of the third shift signals during a period in which the fifth signal of one of the first shift signals at least partly overlaps with the fifth signal of another one of the first shift signals;
- a fourth driver for generating the second signal of the first emission control signal during a period in which the sixth signal of one of the second shift signals at least partly overlaps with the sixth signal of another one of the second shift signals; and
- a fifth driver for generating the third signal of the second emission control signal during a period in which the seventh signal of one of the third shift signals at least partly overlaps with the seventh signal of another one of the third shift signals.

24. The display device of claim 23, wherein the shift register further comprises a sixth driver for generating the first signal of at least one of the select signals during at least a part of a period in which two of the first shift signals shifted from each other by the first period have different signals.

25. The display device of claim 23, wherein the shift register further comprises a sixth driver for generating the first signal of at least one of the select signals during at least a part of a period in which a corresponding one of the second shift signals does not have the sixth signal and a corresponding one of the third shift signals does not have the seventh signal.

26. The display device of claim 1, wherein the scan driver is formed on one side of a display area in which the plurality of unit pixels are formed.

27. The display device of claim 1, wherein the light emitting elements comprise organic light emitting diodes.

28. A display device comprising:

- a plurality of unit pixels arranged in rows and for displaying an image during a field, the field being divided into a plurality of subfields, and each of the unit pixels including a plurality of light emitting elements arranged in a column direction;

- a plurality of data lines extending in the column direction and for transmitting data signals;

- a plurality of select scan lines extending in a row direction and for transmitting select signals, each of the select scan lines being coupled to a corresponding one of the rows of the unit pixels;

- a plurality of emit scan lines for transmitting emission control signals, each of the emit scan lines being coupled to a corresponding one of the rows of the unit pixels;

- a first scan driver for applying the select signals to the select scan lines of a first row group from among the rows of the unit pixels and for applying the emission control signals to the emit scan lines of the first row group, in each of the plurality of subfields; and

- a second scan driver for applying the select signals to the select scan lines of a second row group from among the rows of the unit pixels and for applying the emission control signals to the emit scan lines of the second row group, in each of the plurality of subfields,

wherein at least one of the unit pixels uses a corresponding one of the data signals in response to a first signal of a corresponding one of the select signals, and each of the plurality of light emitting elements of the at least one of the unit pixels emits light in response to an emit signal of a corresponding one of the emission control signals in a corresponding one of the subfields.

29. The display device of claim 28, wherein each of the unit pixels comprises:

- a pixel driver for storing the corresponding one of the data signals in response to the first signal of the corresponding one of the select signals in each of the plurality of subfields, and for outputting a driving current corresponding to the corresponding one of the data signals; and

- a switching unit for selectively transmitting the driving current from the pixel driver to corresponding at least one of the plurality of light emitting elements.

30. The display device of claim 29, wherein the switching unit comprises a plurality of transistors, each of the plurality of transistors being coupled between an output terminal of the pixel driver and a corresponding one of the plurality of light emitting elements and being turned on in response to the emit signal of the corresponding one of the emission control signals, and

- wherein the plurality of transistors are selectively turned on so that the driving current is selectively transmitted to the plurality of light emitting elements.

31. The display device of claim 28, wherein each of the plurality of emission control signals includes a first emission control signal having a second signal as the emit signal and a second emission control signal having a third signal as the emit signal, and

- wherein each of the plurality of emit scan lines includes a first emit scan line for transmitting the first emission control signal and a second emit scan line for transmitting the second emission control signal.

32. The display device of claim 31, wherein the first row group includes odd-numbered rows from among the rows of the unit pixels, and the second row group includes even-numbered rows from among the rows of the unit pixels.

33. The display device of claim 32, wherein the first scan driver comprises:

- a first shift register for shifting at least one of the select signals by a first period to sequentially output the plurality of select signals in each of the plurality of subfields; and

- a second shift register for shifting the first and second emission control signals by the first period to sequentially output the first and second emission control signals,

wherein the second scan driver comprises:

- a third shift register for shifting at least one of the select signals by the first period to sequentially output the plurality of select signals in each of the plurality of subfields; and

- a fourth shift register for shifting the first and second emission control signals by the first period to sequentially output the first and second emission control signals, and

wherein the first signal of at least one of the select signals outputted from the third shift register is shifted by a second period corresponding to the half of the first period from the first signal of at least one of the select signals outputted from the first shift register.

34. The display device of claim 33, wherein the first shift register receives a first shift signal having a fourth signal and a fifth signal in turn with a cycle of the first period, and comprises:

- a first driver for shifting at least one of second shift signals by the first period to sequentially output a plurality of the second shift signals, the second shift signals each having a sixth signal in each of the plurality of subfields; and

a second driver for generating the first signal of at least one of the select signals during at least a part of a period in which the sixth signal of one of the second shift signals at least partly overlaps with the sixth signal of another one of the second shift signals and the first shift signal has the fourth signal.

35. The display device of claim 34, wherein the third shift register comprises:

a third driver for shifting at least one of third shift signals by the first period to sequentially output a plurality of the third shift signals, the third shift signals each having a seventh signal in each of the plurality of subfields; and

a fourth driver for generating the first signal of at least one of the select signals during at least a part of a period in which the seventh signal of one of the third shift signals at least partly overlaps with the seventh signal of another one of the third shift signals and the first shift signal has the fourth signal.

36. The display device of claim 35, wherein the second shift register comprises:

a fifth driver for shifting at least one of fourth shift signals by the first period to sequentially output a plurality of the fourth shift signals, the fourth shift signals each having an eighth signal and a ninth signal in the field;

a sixth driver for generating the second signal of at least one of the first emission control signals during a period in which a corresponding one of the fourth shift signals has the eighth signal and a corresponding one of the second shift signals does not have the sixth signal; and

a seventh driver for generating the second signal of at least one of the second emission control signals during a period in which a corresponding one of the fourth shift signals has the ninth signal and a corresponding one of the second shift signals does not have the sixth signal, and

wherein the fourth shift register comprises:

an eighth driver for shifting at least one of fifth shift signals by the first period to sequentially output a plurality of the fifth shift signals, the fifth shift signals each having a tenth signal and an eleventh signal in the field;

a ninth driver for generating the second signal of the first emission control signal during a period in which a corresponding one of the fifth shift signals has the tenth signal and a corresponding one of the third shift signals does not have the seventh signal; and

a tenth driver for generating the second signal of the second emission control signal during a period in which a corresponding one of the fifth shift signals has the eleventh signal and a corresponding one of the third shift signals does not have the seventh signal.

37. The display device of claim 32, wherein the first scan driver comprises a first shift register for shifting at least one of the select signals by a first period to sequentially output the plurality of select signals in each of the plurality of subfields, and for shifting the first and second emission control signals by the first period to sequentially output the first and second emission control signals; and

the second scan driver comprises a second shift register for shifting at least one of the select signals by the first period to sequentially output the plurality of select signals in each of the plurality of subfields, and for shifting at least one of each of the first and second emission control signals by the first period to sequentially output the first and second emission control signals,

wherein the first signal of at least one of the select signals outputted from the second shift register is shifted by a second period corresponding to one-half of the first period from the first signal of at least one of the select signals outputted from the first shift register.

38. The display device of claim 28, wherein the first scan driver is formed on one side of a display area in which the plurality of unit pixels are formed, and the second scan driver is formed on the other side of the display area.

39. The display device of claim 28, wherein the light emitting elements comprise organic light emitting diodes.

40. A pixel circuit driving method of a display device including a plurality of data lines extending in a first direction and for transmitting data signals, a plurality of select scan lines extending in a second direction and for transmitting select signals, and a plurality of unit pixels, each of the unit pixels including a plurality of sub-pixels, the pixel circuit driving method comprising:

applying at least one of the select signals to a corresponding one of the plurality of select scan lines in a first subfield of a field, and applying at least one of the data signals to at least one of the plurality of data lines;

applying a first emission control signal to at least one of the unit pixels to which a corresponding one of the select signals and a corresponding one of the data signals are applied, to emit light in a first sub-pixel of the plurality of sub-pixels;

applying at least one of the select signals to a corresponding one of the plurality of select scan lines in a second subfield of the field, and applying at least one of the data signals to at least one of the plurality of data lines;

applying a second emission control signal to at least one of the unit pixels to which a corresponding one of the select signals and a corresponding one of the data signals are applied, to emit light in a second sub-pixel of the plurality of sub-pixels, the first and second sub-pixels being arranged in the first direction.

41. The pixel circuit driving method of claim 40, wherein each of the plurality of sub-pixels includes at least one light emitting element, and

wherein each of the plurality of unit pixels comprises:

a pixel driver for storing the corresponding one of the data signals in response to the first signal of the corresponding one of the select signals in each of the plurality of subfields, and for outputting a driving current corresponding to the corresponding one of the data signals; and

a plurality of switches, each of the plurality of switches being coupled to the pixel driver and a corresponding one of the plurality of sub-pixels.

42. The pixel circuit driving method of claim 41, wherein the plurality of switches include;

a first switch being turned on in response to a second signal of the first emission control signal; and

a second switch being turned on in response to a third signal of the second emission control signal.

43. The pixel circuit driving method of claim 42, further comprising:

shifting at least one of first shift signals having a fourth signal in each of the plurality of subfields by a first period to sequentially output a plurality of the first shift signals; and

generating the first signal of at least one of the select signals during at least a part of a period in which the fourth signal of one of the first shift signals at least partly overlaps with the fourth signal of another one of the first shift signals.

44. The pixel circuit driving method of claim 43, further comprising:

shifting at least one of second shift signals having a fifth signal and a sixth signal in the field by the first period to sequentially output a plurality of the second shift signals;

generating the second signal of the first emission control signal in response to the fifth signal of a corresponding one of the second shift signals; and

generating the third signal of the second emission control signal in response to the sixth signal of a corresponding one of the second shift signals.

45. The pixel circuit driving method of claim 43, further comprising:

shifting at least one of second shift signals having a fifth signal and a sixth signal in the field by the first period to sequentially output a plurality of the second shift signals;

generating the second signal of the first emission control signal during a period in which the fifth signal of one of the second shift signals at least partly overlaps with the fifth signal of another one of the second shift signals; and

generating the third signal of the second emission control signal during a period in which the sixth signal of one of the second shift signals at least partly overlaps with the sixth signal of another one of the second shift signals.

46. The pixel circuit driving method of claim 42, further comprising:

shifting at least one of first shift signals having a fourth signal and a fifth signal in the field by the first period to sequentially output a plurality of the first shift signals; and

generating the first signal of at least one of the select signals during at least a part of a period in which two of the first shift signals shifted from each other by the first period have different signals.

47. The pixel circuit driving method of claim 46, further comprising:

generating the second signal of the first emission control signal in response to the fourth signal of a corresponding one of the first shift signals; and

generating the third signal of the second emission control signal in response to the fifth signal of a corresponding one of the first shift signals.

48. The pixel circuit driving method of claim 46, further comprising:

generating the second signal of the first emission control signal during a period in which the fourth signal of one of the first shift signals at least partly overlaps with the fourth signal of another one of the first shift signals; and

generating the third signal of the second emission control signal during a period in which the fifth signal of one of the first shift signals at least partly overlaps with the fifth signal of another one of the first shift signals.

49. The pixel circuit driving method of claim 42, further comprising:

shifting at least one of first shift signals having a fourth signal and a fifth signal in the field by the first period to sequentially output a plurality of the first shift signals;

generating the second signal of the first emission control signal during a period in which the fourth signal of one of the first shift signals at least partly overlaps with the fourth signal of another one of the first shift signals;

generating the third signal of the second emission control signal during a period in which the fifth signal of one of the first shift signals at least partly overlaps with the fifth signal of another one of the first shift signals; and

generating the first signal of a corresponding one of the select signals during at least a part of a period in which the first emission control signal does not have the second signal and the second emission control signal does not have the third signal.

50. The pixel circuit driving method of claim 42, further comprising:

shifting at least one of first shift signals having a fourth signal and a fifth signal in the field by the first period to sequentially output a plurality of the first shift signals;

generating a sixth signal of at least one of second shift signals during a period in which the fourth signal of one of the first shift signals at least partly overlaps with the fourth signal of another one of the first shift signals;

generating a seventh signal of at least one of third shift signals during a period in which the fifth signal of one of the first shift signals at least partly overlaps with the fifth signal of another one of the first shift signals;

generating the second signal of the first emission control signal during a period in which the sixth signal of one of the second shift signals at least partly overlaps with the sixth signal of another one of the second shift signals; and

generating the third signal of the second emission control signal during a period in which the seventh signal of one of the third shift signals at least partly overlaps with the seventh signal of another one of the third shift signals.

51. The pixel circuit driving method of claim 50, further comprising:

generating the first signal of at least one of the select signals during at least a part of a period in which two of the first shift signals shifted from each other by the first period have different signals.

52. The pixel circuit driving method of claim 50, further comprising:

generating the first signal of at least one of the select signals during at least a part of a period in which a corresponding one of the second shift signals does not have the sixth signal and a corresponding one of the third shift signals does not have the seventh signal.

53. The pixel circuit driving method of claim 42, wherein the plurality of select signals comprise:

a plurality of first select signals applied to a first group of the select scan lines including odd-numbered select scan lines; and

a plurality of second select signals applied to a second group of the select scan lines including even-numbered select scan lines,

wherein at least one of the first select signals is shifted, by a first period, wherein at least one of the second select signals is shifted by the first period, and wherein the at least one of the second select signals is shifted by a second period corresponding to one-half of the first period from the at least one of the first select signals.

54. The pixel circuit driving method of claim 53, further comprising:

outputting a first shift signal having a fourth signal and a fifth signal in turn with a cycle of the first period;

shifting at least one of second shift signals having a sixth signal in each of the plurality of subfields by the first period to sequentially output a plurality of the second shift signals;

generating the first signal of at least one of the first select signals during at least a part of a period in which the sixth signal of one of the second shift signals at least partly overlaps with the sixth signal of another one of the second shift signals and the first shift signal has the fourth signal; and

generating the first signal of at least one of the second select signals during at least a part of a period in which the sixth signal of one of the second shift signals at least partly overlaps with the sixth signal of another one of the second shift signals and the first shift signal has the fifth signal.

55. The pixel circuit driving method of claim 54, further comprising:

shifting at least one of third shift signals having a seventh signal and an eighth signal in the field by the first period to sequentially output a plurality of the third shift signals;

generating the second signal of the first emission control signal during a period in which a corresponding one of

the third shift signals has the seventh signal and a corresponding one of the second shift signals does not have the sixth signal; and

generating the third signal of the second emission control signal during a period in which a corresponding one of the third shift signals has the eighth signal and a corresponding one of the second shift signals does not have the sixth signal, wherein same first and second emission control signals are applied to two of the unit pixels to which the first and second select signals shifted from each other by the second period are respectively applied.

56. The pixel circuit driving method of claim 53, wherein at least one of the first select signals is inputted to a first terminal of a corresponding one of the select scan lines, and at least one of the second select signals is inputted to a second terminal of a corresponding one of the select scan lines.

57. The pixel circuit driving method of claim 40, wherein each of the plurality of sub-pixels comprises an organic light emitting diode.

58. A display device comprising:

a display area including a plurality of data lines extending in a first direction, a plurality of select scan lines extending in a second direction, and a plurality of unit pixels, each of the unit pixels including a plurality of sub-pixels arranged in the first direction;

a first driver for sequentially transmitting select signals to the plurality of select scan lines in each of a plurality of subfields that form a field, and for transmitting emission control signals to corresponding at least one of the plurality of sub-pixels in each of the plurality of subfields to emit light in the corresponding at least one of the plurality of sub-pixels; and

a second driver for transmitting a data signal to at least one of the data lines of the unit pixels coupled to a corresponding one of the select scan lines to which one of the select signals is applied,

wherein the first driver generates the emission control signals respectively corresponding to the plurality of subfields using a first shift signal.

59. The display device of claim 58, wherein the first driver generates the select signals using the first shift signal.

60. The display device of claim 58, wherein the first driver comprises:

a third driver for transmitting the select signals and the emission control signals to the unit pixels coupled to odd-numbered select scan lines of the plurality of select scan lines; and

a fourth driver for transmitting the select signals and the emission control signals to the unit pixels coupled to even-numbered select scan lines of the plurality of select scan lines.

* * * * *

专利名称(译)	显示装置及其驱动方法		
公开(公告)号	US20060145964A1	公开(公告)日	2006-07-06
申请号	US11/312016	申请日	2005-12-19
[标]申请(专利权)人(译)	朴成CHON KWAK WON KYU 金杨万		
申请(专利权)人(译)	朴成川 KWAK WON-KYU 金养WAN		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	PARK SUNG CHON KWAK WON KYU KIM YANG WAN		
发明人	PARK, SUNG-CHON KWAK, WON-KYU KIM, YANG-WAN		
IPC分类号	G09G3/30		
CPC分类号	G09G3/3233 G09G3/3266 G09G2300/0804 G09G2300/0819 G09G2300/0842 G09G2300/0852 G09G2300/0861 G09G2310/0205 G09G2310/0262 G09G2320/043		
优先权	1020050000759 2005-01-05 KR		
其他公开文献	US7847765		
外部链接	Espacenet USPTO		

摘要(译)

在有机发光二极管显示器中，共享沿行方向延伸的选择扫描线的多个子像素形成单位像素，并且多个子像素沿列方向排列在单位像素中。场被划分为多个子场，并且多个子像素中的对应的一个子像素在多个子场中的每个子场中发光。

