

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
24 October 2002 (24.10.2002)

PCT

(10) International Publication Number  
WO 02/084633 A1

- (51) International Patent Classification<sup>7</sup>: G09G 3/36 (74) Agent: WILLIAMSON, Paul, L.; Internationaal Octroibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/IB02/01313
- (22) International Filing Date: 10 April 2002 (10.04.2002) (81) Designated States (*national*): CN, JP, KR.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: 0109015.8 11 April 2001 (11.04.2001) GB Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors: FISH, David, A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). BIRD, Neil, C.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: BISTABLE CHIRAL NEMATIC LIQUID CRYSTAL DISPLAY AND METHOD OF DRIVING THE SAME

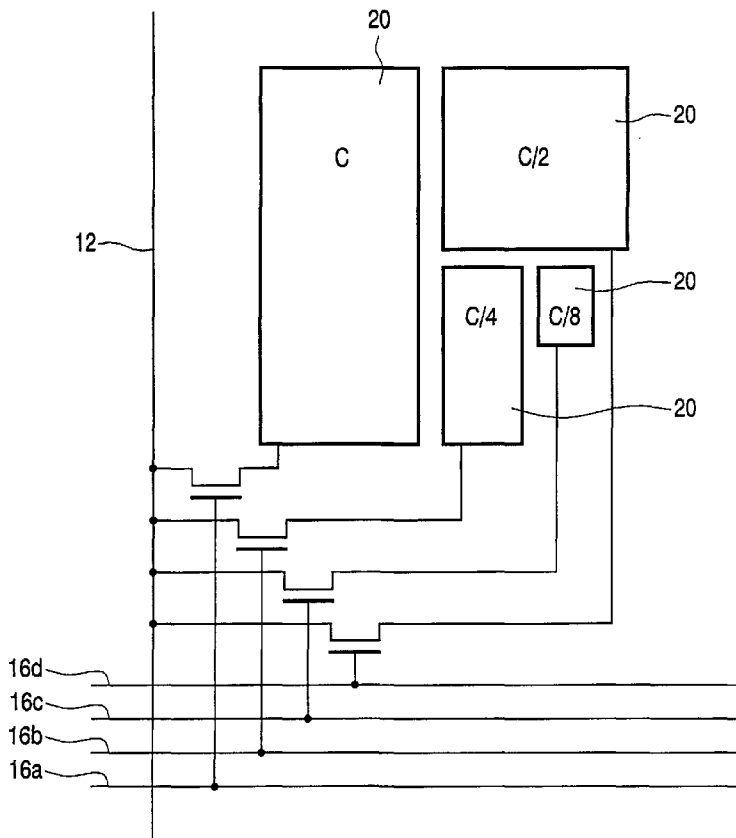

(57) Abstract: A cholesteric liquid crystal display has pixel address circuits (84) with an input (12) for receiving a data signal and a plurality of outputs, wherein each output is for applying a pixel drive signal to a respective portion of the liquid crystal material (20), and wherein the pixel drive signal for each output is independently switchable by the pixel address circuit to each output. This provides spatially-separated sub-pixels, and a number of the sub-pixels can be addressed in order to provide a grey scale output for each pixel. Each pixel drive signal can however be a two-level digital signal.



WO 02/084633 A1

## BISTABLE CHIRAL NEMATIC LIQUID CRYSTAL DISPLAY AND METHOD OF DRIVING THE SAME

5

The present invention concerns a display utilizing a chiral nematic reflective bistable liquid crystal material, and a method of driving such a display. This material is also described as cholesteric. In particular, the invention relates to an active matrix pixel arrangement and drive scheme.

10

Cholesteric liquid crystal material is a reflective material that provides a strongly coloured binary image. The material is bistable, has a very wide viewing angle and does not require polarisers, colour filters or rubbing as do super twisted nematic (STN) type displays. Therefore, the material can provide a low power and low cost display at high resolution and with a good quality single colour image. This type of display is being proposed for hand-held portable devices as well as for electronic document viewers, such as electronic book or newspaper devices.

15

Cholesteric materials have three stable states. The Planar (P) state is a reflective state of the material, and is stable with zero applied field. The Focal Conic (FC) is a transmissive scattering state of the material, and is also stable with zero applied field. The Homeotropic (H) state is stable only above a high threshold voltage of around 30V, and is also transparent. A black absorbing layer placed behind the material means that the H and FC states appear black.

20

A fourth, instable, state also exists, which can occur upon relaxation of the material from the H state. This is called the Transient Planar (P\*) state. This state only arises if the high voltage on the material in the H state is reduced rapidly, for example in 2ms or less. The Transient Planar state relaxes to the Planar state (P) in the absence of applied voltages.

25

In use of the material, a drive scheme is devised to switch the material between the P and FC states, which are stable at zero applied voltage. A first problem arises because any transition between the P and FC states requires

30

the material to pass through the high-voltage H state. Therefore, known passive matrix switching schemes require rapid high voltage switching. Conventional drive schemes are arranged such that each time a pixel is addressed, a transition in the material is provoked into the H state. This means that pixels in the reflective P state are caused to pass through the transmissive H state, even if the pixel is to be driven to the reflective P state in the next field period. This gives rise to a visual artifact known as a black addressing bar.

The relaxation from the Homeotropic state is then controlled by the applied voltages, either to result in the Planar or Focal Conic states.

The bistable nature of the material at zero applied voltage means a display using the material does not require continuous updating or refreshing. If display information does not change, the display can be written once and remain in its information-conveying configuration for extended periods with no power consumption. This has resulted in use of cholesteric liquid crystal displays for images that can be slowly updated over relatively long periods of time. However, the problems outlined above, particularly the slow addressing response, have limited the further development of this display technology in wider fields of application.

Cholesteric liquid crystal displays provide a single colour binary image, and have been proposed principally for single colour reflective displays. In order to provide a grey scale image, rather than a binary image, it has been proposed to use the hysteresis characteristic of the cholesteric material. US-A-6052103 discloses a display in which a grey scale is obtained by driving the material to a variable voltage. In order to provide a predictable relationship between the voltage applied to the material and the reflectivity, each pixel needs to be reset to the transmissive H state before the data signal is applied. This gives rise to the black addressing bar problem mentioned above. Furthermore, in an analogue drive scheme, the voltage on the liquid crystal material can vary during the frame period as a result of charge leakage within the pixel. This results in changes in the reflectivity during the frame period. Additional measures are required to counteract this problem.

As mentioned above, the cholesteric material provides a single colour image. In order to provide a colour display, it is known to use a tunable chiral dopant, which then controls the chirality of the liquid crystal material. Ultraviolet exposure then adjusts the chirality of the dopant and hence the liquid crystal material. In this way, the reflection wavelength of the material can be controlled by UV exposure. A small amount of polymer network forming material enables the colour to be fixed and stops diffusion of the colour, as disclosed in L. C. Chien et al, "Multicolour Reflective Cholesteric Displays", SID 95, p169, which is incorporated herein by way of reference material.

In order to provide a colour display, it has been proposed to stack display substrates having red, green and blue pixel arrays, each with their own drive electronics, or to use red, green and blue stripes of pixels on a single substrate. The latter approach is disclosed in WO99/21052, which is also incorporated herein by way of reference material.

According to the invention, there is provided a display apparatus comprising:

a layer of bistable chiral nematic liquid crystal material;  
an active matrix substrate defining rows and columns of pixel address circuits,

wherein each pixel address circuit has an input for receiving a data signal and a plurality of outputs, wherein each output is for applying a pixel drive signal to a respective portion of the liquid crystal material, and wherein the pixel drive signal for each output is independently switchable by the pixel address circuit to each output.

The pixel arrangement of the invention provides spatially-separated sub-pixels, and a number of the sub-pixels can be addressed in order to provide a grey scale output for each pixel. This enables each pixel drive signal to be a two-level digital signal, which avoids the problems of charge leakage associated with analogue drive schemes.

The different portions of the liquid crystal material may occupy different sized areas of the layer of material, for example following a binary-weighted scale. The number of portions then equates to the number of bits of the grey scale that can be implemented by the pixel layout.

5 The layer of material may comprise a red, green and blue region, so that a colour display may be implemented. For example, the layer may be arranged as an array of parallel stripes, with three stripes defining a row or column of pixels.

Each pixel preferably has a single input, and the input is coupled to  
10 each output through a respective transistor, each transistor having an independently selectable gate voltage. This enables a single drive voltage (sufficient to cause the material to pass to the Homeotropic state) to be provided to a column of pixels.

Alternatively, each pixel has a plurality of inputs, and each input is  
15 coupled to an associated output through a respective transistor, a common controllable gate voltage being applied to each transistor. This requires multiple drive voltage lines (column lines), but enables a single row voltage line to be provided for selecting the entire pixels in the row.

Preferably, the device includes a frame store. This can be used for  
20 determining which pixels need to be driven to the Homeotropic state based on the pixel outputs in the previous and current frames. This then enables the black bar problem to be avoided. The display is preferably drivable in a non-addressing mode and an addressing mode, and the frame store is then used to store data enabling transition between the two modes.

25 The invention also provides a method of addressing a bistable chiral nematic liquid crystal display apparatus, the apparatus comprising an active matrix substrate defining rows and columns of pixel address circuits, each pixel address circuit having a plurality of outputs, wherein each output is for applying a pixel drive signal to a respective portion of the liquid crystal  
30 material, the method comprising:

for each row of pixels, applying a pixel drive signal to a number of the outputs of each pixel address circuit, the number of the outputs being selected as a function of the desired pixel output level.

This method enables spatially-separated sub-pixels to be selected thereby enabling a grey scale to be provided whilst using digital (two-state) control of the individual sub-pixels.

The pixel drive signal is sufficient to drive the material initially to the Homeotropic state, thereby enabling transition between the P and FC states. For pixel outputs in the Planar state in the preceding frame and to be driven to the Planar state in the current frame, the pixel drive signal is not applied. This avoids the need for pixels or sub-pixels in the P state to pass through the H state when being driven again to the P state, and thereby overcomes the black bar problem.

The invention also provides a method of addressing a bistable chiral nematic liquid crystal display apparatus, the apparatus comprising an active matrix substrate defining rows and columns of pixel address circuits, the method comprising:

applying an initialisation sequence, in which for each row of pixels a pixel drive signal is applied only to those pixels previously in the transmissive Focal Conic state, thereby driving those pixels to the transmissive Homeotropic state, the state of the pixels previously being determined from a frame store.

Examples of the invention will now be described in detail with reference to the accompanying drawings, in which:

Figure 1 shows the electro-optical response of a bistable reflective cholesteric liquid crystal;

Figure 2 is used to explain how an active matrix addressing scheme can be used to address a conventional cholesteric display pixel;

Figure 3 shows an active matrix cholesteric display pixel design of the invention;

Figure 4 shows the pixel of Figure 3 in plan view; and

Figure 5 shows a display according to the invention.

The definition of "rows" and "columns" is somewhat arbitrary in the following description and claims. These terms are intended only to signify a two dimensional array of elements, with groups of elements aligned with two orthogonal axes. Thus, a "row" or "column" may run from side to side or from top to bottom of a display.

Figure 1 shows the electro-optical response of a bistable reflective cholesteric liquid crystal. The curves show the reflectivity after application of a square wave pulse of given voltage starting either in the stable low-voltage Planar or Focal Conic state. A voltage below  $V_1$  does not change the state of the material. A voltage pulse between  $V_2$  and  $V_3$  switches the material to the Focal Conic state, and a voltage of  $V_4$  results in the Planar state. To use the material in a liquid crystal display, the material is driven to the stable Planar or Focal Conic states with low applied voltage ( $<V_1$ ). However, to switch between the Planar and Focal Conic states, the material must be driven to a high voltage state (not shown in Figure 1) in which the material is transmissive. The conditions under which this high voltage is then removed from the material dictates the manner in which the material relaxes to the stable low voltage state. If the voltage is removed rapidly, the material passes through the Transient Planar state before relaxing to the stable Planar state. If the high voltage is removed more slowly, the material relaxes to the Focal Conic low-voltage stable state.

Conventional drive schemes for cholesteric displays use a passive matrix addressing scheme, which is possible as a result of the memory effect of the liquid crystal. During each field period of the addressing scheme, the material is caused to pass into the transmissive Homeotropic state. This gives rise to the black addressing bar artefact described above. In order to provide a grey scale, it has been proposed to operate the material in the region 2. This requires the material to be driven initially to the Planar state, and then requires the voltage to be altered to a value which provides the required level of reflectivity.

The invention provides a grey scale whilst maintaining the advantages of a digital drive scheme, namely one in which pixels or sub-pixels are driven only to the Planar or Homeotropic states, and not to any intermediate state. To provide a grey scale, each pixel is divided into sub-pixels, and the pixel drive signal is independently switchable by the pixel address circuit to each sub-pixel.

The invention uses an active matrix addressing scheme, namely one in which the voltage supplied to rows of pixels is selectively switchable on to the liquid crystal material of each pixel, and sub-pixel, in the row.

The use of an active matrix addressing scheme also makes it possible to dictate for each pixel (or sub-pixel) whether or not it passes to the Homeotropic state. For pixels which are in the reflective Planar state and which are to remain in the reflective Planar state, inhibiting the Homeotropic state avoids the black addressing bar problem.

Figure 2 shows a conventional cholesteric pixel, and is used to explain a first aspect of the invention, which enables seamless transition between video and constant signal modes of operation of the display. This is useful for applications where static images are normally required, but the display is used in a device which also provides the capability of generating video images. Such a device may comprise a mobile telephone or other hand-held device.

In the example of the invention described below, during a video mode, each pixel is driven either to the Planar or the high voltage Homeotropic state. The Homeotropic state provides greater contrast than the Focal Conic state, because the reflectivity is lower in the P state than in the FC state.

The pixel comprises a cell 10 comprising a portion of the liquid crystal material. A data signal from a column conductor 12 is supplied to the cell 10 through a high voltage thin film transistor 14, which is turned on or off by the row conductor 16 for that row of pixels.

When initially addressing the display, no charge will exist on any pixel. Therefore an initialisation is required, particularly for pixels which have relaxed from the high voltage Homeotropic state to the Focal Conic state. These pixels must be held in the high voltage black Homeotropic state for a period of

around 20ms to enable the transition between the FC and H states to occur. If all pixels are driven to the Homeotropic state, this will create one black frame before the first frame after an idle period, for example at the start of a video addressing sequence. In accordance with one aspect of the invention, a frame store is used for holding the last frame of a previous addressing sequence. This can be used to cause only those pixels in a black Focal Conic state to be transformed to a black Homeotropic state. The colour pixels in the Planar state are left untouched. This is achieved by simply addressing the display with the data in the frame store. Again this must be left for around 20ms to allow the Focal-Conic to Homeotropic transition to occur before any further addressing occurs. The user will only perceive an increase in contrast as the video addressing mode begins, but there will be no loss of image content.

If the Focal-Conic to Homeotropic transition can occur in less than a frame time, then new data to update the display should be stored in the frame store. The old data in the frame store is used to perform the set-up described above, after which the new frame data is used. When finishing an addressing period, the last frame is left in the frame store. Then the display is always addressed with the data in the frame store and the set-up phase becomes seamless.

This enables the display to pass between standby and video modes, without any black bar artefacts. In the standby mode, at the end of a period of video mode, the pixels relax over time from the Homeotropic (high contrast) to Focal Conic (low contrast) states, whereas the pixels in the Planar state are stable.

In the video addressing mode, the required binary transitions are:

- (1) Black to Black;
- (2) Black to Colour;
- (3) Colour to Colour; and
- (4) Colour to Black.

In case (1), the column voltage is set high maintaining the voltage across the pixel to maintain the Homeotropic state. After the line is addressed, sufficient charge leakage to cause relaxation of the Homeotropic state must

not be allowed before refresh in the next frame. Thus, the display is operated in a high contrast mode with all pixels either in the Homeotropic or Focal Conic states.

In case (2), the column voltage is set to zero allowing rapid discharge of the pixel to the column electrode causing a transformation to the colour Planar state. In this case the optical response of the CTLC material must be less than a frame time to allow the reflecting Planar state to be reached before the pixel is addressed again. Optical response times of 20ms are typical.

In case (3), zero voltage is held on the column, thereby maintaining zero pixel voltage, and maintaining the pixel in the stable Planar state.

In case (4), a high voltage is set on the column electrode to cause a Planar to Homeotropic state transition.

The frame store is thus used not only to smooth the interface between standby and video modes, but also to prevent the black bar artefact in the video mode, by preventing transition to the Homeotropic state for pixels which are to remain in the stable Planar state.

The liquid crystal material can be leaky. This is important for the end of the addressing mode. The final image in a video sequence will have black pixels with a large voltage initially held across them. This voltage will reduce slowly as the charge leaks away. This will cause the Homeotropic state to transform to the Focal Conic state if the charge leakage is slow enough. This gives rise to the contrast reduction explained above.

Rather than relying upon leakage through CTLC material being sufficiently slow to result in the Focal Conic state, the gate voltages of the transistors could be increased sufficiently at the end of an addressing period to let charge leak at a sufficiently slow rate to the column electrodes (which are then at zero volts).

Figure 3 shows an active matrix pixel design of the invention. The use of the frame store in the manner described above can be used when addressing a conventional pixel (of Figure 2) or when addressing the pixel design of the invention.

The pixel design of the invention provides grey scale and colour by spatial division of the pixel. This enables digital rather than analogue addressing and thereby still enables the black bar addressing artefact to be avoided.

5 Each pixel comprises a plurality of sub-pixels 20, each of which is defined by a separate area of the liquid crystal layer. Each sub-pixel 20 has an associated transistor 22 so that each sub-pixel may be addressed independently. Each pixel requires a number of row address lines 16a, 16b, 16c, corresponding in number to the number of sub-pixels per pixel.

10 The design of Figure 3 keeps the number of column electrodes per colour pixel down to three. The number of row electrodes is dictated by the data accuracy required, namely the number of bits per colour sub-pixel.

The liquid crystal material will be arranged into stripes either using a polymer network or using some form of separator (e.g. a glass wall) to stop colours merging. To produce colour, the circuit of Figure 3 must be repeated  
15 under the relevant colour region of the liquid crystal layer.

The sub-pixels 20 shown in Figure 3 will vary in size so that the various bits of the signal for the pixel can be made up. Figure 4 shows the area variation of these sub-pixels 20, providing a binary weighted range of capacitances, C, C/2, C/4, C/8 in the example shown which provides a 4-bit  
20 grey scale (for each colour).

In order to provide the required individual row signals to each pixel in the row, the voltages are applied to each sub-pixel at an allocated time period within the overall row period, and a signal sufficient to drive the material to the  
25 Homeotropic state is applied to the columns in turn. Thus, a time division multiplexing of the column signal is carried out.

The rows and columns still only require two voltage levels, simplifying row and column driver circuits.

An alternative to the above is to have  $3 \times b$  column electrodes per pixel, where b is the number of bits per colour sub-pixel. Only one row electrode is  
30 then required per pixel. This has a power saving advantage because the time

division multiplexing is no longer required, reducing the number of voltage transitions per frame.

Figure 5 shows a liquid crystal display device according to the invention. The device is provided with two glass substrates 80, 82 which face each other to hold liquid crystal material between them (not shown). The lower substrate 82 is the active plate which defines the pixel layout described above. Each pixel defines a contact pad 84 for the liquid crystal material. Each pixel is addressed by one or more row conductors 86 depending on the specific pixel design and one or more column conductors 88, again depending on the pixel design. The upper substrate 80 carries a common earth potential layer 90, so that individual regions of the liquid crystal material have a potential defined across them which is dictated by the potential on the contact pad 84.

A frame store is shown schematically as 92 which is accessed by the drive electronics 94 of the display.

The active plate can be manufactured using known techniques, for example using the same processes used to form the active plate of a conventional active matrix liquid crystal display. Thus, the required transistors and capacitor plates are formed using thin film techniques, and the transistors may be defined as amorphous silicon or polycrystalline silicon devices.

The inversion of voltages is desirable to maintain a zero mean field across the liquid crystal material. This can be achieved by addressing the black pixels with alternating positive and negative voltages in different fields. However this doubles the already high voltages on the columns. Using counter electrode inversion will bring the column voltage range back to the non-voltage inversion case, but the column voltage levels will change to  $\pm V/2$  Volts (rather than 0 and V Volts) to achieve r.m.s. pixel voltages of 0 and V Volts where required.

Various modifications will be apparent to those skilled in the art.

## CLAIMS

1. A display apparatus comprising:  
5 a layer of bistable chiral nematic liquid crystal material;  
an active matrix substrate defining rows and columns of pixel address circuits,  
wherein each pixel address circuit has an input for receiving a data signal and a plurality of outputs, wherein each output is for applying a pixel  
10 drive signal to a respective portion of the liquid crystal material, and wherein the pixel drive signal for each output is independently switchable by the pixel address circuit to each output.
2. A display device as claimed in claim 1, wherein the different  
15 portions of the liquid crystal material occupy different sized areas of the layer of material.
3. display device as claimed in claim 2, wherein the areas of the  
different portions follow a binary-weighted scale.  
20
4. A display device as claimed in any preceding claim, wherein the  
layer of material comprises a red, green and blue region.
5. A display device as claimed in any preceding claim, wherein  
25 each pixel has a single input, and the input is coupled to each output through a respective transistor, each transistor having an independently selectable gate voltage.
6. A display device as claimed in any one of Claims 1 to 4, wherein  
30 each pixel has a plurality of inputs, and each input is coupled to an associated output through a respective transistor, a common controllable gate voltage being applied to each transistor.

7. A display device as claimed in any preceding claim, wherein each pixel address circuit has four outputs.

5 8. A display device as claimed in any preceding claim, including a frame store.

9. A display device as claimed in claim 8, wherein the frame store is used for determining which pixels need to be driven to the Homeotropic state based on the pixel outputs in the previous and current frames.

10

10. A display device as claimed in claim 8, which is drivable in a non-addressing mode and an addressing mode, wherein the frame store is used to store data enabling transition between the two modes.

15

11. A method of addressing a bistable chiral nematic liquid crystal display apparatus, the apparatus comprising an active matrix substrate defining rows and columns of pixel address circuits, each pixel address circuit having a plurality of outputs, wherein each output is for applying a pixel drive signal to a respective portion of the liquid crystal material, the method comprising:

20

for each row of pixels, applying a pixel drive signal to a number of the outputs of each pixel address circuit, the number of the outputs being selected as a function of the desired pixel output level.

25

12. A method as claimed in claim 11, wherein the pixel drive signal is sufficient to drive the material initially to the Homeotropic state.

13. A method as claimed in claim 12, wherein for pixel outputs in the Planar state in the preceding frame and to be driven to the Planar state in the current frame, the pixel drive signal is not applied.

30

14. A method as claimed in claim 12 or 13, wherein the pixel drive signal is positive for some frames and negative for other frames.

15. A method of addressing a bistable chiral nematic liquid crystal display apparatus, the apparatus comprising an active matrix substrate defining rows and columns of pixel address circuits, the method comprising:

5 applying an initialisation sequence, in which for each row of pixels a pixel drive signal is applied only to those pixels previously in the transmissive Focal Conic state, thereby driving those pixels to the transmissive  
10 Homeotropic state, the state of the pixels previously being determined from a frame store.

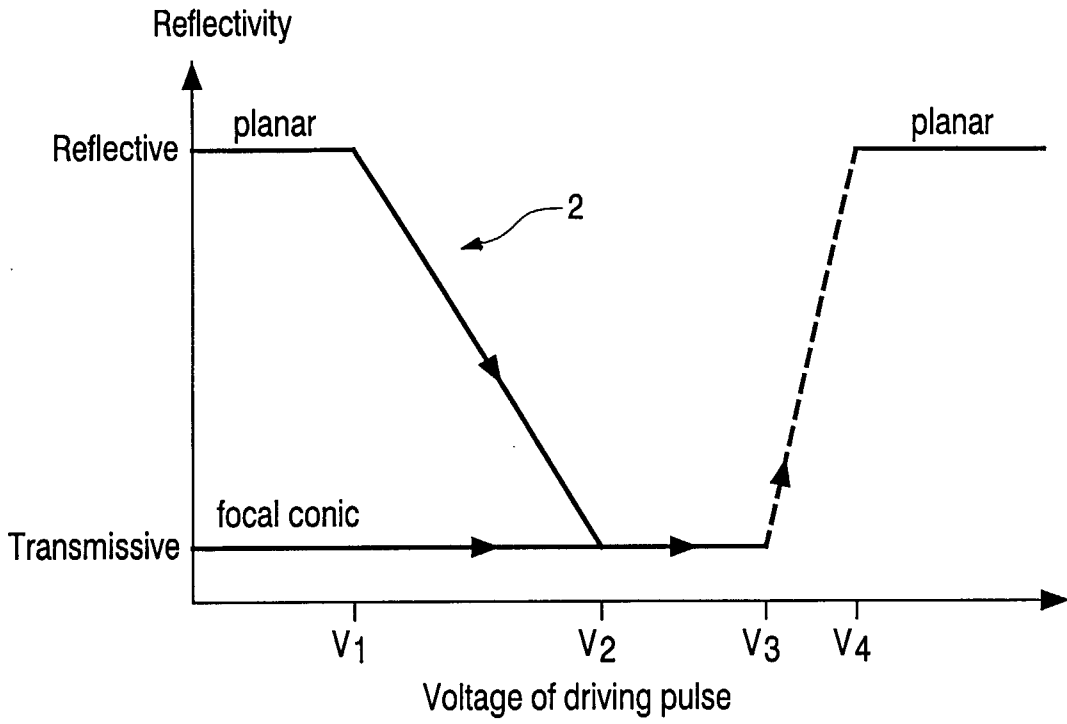


Fig.1

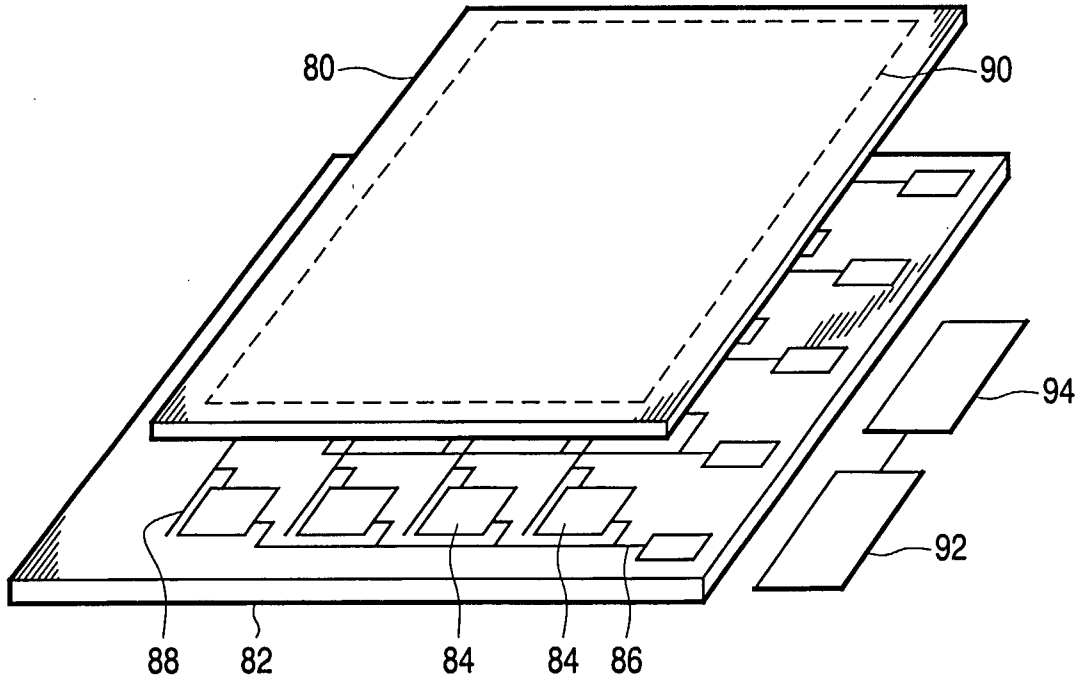
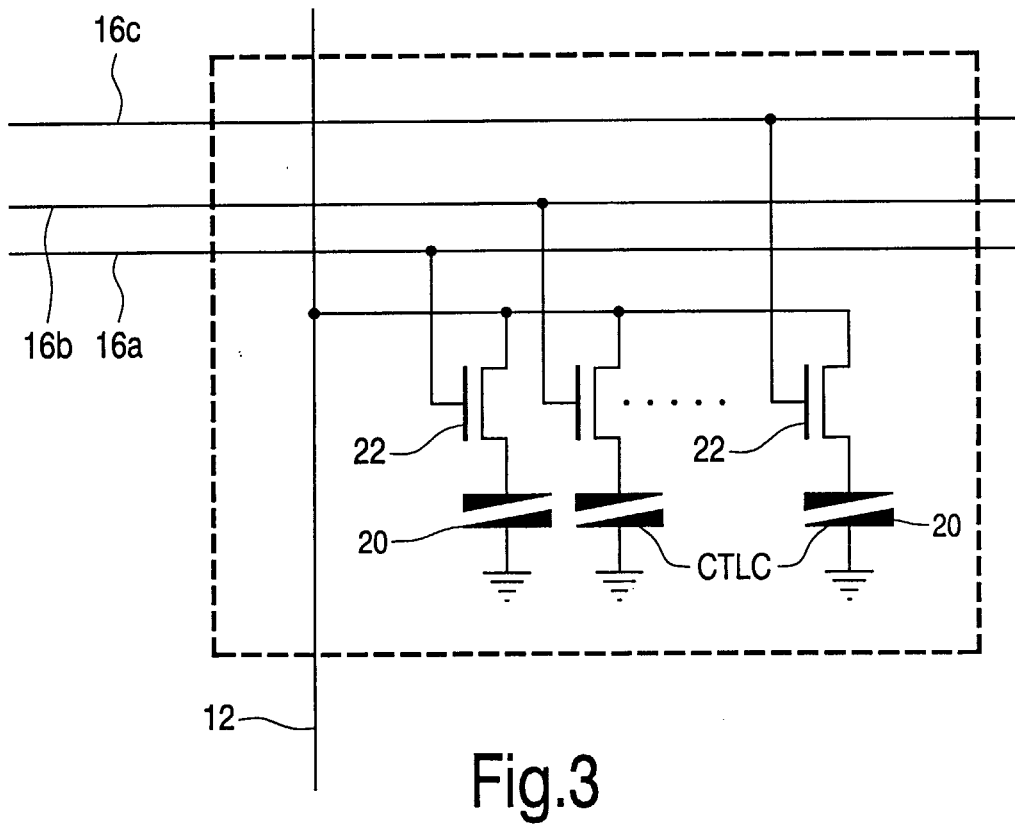
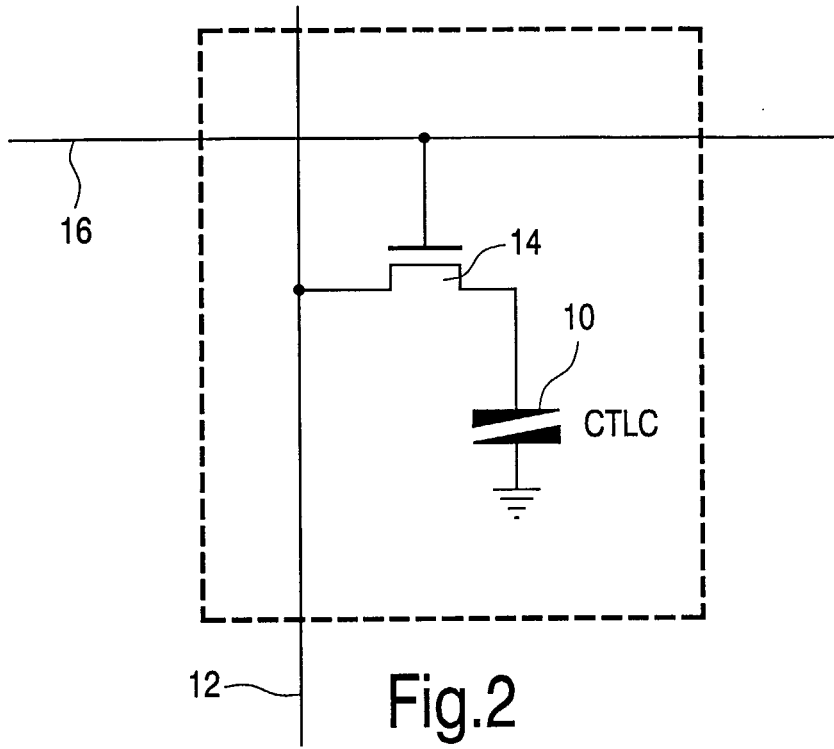


Fig.5



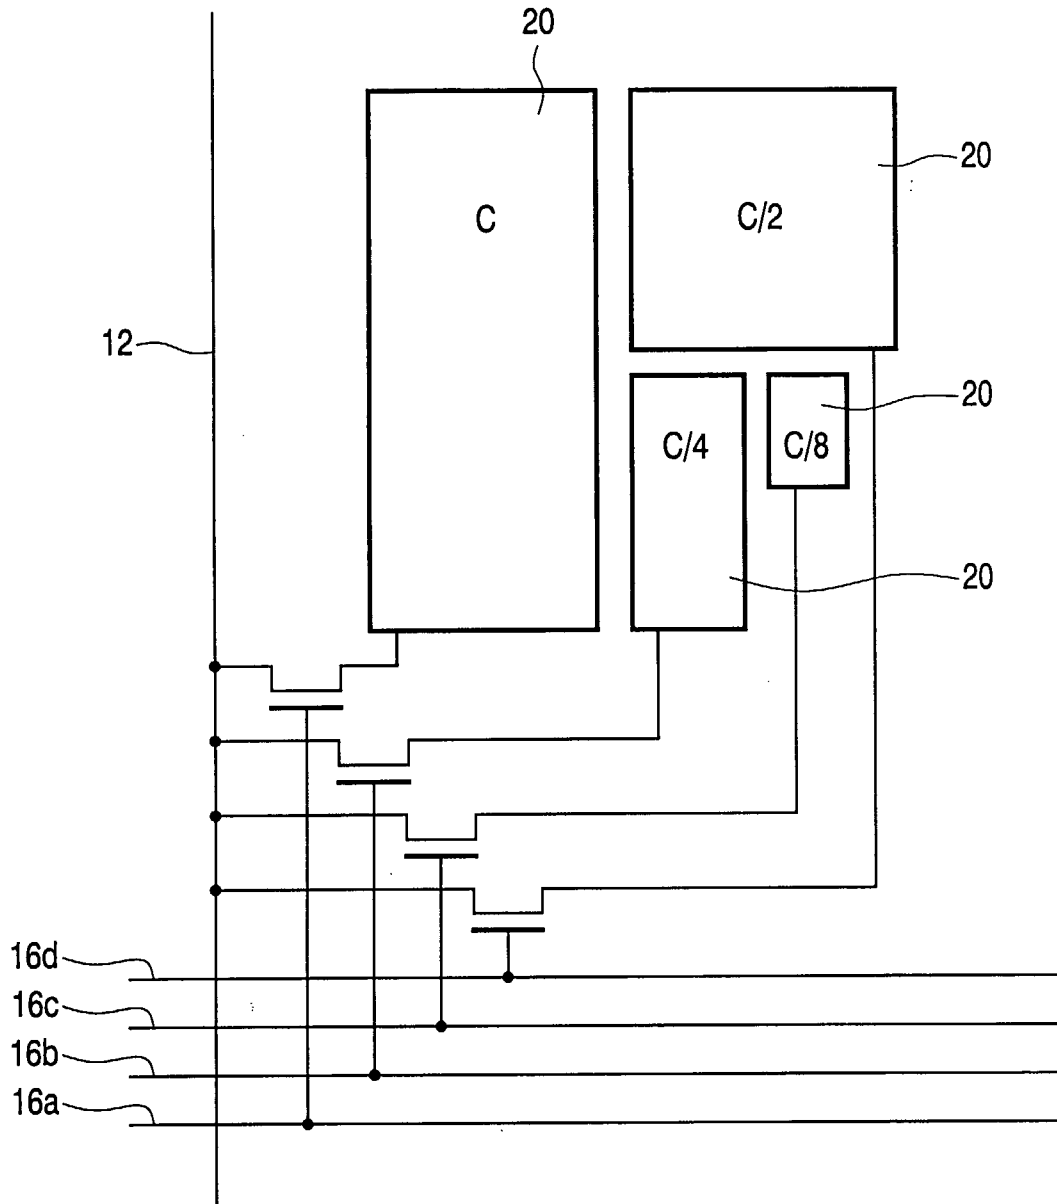


Fig.4

# INTERNATIONAL SEARCH REPORT

Int. Application No  
PCT/IB 02/01313

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 G09G3/36				
According to International Patent Classification (IPC) or to both national classification and IPC				
<b>B. FIELDS SEARCHED</b>				
Minimum documentation searched (classification system followed by classification symbols) IPC 7 G09G				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, INSPEC				
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>				
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
Y	DE 198 11 022 A (SIEMENS AG) 16 September 1999 (1999-09-16) column 6, line 41 -column 7, line 46 figures 2-6 ---	1-3,5,7, 11		
Y  A	US 5 977 944 A (KATOH KENICHI ET AL) 2 November 1999 (1999-11-02) column 20, line 29 -column 21, line 35 figures 24,25 ---	6  1,11		
Y	US 6 052 103 A (KOBAYASHI HITOSHI ET AL) 18 April 2000 (2000-04-18) cited in the application column 7, line 26 -column 8, line 24 figures 4,5 ---	1-3,5-7, 11		
-/--				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.				
<input checked="" type="checkbox"/> Patent family members are listed in annex.				
° Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;">                     "A" document defining the general state of the art which is not considered to be of particular relevance                      "E" earlier document but published on or after the international filing date                      "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)                      "O" document referring to an oral disclosure, use, exhibition or other means                      "P" document published prior to the international filing date but later than the priority date claimed                 </td> <td style="width: 50%; border: none; vertical-align: top;">                     "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention                      "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone                      "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.                      "&amp;" document member of the same patent family                 </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
Date of the actual completion of the international search  <p style="text-align: center; font-size: 1.2em;">14 June 2002</p>		Date of mailing of the international search report  <p style="text-align: center; font-size: 1.2em;">16/08/2002</p>		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer  <p style="text-align: center; font-size: 1.2em;">Farricella, L</p>		

## INTERNATIONAL SEARCH REPORT

Int      ional Application No  
PCT/IB 02/01313

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 361 981 A (SHARP KK) 4 April 1990 (1990-04-04) column 6, line 23 -column 7, line 24 column 9, line 24 -column 10, line 38 figures 8-8C ---	1,11
A	US 5 905 482 A (RAYNES EDWARD PETER ET AL) 18 May 1999 (1999-05-18) column 1, line 6 - line 8 column 1, line 29 - line 39 column 2, line 7 - line 30 column 11, line 31 - line 52 figures 14,15 ---	1,11
A	US 5 695 682 A (CHIEN LIANG-CHY ET AL) 9 December 1997 (1997-12-09) abstract -----	1,11

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IB 02/01313

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1.  As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
  
2.  As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3.  As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-14

### Remark on Protest

- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-14

An active matrix display apparatus comprising a chiral nematic liquid crystal material with the pixel subdivided in independently addressable sub-pixels and a method for driving it.

2. Claim : 15

A method for driving an active matrix display apparatus comprising a chiral nematic liquid crystal material, the driving method comprising an initialisation sequence.

## INTERNATIONAL SEARCH REPORT

 Inte Application No  
 PCT/IB 02/01313

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19811022	A	16-09-1999	DE 19811022 A1	16-09-1999
			WO 9948080 A1	23-09-1999
			EP 1062652 A1	27-12-2000
			JP 2002507774 T	12-03-2002
-----				
US 5977944	A	02-11-1999	JP 3294114 B2	24-06-2002
			JP 10069249 A	10-03-1998
			KR 239293 B1	15-01-2000
-----				
US 6052103	A	18-04-2000	JP 10105085 A	24-04-1998
-----				
EP 0361981	A	04-04-1990	JP 2096118 A	06-04-1990
			JP 2700903 B2	21-01-1998
			DE 68925172 D1	01-02-1996
			DE 68925172 T2	05-06-1996
			EP 0361981 A2	04-04-1990
			US 5499037 A	12-03-1996
-----				
US 5905482	A	18-05-1999	CA 2187521 A1	19-10-1995
			CN 1149921 A	14-05-1997
			DE 69513964 D1	20-01-2000
			DE 69513964 T2	20-04-2000
			EP 0755557 A1	29-01-1997
			WO 9527971 A1	19-10-1995
			GB 2301927 A ,B	18-12-1996
			JP 9511589 T	18-11-1997
-----				
US 5695682	A	09-12-1997	US 5437811 A	01-08-1995
			US 5384067 A	24-01-1995
			AT 179259 T	15-05-1999
			AT 209790 T	15-12-2001
			DE 69229003 D1	27-05-1999
			DE 69229003 T2	21-10-1999
			DE 69331240 D1	10-01-2002
			DE 69331240 T2	27-06-2002
			EP 0641372 A1	08-03-1995
			EP 0742915 A1	20-11-1996
			ES 2129463 T3	16-06-1999
			HK 1014022 A1	20-04-2000
			JP 3055697 B2	26-06-2000
			JP 8502837 T	26-03-1996
			JP 7507083 T	03-08-1995
			WO 9323496 A1	25-11-1993
			WO 9410260 A1	11-05-1994
			US 5691795 A	25-11-1997
			AT 178645 T	15-04-1999
			CA 2102199 A1	03-11-1992
			CN 1070744 A ,B	07-04-1993
			DE 69228874 D1	12-05-1999
			DE 69228874 T2	29-07-1999
			EP 0582656 A1	16-02-1994
			ES 2129447 T3	16-06-1999
			HK 1014023 A1	14-04-2000
			IL 101766 A	12-09-1996
			JP 6507505 T	25-08-1994
			NO 933845 A	23-12-1993
			US 5453863 A	26-09-1995
			WO 9219695 A2	12-11-1992

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 02/01313

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5695682	A	US 6104448 A	15-08-2000
		US 5847798 A	08-12-1998

专利名称(译)	双稳态手性向列型液晶显示器及其驱动方法		
公开(公告)号	<a href="#">EP1380024A1</a>	公开(公告)日	2004-01-14
申请号	EP2002720394	申请日	2002-04-10
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	皇家飞利浦电子N.V.		
[标]发明人	FISH DAVID A BIRD NEIL C		
发明人	FISH, DAVID, A. BIRD, NEIL, C.		
IPC分类号	G02F1/1343 G02F1/133 G02F1/1368 G09G3/20 G09G3/36		
CPC分类号	G09G3/3651 G09G3/2074 G09G2300/0486		
优先权	2001009015 2001-04-11 GB		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

胆甾型液晶显示器具有像素地址电路 ( 84 ) , 其具有用于接收数据信号的输入 ( 12 ) 和多个输出, 其中每个输出用于将像素驱动信号施加到液晶材料的相应部分 ( 20 ) 。并且其中每个输出的像素驱动信号可由像素地址电路独立地切换到每个输出。这提供了空间分离的子像素, 并且可以寻址多个子像素以便为每个像素提供灰度级输出。然而, 每个像素驱动信号可以是两级数字信号。