



(11) **EP 1 402 310 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
07.03.2012 Bulletin 2012/10

(51) Int Cl.:
H02M 5/458 ^(2006.01) **H05B 41/282** ^(2006.01)
G02F 1/133 ^(2006.01)

(21) Application number: **02731006.9**

(86) International application number:
PCT/KR2002/001090

(22) Date of filing: **10.06.2002**

(87) International publication number:
WO 2003/005110 (16.01.2003 Gazette 2003/03)

(54) **APPARATUS FOR SUPPLYING POWER AND LIQUID CRYSTAL DISPLAY HAVING THE SAME**

VORRICHTUNG ZUR STROMVERSORGUNG UND FLÜSSIGKRISTALL-DISPLAY MIT DIESER
VORRICHTUNG

APPAREIL D'ALIMENTATION ELECTRIQUE ET AFFICHAGE A CRISTAUX LIQUIDES DOTE D'UN
TEL APPAREIL

(84) Designated Contracting States:
DE FR GB NL

(30) Priority: **03.07.2001 KR 2001039548**
07.06.2002 KR 2002032008

(43) Date of publication of application:
31.03.2004 Bulletin 2004/14

(73) Proprietor: **SAMSUNG ELECTRONICS CO., LTD.**
Suwon-City,
Kyungki-do 442-742 (KR)

(72) Inventors:
• **LEE, Inn-Sung**
Suwon-si,
Gyeonggi-do 442-380 (KR)

• **KANG, Moon-Shik**
Seongnam-si,
Gyeonggi-do 463-767 (KR)
• **HAN, Song-Yi**
Yongin-si,
Gyeonggi-do (KR)

(74) Representative: **Dr. Weitzel & Partner**
Patentanwälte
Friedenstrasse 10
89522 Heidenheim (DE)

(56) References cited:
DE-A1- 19 903 015 GB-A- 2 353 150
JP-A- 3 293 320 JP-A- 55 015 575
US-A- 5 105 127 US-A- 5 969 484

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 402 310 B1

Description

Technical Field

[0001] The present invention relates to a liquid crystal display (LCD), and more particularly to a power supplying apparatus and a LCD having the same that reduces cost for manufacturing a large-scale LCD module and enhances power efficiency.

Background Art

[0002] A LCD monitor is usually used in a notebook computer, the LCD monitor used in the notebook computer should be supplied with a power from a battery or an external dc (direct current) power supply due to characteristics of the notebook computer.

[0003] FIG. 1 is a block diagram illustrating a conventional LCD monitor used in a desktop computer.

[0004] Referring to FIG. 1, the conventional LCD monitor used in the desktop computer includes a power input section 10 and a LCD module 20. The power input section 10 includes an AC input section 12, an ac-to-dc rectifier 14 and a dc-to-dc converter 16. The LCD module 20 includes a dc-to-ac inverter 22, a backlight unit 23, a dc-to-dc converter 24 and a LCD panel section 25.

[0005] However, as shown in FIG. 1, an external dc power supply - i.e. an adaptor - is still used for the LCD monitor of the desktop computer. An exterior of the LCD monitor used in the desktop computer does not look neat because an external power supply is equipped with the LCD monitor by connecting the external dc power supply to the LCD monitor of the desktop computer.

[0006] In addition, a power is supplied from the external power supply, and then the Power is converted into a power having a different power level appropriate for the LCD module, so that the power efficiency is reduced.

[0007] Reference is made to US-A-5 969 484 and to DE 199 03 015 A1

Objective of the invention

[0008] It is the objective of the invention to provide a power supplying apparatus as per the preamble of claim 1 respectively a LCD apparatus as per the preamble of claim 8 an adapter-free power supply with a built in dc power supply.

[0009] The said objectives are achieved by the characterizing portion of claim 1 respectively of claim 8.

Brief Description of Drawings

[0010] The above and other advantages of the present invention will become readily apparent by describing an exemplary embodiment with reference to the accompanying drawings in which:

FIG. 1 is a block diagram illustrating a LCD monitor

used in conventional desktop computer;

FIG. 2 is a block diagram illustrating a LCD according to one exemplary embodiment of the present invention;

FIG. 3 is a circuit diagram showing a first specific circuit for implementing the LCD in FIG- 2;

FIG. 4 is a circuit diagram showing a second specific circuit for implementing the LCD in FIG. 2;

FIG. 5 is a block diagram illustrating a power supplier according to one exemplary embodiment of the present invention;

FIG. 6 is a block diagram illustrating a LCD having the power supply in FIG. 5 according to one exemplary embodiment of the present invention; and

FIG. 7 is a circuit diagram showing a specific circuit for implementing the power supplier in FIG. 6.

Best Mode for Carrying Out the Invention

[0011] FIG. 2 is a block diagram illustrating a LCD according to one exemplary embodiment of the present invention;

[0012] Referring to FIG. 2, the LCD includes an AC (alternating current) input section 100 and a LCD module 200.

[0013] The AC input section 100 receives a general alternating current voltage having a current level between about 100 volts and about 240 volts and provides the general alternating current voltage to the LCD module 200. Generally, the LCD module 200 can be provided with the general alternating current voltage by putting an electric plug into a plug-socket.

[0014] The LCD module 200 includes an ac-to-dc rectifier 210, a dc-to-ac inverter 220, a backlight unit 230, a dc-to-dc voltage converting section 240 and a LCD panel 250. The LCD module 200 receives the general alternating current voltage and displays an image provided from external graphic controller (not shown).

[0015] Specifically, the AC-to-DC rectifier 210 performs a power factor correction function when converting the general alternating current voltage in range of 100-240 volts into a high direct current voltage, and provides the converted direct current voltage to both the dc-to-dc voltage converting section 240 and the dc-to-ac inverter 220.

[0016] The ac-to-dc rectifier 210 can be embodied by a diode rectifier or an active pulse-width modulated (PWM) rectifier.

[0017] The dc-to-ac inverter 220 converts the high voltage generated from the ac-to-dc rectifier 210, for example a high direct current voltage having a voltage level between about 500 volts and 600 volts, into an alternating current voltage 221 appropriate for the backlight unit and outputs the alternating current voltage 221. The dc-to-ac inverter 220 can be embodied by any kind of inverter driven under a high voltage having a voltage level between 500 volts and 600.volts except the inverter driven under a low voltage having a voltage level between 5

volts and 12 volts. For example, the dc-to-ac inverter 220 can be embodied by a royer Inverter, a push-pull Inverter, a half bridge Inverter or a full-bridge Inverter.

[0018] Because the LCD module section 200 adopts the dc-to-ac inverter 220 that converts a high direct current voltage into a alternating current voltage, the LCD according to the present invention can use a more effective transformer with smaller coil turns in comparison with the conventional LCD monitor having a transformer with a large coil turns. Further, the LCD module section 200 can use the dc-to-ac inverter 220 without a transformer, to thereby reduce the cost of manufacturing a LCD monitor.

[0019] The backlight unit 230 includes fluorescent lamps disposed below a bottom surface of a LCD panel 250, controls an optical power of the light outputted from the fluorescent lamp based on the alternating current voltage 221 provided from the dc-to-ac inverter 220, and provide the light having a controlled optical power to the bottom surface of the LCD panel 250.

[0020] The dc-to-dc voltage converting section 240 includes a dc-to-dc converter 242, a common-electrode voltage generator 244 and a gamma voltage generator 246, changes a dc voltage level of a high voltage, for example in a range between 500 volts and 600 volts, into a low dc voltage for driving a data driver, a scan driver or a LCD panel 250 of the LCD panel section 250.

[0021] Specifically, dc-to-dc voltage converting section 240 changes a high-level dc voltage into a low level dc voltage, and provide the level shifted dc voltage to the common-electrode voltage generator 244 and the gamma voltage generator 246.

[0022] The dc-to-dc voltage converter 242 is embodied by a boost converter, a buck converter, a half-bridge converter, a flyback converter, a full-bridge converter, a push-pull converter and a forward converter.

[0023] The common-electrode voltage generator 244 generates a common-electrode voltage (VCOM) based on the level shifted dc voltage from the dc-to-dc converter 242, and provide the common-electrode voltage to the LCD panel section 250. It is desirous that the level shifted dc voltage is a power source for the common-electrode voltage generator 244.

[0024] The gamma voltage generator 246 generates a gamma voltage(VDD) based on the level shifted dc voltage from the dc-to-dc converter 242, and provides the gamma voltage to the LCD panel section 250. It is desirous that the level shifted dc voltage is a gamma reference voltage.

[0025] The common-electrode voltage generator 244 and gamma voltage generator 246 are included in the dc-to-dc voltage converting section 240 includes, but it is also possible that the common-electrode voltage generator 244 and gamma voltage generator 246 are included in the LCD panel section 250.

[0026] According to one preferred embodiment of the present invention, an external dc power supply, which is used in the conventional LCD monitor for note book PC

(Personal Computer), is directly installed inside the LCD module section 200 as a part of the LCD module section 200 instead of directly connecting the external dc power supply with a LCD monitor for a desk top PC, to thereby reduce the cost for manufacturing the LCD monitor for a desk top PC.

[0027] In addition, according to one preferred embodiment of the present invention, the number of voltage converting steps decreases in comparison with that of the conventional voltage converting means.

[0028] FIG. 3 is a circuit diagram showing a first specific circuit for implementing the LCD in FIG. 2.

[0029] Referring FIG. 2 and FIG. 3, the AC input section 100 provides the general voltage having the voltage level between about 100 volts and about 240 volts to the ac-to-dc rectifier 210.

[0030] The ac-to-dc rectifier 210 includes two parallel connected diode series (D1, D2, D3 and D4), receives the general voltage, rectifies the general voltage, and provides the rectified general voltage to the dc-to-dc voltage converter 242-a.

[0031] The dc-to-dc converter 242-a is a boost converter that has a function of a power factor correction (PFC). Specifically, the dc-to-dc converter 242-a includes an inductor (L), a first MOSFET (Q1) and a capacitor (C). A first end of the inductor is connected a first end of the ac-to-dc diode rectifier. A drain of the Q is connected to a second end of the inductor (L), the drain and source of the Q1 is connected parallel with the diodes (D1, D2, D3, D4) through the inductor (L), and the source of the Q1 is connected to a second end of the ac-to-dc rectifier 210. A first end of the capacitor (C) is connected to an anode of a diode (D5) and a second end of the capacitor (C) is connected to the source of the Q1. The dc-to-dc converter 242-a raises the rectified voltage provided from the ac-to-dc rectifier 210, and provides the raised voltage to the dc-to-ac inverter 220 and a second dc-to-dc converter 242-b.

[0032] The dc-to-ac inverter 220 includes four MOSFETs (Q2, Q3, Q4 and Q5), a drain and a source of each MOSFET being connected with a diode, and a first transformer (T1). The dc-to-ac inverter 220 outputs a voltage for a backlight of a CCFL (Cold Cathode Fluorescent Lamp).

[0033] Specifically, the Q2 is connected with a diode through the drain and source of the Q2. The drain of the Q3 is connected serially to the source of the Q2, the source of the Q3 is connected a second end of the capacitor (C), and the drain and source of the Q3 is connected parallel with a diode. The drain of the Q4 is connected to the drain of the Q2, the drain and source of the Q4 is connected parallel with a diode. The drain of the Q5 is connected serially to the source of the Q4, the source of the Q5 is connected the source of the Q3, and the drain and source of the Q5 is connected parallel with a diode. A first end of the primary coil of T1 is connected with a common terminal between the Q2 and Q3, and a second end of the primary coil is connected with common

terminal between the Q4 and Q5. The secondary coil of T1 is connected to a fluorescent lamp, raises a dc voltage inputted from the primary coil base on winding number of T1, and provides the raised voltage to the fluorescent lamp.

[0034] The second dc-to-dc converter 242-b is a fly-back converter having a multiple output function, receives the raised voltage from the first dc-to-dc converter 242-a, and outputs a plurality of output voltages.

[0035] Especially, the second dc-to-dc converter 242-b includes a sixth MOSFET (Q6) which is connected to a diode through a drain and source of the Q6, a primary coil of T2 for generating a main power source, a magnetic core, a plurality of secondary coil of T2 for generating a plurality of subsidiary power source. The second dc-to-dc converter 242-b transmits a dc voltage inputted from the primary coil of T2 to the plurality of secondary coil of T2 through the magnetic core.

[0036] Preferably, the output voltage outputted through the primary coil of T2 can be used as a power source for the data driver that consumes a lot of power. The output voltage outputted through the secondary coil can be applied to the scan driver, and can be used as a gate on/off voltage (Von / Voff) for controlling turn-on or turn-off, as a reference voltage of the common-electrode voltage (Vcom) that is applied to a common-electrode line; and as a reference voltage for generating a gamma voltage.

[0037] FIG. 4 is a circuit diagram showing a second specific circuit for implementing the LCD in FIG. 2.

[0038] Referring to FIG. 2 and FIG. 4, the AC input section 100 provides the general ac voltage having the voltage level between about 100 volts and about 240 volts to the ac-to-dc rectifier 210.

[0039] The ac-to-dc rectifier 210 includes a bridge diode that converts the general ac voltage into a dc voltage, an inductor (L), a first MOSFET (Q1) that is connected parallel to the bridge diode through the inductor (L), a fifth diode (D5) and a capacitor (C). The ac-to-dc rectifier 210 includes a dc-to-dc converter, receives the general ac voltage, rectifies the general ac voltage into a dc voltage, and provides the rectified general voltage to the dc-to-ac inverter 220 and dc-to-dc voltage converter 242.

[0040] The bridge diode includes diodes (D1, D2, D3 and D4), rectifies the general ac voltage through the serially connected first and second diode (D1, D2) and third and fourth diodes (D3, D4), and changes a dc voltage level of the rectified general voltage through the dc-to-dc converter that includes a inductor (L), a first MOSFET (Q1) connected parallel to the bridge diode through the inductor (L), a fifth diode (D5) and a capacitor (C), and provides the level shifted dc voltage to the dc-to-ac inverter 220 and dc-to-dc voltage converter 242.

[0041] Especially, the ac-to-dc rectifier 210 includes a boost dc-to-dc converter that has a function of a power factor correction (PFC). Specifically, the boost dc-to-dc converter includes an inductor (L), a first MOSFET (Q1) and a capacitor (C). A first end of the inductor is connect-

ed a first end of the bridge diode. A drain and source of the Q1 is connected parallel with the bridge diodes through the inductor (L), the drain of the Q1 is connected to a second end of the inductor (L), and the source of the Q1 is connected to a second end of the bridge diode. A first end of the capacitor (C) is connected to an anode of a diode (D5) and a second end of the capacitor (C) is connected to the source of the Q1. The boost dc-to-dc converter raises the rectified voltage provided from the bridge diode in response to a control signal inputted from a gate of the Q1, and provides the raised voltage to the dc-to-ac inverter 220 and a dc-to-dc converter 242. The control signal applied to the gate of the Q1 is a detecting signal that is generated in response to a lamp tube current flowing through a fluorescent lamp. The control signal controls the raised voltage level of the boost dc-to-dc converter when detecting over-current through the fluorescent lamp.

[0042] The dc-to-ac inverter 220 includes four MOSFETs (Q2, Q3, Q4 and Q5), a drain and a source of each MOSFET being connected with a diode, and a first transformer (T1). The dc-to-ac inverter 220 outputs a voltage for a backlight

[0043] The dc-to-dc converter 242 is a flyback converter having a multiple output function, receives the raised voltage from the ac-to-dc rectifier 210, and outputs a plurality of output voltages. A detail explanation about the dc-to-ac inverter 220 will not be repeated here because the detail description about the dc-to-ac inverter 220 is already given in FIG. 3.

[0044] On the other hand, a light source for replacing the conventional CCFL lamp has been developed as a light source of a backlight used in a LCD TV. A surface light source of a fluorescent lamp type, for example, can drives the entire LCD panel by only one driving circuit, can provide a light having a more uniform brightness to the entire LCD panel than the CCFL lamp for driving the direct type backlight. As a result, the thickness of the LCD panel can be maintained thin.

[0045] However, a operation voltage increases to a voltage level more than 2.5 Kv, especially more than 3.0 Kv in proportion to an increased length of the lamp tube because a fluorescent lamp should be bent so as to cover the entire surface of the LCD panel. The operation voltage of the surface light source of a fluorescent lamp type is higher than the operation voltage of the conventional CCFL, which is about 600 - 800 volts, by about 2.5 - 5 times. Accordingly, it is difficult to drive the surface light source of a fluorescent lamp type.

[0046] In addition, an EEFL (External Electrode Fluorescent Lamp) that has external electrodes on both ends of the fluorescent lamp tube, or EIFL (External Internal electrode Fluorescent Lamp) that has an external and internal electrode on a first and second end of the fluorescent lamp tube, respectively, has been developed. However, these EEFL or EIFL also requires a higher operation voltage than the conventional CCFL.

[0047] Hereinafter, a power supply for a fluorescent

lamp that requires a high operation voltage is disclosed.

[0048] FIG. 5 is a block diagram illustrating a power supplier, especially for supplying a voltage to a load consuming a high voltage, according to one exemplary embodiment of the present invention,

[0049] Referring to FIG. 5, the power supply of the present invention includes an AC input section 100, a first voltage converting section 300, a second voltage converting section 400 and a current detecting section 600.

[0050] The AC input section 100 provides a general voltage having a voltage level between 100 volts and 240 volts to the first voltage converting section 300.

[0051] The first voltage converting section 300 is an adaptor that includes a rectifier 310 and a dc-to-dc converter 320. The first voltage converting section 300 rectifies the general ac voltage signal 101, converts the rectified signal into a dc voltage signal 321, provides the converted dc voltage signal 321 to the second voltage converting section 400, and controls a voltage level of the dc voltage signal that is outputted to the second voltage converting section 400 in response to a current detecting signal 601 provided from the current detecting section 600.

[0052] Specifically, the rectifier 310 rectifies the general ac voltage signal 101 provided from the AC input section 100, converts the rectified signal into a dc voltage signal 311, provides the converted dc voltage signal 311 to the dc-to-ac inverter 320. Preferably, the rectifier 310 is an ac-to-dc diode rectifier.

[0053] The dc-to-dc converter 320 converts a voltage level of the dc voltage signal 311 provided from the rectifier 310 into the dc voltage signal 321, provides the dc voltage signal 321 to the second voltage converting section 400, controls a voltage level of a output dc voltage signal in response to a current detecting signal 601 provided from the current detecting section 600, and outputs the controlled dc voltage signal. The dc-to-dc converter 320 can raise, lower the voltage level of the inputted dc voltage signal, or bypass the inputted dc voltage signal.

[0054] The dc-to-dc converter 320 outputs a dc voltage signal having a lower voltage level than that of a dc voltage signal outputted from the dc-to-dc converter 320 in response to the current detecting signal 601 when a larger current than a predetermined critical value is detected in the load 500. The dc-to-dc converter 320 outputs a dc voltage signal having a higher voltage level than that of a dc voltage signal outputted from the dc-to-dc converter 320 in response to the current detecting signal 601 when a smaller current than a predetermined critical value is detected in the load 500.

[0055] The second voltage converting section 400 a dc-to-ac inverter, raises or lower a voltage level of the dc voltage signal 321 provided from the dc-to-dc converter 320, converts the level shifted dc voltage signal into an ac voltage signal 401, and provides the converted ac voltage signal to the load 500.

[0056] The current detecting section 600 detects a cur-

rent level of the currents flowing in the load 500, provides a current detecting signal 601 corresponding to the detected current level to the dc-to-dc converter 320 of first voltage converting section 300.

[0057] Hereinafter, a LCD having the power supply of FIG. 5 is disclosed.

[0058] FIG. 6 is a block diagram illustrating a LCD having the power supply in FIG. 5 according to one exemplary embodiment of the present invention.

[0059] Referring to FIG. 6, the LCD according to the present invention includes an AC input section 100, a first voltage converting section 300, a second voltage converting section 400, a fluorescent lamp 510, a current detecting section 600, a third voltage converting section 700 and a LCD module 800.

[0060] The AC input section 100 provides a general alternating current voltage having a current level between about 100 volts and about 240 volts to the first voltage converting section 300. Generally, the AC input section 100 can provide the general alternating current voltage by putting an electric plug into a plug-socket

[0061] The first voltage converting section 300 is an adaptor that includes a rectifier 310 and a first dc-to-dc converter 320. The first voltage converting section 300 rectifies the general ac voltage signal 101, converts the rectified signal into a dc voltage signal 321, provides the converted dc voltage signal 321 to the second voltage converting section 400 and the third voltage converting section 700. Preferably, the rectifier 310 can be an ac-to-dc diode rectifier.

[0062] The second voltage converting section 400 includes a dc-to-ac inverter, converts the dc voltage signal provided from the dc-to-dc converter 320 of the first voltage converting section 300 into an ac voltage signal 401, and provides the converted ac voltage signal 401 to the fluorescent lamp 510.

[0063] The fluorescent lamp emits a light to the LCD module 800 in response to an ac current signal provided from the second voltage converting section 400.

[0064] The current detecting section 600 detects a current level of the lamp tube current flowing in the fluorescent lamp 510, provides a current detecting signal 601 to the dc-to-dc converter 320 of first voltage converting section 300.

[0065] The third voltage converting section 700 includes a dc-to-dc converter, converts the dc voltage provided from the first voltage converting section 300 into a plurality of dc voltage, and provides the converted plurality of dc voltage to the LCD module 800. Preferably, the dc-to-dc converter can be a flyback converter.

[0066] The LCD module 800 includes a common-electrode voltage generator 810, a gamma voltage generator 820, a data driver, a gate driver and a LCD panel 850, and displays an image in response to the dc voltage signal provided from the third voltage converting section 700.

[0067] Specifically, the common-electrode voltage generator 810 generates a common-electrode voltage

(VCOM) based on the level shifted dc voltage from the third voltage converting section 700, and outputs the common-electrode voltage to the LCD panel 850.

[0068] The gamma voltage generator 820 generates a gamma voltage(VDD) based on the level shifted dc voltage from the third voltage converting section 700, and outputs the gamma voltage to the data driver 830.

[0069] The data driver 830 produces a gamma-corrected image signal for displaying an image based on the gamma voltage provided from the gamma voltage generator 820, and provides the gamma corrected image signal to the LCD panel 850.

[0070] The gate driver 840 generates a scan signal based on a dc voltage provided from the third voltage converting section 700, preferably a gate-on/gate-off signal (Von/Voff), and outputs sequentially the generated scan signal to the LCD panel 850.

[0071] The LCD panel 850 includes a plurality of gate lines, a plurality of data lines, and a plurality of pixels. The gate lines transmit the scan signal from the gate driver 840. The data lines transmit a data voltage signal provided from the data driver 830, are intersected with the gate lines, and are insulated from the gate lines. Each pixel is formed on a region surrounded by the gate lines and data lines, is arranged in a matrix shape, and includes a TFT (Thin Film Transistor) that is connected to gate line and data line.

[0072] When the gate-on signal is applied to the gate line and then the TFT is turned on, the data voltage (Vd) provided to the data line is applied to each pixel electrode. An electric field, which is corresponding to the difference voltage between the pixel voltage applied to the pixel electrode and the VCOM applied from the common-electrode voltage generator 810, is applied to a liquid crystal capacitor, and a light transmits the liquid crystal with a transmittance corresponding to the applied electric field, so that an image is displayed.

[0073] When the fluorescent lamp consumes a high voltage, in the conventional inverter circuit raises again a voltage level of the input dc voltage by means of the buck converter, converts the raised dc voltage into an ac voltage, to thereby require 2 stages. However, according to the present invention, the high voltage that the fluorescent lamp requires can be provided even though the buck converter is not used.

[0074] In addition, according to the present invention, the convenience and efficiency for driving the fluorescent lamp can be enhanced because the inverter circuit includes only a royer inverter block but not a buck converter block, i.e. a dc-to-dc converter that is located at the front stage of the royer inverter block.

[0075] FIG. 7 is a circuit diagram showing a specific circuit for implementing the power supplier in FIG. 6.

[0076] Referring to FIG. 7, the first voltage converting section 300 includes an ac-to-dc diode rectifier 310 and a dc-to-dc converter 320. The first voltage converting section 300 rectifies the general ac voltage signal, converts the rectified signal into a dc voltage signal, provides

the converted dc voltage signal to the second voltage converting section 400 and the third voltage converting section 700.

[0077] Specifically, the ac-to-dc diode rectifier 310 includes a bridge diode having a first, second, third and fourth diodes (D1, D2, D3 and D4), rectifies the general ac voltage through the serially connected first and second diode (D1, D2) and third and fourth diodes (D3, D4), and provides the rectified dc voltage signal to the dc-to-dc converter 320.

[0078] The dc-to-dc converter 320 includes an inductor (L) of which a first end is connected to a output terminal of the ac-to-dc diode rectifier 310, a first MOSFET (Q1) connected parallel to the bridge diode through the inductor (L), a fifth diode (D5) and a capacitor (C). The dc-to-dc converter 320 smoothes the rectified voltage signal from the ac-to-dc diode rectifier 310, raises a voltage level of the smoothen voltage signal, and provides the level shifted dc voltage to the second voltage converting section 400. Preferably, the switching device Q7 can be a bipolar transistor, an emitter of Q7 is connected to a second end of the capacitor (C1), a corrector of Q7 is connected to a primary coil of a transformer (T3), and a base of Q7 is connected a output terminal of the current detecting section 600. The switching device Q7 controls the raising operation of the transformer (T3) in response to the current detecting signal 601.

[0079] The second voltage converting section 400 is a dc-to-ac inverter of a royer type, converts a dc voltage signal provided from the dc-to-dc converter 320 into an ac voltage signal, and provides the converted ac voltage signal to the fluorescent lamp 510.

[0080] Specifically, the dc voltage signal converted by the dc-to-dc converter 320 is applied to bases of each transistor (Q7, Q9), which is an input of the second voltage converting section 400, through parallel-connected resistors (R1, R2). The primary coil of a transformer (T4) having a coil-tap is connected parallel with collectors of the transistors (Q8, Q9) of which emitter is connected to the ground, and is connected parallel to a resonance capacitor (CR).

[0081] In addition, the dc voltage is applied to the coil-tap of the primary coil of transformer (T4) through an inductor (L) including a choke coil (not shown) for converting the current provided to the second voltage converting section 400 into a constant current.

[0082] The secondary coil of T4 has a winding number larger than the primary coil of T4, raises a voltage level of the voltage signal applied to the primary coil to a voltage signal having a higher voltage level, and provides the raised voltage to the fluorescent lamp connected parallel to both ends of the secondary coil of T4. A positive and negative level of the constant voltage can have the same magnitude, or the interval between a maximum and minimum voltage level can be the same.

[0083] On the other hand, a first end of the primary coil of T5 is connected to a base of the transistor (Q8), a second end of the primary coil of T5 is connected to a

base of the transistor (Q9), and the voltage applied to the primary coil of T5 is applied to the bases of transistors (Q8, Q9).

[0084] Hereinafter, the operation of the dc-to-ac inverter will be described.

[0085] First, when a dc voltage, which is a pulse signal, is applied to the dc-to-ac inverter, a current flows to the primary coil of T4 through the inductor (L). The dc voltage of a pulse shape is simultaneously applied to the base of Q8 through the first resistor (R1), and applied to the base of Q9 through the second resistor (R2). A reactance of the primary coil of T4 and the resonance capacitor can generate a LC resonance. A raised voltage is induced at both ends of the secondary coil of T4, the raised voltage level being in proportion to a ratio $N2/N1$ ($N1$: winding number of the primary coil of T4, $N2$: winding number of the secondary coil of T4). Simultaneously, a current flows at a primary coil of T5 in a reverse direction to a current flowing at a primary coil of T4.

[0086] Then, the voltage level of the second coil of T4 is raised in proportion to a winding ratio $N1'/N1$ ($N1'$: winding number of the primary coil of T5, $N1$: winding number of the primary coil of T4), and a high voltage signal with a frequency and phase synchronized with the secondary coil of T4 opposite to the primary coil of T4. The high voltage signal that has a frequency and phase synchronized with the secondary of T4 can prevent a flicker phenomenon from generating in the fluorescent lamp 510.

[0087] The fluorescent lamp 510 emits a light to the LCD module in response to the ac voltage signal provided from the second voltage converting section 400. The fluorescent lamp 510 is a fluorescent lamp that requires an operation voltage having a higher voltage level - i.e. higher than 2.5 Kv or higher than 3.0Kv- than that of the operation voltage between 500 volts and 600 volts required by the CCFL. Namely, the fluorescent lamp 510 is a fluorescent lamp that can cover the entire surface of the LCD panel when the fluorescent lamp is bended, for example a EEFL or EIFL.

[0088] The current detecting section 600 detects a current level of the currents flowing through the fluorescent lamp 510, and provides the current detecting signal 601 corresponding to the detected current level to the dc-to-dc converter 320 of the first voltage converting section 300.

[0089] Specifically, the current detecting section 600 includes a third resistor (R3), a seventh diode (D7) and an eighth diode (D8). A first end of the third resistor is connected a second end of the fluorescent lamp 510, and a second end of the third resistor (R3) is connected to the ground. A cathode of the diode (D7) is connected to the second end of the fluorescent lamp 510, and an anode of the diode (D7) is connected to the ground. A cathode of the diode (D8) is connected to the dc-to-dc converter 320, and an anode of the diode (D8) is connected to the second end of the fluorescent lamp 510.

[0090] The current detecting section 600 detects the lamp tube current outputted through the second end of

the fluorescent lamp, provides the detected lamp tube current to the base of Q7, and requests to raise or lower the voltage level of the output dc voltage of the dc-to-dc converter 320. The dc-to-dc converter 320 raises or lowers the voltage level of the output dc voltage based on the current detecting signal 601 provided from the current detecting section 600, and the controlled output dc voltage is provided to the fluorescent lamp 510 through the dc-to-ac inverter 400.

[0091] A detail description about a third voltage converting section 700 is not repeated because the third voltage converting section 700 is the same as the dc-to-dc converter 242 of FIG. 4.

[0092] As mentioned above, according to the present invention, the first voltage converting section 300 - i.e. an adaptor - converts the commercial ac voltage inputted from the AC input section 100 into a dc voltage having a voltage level between about 150 volts and 250 volts, and into a dc voltage having a voltage level about 12 volts.

The converted dc voltage having a voltage level between about 150 volts and 250 volts is used as a voltage source for driving a backlight, and the converted dc voltage having a voltage level about 12 volts is used as a voltage source for driving a LCD panel.

[0093] The royer inverter of the dc-to-ac inverter 400 raises the dc voltage having a voltage level between about 150 volts and 250 volts into a higher ac voltage - i.e. about ac 3 Kv - that is a driving voltage of the fluorescent lamp consuming a high voltage. The current of the fluorescent lamp can be controlled by varying the output voltage - i.e. between about 150 volts and about 200 volts - of the first voltage converting section 300.

[0094] According to the present invention, a relatively high dc voltage is converted into a high ac voltage in the dc-to-ac inverter 400, and the coil winding ratio - i.e. the ratio $N1/N2$ of the transformer (T4) located at a royer inverter of the dc-to-ac inverter 400 - is several tens times, so that it does not require a transformer having a high winding number.

[0095] In addition, according to the present invention, it can solve an excessive heating problem because a relatively high voltage, for example between 150 volts and 250 volts, is applied to a power line of the dc-to-ac inverter 400 to reduce a current of the dc-to-ac inverter 400.

[0096] In addition, the dc-to-dc converter 320 of the first voltage converting section 300 directly receives a current feedback signal - i.e. current detecting signal 601 -, and a buck converter can be removed while the dc-to-ac inverter is used, so that it can enhance power efficiency of the power supply according to the present invention.

[0097] As mentioned above, according to the present invention, a load can be supplied with a power without lowering the power efficiency even though the load consuming power requires a high voltage, and the buck converter can be removed from the inverter circuit that converts a dc voltage into an ac voltage, so that a manufacturing cost can be reduced.

[0098] In addition, according to the present invention, a total cost for manufacturing the LCD monitor can be reduced by removing an external dc power supply, a user can install and carry the LCD monitor conveniently, and working environment can be maintained clean.

[0099] In addition, according to the present invention, when manufacturing the LCD monitor used for a desktop PC, a number of voltage converting steps can be decreased in comparison with the conventional voltage converting steps of the LCD monitor that uses the conventional power supply used for a notebook computer, to thereby enhance the efficiency of the power supply.

[0100] In addition, according to the present invention, a transformer with a small winding number can be substituted for the conventional transformer with a large winding number by applying a high voltage to an inverter circuit.

[0101] In addition, according to the present invention, an inverter circuit without a transformer can be implemented, and the conventional dc-to-dc converter (power module converter) can be used without any modification of a circuit of the conventional dc-to-dc converter.

[0102] In addition, according to the present invention, a high dc voltage is converted to a high ac voltage, and the converted high ac voltage is applied to the dc-to-ac inverter, so that it is not required a transformer having a large winding number in the royer inverter of the dc-to-ac inverter.

Claims

1. A power supplying apparatus, comprising:

a first voltage converting means (300) for converting a first alternating current voltage (101) into a first direct current voltage (311), and for changing a voltage level of the first direct current voltage (311) into a second direct current voltage (321) having a higher voltage level than the voltage level of the first direct current voltage (311);

a second voltage converting means (400) for converting the second direct current voltage (321) into a second alternating current voltage; and

a current detector (600) for detecting a current flowing through a first load (500), and for providing a current detecting signal (601) to the first voltage converting means (300) so that the first voltage converting means (300) provides a constant direct current output voltage

characterised in that

the second voltage converting means (400) is adapted for changing a voltage level of the second alternating current voltage into a third alternating current voltage (401) having a higher voltage level than the voltage level of the second

alternating current voltage to provide the third alternating current voltage (401) to the first load (501), and

the first voltage converting means (300) is further adapted to generate a third direct current voltage having a voltage level lower than the voltage level of the first direct current voltage (311) and provides the third direct current voltage to a second load, by receiving the first alternating current voltage (101), and further comprising a third voltage converting means (700) for providing the third direct current voltage to the second load.

2. The power supplying apparatus of claim 1, wherein the first voltage converting means (300) comprises:

a rectifying means (310) for rectifying the first alternating current voltage (101) into the first direct current voltage (311); and

a dc-to-dc converter (320) for converting the first direct current voltage (311) into the second direct current voltage (321) to provide the second direct current voltage (321) to the second voltage converting means (400), wherein said dc-to-dc converter (320) varies the voltage level of the second direct current voltage (321) in response to the detected current signal (601).

3. The power supplying apparatus of claim 1, wherein the second voltage converting means (400) is a royer inverter.

4. The power supplying apparatus of claim 1, wherein the second voltage converting means (400) comprises:

a transformer (T4) including a primary coil and a secondary coil, the primary coil of the transformer (T4) being connected to an output terminal of the first voltage converting means (300), and the secondary coil of the transformer being connected the first load (500);

a resonance capacitor (CR), connected in parallel with the primary coil, for forming an LC resonance circuit;

a first transistor (Q8), a base of the first transistor (Q8) being connected to the output terminal of the first voltage converting means (300), a collector of the first transistor (Q8) being connected to a first end of the resonance capacitor (CR), and an emitter of the first transistor (Q8) being connected to a ground, for driving the transformer (T4);

a second transistor (Q9), a base of the second transistor (Q9) being connected to the output terminal of the first voltage converting means

- (300), a collector of the second transistor (Q8) being connected to a second end of the resonance capacitor (CR), and an emitter of the second transistor (Q9) being connected to the ground, for driving the transformer. 5
5. The power supplying apparatus of claim 4, wherein the second voltage converting means (400) further comprises a first resistor (R1), a first end of the first resistor (R1) being connected to the base of the first transistor (Q8), and a second end of the first resistor (R1) being connected to the output terminal of the first voltage converting means (300). 10
6. The power supplying apparatus of claim 45, wherein the second voltage converting means (400) further comprises a second resistor (R2), a first end of the second resistor (R2) being connected to the base of the second transistor (Q9), and a second end of the second resistor (R2) being connected to the output terminal of the first voltage converting means (300). 15 20
7. The power supplying apparatus of claim 1, wherein the first alternating current voltage (101) is a commercial alternating current voltage, and the second direct current voltage (321) has a voltage level between about 150 volts and about 200 volts. 25
8. An LCD apparatus, comprising: 30
- the power supplying apparatus according to one of the claims 1 to 6, wherein the second load is an LCD panel (850) for displaying an image based on a driving signal from a plurality of LCD panel drivers (830; 840); wherein the first load is a backlight unit (510), disposed under the LCD panel (850), for providing a light to the LCD panel (850); wherein the third voltage converting means (700) is adapted for providing the third direct current voltage to each of the LCD panel drivers (830; 840). 35 40
9. The LCD apparatus of claim 8, wherein the first alternating current voltage (101) is a commercial alternating current voltage, the second direct current voltage (321) has a voltage level between about 150 volts and about 200 volts, and a voltage level of the second directing current voltage (321) applied to the third voltage converting means (700) is smaller than the voltage level of the second directing current voltage (321) applied to the second voltage converting means (400). 45 50

Patentansprüche

1. Stromversorgungsvorrichtung, umfassend:

ein erstes Spannungswandlungsmittel (300), um eine erste Wechselstromspannung (101) in eine erste Gleichstromspannung (311) umzuwandeln und um einen Spannungspegel der ersten Gleichstromspannung (311) zu einer zweiten Gleichstromspannung (321) zu ändern, die einen höheren Spannungspegel aufweist als der Spannungspegel der ersten Gleichstromspannung (311); ein zweites Spannungswandlungsmittel (400), um die zweite Gleichstromspannung (321) in eine zweite Wechselstromspannung umzuwandeln; und einen Stromdetektor (600), um einen Strom nachzuweisen, der durch eine erste Last (500) fließt, und um ein Stromdetektionssignal (601) an das erste Spannungswandlungsmittel (300) zu liefern, so dass das erste Spannungswandlungsmittel (300) eine konstante Gleichstromausgabespannung liefert, **dadurch gekennzeichnet, dass** das zweite Spannungswandlungsmittel (400) geeignet ist, einen Spannungspegel der zweiten Wechselstromspannung in eine dritte Wechselstromspannung (401) umzuwandeln, die einen höheren Spannungspegel aufweist als der Spannungspegel der zweiten Wechselstromspannung, um die dritte Wechselstromspannung (401) an die erste Last (500) zu liefern, und das erste Spannungswandlungsmittel (300) ferner geeignet ist, eine dritte Gleichstromspannung zu erzeugen, die einen niedrigeren Spannungspegel aufweist als der Spannungspegel der ersten Gleichstromspannung (311), und die dritte Gleichstromspannung an eine zweite Last liefert, indem es die erste Wechselstromspannung (101) empfängt, und ferner ein drittes Spannungswandlungsmittel (700) vorgesehen ist, um die dritte Gleichstromspannung an die zweite Last zu liefern.

2. Stromversorgungseinrichtung nach Anspruch 1, wobei das erste Spannungswandlungsmittel (300) umfasst:

ein Gleichrichtermittel (310), um die erste Wechselstromspannung (101) in die erste Gleichstromspannung (311) umzuwandeln; und einen Gleichstrom-Gleichstrom-Wandler (320) zum Umwandeln der ersten Gleichstromspannung (311) in die zweite Gleichstromspannung (321), um die zweite Gleichstromspannung (321) an das zweite Spannungswandlungsmittel (400) zu liefern, wobei der Gleichstrom-Gleichstrom-Wandler (320) den Spannungspegel der zweiten Gleichstromspannung (321) als Reaktion auf das Stromdetektionssignal (601) variiert.

3. Stromversorgungseinrichtung nach Anspruch 1, wobei das zweite Spannungswandlungsmittel (400) ein Royer-Inverter ist.

4. Stromversorgungseinrichtung nach Anspruch 1, wobei das zweite Spannungswandlungsmittel (400) umfasst:

einen Transformator (T4), der eine Primärspule und eine Sekundärspule aufweist, wobei die Primärspule des Transformators (T4) mit einem Ausgangsanschluss des ersten Spannungswandlungsmittels (300) verbunden ist und die Sekundärspule des Transformators mit der ersten Last (500) verbunden ist;
einen Resonanzkondensator (CR), der parallel mit der Primärspule geschaltet ist, um einen LC-Resonanzkreis zu bilden;
einen ersten Transistor (Q8), wobei eine Basis des ersten Transistors (Q8) mit dem Ausgabeanschluss des ersten Spannungswandlungsmittels (300) verbunden ist, wobei ein Kollektor des ersten Transistors (Q8) mit einem ersten Ende des Resonanzkondensators (CR) verbunden ist und wobei ein Emittter des ersten Transistors (Q8) mit einer Erde verbunden ist, um den Transformator (T4) anzutreiben;
einen zweiten Transistor (Q9), wobei eine Basis des zweiten Transistors (Q9) mit dem Ausgabeanschluss des ersten Spannungswandlungsmittels (300) verbunden ist, wobei ein Kollektor des zweiten Transistors (Q9) mit einem zweiten Ende des Resonanzkondensators (CR) verbunden ist und wobei ein Emittter des zweiten Transistors (Q9) mit der Erde verbunden ist, um den Transformator (T4) anzutreiben.

5. Stromversorgungseinrichtung nach Anspruch 4, wobei das zweite Spannungswandlungsmittel (400) ferner einen ersten Widerstand (R1) umfasst, wobei ein erstes Ende des ersten Widerstands (R1) mit der Basis des ersten Transistors (Q8) verbunden ist und ein zweites Ende des ersten Widerstands (R1) mit dem Ausgabeanschluss des ersten Spannungswandlungsmittels (300) verbunden ist.

6. Stromversorgungseinrichtung nach Anspruch 5, wobei das zweite Spannungswandlungsmittel (400) ferner einen zweiten Widerstand (R2) umfasst, wobei ein erstes Ende des zweiten Widerstands (R2) mit der Basis des zweiten Transistors (Q9) verbunden ist und ein zweites Ende des zweiten Widerstands (R2) mit dem Ausgabeanschluss des ersten Spannungswandlungsmittels (300) verbunden ist.

7. Stromversorgungseinrichtung nach Anspruch 1, wobei die erste Wechselstromspannung (101) eine kommerzielle Wechselstromspannung ist und die

zweite Gleichstromspannung (321) einen Spannungspegel zwischen etwa 150 Volt und etwa 200 Volt aufweist.

8. LCD-Vorrichtung, umfassend:

die Stromversorgungseinrichtung nach einem der Ansprüche 1 bis 6, wobei die zweite Last eine LCD-Tafel (850) zum Anzeigen eines Bilds auf der Basis eines Treibersignals von einer Vielzahl von LCD-Tafel-Treibern (830; 840) ist; wobei die erste Last eine Hintergrundbeleuchtungseinheit (510) ist, die unter der LCD-Tafel (850) angeordnet ist, um Licht an die LCD-Tafel (850) zu liefern;
wobei das dritte Spannungswandlungsmittel (700) geeignet ist, die dritte Gleichstromspannung an jeden der LCD-Tafel-Treiber (830; 840) zu liefern.

9. LCD-Vorrichtung nach Anspruch 8, wobei die erste Wechselstromspannung (101) eine kommerzielle Wechselstromspannung ist, wobei die zweite Gleichstromspannung (321) einen Spannungspegel zwischen etwa 150 Volt und etwa 200 Volt aufweist und wobei ein Spannungspegel der zweiten Gleichstromspannung (321), die an das dritte Spannungswandlungsmittel (700) angelegt wird, kleiner ist als der Spannungspegel der zweiten Gleichstromspannung (321), die an das zweite Spannungswandlungsmittel (400) angelegt wird.

Revendications

1. Un appareil d'alimentation électrique, comprenant :

un premier moyen de conversion de tension (300) pour convertir une première tension de courant alternatif (101) en une première tension de courant continu (311), et pour changer un niveau de tension de la première tension de courant continu (311) en une deuxième tension de courant continu (321) ayant un niveau de tension supérieur au niveau de tension de la première tension de courant continu (311).

un deuxième moyen de conversion de tension (400) pour convertir la deuxième tension de courant continu (321) en une deuxième tension de courant alternatif ; et

un détecteur de courant (600) pour détecter un flux de courant au travers d'une première charge (500), et pour fournir un signal de détection de courant (601) au premier moyen de conversion de tension (300) pour que le premier moyen de conversion de tension (300) fournisse une tension de sortie de courant continu constante

caractérisé en ce que

- le deuxième moyen de conversion de tension (400) soit adapté pour changer un niveau de tension de la deuxième tension de courant alternatif en une troisième tension de courant alternatif (401) ayant un niveau de tension supérieur au niveau de tension de la deuxième tension de courant alternatif pour fournir la troisième tension de courant alternatif (401) à la première charge (501), et
- le premier moyen de conversion de tension (300) est de plus adapté pour générer une troisième tension de courant continu ayant un niveau de tension inférieur au niveau de tension de la première tension de courant continu (311) et fournit la troisième tension de courant continu à une deuxième charge, en recevant la première tension de courant alternatif (101), et comprenant également un troisième moyen de conversion de tension (700) pour fournir la troisième tension de courant continu à la deuxième charge.
2. L'appareil d'alimentation électrique de la revendication 1, où le premier moyen de conversion de tension (300) comprend :
- un moyen de rectification (310) pour rectifier la première tension de courant alternatif (101) en la première tension de courant continu (311) ; et un convertisseur continu - continu (320) pour convertir la première tension de courant continu (311) en deuxième tension de courant continu (321) pour fournir la deuxième tension de courant continu (321) au deuxième moyen de conversion de tension (400), où ledit convertisseur continu - continu (320) varie le niveau de tension de la deuxième tension de courant continu (321) en réponse au signal de courant détecté (601).
3. L'appareil d'alimentation électrique de la revendication 1, où le deuxième moyen de conversion de tension (400) est un convertisseur Royer.
4. L'appareil d'alimentation électrique de la revendication 1, où le deuxième moyen de conversion de tension (400) comprend :
- un transformateur (T4) comprenant une bobine primaire et une bobine secondaire, la bobine primaire du transformateur (T4) étant connectée à une borne de sortie du premier moyen de conversion de tension (300), et la bobine secondaire du transformateur étant connectée à la première charge (500) ; un condensateur à résonnance (CR), connecté en parallèle à la bobine primaire, pour former un circuit de résonnance LC ;
- un premier transistor (Q8), une base du premier transistor (Q8) étant connectée à la borne de sortie du premier moyen de conversion de tension (300), un collecteur du premier transistor (Q8) étant connecté à une première extrémité du condensateur à résonnance (CR), et un émetteur du premier transistor (Q8) étant connecté à la terre, pour entraîner le transformateur (T4) ;
- un deuxième transistor (Q9), une base du deuxième transistor (Q9) étant connectée à la borne de sortie du premier moyen de conversion de tension (300), un collecteur du deuxième transistor (Q9) étant connecté à une deuxième extrémité du condensateur à résonnance (CR), et un émetteur du deuxième transistor (Q9) étant connecté à la terre, pour entraîner le transformateur.
5. L'appareil d'alimentation électrique de la revendication 4, où le deuxième moyen de conversion de tension (400) comprend également un premier résistor (R1), une première extrémité du premier résistor (R1) étant connectée à la base du premier transistor (Q8), et une deuxième extrémité du premier résistor (R1) étant connectée à la borne de sortie du premier moyen de conversion de tension (300).
6. L'appareil d'alimentation électrique de la revendication 5, où le deuxième moyen de conversion de tension (400) comprend également un deuxième résistor (R2), une première extrémité du deuxième résistor (R2) étant connectée à la base du deuxième transistor (Q9), et une deuxième extrémité du deuxième résistor (R2) étant connectée à la borne de sortie du premier moyen de conversion de tension (300).
7. L'appareil d'alimentation électrique de la revendication 1, où la première tension de courant alternatif (101) est une tension de courant alternatif commercial, et la deuxième tension de courant continu (321) possède un niveau de tension entre environ 150 volts et environ 200 volts.
8. Un appareil LCD, comprenant :
- l'appareil d'alimentation électrique selon l'une des revendications 1 à 6, où la deuxième charge est un panneau LCD (850) pour afficher une image basée sur un signal d'entraînement à partir d'une pluralité de pilotes de panneau LCD (830 ; 840) ; où la première charge est une unité de rétro éclairage (510), disposée sous le panneau LCD (850), pour fournir une lumière au panneau LCD (850) ; où le troisième moyen de conversion de tension (700) est adapté pour fournir la troisième tension

de courant continu à chacun des pilotes de panneau LCD (830 ; 840).

9. L'appareil LCD de la revendication 8, où la première tension de courant alternatif (101) est une tension de courant alternatif commercial, la deuxième tension de courant continu (321) possède un niveau de tension entre environ 150 volts et environ 200 volts, et un niveau de tension de la deuxième tension de courant continu (321) appliquée au troisième moyen de conversion de tension (700) est inférieur au niveau de tension de la deuxième tension de courant continu (321) appliquée au deuxième moyen de conversion de tension (400).

5

10

15

20

25

30

35


40

45

50

55

FIG. 1
(PRIOR ART)

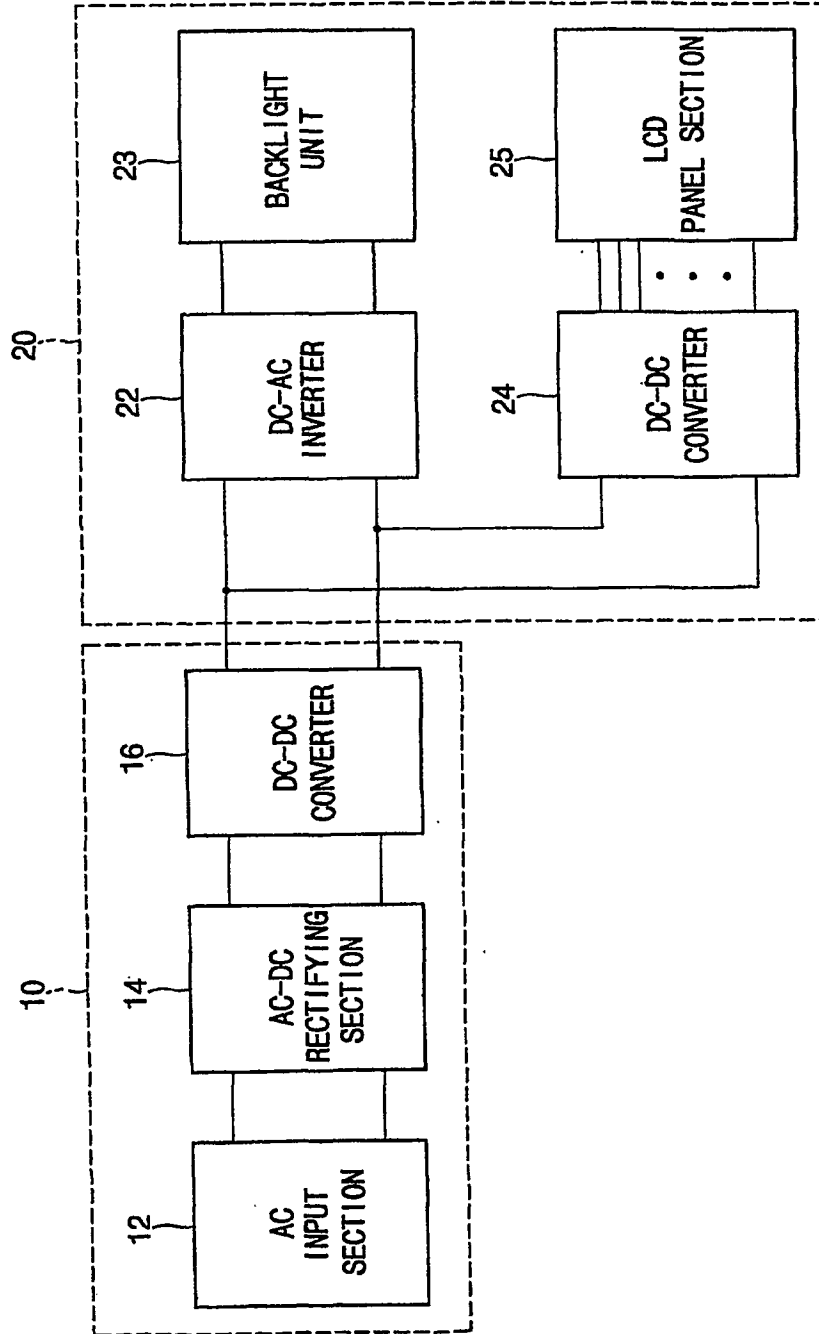

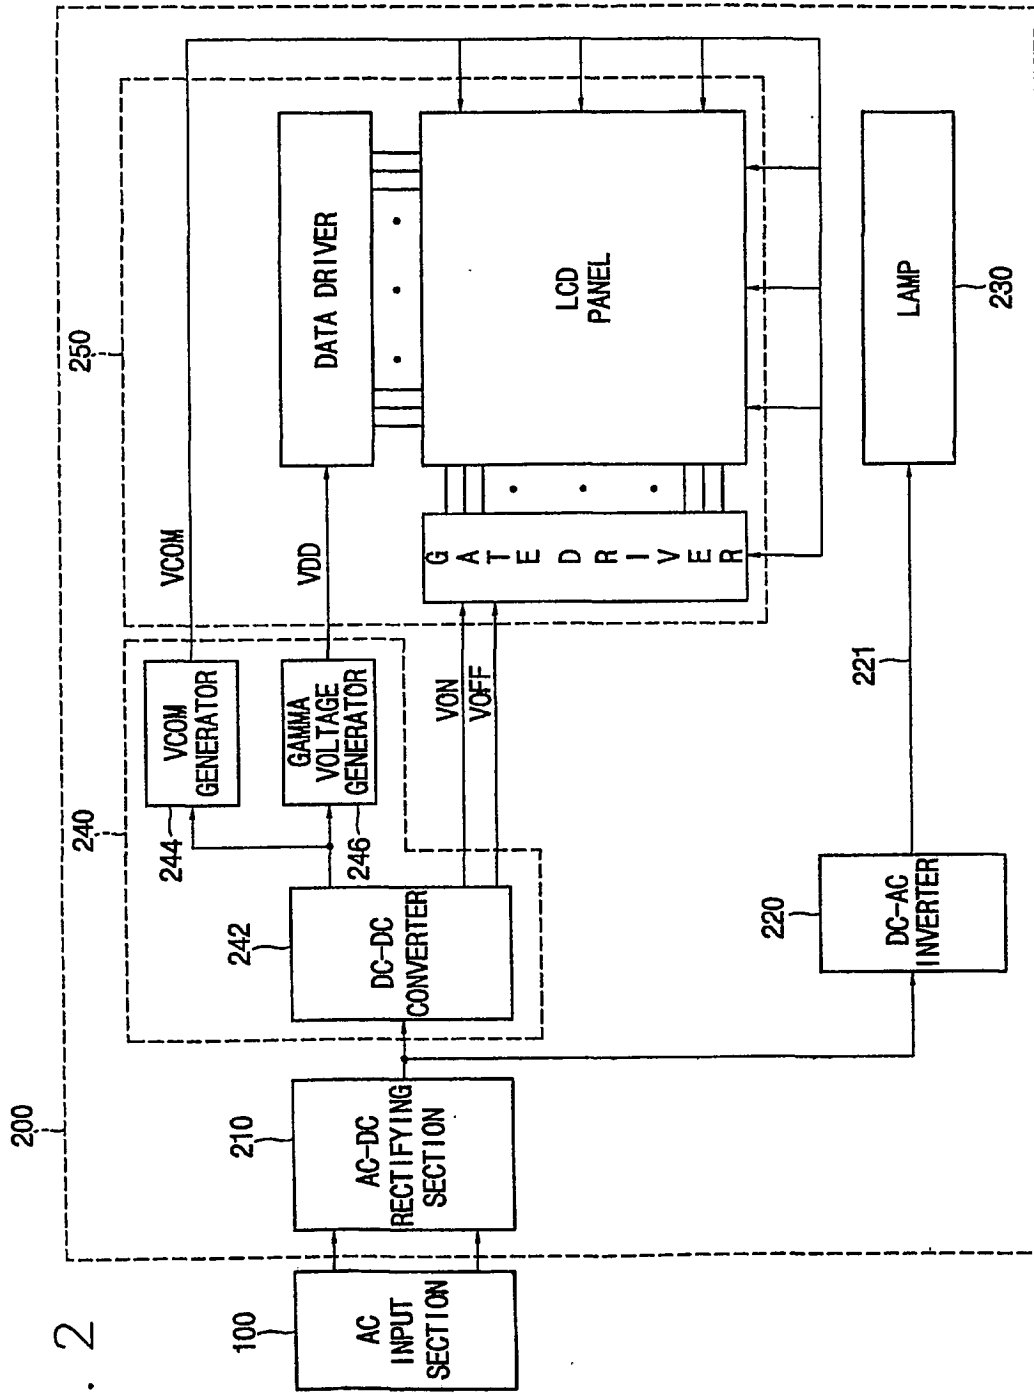


FIG. 2

FIG. 3

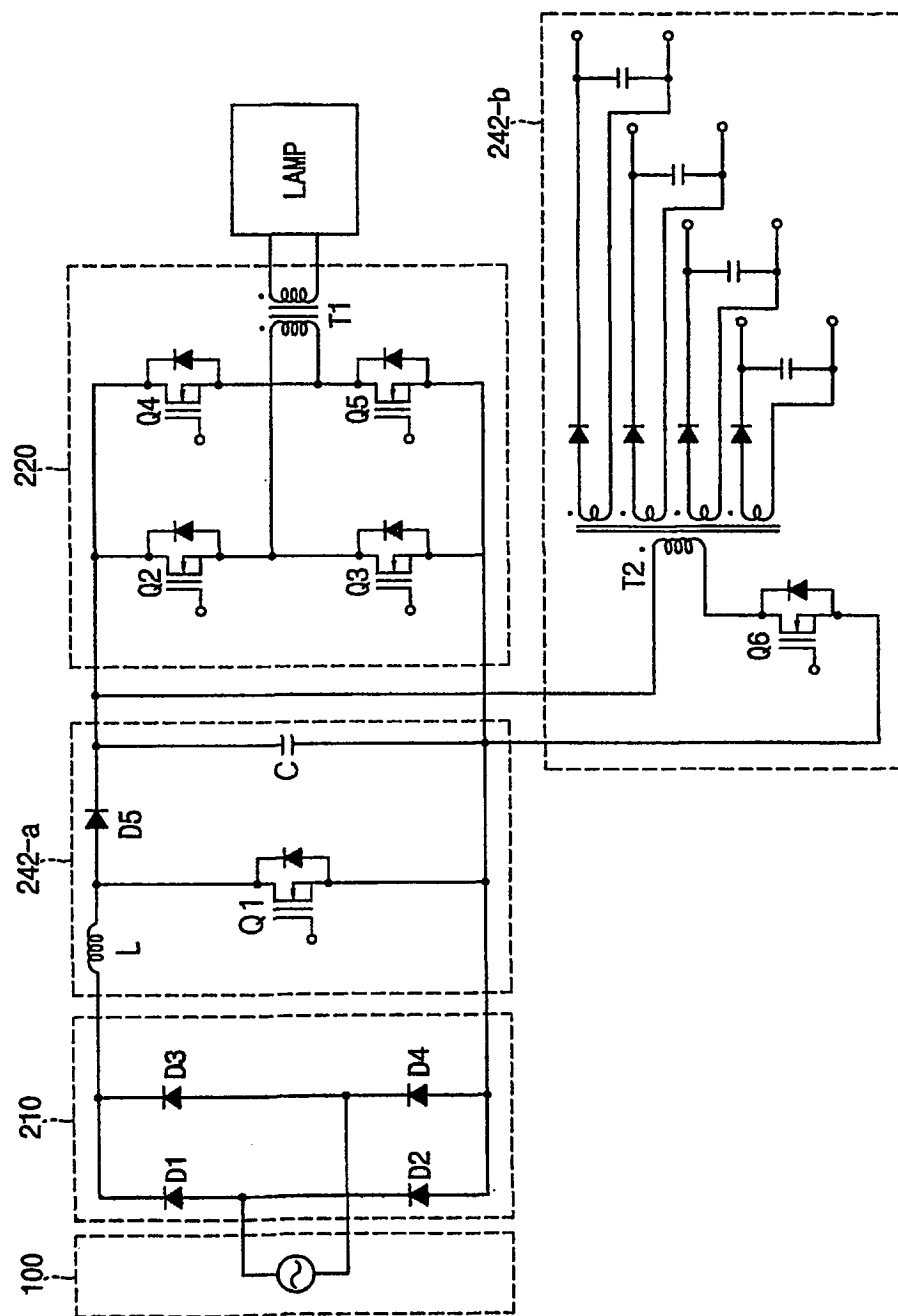


FIG. 4

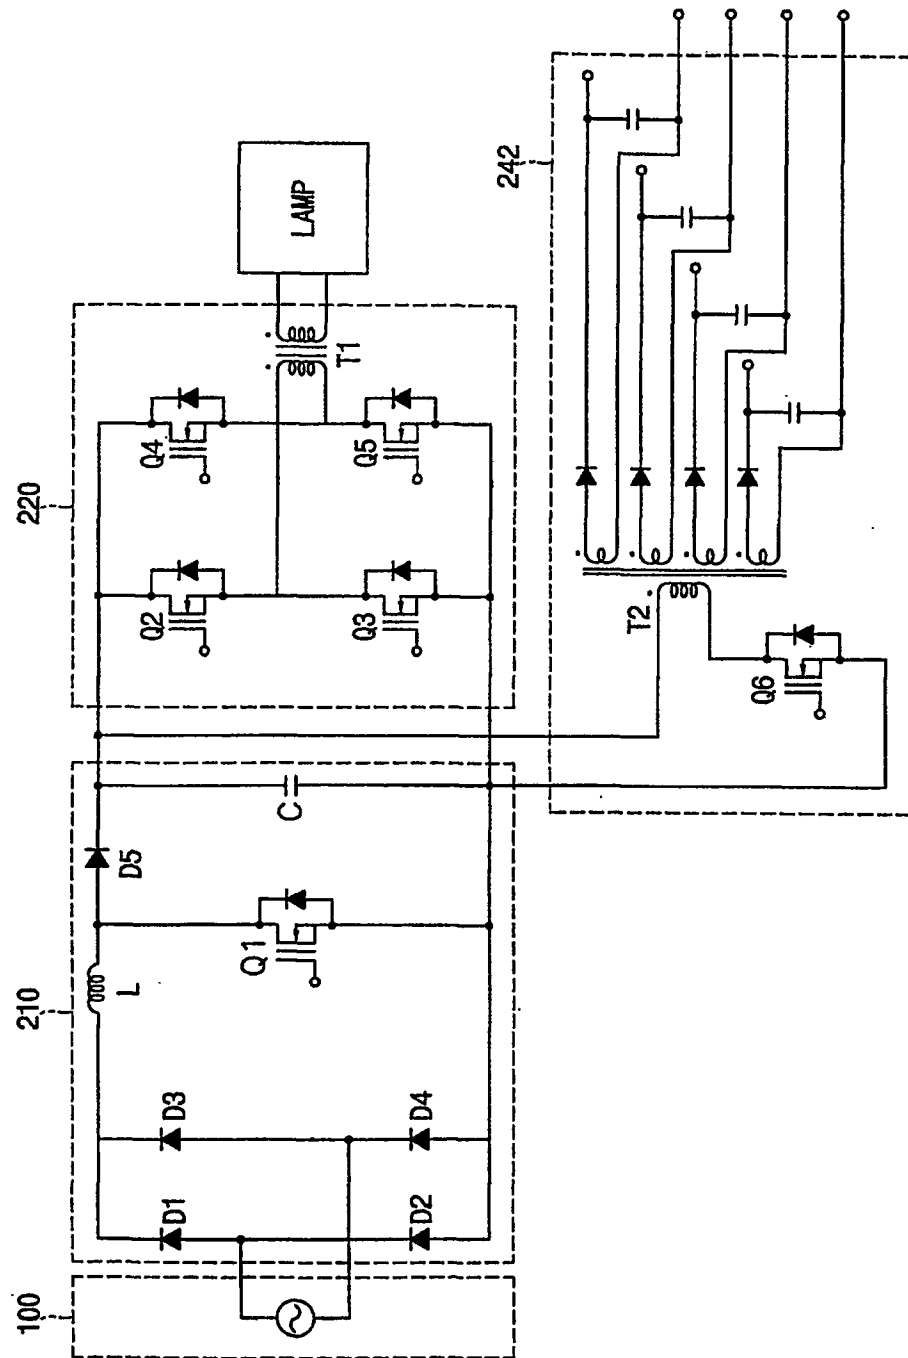
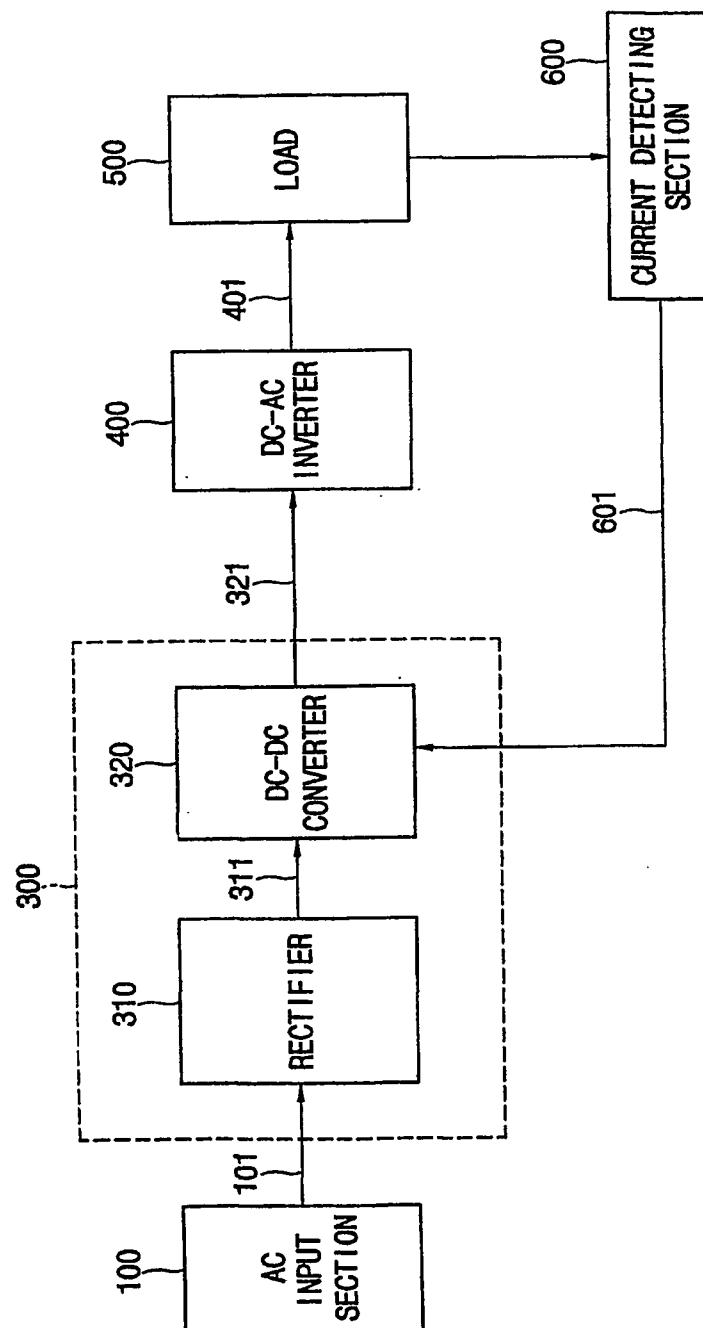


FIG. 5




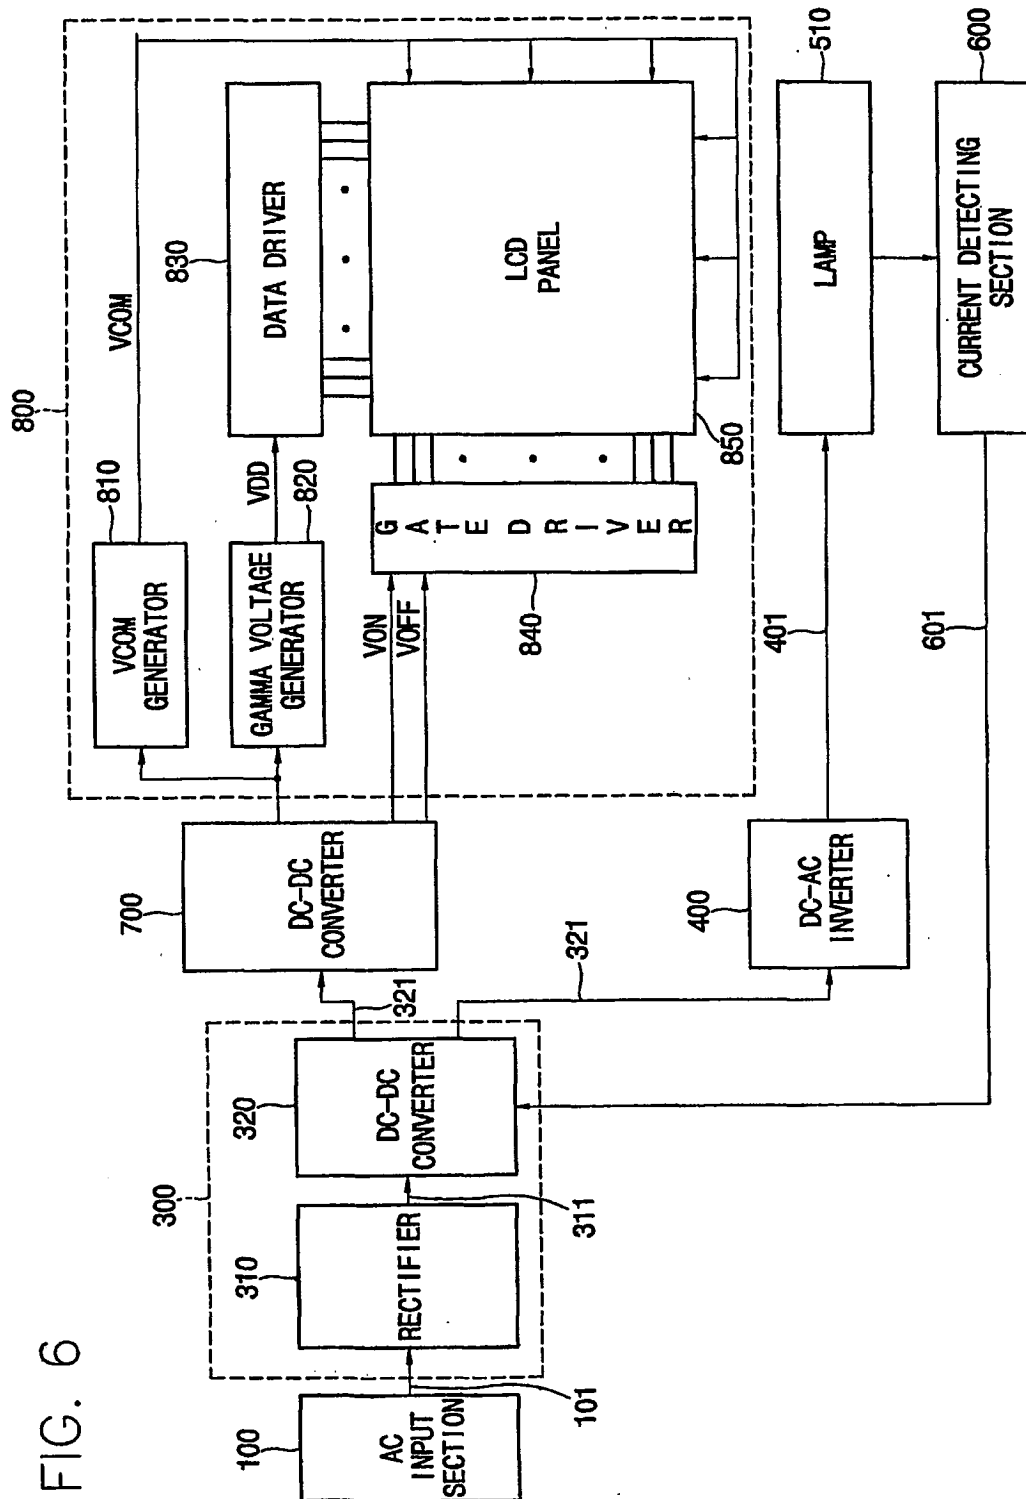


FIG. 7

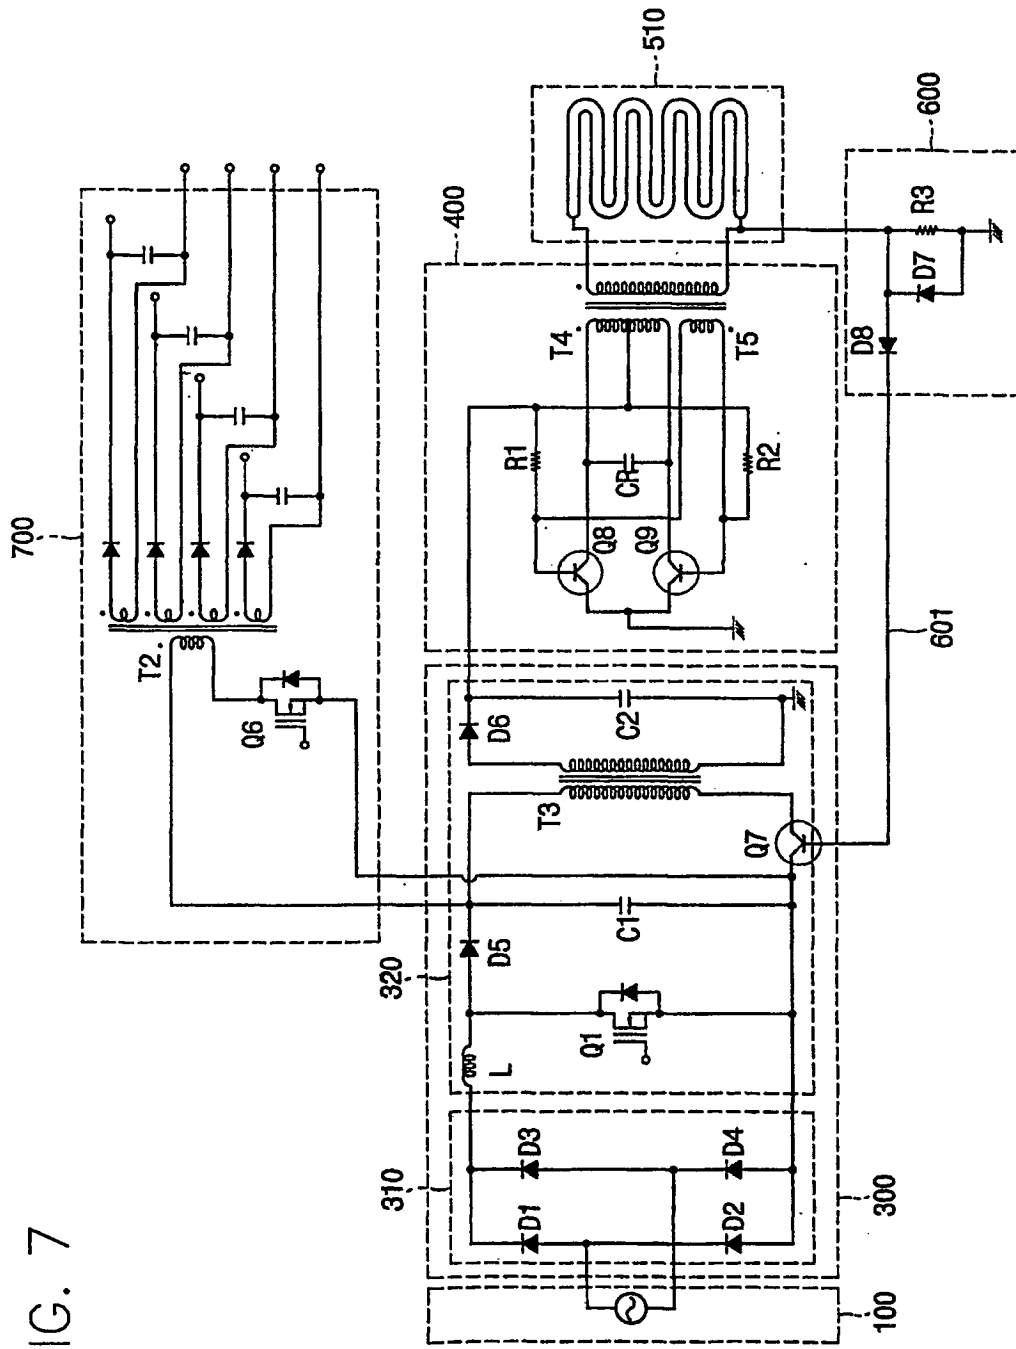

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5969484 A [0007]
- DE 19903015 A1 [0007]

专利名称(译)	供电装置和具有该装置的液晶显示器		
公开(公告)号	EP1402310A4	公开(公告)日	2010-02-17
申请号	EP2002731006	申请日	2002-06-10
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	LEE INN SUNG KANG MOON SHIK HAN SONG YI		
发明人	LEE, INN-SUNG KANG, MOON-SHIK HAN, SONG-YI		
IPC分类号	G02F1/133 H02M5/458 G09G3/34 G09G3/36 H02M1/42 H02M3/28 H02M7/12 H02M7/5387 H05B41/282		
CPC分类号	H02M1/4225 G09G3/3406 G09G3/36 G09G2330/02 H02M5/458 H02M2001/007 H02M2001/009 H05B41/2822 Y02B70/126 Y10T307/406		
代理机构(译)	DR.威猛和合作伙伴		
优先权	1020010039548 2001-07-03 KR 1020020032008 2002-06-07 KR		
其他公开文献	EP1402310B1 EP1402310A1		
外部链接	Espacenet		

摘要(译)

本发明公开了一种供电设备和具有该供电设备的LCD，其通过将用于大规模LCD面板的外部直流电源集成到LCD面板中来降低大规模LCD模块的制造成本并提高功率效率。第一电压转换器将外部ac电压转换为第一dc电压，并且将第一dc电压的电压电平改变为具有比第一dc电压高的电压电平的第三dc电压。第二电压转换器将第二直流电压转换为交流电压，升高转换的交流电压的电压电平，并将升高的交流电压提供给负载。电流检测器检测流过负载的电流，并且向第一电压转换器提供电流检测信号作为反馈信号，使得第一电压提供恒定的直流输出电压。