



US 20030193493A1

(19) **United States**(12) **Patent Application Publication**
Ozawa(10) **Pub. No.: US 2003/0193493 A1**(43) **Pub. Date: Oct. 16, 2003**(54) **DISPLAY APPARATUS**(30) **Foreign Application Priority Data**(75) Inventor: **Tokuroh Ozawa, Suwa-shi (JP)**

Jul. 2, 1997 (JP) 9-177455


Correspondence Address:

OLIFF & BERRIDGE, PLC**P.O. BOX 19928****ALEXANDRIA, VA 22320 (US)****Publication Classification**(51) **Int. Cl.⁷** **G09G 5/00**(52) **U.S. Cl.** **345/204**(73) Assignee: **Seiko Epson Corporation, Tokyo (JP)**(21) Appl. No.: **10/457,446**(22) Filed: **Jun. 10, 2003****Related U.S. Application Data**

(63) Continuation of application No. 09/242,904, filed on Feb. 25, 1999, filed as 371 of international application No. PCT/JP98/02982, filed on Jul. 1, 1998.

(57) **ABSTRACT**

For the purpose of providing a display apparatus capable of improving display quality by expanding the light-emission area of pixels by improving the layout of pixels and common power-feed lines formed on a substrate, pixels (7A, 7B) including a light-emission element (40), such as an electroluminescence element or an LED element, are arranged on both sides of common power-feed lines (com) so that the number of common power-feed lines (com) is reduced. Further, the polarity of a driving current flowing between the pixels (7A, 7B) and the light-emission element (40) is inverted so that the amount of current flowing through the common power-supply lines "com" is reduced.

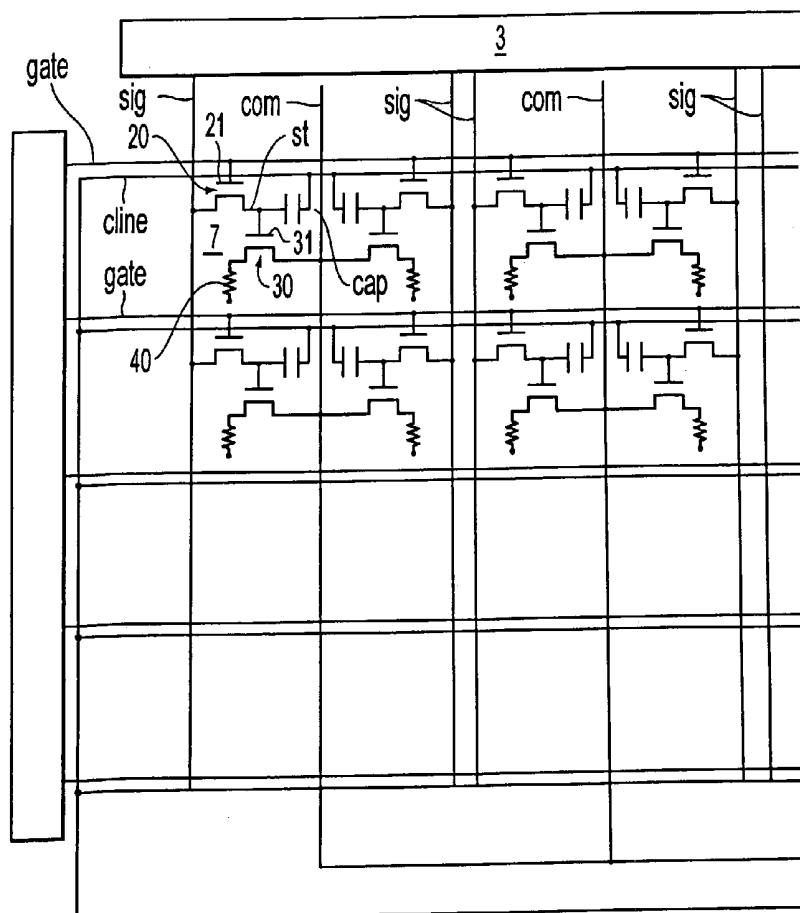

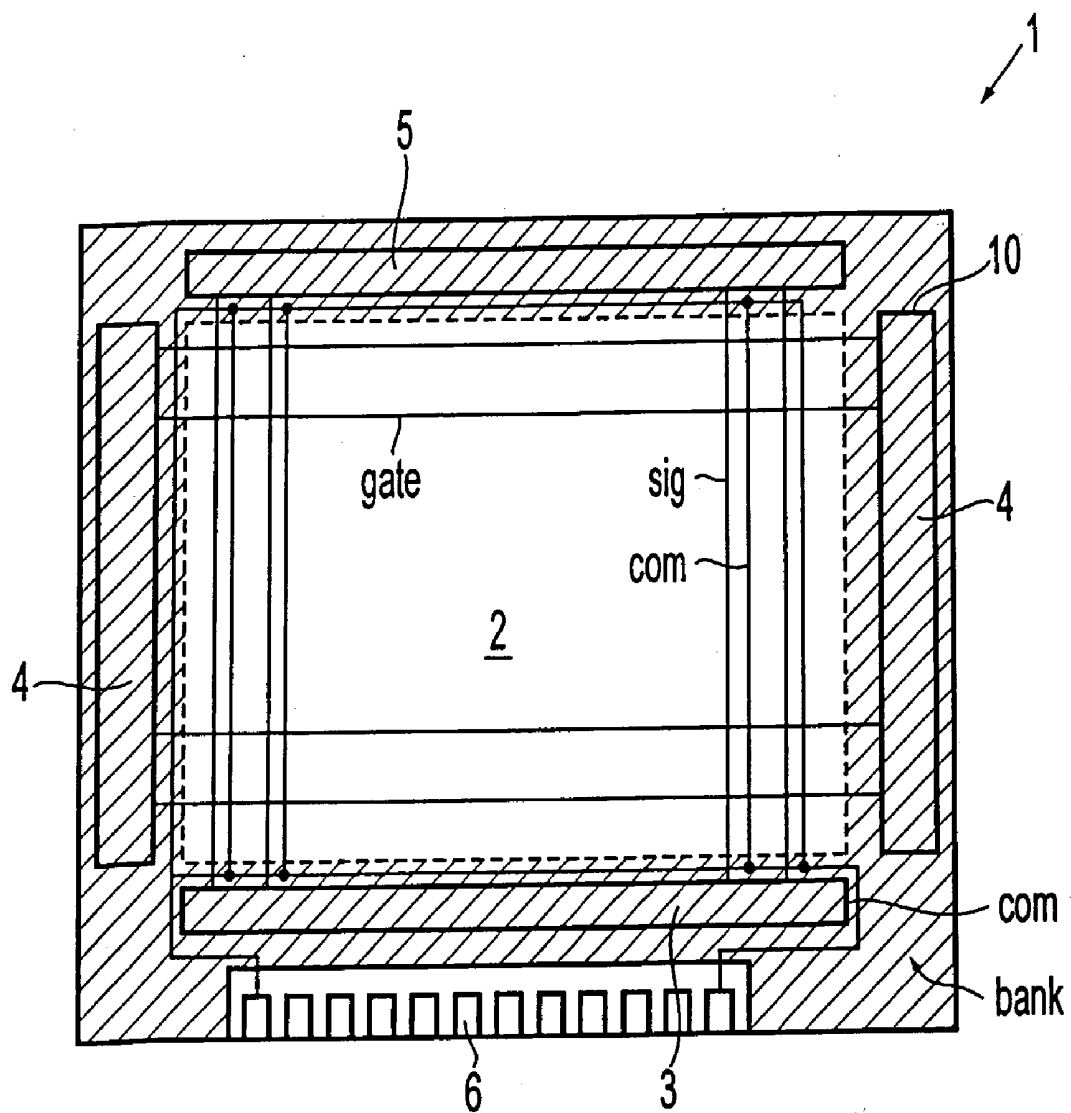


FIG. 1

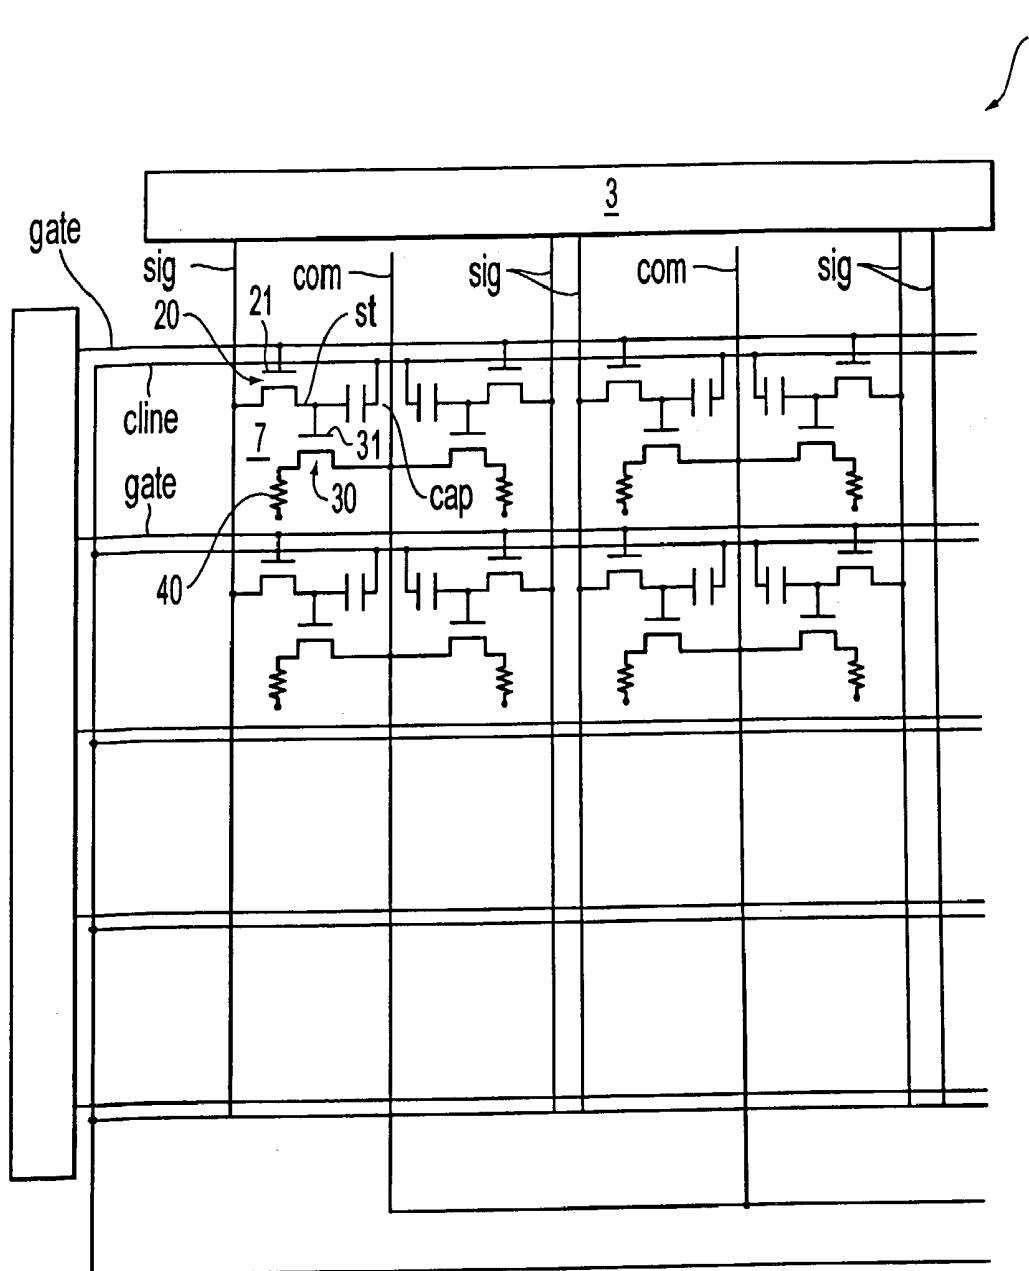


FIG. 2

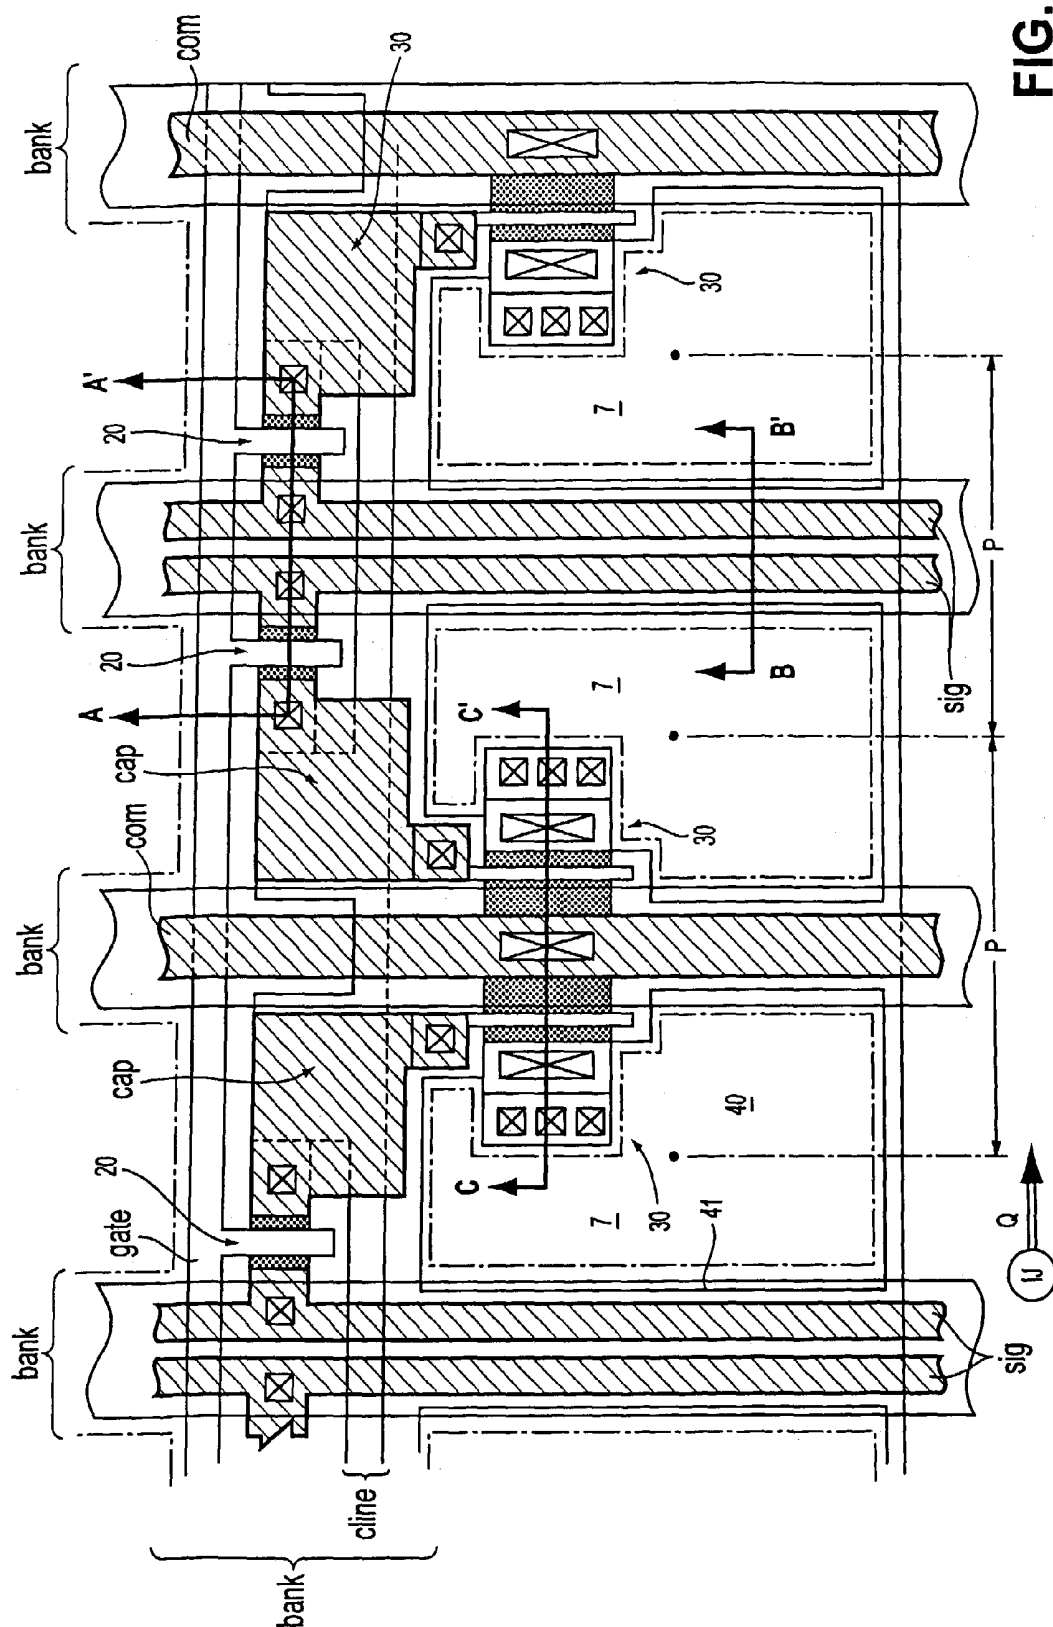


FIG. 3

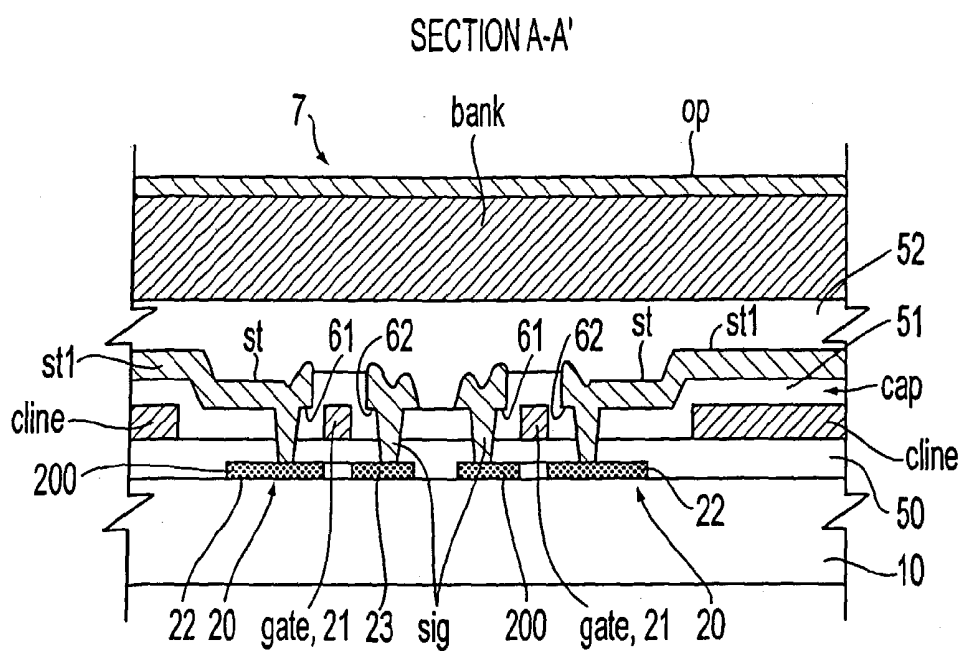


FIG. 4

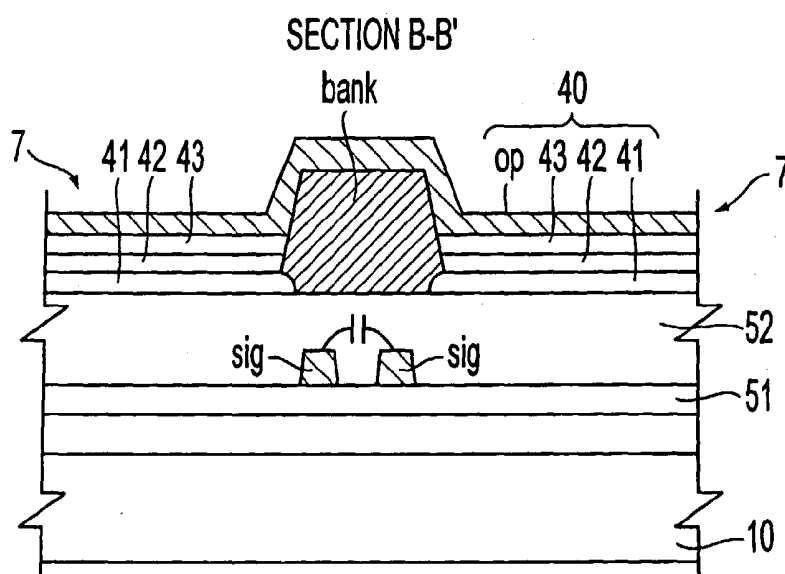


FIG. 5

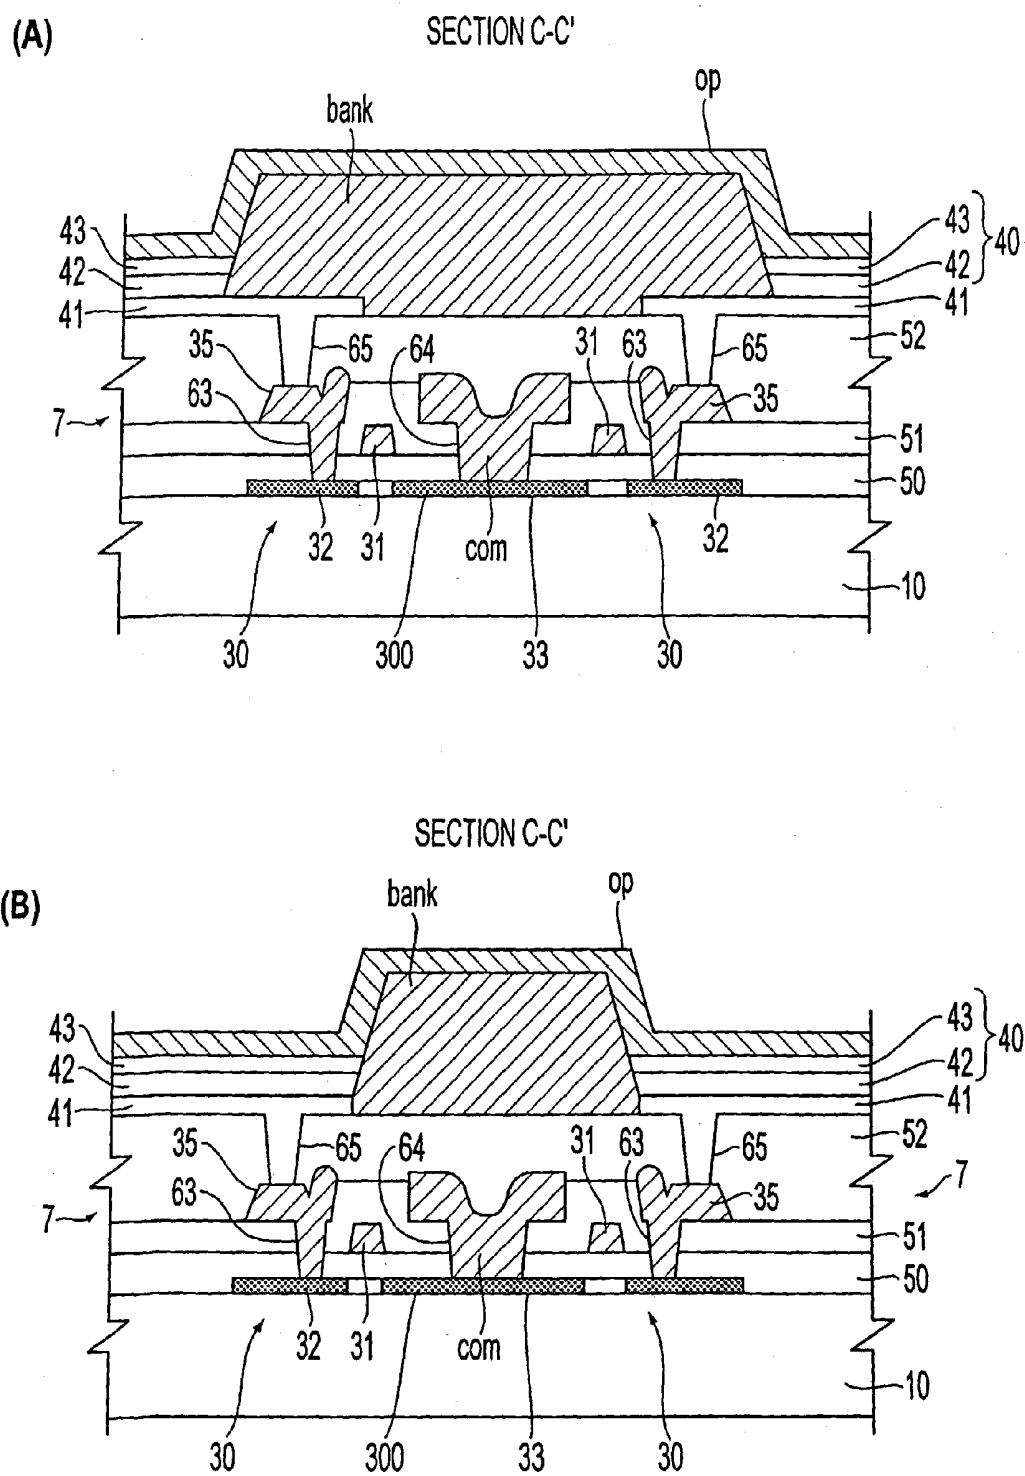


FIG. 6

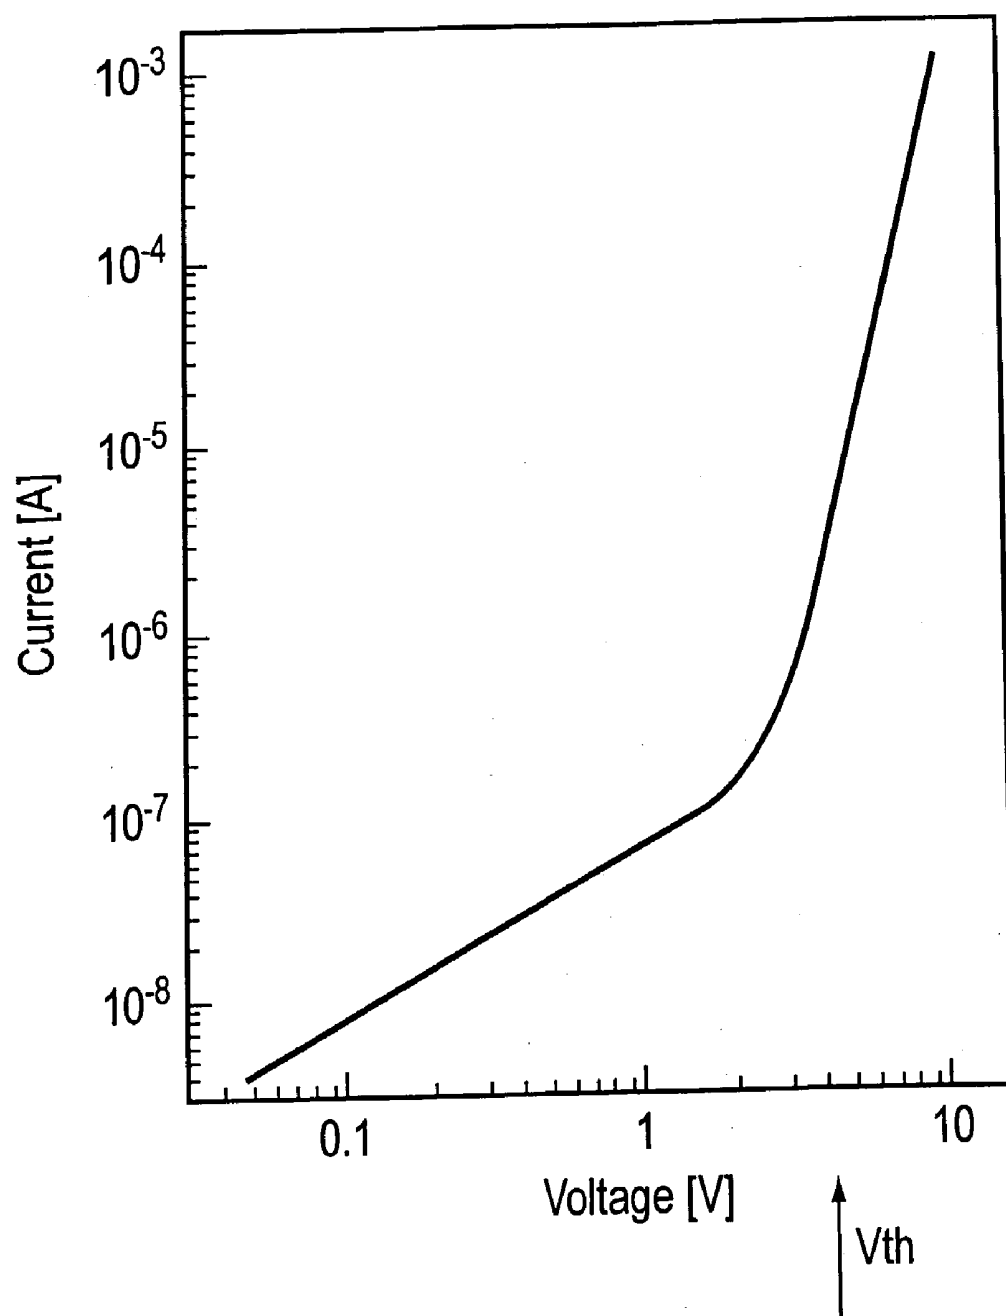


FIG. 7

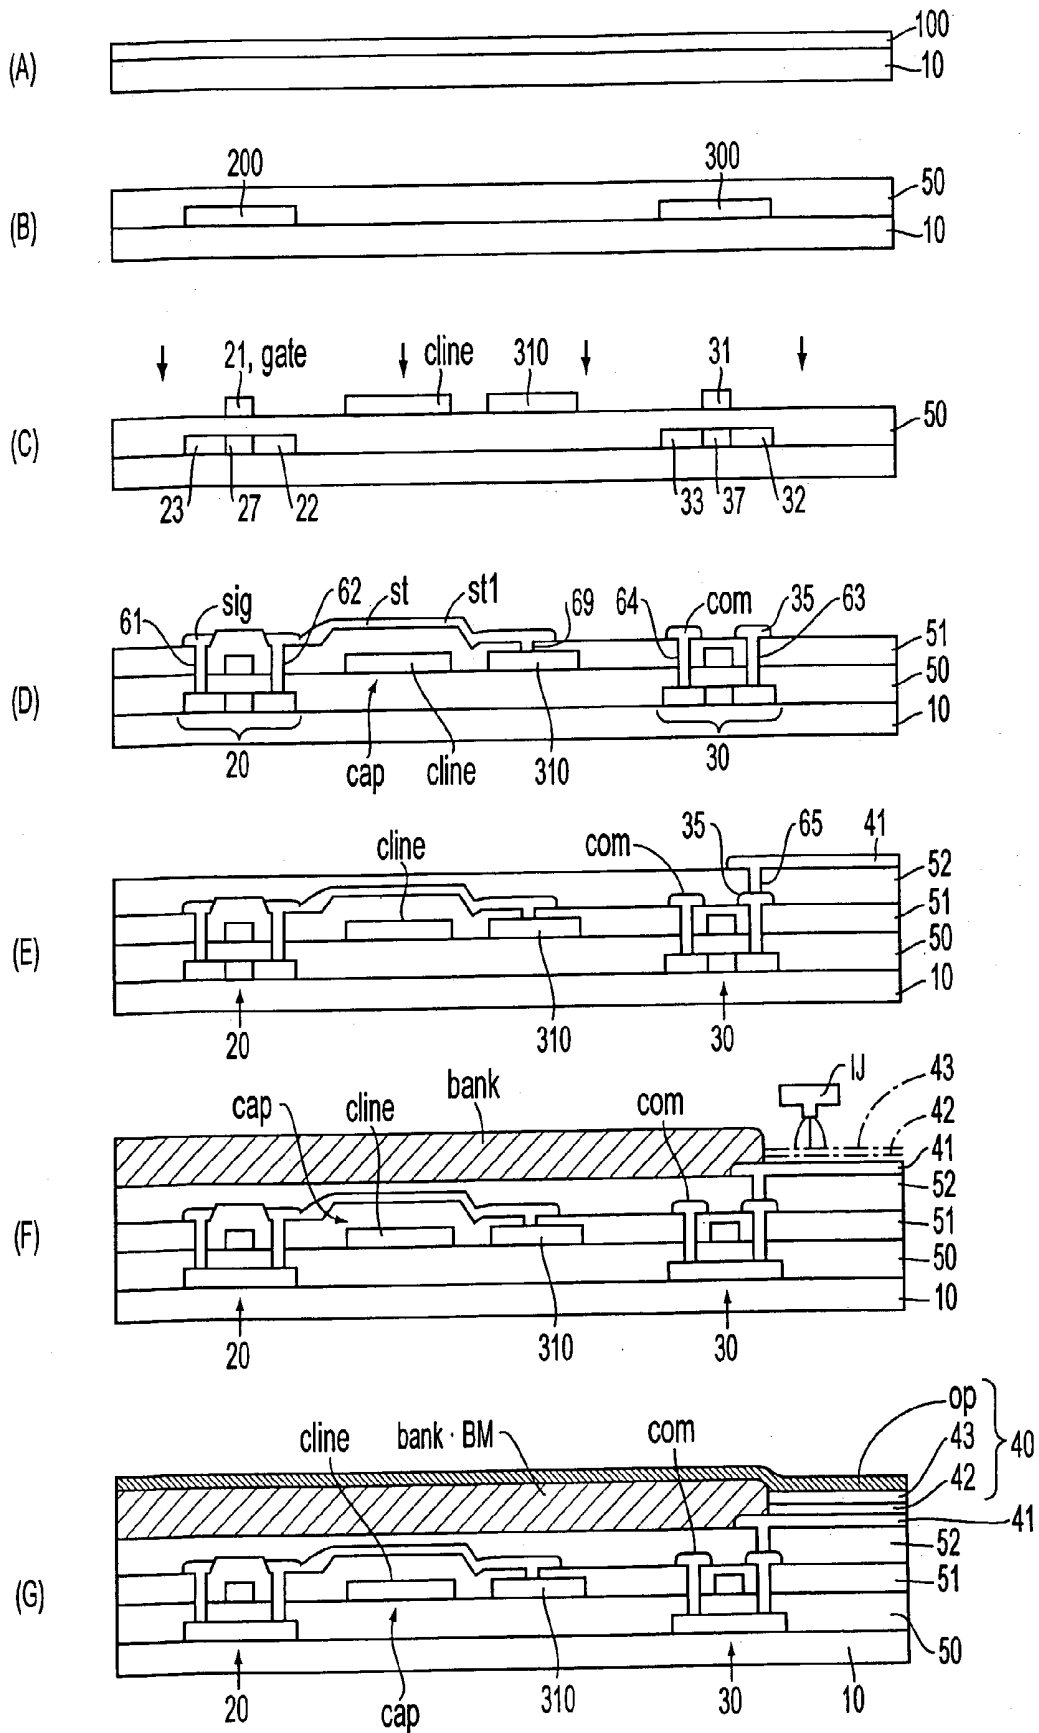


FIG. 8

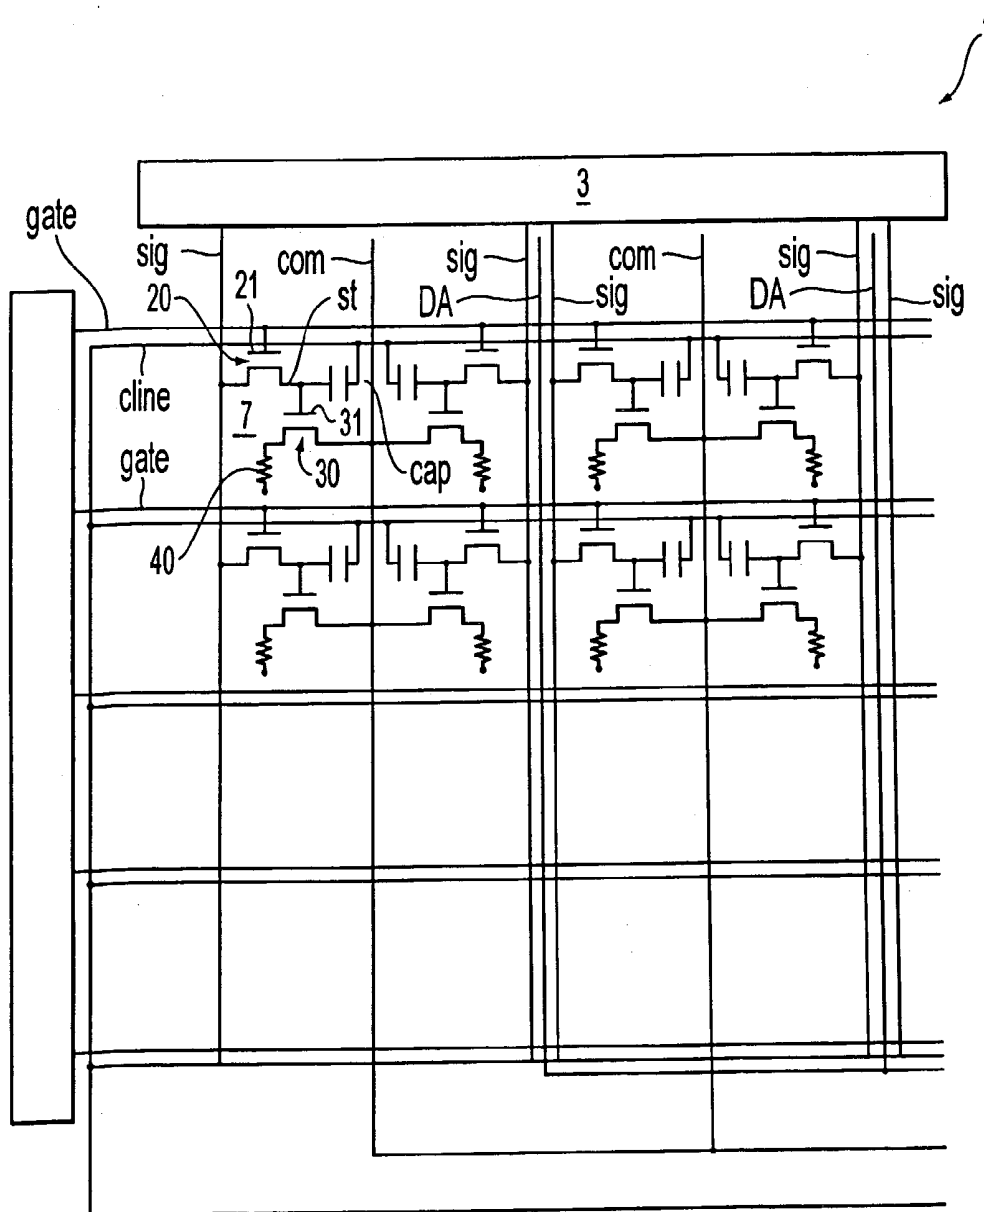


FIG. 9

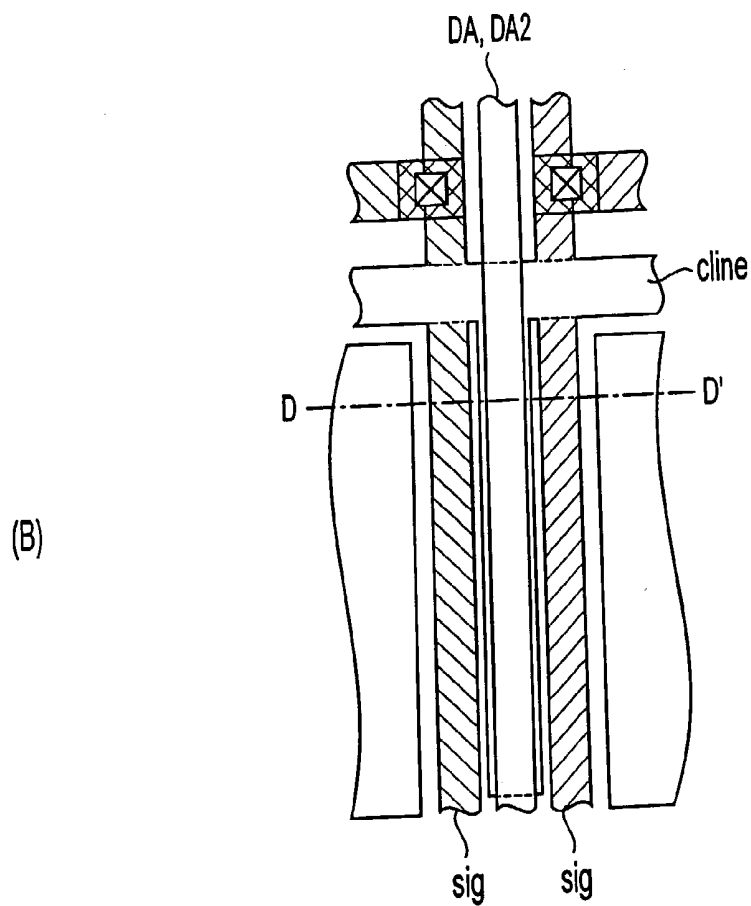
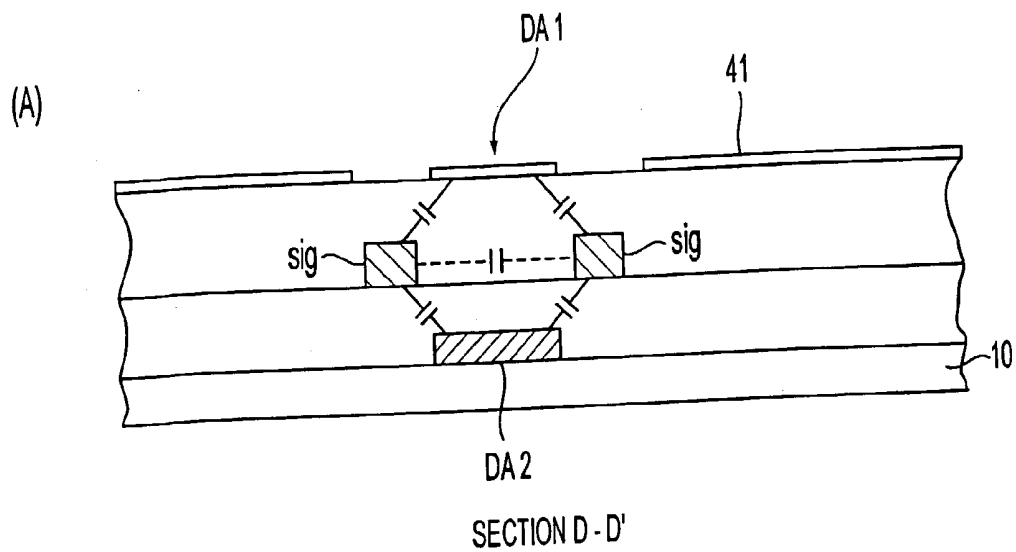


FIG. 10

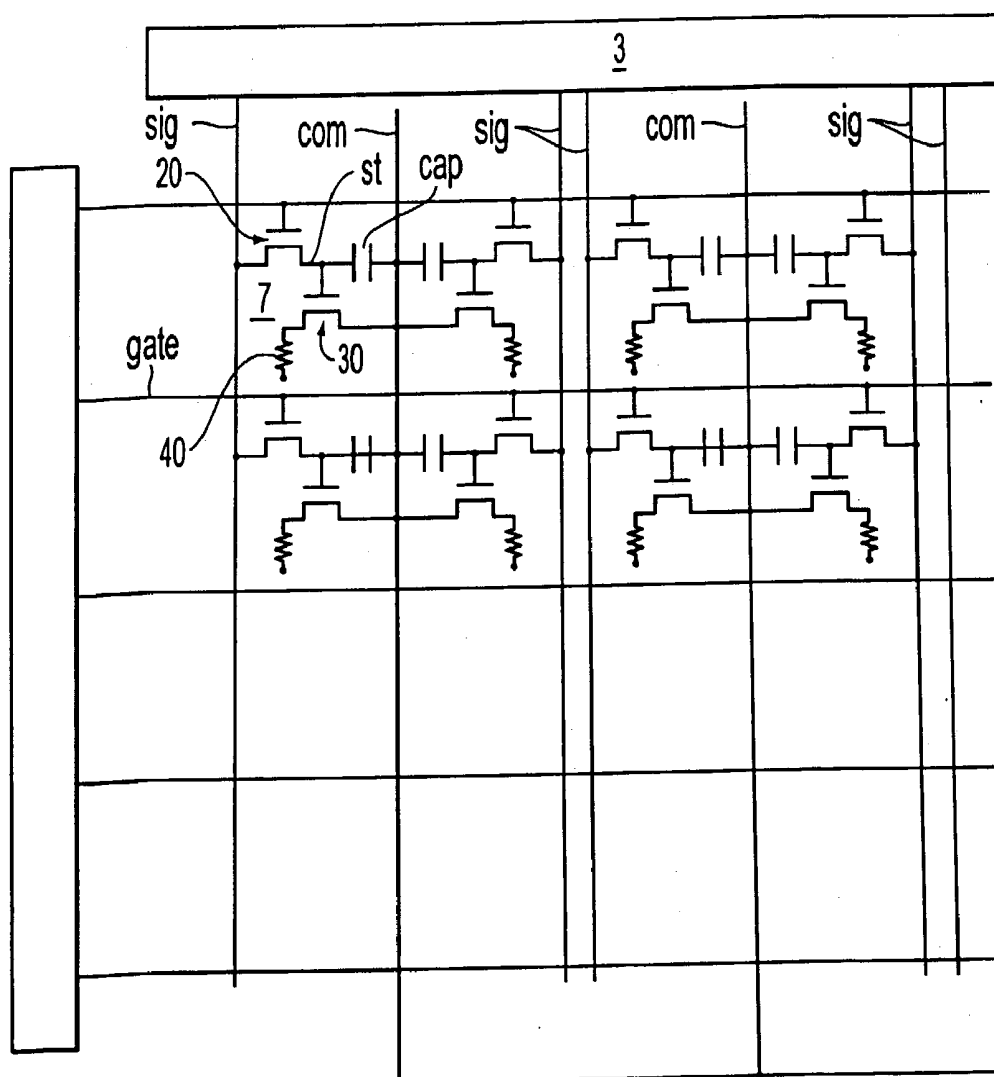


FIG. 11

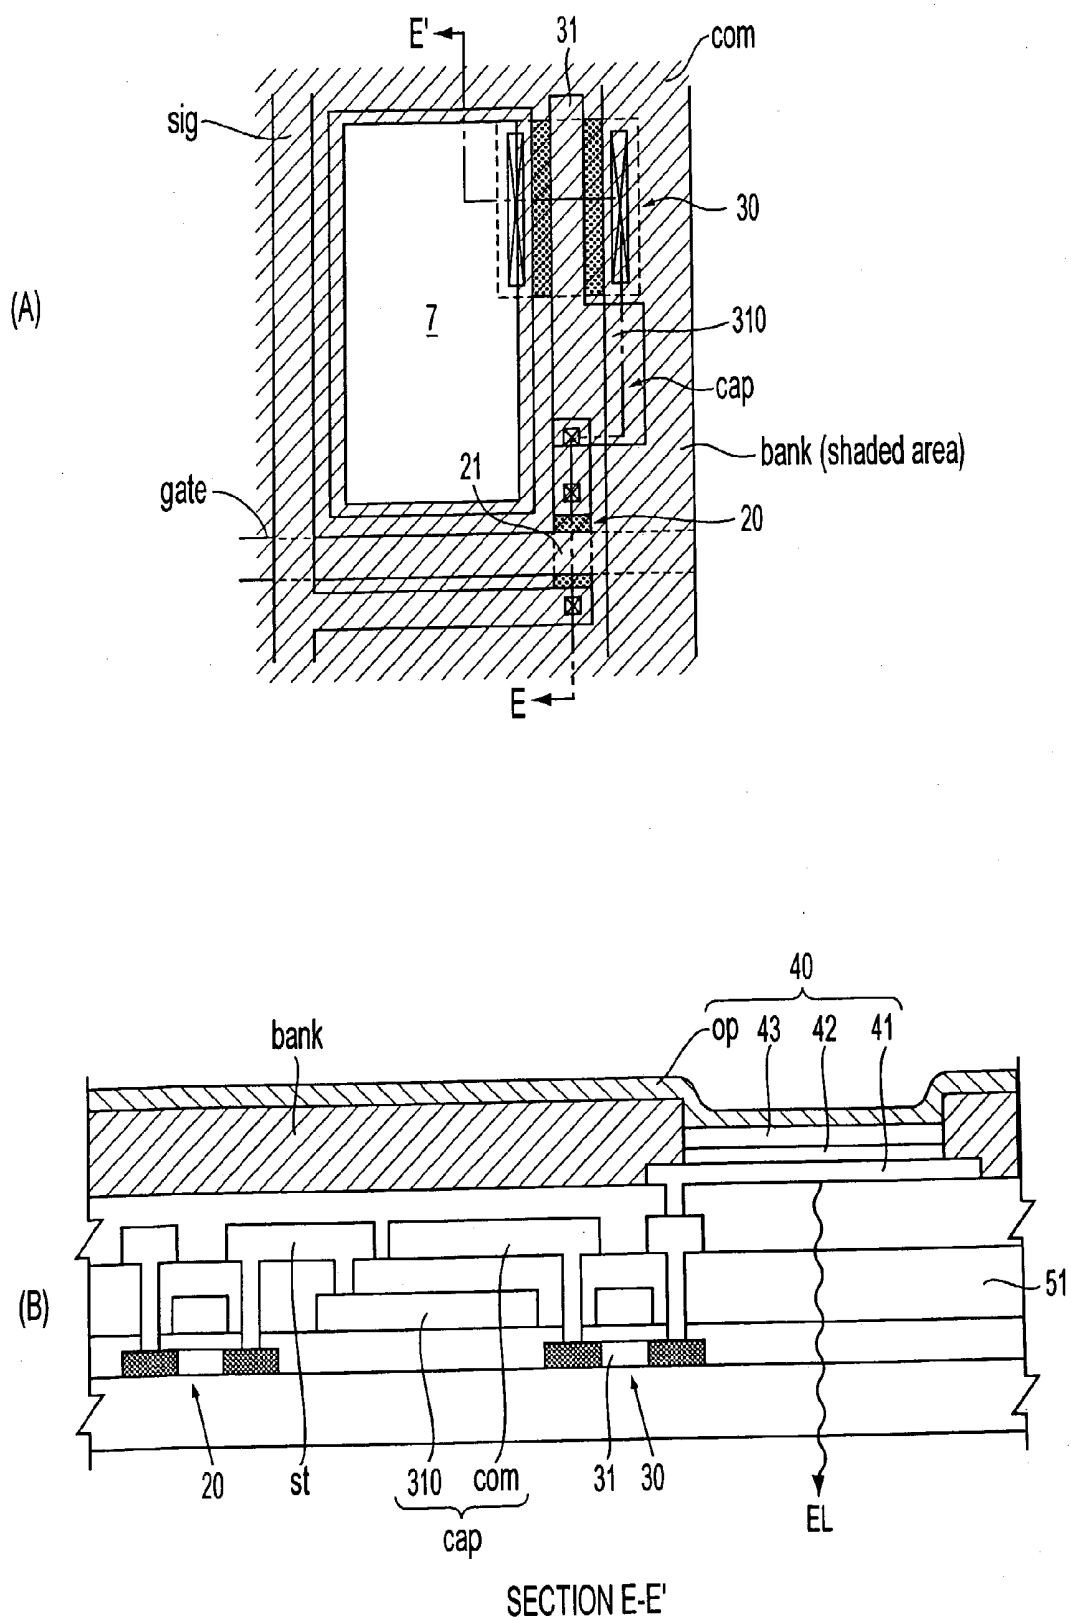


FIG. 12

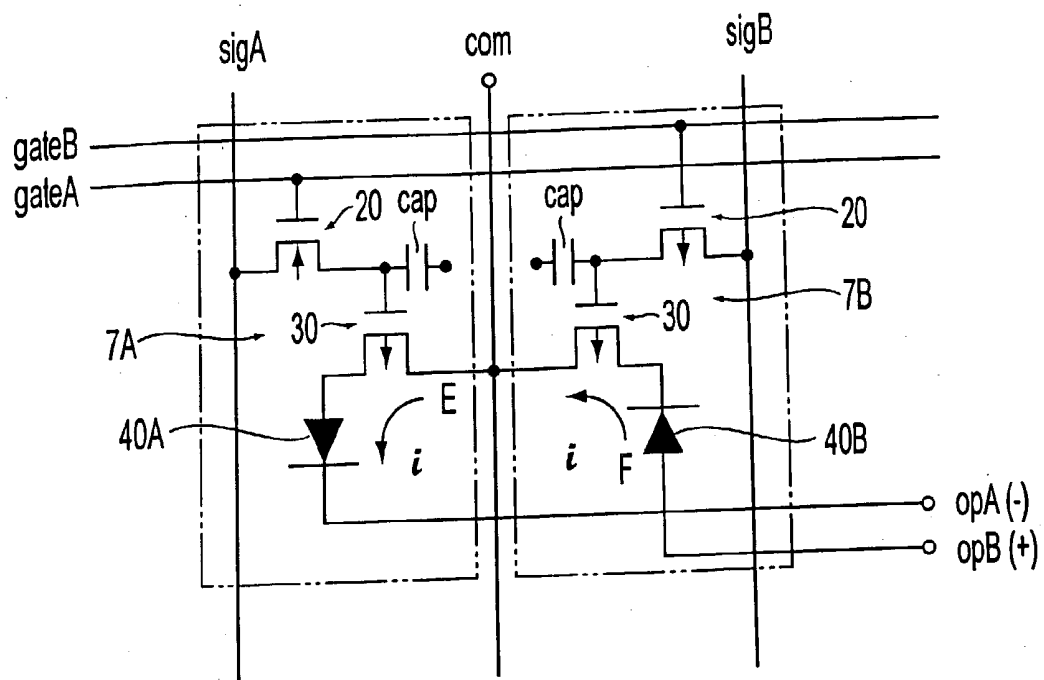


FIG. 13

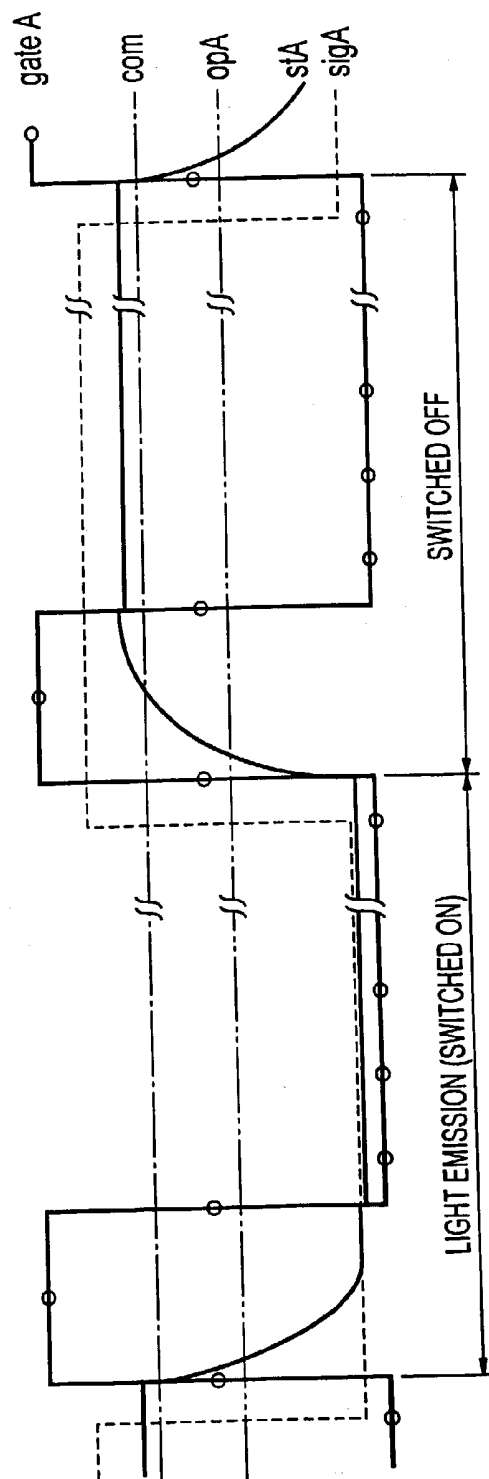
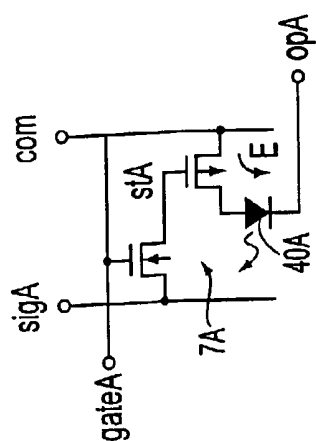


FIG. 14

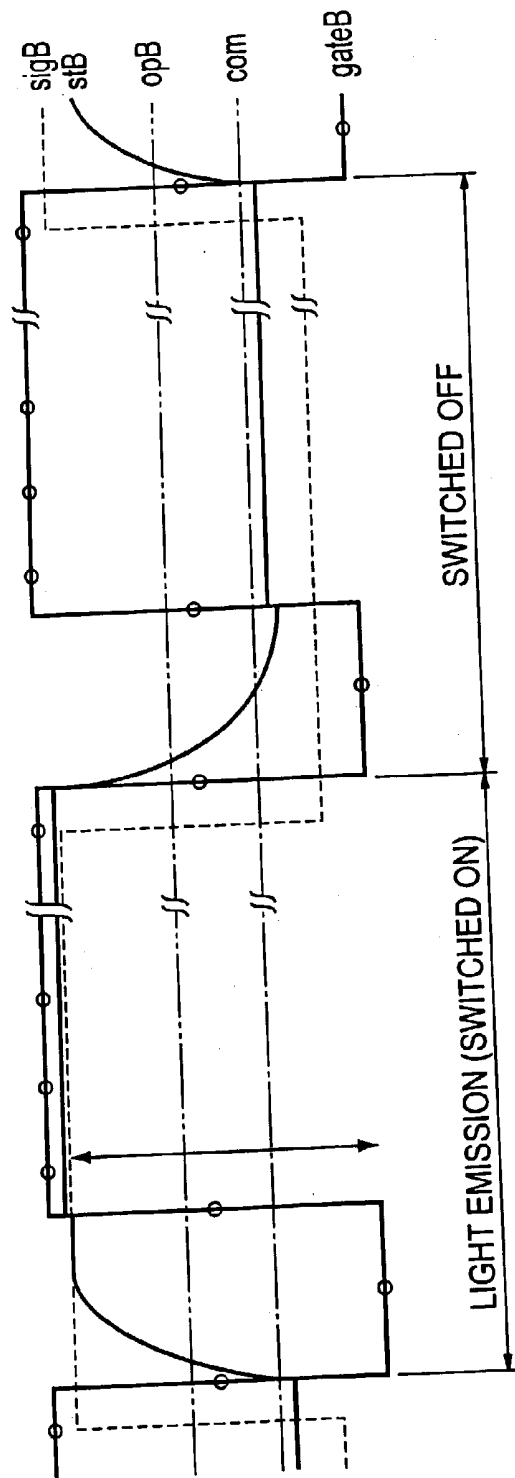
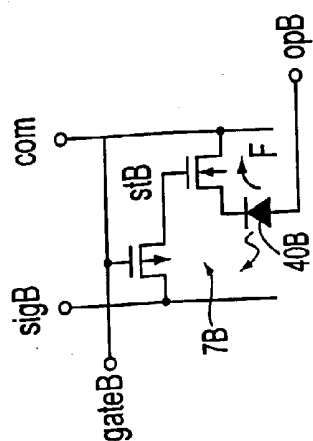


FIG. 15

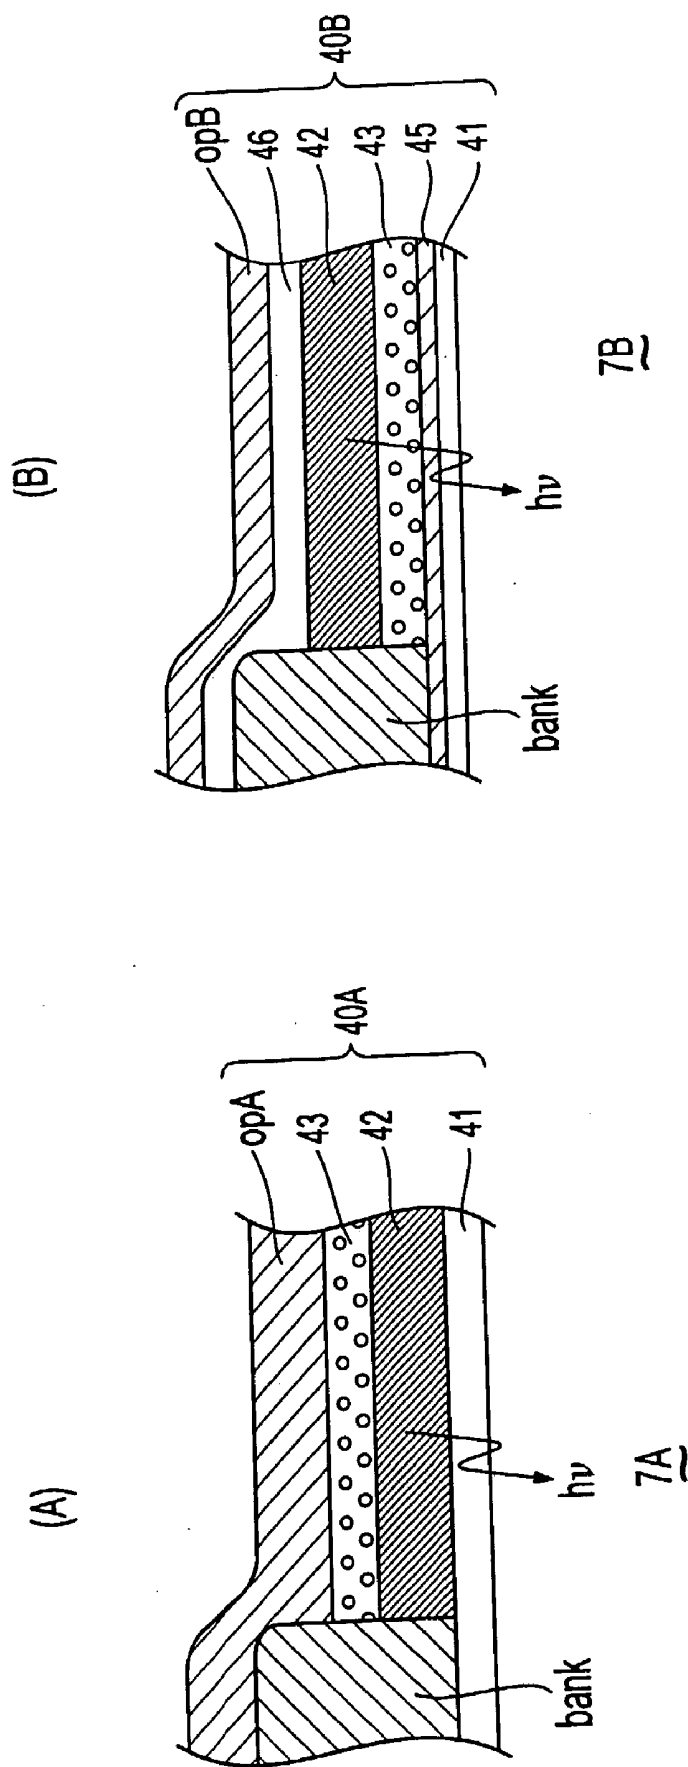


FIG. 16

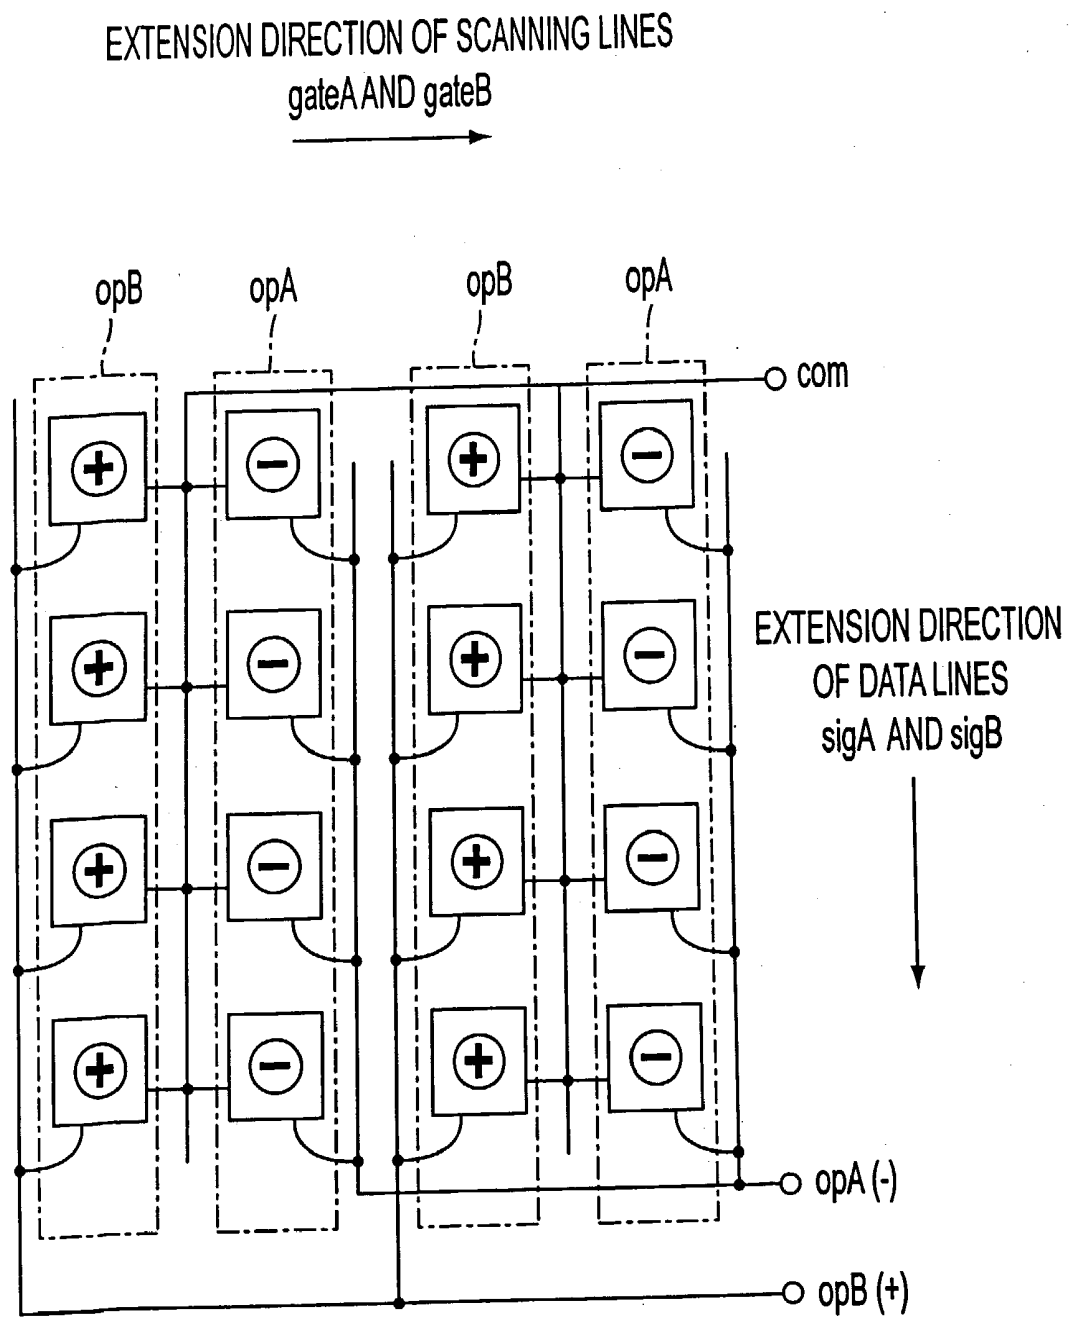


FIG. 17

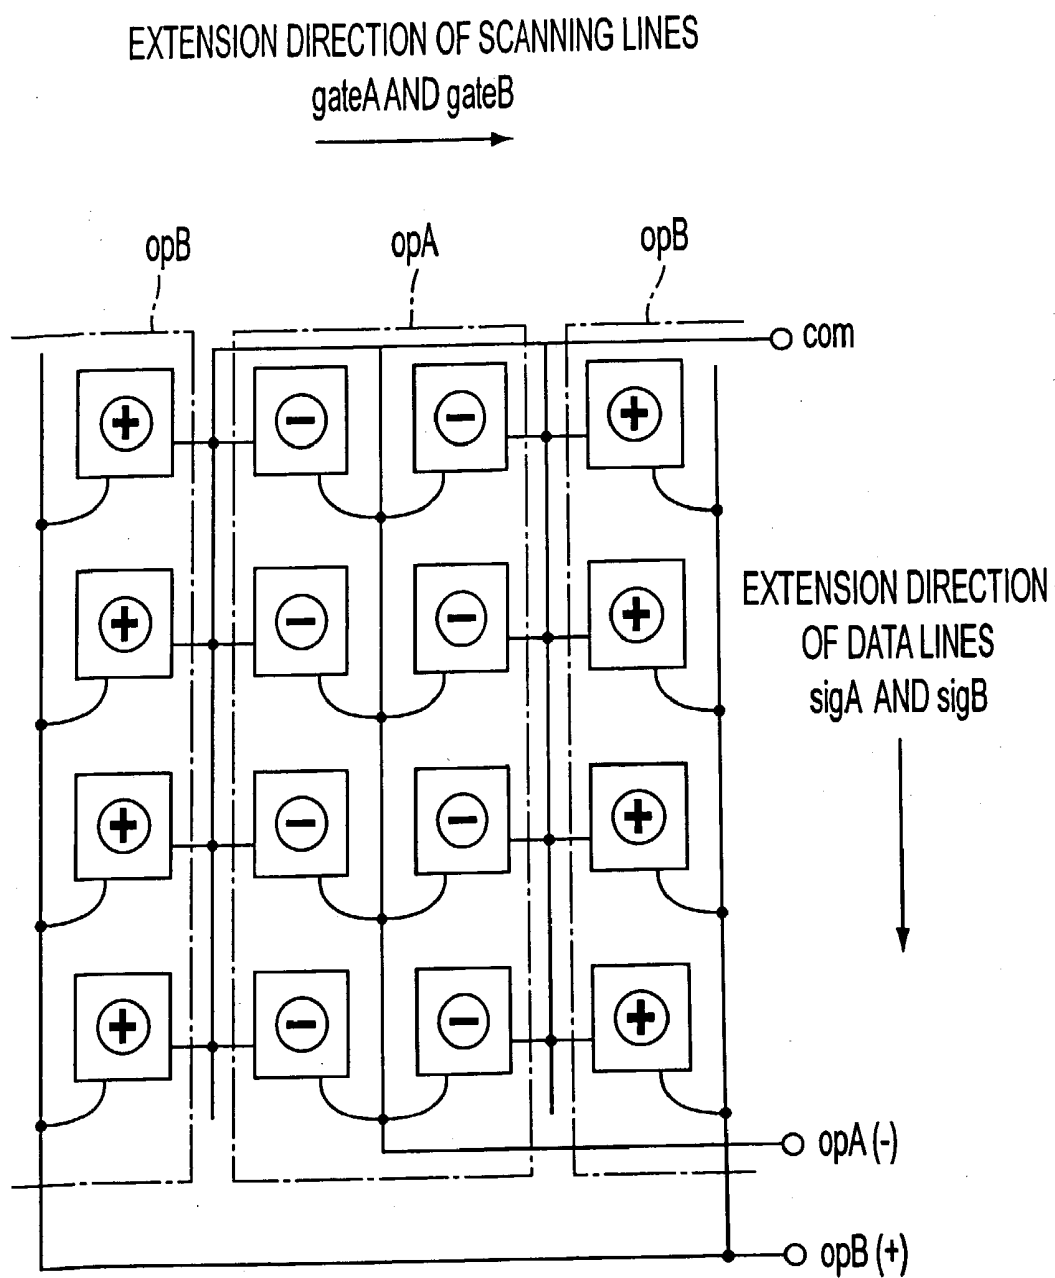


FIG. 18

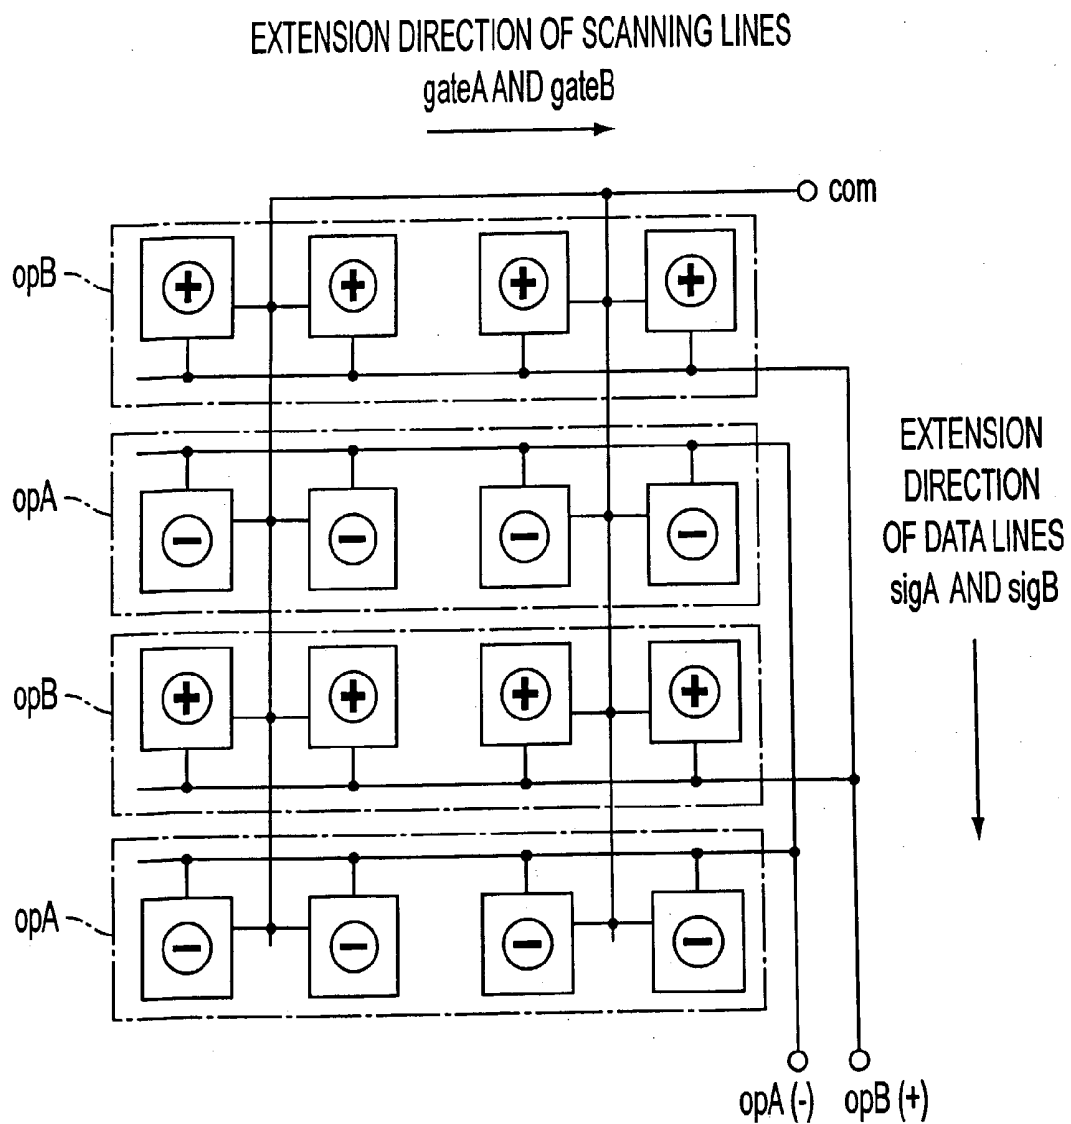


FIG. 19

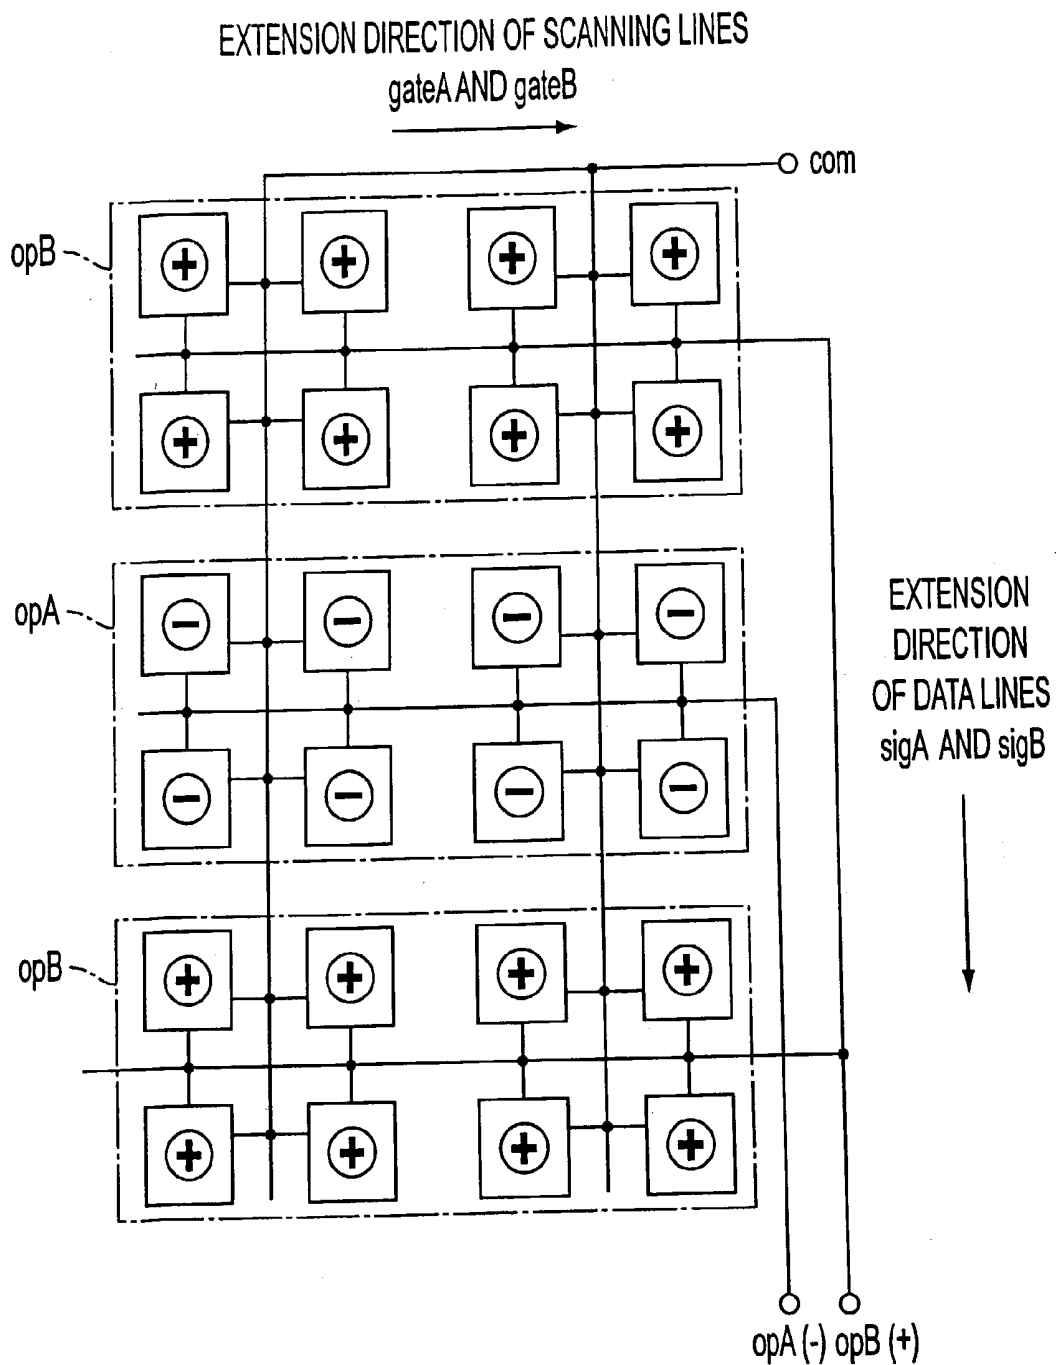


FIG. 20

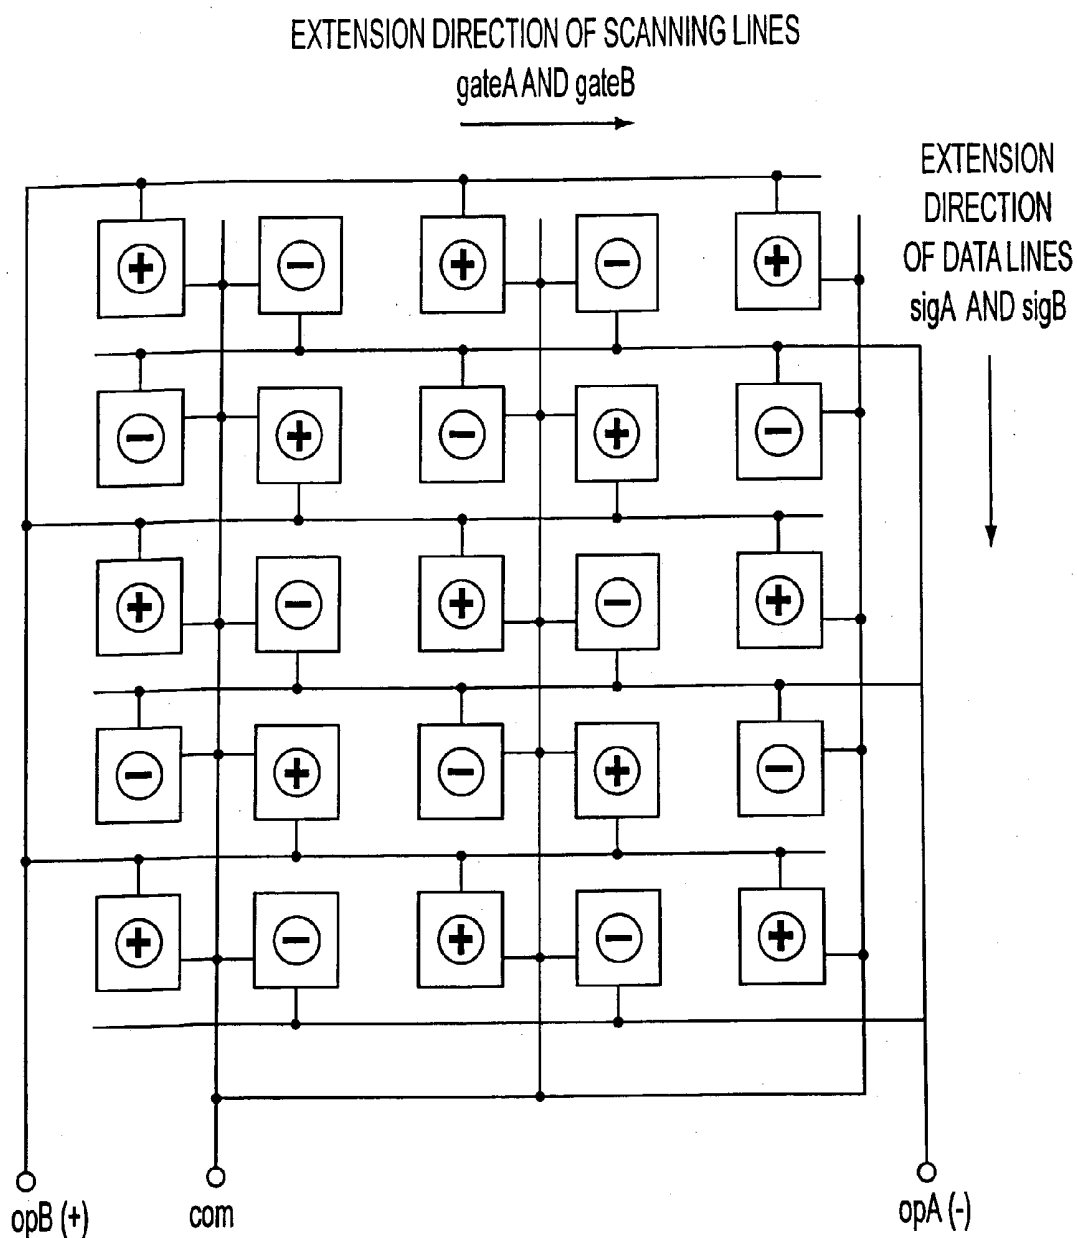


FIG. 21


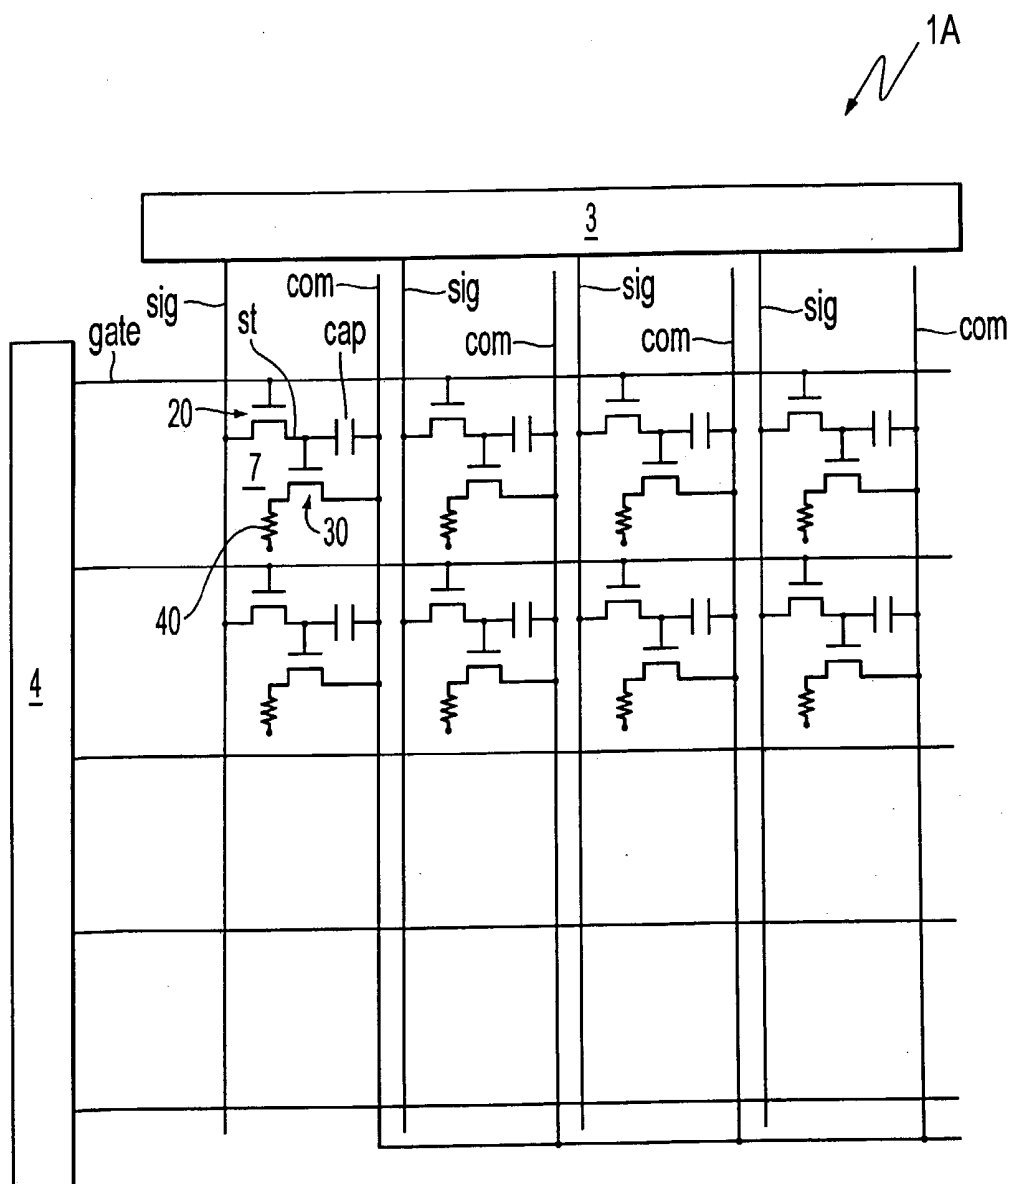


FIG. 22

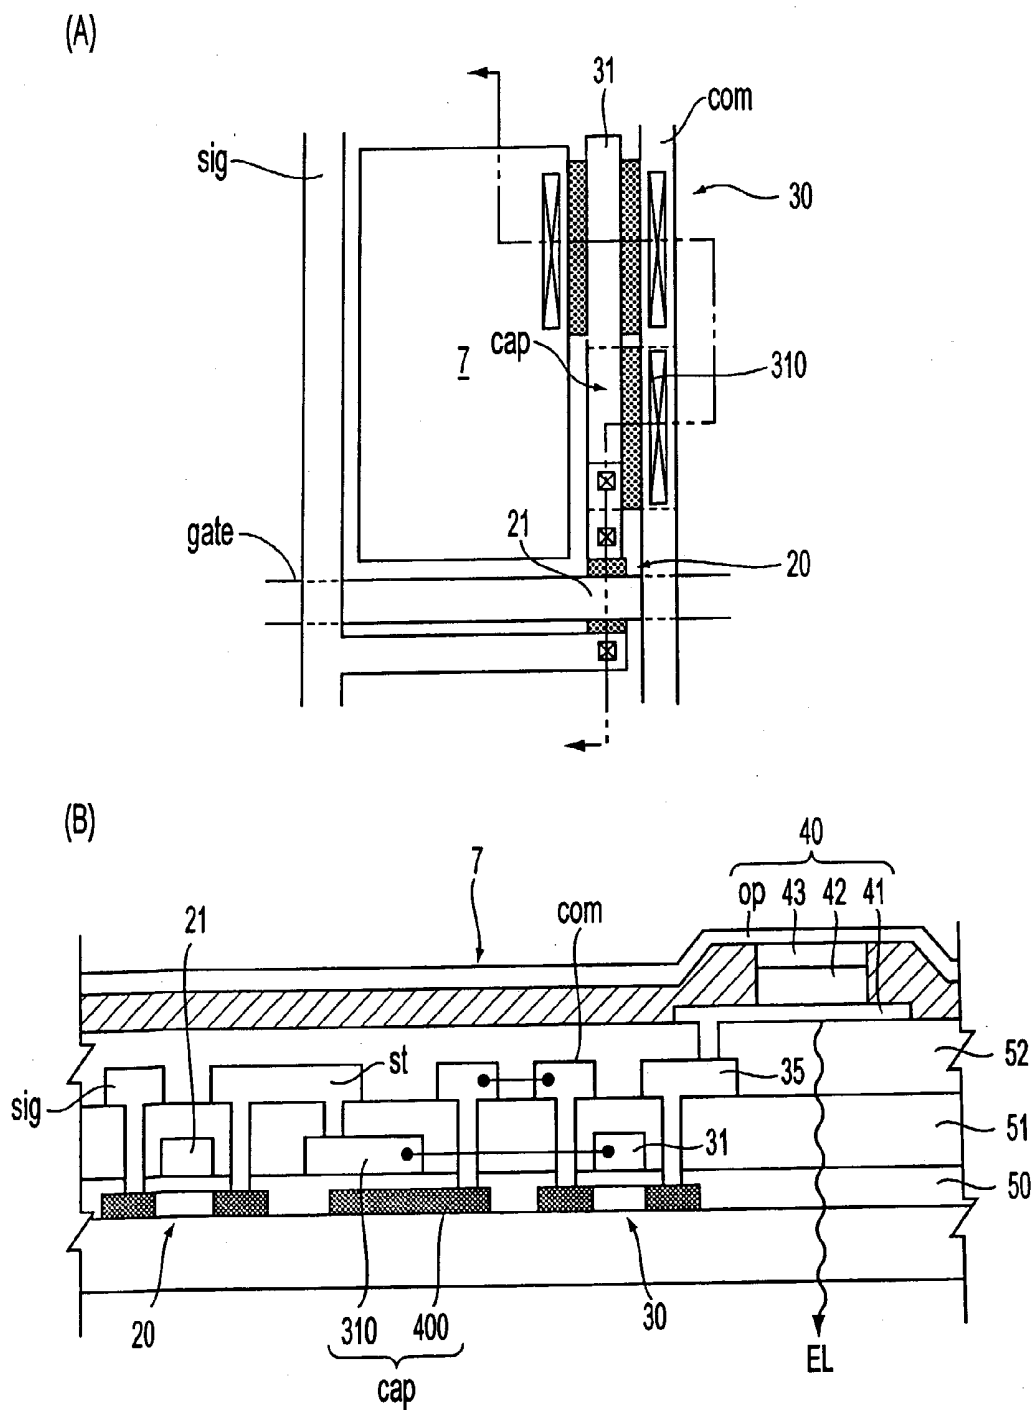

DISPLAY APPARATUS

TECHNICAL FIELD

[0001] The present invention relates to an active-matrix-type display apparatus which uses light-emission elements, such as EL (electroluminescence) elements that emit light when driving current flows through an organic semiconductor film or LED (light-emitting diode) elements, and thin-film transistors (hereinafter referred to as "TFTs") that control the light-emission operation of this light-emission element. More particularly, the present invention relates to layout optimization technology for improving the display characteristics thereof.

BACKGROUND ART

[0002] Active-matrix-type display apparatuses which use current-control-type light-emission elements, such as EL elements or LED elements, have been proposed. Since any of the light-emission elements used in this type of display apparatus may emit light by itself, unlike a liquid-crystal display device, a backlight is not required, and there are advantages in that viewing angle dependence is small.

[0003] FIG. 22 shows, as an example of such a display apparatus a block diagram of an active-matrix-type display apparatus which uses charge-injection-type organic thin-film EL elements. In a display apparatus 1A shown in this figure, formed on a transparent substrate are a plurality of scanning lines "gate", a plurality of data lines "sig" extending in a direction intersecting the extension direction of these scanning lines "gate", a plurality of common power-feed lines "com" which are parallel to these data lines "sig", and pixels 7 corresponding to the intersections of the data lines "sig" and the scanning lines "gate". With respect to the data lines "sig", a data-side driving circuit 3 comprising a shift register, a level shifter, video in, and an analog switch is formed. With respect to the scanning lines, a scanning-side driving circuit 4 comprising a shift register and a level shifter is formed. Further, each of the pixels 7 is formed with a first TFT 20 in which a scanning signal is supplied to its gate electrode via the scanning lines, a holding capacitor "cap" for holding an image signal supplied from the data lines "sig" via this first TFT 20, a second TFT 30 in which an image signal held by this holding capacitor "cap" is supplied to its gate electrode, and light-emission elements 40 to which driving current flows from the common power-feed lines "com" when these are electrically connected to the common power-feed lines "com" via the second TFT 30.

[0004] Specifically, as shown in FIGS. 23(A) and 23(B), in all the pixels 7, the first TFT 20 and the second TFT 30 are formed using two island-shaped semiconductor films, a relay electrode 35 is electrically connected to the source and drain regions of the second TFT 30 via a contact hole of a first interlayer insulation film 51, and a pixel electrode 41 is electrically connected to the relay electrode 35 via a contact hole of a second interlayer insulation film 52. On the side of the upper layers of this pixel electrode 41, a positive-hole injection layer 42, an organic semiconductor film 43, and a counter electrode "op" are multilayered. Here, the counter electrode "op" is formed over a plurality of pixels 7 in such a manner as to extend across the data lines "sig" and the like. Further, the common power-feed lines "com" are electrically connected to the source and drain regions of the second TFT 30 via the contact hole.

[0005] In contrast, in the first TFT 20, a potential holding electrode "st" which is electrically connected to the source and drain regions is electrically connected to an extended portion 310 of a gate electrode 31. On the side of the lower layers thereof, a semiconductor film 400 opposes this extended portion 310 via a gate insulation film 50, and since this semiconductor film 400 is made to conduct by impurities introduced therein, this semiconductor film 400, together with the extended portion 310 and the gate insulation film 50, constitute the holding capacitor "cap". Here, the common power-feed line "com" is electrically connected to the semiconductor film 400 via the contact hole of the first interlayer insulation film 51. Therefore, since the holding capacitor "cap" holds an image signal supplied from the data lines "sig" via the first TFT 20, even if the first TFT 20 is turned off, the gate electrode 31 of the second TFT 30 is held at a potential corresponding to the image signal. Therefore, since the driving current continues to flow to the light-emission element 40 from the common power-feed lines "com", the light-emission element 40 continues to emit light.

[0006] However, in comparison with the liquid-crystal display apparatus, in the display apparatus 1A, there is a problem in that the display quality cannot be improved because the pixels 7 are narrower by an amount corresponding to the requirement of the second TFT 30 and the common power-feed lines "com".

[0007] Accordingly, an object of the present invention is to provide a display apparatus capable of improving display quality by expanding the light-emission area of pixels by improving the layout of pixels and common power-feed lines formed on a substrate.

DISCLOSURE OF INVENTION

[0008] In order to solve the above-described problems, the present invention provides a display apparatus comprising on a substrate: a plurality of scanning lines; a plurality of data lines extending in a direction intersecting the extension direction of the scanning lines; a plurality of common power-feed lines parallel to the data lines; and pixels formed in a matrix by the data lines and the scanning lines, each of the pixels comprising: a first thin-film transistor in which a scanning signal is supplied to its first gate electrode via the scanning lines; a holding capacitor for holding an image signal supplied from the data lines via the first thin-film transistor; a second thin-film transistor in which the image signal held by the holding capacitor is supplied to its second gate electrode; and a light-emission element having an organic semiconductor film, which emits light by driving current that flows between a pixel electrode and a counter electrode when the pixel electrode is electrically connected to the common power-feed line via the second thin-film transistor in a section between the layers of the pixel electrodes formed for each of the pixels and the counter electrodes opposing the pixel electrodes, wherein pixels in which the driving current is passed in a section between the pixels and the common power-feed lines are arranged on both sides of the common power-feed lines, and the data lines pass on a side opposite to the common power-feed lines with respect to the pixels.

[0009] Specifically, in the present invention, since a data line, a group of pixels connected thereto, one common

power-feed line, a group of pixels connected thereto, and a data line for supplying a pixel signal to the group of pixels are assumed to be one unit and this is repeated in the extension direction of scanning lines, pixels for two rows are driven by one common power-feed line. Therefore, the formation area of common power-feed lines can be made more narrow than in a case in which a common power-feed line is formed for each group of pixels for one row, the light-emission area of the pixels can be expanded correspondingly. Therefore, it is possible to improve display performance, such as luminance, contrast ratio, and so on.

[0010] When the construction is formed in this manner, it is preferable that, for example, in a section between two pixels arranged in such a manner as to sandwich the common power-feed line, the first thin-film transistor, the second thin-film transistor, and the light-emission elements be disposed in linear symmetry about the common power-feed line.

[0011] In the present invention, also, it is preferable that the pitch of the centers of the formation areas of the organic semiconductor films be equal at every interval between adjacent pixels along the extension direction of the scanning lines. When the construction is formed in this manner, it is convenient to cause a material for an organic semiconductor film to be discharged from an ink-jet head and to form an organic semiconductor film. That is, since the pitch of the centers of the formation areas of the organic semiconductor films is equal, the material for an organic semiconductor film may be discharged from the ink-jet head at even intervals. This simplifies the movement control mechanism of the ink-jet head, and the position accuracy is improved.

[0012] Further, it is preferable that the formation area of the organic semiconductor film be surrounded by a bank layer formed from an insulation film thicker than the organic semiconductor film, and that the bank layer be formed in such a manner as to cover the data lines and the common power-feed line at the same width dimension. When the construction is formed in this manner, since the bank layer prevents the extrusion of the organic semiconductor film into its periphery when the organic semiconductor film is formed by an ink-jet method, the organic semiconductor film can be formed within a predetermined area. Further, since the bank layer covers the data lines and the common power-feed line at the same width dimension, this is suitable for making the pitch of the centers of the formation areas of the organic semiconductor films equal at any interval of the adjacent pixels along the extension direction of the scanning lines. Here, the counter electrodes are formed at least on nearly the entire surface on the pixel area or over a wide area in a stripe form, and are in a state of opposing the data lines. Therefore, if kept in this state, a large capacitance parasitizes the data lines. However, in the present invention, since a bank layer is interposed between the data lines and the counter electrodes, it is possible to prevent parasitization of the capacitance formed in a section adjoining the counter electrodes into the data lines. As a result, since the load in the data-side driving circuit can be reduced, power consumption can be reduced or a higher-speed display operation can be achieved.

[0013] In the present invention, it is preferable that a wiring layer be formed at a position corresponding to a section between two data lines passing on a side opposite to

the common power-feed line with respect to the pixels. When two data lines are parallel to each other, there is a risk that crosstalk may occur between these data lines. However, in the present invention, since another wiring layer different from those passes between two data lines, the crosstalk can be prevented by merely maintaining such a wiring layer at a fixed potential at least within one horizontal scanning period of the image.

[0014] In this case, between two adjacent data lines of the plurality of data lines, it is preferable that sampling of an image signal be performed at the same timing. When the construction is formed in this manner, since potential variations during sampling occur simultaneously in a section between two data lines, it is possible to more reliably prevent an occurrence of crosstalk between these data lines.

[0015] In the present invention, it is preferable that nearly the same number of pixels of two types, in which the light-emission elements are driven by a driving current whose polarity is inverted, be among the plurality of pixels in which the driving current is passed in a section between the pixels and the common power-feed lines.

[0016] When the construction is formed in this manner, the driving current which flows from the common power-feed line to the pixels cancels the driving current which flows from the pixels to the common power-feed line, thereby a smaller amount of driving current which flows through the common power-feed line is required. Therefore, since the common power-feed lines can be made narrow correspondingly, it is possible to expand the display area with respect to the panel exterior. It is also possible to eliminate luminance variations which occur due to a difference between driving currents.

[0017] For example, the construction is formed in such a way that the polarity of the driving current in each pixel is the same in the extension direction of the data lines and that, in the extension direction of the scanning lines, the polarity of the driving current in each pixel is inverted for each pixel or every two pixels. The construction may also be formed in such a way that the polarity of the driving current in each pixel is the same in the extension direction of the scanning lines and that, in the extension direction of the data lines, the polarity of the driving current in each pixel is inverted for each pixel or every two pixels. Of these constructions, in the case of the construction in which the polarity of the driving current is inverted every two pixels, for the pixels through which driving current of the same polarity flows, a counter electrode can be used in common between adjacent pixels, making it possible to reduce the number of slits of the counter electrode. That is, polarity inversion can be realized without increasing the resistance value of the counter electrodes through which a large current flows.

[0018] Furthermore, the construction may be formed in such a way that the polarity of the driving current in each pixel is inverted for each pixel in both the extension direction of the scanning lines and the extension direction of the data lines.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] **FIG. 1** is an illustration schematically showing a display apparatus of the present invention, and the formation area of a bank layer formed therein.

[0020] FIG. 2 is a block diagram showing the basic construction of the display apparatus of the present invention.

[0021] FIG. 3 is a plan view in which pixels of the display apparatus according to the first embodiment of the present invention are enlarged.

[0022] FIG. 4 is a sectional view taken along the line A-A' of FIG. 3.

[0023] FIG. 5 is a sectional view taken along the line B-B' of FIG. 3.

[0024] FIG. 6(A) is a sectional view along the line C-C' of FIG. 3; and FIG. 6(B) is a sectional view of the construction in which the formation area of a bank layer is not extended until it covers a relay electrode.

[0025] FIG. 7 is a graph showing the I-V characteristics of a light-emission element used in the display apparatus shown in FIG. 1.

[0026] FIG. 8 includes step sectional views showing a method of manufacturing a display apparatus of the present invention.

[0027] FIG. 9 is a block diagram showing an example of an improvement of the display apparatus shown in FIG. 1.

[0028] FIG. 10(A) is a sectional view showing a dummy wiring layer formed in the display apparatus shown in FIG. 9; and, FIG. 10(B) is a plan view thereof.

[0029] FIG. 11 is a block diagram showing a modification of the display apparatus shown in FIG. 3.

[0030] FIG. 12(A) is a plan view in which a pixel formed in the display apparatus shown in FIG. 11 is enlarged; FIG. 12(B) is a sectional view thereof.

[0031] FIG. 13 is an equivalent circuit diagram showing the construction of two pixels in which the driving current is inverted which are formed in a display apparatus according to a second embodiment of the present invention.

[0032] FIG. 14 is a waveform chart of each signal for driving one of the two pixels shown in FIG. 13.

[0033] FIG. 15 is a waveform chart of each signal for driving the other of the two pixels shown in FIG. 13.

[0034] FIG. 16 is a sectional view showing the construction of light-emission elements formed in the two pixels shown in FIG. 13.

[0035] FIG. 17 includes an illustration showing the arrangement of pixels in the display apparatus shown in FIG. 13.

[0036] FIG. 18 is an illustration showing the arrangement of pixels in a display apparatus according to a third embodiment of the present invention.

[0037] FIG. 19 is an illustration showing the arrangement of pixels in a display apparatus according to a fourth embodiment of the present invention.

[0038] FIG. 20 is an illustration showing the arrangement of pixels in a display apparatus according to a fifth embodiment of the present invention.

[0039] FIG. 21 is an illustration showing the arrangement of pixels in a display apparatus according to a sixth embodiment of the present invention.

[0040] FIG. 22 is a block diagram of a conventional display apparatus.

[0041] FIG. 23(A) is a plan view in which a pixel formed in the display apparatus shown in FIG. 22 is enlarged; FIG. 23(B) is a sectional view thereof.

REFERENCE NUMERALS

- [0042] 1 display apparatus
- [0043] 2 display section
- [0044] 3 data-side driving circuit
- [0045] 4 scanning-side driving circuit
- [0046] 5 checking circuit
- [0047] 6 pad for mounting
- [0048] 7, 7A, 7B pixels
- [0049] 10 transparent substrate
- [0050] 20 first TFT
- [0051] 21 gate electrode of first TFT
- [0052] 30 second TFT
- [0053] 31 gate electrode of second TFT
- [0054] 40, 40A, 40B light-emission elements
- [0055] 41 pixel electrode
- [0056] 42 positive-hole injection layer
- [0057] 43 organic semiconductor film
- [0058] 45 thin lithium-containing aluminum electrode
- [0059] 46 ITO film layer
- [0060] 50 gate insulation film
- [0061] 51 first interlayer insulation film
- [0062] 52 second interlayer insulation film
- [0063] DA dummy wiring layer
- [0064] bank bank layer
- [0065] cap holding capacitor
- [0066] cline capacitance line
- [0067] com common power-feed line
- [0068] gate, gateA, gateB scanning lines
- [0069] op, opA, opB counter electrodes
- [0070] sig, sigA, sigB data lines
- [0071] st, stA, stB potential holding electrodes

BEST MODE FOR CARRYING OUT THE INVENTION

[0072] The embodiments of the present invention will be described below with reference to the drawings.

[0073] [First Embodiment]

[0074] (Overall Construction of Active-Matrix Substrate)

[0075] FIG. 1 is a block diagram schematically showing the overall layout of a display apparatus. FIG. 2 is an

equivalent circuit diagram of an active matrix formed therein.

[0076] As shown in FIG. 1, in a display apparatus 1 of this embodiment, the central portion of a transparent substrate 10, which is a base body thereof, is formed into a display section 2. On both ends of the data lines "sig" of the peripheral portion of the transparent substrate 10, a data-side driving circuit 3 for outputting an image signal, and a checking circuit 5 are formed, and on both ends of the scanning lines "gate", a scanning-side driving circuit 4 for outputting a scanning signal is formed. In these driving circuits 3 and 4, a complementary TFT is formed by an n-type TFT and a p-type TFT. This complementary TFT forms a shift register, a level shifter, an analog switch, etc. On the transparent substrate 10, a mounting pad 6, which is a group of terminals for inputting an image signal, various potentials, and a pulse signal, is formed in the peripheral region to the outside from the data-side driving circuit 3.

[0077] (Arrangement of Common Power-Feed Lines and Pixels)

[0078] In the display apparatus 1, similarly to an active-matrix substrate of a liquid-crystal display apparatus, on the transparent substrate 10, a plurality of scanning lines "gate", and a plurality of data lines "sig" which extend in a direction intersecting the extension direction of the scanning lines "gate" are formed. As shown in FIG. 2, these data lines "sig" and scanning lines "gate" form the pixels 7 in a matrix.

[0079] Each of these pixels 7 is formed with a first TFT 20 in which a scanning signal is supplied to its gate electrode 21 (first gate electrode) via the scanning lines "gate". One of the source and drain regions of the second TFT 20 is electrically connected to the data line "sig", and the other is electrically connected to a potential holding electrode "st". With respect to the scanning lines "gate", capacitance lines "cline" are disposed in parallel, with a holding capacitor "cap" being formed between the capacitance line "cline" and the potential holding electrode "st". Therefore, when the first TFT 20 is selected by the scanning signal and is turned on, the image signal is written from the data line "sig" into the holding capacitor "cap" via the first TFT 20.

[0080] A gate electrode 31 (second gate electrode) of the second TFT 30 is electrically connected to the potential holding electrode "st". One of the source and drain regions of the second TFT 30 is electrically connected to the common power-supply lines "com", and the other is electrically connected to one of the electrodes (pixel electrode to be described later) of a light-emission element 40. The common power-supply lines "com" are maintained at a fixed potential. Therefore, when the second TFT 30 is turned on, the current in the common power-supply line "com" flows to the light-emission element 40 via this TFT, causing the light-emission element 40 to emit light.

[0081] In this embodiment, on both sides of the common power-feed lines "com", a plurality of pixels 7 to which driving current is supplied by the common power-feed lines "com" are arranged, and two data lines "sig" pass on a side opposite to the common power-feed lines "com" with respect to these pixels 7. That is, a data line "sig", a group of pixels connected thereto, one common power-feed line "com", a group of pixels connected thereto, and a data line "sig" for supplying a pixel signal to the group of pixels are

assumed to be one unit. This is repeated in the extension direction of scanning lines "gate", and one common power-feed line "com" is used to supply driving current to the pixels 7 for two rows. Therefore, in this embodiment, in a section between two pixels 7 disposed in such a manner as to sandwich the common power-feed lines "com", the first TFT 20, the second TFT 30, and the light-emission elements 40 are disposed in linear symmetry about the common power-feed line "com", simplifying the electrical connection between these elements and each wiring layer.

[0082] As described above, in this embodiment, since pixels for two rows are driven by one common power-feed line "com", in comparison with a case in which the common power-feed lines "com" are formed for each group of pixels for one row, one-half of the number of common power-feed lines "com" is required, and the gap secured between the common power-feed lines "com" and the data lines "sig", which is formed in the same section between the layers, is not required. Therefore, since an area for a wiring on the transparent substrate 10 can be made more narrow, the ratio of the light-emission area in each pixel area can be increased correspondingly, making it possible to improve display performance, such as luminance, contrast ratio, and so on.

[0083] Since the construction is formed in such a way that the pixels for two rows are connected to one common power-feed line "com" in this manner, the data lines "sig", which are in a state of being parallel in groups of two, supply an image signal to the group of pixels for each row.

[0084] (Structure of Pixels)

[0085] The structure of each pixel 7 of the display apparatus 1 constructed as described above will be described in detail with reference to FIGS. 3 to 6(A).

[0086] FIG. 3 is a plan view in which three pixels 7 of the plurality of pixels 7 formed in the display apparatus 1 of this embodiment are enlarged. FIGS. 4, 5, and 6(A) are respectively a sectional view along the line A-A' of FIG. 3, a sectional view along the line B-B' of FIG. 3, and a sectional view along the line C-C' of FIG. 3.

[0087] First, at a position corresponding to the line A-A' of FIG. 3, as shown in FIG. 4, in each of the pixels 7 on the transparent substrate 10, an island-shaped silicon film 200 for forming the first TFT 20 is formed, with a gate insulation film 50 being formed on the surface thereof. Further, a gate electrode 21 (a part of scanning lines "gate") is formed on the surface of the gate insulation film 50, and source and drain regions 22 and 23 are formed so as to be self-aligned with respect to the gate electrode 21. A first interlayer insulation film 51 is formed on the surface of the gate insulation film 50, and the data lines "sig" and the potential holding electrodes "st" are electrically connected to the source and drain regions 22 and 23 via contact holes 61 and 62 formed on this interlayer insulation film, respectively.

[0088] In each pixel 7, capacitance lines "cline" are formed in the same section between the layers of the scanning lines "gate" and the gate electrodes 21 (between the gate insulation film 50 and the first interlayer insulation film 51) in such a manner as to be parallel to the scanning lines "gate", and an extended portion "st1" of the potential holding electrode "st" over laps this capacitance line "cline"

via the first interlayer insulation film 51. For this reason, the capacitance line "cline" and the extended portion "st1" of the potential holding electrode "st" form a holding capacitor "cap" in which the first interlayer insulation film 51 is a dielectric film. A second interlayer insulation film 52 is formed on the surface of the potential holding electrodes "st" and the data lines "sig".

[0089] At a position corresponding to the line B-B' in FIG. 3, as shown in FIG. 5, two data lines "sig" corresponding to each pixel 7 are parallel on the surface of the first interlayer insulation film 51 and the second interlayer insulation film 52 formed on the transparent substrate 10.

[0090] At a position corresponding to the line C-C' in FIG. 3, as shown in FIG. 6(A), an island-shaped silicon film 300 for forming the second TFT 30 is formed on the transparent substrate 10 in such a manner as to extend across two pixels 7 which sandwich the common power-feed line "com", with the gate insulation film 50 being formed on the surface thereof. On the surface of the gate insulation film 50, the gate electrode 31 is respectively formed in each of the pixels 7 in such a manner as to sandwich the common power-feed lines "com", with source and drain regions 32 and 33 being formed so as to be self-aligned in this gate electrode 31. The first interlayer insulation film 51 is formed on the surface of the gate insulation film 50, and the relay electrode 35 is electrically connected to a source and drain region 62 via a contact hole 63 formed in this interlayer insulation film. In contrast, the common power-feed lines "com" are electrically connected to a portion, which is a common source and drain area 33 in two pixels 7 in the central portion of the silicon film 300, via a contact hole 64 of the first interlayer insulation film 51. A second interlayer insulation film 52 is formed on the surface of the common power-feed lines "com" and the relay electrode 35. A pixel electrode 41 formed from an ITO film is formed on the surface of the second interlayer insulation film 52. This pixel electrode 41 is electrically connected to the relay electrode 35 via a contact hole 65 formed in the second interlayer insulation film 52, and is electrically connected to the source and drain regions 32 of the second TFT 30 via this relay electrode 35.

[0091] Here, the pixel electrode 41 forms one of the electrodes of the light-emission element 40. That is, a positive-hole injection layer 42 and an organic semiconductor film 43 are multilayered on the surface of the pixel electrode 41, and a counter electrode "op" formed from a lithium-containing metal film, such as aluminum or calcium, is formed on the surface of the organic semiconductor film 43. This counter electrode "op" is a common electrode formed at least on a pixel area or in a stripe form, and is maintained at a fixed potential.

[0092] In the light-emission element 40 constructed as described above, a voltage is applied by assigning the counter electrode "op" and the pixel electrode 41 as a positive pole and a negative pole, respectively. As shown in FIG. 7, the current (driving current) which flows through the organic semiconductor film 43 increases sharply in an area where the applied voltage exceeds a threshold voltage. As a result, the light-emission element 40 emits light as an electroluminescence element or an LED element. The light from the light-emission element 40 is reflected by the counter electrode "op", is passed through the transparent pixel electrode 41 and the transparent substrate 10, and is output.

[0093] Such driving current used for light emission flows through a current path formed of the counter electrode "op", the organic semiconductor film 43, the positive-hole injection layer 42, the pixel electrode 41, the second TFT 30, and the common power-feed lines "com". Therefore, when the second TFT 30 is turned off, the driving current does not flow. In the display apparatus 1 of this embodiment, when the first TFT 20 is turned on as a result of being selected by a scanning signal, the image signal is written from the data lines "sig" into the holding capacitors "cap" via the first TFT 20. Therefore, even if the first TFT 20 is turned off, the gate electrode of the second TFT 30 is maintained at a potential corresponding to the image signal by the holding capacitor "cap", and therefore, the second TFT 30 remains in an on state. Therefore, the driving current continues to flow through the light-emission element 40, and this pixel is maintained in a switched-on state. This state is maintained until new image data is written into the holding capacitor "cap" and the second TFT 30 is turned off.

[0094] (Method of Manufacturing Display Apparatus)

[0095] In a method of manufacturing the display apparatus 1 constructed as described above, the steps up to manufacturing the first TFT 20 and the second TFT 30 on the transparent substrate 10 are nearly the same as the steps for manufacturing an active-matrix substrate of the display apparatus 1, and accordingly, are described in general outline with reference to FIG. 8.

[0096] FIG. 8 includes step sectional views schematically showing the process of forming each component of the display apparatus 1.

[0097] More specifically, as shown in FIG. 8(A), using a TEOS (tetraethoxysilane), oxygen gas, and the like as a starting-material gas as required, a base protective film (not shown) formed from a silicon oxide film having a thickness of approximately 2000 to 5000 angstroms is formed on the transparent substrate 10 by a plasma CVD method. Next, the temperature of the substrate is set to approximately 350° C., and a semiconductor film 100 formed from an amorphous silicon film having a thickness of approximately 300 to 700 angstroms is formed on the surface of the base protective film by a plasma CVD method. Next, a crystallization step, such as laser annealing or a solid-phase growth method, is performed on the semiconductor film 100 formed from an amorphous silicon film so that the semiconductor film 100 is crystallized into a polysilicon film. In the laser annealing method, for example, a line beam forming a spot having a major axis of 400 μm is used in the excimer laser, and its output intensity is, for example, 200 mJ/cm². The line beam is scanned in such a way that, for the line beam, a portion corresponding to 90% of the peak value of the laser intensity in the minor axis thereof overlaps in each area.

[0098] Next, as shown in FIG. 8(B), the semiconductor film 100 is patterned into island-shaped silicon films 200 and 300, and a gate insulation film 50 formed from a silicon oxide film or a nitride film having a thickness of approximately 600 to 1500 angstroms is formed on the surface of the silicon films 200 and 300 by a plasma CVD method by using TEOS (tetraethoxysilane) or oxygen gas as a starting-material gas.

[0099] Next, as shown in FIG. 8(C), a conductive film formed from a metal film, such as aluminum, tantalum,

molybdenum, titanium, or tungsten, is formed by a sputtering method, after which it is patterned in order to form gate electrodes **21** and **31** as a part of the scanning lines “gate”. In this step, the capacitance lines “cline” are also formed. In the figure, reference numeral **310** denotes an extended portion of the gate electrode **31**.

[0100] In this state, high-concentration phosphor ions or boron ions are implanted to form source and drain regions **22**, **23**, **32**, and **33** in a self-aligned manner with respect to the gate electrodes **21** and **31** in the silicon thin-films **200** and **300**. The portions where impurities are not introduced become channel areas **27** and **37**.

[0101] Next, as shown in FIG. 8(D), after the first interlayer insulation film **51** is formed, contact holes **61**, **62**, **63**, **64**, and **69** are formed, and a potential holding electrode “st” comprising an extended portion “st1” overlapping the data lines “sig”, the capacitance lines “cline”, and the extended portion **310** of the gate electrode **31**, a common power-feed line “com”, and the relay electrode **35** are formed. As a result, the potential holding electrode “st” is electrically connected to the gate electrode **31** via a contact hole **69** and the extended portion **310**. In this way, the first TFT **20** and the second TFT **30** are formed. Further, the holding capacitor “cap” is formed by the capacitance line “cline” and the extended portion “st1” of the potential holding electrode “st”.

[0102] Next, as shown in FIG. 8(E), the second interlayer insulation film **52** is formed, and in this interlayer insulation film, a contact hole **65** is formed in a portion corresponding to the relay electrode **35**. Next, after the ITO film is formed over the entire surface of the second interlayer insulation film **52**, the film is patterned, forming a pixel electrode **41** which is electrically connected to the source and drain regions **32** of the second TFT **30** via the contact hole **65**.

[0103] Next, as shown in FIG. 8(F), after a black resist layer is formed on the surface of the second interlayer insulation film **52**, this resist is left in such a manner as to surround an area where the positive-hole injection layer **42** and the organic semiconductor film **43** of the light-emission element **40** should be formed, forming a bank layer “bank”. Here, for the organic semiconductor film **43**, in any shape in a case in which the film is formed independently for each pixel, or in a case in which the film is formed in a stripe form along the data lines “sig”, a manufacturing method according to this embodiment can be applied by merely forming the bank layer “bank” in a shape corresponding thereto.

[0104] Next, a liquid material (precursor) for forming the positive-hole injection layer **42** is discharged from an ink-jet head **IJ** with respect to the inside area of the bank layer “bank”, and the positive-hole injection layer **42** is formed in the inside area of the bank layer “bank”. In a similar manner, a liquid material (precursor) for forming the organic semiconductor film **43** is discharged from the ink-jet head **IJ** with respect to the inside area of the bank layer “bank”, and the organic semiconductor film **43** is formed in the inside area of the bank layer “bank”. Here, since the bank layer “bank” is formed from a resist, it is water repellent. In contrast, since the precursor of the organic semiconductor film **43** mainly uses a hydrophilic solvent, the coating area of the organic semiconductor film **43** is reliably defined by the bank layer “bank”, and extrusion into adjacent pixels does not occur.

[0105] When forming the organic semiconductor film **43** and the positive-hole injection layer **42** by an ink-jet method

in this manner, in this embodiment, in order to improve the operation efficiency and the injection position accuracy, as shown in FIG. 3, the pitch **P** of the centers of the formation areas of the organic semiconductor films **43** is made equal at every interval of the adjacent pixels **7** along the extension direction of the scanning lines “gate”. Therefore, as indicated by the arrow **Q**, since a material for the organic semiconductor film **43** may be discharged from the ink-jet head **IJ** at positions at even intervals along the extension direction of the scanning lines “gate”, there is the advantage in that the operation efficiency is superior. Further, the movement control mechanism of the ink-jet head **IJ** is simplified, and the implantation position accuracy is improved.

[0106] Subsequently, as shown in FIG. 8(G), the counter electrode “op” is formed on the surface of the transparent substrate **10**. Here, the counter electrodes “op” are formed at least over the entire surface of the pixel area or in a stripe form. When the counter electrodes “op” are formed in a stripe form, after a metal film is formed over the entire surface of the transparent substrate **10**, the metal film is patterned in a stripe form.

[0107] Since the bank layer “bank” is formed from a resist, it is left intact, and as will be described below, the layer is used as a black matrix **BM** and an insulation layer for reducing parasitic capacitance.

[0108] TFTs are formed also in the data-side driving circuit **3** and the scanning-side driving circuit **4** shown in FIG. 1. These TFTs are formed by borrowing the entirety or a part of the steps for forming the TFT in the pixels **7**. Therefore, the TFT which forms a driving circuit is also formed in the same section between the layers as those of the TFTs of the pixels **7**.

[0109] Further, both the first TFT **20** and the second TFT **30** may be of n-type, or p-type, or one of them may be of n-type and the other of p-type. In any combination of these cases, TFTs can be formed by a well known method, and accordingly, description thereof has been omitted.

[0110] (Formation Area of Bank Layer)

[0111] In this embodiment, with respect to the entirety of the peripheral area of the transparent substrate **10** shown in FIG. 1, the bank layer “bank” (the formation area is shaded) is formed. Therefore, both the data-side driving circuit **3** and the scanning-side driving circuit **4** are covered with the bank layer “bank”. For this reason, even if the counter electrodes “op” are in an overlapping state with respect to the formation area of these driving circuits, the bank layer “bank” is interposed between the wiring layers and the counter electrodes “op” of the driving circuits. Therefore, since parasitization of a capacitance into the driving circuits **2** and **3** can be prevented, the load of the driving circuits **2** and **3** can be reduced, thereby making it possible to reduce power consumption or to achieve a higher speed of the display operation.

[0112] Further, in this embodiment, as shown in FIGS. 3 to 5, the bank layer “bank” is formed so as to overlap the data lines “sig”. Therefore, since the bank layer “bank” is interposed between the data lines “sig” and the counter electrodes “op”, it is possible to prevent capacitance from parasitizing in the data lines “sig”. As a result, since the load

of the data-side driving circuit **3** can be reduced, power consumption can be reduced or a higher speed of the display operation can be achieved.

[0113] Here, unlike the data lines “sig”, a large current for driving the light-emission, elements **40** flows through the common power-feed lines “com”, and the driving current is supplied to the pixels for two rows. For this reason, for the common power-feed lines “com”, their line width is set to be wider than the line width of the data lines “sig”, and the resistance value per unit length of the common power-feed lines “com” is set to be smaller than the resistance value per unit length of the data lines “sig”. Even under such design conditions, in this embodiment, when the bank layer “bank” is formed so as to overlap the common power-feed lines “com” and the formation area of the organic semiconductor film **43** is defined, the width of the bank layer “bank” to be formed here is made at the same width dimension as that of the bank layer “bank” overlapping two data lines “sig”, forming a construction suitable for making the pitch *P* of the centers of the formation areas of the organic semiconductor films **43** equal at any interval between the adjacent pixels **7** along the extension direction of the scanning lines “gate”.

[0114] Furthermore, in this embodiment, as shown in FIGS. **3**, **4**, and **6(A)**; the bank layer “bank” is also formed in an area overlapping the formation area of the first TFT **20** and the formation area of the second TFT **30** from among the formation area of the pixel electrode **41**. That is, as shown in FIG. **6(B)**, unless the bank layer “bank” is formed in an area overlapping the relay electrode **35**, even if driving current flows to a section adjoining the counter electrode “op” and the organic semiconductor film **43** emits light, this light is not output because it is sandwiched between the relay electrode **35** and the counter electrode “op”, and does not contribute to display. Such driving current flowing in a portion which does not contribute to display may be said to be a reactive current from the point of view of display. However, in this embodiment, the bank layer “bank” is formed in a portion where such reactive current should flow so that the flowing of the driving current thereinto is prevented, making it possible to prevent wasteful current from flowing into the common power-feed lines “com”. Therefore, the width of the common power-feed lines “com” may be narrower correspondingly.

[0115] Also, if the bank layer “bank” which is formed by a black resist as described above remains, the bank layer “bank” functions as a black matrix, improving display quality, such as luminance, contrast ratio, etc. That is, in the display apparatus **1** according to this embodiment, since the counter electrodes “op” are formed on the entire surface of the transparent substrate **10** or in a stripe form over a wide area thereof, light reflected by the counter electrodes “op” causes the contrast ratio to decrease. However, in this embodiment, since the bank layer “bank” having the function of inhibiting the parasitic capacitance is formed by a black resist while defining the formation area of the organic semiconductor film **43**, the bank layer “bank” functions also as a black matrix, and shuts off reflected light from the counter electrodes “op”; yielding an advantage in that the contrast ratio is high. Further, since the light-emission area can be defined in a self-aligned manner by using the bank layer “bank”, alignment allowance with the light-emission

area, which is a problem when the bank layer “bank” is not used as a black matrix and another metal layer is used as a black matrix, is not required.

[0116] [Example of an Improvement of the Above-Described Embodiment]

[0117] In the above-described embodiment, pixels **7**, to which driving current flows in a section between the pixels and the common power-feed lines “com”, are arranged on each of the two sides of the common power-feed lines “com”, and two data lines “sig” pass in parallel on a side opposite to the common power-feed lines “com” with respect to the pixels **7**. Therefore, there is a risk that crosstalk might occur between the two data lines “sig”. Accordingly, in this embodiment, as shown in FIGS. **9**, **10(A)**, and **10(B)**, a dummy wiring layer DA is formed at a position corresponding to a section between the two data lines “sig”. As this dummy wiring layer DA, for example, an ITO film DA1, which is formed at the same time as the pixel electrode **41**, can be used. Further, as the dummy wiring layer DA, an extended portion DA2 from the capacitance lines “cline” may be formed between two data lines “sig”. Both of them may be used as dummy wiring layer DA.

[0118] When the construction is formed in this manner, since a wiring layer DA different from the above passes between two parallel data lines “sig”, the above-mentioned crosstalk can be prevented by merely maintaining such wiring layer DA (DA1, DA2) at a fixed potential within at least one horizontal scanning period of the image. That is, whereas the film thickness of the first interlayer insulation film **51** and the second interlayer insulation film **52** is approximately 1 μm , the interval between two data lines “sig” is approximately 2 μm or more. Therefore, in comparison with capacitance formed between each data line “sig” and the dummy wiring layer DA (DA1, DA2), the capacitance formed between the two data lines “sig” is small enough that it can be effectively ignored. Therefore, since a signal of a high frequency which leaks from the data lines “sig” is absorbed in the dummy wiring layers DA and DA2, crosstalk between the two data lines “sig” can be prevented.

[0119] Furthermore, between two adjacent data lines “sig” of a plurality of data lines “sig”, it is preferable that sampling of an image signal be performed at the same timing. When the construction is formed in this manner, since potential variations during sampling occur simultaneously between two data lines “sig”, it is possible to more reliably prevent crosstalk between these two data lines “sig”.

[0120] [Another Example of Construction of Holding Capacitor]

[0121] Although in the above-described embodiment, capacitance lines “cline” are formed to form a holding capacitor “cap”, as described in the description of the related art, the holding capacitor “cap” may be formed by using a polysilicon film for forming a TFT.

[0122] Also, as shown in FIG. **11**, the holding capacitor “cap” may be formed between the common power-feed line “com” and the potential holding electrode “st”. In this case, as shown in FIGS. **12(A)** and **12(B)**, the extended portion **310** of the gate electrode **31** for electrically connecting the potential holding electrode “st” to the gate electrode **31** may be extended to the side of the lower layers of the common power-feed lines “com”, and the holding capacitor “cap”

may be formed by using the first interlayer insulation film **51** positioned between this extended portion **310** and the common power-feed line “com” as a dielectric film.

[0123] [Second Embodiment]

[0124] Although in the above-described first embodiment, the construction is formed in such a way that the light-emission elements **40** are driven by driving current of the same polarity in any pixel **7**, as will be described below, the construction may be formed in such a way that the same number of two types of pixels **7**, in which the light-emission elements **40** are driven by a driving current whose polarity is inverted, are among a plurality of pixels **7** to which driving current is passed in a section between the pixels and the same common power-feed line “com”.

[0125] Examples of such constructions are described with reference to FIGS. **13** to **17**. FIG. **13** is a block diagram of an embodiment in which two types of pixels, in which the light-emission elements **40** are driven by a driving current whose polarity is inverted, are structured. FIGS. **14** and **15** are each an illustration of a scanning signal, an image signal, the potential of common power-feed lines, and a potential of a potential holding electrode when the light-emission element **40** is driven by a driving current whose polarity is inverted.

[0126] In this embodiment and the embodiments to be described later, as shown in FIG. **13**, when driving the light-emission element **40** by driving current *i* whose polarity is inverted, in a pixel **7A** to which driving current flows from the common power-feed lines “com” as indicated by an arrow E, the first TFT **20** is formed of an n-channel type, and in a pixel **7B** from which driving current flows to the common power-feed lines “com” as indicated by an arrow F, the first TFT **20** is formed of a p-channel type. For this reason, a scanning line “gateA” and a scanning line “gateB” are formed in these two types of pixels **7A** and **7B**, respectively. Also, in this embodiment, if the second TFT **30** of the pixel **7A** is formed of a p-channel type, the second TFT **30** of the pixel **7B** is formed of an n-channel type, the first TFT **20** and the second TFT **30** being formed to be a reverse-conduction type in each of the pixels **7A** and **7B**. Therefore, for the image signals supplied respectively via a data line “sigA” corresponding to the pixel **7A** and a data line “sigB” corresponding to the pixel **7B**, their polarities are inverted, as will be described later.

[0127] Furthermore, in each of the pixels **7A** and **7B**, since the light-emission element **40** is driven by the driving current *i* whose polarity is inverted, as described later, the construction must be formed in such a way that the potential of the counter electrode “op” also has an opposite polarity when the potential of the common power-feed line “com” is used as a reference. Therefore, the counter electrode “op” is formed in such a way that the pixels **7A** and **7B**, to which the driving current *i* having the same polarity flows, are connected together and a predetermined potential is applied to each of them.

[0128] Therefore, as shown in FIGS. **14** and **15**, for the pixels **7A** and **7B**, waveforms of scanning signals supplied via the scanning lines “gateA” and “gateB”, waveforms of image signals supplied via the data lines “sigA” and “sigB”, the potential of the counter electrode “op”, the potentials of potential holding electrodes “stA” and “stB” are shown by

using the potential of the common power-feed lines “com” as a reference, respectively. Between the pixels **7A** and **7B**, each signal is set to have an opposite polarity in both the switched-on period and the switched-off period.

[0129] Also, as shown in FIGS. **16(A)** and **16(B)**, light-emission elements **40A** and **40B** of different constructions are formed in the pixels **7A** and **7B**, respectively. That is, in the light-emission element **40A** formed in the pixel **7A**, from the side of the lower layers toward the side of the upper layers, the pixel electrode **41** formed from an ITO film, the positive-hole injection layer **42**, the organic semiconductor film **43**, and the counter electrode “opA” are multilayered in this sequence. In contrast, in the light-emission element **40B** formed in the pixel **7B**, from the side of the lower layers toward the side of the upper layers, the pixel electrode **41** formed from an ITO film, a lithium-containing aluminum electrode **45**, which is so thin as to have a light transmission property, the organic semiconductor film **42**, the positive-hole injection layer **42**, an ITO film layer **46**, and a counter electrode “opB” are multilayered in this sequence. Therefore, even though driving current of an opposite polarity flows through the light-emission elements **40A** and **40B**, respectively, since the structures of the electrode layers with which the positive-hole injection layer **42** and the organic semiconductor film **42** are in direct contact are the same, the light-emission characteristics of the light-emission elements **40A** and **40B** are identical.

[0130] When forming such two types of light-emission elements **40A** and **40B**, since each of both the organic semiconductor film **43** and the positive-hole injection layer **42** is formed in the inside of the bank layer “bank” by an ink-jet method, even if the top and bottom positions are reversed, the manufacturing steps are not complex. Further, in the light-emission element **40B**, in comparison with the light-emission element **40A**, the lithium-containing aluminum electrode **45**, which is so thin as to have a light transmission property, and the ITO film layer **46** are added. Nevertheless, even if the lithium-containing aluminum electrode **45** is structured so as to be multilayered in the same area as that of the pixel electrode **41**, no problem is posed for the display, and even if the ITO film layer **46** is also structured so as to be multilayered in the same area as that of the counter electrode “opB”, no problem is posed for the display. Therefore, the lithium-containing aluminum electrode **45** and the pixel electrode **41** may be patterned independently of each other, but may be patterned collectively by the same resist mask. In a similar manner, the ITO film layer **46** and the counter electrode “opB” may be patterned independently of each other, but may be patterned collectively by the same resist mask. It is a matter of course that the lithium-containing aluminum electrode **45** and the ITO film layer **46** may be formed only within the inside area of the bank layer “bank”.

[0131] After the light-emission elements **40A** and **40B** are made to be capable of being driven by a driving current whose polarity is inverted in each of the pixels **7A** and **7B** in this manner, the two types of pixels **7A** and **7B** are arranged as shown in FIG. **17**. In this figure, the pixel given the sign (−) corresponds to the pixel **7A** described with reference to FIGS. **13**, **14**, and **16**, and the pixel given the sign (+) corresponds to the pixel **7B** described with reference

to FIGS. 13, 15, and 16. In FIG. 17, the illustration of the scanning lines "gateA" and "gateB", and the data lines "sigA" and "sigB" is omitted.

[0132] As shown in FIG. 17, in this embodiment, the polarity of the driving current in each pixel is the same along the extension direction of the data lines "sigA" and "sigB", and along the extension direction of the scanning lines "gateA" and "gateB", the polarity of the driving current in each pixel is inverted for each pixel. As the formation areas of the counter electrodes "opA" and "opB" corresponding to each pixel are indicated by a dotted-chain line, respectively, each of the counter electrodes "opA" and "opB" is constructed so as to connect together the pixels 7A and 7B to which driving current having the same polarity flows. That is, the counter electrodes "opA" and "opB" are formed in a stripe form independently of each other along the extension direction of the data lines "sigA" and "sigB", and a negative potential and a positive potential when the potential of the common power-feed line "com" is used as a reference are applied to the counter electrodes "opA" and "opB", respectively.

[0133] Therefore, between each of the pixels 7A and 7B and the common power-feed line "com", driving currents i in a direction indicated by arrows E and F in FIG. 13 flow, respectively. For this reason, since the current which flows substantially through the common power-feed line "com" is cancelled by the driving current i of a different polarity, a smaller amount of the driving current flowing through the common power-feed lines "com" is required. Therefore, since the common power-feed lines "com" can be made correspondingly narrower, it is possible to increase the ratio of the light-emission area of the pixel area in the pixels 7A and 7B and to improve display performance, such as luminance, contrast ratio, and so on.

[0134] [Third Embodiment]

[0135] From the viewpoint of the fact that pixels are arranged in such a way that driving current flows at an opposite polarity in a section between the pixels and the same common power-feed line "com", each pixel may be arranged as shown in FIG. 18. In this embodiment, since the construction of each of the pixels 7A and 7B is similar to that of the second embodiment. Therefore, the description has been omitted. In FIG. 18 and FIGS. 19 to 21, for describing each embodiment to be described below, a pixel corresponding to the pixel 7A described with reference to FIGS. 13, 14, and 16 is shown by the sign (-), and a pixel corresponding to the pixel 7B described with reference to FIGS. 13, 15, and 16 is shown by the sign (+). As shown in FIG. 18, in this embodiment, the construction is formed in such a way that the polarity of the driving current in each of the pixels 7A and 7B is the same along the extension direction of the data lines "sigA" and "sigB" and that along the extension direction of the scanning lines "gateA" and "gateB", the polarity of the driving current in each of the pixels 7A and 7B is inverted every two pixels.

[0136] Also when the construction is formed in this manner, driving current i in a direction indicated by arrows E and F in FIG. 13 flows between each of the pixels 7A and 7B and the common power-feed line "com", respectively. For this reason, since the current which flows through the common power-feed line "com" is cancelled by the driving current i of a different polarity, a smaller amount of the driving

current flowing through the common power-feed lines "com" is required. Therefore, since the common power-feed lines "com" can be made correspondingly narrower, it is possible to increase the ratio of the light-emission area of the pixel area in the pixels 7A and 7B of the pixel area and to improve display performance, such as luminance, contrast ratio, and so on. In addition, in this embodiment, since the polarity of the driving current is inverted every two pixels along the extension direction of the scanning lines "gateA" and "gateB", for the pixels which are driven by driving current having the same polarity, the counter electrodes "opA" and "opB" which are common to the adjacent pixels for two rows may be formed in a stripe form. Therefore, the number of stripes of the counter electrodes "opA" and "opB" can be reduced by half. Further, since the resistance of the counter electrodes "opA" and "opB" can be decreased in comparison with the stripe for each pixel, an influence of a voltage drop of the counter electrodes "opA" and "opB" can be reduced.

[0137] [Fourth Embodiment]

[0138] Furthermore, from the viewpoint of the fact that pixels are arranged in such a way that driving current flows at an opposite polarity in a section between the pixels and the same common power-feed line "com", each pixel may be arranged as shown in FIG. 19.

[0139] As shown in FIG. 19, in this embodiment, the construction is formed in such a way that the polarity of the driving current in each of the pixels 7A and 7B is the same along the extension direction of the scanning lines "gateA" and "gateB" and that along the extension direction of the data lines "sigA" and "sigB", the polarity of the driving current in each of the pixels 7A and 7B is inverted for each pixel.

[0140] Also in the case where the construction is formed in this manner, similarly to the second embodiment or the third embodiment, since the current flowing through the common power-feed lines "com" is cancelled by the driving current having a different polarity, a smaller amount of the driving current flowing through the common power-feed lines "com" is required. Therefore, since the common power-feed lines "com" can be made correspondingly narrower, it is possible to increase the ratio of the light-emission area of the pixel area in the pixels 7A and 7B and to improve display performance, such as luminance, contrast ratio, and so on.

[0141] [Fifth Embodiment]

[0142] Furthermore, from the viewpoint of the fact that pixels are arranged in such a way that driving current flows at an opposite polarity in a section between the pixels and the same common power-feed line "com", each pixel may be arranged as shown in FIG. 20.

[0143] As shown in FIG. 20, in this embodiment, the construction is formed in such a way that the polarity of the driving current in each of the pixels 7A and 7B is the same along the extension direction of the scanning lines "gateA" and "gateB" and that along the extension direction of the data lines "sigA" and "sigB", the polarity of the driving current in each of the pixels 7A and 7B is inverted every two pixels.

[0144] When the construction is formed in this manner, similarly to the third embodiment, since the current which

flows through the common power-feed line “com” is cancelled by the driving current of a different polarity, a smaller amount of the driving current flowing through the common power-feed lines “com” is required. Therefore, since the common power-feed lines “com” can be made correspondingly narrower, it is possible to increase the ratio of the light-emission area of the pixel area in the pixels 7A and 7B and to improve display performance, such as luminance, contrast ratio, and so on. In addition, in this embodiment, since the polarity of the driving current is inverted every two pixels along the extension direction of the data lines “sigA” and “sigB”, for the pixels which are driven by the driving current having the same polarity, the counter electrodes “opA” and “opB” which are common to the adjacent pixels for two rows may be formed in a stripe form. Therefore, the number of stripes of the counter electrodes “opA” and “opB” can be reduced by half. Further, since the resistance of the counter electrodes “opA” and “opB” can be decreased in comparison with the stripe for each pixel, an influence of a voltage drop of the counter electrodes “opA” and “opB” can be reduced.

[0145] [Sixth Embodiment]

[0146] Furthermore, from the viewpoint of the fact that pixels are arranged in such a way that driving current flows at an opposite polarity in a section between the pixels and the same common power-feed line “com”, each pixel may be arranged as shown in FIG. 21.

[0147] As shown in FIG. 21, in this embodiment, the construction is formed in such a way that the polarity of the driving current in each of the pixels 7A and 7B is inverted for each pixel along both the extension direction of the scanning lines “gateA” and “gateB” and the extension direction of the data lines “sigA” and “sigB”.

[0148] Also in the case where the construction is formed in this manner, similarly to the second to fourth embodiments, since the current flowing through the common power-feed lines “com” is cancelled by the driving current having a different polarity, a smaller amount of the driving current flowing through the common power-feed lines “com” is required. Therefore, since the common power-feed lines “com” can be made correspondingly narrower, it is possible to increase the ratio of the light-emission area in the pixels 7A and 7B and to improve display performance, such as luminance, contrast ratio, and so on.

[0149] When the pixels 7A and 7B are arranged in this manner, the counter electrodes “opA” and “opB” in a stripe form cannot cope. Nevertheless, the construction may be formed in such a way that the counter electrodes “opA” and “opB” are formed for each of the pixels 7A and 7B, respectively, and that the counter electrodes “opA” and “opB” are connected by a wiring layer.

[0150] Industrial Applicability

[0151] As has been described up to this point, in the display apparatus according to the present invention, since pixels to which driving current is passed in a section between the pixels and the common power-feed line are arranged on both sides of the common power-feed line, only one common power-feed line is required for pixels for two rows. Therefore, since the formation area of the common power-feed lines “com” can be made narrower in comparison with a case where the common power-feed line is

formed for each group of pixels for one row, it is possible to increase correspondingly the ratio of the light-emission area in the pixels and to improve display performance, such as luminance, contrast ratio, and so on.

[0152] When two types of pixels in which the light-emission element are driven by a driving current whose polarity is inverted are among a plurality of pixels to which the driving current is passed in a section between the pixels and the same common power-feed line, in one common power-feed line, since driving current flowing from the common power-feed line to the light-emission element cancels the driving current flowing in an opposite direction from the light-emission element to the common power-feed line, a smaller amount of the driving current which flows through the common power-feed line is required. Therefore, since the common power-feed lines “com” can be made correspondingly narrower, it is possible to increase the ratio of the light-emission area in the pixels and to improve display performance, such as luminance, contrast ratio, and so on.

1. A display apparatus comprising on a substrate:

a plurality of scanning lines;

a plurality of data lines extending in a direction intersecting the extension direction of the scanning lines;

a plurality of common power-feed lines parallel to the data lines; and

pixels formed in a matrix by said data lines and said scanning lines,

each of the pixels comprising:

a first thin-film transistor in which a scanning signal is supplied to its first gate electrode via said scanning lines;

a holding capacitor for holding an image signal supplied from said data lines via the first thin-film transistor; and

a second thin-film transistor in which said image signal held by the holding capacitor is supplied to its second gate electrode; and

a light-emission element having an organic semiconductor film, which emits light by a driving current that flows between a pixel electrode and a counter electrode when said pixel electrode is electrically connected to said common power-feed lines via said second thin-film transistor in a section between layers of said pixel electrode formed for each of said pixels and said counter electrode opposing the pixel electrode,

wherein pixels in which said driving current is passed in the section between the pixels and the common power-feed line are arranged on both sides of said common power-feed line, and said data lines pass on a side opposite to said common power-feed line with respect to the pixels.

2. A display apparatus according to claim 1, wherein, between two pixels arranged in such a manner as to sandwich said common power-feed line, said first thin-film transistor, said second thin-film transistor, and said light-

emission element are disposed in linear symmetry with respect to the common power-feed line.

3. A display apparatus according to one of claims 1 and 2, wherein a pitch of a center of a formation area of said organic semiconductor film is equal at every interval between adjacent pixels along an extension direction of said scanning lines.

4. A display apparatus according to claim 2, wherein the formation area of said organic semiconductor film is surrounded by a bank layer formed from an insulation film thicker than said organic semiconductor film, and the bank layer is formed in such a manner as to cover said data lines and said common power-feed lines at a same width dimension.

5. A display apparatus according to claim 4, wherein said organic semiconductor film is a film formed within an area surrounded by said bank layer by an ink-jet method, and said bank layer is a film for preventing an extrusion of said organic semiconductor film when said organic semiconductor film is formed by the ink-jet method.

6. A display apparatus according to one of claims 1 to 5, wherein a wiring layer is formed at a position corresponding to a section between two data lines passing on a side opposite to said common power-feed line with respect to said pixels.

7. A display apparatus according to claim 6, wherein sampling of an image signal is performed at a same timing in a section between two adjacent data lines of said plurality of data lines.

8. A display apparatus according to claim 1, wherein two types of pixels in which said light-emission element is

driven by a driving current whose polarity is inverted are among a plurality of pixels in which said driving current is passed in the section between the pixels and said same common power-feed line.

9. A display apparatus according to claim 8, wherein the polarity of the driving current in each pixel is the same in an extension direction of said data lines, and in an extension direction of said scanning lines, the polarity of the driving current in each pixel is inverted for each pixel.

10. A display apparatus according to claim 8, wherein the polarity of the driving current in each pixel is the same in an extension direction of said data lines, and in an extension direction of said scanning lines, the polarity of driving current in each pixel is inverted every two pixels.

11. A display apparatus according to claim 8, wherein the polarity of the driving current in each pixel is the same in an extension direction of said scanning lines, and in an extension direction of said data lines, the polarity of the driving current in each pixel is inverted for each pixel.

12. A display apparatus according to claim 8, wherein the polarity of the driving current in each pixel is the same in an extension direction of said scanning lines, and in an extension direction of said data lines, the polarity of the driving current in each pixel is inverted every two pixels.

13. A display apparatus according to claim 8, wherein the polarity of the driving current in each pixel is inverted for each pixel in both an extension direction of said scanning lines and an extension direction of said data lines.

* * * * *

专利名称(译)	显示装置		
公开(公告)号	US20030193493A1	公开(公告)日	2003-10-16
申请号	US10/457446	申请日	2003-06-10
[标]申请(专利权)人(译)	精工爱普生株式会社		
申请(专利权)人(译)	SEIKO EPSON CORPORATION		
当前申请(专利权)人(译)	SEIKO EPSON CORPORATION		
[标]发明人	OZAWA TOKUROH		
发明人	OZAWA, TOKUROH		
IPC分类号	H05B33/12 G09F9/30 G09G3/20 G09G3/30 H01L27/32 H01L51/50 H05B33/14 H05B33/26 G09G5/00		
CPC分类号	G09G3/30 H01L27/124 G09G3/3233 G09G2300/0426 G09G2300/0465 G09G2300/0809 G09G2310/0254 G09G2320/0209 G09G2330/021 H01L27/3223 H01L27/3244 H01L27/3246 H01L27/3265 H01L27/3276 G09G3/32		
优先权	1997177455 1997-07-02 JP 09/242904 1999-02-25 US PCT/JP1998/002982 1998-07-01 WO		
其他公开文献	US7460094		
外部链接	Espacenet USPTO		

摘要(译)

为了提供能够通过改善像素的布局和在基板上形成的公共馈电线来扩展像素的发光区域来提高显示质量的显示装置的目的，(7 A , 7 B) 包括发光元件 (40)，例如电致发光元件或LED元件，布置在公共馈电线的两侧 (com) 使得共同供电线 (com) 的数量减少。此外，在像素之间流动的驱动电流的极性 (7 A , 7 B) 和发光元件 (40) 的极性是反转使得流过公共电源线“com”的电流减少。

