

(19)



(11)

EP 2 065 881 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.04.2013 Bulletin 2013/14

(51) Int Cl.:
G09G 3/36^(2006.01)

(21) Application number: **08020562.8**

(22) Date of filing: **26.11.2008**

(54) **Liquid crystal display device**

Flüssigkristallanzeigevorrichtung

Dispositif d'affichage à cristaux liquides

(84) Designated Contracting States:
DE FR GB

(30) Priority: **27.11.2007 JP 2007306473**

(43) Date of publication of application:
03.06.2009 Bulletin 2009/23

(73) Proprietor: **Funai Electric Co., Ltd.**
Daito-shi,
Osaka 574-0013 (JP)

(72) Inventor: **Nakatsuka, Hitoshi**
Daito-shi
Osaka 574-0013 (JP)

(74) Representative: **Grünecker, Kinkeldey,**
Stockmair & Schwanhäusser
Leopoldstrasse 4
80802 München (DE)

(56) References cited:
US-A1- 2005 253 836 US-A1- 2007 024 565
US-B1- 6 222 516

EP 2 065 881 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a liquid crystal display device and, particularly, to such device in which the charge on a counter electrode is controlled not to vary.

2. Description of the Related Art

[0002] A liquid crystal display device displays an image by means of liquid crystal. The liquid crystal display device includes an upper glass substrate, a lower glass substrate, and a liquid crystal layer sandwiched between these substrates. Of the upper glass substrate, on its under surface facing the liquid crystal layer, a counter electrode for applying a common voltage V_{com} to the liquid crystal layer and a transmission line X for supplying the common voltage V_{com} to the counter electrode are situated. Of the lower glass substrate, on its upper surface facing the liquid crystal layer, a display electrode applying a display voltage to the liquid crystal layer and a transmission line Y for supplying a source voltage to the display electrode are situated.

In the arrangement as above, when a source voltage is applied to the display electrode and a common voltage V_{com} is applied to the counter electrode through the transmission line X, a drive voltage determined by a potential difference between the applied source voltage and common voltage V_{com} is applied to the liquid crystal layer.

[0003] The common voltage V_{com} serves as a reference voltage for the voltage that is applied to the liquid crystal layer. For example, in a liquid crystal display device using an inversion driving method, with respect to the counter electrode, the polarity of charge supplied to the display electrode is inverted at given intervals. In this case, a drive voltage corresponding to a voltage difference between the display electrode and the common electrode in each interval is applied to the liquid crystal layer. For this reason, it is desired that the common voltage V_{com} is stable for driving by the liquid crystal display device.

[0004] In the above arrangement of the liquid crystal display device, a common voltage V_{com} that is applied to the counter electrode may become nonuniform. This is due to varying impedance of the counter electrode and varying wiring lengths of the transmission line through which the common voltage V_{com} is supplied to the counter electrode. Nonuniform common voltage V_{com} that is applied to the counter electrode results in nonuniformity in the drive voltage V_d per pixel applied to the liquid crystal layer and gives rise to a flicker in the screen and uneven image quality. One possible method for preventing an increase of transmission line impedance is to increase the wire diameter of the transmission line. However, this

method is not practicable, because the larger the wire diameter, the smaller will be the aperture ratio of the glass substrate.

[0005] A technique concerning a common line wired on the glass substrate for transmitting a common signal is known.

Patent Document 1 (Japanese Published Unexamined Patent Application No. 2000-214431) discloses a semiconductor integrated circuit device having common output terminals and segment output terminals which output electric signals to drive a liquid crystal display panel, wherein the common output terminals are arranged virtually evenly at both opposite sides of the semiconductor integrated circuit.

[0006] According to Patent Document 2 (Japanese Published Unexamined Patent Application No. 2007-140384), in order to stabilize a common voltage V_{com} , a supply voltage used as a reference for the common voltage V_{com} that is applied to the counter electrode is supplied from a power supply circuit provided outside the liquid crystal panel.

[0007] The technique disclosed in the above Patent Document 1 provides even wiring lengths of the common line for transmitting a common signal. However, the impedance of the counter electrode is not uniform. There is still a possibility of failing to keep the common voltage V_{com} applied to the counter electrode constant.

[0008] The technique disclosed in Patent Document 2 provides stable supply of the reference voltage for a common voltage V_{com} . However, the wiring lengths of the transmission line are uneven and impedance differs from one portion to another of the counter electrode. Hence, there is still a possibility of failing to keep the common voltage V_{com} applied to the counter electrode constant.

[0009] US 6,222,516 B1 relates to a display device capable of correcting a distorted common voltage. In the description, different solutions ("aspects") for correcting the common voltage are described. Regarding the "third aspect", a single correction circuit detects and corrects distortions of the common voltage through a terminal at the rim of the common electrode. The "fifth aspect" specifies the detection and correction of a distorted common voltage through separate circuits connected to the corners of the common electrode.

[0010] US 2007/0024565 A1 relates to a display device capable of compensating for distortions of two different common voltages, namely a first common voltage (V_{st}) provided to an electrode of a pixel's storage capacitor and a second common voltage (V_{com}) supplied to an electrode of a pixel's liquid crystal capacitor. Specifically, for compensating the distorted second common voltage level (V_{com}), a feedback control unit 153 receives distorted common voltage signals from multiple locations on a periphery of the display panel 140. Then, for generating a compensated common voltage, the plurality of received common voltage signals is combined to generate a compensated common voltage signal (V_{com}).

[0011] US 2005/0253836 A1 relates to a display device

correcting distortions of a common electrode. When writing pulse shaped display data via data lines to pixels, the common voltage level is distorted due to a capacitive coupling. For detecting the distortions, an electric line (coupling line) is provided outside of the display area, which is only subject to the capacitive coupling influence of the data lines. By providing a corrected common voltage level to the common electrode, the distortions of the common electrode can be corrected.

SUMMARY

[0012] The present invention aims to provide a liquid crystal display device that prevents nonuniformity in a displayed image and enhances display quality.

[0013] This is achieved by the subject matter of the independent claim. Advantageous embodiments are subject to the dependent claims.

[0014] In this aspect of the invention, the liquid crystal display device displays an image using the pixels formed by display electrodes disposed across a liquid crystal layer, a counter electrode made of a transparent material, and the liquid crystal layer sandwiched between the display electrodes and the counter electrode. A feedback voltage supplying means detects a charge in a certain area of the counter electrode and supplies a feedback voltage corresponding to the detected charge in that area to the common voltage supplying means. The common voltage supplying means compares the feedback voltage with a reference voltage, feedback controls the common voltage to be applied to the counter electrode based on the result of the comparison, and outputs the thus controlled common voltage to the counter electrode.

On the counter electrode, the area where the charge is detected is, for example, an area where the voltage has a larger pulsation than in other areas. When the common voltage is supplied from both lateral sides of the counter electrode, the common voltage varies across the counter electrode due to varying wiring lengths for charge supply and varying impedance of the counter electrode itself. However, feedback control of the common voltage contributes to reducing the variation of the common voltage, thus preventing uneven image quality such as flickers and enhancing the display quality.

According to the main aspect of the invention as defined by claim 1, it is possible to prevent nonuniformity of image quality on the screen and enhance the display quality.

[0015] The liquid crystal display device includes a plurality of common voltage supplying means, wherein the plurality of common voltage supplying means perform common voltage feedback control individually for certain areas of the counter electrode based on feedback voltages from these areas.

The invention provides common voltage feedback control in a plurality of areas of the counter electrode, thus achieving a uniform distribution of the common voltage across the counter electrode.

[0016] The common voltage supplying means perform

feedback control of the common voltage applied to both lateral marginal areas of the counter electrode and the common voltage applied to a virtually center area of the counter electrode.

5 In the center area of the counter electrode, common voltage pulsation tends to be larger in the charge distribution. In the invention because of common voltage feedback control in the center area and both lateral marginal areas of the counter electrode, a uniform distribution of the common voltage across the counter electrode is obtained and this enhances image quality.

[0017] The common voltage supplying means is comprised of an operational amplifier that compares a feedback voltage input thereto with a reference voltage and performs common voltage feedback control based on the result of the comparison.

10 The common voltage feedback control is carried out by the operational amplifier and, therefore, realized in a simple structure.

[0018] Further, the liquid crystal display device is configured such that the liquid crystal layer is sandwiched between two glass substrates, the counter electrode being situated on one of the two glass plates and the display electrodes being disposed on the other one of the two glass plates. The feedback voltage supplying means is comprised of a conductor wire wired on the one of the glass plates, making an electrical connection between the operational amplifier and the counter electrode.

20 The operational amplifier has a high input impedance and is hence capable of comparing a feedback voltage with the reference voltage, even if the diameter of the feedback line for the feedback voltage is made fine, thus increasing the wiring resistance. In the invention, by using the feedback line with a fine diameter, it can be prevented that the feedback line degrades the aperture ratio of the glass substrate.

[0019] In a more specific example of the invention, the source voltage supplying means is configured to supply the source voltages to the display electrodes, while inverting the polarity of the source voltage on a pixel by pixel basis.

In a liquid crystal driving method in which the polarity of the voltage applied is inverted pixel by pixel, polarity imbalance of magnetic fields produced in the display electrodes has a great influence on the pulsation of a common voltage in the counter electrode. For example, if adjacent pixels have opposite polarities and substantially the same level of charge is applied to their display electrodes, the polarities of these pixels cancel each other, thus having no effect on the common voltage. However, if adjacent pixels have the same polarity or there is a very large difference between the charges on these pixels, electric fields with unbalanced polarity are produced in their display electrodes, which affects the common voltage and results in a significant unevenness in image quality.

45 The present invention is, therefore, particularly effective for this driving method in which the polarity is inverted pixel by pixel, and makes it possible to effectively prevent

uneven image quality on the screen.

[0020] In a more specific example of the invention, the source voltage supplying means is comprised of a thin film transistor serving as a switch to supply a source voltage to each display electrode, a source driver IC to supply the source voltage to a source electrode of the thin film transistor, a gate driver IC to supply a gate signal to a gate electrode of the thin film transistor and turn the transistor on; and a controller IC to control driving of the source driver IC and the gate driver IC, wherein the operational amplifier is installed in the controller IC.

In the invention configured as above, the operational amplifier is installed in the controller IC. Hence, space can be used efficiently and the liquid crystal display device can be made compact.

[0021] In a comparative example, the liquid crystal display device is configured such that the liquid crystal layer is sandwiched between two glass substrates, the counter electrode being situated on one of the two glass plates and the display electrodes being disposed on the other one of the two glass plates, wherein the common voltage supplying means includes a plurality of operational amplifiers that compare a feedback voltage input thereto with a reference voltage and perform common voltage feedback control based on the result of the comparison, wherein the feedback voltage is received through wires wired on the one of the glass substrates, these wires making electrical connections between certain areas of the counter electrode and the operational amplifiers, wherein the source voltage supplying means is comprised of a thin film transistor serving as a switch to supply a source voltage to each display electrode, a source driver IC to supply a source voltage based on an input image signal to a source electrode of the thin film transistor, a gate driver IC to supply a gate signal to a gate electrode of the thin film transistor and turn the transistor on; and a controller IC to control driving of the source driver IC and the gate driver IC, and the source voltage supplying means supplying the source voltages to the display electrodes, while inverting the polarity of the source voltages for each column of pixels, wherein the operational amplifiers are installed in the controller IC.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

Fig. 1 is a block diagram illustrating an exemplary liquid crystal display device 100.

Fig. 2 is a perspective view illustrating an exemplary display panel.

Fig. 3 is a block diagram illustrating an exemplary configuration of a controller IC.

Fig. 4 represents, by way of example, a relationship between the polarity of pixels and pulsation of a common voltage V_{com} in a 1 x 1 dot inversion driving method.

Fig. 5 is a diagram to explain the pulsations of a

common voltage V_{com} .

Fig. 6 is a diagram to explain the pulsations of a common voltage V_{com} .

Fig. 7 is a graph to explain distribution of the pulsation amplitude of a common voltage V_{com} for one scan line.

Fig. 8 is a graph to explain distribution of the pulsation amplitude of a common voltage V_{com} for one scan line.

Fig. 9 is a graph to explain a drive voltage V_d applied to each of adjacent pixels $P(i, j)$ fitted with R, G, and B color filters respectively.

Fig. 10 is a graph to explain a drive voltage V_d applied to each of adjacent pixels $P(i, j)$ fitted with R, G, and B color filters respectively.

Fig. 11 is a block diagram illustrating the structure of a liquid crystal display device 100 in a second embodiment.

Fig. 12 is a graph to explain distribution of a common voltage V_{com} across the counter electrode in the second embodiment.

Fig. 13 is a graph to explain distribution of a common voltage V_{com} across the counter electrode in the second embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0023] In the following, embodiments of the present invention will be described in order noted below. In the figures, the same or corresponding components are assigned the same reference numbers and description thereof is not repeated.

1. First Embodiment

- 1.1 Structure of Liquid Crystal Display Device
- 1.2 Effect of Liquid Crystal Display Device

2. First comparative example
3. Second comparative example

1. First Embodiment

1.1 Structure of Liquid Crystal Display Device A liquid crystal display device according to a first embodiment of the invention generates a drive voltage V_d based on an image signal (video signal and synchronization signal) supplied. Application of the generated drive voltage V_d to pixels varies the light transmittance across the pixels and an image is displayed by the multiple pixels having different transmittance values. The liquid crystal display device carries out feedback control of a common voltage V_{com} serving as a reference for the drive voltage V_d , thereby avoiding nonuniformity in a displayed image and enhancing display quality. The following description of

the present embodiment assumes that the liquid crystal display device is an active matrix type. However, the present invention can be applied to any liquid crystal display device that uses a common voltage V_{com} to drive liquid crystal, even adopting any other driving method.

[0024] Fig. 1 is a block diagram of the liquid crystal display device 100. The liquid crystal display device 100 includes a display panel 10 to display an image, a source driver IC 20 to generate a source voltage V_s based on an image signal, a gate driver IC 30 to select a pixel column to be scanned, and a controller IC 40 to control driving of the source driver IC 20 and driving of the gate driver IC 30.

[0025] Fig. 2 is a perspective view of the display panel. The display panel 10 includes two glass substrates 11, 12, a liquid crystal layer 16 sandwiched between these glass substrates 11, 12, and a polarizing plate 13 to polarize light. On one glass substrate 11, color filters 14 separating light passing through the display panel 10 into R (red), G (green) and B (blue) colors and a counter electrode 15 to which a common voltage V_{com} is applied are situated. On the other glass substrate 12, a thin film transistor (TFT) Q as a switch element, a display electrode E (i, j) which is connected to a drain electrode of the thin film transistor Q and to which a source voltage is applied, a source line SL (i) connecting an output terminal S (i) of the source driver IC 20 to a source electrode of the thin film transistor Q, and a gate line GL (j) connecting an output terminal G (j) of the gate driver IC 30 to a gate electrode of the thin film transistor Q are disposed.

[0026] As shown in Fig. 2, pixels P are formed by the counter electrode 15 situated on the glass substrate 11, display electrodes E (i, j) disposed on the glass substrate 12, and the liquid crystal layer 16 sandwiched between the counter electrode 15 and the display electrodes E (i, j). The display panel 10 has a screen in which the pixels (i, j) are arranged in a matrix, wherein resolution depends on the number of pixels. The liquid crystal layer 16 is filled with a liquid crystal material in which molecular arrangement varies depending on a voltage applied thereto. Each pixel P (i, j) is driven by applying a drive voltage V_d to the liquid crystal material, the drive voltage V_d corresponding to a potential difference between a source voltage V_s applied to the display electrode E (i, j) for that pixel and a common voltage V_{com} applied to the counter electrode 15. In the present embodiment, ITO (Indium Tin Oxide) is assumed as the material of the counter electrode 15 and the display electrodes E (i, j), where i and j denote x and y coordinate values to identify the position of each pixel in the matrix.

[0027] The controller IC 40 acquires a video signal and a synchronization signal from an external device (not shown) and generates a certain signal to control the source driver IC 20 and the gate driver IC 30. The controller IC 40 is also responsible for feedback control of a common voltage V_{com} that is applied to the counter elec-

trode 15.

Fig. 3 is a block diagram of the controller IC. Referring to Fig. 3, the controller IC 40 includes a signal generator 41 which generates a control signal based on a received signal, an operational amplifier 42 (a common voltage supplying means) which feedback controls a common voltage V_{com} in a certain area of the counter electrode 15 and applies V_{com} to the counter electrode 15, and an operational amplifier 43 which applies a common voltage V_{com} to the counter electrode 15.

[0028] The signal generator 41 receives from the external device a digital video signal D_v for an image to be displayed as well as a horizontal synchronization signal HSY and a vertical synchronization signal VSY for the digital video signal D_v and generates a signal to control the source driver IC 20 and the gate driver IC 30. In particular, the signal generator 41 generates a latch pulse LP, a source driver start signal SSP, a source driver clock signal SCK, and a digital image signal DA and supplies these generated signals to the source driver IC 20. The controller IC 40 (signal generator 41) also generates a gate driver start signal GSP and a gate driver clock signal GCK and supplies these generated signals to the gate driver IC 30.

[0029] The operational amplifier 42 compares a feedback voltage V_f based on the charge in a certain area of the counter electrode 15 with a reference voltage V_{ref} and feedback controls a common voltage V_{com} based on the result of the comparison. A first input terminal 42a of the operational amplifier 42 is connected to a reference voltage supply circuit 50 that generates a reference voltage V_{ref} and a second input terminal 42b of the operational amplifier 42 is connected to a conductor wire F. The other end of the conductor wire F is connected to an area T1 of the counter electrode 15 facing the display electrodes E (a, b) for pixels P (a, b) in the center of the display panel 10. An output terminal 42c is connected to the area T1 of the electrode 15 through a transmission line A. The output terminal 42c supplies a feedback voltage V_{com} based on the voltage V_f in the area T1 to the second input terminal 42b of the operational amplifier 42. The area of the counter electrode to which the conductor wire F is connected may be an area where a large pulsation of the common voltage V_{com} occurs, which is which is not limited to the area T1.

[0030] The operational amplifier 42 has a large input impedance, making current hard to flow in the operational amplifier 42. Thus, even if the conductor wire F as the feedback line connected to the second input terminal 42b is narrow and its wiring resistance is large, the operational amplifier 42 can operate correctly. For a type of display panel in which conductor wires are wired on the glass substrate such as LOG (Line On Glass), this produces an effect that makes the conductor wire F invisible, not degrading the aperture ratio of the glass substrate. The conductor wire F is a realization of a feedback voltage supplying means.

[0031] The operational amplifier 43 applies a common

voltage V_{com} to the counter electrode 15 based on a reference voltage V_{ref} supplied from the reference voltage supply circuit 50. A first input terminal 43a of the operational amplifier 43 is connected to the reference voltage supply circuit 50. A second input terminal 43b of the operational amplifier 43 is connected to an output terminal 43c and the operational amplifier 43 provides a negative feedback control. The output terminal 43c is also connected to a transmission line B that provides connections from the areas at both lateral sides of the display panel 10 to the counter electrode 15. Therefore, through the transmission line B, the operational amplifier 43 supplies a common voltage V_{com} to the counter electrode 15 from both side areas of the display panel 10.

[0032] The source driver IC 20 generates a source voltage V_s that is applied to the display electrodes E (i, j). The source driver IC 20 includes a sampling memory, a hold memory, and an output circuit. Digital image signals DA supplied by the controller IC 40 to the source driver IC 20 are sequentially stored into the sampling memory in synchronization with input timing of a latch pulse LP. After all digital image signals DA are stored in the sampling memory, when a source driver start pulse is output, the digital image signals DA are transferred in a batch from the sampling memory into the hold memory. Then, the digital image signals DA are passed to the output circuit, where they are digital-to-analog converted based on a gray level voltage and output as source voltages V_s . The output circuit applies the source voltages V_s from the output terminals S (i) of the source driver IC 20 through the source lines (SL) i to the source electrodes of the thin film transistors Q.

[0033] The gate driver IC 30 generates a gate signal that turns a thin film transistor on. The gate driver IC 30 includes n stages of shift registers and a level converter which outputs gate signals. When a gate driver start signal GSP and a gate driver clock signal GCK supplied from the controller IC 40 are input to each shift register, each shift register takes in the gate driver start signal GSP at a rise timing of the gate driver clock signal GCK and shifts the first bit in order at a fall timing of the gate driver clock signal GCK. The shift registers sequentially output each bit as a gate signal to the gate lines GL (j).

[0034] The following description will explain the operation of the liquid crystal display device embodied as described above.

When digital video signals Dv and a horizontal synchronization signal HSY and a vertical synchronization signal VSY are supplied from the external device to the controller IC 40, the controller IC 40 generates the above-mentioned signals and supplies the generated signals to the source driver IC 20 and the gate driver IC 30. The source driver IC 20 supplies source voltages V_s to the source electrodes of the thin film transistors Q through the source lines SL (i). The gate driver IC 30 supplies gate signals to the gate electrodes of the thin film transistors Q through the gate lines GL (j). Thus, the gate signals applied to the gate electrodes of the thin film transistors Q through

the gate lines GL (j) turn the thin film transistors Q on and the source voltages are applied to the display electrodes E (i, j) connected to the drain electrodes of the thin film transistors Q. In this way, the source driver IC 20, the gate driver IC 30, and the controller IC 40 realize a source voltage supplying means.

[0035] Also, the controller IC 40 supplies a common voltage V_{com} to the counter electrode 15 through the transmission lines A, B. Consequently, to the liquid crystal layer 16 for a pixel P (i, j), a drive voltage V_s is applied, the drive voltage V_s corresponding to a potential difference between the source voltage V_s applied to the corresponding display electrode E (i, j) and the common voltage V_{com} applied to the counter electrode 15. Meanwhile, the common voltage V_{com} applied to the area T1 of the counter electrode 15 to which the conductor wire F is connected is feedback controlled by the operational amplifier 42 and supplied again to the counter electrode 15.

[0036] 1.2 Effect of Liquid Crystal Display Device The following description will explain the effect of the liquid crystal display device 100 using the 1 x 1 dot inversion driving method to drive the liquid crystal. Fig. 4 represents a relationship between the polarity of pixels and pulsation of a common voltage V_{com} in the 1 x 1 dot inversion driving method.

As shown in the upper portion of Fig. 4, in the case of the 1 x 1 dot inversion driving method, for pixels P (n, j) and pixels P (n + 1, j) to which a source line SL (n) and a source line SL (n + 1) are connected, source voltages V_s of opposite polarities are applied to every pair of adjacent pixels in the horizontal direction. At this time, as shown in the lower portion of Fig. 4, if the liquid crystal is driven so that pixels to drive are switched in every 1 x 2 pixels (for convenience, a pixel not to drive is represented as 0), the common voltage V_{com} pulsates with polarity inversion per horizontal cycle. Consequently, the pulsation of the common voltage V_{com} becomes larger in a certain area of the counter electrode 15 in a relation to impedance that varies across the counter electrode. Driving by the 1 x 1 dot inversion driving method is only exemplary; the driving method to be applied could be different from this method.

[0037] Figs. 5 and 6 are diagrams to explain the pulsations of a common voltage V_{com} . Fig. 5 shows the pulsations of a common voltage V_{com} in different portions of the counter electrode, when feedback control is not applied. Fig. 6 shows the pulsations of a common voltage V_{com} in different portions of the counter electrode, when feedback control is applied. A waveform profile in the upper portion of each figure represents the pulsation of a common voltage V_{com} around an input point of common voltage V_{com} . A waveform profile in the lower portion represents the pulsation of a common voltage V_{com} in the area T1 of the counter electrode 15.

[0038] The impedance of the counter electrode 15 around an input point is smaller than that in the area T1 which is positioned virtually in the center of the counter

electrode. Therefore, the pulsation of a common voltage V_{com} around the input point is smaller. On the other hand, the impedance in the area T1 virtually in the center of the counter electrode is larger. Therefore, the amplitude of the pulsation of a common voltage V_{com} becomes larger, as shown in the lower portion of Fig. 5, in the case that feedback control is not applied. By contrast, in the case that feedback control of the common voltage V_{com} supplied to the area T1 is applied, the amplitude of the pulsation of the common voltage V_{com} is reduced due to feedback control, as shown in the lower portion of Fig. 6.

[0039] Figs. 7 and 8 are graphs to explain distribution of the pulsation amplitude of the common voltage V_{com} for one scan line. In each graph, the abscissa denotes a sequence of counter electrode 15 areas corresponding to the pixels (i, b), where $i = 1$ to n , connected to a particular gate line GL (b). The ordinate denotes the pulsation amplitude of the common voltage V_{com} . Fig. 7 shows the pulsation amplitude in the case that the common voltage V_{com} applied to the area T1 positioned virtually in the center of the counter electrode 15 is not feedback controlled. Fig. 8 shows the pulsation amplitude in the case that the common voltage V_{com} in the area T1 is feedback controlled.

[0040] As shown in Fig. 7, when the common voltage V_{com} is supplied through the transmission line B from both lateral sides of the display panel 10, the pulsation amplitude of the common voltage V_{com} becomes peak in the area T1. On the other hand, when the common voltage V_{com} in the area T1 is feedback controlled, the pulsation amplitude of the common voltage V_{com} in the area T1 is reduced, as shown in Fig. 8. Accordingly, the pulsation amplitude across the counter electrode 15 for one scan line becomes smaller. In this way, in the present embodiment, due to that the operational amplifier 42 feedback controls the common voltage V_{com} with a large pulsation amplitude, it is possible to reduce the pulsation amplitude of the common voltage V_{com} across the counter electrode 15.

[0041] Figs. 9 and 10 are graphs to explain a drive voltage V_d applied to each of adjacent pixels P (i, j) fitted with R, G, and B color filters respectively. The pixels discussed in this example are those in the area where the common voltage V_{com} has a large pulsation amplitude. It is assumed that, as an image signal, a checkered pattern image signal is supplied to the controller IC 40. Driving the display panel 10 is performed by a dot inversion driving method wherein voltages of opposite polarities are applied to every pair of R, G, B adjacent pixels. Fig. 9 shows drive voltage V_d values applied to R, G, B pixels in the case that feedback control of a common voltage V_{com} is not applied. Fig. 10 shows drive voltage V_d values applied to R, G, B pixels in the case that feedback control of a common voltage V_{com} is applied.

[0042] As shown in Fig. 9, the drive voltage V_d applied to the liquid crystal layer 16 has a value that corresponds to a potential difference between the source voltage V_s

applied to each pixel and the common voltage V_{com} . As seen from Fig. 9, the absolute value of the drive voltage V_d that is applied to the liquid crystal layer for a pixel P_g (i, j) fitted with a G color film is larger than the absolute values of the drive voltage V_d that is applied to the liquid crystal layer for pixels P_r , P_b fitted with R and B color films. As implied from Fig. 9, consequently, among the adjacent R, G, and B pixels, the pixel fitted with the G (green) color filter has a higher light transmittance, which produces an area where a G (green) tone is distinct on the screen.

[0043] As shown in Fig. 10, in the case of feedback control of a common voltage V_{com} is applied, the common voltage V_{com} value changes to approach an ideal common voltage V_{com} value and the values of the drive voltage V_d for each of adjacent R, G, B pixels become uniform. Accordingly, unbalance of the tones of R, G, B pixels is avoided, uneven image quality in the screen is prevented, and display quality is improved.

2. First comparative example

[0044] In the foregoing first embodiment, feedback control of a common voltage V_{com} value for a certain subset of pixels P (i, j) is performed using one operational amplifier. However, in a case where a larger counter electrode is used as in a liquid crystal display device for a large screen, the LCD device may be adapted to implement V_{com} feedback control individually in a plurality of areas of the counter electrode using a plurality of operational amplifiers.

[0045] Fig. 11 is a block diagram of a liquid crystal display device 100. This device has the same structure as shown in Fig. 1, though the gate driver IC is omitted from Fig. 11 for the sake of simplicity. Operational amplifiers 44 to 46 are responsible for feedback control of a common voltage V_{com} that is applied in both lateral marginal areas and a virtually center area of the counter electrode 15.

In particular, the operational amplifier 44 feedback controls the common voltage V_{com} applied in an area T2 of the counter electrode 15 marked at lower left. The operational amplifier 46 feedback controls the common voltage V_{com} applied in an area T4 of the counter electrode 15 marked at lower right. And, the operational amplifier 45 feedback controls the common voltage V_{com} applied in an area T5 of the counter electrode 15 marked at lower center. The first input terminals 44a to 46a of the operational amplifiers 44 to 46 are connected to the reference voltage supply circuit 50, so that feedback control of the common voltage V_{com} in each area T2 to T4 is performed, based on the reference voltage V_{ref} of the same potential.

[0046] Fig. 12 and Fig. 13 are graphs to explain distribution of the pulsation amplitude of the common voltage V_{com} for one scan line in the second embodiment. A dotted line denotes an ideal common voltage V_{com} . As shown in Fig. 12, the pulsation of the common voltage

Vcom in the area T3 becomes largest in the case that feedback control is not applied. On the other hand, in the case that feedback control of the common voltage Vcom in the areas T2, T3, T4 is applied, as shown in Fig. 13, the pulsation of the common voltage Vcom across the counter electrode 15 is reduced. At this time, the operational amplifiers 44 to 46 perform feedback control of the common voltage Vcom based on the same reference voltage Vref. Accordingly, this feedback control provides a uniform value of the common voltage Vcom, prevents uneven image quality in the screen, and improves display quality.

[0047] 3. Second comparative example There are examples of various modifications of the present invention. As an example of a liquid crystal driving method, in addition to the described 1 x 1 dot inversion driving method, a 1 x 2 dot inversion driving method and a column inversion driving method may be used.

[0048] The liquid crystal display device of the present invention may be a television receiver with a tuner for receiving TV broadcasting.

[0049] Needless to say, the present invention is not limited to the above-described embodiments. It will be obvious to those skilled in the art that variants may be considered to be involved in embodiments of the present invention disclosed herein by applying the following:

- Appropriately changing combinations of elements, components, and the like, which are mutually replaceable, disclosed in the above-described embodiments
- Appropriately using or changing combinations of elements, components, and the like which are not disclosed in the above-described embodiments, but are known to those skilled in the art and mutually replaceable with the elements, components, and the like disclosed herein.
- Appropriately using or changing combinations of elements, components, and the like which are not disclosed in the above-described embodiments, but may be considered by those skilled in the art as alternatives to the elements, components, and the like disclosed herein based on common knowledge.

While the invention has been particularly shown and described with respect to preferred embodiments thereof, it should be understood by those skilled in the art that the foregoing and other changes in form and detail may be made therein without departing from the scope of the invention as defined in the appended claims.

Claims

1. A liquid crystal display device, comprising:

pixels (P) that are formed by a liquid crystal layer (16) that is sandwiched between two glass sub-

strates (11, 12);
 display electrodes (E) disposed across the liquid crystal layer (16);
 a counter electrode (15) made of a transparent material, and which displays an image by applying a drive voltage (Vd) to said liquid crystal layer (16),
 the drive voltage (Vd) corresponding to a potential difference between each of said display electrodes (E) and said counter electrode (15);
 a source voltage supplying means that supplies source voltages (Vs) based on image signals to said display electrodes (E); and
 a first common voltage supplying means (43) configured to perform feedback control of a common voltage (Vcom) applied to both lateral marginal areas of said counter electrode (15) based on the feedback voltage from these areas, wherein said first common voltage supplying means (43) includes an operational amplifier that compares the feedback voltage with a reference voltage (Vref);

characterized by

a feedback voltage supplying means (F) wired on one of said glass substrates (11, 12) and comprises a conductor wire with a fine diameter, the conductor wire making an electrical connection between a second operational amplifier (42) and an area T1 positioned in the center of the counter electrode (15), configured to output a feedback voltage (Vf) corresponding to a potential in a center area of said counter electrode (15); and
 a second common voltage supplying means (42) including said second operational amplifier that compares the feedback voltage (Vf) output by said feedback voltage supplying means (F) with said reference voltage (Vref), performs feedback control of a common voltage (Vcom) based on the result of the comparison, and supplies the thus controlled common voltage (Vcom) to the center area of said counter electrode (15) through a transmission line (A).

2. The liquid crystal display device according to claim 1, wherein said source voltage supplying means supplies said source voltages (Vs) of opposite polarities to said display electrodes (E) for every pair of adjacent pixels (P).

3. The liquid crystal display device according to claim 1 or 2, wherein said liquid crystal layer (16) is sandwiched between two glass substrates (11, 12), said counter electrode (15) being situated on one (11) of the two glass plates (11, 12) and said display electrodes (E) being disposed on the other one (12) of the two glass plates (11, 12).

4. The liquid crystal display device according to claim 3, said source voltage supplying means comprises:

a thin film transistor (Q) serving as a switch to supply a source voltage (Vs) to each of said display electrodes (E);
 a source driver IC (20) to supply said source voltage (Vs) to a source electrode of said thin film transistor (Q);
 a gate driver IC (30) to supply a gate signal to a gate electrode of said thin film transistor (Q) and turn said thin film transistor (Q) on; and
 a controller IC (40) to control driving of said source driver IC (20) and said gate driver IC (30), wherein said operational amplifier (42, 43) is installed in said controller IC (40).

Patentansprüche

1. Flüssigkristallanzeigevorrichtung, umfassend:

Pixel (P), die durch eine Flüssigkristallschicht (16) ausgebildet werden, die zwischen zwei Glassubstraten (11, 12) sandwichartig angeordnet ist;

Anzeigeelektroden (E), die über die Flüssigkristallschicht (16) angeordnet sind;

eine Gegenelektrode (15), die aus einem transparenten Material besteht und ein Bild durch Anlegen einer Ansteuerspannung (Vd) an die Flüssigkristallschicht (16) anzeigt,

wobei die Ansteuerspannung (Vd) einer Potentialdifferenz zwischen jeder der Anzeigeelektroden (E) und der Gegenelektrode (15) entspricht; eine Source-Spannungs-Zuführeinrichtung, die Source-Spannungen (Vs) auf der Basis von Bildsignalen den Anzeigeelektroden (E) zuführt; und

eine erste gemeinsame Spannungszuführeinrichtung (43), die dazu eingerichtet ist, eine Rückführsteuerung einer gemeinsamen Spannung (Vcom), die an beide seitlichen Randbereiche der Gegenelektrode (15) angelegt wird, auf der Basis der Rückführspannung aus diesen Bereichen auszuführen, wobei die erste gemeinsame Spannungszuführeinrichtung (43) einen Operationsverstärker umfasst, der die Rückführspannung mit einer Bezugsspannung (Vref) vergleicht;

gekennzeichnet durch

eine Rückführspannungszuführeinrichtung (F), die auf einem der Glassubstrate (11, 12) verdrahtet ist und einen Leiterdraht mit einem feinen Durchmesser umfasst, wobei der Leiterdraht eine elektrische Verbindung zwischen einem zweiten Operationsverstärker (42) und einem Bereich T1 herstellt, der sich im Zentrum

der Gegenelektrode (15) befindet, und dazu eingerichtet ist, eine Rückführspannung (Vf) auszugeben, die einem Potential in einem zentralen Bereich der Gegenelektrode (15) entspricht; und

eine zweite gemeinsame Spannungszuführeinrichtung (42), die den zweiten Operationsverstärker umfasst, der die Rückführspannung (Vf), die von der Rückführspannungszuführeinrichtung (F) ausgegeben wird, mit der Bezugsspannung (Vref) vergleicht, eine Rückführsteuerung einer gemeinsamen Spannung (Vcom) auf der Basis des Vergleichsergebnisses ausführt, und die auf diese Weise gesteuerte gemeinsame Spannung (Vcom) dem zentralen Bereich der Gegenelektrode (15) **durch** eine Sendeleitung (A) zuführt.

2. Flüssigkristallanzeigevorrichtung nach Anspruch 1, bei der die Source-Spannungs-Zuführeinrichtung die Source-Spannungen (Vs) entgegengesetzter Polaritäten den Anzeigeelektroden (E) für jedes Paar benachbarter Pixel (P) zuführt.

3. Flüssigkristallanzeigevorrichtung nach Anspruch 1 oder 2, bei der die Flüssigkristallschicht (16) zwischen zwei Glassubstraten (11, 12) sandwichartig angeordnet ist, sich die Gegenelektrode (15) auf einer (11) der beiden Glasplatten (11, 12) befindet und die Anzeigeelektroden (E) auf der anderen (12) der beiden Glasplatten (11, 12) angeordnet sind.

4. Flüssigkristallanzeigevorrichtung nach Anspruch 3, bei der die Source-Spannungs-Zuführeinrichtung umfasst:

einen Dünnschichttransistor (Q), der als Umschalter dient, um eine Source-Spannung (Vs) jeder der Anzeigeelektroden (E) zuzuführen;

einen Source-Ansteuer-IC (20), um die Source-Spannung (Vs) einer Source-Elektrode des Dünnschichttransistors (Q) zuzuführen;

einen Gate-Ansteuer-IC (30), um ein Gate-Signal einer Gate-Elektrode des Dünnschichttransistors (Q) zuzuführen und den Dünnschichttransistor (Q) einzuschalten; und

einen Steuer-IC (40), um die Ansteuerung des Source-Ansteuer-ICs (20) und des Gate-Ansteuer-ICs (30) zu steuern, wobei der Operationsverstärker (42, 43) in dem Steuer-IC (40) installiert ist.

Revendications

1. Dispositif d'affichage à cristaux liquides comprenant :

des pixels (P) qui sont formés par une couche de cristaux liquides (16) qui est intercalée entre deux substrats de verre (11, 12) ;
 des électrodes d'affichage (E) disposées en travers de la couche de cristaux liquides (16) ;
 une contre-électrode (15) constituée d'un matériau transparent, et qui affiche une image par application d'une tension de commande (Vd) à ladite couche de cristaux liquides (16),
 la tension de commande (Vd) correspondant à une différence de potentiel entre chacune desdites électrodes d'affichage (E) et ladite contre-électrode (15) ;
 un moyen d'alimentation en tension de source qui fournit des tensions de source (Vs), sur la base de signaux d'image, auxdites électrodes d'affichage (E) ; et
 un premier moyen d'alimentation en tension commune (43) conçu pour la mise en oeuvre d'une commande de rétroaction d'une tension commune (Vcom) appliquée aux deux zones marginales latérales de ladite contre-électrode (15) sur la base de la tension de rétroaction provenant de ces zones, dans lequel ledit premier moyen d'alimentation en tension commune (43) comprend un amplificateur opérationnel qui compare la tension de rétroaction à une tension de référence (Vref) ;

caractérisé par

un moyen d'alimentation en tension de rétroaction (F) câblé sur l'un desdits substrats de verre (11, 12) et qui comprend un fil conducteur de petit diamètre, le fil conducteur établissant une connexion électrique entre un second amplificateur opérationnel (42) et une zone T1 positionnée au centre de la contre-électrode (15), conçu pour délivrer en sortie une tension de rétroaction (Vf) correspondant à un potentiel dans une zone centrale de ladite contre-électrode (15) ; et
 un second moyen d'alimentation en tension commune (42) comprenant ledit second amplificateur opérationnel qui compare la tension de rétroaction (Vf) délivrée en sortie par ledit moyen d'alimentation en tension de rétroaction (F) à ladite tension de référence (Vref), met en oeuvre une commande de rétroaction d'une tension commune (Vcom) sur la base du résultat de comparaison, et fournit la tension commune (Vcom) ainsi commandée à la zone centrale de ladite contre-électrode (15), par l'intermédiaire d'une ligne de transmission (A).

2. Dispositif d'affichage à cristaux liquides conformément à la revendication 1, dans lequel ledit moyen d'alimentation en tension de source fournit lesdites tensions de source (Vs) de polarités opposées auxdites électrodes d'affichage (E) pour chaque paire de pixels adjacents (P).

3. Dispositif d'affichage à cristaux liquides conformément à la revendication 1 ou 2, dans lequel ladite couche de cristaux liquides (16) est intercalée entre deux substrats de verre (11, 12), ladite contre-électrode (15) étant située sur l'un (11) des deux substrats de verre (11, 12) et lesdites électrodes d'affichage (E) étant disposées sur l'autre (12) des deux substrats de verre (11, 12).

4. Dispositif d'affichage à cristaux liquides conformément à la revendication 3, ledit moyen d'alimentation en tension de source comprenant :

un transistor en couches minces (Q) servant de commutateur pour fournir une tension de source (Vs) à chacune desdites électrodes d'affichage (E) ;

un CI d'attaque de source (20) pour fournir ladite tension de source (Vs) à une électrode de source dudit transistor en couches minces (Q) ;

un CI d'attaque de grille (30) pour fournir un signal de grille à une électrode de grille dudit transistor en couches minces (Q) et activer ledit transistor en couches minces (Q) ; et

un CI de dispositif de commande (40) pour commander l'attaque dudit CI d'attaque de source (20) et dudit CI d'attaque de grille (30), dans lequel ledit amplificateur opérationnel (42, 43) est installé dans ledit CI de dispositif de commande (40).

FIG. 1

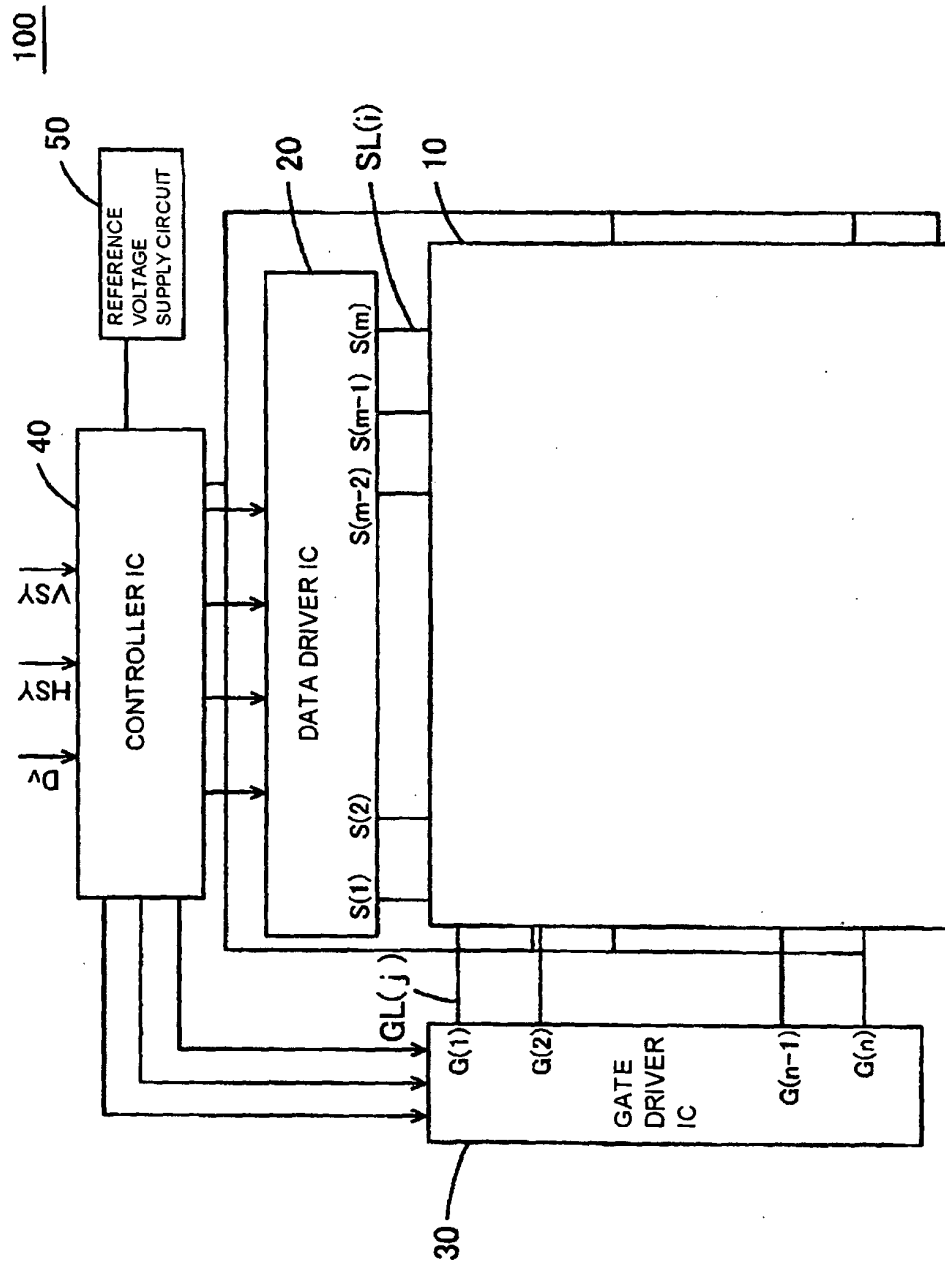


FIG. 2

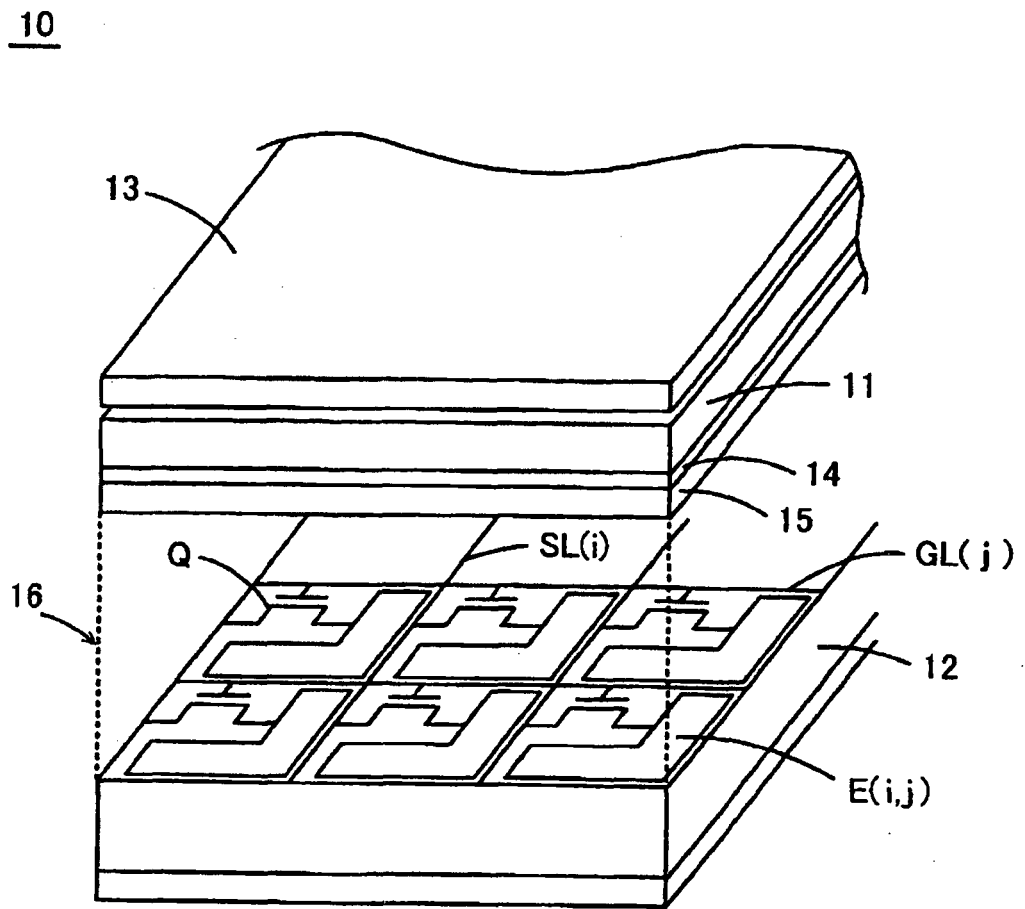


FIG. 3

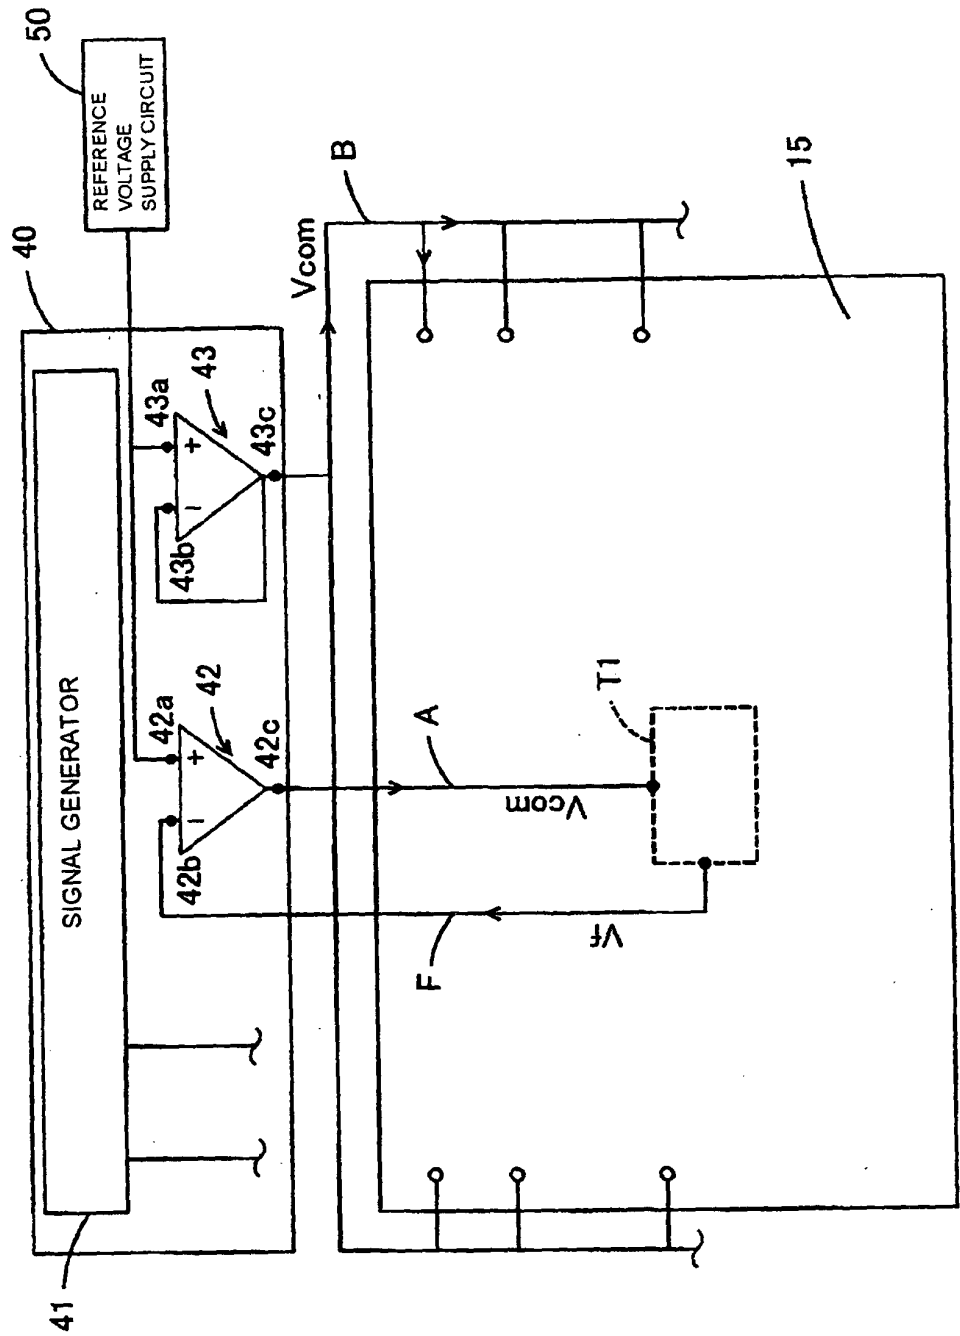


FIG. 4

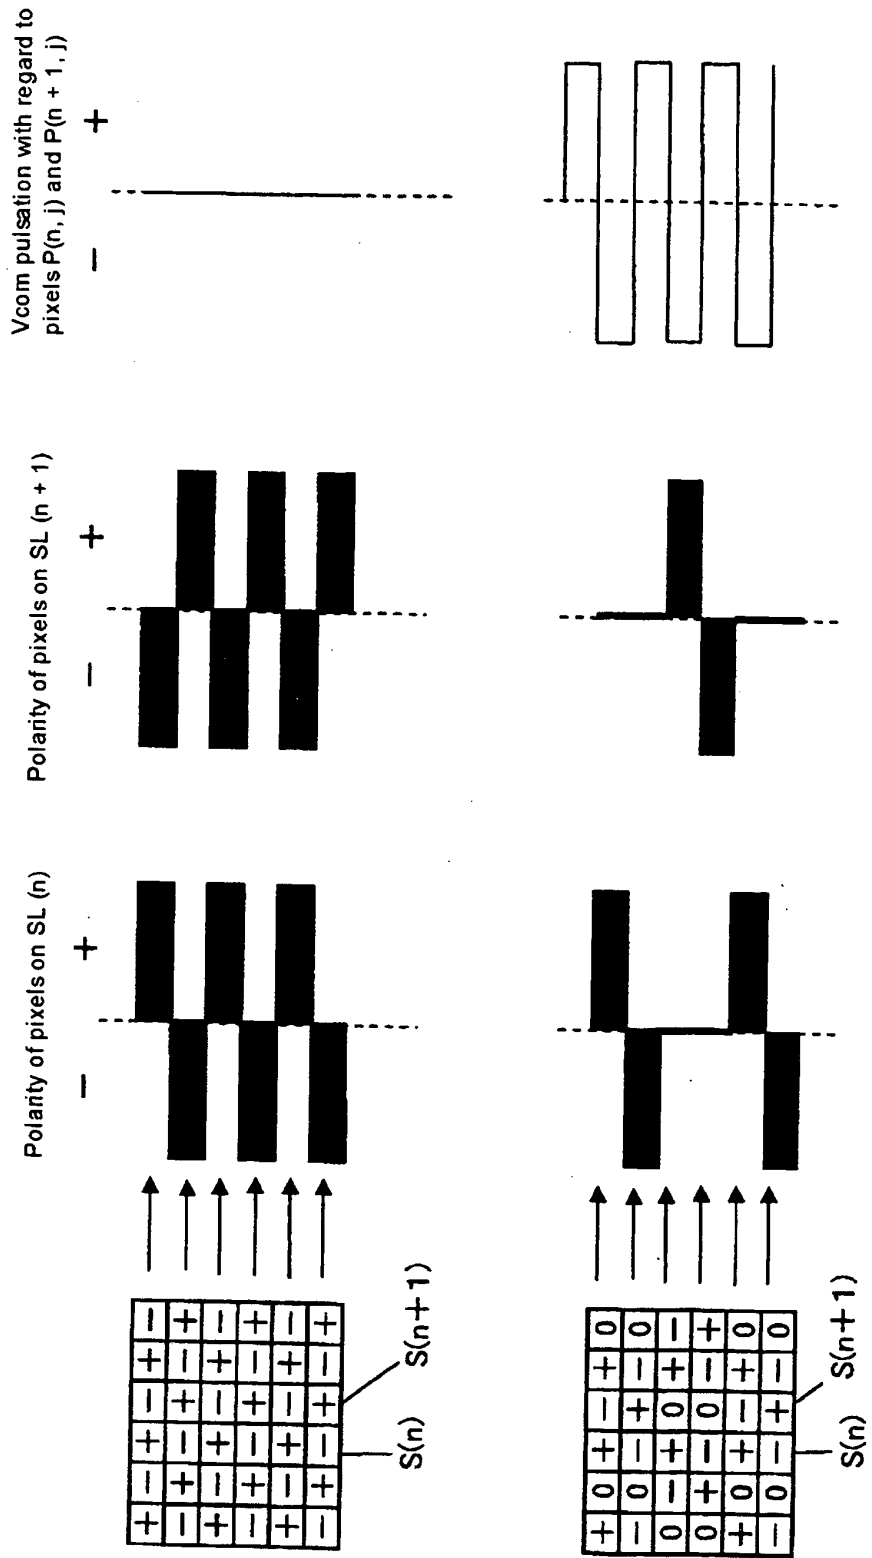


FIG. 5

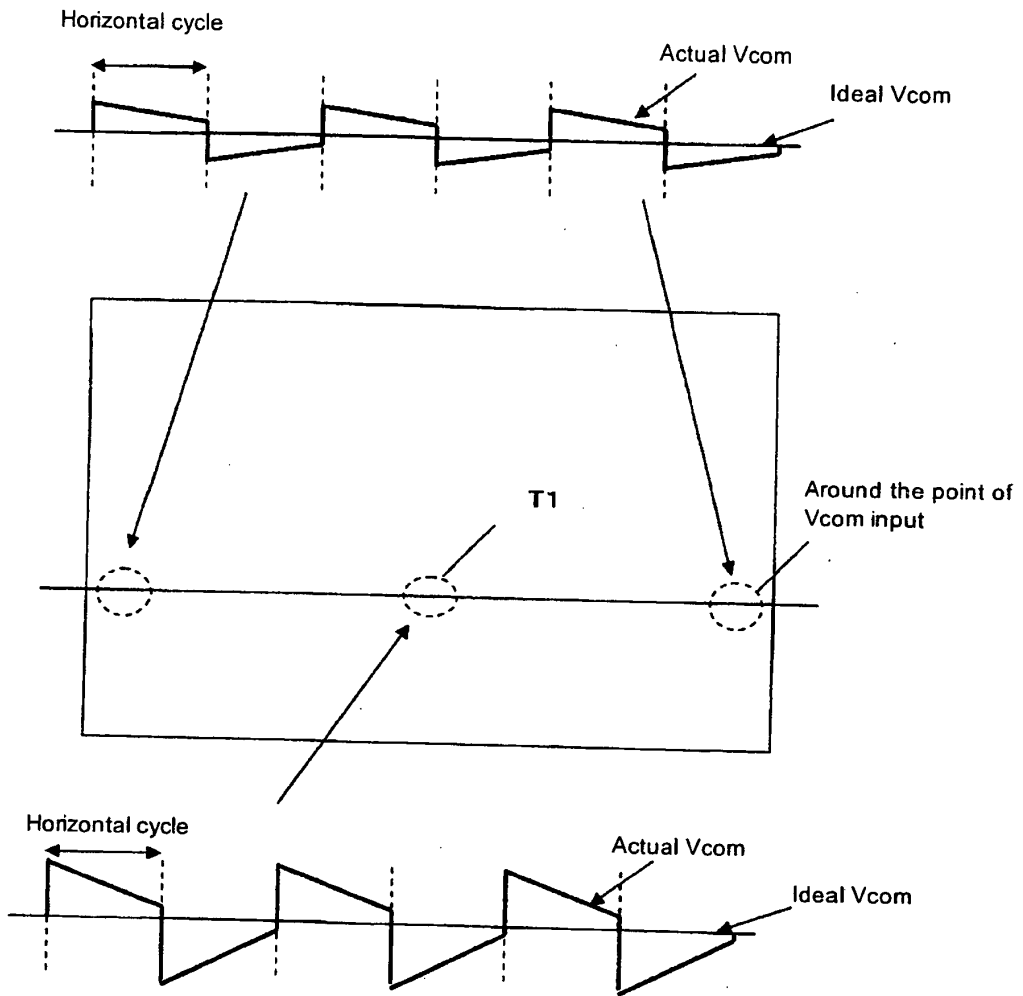


FIG. 6

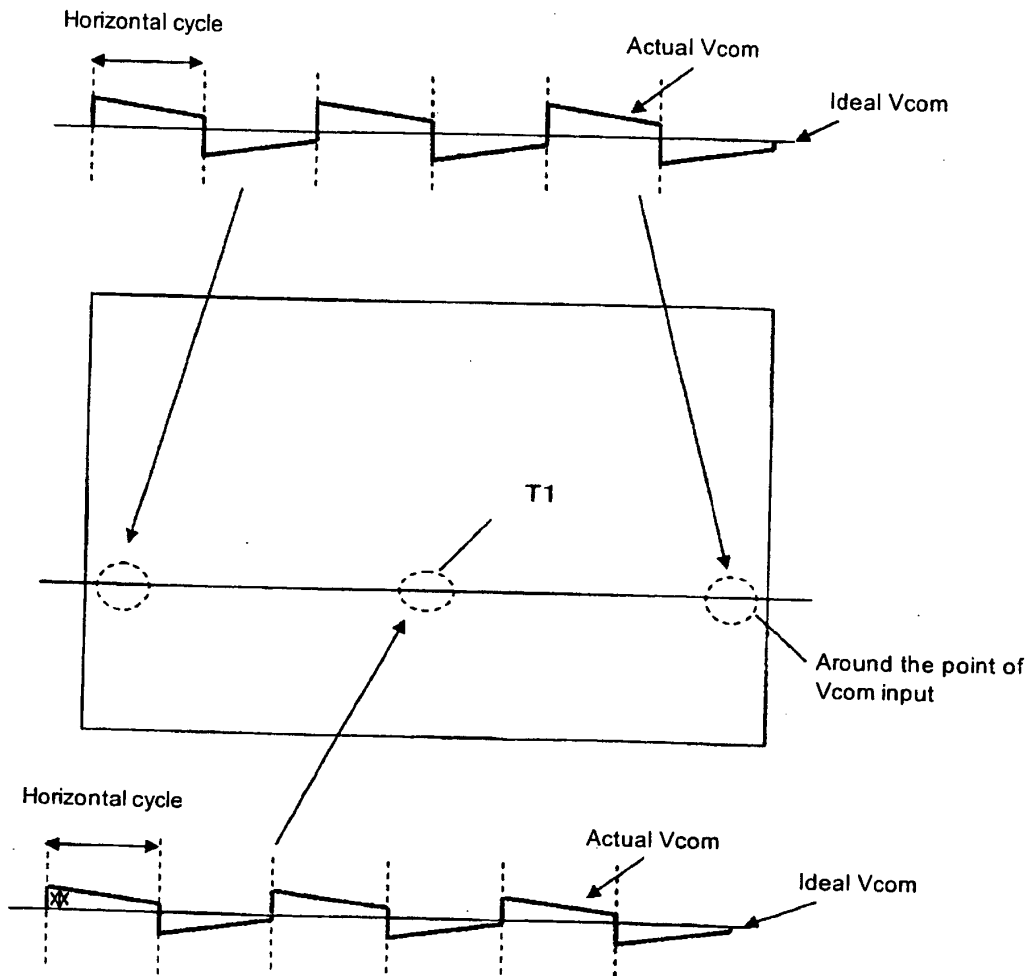


FIG. 7

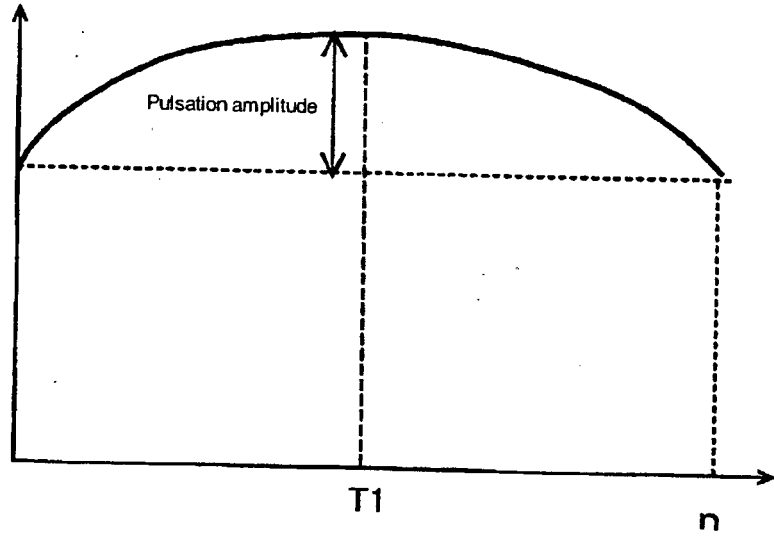


FIG. 8

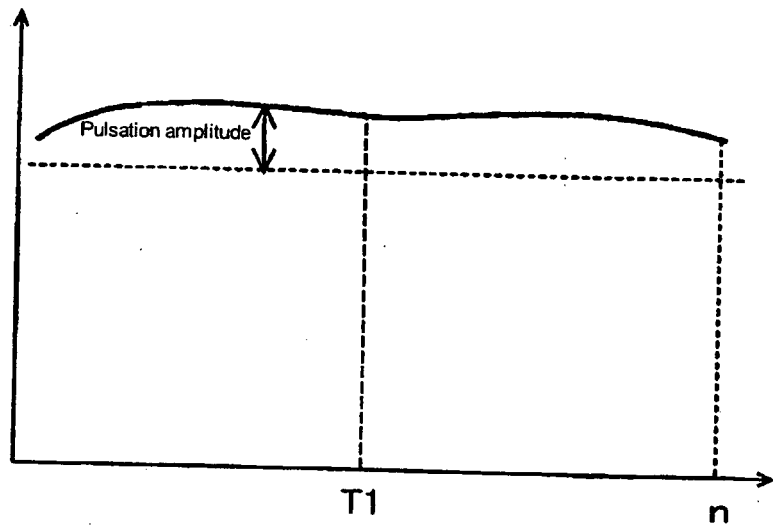


FIG. 9

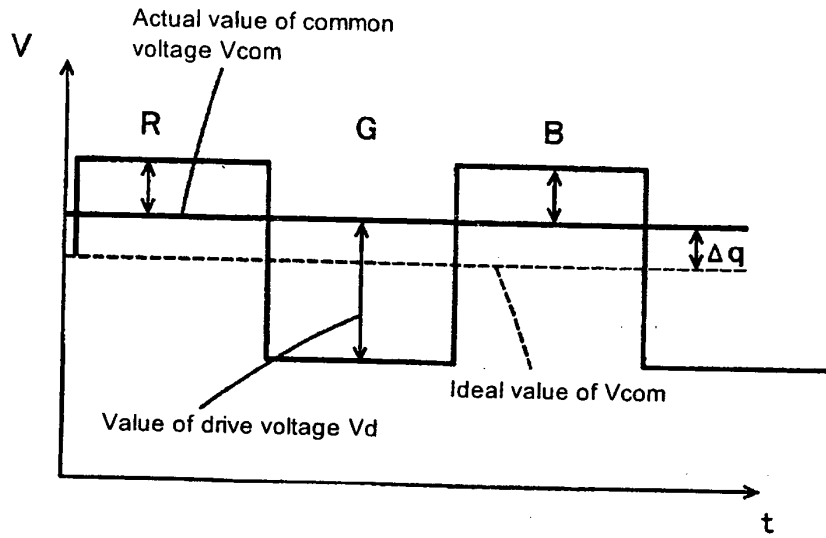


FIG. 10

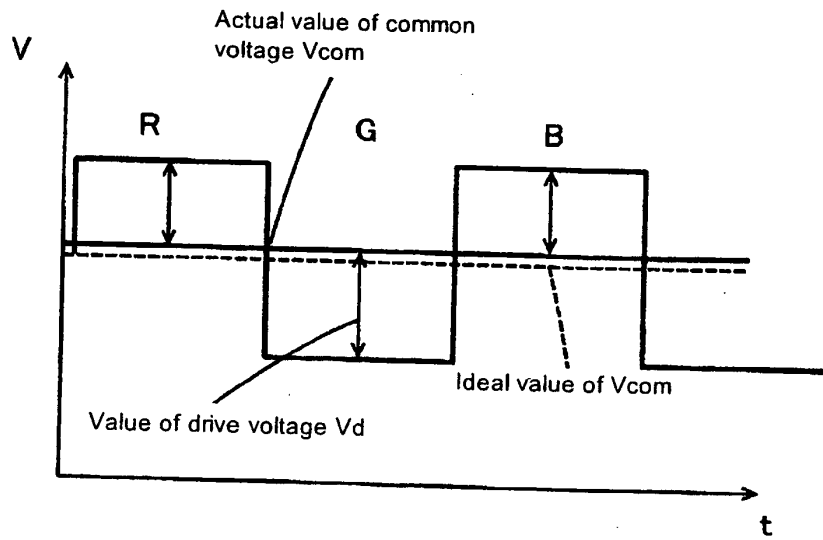


FIG. 11

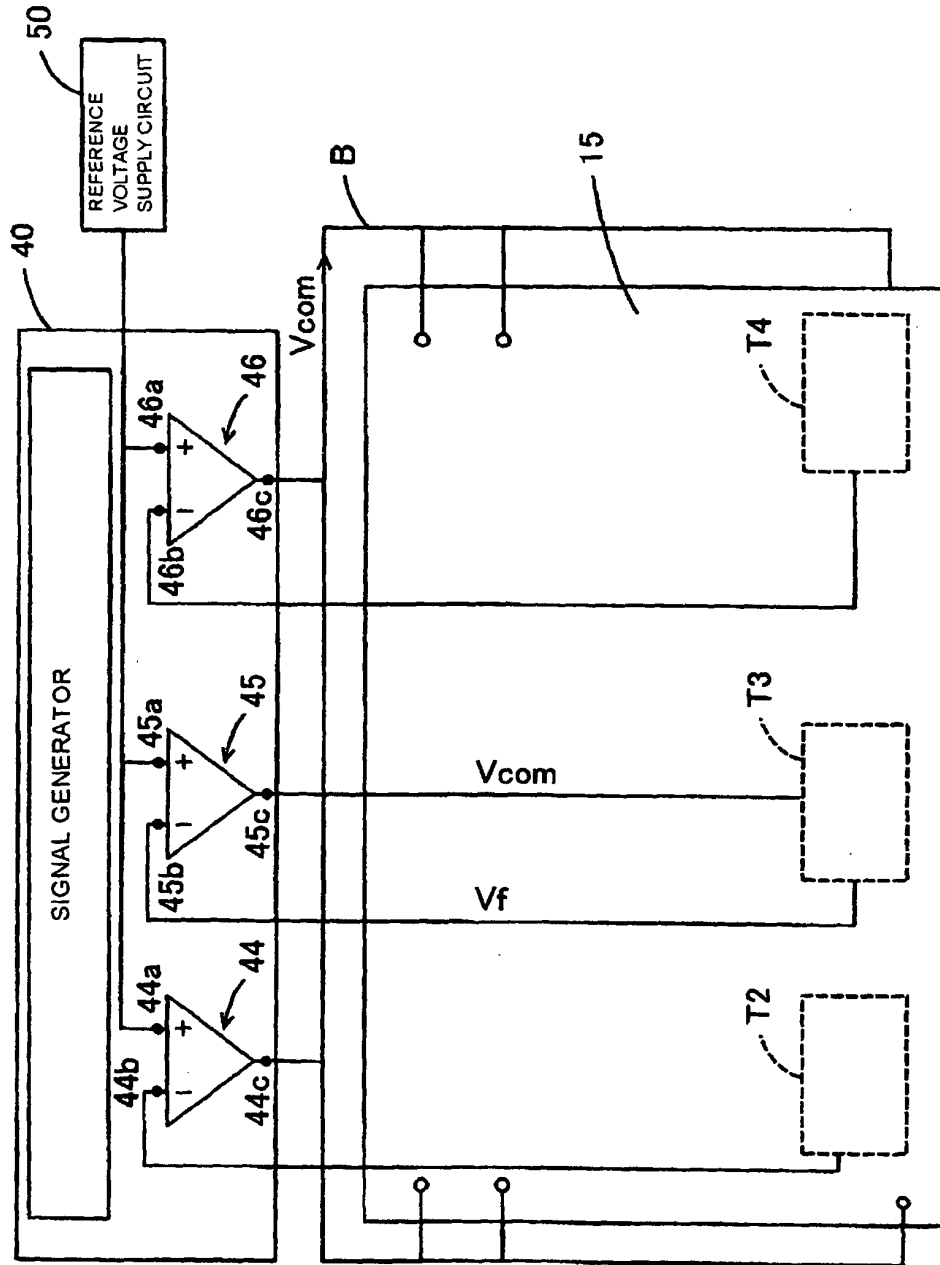


FIG. 12


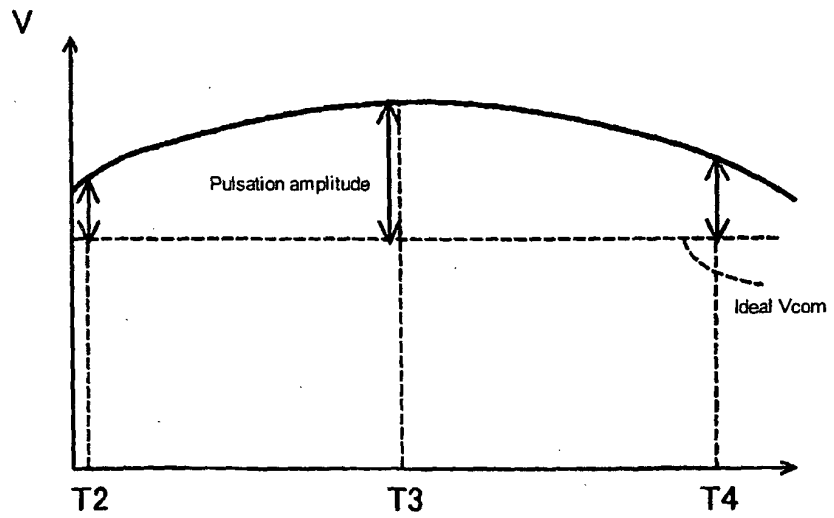


FIG. 13

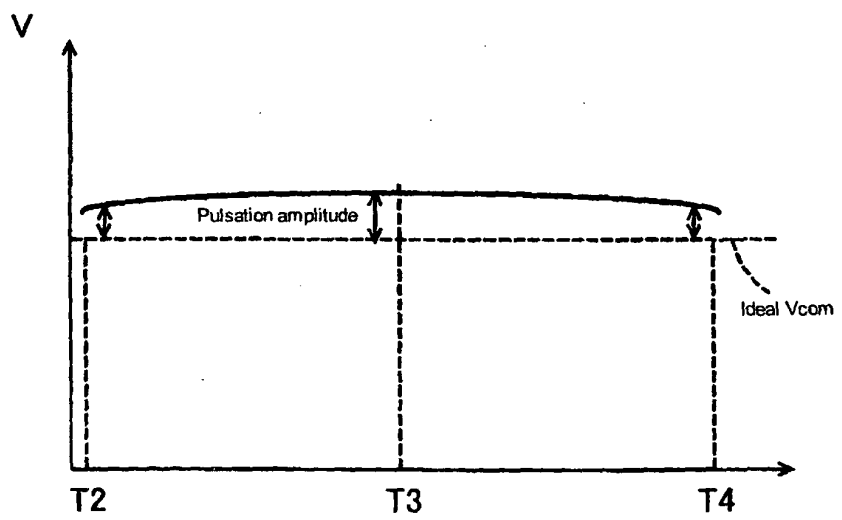

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000214431 A [0005]
- JP 2007140384 A [0006]
- US 6222516 B1 [0009]
- US 20070024565 A1 [0010]
- US 20050253836 A1 [0011]

专利名称(译)	液晶显示装置		
公开(公告)号	EP2065881B1	公开(公告)日	2013-04-03
申请号	EP2008020562	申请日	2008-11-26
[标]申请(专利权)人(译)	船井电机株式会社		
申请(专利权)人(译)	FUNAI ELECTRIC CO., LTD.		
当前申请(专利权)人(译)	FUNAI ELECTRIC CO., LTD.		
[标]发明人	NAKATSUKA HITOSHI		
发明人	NAKATSUKA, HITOSHI		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3655 G09G3/3696 G09G2300/043 G09G2320/0204 G09G2320/0223 G09G2320/0233		
代理机构(译)	GRÜNECKER, KINKELDEY, STOCKMAIR & SCHWANHÄUSSER		
优先权	2007306473 2007-11-27 JP		
其他公开文献	EP2065881A2 EP2065881A3		
外部链接	Espacenet		

摘要(译)

液晶显示装置100具有由液晶层形成的像素的矩阵排列，横跨液晶层设置的显示电极，以及由透明材料制成的对电极，并且表示每像素的色调（灰度级）通过向液晶层施加驱动电压，驱动电压对应于每个显示电极和对电极之间的电位差。该装置还包括公共电压提供装置42，其检测对电极15的特定区域T1中的电荷，并比较与该区域中检测到的电荷相对应的反馈电压，从而提供公共电压Vcom反馈控制。因此，可以通过公共电压Vcom反馈控制来防止屏幕上的闪烁。

