




US 20170337875A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2017/0337875 A1**
(43) **Pub. Date:** **Nov. 23, 2017**
JEON et al.(54) **ORGANIC LIGHT-EMITTING DIODE
DISPLAY DEVICE AND METHOD OF
DRIVING THE SAME**(71) Applicant: **LG DISPLAY CO., LTD.**, SEOUL
(KR)(72) Inventors: **ChangHoon JEON**, PAJU-SI (KR);
Sunghoon RHA, SEOUL (KR)(73) Assignee: **LG DISPLAY CO., LTD.**, SEOUL
(KR)(21) Appl. No.: **15/598,887**(22) Filed: **May 18, 2017**(30) **Foreign Application Priority Data**

May 23, 2016 (KR) 10-2016-0062959

Publication Classification(51) **Int. Cl.**
G09G 3/3258 (2006.01)
H01L 27/32 (2006.01)
G09G 3/3291 (2006.01)
H01L 29/786 (2006.01)
H01L 27/12 (2006.01)(52) **U.S. Cl.**
CPC **G09G 3/3258** (2013.01); **H01L 27/3265**
(2013.01); **G09G 3/3291** (2013.01); **H01L**
27/3262 (2013.01); **G09G 2320/0233**
(2013.01); **G09G 2310/08** (2013.01); **G09G**
2300/0871 (2013.01); **G09G 2300/0842**
(2013.01); **G09G 2320/043** (2013.01); **H01L**
27/1214 (2013.01); **H01L 29/78648** (2013.01);
G09G 2320/0257 (2013.01)(57) **ABSTRACT**

Discussed herein are an OLED display device and a method of driving the same. The OLED display device includes according to an embodiment an organic light-emitting diode; a driving transistor involved in driving the organic light-emitting diode and including a bottom gate electrode, an oxide semiconductor layer, a source electrode, a drain electrode and a top gate electrode; a first switching transistor electrically connected to the bottom gate electrode of the driving transistor and involved in transmitting a data voltage to control the driving transistor; a storage capacitor electrically connected to the bottom gate electrode and involved in charging the data voltage; a second switching transistor configured to store a threshold voltage in the storage capacitor; a compensating transistor directly connected to the top gate electrode of the driving transistor to compensate for a deviation in the threshold voltage of the driving transistor; and a compensating capacitor disposed between the source electrode of the driving transistor and a source electrode of the compensating transistor and storing the threshold voltage therein.

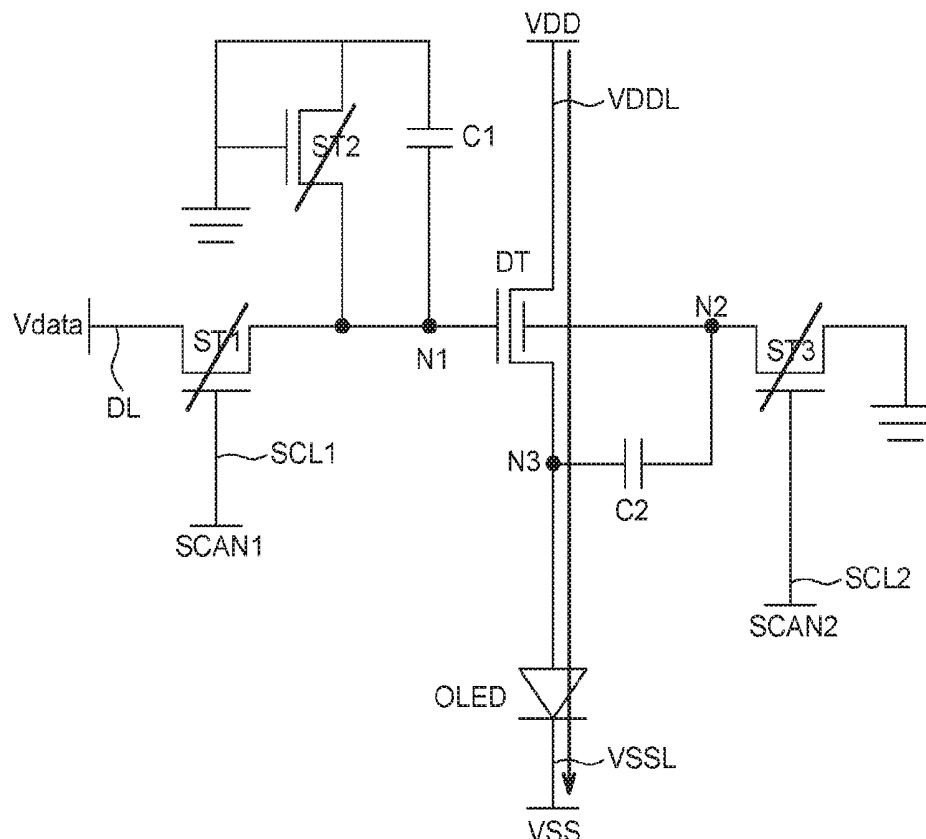

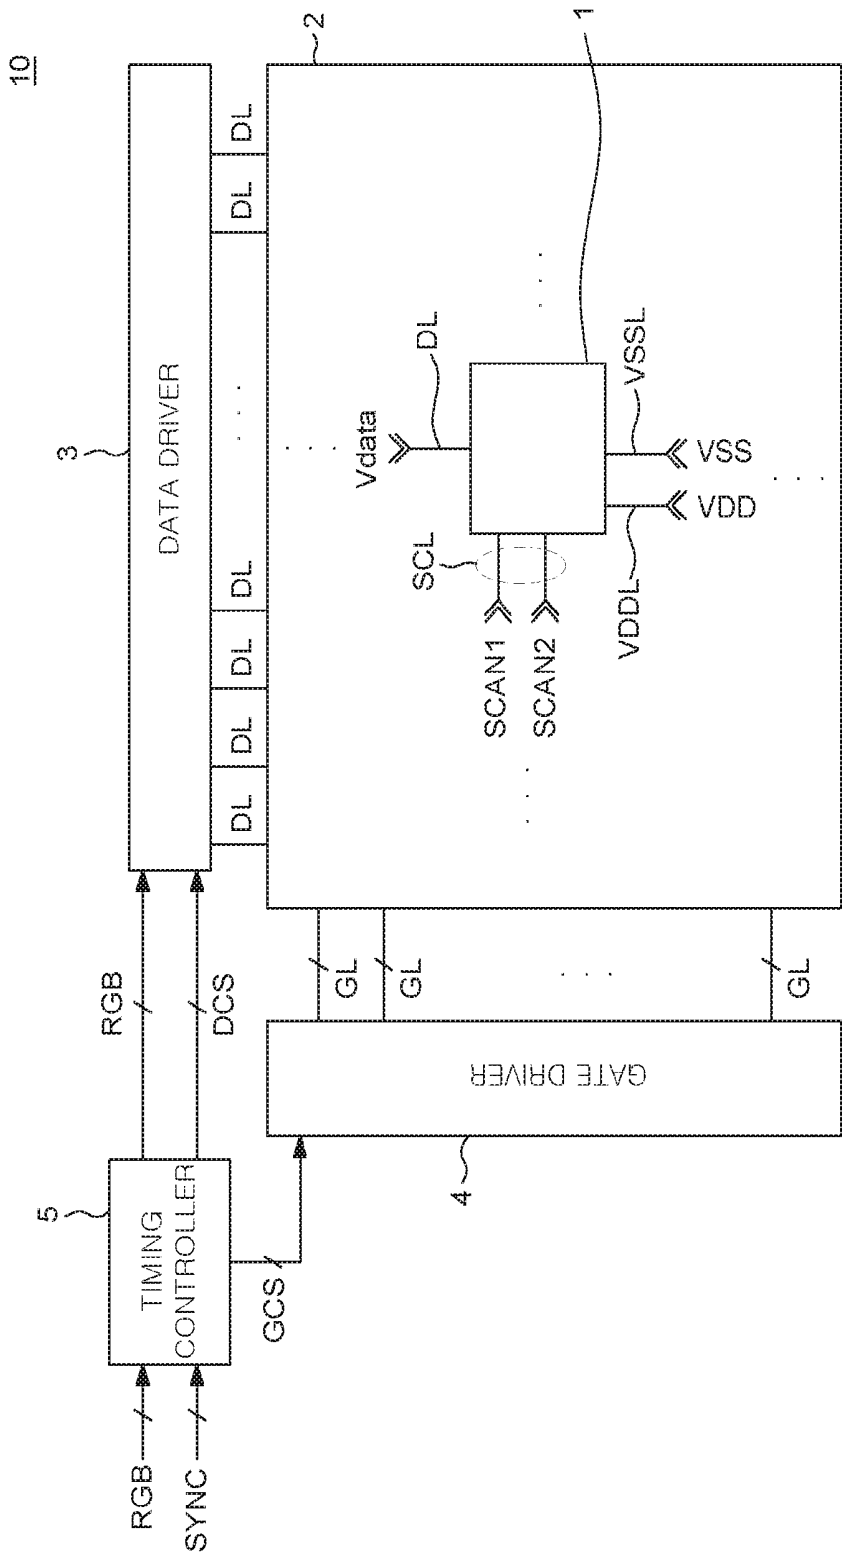


FIG. 1

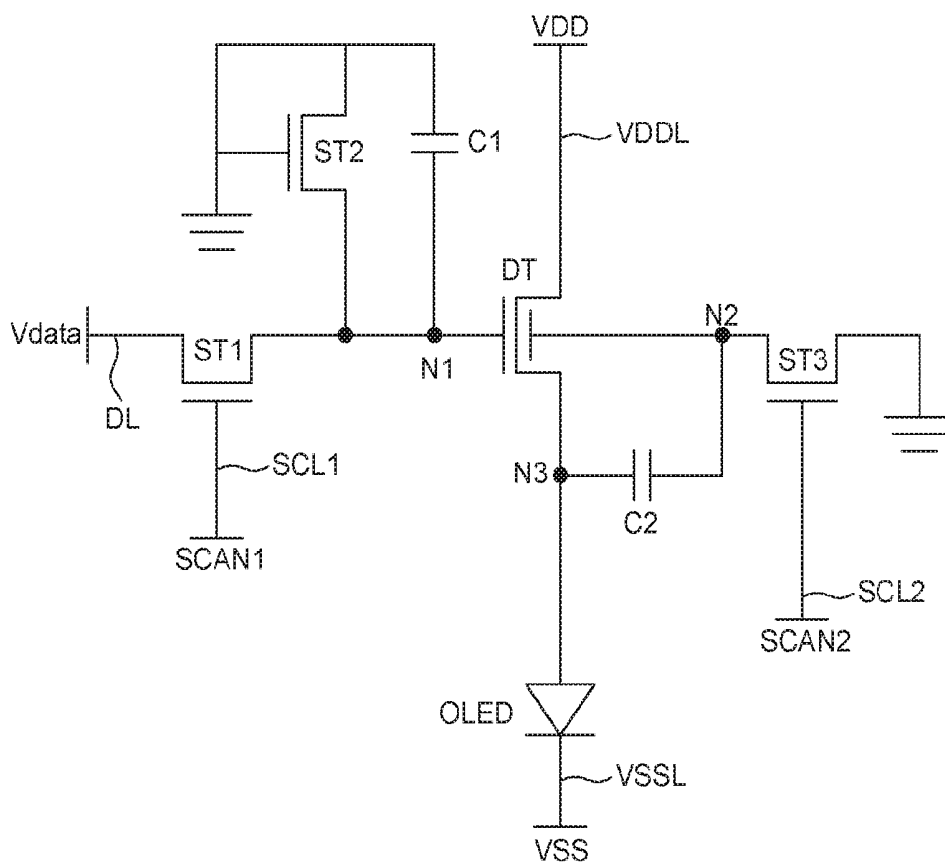


FIG. 2

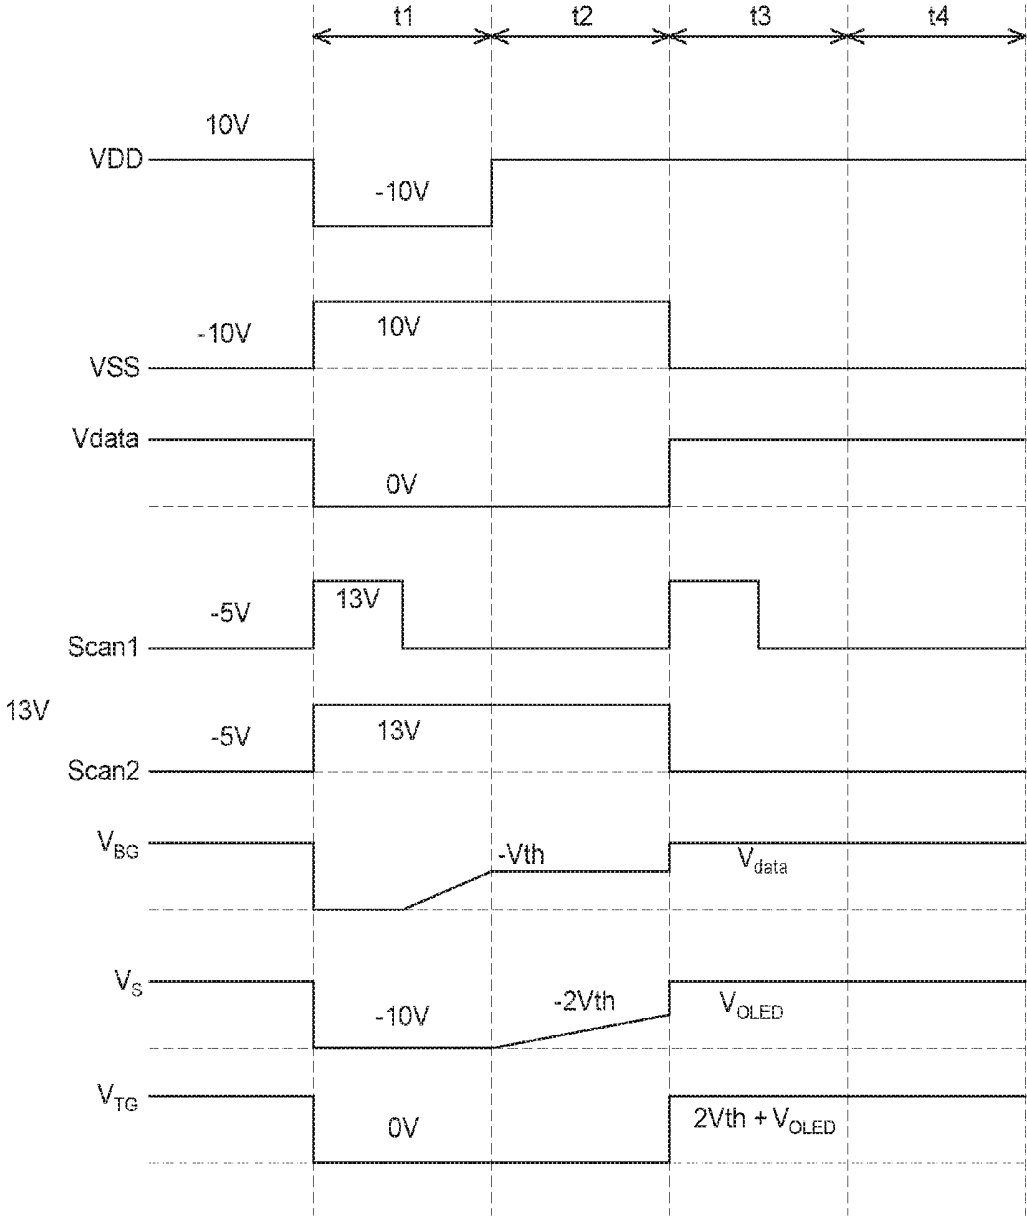


FIG. 3

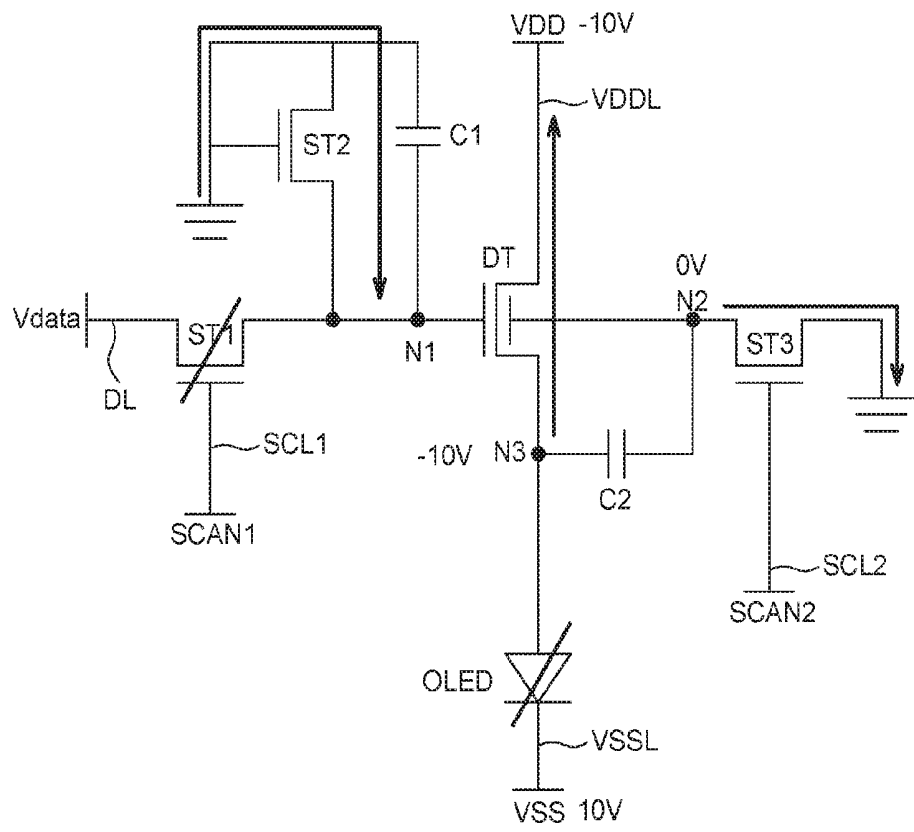


FIG. 4A

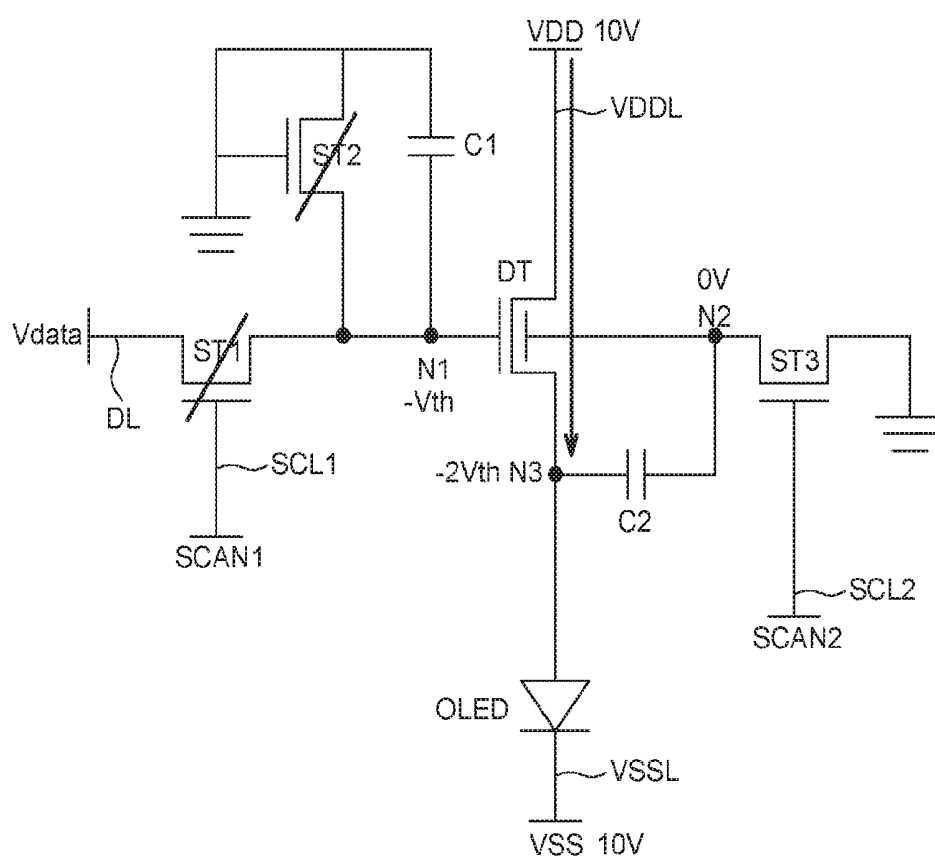


FIG. 4B

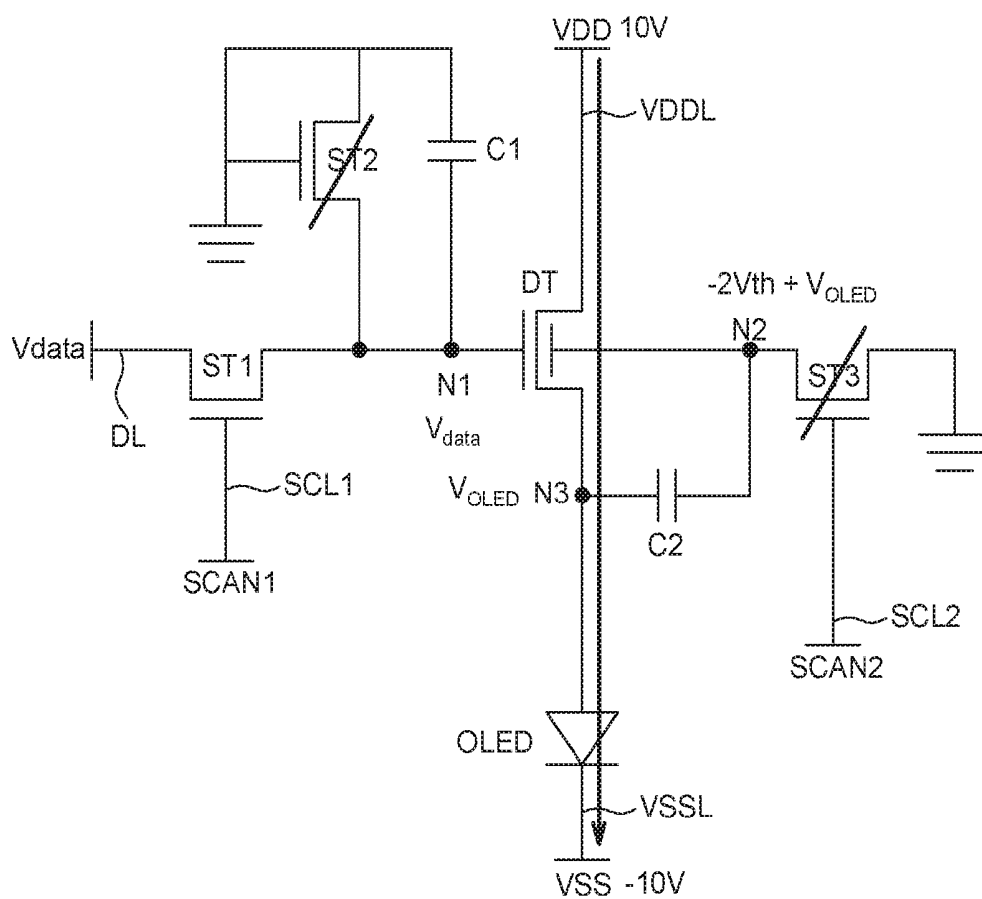


FIG. 4C

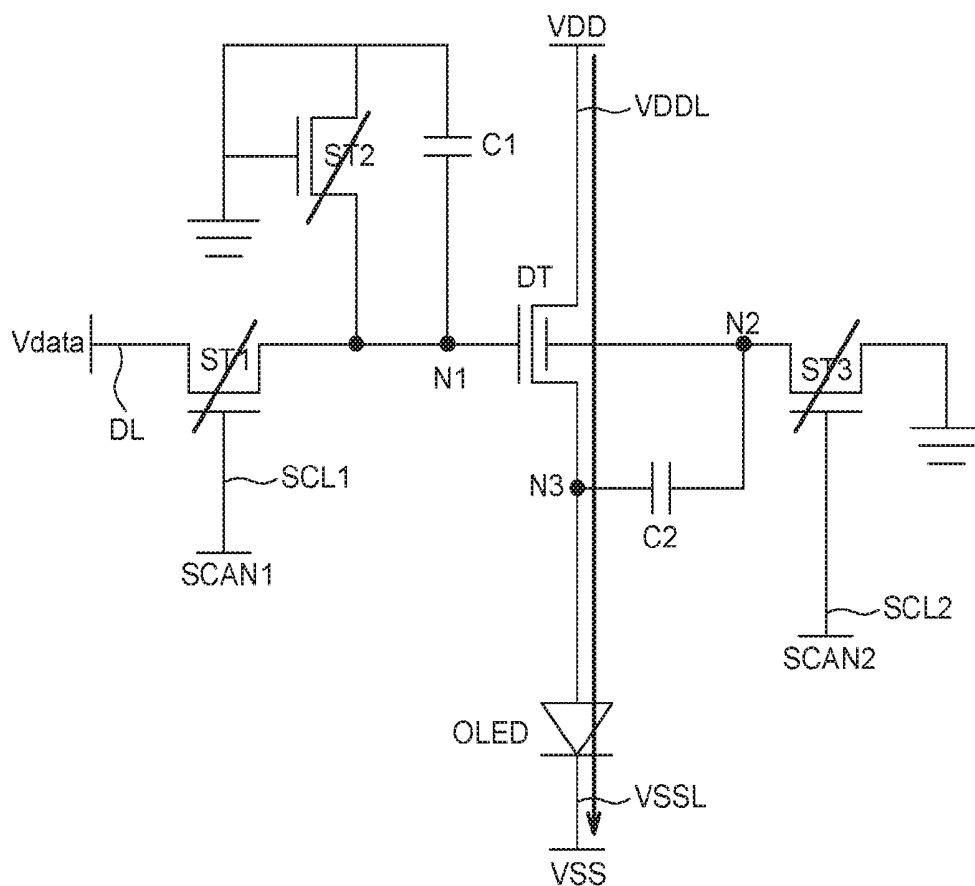


FIG. 4D

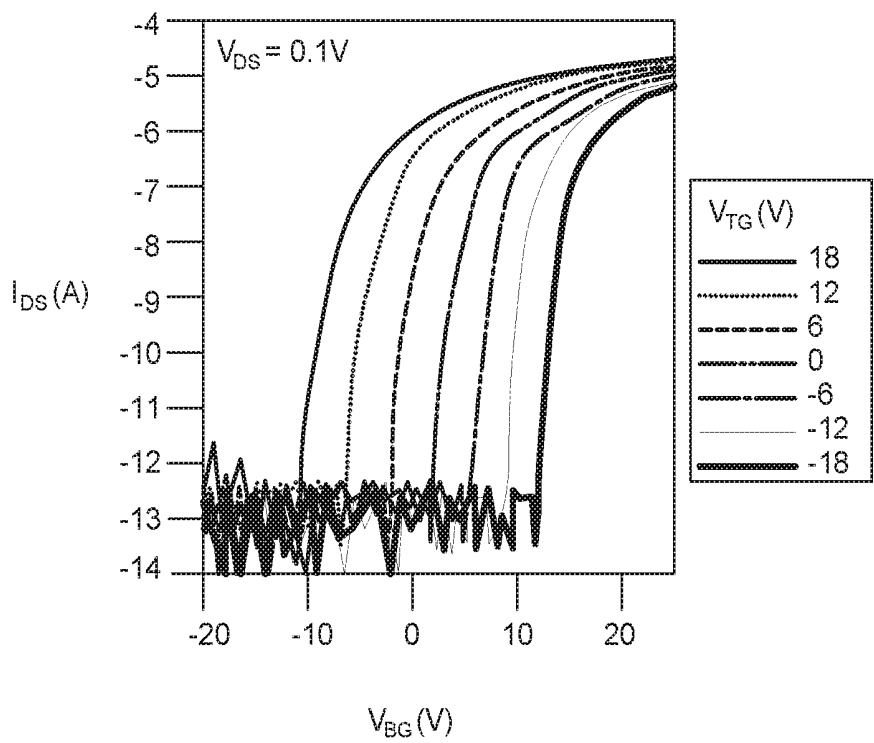


FIG. 5A

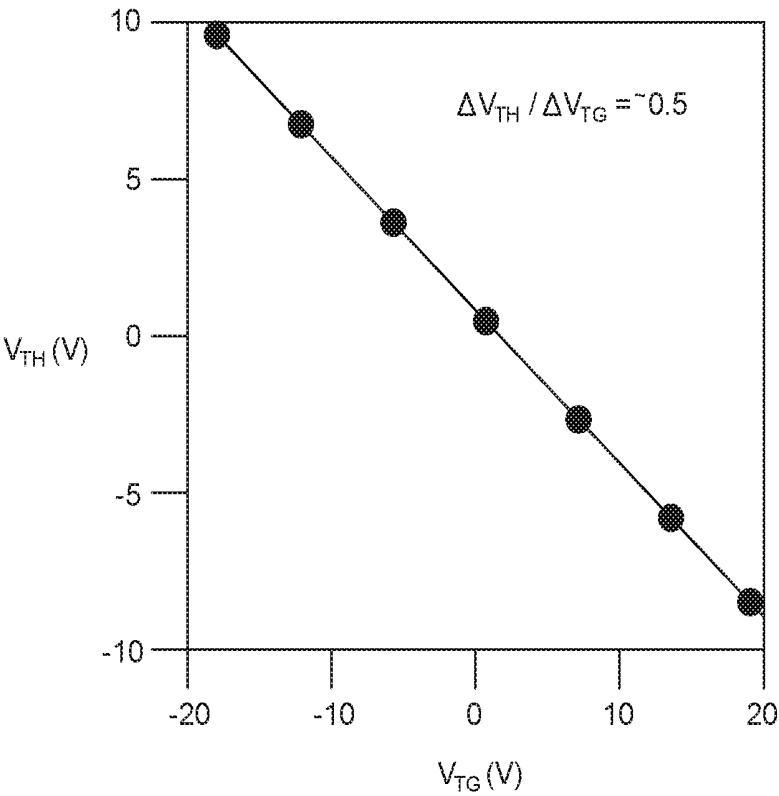


FIG. 5B

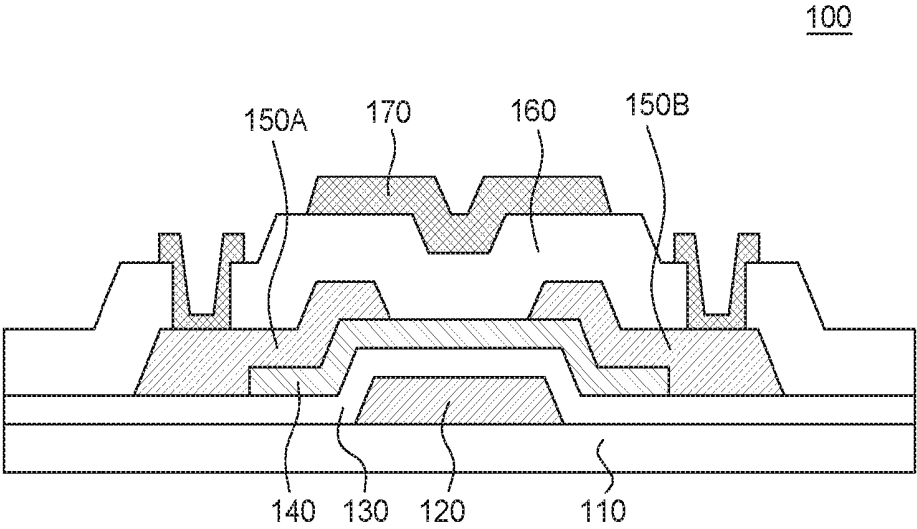


FIG. 6

ORGANIC LIGHT-EMITTING DIODE DISPLAY DEVICE AND METHOD OF DRIVING THE SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the priority of Korean Patent Application No. 10-2016-0062959 filed on May 23, 2016, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein by reference.

BACKGROUND

Technical Field

[0002] The present disclosure relates to an organic light-emitting diode (OLED) display device and a method of driving the same.

Description of the Related Art

[0003] Recently, various flat panel display devices capable of reducing weight and volume to address the limitations of a cathode ray tube, have been developed. Examples of flat panel display devices include a liquid-crystal display (LCD) device, a field emission display (FED) device, a plasma display panel (PDP) device, and an organic light-emitting display (OLED) device, etc.

[0004] Among the flat panel display devices, the organic light-emitting display device displays an image using an organic light-emitting device that generates light as electrons and holes recombine, and has a fast response speed and is driven with a low power.

[0005] Typically, the OLED display devices are divided into a passive matrix OLED (PMOLED) device and an active matrix OLED (AMOLED) device depending on the manner in which the organic light-emitting diode is driven.

[0006] The AMOLED device includes a plurality of gate electrode lines, a plurality of data lines, a plurality of supply voltage lines, and a plurality of pixels connected to the lines and arranged in a matrix. Each of the pixels includes an organic light-emitting diode composed of an anode, a cathode and an organic emitting layer between the anode and the cathode, and a pixel circuit for independently driving the organic light-emitting diode. The pixel circuit mainly comprises a switching transistor for transmitting a data signal, a driving transistor for driving the EL element in response to the data signal, and a capacitor for holding the data voltage. The switching transistor charges the capacitor with the data voltage in response to a scan pulse. The driving transistor controls the amount of current supplied to the OLED according to the data voltage charged in the capacitor to adjust the amount of light emitted from the OLED.

[0007] Such an AMOLED device has advantages of low power consumption but has disadvantages in that there are deviations in characteristics such as the threshold voltage and mobility of a driving transistor for driving an organic light-emitting diode. As a result, the magnitude of the current flowing through the organic light-emitting diode changes depending on the variations in the threshold voltage, resulting in display unevenness. In addition, a voltage drop occurs in the high-potential voltage (VDD), such that the amount of current to drive the OLED is changed, thereby causing a luminance deviation between the pixels.

[0008] That is, since the characteristics of the transistors included in each pixel change depending on fabricating process parameters, it becomes difficult to fabricate the transistors of the AMOLED device so that all the transistors have the same characteristics.

[0009] In general, deviations in characteristics of the driving transistors at initial driving result in spots or mura on the screen, while deviations in characteristics of the driving transistors as they deteriorate with driving of the OLEDs result in problems that the lifetime of the OLED display panel is reduced or afterimages are created.

[0010] Recently, a compensation circuit including a plurality of transistors and capacitors has been studied in order to overcome such problems. Such a compensation circuit is additionally disposed in each of the pixels. Accordingly, a large number of transistors and capacitors are disposed in each of the pixels.

[0011] More specifically, as a compensation circuit is added in each pixel as described above, the transistors and the capacitors of each pixel as well as signal lines for controlling the transistors are added, such that the aperture ratio of the AMOLED panel is reduced. In addition, the number of components of the circuit is increased, and thus there is a disadvantage that defects are more likely to occur.

[0012] Under the circumstances, what is needed is a compensation circuit having a novel architecture that can overcome the problems resulting from deviations in the characteristics of threshold voltages of the transistors in the pixels without compromising the aperture ratio of an AMOLED panel, and an AMOLED display device including the same.

SUMMARY

[0013] In view of the above, the inventors of the application have devised a novel architecture for an OLED display device capable of compensating for deviations in the characteristics of threshold voltages of driving transistors and reducing luminance deviations among pixels, to thereby improve image quality.

[0014] An object of the present disclosure to provide a novel OLED display device in which a driving transistor with a double gate electrode structure and a top gate electrode of the driving transistor are involved in adjusting a compensation voltage for compensating deviations in the characteristics of the threshold voltage of the driving transistor, and a method of driving the OLED display device.

[0015] According to an example of the present disclosure, there is provided an organic light-emitting diode display device including an organic light-emitting element; a driving transistor involved in driving the organic light-emitting element and comprising a bottom gate electrode BG, an oxide semiconductor layer, a source electrode, a drain electrode and a top gate electrode TG; a first switching transistor electrically connected to the bottom gate electrode of the driving transistor and involved in transmitting data voltage V_{data} to control the driving transistor; a storage capacitor Cst electrically connected to the bottom gate electrode and involved in charging data voltage; a second switching transistor configured to store a threshold voltage V_{th} in the storage capacitor; a compensating transistor directly connected to the top gate electrode of the driving transistor to compensate for a deviation in the threshold voltage of the driving transistor; and a compensating capacitor Ccomp disposed between the source electrode of the driving tran-

sistor and a source electrode of the compensating transistor and storing a threshold voltage therein.

[0016] According to another example of the present disclosure, there is provided a pixel driving circuit including a driving switching element DT having a bottom gate electrode and a top gate electrode and electrically connected to a first supply voltage line VDDL and a second supply voltage line VSSL; a first switching element ST1 for electrically connecting a data signal line DL with a first node N1 connected to the bottom gate electrode of the drive switching element DT in response to a first scan signal SCAN1; a second switching element ST2 connected to the first node and is a diode-connected transistor having its gate electrode and drain electrode commonly connected to a ground potential; a third switching element ST3 for electrically connecting a ground terminal with a second node N2 connected to the top gate electrode of the drive switching element DT in response to a second scan signal SCAN2; a first capacitor C1 electrically connected between the first node N1 and the second switching element ST2; and a second capacitor C2 electrically connected between the second node N2 and a third node N3 connected to a source electrode of the drive switching element DT.

[0017] According to yet another example of the present disclosure, there is provided an OLED display device comprising a plurality of pixels, wherein each of the pixels comprises an organic light-emitting diode and a pixel driving circuit for driving the organic light-emitting diode, wherein the pixel driving circuit comprises: a driving switching element DT having a bottom gate electrode and a top gate electrode and connected between a first supply voltage line VDDL and a second supply voltage line VSSL in series with the organic light-emitting diode; a first switching element ST1 for connecting a data signal line DL with a first node N1 connected to the bottom gate electrode of the drive switching element DT in response to a first scan signal; a second switching element ST2 connected to the first node and being a diode-connected transistor having its gate electrode and drain electrode commonly connected to a ground potential; a third switching element ST3 for connecting a ground terminal with a second node N2 connected to the top gate electrode of the drive switching element DT in response to a second scan signal; a first capacitor C1 electrically connected between the first node N1 and the second switching element ST2; and a second capacitor C2 disposed between the second node N2 and a third node N3 connected to a drain electrode of the drive switching element DT, wherein the pixel driving circuit is operated in different periods including: an initialization period in which the second and third switching elements ST2 and ST3 are turned on, such that a negative threshold voltage $-V_{th}$ is applied to the first node N1 and the second node N2 is initialized to 0 V; a sampling period in which the third switching element ST3 and the driving switching element DT are turned on, such that a voltage twice the negative threshold voltage is applied to the third node N3 and a voltage twice the threshold voltage $2V_{th}$ is stored in the second capacitor C2; a programming period in which the first switching element ST1 is turned on while the second and third switching elements ST2 and ST3 are turned off, such that data voltage V_{data} is applied to the first node N1, organic light-emitting diode voltage V_{OLED} is charged at the third node N3 and a voltage at the second node N2 is boosted to a voltage equal to the organic light-emitting diode voltage V_{OLED} plus the

voltage twice the threshold voltage $2V_{th}$; and an emission period in which the first and second switching elements ST1 and ST2 are turned off, such that the driving switching element DT applies a driving current to the organic light-emitting diode in response to a data signal input from the first switching element ST1.

[0018] According to an embodiment of the present disclosure, each pixel includes a driving transistor DT with a double-gate electrode structure, a compensating transistor connected to the top gate electrode of the driving transistor DT to compensate for a deviation in the threshold voltage V_{th} of the driving transistor DT by itself, and a compensating capacitor that stores the threshold voltage V_{th} between the source electrode of the driving transistor DT and the drain electrode of the compensating transistor. As a result, the threshold voltage V_{th} of the driving transistor DT can be held constant all the time in the compensating capacitor disposed between the one gate electrode and the source electrode of the driving transistor DT.

[0019] In addition, one electrode of the compensating capacitor is connected to the source electrode of the compensating transistor having the drain electrode connected to the ground potential, while the other electrode of the compensating capacitor is connected to the source electrode of the driving transistor. The compensating transistor becomes floating, and the source electrode of the driving transistor charges voltage as the organic light-emitting diode is turned on. As a result, the voltage at the electrode is bootstrapped to the voltage equal to the threshold voltage V_{th} of the driving transistor DT plus voltage of the organic light-emitting diode OLED so as to hold the threshold voltage in the compensating capacitor. Accordingly, in each pixel, the top gate electrode of the driving transistor DT is connected to the electrode of the compensating capacitor to be involved in holding the threshold voltage V_{th} of the driving transistor DT constant.

[0020] In this manner, it is possible to overcome or address the limitations and problems resulting from deviations in the characteristics of the threshold voltage V_{th} of the driving transistor DT in each pixel without compromising the aperture ratio of the AMOLED panel. According to the embodiments of the present disclosure, the threshold voltage V_{th} of the driving transistor DT can be efficiently compensated for, such that failure due to long driving can be prevented to thereby improve reliability, and luminance uniformity can be increased to thereby improve the lifespan.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] The above and other aspects, features and other advantages of the present disclosure will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

[0022] FIG. 1 is a block diagram of an organic light-emitting diode display device according to an embodiment of the present disclosure;

[0023] FIG. 2 is an example of a circuit diagram of the pixel shown in FIG. 1;

[0024] FIG. 3 is a waveform diagram illustrating an example of an operation of the pixel shown in FIG. 1 when it is driven;

[0025] FIG. 4A to 4D are circuit diagrams showing signal flows in the periods of the waveform diagram shown in FIG. 3, respectively, according to the embodiment of the present disclosure;

[0026] FIGS. 5A and 5B are graphs showing relationships between a voltage applied to the top gate electrode of the driving transistor shown in FIG. 2 and the threshold voltage; and

[0027] FIG. 6 is a cross-sectional view of the driving transistor according to the embodiment shown in FIG. 2.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0028] Advantages and features of the present disclosure and methods to achieve them will become apparent from the descriptions of exemplary embodiments hereinbelow with reference to the accompanying drawings. However, the present disclosure is not limited to exemplary embodiments disclosed herein but may be implemented in various different ways. The exemplary embodiments are provided for making the disclosure of the present disclosure thorough and for fully conveying the scope of the present disclosure to those skilled in the art. It is to be noted that the scope of the present disclosure is defined only by the claims.

[0029] The figures, dimensions, ratios, angles, the numbers of elements given in the drawings are merely illustrative and are not limiting.

[0030] Further, in describing the present disclosure, descriptions on well-known technologies may be omitted in order not to unnecessarily obscure the gist of the present disclosure. It is to be noticed that the terms “comprising,” “having,” “including” and so on, used in the description and claims, should not be interpreted as being restricted to the means listed thereafter unless specifically stated otherwise. Where an indefinite or definite article is used when referring to a singular noun, e.g. “a,” “an,” and “the,” this includes a plural of that noun unless specifically stated otherwise.

[0031] For elements having specific values, they are interpreted as including error margins even without explicit statements. In describing positional relationship, such as “an element A on an element B,” “an element A above an element B,” “an element A below an element B” and “an element A next to an element B,” another element C may be disposed between the elements A and B unless the term “directly” or “immediately” is explicitly used.

[0032] As used herein, a phrase “an element A on an element B” refers to that the element A may be disposed directly on the element B and/or the element A may be disposed indirectly on the element B via another element C.

[0033] The terms first, second and the like in the descriptions and in the claims are used for distinguishing between similar elements and not necessarily for describing a sequential or chronological order. These terms are used to merely distinguish one element from another. Accordingly, as used herein, a first element may be a second element within the technical idea of the present disclosure.

[0034] Like reference numerals denote like elements throughout the descriptions.

[0035] The drawings are not to scale and the relative dimensions of various elements in the drawings are depicted schematically and not necessarily to scale.

[0036] Features of various exemplary embodiments of the present disclosure may be combined partially or totally. As will be clearly appreciated by those skilled in the art, technically various interactions and operations are possible. Various exemplary embodiments can be practiced individually or in combination.

[0037] The exemplary embodiments of the present disclosure may be practiced with either p-type transistors or n-type transistors. In the following description, however, descriptions will be made with n-type transistors for convenience of illustration. In describing scan signals SCAN1 and SCAN2 in the form of pulses inputted to the gate electrode, the gate electrode high voltage VGH state is defined as “high state” while the gate electrode low voltage VGL state is defined as “low state.”

[0038] Thus, the high voltage VGH is the gate electrode ON voltage that turns on the transistor, while the gate electrode low voltage VGL is the gate electrode OFF voltage that turns off the transistor.

[0039] Hereinafter, an organic light-emitting display device and a method of driving the same according to exemplary embodiments of the present disclosure will be described in detail with reference to the accompanying drawings.

[0040] FIG. 1 is a block diagram of an organic light-emitting diode display device according to an exemplary embodiment of the present disclosure. All components of the organic light-emitting diode display device according to all embodiments of the present disclosure are operatively coupled and configured.

[0041] An organic light-emitting diode display device 10 shown in FIG. 1 includes a display panel 2 in which a plurality of gate electrode lines GL and a plurality of data lines DL intersect each other to define a plurality of individual pixels 1, a gate driver 4 for driving the plurality of gate electrode lines GL, a data driver 3 for driving the plurality of data lines DL, a timing controller 5 for rearranging image data RGB input from an external source to supply it to the data driver 3, and for outputting a gate electrode control signal GCS and a data control signal DCS to control the gate driver 4 and the data driver 3.

[0042] According to the exemplary embodiment of the present disclosure, each pixel 1 includes an organic light-emitting diode OLED, and a pixel driving circuit that includes a driving transistor for supplying a driving current to the organic light-emitting diode OLED so as to individually drive the organic light-emitting diode OLED. In addition, the pixel driving circuit may compensate for deviations in the electric characteristic of the driving transistor such as the threshold voltage V_{th} and the mobility, and reduce the luminance deviation among the pixels 1 due to the difference in current supplied to the organic light-emitting diode OLED. The pixels 1 will be described later in detail with reference to FIGS. 2 to 6.

[0043] The display panel 2 has a plurality of gate electrode lines GL and a plurality of data lines DL intersecting each other. The pixels 1 are disposed at the intersections of the gate electrode lines GL and the data lines DL, respectively. Each of the pixels 1 includes an organic light-emitting diode OLED and a pixel driving circuit. Each of the pixels 1 is connected to a gate electrode line GL, a data line DL, a first supply voltage VDD line VDDL and a second supply voltage VSS line VSSL.

[0044] The gate driver 4 supplies gate electrode signals to the gate electrode lines GL in response to gate electrode control signals GCS issued from the timing controller 5. The gate electrode signals include first and second scan signals SCAN1 and SCAN2, and these signals are supplied to each of the pixels 1 via the gate electrode lines GL. The first voltage VDD is a higher potential and has a higher voltage

level than the second voltage VSS which is a lower potential. The second voltage VSS may be ground potential.

[0045] The data driver 3 converts digital image data RGB input from the timing controller 5 into data voltage V_{data} using a gamma reference voltage in response to the data control signals DCS issued from the timing controller 5. Then, the data driver supplies the converted data voltage V_{data} to the plurality of data lines DL. In addition, the data driver 3 outputs the data voltage V_{data} in a programming period t3 (see FIG. 3) of each pixel 1.

[0046] The timing controller 5 rearranges the image data RGB input from an external source taking into account the size and the resolution of the display panel 2 to supply it to the data driver 3. The timing controller 5 receives synchronization signals SYNC input from an external source, for example, a dot clock DCLK, a data enable signal DE, a horizontal synchronization signal Hsync and a vertical synchronization signal Vsync, and creates gate electrode control signals and data control signals GCS and DCS by using them. In addition, the timing controller 5 supplies the generated gate electrode control signals GCS and the data control signals DCS to the gate driver 4 and the data driver 3, respectively, to thereby control the gate driver 4 and the data driver 3.

[0047] Hereinafter, a pixel according to an exemplary embodiment of the present disclosure will be described in detail. FIG. 2 illustrates one example of a circuit diagram of the pixel 1 shown in FIG. 1.

[0048] Referring to FIG. 2, the pixel driving circuit includes an organic light-emitting diode, four transistors and two capacitors so as to drive the organic light-emitting diode. Specifically, the pixel driving circuit includes a driving transistor DT, first to third switching transistors ST1 to ST3, and first and second capacitors C1 and C2.

[0049] The first switching transistor ST1 includes a first gate electrode, a first oxide semiconductor layer, a first source electrode, and a first drain electrode. The first source electrode of the first switching transistor ST1 is connected to a second source electrode of the second switching transistor ST2 and to a first node N1 connected to a bottom gate electrode BG of the driving transistor DT.

[0050] The first switching transistor ST1 is turned on or off according to the first scan signal SCAN1 and connects the data line DL to the first node N1 when it is turned on. That is, the data voltage V_{data} provided from the data line DL is supplied to the first node N1.

[0051] The second switching transistor ST2 includes a second gate electrode, a second oxide semiconductor layer, a second source electrode and a second drain electrode. The source electrode of the second switching transistor ST2 is directly connected to the first node N1 connected to the bottom gate electrode BG of the driving transistor DT. In addition, the second switching transistor ST2 is a diode-connected transistor having the second gate electrode and the second drain electrode connected to ground potential. As a result, a negative threshold voltage ($-V_{th}$) is applied to the first node N1.

[0052] The third switching transistor ST3 includes a third gate electrode, a third oxide semiconductor layer, a third source electrode and a third drain electrode. The third drain electrode of the third switching transistor ST3 is connected to the ground potential. The third source electrode is directly connected to a second node N2 connected to a top gate electrode TG of the driving transistor DT.

[0053] The third switching transistor ST3 is turned on or off according to the second scan signal SCAN2. When the third switching transistor ST2 is turned on, the second node N2 may be connected to the ground potential, such that the voltage of the second node N2 may be 0V. When the third switching transistor ST3 is turned off, the second node N2 is floating, i.e., it does not have a fixed voltage level.

[0054] The third switching transistor ST3 may be electrically connected to the top gate electrode TG of the driving transistor DT to serve as a compensating transistor for compensating for a deviation in the threshold voltage V_{th} of the driving transistor DT.

[0055] The driving transistor DT is connected between the first supply voltage line VDDL and the second supply voltage line VSSL in series with the organic light-emitting diode, and supplies a driving current to the organic light-emitting diode. The first supply voltage line VDDL supplies a high-level voltage, e.g., $VDD=10V$ or a low-level voltage, e.g., $VDD=-10V$ to the drain electrode of the driving transistor DT as the first voltage VDD. The second supply voltage line VSSL supplies a high-level voltage, e.g., $VSS=10V$ or a low-level voltage, e.g., $VSS=-10V$ to the organic light-emitting diode OLED as the second voltage VSS.

[0056] The driving transistor DT includes the bottom gate electrode BG, an oxide semiconductor layer, a source electrode, a drain electrode, and the top gate electrode TG. Specifically, the driving transistor DT has a double-gate electrode structure in which the bottom gate electrode, the oxide semiconductor layer, the source electrode, the drain electrode and the top gate electrode are sequentially disposed. The bottom gate electrode BG is connected to the first node N1 to which the data voltage V_{data} is supplied while the top gate electrode TG is connected to the second node N2.

[0057] The first capacitor C1 may be connected to the first node N1 and may hold the data voltage V_{data} for one frame so that the driving transistor DT is turned on to allow a constant current to flow in the organic light-emitting diode. By doing so, the first capacitor C1 may be a storage capacitor (Cst) which keeps the grayscale displayed by the organic light-emitting diode constant.

[0058] One electrode of the first capacitor C1 may be connected to the first node N1 while the other electrode thereof may be connected to the ground potential in common with the second switching transistor ST2. Accordingly, a voltage of V_{th} is applied at the first node N1, and the first capacitor C1 may store the threshold voltage of V_{th} .

[0059] The second capacitor C2 is connected between the second node N2 and a third node N3 and is disposed between the source electrode of the driving transistor DT and the source electrode of the third switching transistor ST3. The second capacitor C2 may store a voltage twice the threshold voltage ($2 V_{th}$).

[0060] More specifically, a high-level supply voltage, e.g., $VDD=10V$ is applied from the first supply voltage line VDDL to the drain electrode of the driving transistor DT as the first voltage VDD, and a high-level supply voltage, e.g., $VSS=10 V$ is applied from the second supply voltage line VSSL to the organic light-emitting diode as the second voltage VSS. As a result, the organic light-emitting diode is turned off, and a negative voltage twice the threshold voltage ($-2 V_{th}$) is applied to the third node N3 until the driving transistor DT is turned off.

[0061] As the second capacitor C2 is connected between the second node N2 and the third node N3, the voltage of 0V is applied at the second node N2 and the voltage of $-2 V_{th}$ is applied at the third node N3, such that the second capacitor C2 may store the voltage of $2 V_{th}$. The second capacitor C2 may be a sensing capacitor used to sense the threshold voltage V_{th} of the driving transistor DT stored therein.

[0062] Accordingly, the threshold voltage V_{th} of the driving transistor DT can be controlled according to the voltage at the top gate electrode TG connected to the second node N2. By doing so, the threshold voltage V_{th} of the driving transistor DT of each pixel can be adjusted.

[0063] According to an exemplary embodiment of the present disclosure, the pixel driving circuit can sense the threshold voltage V_{th} of the driving transistor DT stored in the second capacitor C2, and the magnitude of the sensed threshold voltage V_{th} having a deviation can be compensated by adjusting the voltage at the top gate electrode TG.

[0064] The organic light-emitting diode display device includes the driving transistor DT that is involved in driving the organic light-emitting diode and has a double-gate electrode structure in which the bottom gate electrode, the oxide semiconductor layer, the source electrode, the drain electrode, and the top gate electrode are sequentially disposed.

[0065] In addition, the organic light-emitting diode display device includes the first capacitor C1 that is electrically connected to the bottom gate electrode and is a storage capacitor involved in charging the data voltage, and the second switching transistor ST2 that is a diode-connected transistor having the second gate electrode and the second drain electrode connected to the ground potential to thereby store the threshold voltage V_{th} in the storage capacitor C1.

[0066] The organic light-emitting diode display device includes the compensating transistor ST3 that is directly connected to the top gate electrode of the driving transistor DT and compensates for variations in the threshold voltage V_{th} of the driving transistor DT. In addition, the organic light-emitting diode display device includes the second capacitor C2 that is a compensating capacitor disposed between the source electrode of the driving transistor DT and the drain electrode of the compensating transistor ST3 to store the voltage of $2 V_{th}$ therein.

[0067] The drain electrode of the driving transistor DT is electrically connected to the first supply voltage line VDDL and the source electrode thereof is connected to the third node N3.

[0068] According to another exemplary embodiment of the present disclosure, an organic light-emitting diode display device comprises: a driving switching element DT having a bottom gate electrode and a top gate electrode and electrically connected to a first supply voltage line VDDL and a second supply voltage line VSSL; a first switching element ST1 for electrically connecting a data signal line DL with a first node N1 connected to the bottom gate electrode of the drive switching element DT in response to a first scan signal SCAN1; a second switching element ST2 connected to the first node and is a diode-connected transistor having its gate electrode and drain electrode commonly connected to a ground potential; a third switching element ST3 for electrically connecting a ground terminal with a second node N2 connected to the top gate electrode of the drive switching element DT in response to a second scan signal SCAN2; a

first capacitor C1 electrically connected between the first node N1 and the second switching element ST2; and a second capacitor C2 electrically connected between the second node N2 and a third node N3 connected to a source electrode of the drive switching element DT.

[0069] The voltage between the second node N2 and the third node N3 may be held at the voltage of $2 V_{th}$.

[0070] The organic light-emitting diode display device includes the driving transistor DT having a double-gate electrode structure, a compensating transistor connected to one gate electrode of the driving transistor DT to compensate for a deviation in the threshold voltage V_{th} of the driving transistor DT by itself, and a compensating transistor that stores the voltage of V_{th} between the source electrode of the driving transistor DT and the source electrode of the compensating transistor. As a result, the threshold voltage V_{th} of the driving transistor DT can be held constant all the time in the compensating capacitor disposed between the one gate electrode and the source electrode of the driving transistor DT.

[0071] In addition, one electrode of the compensating capacitor is connected to the source electrode of the compensating transistor having the drain electrode connected to the ground potential, while the other electrode of the compensating capacitor is connected to the source electrode of the driving transistor. The compensating transistor becomes floating, and the source electrode of the driving transistor charges voltage as the organic light-emitting diode is turned on. As a result, the voltage at the electrode is bootstrapped to the voltage equal to the threshold voltage V_{th} of the driving transistor DT plus voltage of the organic light-emitting diode OLED so as to hold the voltage of $2 V_{th}$ in the compensating capacitor.

[0072] Accordingly, the threshold voltage V_{th} of the driving transistor DT can be controlled according to the voltage at the top gate electrode TG connected to the second node N2. By doing so, the threshold voltage V_{th} of the driving transistor DT of each pixel can be adjusted.

[0073] FIG. 3 is a waveform diagram illustrating an example of an operation of the pixel shown in FIG. 1 when it is driven.

[0074] Referring to FIG. 3, the pixel is operated in separate periods depending on pulse timing of gate electrode signals supplied, including an initialization period t1, a sampling period t2, a programming period t3, and an emission period t4.

[0075] In the initialization period t1, the first scan signal SCAN1 starts with a high level, e.g., 13 V and is changed to a low level, e.g., $-5 V$ to be output. The second scan signal SCAN2 is output at a high level, e.g., 13 V.

[0076] In the initialization period t1, the first voltage VDD is output at a low level, e.g., $-10 V$. The second voltage VSS is output at a high level, e.g., 10 V, and a voltage at a low level, e.g., $-20 V$ is applied to an organic light-emitting diode OLED. In that initialization period t1 of each pixel P, the data driver 6 does not supply the data voltage V_{data} to the data lines DL. That is, data voltage V_{data} is 0 V during this period.

[0077] In the sampling period t2, the first scan signal SCAN1 is held at a low level, e.g., $-5 V$, and the second scan signal SCAN2 is still held at the high level, e.g., 13 V.

[0078] Also, the first voltage VDD is changed from the low level, e.g., $-10 V$ in the initialization period t1 to a high level, e.g., 10 V to be output. The second voltage VSS is held

at the high level, e.g., 10 V. The data voltage V_{data} is not yet supplied from the data driver 6 through the data lines DL.

[0079] In the programming period t_3 , the first scan signal SCAN1 starts with a high level, e.g., 13 V and changes to a low level after a predetermined period. The second scan signal SCAN2 is changed from the high level, e.g., 13 V in the sampling period t_2 to a low level, e.g., -5V to be output. The second voltage VSS is changed from the high level, e.g., 10V in the sampling period t_2 to a low level, e.g., -10V to be output. During this period, the data driver 6 supplies the data voltage V_{data} to the first node N1 through the data lines DL.

[0080] In the emission period t_4 , the organic light-emitting diode OLED output a voltage at a high level (V_{OLED}), and the first and second scan signals SCAN1 and SCAN2 are output at a low level e.g., -5V.

[0081] FIG. 4A to 4D are circuit diagrams showing signal flows in the periods of the waveform diagram shown in FIG. 3, respectively, according to the exemplary embodiment of the present disclosure. Hereinafter, a pixel driving circuit of an organic light-emitting diode display device according to an exemplary embodiment of the present disclosure will be described in detail with reference to FIGS. 3 to 4D.

[0082] Referring to FIGS. 3 and 4A, in the initialization period t_1 , the first scan signal SCAN1 starts with a high level, e.g., 13 V and is changed to a low level, e.g., -5 V to be output. The second scan signal SCAN2 is output at a high level, e.g., 13 V.

[0083] Referring to FIG. 4A, the first switching transistor ST1 may supply the data voltage V_{data} supplied from the plurality of data lines DL to the first node N1, and the second switching transistor ST2 having its gate electrode and drain electrode commonly connected to the ground potential applies the threshold voltage of $-V_{th}$ to the first node N1. In the initialization period t_1 , however, the data voltage V_{data} is not input, such that 0V is applied at the first node N1. Also, the second node N2 is discharged so that the voltage of 0V is applied at it by the ground potential electrically connected to the third switching transistor ST3.

[0084] In addition, referring to FIG. 4A, the first capacitor C1 uses the first node N1 as one electrode and the gate electrode and the drain electrode of the second switching transistor ST2 connected to the ground potential as the other electrode. The second capacitor C2 uses the second node N2 as one electrode and the third node N3 connected to the source electrode of the driving transistor DT as the other electrode.

[0085] As a result, the first capacitor C1 is initialized to the threshold voltage (V_{th}) in the initialization period t_1 , and one electrode of the second capacitor C2 connected to the second node N2 is discharged to 0 V by the ground potential electrically connected to the third switching transistor ST3 to be initialized.

[0086] The first supply voltage VDD connected to the driving transistor DT is changed from a high level, e.g., 10 V to a low level, e.g., -10 V when the initialization period t_1 starts. Then, the voltage of the low level, e.g., -10 V is applied to the third node N3 connected to the driving transistor DT. The second supply voltage VSS connected to the organic light-emitting diode is changed from a low level, e.g., -10 V to a high level, e.g., 10V. As a result, during the initialization period t_1 , no current flows in the organic light-emitting diode and thus it is turned off to emit no light.

[0087] Subsequently, referring to FIGS. 3 and 4B, in the sampling period t_2 , the first scan signal SCAN1 remains at the low level, e.g., -5 V. The first switching transistor ST1 and the second switching transistor ST2 are being turned off. Also, the second scan signal SCAN2 is held at a high level, e.g., 13 V. The third switching transistor ST3 is being turned on. As a result, the first node N1 is held at the voltage of $-V_{th}$, and the second node N2 remains at 0V.

[0088] Further, the high-potential supply voltage VDD connected to the driving transistor DT is changed from the low level, e.g., -10 V to a high level, e.g., 10 V. Since the gate electrode-source voltage V_{gs} of the driving transistor DT is larger than the threshold voltage V_{th} , the driving transistor DT is turned on. Then, during the sampling period t_2 , the third node N3 is charged from a low level, e.g., -10 V to the voltage of $-2 V_{th}$. Subsequently, when the voltage at the third node N3 reaches $-2 V_{th}$, the driving transistor DT is turned off. The second node N2 is held at the voltage of 0 V, and the voltage of $-2 V_{th}$ is applied at the third node N3, so that the voltage of $2 V_{th}$ is stored in the second capacitor C2. Further, the organic light-emitting diode is still turned off.

[0089] Subsequently, referring to FIGS. 3 and 4C, in the programming period t_3 , the first switching transistor ST1 remains turned on. Then, the data voltage V_{data} supplied from the data driver 6 through the plurality of data lines DL is supplied to the first node N1 through the first switching transistor ST1, and the data voltage V_{data} supplied to the first node N1 turns on the driving transistor DT. The second switching transistor ST2 is turned off.

[0090] The second supply voltage VSS connected to the organic light-emitting diode is changed from the high level, e.g., 10 V to a low level, e.g., -10V. As a result, the organic light-emitting diode is turned on, and a current path is disposed between the driving transistor DT and the organic light-emitting diode. In addition, the voltage at the third node N3 is changed from the voltage of $-2 V_{th}$ to the voltage of the organic light-emitting diode V_{OLED} .

[0091] Referring to FIG. 4C, in the programming period t_3 , the third switching transistor ST3 is turned off. When the third switching transistor ST3 is turned off, 0 V is applied at the second node N2, such that the second node N2 is floating, i.e., it does not have a fixed voltage level.

[0092] Since one electrode of the second capacitor C2 is connected to the second node N2, in order for the second capacitor C2 to hold the voltage of $2 V_{th}$ stored in the floating state, the second node N2 connected to the electrode of the second capacitor C2 is boosted from the voltage of 0 V to the voltage of $2 V_{th}$ plus the voltage of the organic light-emitting diode OLED (V_{OLED}).

[0093] Accordingly, the threshold voltage V_{th} of the driving transistor DT can be controlled according to the voltage at the top gate electrode TG connected to the second node N2. By doing so, the threshold voltage V_{th} of the driving transistor DT of each pixel can be adjusted.

[0094] According to an exemplary embodiment of the present disclosure, the pixel driving circuit can sense the threshold voltage V_{th} of the driving transistor DT stored in the second capacitor C2, and the magnitude of the sensed threshold voltage V_{th} having a deviation can be compensated by adjusting the voltage at the top gate electrode TG.

[0095] For example, in the floating state, the second capacitor C2 should maintain the threshold voltage V_{th} at the voltage of $2 V_{th}$, and thus the threshold voltage V_{th} plus

the voltage of the organic light-emitting diode V_{OLED} ($2V_{th} + V_{OLED}$) is applied at the second node N2, while the voltage V_{OLED} is applied at the third node N3. Accordingly, if the voltage twice the threshold voltage V_{th} of the driving transistor DT ($2V_{th}$) is applied to the top gate electrode TG, the voltage equal to the threshold voltage V_{th} of the driving transistor DT is lowered in order to hold the voltage of $2V_{th}$ at the second capacitor C2. In other words, the top gate electrode TG of the pixel driving circuit can adjust the threshold voltage V_{th} of the driving transistor DT more precisely. The relationship between a change in the voltage at the top gate electrode TG and the threshold voltage V_{th} of the driving transistor DT can be expressed by Equation 1 below:

$$\Delta V_{TH} / \Delta V_{TG} \approx -0.5 \quad [\text{Equation 1}]$$

[0096] According to an exemplary embodiment of the present disclosure, the pixel can adjust the threshold voltages V_{th} of the driving transistors DT over the entire screen to be uniform. Further, during the sampling period t_2 , the third node N3 connected to the source electrode of the driving transistor DT is quickly charged to the voltage of $-2V_{th}$. Then, during the programming period t_3 , the second node N2 uses the capacitor boosting, and thus the threshold voltage V_{th} of the driving transistor DT can be compensated for faster.

[0097] Subsequently, in the emission period t_4 , the first switching transistor ST1 is turned off. Then, the high potential voltage VDD is applied to the drain of the driving transistor DT, and the driving transistor DT supplies the driving current to the organic light-emitting diode. In this manner, the pixels P can compensate for deviations in the characteristics of the driving transistor DT, thereby reducing the luminance deviations among the pixels P.

[0098] Incidentally, the organic light-emitting diode display device according to the exemplary embodiment of the present disclosure employs a source follower topology in which a load is connected to the source electrode of the driving transistor DT instead of supplying a fixed voltage. Accordingly, even when the threshold voltage V_{th} of the driving transistor DT is negative, the organic light-emitting diode display device can sense the threshold voltage V_{th} , and thus deviations in the threshold voltage V_{th} can be compensated for regardless of the polarities of the threshold voltage V_{th} .

[0099] For an organic light-emitting diode display device in which a gate electrode and a drain electrode of a driving transistor in a pixel are connected, it is not possible to sense the threshold voltage V_{th} of the driving transistor DT if the threshold voltage V_{th} is negative. In contrast, in the organic light-emitting diode display device according to the exemplary embodiment of the present disclosure employing the source-follower topology, it is possible to sense a negative threshold voltage V_{th} .

[0100] In other words, in the organic light emitting diode display device according to an exemplary embodiment of the present disclosure, a change in the current flowing through the organic light-emitting diode due to deviations in a positive or negative threshold voltage (V_{th}) can be compensated for, such that the current according to the data voltage V_{data} can be held constant regardless of the polarity as well as the threshold voltage V_{th} .

[0101] FIGS. 5A and 5B are graphs showing relationships between a voltage applied to the top gate electrode of the

driving transistor shown in FIG. 2 and the threshold voltage. FIG. 5A shows electrical characteristics of a driving transistor according to an exemplary embodiment of the present disclosure. FIG. 5B is a graph showing a relationship between the voltage applied to the top gate electrode and the threshold voltage in the driving transistor.

[0102] Referring to FIGS. 5A and 5B, the electrical characteristics of the driving transistor DT change as the voltage applied to the top gate electrode TG of the driving transistor DT increases. When the voltages of $-18V$, $-12V$, $-6V$, $0V$, $6V$, $12V$ and $18V$ are applied to the top gate electrode TG, respectively, negative shifts occur in the threshold voltage V_{th} as opposed to the magnitude of the voltage applied to the top gate electrode TG. As a result, the threshold voltage V_{th} of the driving transistor DT can be directly compensated.

[0103] FIG. 6 is a cross-sectional view of the driving transistor according to the exemplary embodiment shown in FIG. 2.

[0104] As shown in FIG. 6, the driving transistor DT according to the exemplary embodiment of the present disclosure includes a substrate 110, a bottom gate electrode 120, a gate insulating layer 130, an active layer 140, source and drain electrodes 150A and 150B, a passivation layer 160 and a top gate electrode 170.

[0105] Referring to FIG. 6, the driving transistor DT is a coplanar type transistor in which the source and drain electrodes 150A and 150B are located on the active layer 140 with the top gate electrode 120 disposed under the active layer 140. Specifically, the bottom gate electrode 120 is disposed on the substrate 110, and the gate insulating layer 130 is disposed between the bottom gate electrode 120 and the active layer 140. The source and drain electrodes 150A and 150B, the passivation layer 160 and the top gate electrode 170 are sequentially disposed above the active layer 140.

[0106] The gate insulating layer 130 may be made of silicon nitride (SiNx) or silicon oxide (SiOx). The thickness of the gate insulating layer 130 may be associated with the device characteristics of the driving transistor DT, especially the threshold voltage V_{th} control of the device. In particular, it can be said that the thickness of the gate insulating layer 130 is inversely proportional to the degree of change in the threshold voltage V_{th} of the driving transistor DT.

[0107] According to an exemplary embodiment of the present disclosure, the compensating capacitor C2 stores the voltage of $2V_{th}$ to control the threshold voltage V_{th} of the driving transistor DT with the top gate electrode 170 of the driving transistor DT. For example, since the threshold voltage V_{th} of the driving transistor DT is adjusted by the voltage applied to the top gate electrode 170 of the driving transistor DT, the thickness of the gate insulating layer 130 may vary depending on the compensation value for compensating the threshold voltage V_{th} of the driving transistor DT to be adjusted.

[0108] Therefore, by sufficiently increasing the thickness of the gate insulating layer 130 of the driving transistor DT, it is possible to fabricate a stable driving transistor.

[0109] As described above, according to the exemplary embodiment(s) of the present disclosure, the threshold voltage V_{th} of the driving transistor DT can be efficiently compensated for, such that failure due to long driving can be

prevented or minimized and luminance deviations among the pixels can be reduced, thereby improving the image quality.

[0110] According to an example of the present disclosure, an organic light-emitting diode display device comprises an organic light-emitting element; a driving transistor involved in driving the organic light-emitting element and comprising a bottom gate electrode BG, an oxide semiconductor layer, a source electrode, a drain electrode and a top gate electrode TG; a first switching transistor electrically connected to the bottom gate electrode of the driving transistor and involved in transmitting data voltage V_{data} to control the driving transistor; a storage capacitor Cst electrically connected to the bottom gate electrode and involved in charging data voltage; a second switching transistor configured to store a threshold voltage V_{th} in the storage capacitor; a compensating transistor directly connected to the top gate electrode of the driving transistor to compensate for a deviation in the threshold voltage of the driving transistor; and a compensating capacitor Ccomp disposed between the source electrode of the driving transistor and a source electrode of the compensating transistor and storing a threshold voltage therein.

[0111] The thickness of the gate insulating layer may be controlled by a compensation value for compensating for the threshold voltage of the driving transistor.

[0112] The first switching transistor includes a first gate electrode, a first oxide semiconductor layer, a first source electrode, and a first drain electrode. The first source electrode may be directly connected to a first node N1 connected to the bottom gate electrode of the driving transistor.

[0113] The second switching transistor includes a second gate electrode, a second oxide semiconductor layer, a second source electrode, and a second drain electrode. The second gate electrode and the second drain electrode both may be connected to the ground potential, one electrode of the storage capacitor Cst may be connected to the ground potential.

[0114] The other electrode of the storage capacitor Cst may be connected to a first node N1 and the source electrode of the first switching transistor.

[0115] The compensating transistor may include a third gate electrode, a third oxide semiconductor layer, a third source electrode and a third drain electrode, and the third source electrode may be directly connected to a second node N2 connected to the top gate electrode of the driving transistor.

[0116] The drain electrode of the driving transistor may be electrically connected to the first supply voltage line VDDL, while the source electrode of the driving transistor may be connected to the third node N3.

[0117] When the second switching transistor and the compensating transistor are turned on, a negative threshold voltage $-V_{th}$ of the second switching transistor may be applied to the first node N1, and the voltage of 0 V may be applied to the second node N2.

[0118] When the second switching transistor is turned off while the compensating transistor is turned on, the voltage twice the negative threshold voltage may be applied to the third node N3.

[0119] When the first switching transistor is turned on while the compensating transistor is turned off, the organic

light-emitting diode is turned on and the voltage V_{OLED} applied to the organic light-emitting diode may be applied to the third node N3.

[0120] When the compensating transistor is turned off, the second node N2 may be floating.

[0121] In order to hold the voltage twice the threshold voltage ($2 V_{th}$) stored in the compensating capacitor, the voltage at the second node may be boosted to a voltage equal to the voltage of the organic light-emitting diode (V_{OLED}) plus the voltage twice threshold voltage of the driving transistor.

[0122] The voltage between the second node N2 and the third node N3 is held at the voltage twice the threshold voltage, so that the voltage applied to the top gate electrode of the driving transistor can control the threshold voltage of the driving transistor.

[0123] According to an example of the present disclosure, a pixel driving circuit includes a driving switching element DT having a bottom gate electrode and a top gate electrode and electrically connected to a first supply voltage line VDDL and a second supply voltage line VSSL; a first switching element ST1 for electrically connecting a data signal line DL with a first node N1 connected to the bottom gate electrode of the drive switching element DT in response to a first scan signal SCAN1; a second switching element ST2 connected to the first node and is a diode-connected transistor having its gate electrode and drain electrode commonly connected to a ground potential; a third switching element ST3 for electrically connecting a ground terminal with a second node N2 connected to the top gate electrode of the drive switching element DT in response to a second scan signal SCAN2; a first capacitor C1 electrically connected between the first node N1 and the second switching element ST2; and a second capacitor C2 electrically connected between the second node N2 and a third node N3 connected to a source electrode of the drive switching element DT.

[0124] The first switching element ST1 includes a first gate electrode, a first oxide semiconductor layer, a first source electrode, and a first drain electrode. The first gate electrode may be connected to a first scan signal line SCL1 for supplying a first scan signal SCAN1.

[0125] The first drain electrode may be connected to a data signal line DL to receive data voltage V_{data} .

[0126] The third switching element ST3 includes a third gate electrode, a third oxide semiconductor layer, a third source electrode, and a third drain electrode. The third gate electrode may be connected to a second scan signal line SCL2 for supplying a second scan signal SCAN2.

[0127] The third drain electrode may be connected to the ground potential.

[0128] When the third switching element ST3 is turned off, the second node N2 may be connected to the ground potential, i.e., it may float, with no potential difference.

[0129] The second switching element ST2 includes a second gate electrode, a second oxide semiconductor layer, a second source electrode, and a second drain electrode. The second source electrode may be connected to the first node N1 and the source electrode of the first switching element ST1. The drain electrode may be connected to one electrode of the first capacitor C1.

[0130] The other electrode of the first capacitor C1 may be connected to the first node N1 and the source electrode of the first switching element ST1.

[0131] The second capacitor C2 may store the voltage twice the threshold voltage ($2 V_{th}$).

[0132] The voltage between the second node N2 and the third node N3 is held at the voltage twice the threshold voltage ($2 V_{th}$), so that the voltage applied to the top gate electrode of the driving transistor can control the threshold voltage V_{th} of the driving transistor.

[0133] The voltage equal to twice the threshold voltage V_{th} of the driving transistor DT is applied to the top gate electrode, and the threshold voltage of the driving transistor DT can be reduced to the voltage equal to the threshold voltage V_{th} .

[0134] According to an example of the present disclosure, an OLED display device includes a plurality of pixels, wherein each of the pixels comprises an organic light-emitting diode and a pixel driving circuit for driving the organic light-emitting diode, wherein the pixel driving circuit comprises: a driving switching element (e.g., DT) having a bottom gate electrode and a top gate electrode and connected between a first supply voltage line (e.g., VDDL) and a second supply voltage line (e.g., VSSL) in series with the organic light-emitting diode; a first switching element (e.g., ST1) for connecting a data signal line (e.g., DL) with a first node (e.g., N1) connected to the bottom gate electrode of the drive switching element (DT) in response to a first scan signal; a second switching element (e.g., ST2) connected to the first node and being a diode-connected transistor having its gate electrode and drain electrode commonly connected to a ground potential; a third switching element (e.g., ST3) for connecting a ground terminal with a second node (e.g., N2) connected to the top gate electrode of the drive switching element (DT) in response to a second scan signal; a first capacitor (e.g., C1) electrically connected between the first node (N1) and the second switching element (ST2); and a second capacitor (e.g., C2) disposed between the second node (N2) and a third node (e.g., N3) connected to a drain electrode of the drive switching element (DT), wherein the pixel driving circuit is operated in different periods including: an initialization period in which the second and third switching elements (ST2 and ST3) are turned on, such that a negative threshold voltage (e.g., $-V_{th}$) is applied to the first node (N1) and the second node (N2) is initialized to 0 V; a sampling period in which the third switching element (ST3) and the driving switching element (DT) are turned on, such that a voltage twice the negative threshold voltage is applied to the third node (N3) and a voltage twice the threshold voltage ($2 V_{th}$) is stored in the second capacitor (C2); a programming period in which the first switching element (ST1) is turned on while the second and third switching elements (ST2 and ST3) are turned off, such that data voltage (e.g., V_{data}) is applied to the first node (N1), organic light-emitting diode voltage (V_{OLED}) is charged at the third node (N3) and a voltage at the second node (N2) is boosted to a voltage equal to the organic light-emitting diode voltage (V_{OLED}) plus the voltage twice the threshold voltage ($2 V_{th}$); and an emission period in which the first and second switching elements (ST1 and ST2) are turned off, such that the driving switching element (DT) applies a driving current to the organic light-emitting diode in response to a data signal input from the first switching element (ST1).

[0135] In the initialization period, the second gate electrode and the second drain electrode both are connected to the ground potential to form diode-connection, and a nega-

tive threshold voltage is supplied to the first node N1, to initialize the first capacitor C1 to the threshold voltage.

[0136] In the initialization period, the second switching element ST2 is turned on, the voltage of 0 V is applied from the ground terminal to the second node N2, to discharge the second capacitor C2.

[0137] In the sampling period, the third node N3 is charged to a voltage twice the negative threshold voltage until the gate-source voltage V_{gs} of the drive switching element DT reaches the threshold voltage. When the voltage at the third node N3 becomes twice the negative threshold voltage, the driving switching element DT can be turned off.

[0138] In the sampling period, the second capacitor C2 is charged to a voltage twice the threshold voltage, and a high-level voltage is applied from the second supply voltage line VSSL to the organic light-emitting diode, so that the organic light-emitting diode may not emit light.

[0139] In the programming period, a low-level voltage is applied to the second supply voltage line VSSL, such that the organic light-emitting diode is turned on, and accordingly the organic light-emitting diode voltage V_{OLED} may be applied to the third node N3.

[0140] In the programming period, the third switching element ST3 is turned off so that the second node becomes floating. In order to hold the voltage twice the threshold voltage in the second capacitor, the voltage at the second node may be boosted from 0 V to the voltage equal to the organic light-emitting diode voltage V_{OLED} plus the voltage twice threshold voltage.

[0141] The threshold voltage of the driving switching element can be adjusted by the voltage applied to the top gate electrode.

[0142] In the sampling period, a negative threshold voltage of the driving transistor also can be sensed.

[0143] The exemplary embodiments of the present disclosure described above may be substituted, altered, and modified by those skilled in the art without departing from the scope and spirit of the present disclosure. Therefore, the present disclosure is not limited to the above-mentioned exemplary embodiments and the accompanying drawings.

[0144] The various embodiments of the present disclosure can also be described as follows.

[0145] According to an example of the present disclosure, there is provided an organic light-emitting diode display device including an organic light-emitting element; a driving transistor involved in driving the organic light-emitting element and comprising a bottom gate electrode BG, an oxide semiconductor layer, a source electrode, a drain electrode and a top gate electrode TG; a first switching transistor electrically connected to the bottom gate electrode of the driving transistor and involved in transmitting data voltage V_{data} to control the driving transistor; a storage capacitor Cst electrically connected to the bottom gate electrode and involved in charging data voltage; a second switching transistor configured to store a threshold voltage V_{th} in the storage capacitor; a compensating transistor directly connected to the top gate electrode of the driving transistor to compensate for a deviation in the threshold voltage of the driving transistor; and a compensating capacitor Ccomp disposed between the source electrode of the driving transistor and a source electrode of the compensating transistor and storing a threshold voltage therein.

[0146] The thickness of the gate insulating layer may be controlled by a compensation value for compensating for the threshold voltage of the driving transistor.

[0147] The first switching transistor may include a first gate electrode, a first oxide semiconductor layer, a first source electrode, and a first drain electrode. The first source electrode may be directly connected to a first node N1 connected to the bottom gate electrode of the driving transistor.

[0148] The second switching transistor may include a second gate electrode, a second oxide semiconductor layer, a second source electrode, and a second drain electrode. The second gate electrode and the second drain electrode both may be connected to the ground potential, one electrode of the storage capacitor Cst may be connected to the ground potential.

[0149] The other electrode of the storage capacitor Cst may be connected to a first node N1 and the source electrode of the first switching transistor.

[0150] The compensating transistor may include a third gate electrode, a third oxide semiconductor layer, a third source electrode and a third drain electrode, and the third source electrode may be directly connected to a second node N2 connected to the top gate electrode of the driving transistor.

[0151] The drain electrode of the driving transistor may be electrically connected to the first power supply line VDDL, while the source electrode of the driving transistor may be connected to the third node N3.

[0152] When the second switching transistor and the compensating transistor are turned on, a negative threshold voltage $-V_{th}$ of the second switching transistor may be applied to the first node N1, and the voltage of 0 V may be applied to the second node N2.

[0153] When the second switching transistor is turned off while the compensating transistor is turned on, the voltage twice the negative threshold voltage may be applied to the third node N3.

[0154] When the first switching transistor is turned on while the compensating transistor is turned off, the organic light-emitting element may be turned on and the voltage V_{OLED} applied to the organic light emitting element may be applied to the third node N3.

[0155] When the compensating transistor is turned off, the second node N2 may be floating.

[0156] In order to hold the voltage twice the threshold voltage ($2 V_{th}$) stored in the compensating capacitor, the voltage at the second node may be boosted to a voltage equal to the voltage of the organic light-emitting diode (V_{OLED}) plus the voltage twice threshold voltage of the driving transistor.

[0157] The voltage between the second node N2 and the third node N3 is held at the voltage twice the threshold voltage, so that the voltage applied to the top gate electrode of the driving transistor can control the threshold voltage of the driving transistor.

[0158] According to another example of the present disclosure, a pixel driving circuit includes a driving switching element DT having a bottom gate electrode and a top gate electrode and electrically connected to a first supply voltage line VDDL and a second supply voltage line VSSL; a first switching element ST1 for electrically connecting a data signal line DL with a first node N1 connected to the bottom gate electrode of the drive switching element DT in response

to a first scan signal SCAN1; a second switching element ST2 connected to the first node and is a diode-connected transistor having its gate electrode and drain electrode commonly connected to a ground potential; a third switching element ST3 for electrically connecting a ground terminal with a second node N2 connected to the top gate electrode of the drive switching element DT in response to a second scan signal SCAN2; a first capacitor C1 electrically connected between the first node N1 and the second switching element ST2; and a second capacitor C2 electrically connected between the second node N2 and a third node N3 connected to a source electrode of the drive switching element DT.

[0159] The first switching element ST1 may include a first gate electrode, a first oxide semiconductor layer, a first source electrode, and a first drain electrode. The first gate electrode may be connected to a first scan signal line SCL1 for supplying a first scan signal SCAN1.

[0160] The first drain electrode may be connected to a data signal line DL to receive data voltage V_{data} .

[0161] The third switching element ST3 may include a third gate electrode, a third oxide semiconductor layer, a third source electrode, and a third drain electrode. The third gate electrode may be connected to a second scan signal line SCL2 for supplying a second scan signal SCAN2.

[0162] The third drain electrode may be connected to the ground terminal.

[0163] When the third switching element ST3 is turned off, the second node N2 may be connected to the ground potential, i.e., it may float, with no potential difference.

[0164] The second switching element ST2 may include a second gate electrode, a second oxide semiconductor layer, a second source electrode, and a second drain electrode. The second source electrode may be connected to the first node N1 and the source electrode of the first switching element ST1. The drain electrode may be connected to one electrode of the first capacitor C1.

[0165] The other electrode of the first capacitor C1 may be connected to the first node N1 and the source electrode of the first switching element ST1.

[0166] The second capacitor C2 may store the voltage twice the threshold voltage ($2 V_{th}$).

[0167] The voltage between the second node N2 and the third node N3 is held at the voltage twice the threshold voltage ($2 V_{th}$), so that the voltage applied to the top gate electrode of the driving transistor can control the threshold voltage V_{th} of the driving transistor.

[0168] The voltage equal to twice the threshold voltage V_{th} of the driving transistor DT is applied to the top gate electrode, and the threshold voltage of the driving transistor DT can be reduced to the voltage equal to the threshold voltage V_{th} .

[0169] According to yet another example of the present disclosure, an OLED display device includes a plurality of pixels, wherein each of the pixels comprises an organic light-emitting diode and a pixel driving circuit for driving the organic light-emitting diode, wherein the pixel driving circuit comprises: a driving switching element (DT) having a bottom gate electrode and a top gate electrode and connected between a first supply voltage line (VDDL) and a second supply voltage line (VSSL) in series with the organic light-emitting diode; a first switching element (ST1) for connecting a data signal line (DL) with a first node (N1) connected to the bottom gate electrode of the drive switch-

ing element (DT) in response to a first scan signal; a second switching element (ST2) connected to the first node and being a diode-connected transistor having its gate electrode and drain electrode commonly connected to a ground potential; a third switching element (ST3) for connecting a ground terminal with a second node (N2) connected to the top gate electrode of the drive switching element (DT) in response to a second scan signal; a first capacitor (C1) electrically connected between the first node (N1) and the second switching element (ST2); and a second capacitor (C2) disposed between the second node (N2) and a third node (N3) connected to a drain electrode of the drive switching element (DT), wherein the pixel driving circuit is operated in different periods including: an initialization period in which the second and third switching elements (ST2 and ST3) are turned on, such that a negative threshold voltage ($-V_{th}$) is applied to the first node (N1) and the second node (N2) is initialized to 0 V; a sampling period in which the third switching element (ST3) and the driving switching element (DT) are turned on, such that a voltage twice the negative threshold voltage is applied to the third node (N3) and a voltage twice the threshold voltage ($2 V_{th}$) is stored in the second capacitor (C2); a programming period in which the first switching element (ST1) is turned on while the second and third switching elements (ST2 and ST3) are turned off, such that data voltage (V_{data}) is applied to the first node (N1), organic light-emitting diode voltage (V_{OLED}) is charged at the third node (N3) and a voltage at the second node (N2) is boosted to a voltage equal to the organic light-emitting diode voltage (V_{OLED}) plus the voltage twice the threshold voltage ($2 V_{th}$); and an emission period in which the first and second switching elements (ST1 and ST2) are turned off, such that the driving switching element (DT) applies a driving current to the organic light-emitting diode in response to a data signal input from the first switching element (ST1).

[0170] In the initialization period, the second gate electrode and the second drain electrode both may be connected to the ground potential to form diode-connection, and the negative threshold voltage ($-V_{th}$) maybe supplied to the first node (N1) to initialize the first capacitor (C1) to the threshold voltage V_{th} .

[0171] In the initialization period, the second switching element ST2 may be turned on, the voltage of 0 V is applied from the ground terminal to the second node N2, to discharge the second capacitor C2.

[0172] In the sampling period, the third node (N3) may be charged to a voltage twice the negative threshold voltage ($-V_{th}$) until a gate-source voltage (V_{gs}) of the drive switching element (DT) reaches the threshold voltage (V_{th}), and upon the voltage at the third node (N3) reaching the twice the negative threshold voltage ($-V_{th}$), the driving switching element (DT) may be turned off.

[0173] In the sampling period, the second capacitor (C2) may be charged to a voltage twice the threshold voltage ($2 V_{th}$), and a high-level voltage may be applied from the second supply voltage line VSSL to the organic light-emitting diode, so that the organic light-emitting diode does not emit light.

[0174] In the programming period, a low-level voltage may be applied to the second supply voltage line VSSL, such that the organic light-emitting diode is turned on, and accordingly the organic light-emitting diode voltage V_{OLED} may be applied to the third node N3.

[0175] In the programming period, the third switching element (ST3) may be turned off so that the second node becomes floating, and the voltage at the second node is boosted from 0 V to the voltage equal to the organic light-emitting diode voltage (V_{OLED}) plus the voltage twice the threshold voltage ($2 V_{th}$) so as to hold the voltage twice the threshold voltage in the second capacitor.

[0176] The threshold voltage of the driving switching element can be adjusted by the voltage applied to the top gate electrode.

[0177] In the sampling period, a negative threshold voltage of the driving transistor also can be sensed.

[0178] The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

What is claimed is:

1. An organic light-emitting diode display device comprising:

- an organic light-emitting diode;
- a driving transistor involved in driving the organic light-emitting diode and comprising a bottom gate electrode, an oxide semiconductor layer, a source electrode, a drain electrode and a top gate electrode;
- a first switching transistor electrically connected to the bottom gate electrode of the driving transistor and involved in transmitting a data voltage to control the driving transistor;
- a storage capacitor electrically connected to the bottom gate electrode and involved in charging the data voltage;
- a second switching transistor configured to store a threshold voltage in the storage capacitor;
- a compensating transistor directly connected to the top gate electrode of the driving transistor to compensate for a deviation in the threshold voltage of the driving transistor; and
- a compensating capacitor disposed between the source electrode of the driving transistor and a source electrode of the compensating transistor and storing the threshold voltage therein.

2. The organic light-emitting diode display device of claim 1, wherein the driving transistor further comprises a gate insulating layer, and a thickness of the gate insulating layer is controlled by a compensation value used to compensate for the threshold voltage of the driving transistor.

3. The organic light-emitting diode display device of claim 1, wherein the first switching transistor comprises a first gate electrode, a first oxide semiconductor layer, a first source electrode, and a first drain electrode, and

wherein the first source electrode is directly connected to a first node connected to the bottom gate electrode of the driving transistor.

4. The organic light-emitting diode display device of claim 1, wherein the second switching transistor comprises a second gate electrode, a second oxide semiconductor layer, a second source electrode, and a second drain electrode,

wherein the second gate electrode and the second drain electrode both are connected to a ground potential, and wherein one electrode of the storage capacitor is connected to the ground potential and wherein another

electrode of the storage capacitor is connected to a first node and the first source electrode of the first switching transistor.

5. The organic light-emitting diode display device of claim 1, wherein the compensating transistor comprises a third gate electrode, a third oxide semiconductor layer, a third source electrode, and a third drain electrode, and

wherein the third source electrode is directly connected to a second node connected to the top gate electrode of the driving transistor.

6. The organic light-emitting diode display device of claim 1, wherein the drain electrode of the driving transistor is electrically connected to a first supply voltage line, and wherein the source electrode of the driving transistor is connected to a third node.

7. The organic light-emitting diode display device of claim 3, wherein, upon the second switching transistor and the compensating transistor being turned on, a negative threshold voltage of the second switching transistor is applied to the first node, and a voltage of the ground potential is applied to the second node.

8. The organic light-emitting diode display device of claim 6, wherein upon the second switching transistor being turned off while the compensating transistor being turned on, a voltage twice the negative threshold voltage is applied to the third node.

9. The organic light-emitting diode display device of claim 6, wherein upon the first switching transistor being turned on while the compensating transistor being turned off, the organic light-emitting diode is turned on and a voltage of the organic light-emitting diode is applied to the third node.

10. The organic light-emitting diode display device of claim 5, wherein upon the compensating transistor being turned off, the second node is floating.

11. The organic light-emitting diode display device of claim 9, wherein a voltage of the second node is boosted to a voltage equal to the voltage of the organic light-emitting diode plus a voltage twice threshold voltage of the driving transistor, so as to hold the voltage twice the threshold voltage stored in the compensating capacitor.

12. The organic light-emitting diode display device of claim 11, wherein a voltage between the second node and the third node is held at twice the threshold voltage, so that the voltage applied to the top gate electrode of the driving transistor controls the threshold voltage of the driving transistor.

13. An organic light-emitting diode (OLED) display device comprising:

a plurality of pixels, wherein each of the pixels comprises an organic light-emitting diode and a pixel driving circuit for driving the organic light-emitting diode,

wherein the pixel driving circuit comprises:

a drive switching element having a bottom gate electrode and a top gate electrode and connected between a first supply voltage line and a second supply voltage line in series with the organic light-emitting diode;

a first switching element for connecting a data signal line with a first node connected to the bottom gate electrode of the drive switching element in response to a first scan signal;

a second switching element connected to the first node and being a diode-connected transistor having its

gate electrode and drain electrode commonly connected to a ground potential;

a third switching element for connecting a ground terminal with a second node connected to the top gate electrode of the drive switching element in response to a second scan signal;

a first capacitor electrically connected between the first node and the second switching element; and

a second capacitor disposed between the second node and a third node connected to a drain electrode of the drive switching element,

wherein the pixel driving circuit is operated in different periods comprising:

an initialization period in which the second switching element and third switching element are turned on, such that a negative threshold voltage is applied to the first node and the second node is initialized to the ground potential;

a sampling period in which the third switching element and the driving switching element are turned on, such that a voltage twice the negative threshold voltage is applied to the third node and a voltage twice the threshold voltage is stored in the second capacitor;

a programming period in which the first switching element is turned on while the second switching element and third switching element are turned off, such that data voltage is applied to the first node, a voltage of organic light-emitting diode is charged at the third node and a voltage of the second node is boosted to a voltage equal to the voltage of organic light-emitting diode voltage plus the voltage twice the threshold voltage; and

an emission period in which the first switching element and second switching element are turned off, such that the driving switching element applies a driving current to the organic light-emitting diode in response to a data signal from the first switching element, and

wherein the threshold voltage of the driving switching element is adjusted by a voltage applied to the top gate electrode.

14. The OLED display device of claim 13, wherein in the initialization period, the second gate electrode and the second drain electrode both are connected to the ground potential to form diode-connection, and

wherein the negative threshold voltage is applied to the first node to initialize the first capacitor to the threshold voltage.

15. The OLED display device of claim 13, wherein in the initialization period, the second switching element is turned on, and a voltage of the ground potential is applied from the ground terminal to the second node, to discharge the second capacitor.

16. The OLED display device of claim 13, wherein in the sampling period, the third node is charged to a voltage twice the negative threshold voltage until a gate-source voltage of the drive switching element reaches the threshold voltage, and

wherein upon the voltage at the third node reaching the twice the negative threshold voltage, the driving switching element is turned off.

17. The OLED display device of claim **13**, wherein in the sampling period, the second capacitor is charged to a voltage twice the threshold voltage, and

wherein a high-level voltage is applied from the second supply voltage line to the organic light-emitting diode, so that the organic light-emitting diode does not emit light.

18. The OLED display device of claim **13**, wherein in the programming period, a low-level voltage is applied to the second supply voltage line such that the organic light-emitting diode is turned on, and the voltage of organic light-emitting diode is applied to the third node.

19. The OLED display device of claim **13**, wherein in the programming period, the third switching element is turned off so that the second node is floating, and

wherein the voltage at the second node is boosted from a voltage of the ground potential to the voltage equal to the voltage of organic light-emitting diode voltage plus the voltage twice the threshold voltage, so as to hold the voltage twice the threshold voltage in the second capacitor.

20. The OLED display device of claim **13**, wherein in the sampling period, a negative threshold voltage of the driving switching element is sensed.

* * * * *

专利名称(译)	有机发光二极管显示装置及其驱动方法		
公开(公告)号	US20170337875A1	公开(公告)日	2017-11-23
申请号	US15/598887	申请日	2017-05-18
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	JEON CHANGHOON RHA SUNGHOON		
发明人	JEON, CHANGHOON RHA, SUNGHOON		
IPC分类号	G09G3/3258 H01L27/32 G09G3/3291 H01L27/12 H01L29/786		
CPC分类号	G09G3/3258 G09G3/3291 H01L27/3262 H01L27/3265 G09G2310/08 H01L27/1214 G09G2300/0842 G09G2320/0233 G09G2320/043 G09G2320/0257 H01L29/78648 G09G2300/0871 G09G3/3233 G09G2300/0852 G09G2300/0861 G09G2310/0262 H01L27/1225 H01L27/1255		
其他公开文献	US10366656		
外部链接	Espacenet USPTO		

摘要(译)

这里讨论的是OLED显示装置及其驱动方法。根据一个实施方案，OLED显示装置包括有机发光二极管;驱动晶体管，涉及驱动有机发光二极管，包括底栅电极，氧化物半导体层，源电极，漏电极和顶栅电极;第一开关晶体管，电连接到驱动晶体管的底栅电极，用于传输数据电压以控制驱动晶体管;存储电容器，电连接到底栅电极，用于对数据电压充电;第二开关晶体管，用于在存储电容器中存储阈值电压;补偿晶体管，直接连接到驱动晶体管的顶栅电极，以补偿驱动晶体管的阈值电压的偏差;补偿电容器，设置在驱动晶体管的源极和补偿晶体管的源极之间，并在其中存储阈值电压。

