



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
22.02.2012 Bulletin 2012/08

(51) Int Cl.:
G02F 1/1337^(2006.01) G02F 1/1333^(2006.01)

(21) Application number: **10764247.2**

(86) International application number:
PCT/JP2010/002646

(22) Date of filing: **12.04.2010**

(87) International publication number:
WO 2010/119660 (21.10.2010 Gazette 2010/42)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR

- **Mizusaki, Masanobu**
Osaka-shi Osaka 545-8522 (JP)
- **Katayama, Takashi**
Osaka-shi Osaka 545-8522 (JP)
- **Kawahira, Yuichi**
Osaka-shi Osaka 545-8522 (JP)

(30) Priority: **17.04.2009 JP 2009101273**

(71) Applicant: **Sharp Kabushiki Kaisha**
Osaka-shi, Osaka 545-8522 (JP)


(74) Representative: **Müller - Hoffmann & Partner**
Patentanwälte
Innere Wiener Strasse 17
81667 München (DE)

(72) Inventors:
• **Nakanishi, Yohei**
Osaka-shi Osaka 545-8522 (JP)

(54) **LIQUID CRYSTAL DISPLAY DEVICE**

(57) A VA-mode liquid crystal display device having a high display quality is provided. A liquid crystal display device according to the present invention includes a vertical alignment type liquid crystal layer; a first substrate and a second substrate facing each other with the liquid crystal layer interposed therebetween; a first electrode provided in the first substrate on the liquid crystal layer side and a second electrode provided in the second substrate on the liquid crystal layer side; and a first alignment film provided between the first electrode and the liquid crystal layer and a second alignment film provided between the second electrode and the liquid crystal layer. The liquid crystal display device includes a plurality of pixel areas located in a matrix. Each of the plurality of pixel areas includes a first liquid crystal domain in which a tilt direction of liquid crystal molecules at the center and in the vicinity thereof in a layer plane and in a thickness direction of the liquid crystal layer when a voltage is applied between the first electrode and the second electrode is a predetermined first direction, a second liquid crystal domain in which such a tilt direction is a predetermined second direction, a third liquid crystal domain in which such a tilt direction is a predetermined third direction and a fourth liquid crystal domain in which such a tilt direction is a predetermined fourth direction; a difference between any two among the first direction, the second direction, the third direction and the fourth direction is approximately equal to an integral multiple of 90°.

The first liquid crystal domain is close to at least a part of the edges of the first electrode, and the at least a part includes a first edge portion, wherein an azimuthal angle component of an alignment regulation force caused by an oblique electric field generated in the vicinity of the first edge portion and an azimuthal angle component of an alignment regulation force caused by the second alignment film are opposite to each other. The second substrate includes a first rib provided in an area corresponding to the first edge portion.

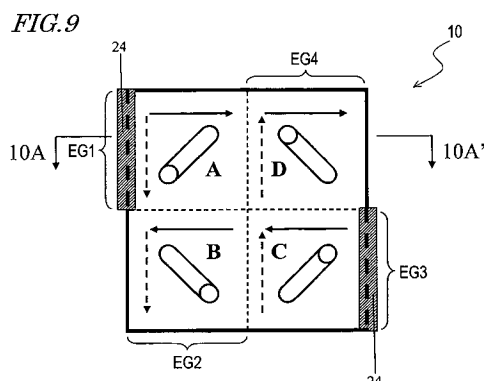

Description**TECHNICAL FIELD**

5 [0001] The present invention relates to a liquid crystal display device, and specifically a liquid crystal display device having wide viewing angle characteristics.

BACKGROUND ART

10 [0002] Liquid crystal display devices have been improved in terms of display characteristics, and are now used for TV receivers and the like more and more widely. The viewing angle characteristics of the liquid crystal display devices have been improved but are desired to be further improved. Especially, the viewing angle characteristics of liquid crystal display devices using a vertical alignment type liquid crystal layer (also referred to as the "VA-mode liquid crystal display devices") are strongly desired to be improved.

15 [0003] VA-mode liquid crystal display devices currently used for large display devices of TVs and the like adopt a multi-domain structure in which a plurality of liquid crystal domains are formed in one pixel in order to improve the viewing angle characteristics. A mainly used method for forming the multi-domain structure is an MVA mode. The MVA mode is disclosed in, for example, Patent Document 1.

20 [0004] According to the MVA mode, a pair of substrates facing each other with a vertical alignment type liquid crystal layer interposed therebetween each include an alignment regulation structure on a surface thereof on the liquid crystal layer side. Owing to such alignment regulation structures, a plurality of domains having different alignment directions (tilt directions) of liquid crystal molecules (typically, there are four types of alignment directions) are formed in each pixel area. As the alignment regulation structures, slits (openings) or ribs (protrusion structures) provided in or on electrodes

25 [0005] However, in the case where the slits or ribs are used, unlike in the case where the pretilt directions are defined by alignment films used in the conventional TN mode, the alignment regulation force on the liquid crystal molecules is nonuniform in the pixel area because the slits and ribs are linear. This causes a problem that, for example, there occurs a response speed distribution. There is another problem that since the light transmittance of an area where the slits or ribs are provided is lowered, the display luminance is decreased.

30

CITATION LIST**PATENT LITERATURE**

35 [0006] Patent Document 1: Japanese Laid-Open Patent Publication No. 11-242225

SUMMARY OF INVENTION**TECHNICAL PROBLEM**

40

[0007] In order to avoid the above-described problems, it is preferable that even in a VA-mode liquid crystal display device, the multi-domain structure is formed by defining the pretilt direction by means of alignment films. However, as a result of various studies, the present inventors found that when the multi-domain structure is formed by such a method, alignment disturbance unique to VA-mode liquid crystal display devices occurs and the display quality is lowered. Specifically, in the vicinity of an edge of a pixel electrode, an area darker than the remaining area (dark line) appears parallel to the edge, and this lowers the transmittance.

45

[0008] The present invention made in light of these problems has an object of providing a VA-mode liquid crystal display device having a high display quality.

50

SOLUTION TO PROBLEM

[0009] A liquid crystal display device according to the present invention includes a vertical alignment type liquid crystal layer; a first substrate and a second substrate facing each other with the liquid crystal layer interposed therebetween; a first electrode provided in the first substrate on the liquid crystal layer side and a second electrode provided in the second substrate on the liquid crystal layer side; and a first alignment film provided between the first electrode and the liquid crystal layer and a second alignment film provided between the second electrode and the liquid crystal layer. The liquid crystal display device includes a plurality of pixel areas located in a matrix. Each of the plurality of pixel areas includes a first liquid crystal domain in which a tilt direction of liquid crystal molecules at the center and in the vicinity

55

thereof in a layer plane and in a thickness direction of the liquid crystal layer when a voltage is applied between the first electrode and the second electrode is a predetermined first direction, a second liquid crystal domain in which such a tilt direction is a predetermined second direction, a third liquid crystal domain in which such a tilt direction is a predetermined third direction and a fourth liquid crystal domain in which such a tilt direction is a predetermined fourth direction; a difference between any two among the first direction, the second direction, the third direction and the fourth direction is approximately equal to an integral multiple of 90°; the first liquid crystal domain is close to at least a part of edges of the first electrode, and the at least a part includes a first edge portion, wherein an azimuthal angle component of an alignment regulation force caused by an oblique electric field generated in the vicinity of the first edge portion and an azimuthal angle component of an alignment regulation force caused by the second alignment film are opposite to each other; and the second substrate includes a first rib provided in an area corresponding to the first edge portion.

[0010] In a preferable embodiment, the first direction has an angle exceeding 90° with respect to an azimuthal angle direction perpendicular to the first edge portion and directed to the inside of the first electrode.

[0011] In a preferable embodiment, the first rib includes an inclining first side face, an inclining second side face located outer to the first side face, and an apex defined between the first side face and the second side face; and the first rib is located such that the apex is located outer to the first edge portion and that the first edge portion overlaps the first side face.

[0012] In a preferable embodiment, a height h (μm) of the first rib, a width w (μm) of the first rib and a thickness d (μm) of the liquid crystal layer fulfill the relationship of the following expression 1:

$$5d \cdot \exp(-0.18w) \leq h \leq 12d \cdot \exp(-0.13w) \quad \dots (1)$$

[0013] In a preferable embodiment, the height h (μm) of the first rib, the width w (μm) of the first rib and the thickness d (μm) of the liquid crystal layer fulfill the relationships of the following expressions (2), (3) and (4):

$$2 \leq d \leq 6 \quad \dots (2)$$

$$10 \leq w \leq 30 \quad \dots (3)$$

$$0.6 \leq h \leq d \quad \dots (4)$$

[0014] In a preferable embodiment, the first edge portion is generally parallel to a vertical direction of a display plane.

[0015] In a preferable embodiment, the second liquid crystal domain is close to at least a part of the edges of the first electrode, and the at least a part includes a second edge portion, wherein an azimuthal angle component of an alignment regulation force caused by an oblique electric field generated in the vicinity of the second edge portion and an azimuthal angle component of an alignment regulation force caused by the second alignment film are opposite to each other; and the second substrate includes a second rib provided in an area corresponding to the second edge portion.

[0016] In a preferable embodiment, the first direction and the second direction make an angle of about 180° with respect to each other.

[0017] In a preferable embodiment, the first edge portion and the second edge portion are generally parallel to the vertical direction of the display plane.

[0018] In a preferable embodiment, the first liquid crystal domain, the second liquid crystal domain, the third liquid crystal domain and the fourth liquid crystal domain are each adjacent to the others of the liquid crystal domains and are located in a matrix of 2 rows x 2 columns.

[0019] In a preferable embodiment, the first liquid crystal domain, the second liquid crystal domain, the third liquid crystal domain and the fourth liquid crystal domain are located such that the tilt directions in adjacent liquid crystal domains among the first through fourth liquid crystal domains are different by 90° from each other.

[0020] In a preferable embodiment, where an azimuthal angle of a horizontal direction of the display plane is 0°, the first direction is about 45°, about 135°, about 225° or about 315°.

[0021] In a preferable embodiment, the third liquid crystal domain is close to at least a part of edges of the first electrode, and the at least a part includes a third edge portion, wherein an azimuthal angle component of an alignment regulation force caused by an oblique electric field generated in the vicinity of the third edge portion and an azimuthal angle component of an alignment regulation force caused by the second alignment film are opposite to each other; the fourth liquid crystal domain is close to at least a part of edges of the first electrode, and the at least a part includes a fourth

edge portion, wherein an azimuthal angle component of an alignment regulation force caused by an oblique electric field generated in the vicinity of the fourth edge portion and an azimuthal angle component of an alignment regulation force caused by the second alignment film are opposite to each other; and the second substrate includes a third rib provided in an area corresponding to the third edge portion and a fourth rib provided in an area corresponding to the fourth edge portion.

[0022] In a preferable embodiment, the liquid crystal display device according to the present invention further includes a pair of polarizing plates facing each other with the liquid crystal layer interposed therebetween and located such that transmission axes thereof are generally perpendicular to each other. The first direction, the second direction, the third direction and the fourth direction each make an angle of about 45° with respect to the transmission axes of the pair of polarizing plates.

[0023] In a preferable embodiment, the liquid crystal layer contains the liquid crystal molecules having a negative dielectric anisotropy; and a pretilt direction defined by the first alignment film and a pretilt direction defined by the second alignment film are different by about 90° from each other.

[0024] In a preferable embodiment, a pretilt angle defined by the first alignment film and a pretilt angle defined by the second alignment film are approximately equal to each other.

[0025] In a preferable embodiment, the first alignment film and the second alignment film are each an optical alignment film.

ADVANTAGEOUS EFFECTS OF INVENTION

[0026] The present invention can improve the display quality of a VA-mode liquid crystal display device, especially the transmittance thereof. The present invention can also improve the display quality of, especially, a liquid crystal display device having a multi-domain structure formed using an alignment film.

BRIEF DESCRIPTION OF DRAWINGS

[0027]

[FIG. 1] FIG. 1 shows an example of pixel area having a multi-domain structure in a VA-mode liquid crystal display device.

[FIG. 2] FIG. 2 shows the transmittance of the pixel area shown in FIG. 1 in the presence of a voltage, found by simulations.

[FIG. 3] FIG. 3 shows a method for dividing the pixel area shown in FIG. 1; FIG. 3(a) shows the pretilt directions on the side of a TFT substrate 1, FIG. 3(b) shows the pretilt directions on the side of a CF substrate 2, and FIG. 3(c) shows the tilt directions and dark lines when a voltage is applied to a liquid crystal layer.

[FIG. 4] FIG. 4 shows another example of method for dividing the pixel area; FIG. 4(a) shows the pretilt directions on the side of the TFT substrate 1, FIG. 4(b) shows the pretilt directions on the side of the CF substrate 2, and FIG. 4(c) shows the tilt directions and dark lines when a voltage is applied to the liquid crystal layer.

[FIG. 5] FIG. 5 shows still another example of method for dividing the pixel area; FIG. 5(a) shows the pretilt directions on the side of the TFT substrate 1, FIG. 5(b) shows the pretilt directions on the side of the CF substrate 2, and FIG. 5(c) shows the tilt directions and dark lines when a voltage is applied to the liquid crystal layer.

[FIG. 6] FIG. 6 shows still another example of method for dividing the pixel area; FIG. 6(a) shows the pretilt directions on the side of the TFT substrate 1, FIG. 6(b) shows the pretilt directions on the side of the CF substrate 2, and FIG. 6(c) shows the tilt directions and dark lines when a voltage is applied to the liquid crystal layer.

[FIG. 7] FIG. 7 is a cross-sectional view showing a part of a pixel area of a VA-mode liquid crystal display device, and shows the alignment directions of liquid crystal molecules and the relative transmittance (frontal direction) which were found by simulations.

[FIG. 8] FIG. 8 is a plan view of the area shown in FIG. 7, which schematically shows the alignment of the liquid crystal molecules at the center and in the vicinity thereof in a thickness direction of a liquid crystal layer.

[FIG. 9] FIG. 9 is a plan view schematically showing one pixel area of a liquid crystal display device in a preferable embodiment according to the present invention.

[FIG. 10] FIG. 10 schematically shows the liquid crystal display device in the preferable embodiment according to the present invention and is a cross-sectional view taken along line 10A-10A' in FIG. 9.

[FIG. 11] FIG. 11 is a cross-sectional view showing a part of a pixel area of a liquid crystal display device in a preferable embodiment according to the present invention, and shows alignment directions of liquid crystal molecules and the relative transmittance (frontal direction) which were found by simulations.

[FIG. 12] FIG. 12 is a cross-sectional view showing a part of a pixel area of a liquid crystal display device in a preferable embodiment according to the present invention, and shows alignment directions of liquid crystal molecules

and the relative transmittance (frontal direction) which were found by simulations.

[FIG. 13] FIG. 13 is a cross-sectional view showing a part of a pixel area of a liquid crystal display device in a preferable embodiment according to the present invention, and shows alignment directions of liquid crystal molecules and the relative transmittance (frontal direction) which were found by simulations.

[FIG. 14] FIG. 14 is a plan view schematically showing another example of one pixel area of a liquid crystal display device in a preferable embodiment according to the present invention.

[FIG. 15] FIG. 15 is a cross-sectional view showing a part of a pixel area of a liquid crystal display device in a preferable embodiment according to the present invention, and shows alignment directions of liquid crystal molecules and the relative transmittance (frontal direction) which were found by simulations.

[FIG. 16] FIG. 16 is a cross-sectional view showing a part of a pixel area of a liquid crystal display device in a preferable embodiment according to the present invention, and shows alignment directions of liquid crystal molecules and the relative transmittance (frontal direction) which were found by simulations.

[FIG. 17] FIG. 17 shows the transmittance of the pixel area shown in FIG. 14 in the presence of a voltage, which was found by simulations.

[FIG. 18] FIG. 18 is a cross-sectional view schematically showing a liquid crystal display device in a preferable embodiment according to the present invention.

[FIG. 19] FIG. 19 is a graph showing the relationship among the rib height h , the rib width w , and the transmittance ratio T/T_0 in the case where the cell gap $d = 3.4 \mu\text{m}$.

[FIG. 20] FIG. 20 is a graph showing the relationship among the rib height h , the rib width w , and the transmittance ratio T/T_0 in the case where the cell gap $d = 3.4 \mu\text{m}$.

[FIG. 21] FIG. 21 is a graph showing the relationship among the rib height h , the rib width w , and the transmittance ratio T/T_0 in the case where the cell gap $d = 3.2 \mu\text{m}$.

[FIG. 22] FIG. 22 is a graph showing the relationship among the rib height h , the rib width w , and the transmittance ratio T/T_0 in the case where the cell gap $d = 3.2 \mu\text{m}$.

[FIG. 23] FIGS. 23(a) through (1) show examples of dividing patterns in the case where one pixel area is divided into four liquid crystal domains and the four liquid crystal domains are located in a matrix of 2 rows x 2 columns.

[FIG. 24] FIGS. 24(a) through (1) show examples of dividing patterns in the case where one pixel area is divided into four liquid crystal domains and the four liquid crystal domains are located in a matrix of 2 rows x 2 columns.

[FIG. 25] FIGS. 25(a) through (1) show examples of dividing patterns in the case where one pixel area is divided into four liquid crystal domains and the four liquid crystal domains are located in a matrix of 2 rows x 2 columns.

[FIG. 26] FIGS. 26(a) through (1) show examples of dividing patterns in the case where one pixel area is divided into four liquid crystal domains and the four liquid crystal domains are located in a matrix of 2 rows x 2 columns.

[FIG. 27] FIGS. 27(a) through (1) respectively show structures obtained by providing ribs in areas where a first type of dark line appears in the dividing patterns shown in FIG. 23(a) through (1).

[FIG. 28] FIGS. 28(a) through (1) respectively show structures obtained by providing ribs in areas where the first type of dark line appears in the dividing patterns shown in FIG. 24(a) through (1).

[FIG. 29] FIGS. 29(a) through (1) respectively show structures obtained by providing ribs in areas where the first type of dark line appears in the dividing patterns shown in FIG. 25(a) through (1).

[FIG. 30] FIGS. (a) through (1) respectively show structures obtained by providing ribs in areas where the first type of dark line appears in the dividing patterns shown in FIG. 26(a) through (1).

[FIG. 31] FIGS. 31(a) through (g) show a light irradiation method for realizing a certain dividing pattern.

[FIG. 32] FIGS. 32(a) through (g) show a light irradiation method for realizing a certain dividing pattern.

[FIG. 33] FIGS. 33(a) through (h) show examples of preferable dividing patterns.

[FIG. 34] FIGS. 34(a) through (d) show examples of more preferable dividing patterns.

DESCRIPTION OF EMBODIMENTS

[0028] According to the present invention, in a liquid crystal display device including a vertical alignment type liquid crystal layer in which the pretilt direction is defined by alignment films, a rib is provided in an area where a dark line appears. The provision of the rib suppresses the appearance of the dark line and improves the transmittance. As a result of detailed studies, the present inventors found that there are two types of dark lines: a dark line which is sufficiently suppressed by the provision of a rib, and a dark line which is not easily suppressed even by the provision of a rib. According to the present invention, a rib for suppressing the appearance of at least the former type of dark line is provided to effectively improve the transmittance. Hereinafter, embodiments of the present invention will be described. In the following description, a TFT-type liquid crystal display device will be shown as a typical example, but the present invention is applicable to any other driving method of liquid crystal display devices, needless to say.

[0029] First, main terms used in this specification will be explained.

[0030] In this specification, the term "vertical alignment type liquid crystal layer" refers to a liquid crystal layer in which

liquid crystal molecules are aligned at an angle of about 85° or greater with respect to surfaces of the vertical alignment films. The liquid crystal molecules contained in the vertical alignment type liquid crystal layer have a negative dielectric anisotropy. By a combination of the vertical alignment type liquid crystal layer and a pair of polarizing plates facing each other with the liquid crystal layer interposed therebetween and located in crossed Nicols (i.e., located such that transmission axes thereof are generally perpendicular to each other), normally black mode display is provided.

[0031] In this specification, the term "pixel" refers to the minimum unit which represents a particular gray scale level in display. In color display, a pixel corresponds to a unit representing, for example, a gray scale level of each of R, G and B, and is also referred to as a "dot". A combination of an R pixel, a G pixel and a B pixel forms one color display pixel. The term "pixel area" refers to an area of the liquid crystal display device which corresponds to the "pixel" for display.

[0032] The term "pretilt direction" refers to an alignment direction of a liquid crystal molecule defined by an alignment film and is an azimuthal angle direction in the display plane. An angle of the liquid crystal molecule with respect to the surface of the alignment film when the liquid crystal molecule is aligned in the pretilt direction is referred to as the "pretilt angle". In this specification, performing processing on the alignment film to allow the alignment film to express a capability of defining a prescribed pretilt direction is expressed as "giving a pretilt direction to the alignment film". The pretilt direction defined by the alignment film is occasionally referred to simply as the "pretilt direction of the alignment film". The pretilt direction is given to the alignment film by, for example, rubbing processing or optical alignment processing described later.

[0033] By changing the combination of the pretilt directions given by a pair of alignment films facing each other with the liquid crystal layer interposed therebetween, a 4-domain structure can be formed. A pixel area divided into four has four liquid crystal domains.

[0034] Each liquid crystal domain is characterized by the tilt direction (also referred to as the "reference alignment direction") of the liquid crystal molecules at the center or in the vicinity thereof in the layer plane and in a thickness direction of the liquid crystal layer when a voltage is applied to the liquid crystal layer. This tilt direction (reference alignment direction) has a dominant influence on the viewing angle dependence of each domain. This tilt direction is also an azimuthal angle direction. The reference based on which the azimuthal angle direction is measured is the horizontal direction of the display plane, and the counterclockwise direction is the forward direction (assuming the display plane is the face of a clock, the 3 o'clock direction is an azimuthal angle of 0° and the counterclockwise direction is the forward direction). Where the tilt directions of the four liquid crystal domains are set such that a difference between any two tilt directions among the four tilt directions is approximately equal to an integral multiple of 90° (e.g., 12 o'clock direction, 9 o'clock direction, 6 o'clock direction and 3 o'clock direction), the viewing angle characteristics are averaged and thus good display can be provided. From the viewpoint of uniformizing the viewing angle characteristics, it is preferable that the area sizes of the four liquid crystal domains in the pixel area are approximately equal to each other. Specifically, it is preferable that a difference between the area size of the largest liquid crystal domain and the area size of the smallest liquid crystal domain among the four liquid crystal domains is 25% or less of the area size of the largest liquid crystal domain.

[0035] A vertical alignment type liquid crystal layer shown as an example in the following embodiments contains liquid crystal molecules having a negative dielectric anisotropy (a nematic liquid crystal material having a negative dielectric anisotropy). The pretilt direction defined by one of the alignment films and the pretilt direction defined by the other alignment film are different by 90° from each other. A direction at the middle between these two pretilt directions is defined as the tilt direction (reference alignment direction). No chiral agent is incorporated, and when a voltage is applied to the liquid crystal layer, the liquid crystal molecules in the vicinity of the alignment films are twisted-aligned in accordance with the alignment regulation forces of the alignment films. When necessary, a chiral agent may be incorporated. A VA mode in which the liquid crystal molecules are twisted-aligned by use of a pair of vertical alignment films located such that the pretilt directions (alignment processing directions) thereof are perpendicular to each other is occasionally referred to as the "VATN (Vertical Alignment Twisted Nematic)" mode.

[0036] In the VATN mode, it is preferable that the pretilt angles respectively defined by the pair of alignment films are approximately equal to each other. When the pretilt angles are approximately equal to each other, there is an advantage that the display luminance characteristic can be improved. Especially where the difference between the pretilt angles is 1° or less, the tilt direction (reference alignment direction) of the liquid crystal molecules at the center or in the vicinity thereof of the liquid crystal layer can be controlled to be stable and thus the display luminance characteristic can be improved. A conceivable reason for this is that when the difference between the pretilt angles exceeds 1°, the tilt direction is shifted from the prescribed direction, and as a result, an area having a transmittance lower than the desired transmittance is formed.

[0037] Known methods for giving a pretilt direction to the alignment film include a method of performing rubbing processing, a method of performing optical alignment processing, a method of forming a minute structure on a layer below the alignment film in advance and reflecting the minute structure on the surface of the alignment film, a method of obliquely vapor-depositing an inorganic substance such as SiO or the like to form an alignment film having a minute structure on a surface thereof, and the like. From the viewpoint of mass productivity, rubbing processing or optical alignment processing is preferable. Especially, the optical alignment processing, which can be performed in a non-

contact manner, does not cause static electricity due to friction unlike the rubbing processing and so can improve the yield. Where an optical alignment film containing a photosensitive group is used, the variance in the pretilt angle can be controlled to be 1° or less. It is preferable that the optical alignment film contains, as the photosensitive group, at least one selected from the group consisting of 4-chalcone group, 4'-chalcone group, coumarin group and cinnamoyl group.

[0038] Now, a reason why a dark line appears in the vicinity of an edge portion of the electrode will be described.

[0039] In a liquid crystal display device including a vertical alignment type liquid crystal layer in which the pretilt directions are defined by the alignment films, when a voltage for displaying an intermediate gray scale level is applied, an area darker than the intermediate gray scale level to be displayed (dark line) may appear in an area inner to an edge portion of the pixel area, generally parallel to the edge portion, as seen from the frontal direction. In the case where the pixel area is divided into domains, when any of edges of the pixel electrode which are close to the liquid crystal domains has such an edge portion that an azimuthal angle direction perpendicular to the edge portion and directed to the inside of the pixel electrode has an angle exceeding 90° with respect to the tilt direction (reference alignment direction) of the corresponding liquid crystal domain, a dark line appears inner to, and parallel to, this edge portion. This is conceived to occur because the tilt direction of the liquid crystal domain and the direction of the alignment regulation force caused by the oblique electric field generated at the edge of the pixel electrode have components facing each other, and so the alignment of the liquid crystal molecules is disturbed in this area.

[0040] A pixel area **10** shown in FIG. 1 having a 4-domain structure will be described. The pixel area **10** shown in FIG. 1 is generally square in correspondence to the generally square pixel electrode for simplifying the explanation, but the present invention is not limited to such a shape of the pixel area. The pixel area **10** may be generally rectangular.

[0041] The pixel area **10** includes four liquid crystal domains **A**, **B**, **C** and **D**. The tilt directions (reference alignment directions) of the liquid crystal domains **A**, **B**, **C** and **D** are respectively represented as **t1**, **t2**, **t3** and **t4**. A difference between any two among these four directions is approximately equal to an integral multiple of 90°. In FIG. 1, the liquid crystal domains **A**, **B**, **C** and **D** have an equal area size to each other. The example shown in FIG. 1 is the most preferable 4-domain structure from the viewpoint of the viewing angle characteristics. The four liquid crystal domains **A**, **B**, **C** and **D** are located in a matrix of 2 rows x 2 columns.

[0042] The pixel electrode has four edges (sides) **SD1**, **SD2**, **SD3** and **SD4**. The oblique electric fields generated when a voltage is applied each exhibit an alignment regulation force having a component of a direction (azimuthal angle direction) perpendicular to the respective side and directed to the inside of the pixel electrode. In FIG. 1, the azimuthal angle directions respectively perpendicular to the four edges **SD1**, **SD2**, **SD3** and **SD4** and directed to the inside of the pixel electrode are represented by arrows **e1**, **e2**, **e3** and **e4**.

[0043] Each of the four liquid crystal domains **A**, **B**, **C** and **D** is close to two among the four edges **SD1**, **SD2**, **SD3** and **SD4** of the pixel electrode, and in the presence of a voltage, receives alignment regulation forces caused by the oblique electric fields generated along the respective edges.

[0044] Regarding an edge portion **EG1** at one of the edges of the pixel electrode close to the liquid crystal domain **A**, the azimuthal angle direction **e1** perpendicular to the edge portion **EG1** and directed to the inside of the pixel electrode makes an angle exceeding 90° with respect to the tilt direction **t1** of the liquid crystal domain **A**. Therefore, alignment disturbance occurs. As a result, in the liquid crystal domain **A**, a dark line **DL1** appears parallel to the edge portion **EG1** when a voltage is applied. A pair of polarizing plates facing each other with the liquid crystal layer interposed therebetween are located such that transmission axes (polarization axes) thereof are perpendicular to each other. More specifically, the polarizing plates are located such that one of the transmission axes is parallel to the horizontal direction of the display plane, and the other transmission axis is parallel to the vertical direction to the display plane. Hereinafter, unless otherwise specified, the polarization axes of polarizing plates are located in this manner.

[0045] Similarly, regarding an edge portion **EG2** at one of the edges of the pixel electrode close to the liquid crystal domain **B**, the azimuthal angle direction **e2** perpendicular to the edge portion **EG2** and directed to the inside of the pixel electrode makes an angle exceeding 90° with respect to the tilt direction **t2** of the liquid crystal domain **B**. Therefore, alignment disturbance occurs. As a result, in the liquid crystal domain **B**, a dark line **DL2** appears parallel to the edge portion **EG2** when a voltage is applied.

[0046] Similarly, regarding an edge portion **EG3** at one of the edges of the pixel electrode close to the liquid crystal domain **C**, the azimuthal angle direction **e3** perpendicular to the edge portion **EG3** and directed to the inside of the pixel electrode makes an angle exceeding 90° with respect to the tilt direction **t3** of the liquid crystal domain **C**. Therefore, alignment disturbance occurs. As a result, in the liquid crystal domain **C**, a dark line **DL3** appears parallel to the edge portion **EG3** when a voltage is applied.

[0047] Similarly, regarding an edge portion **EG4** at one of the edges of the pixel electrode close to the liquid crystal domain **D**, the azimuthal angle direction **e4** perpendicular to the edge portion **EG4** and directed to the inside of the pixel electrode makes an angle exceeding 90° with respect to the tilt direction **t4** of the liquid crystal domain **D**. Therefore, alignment disturbance occurs. As a result, in the liquid crystal domain **D**, a dark line **DL4** appears parallel to the edge portion **EG4** when a voltage is applied.

[0048] Where the azimuthal angle of the horizontal direction of the display plane (3 o'clock direction) is 0°, the tilt

direction **t1** of the liquid crystal domain **A** is a direction of about 225°, the tilt direction **t2** of the liquid crystal domain **B** is a direction of about 315°, the tilt direction **t3** of the liquid crystal domain **C** is a direction of about 45°, and tilt direction **t4** of the liquid crystal domain **D** is a direction of about 135°. Namely, the liquid crystal domains **A**, **B**, **C** and **D** are located such that the tilt directions thereof are different by about 90° between adjacent domains among the liquid crystal domains **A** through **D**. The angles made between the tilt directions **t1**, **t2**, **t3** and **t4** of the liquid crystal domains **A**, **B**, **C** and **D** and the azimuthal angle components **e1**, **e2**, **e3** and **e4** of the alignment regulation forces caused by the oblique electric fields generated in the edge portions **EG1**, **EG2**, **EG3** and **EG4** close to the liquid crystal domains **A**, **B**, **C** and **D**, respectively, are all about 135°.

[0049] The dark lines **DL1**, **DL2**, **DL3** and **DL4** appearing in the pixel area **10** parallel to the edge portions **EG1**, **EG2**, **EG3** and **EG4** respectively as described above lower the transmittance. FIG. 2 shows the transmittance of the pixel area **10** in the presence of a voltage found by simulations. It is understood from FIG. 2 that the dark lines **DL1**, **DL2**, **DL3** and **DL4** appear in the liquid crystal domains **A**, **B**, **C** and **D** and thus lower the transmittance.

[0050] Now, with reference to FIG. 3, a method for dividing a pixel area to form domains will be described. FIGS. 3(a), (b) and (c) illustrate a method for dividing the pixel area **10** shown in FIG. 1. FIG. 3(a) shows pretilt directions **PA1** and **PA2** of an alignment film provided on a TFT substrate (lower substrate), and FIG. 3(b) shows pretilt directions **PB1** and **PB2** of an alignment film provided on a color filter (CF) substrate (upper substrate). FIG. 3(c) shows the tilt directions and the dark lines **DL1** through **DL4** when a voltage is applied to the liquid crystal layer. These figures schematically show the alignment directions of the liquid crystal molecules as seen from the observer. A liquid crystal molecule is tilted such that an end (elliptical area) of the liquid crystal molecule shown as having a cylindrical shape is closer to the observer.

[0051] As shown in FIG. 3(a), an area on the TFT substrate side (area corresponding to one pixel area **10**) is divided into two, namely, a left area and a right area, and the vertical alignment film is alignment-processed such that the pretilt directions **PA1** and **PA2** antiparallel to each other are given to the respective areas (left area and right area) of the vertical alignment film. In this example, optical alignment processing is performed by ultraviolet rays directed obliquely in the direction represented by the arrow.

[0052] As shown in FIG. 3(b), an area on the CF substrate side (area corresponding to one pixel area **10**) is divided into two, namely, a top area and a bottom area, and the vertical alignment film is alignment-processed such that the pretilt directions **PB1** and **PB2** antiparallel to each other are given to the respective areas (top area and bottom area) of the vertical alignment film. In this example, optical alignment processing is performed by ultraviolet rays directed obliquely in the direction represented by the arrow.

[0053] By bringing together the TFT substrate and the CF substrate alignment-processed as shown in FIGS. 3(a) and (b), the pixel area **10** divided to have domains as shown in FIG. 3(c) can be formed. As can be seen from FIG. 3(c), in each of the liquid crystal domains **A**, **B**, **C** and **D**, the pretilt direction of the alignment film on the TFT substrate and the pretilt direction of the alignment film on the CF substrate are different by 90° from each other, and a direction at the middle of these two pretilt directions is defined as the tilt direction (reference alignment direction).

[0054] As described above with reference to FIG. 1, the dark line **DL1** appears in the liquid crystal domain **A** parallel to the edge portion **EG1**, and the dark line **DL2** appears in the liquid crystal domain **B** parallel to the edge portion **EG2**. The dark line **DL3** appears in the liquid crystal domain **C** parallel to the edge portion **EG3**, and the dark line **DL4** appears in the liquid crystal domain **D** parallel to the edge portion **EG4**. The dark line **DL1** and the dark line **DL3** are generally parallel to the vertical direction of the display plane, and the dark line **DL2** and the dark line **DL4** are generally parallel to the horizontal direction of the display plane. Namely, the edge portion **EG1** and the edge portion **EG3** are generally parallel to the vertical direction of the display plane, and the edge portion **EG2** and the edge portion **EG4** are generally parallel to the horizontal direction of the display plane.

[0055] The method for dividing one pixel into four liquid crystal domains **A** through **D** (locations of the liquid crystal domains **A** through **D** in the pixel area) is not limited to the example shown in FIG. 3.

[0056] For example, by bringing together the TFT substrate and the CF substrate alignment-processed as shown in FIGS. 4(a) and (b), a pixel area **20** divided to have domains as shown in FIG. 4(c) can be formed. Like the pixel area **10**, the pixel area **20** includes four liquid crystal domains **A** through **D**. The tilt directions of the liquid crystal domains **A** through **D** are the same as those of the liquid crystal domains **A** through **D** in the pixel area **10**.

[0057] It should be noted that in the pixel area **10**, the liquid crystal domains **A** through **D** are located in the order of top left, bottom left, bottom right and top right (i.e., counterclockwise from top left); whereas in the pixel area **20**, the liquid crystal domains **A** through **D** are located in the order of bottom right, top right, top left and bottom left (i.e., counterclockwise from bottom right). A reason for this is that the pretilt directions of the left area and the right area on the TFT substrate side are opposite, and the pretilt directions of the top area and the bottom area on the CF substrate side are opposite, between the pixel area **10** and the pixel area **20**. The dark lines **DL1** and **DL3** appearing in the liquid crystal domains **A** and **C** are generally parallel to the horizontal direction of the display plane, and the dark lines **DL2** and **DL4** appearing in the liquid crystal domains **B** and **D** are generally parallel to the vertical direction of the display plane. Namely, the edge portions **EG1** and **EG3** are generally parallel to the horizontal direction of the display plane, and the edge portions **EG2** and **EG4** are generally parallel to the vertical direction of the display plane.

[0058] By bringing together the TFT substrate and the CF substrate alignment-processed as shown in FIGS. 5(a) and (b), a pixel area **30** divided to have domains as shown in FIG. 5(c) can be formed. Like the pixel area **10**, the pixel area **30** includes four liquid crystal domains **A** through **D**. The tilt directions of the liquid crystal domains **A** through **D** are the same as those of the liquid crystal domains **A** through **D** in the pixel area **10**.

[0059] It should be noted that in the pixel area **30**, the liquid crystal domains **A** through **D** are located in the order of top right, bottom right, bottom left and top left (i.e., clockwise from top right). A reason for this is that the pretilt directions of the left area and the right area on the TFT substrate side are opposite between the pixel area **10** and the pixel area **30**.

[0060] In the pixel area **30**, no dark line appears in the liquid crystal domains **A** and **C**. A reason for this is that any of the edges of the pixel electrode close to the liquid crystal domains **A** and **C** does not have such an edge portion that the azimuthal angle direction perpendicular to the edge portion and directed to the inside of the pixel electrode has an angle exceeding 90° with respect to the corresponding tilt direction. By contrast, the dark lines **DL2** and **DL4** appear in the liquid crystal domains **B** and **D**. A reason for this is that each of the edges of the pixel electrode close to the liquid crystal domains **B** and **D** has such an edge portion that the azimuthal angle direction perpendicular to the edge portion and directed to the inside of the pixel electrode has an angle exceeding 90° with respect to the corresponding tilt direction. The dark lines **DL2** and **DL4** respectively include portions **DL2(H)** and **DL4(H)** parallel to the horizontal direction and portions **DL2(V)** and **DL4(V)** parallel to the vertical direction. A reason for this is that the tilt direction of each of the liquid crystal domains **B** and **D** has an angle exceeding 90° with respect to both of an azimuthal angle direction perpendicular to the horizontal edge and directed to the inside of the pixel electrode and an azimuthal angle direction perpendicular to the vertical edge and directed to the inside of the pixel electrode.

[0061] By bringing together the TFT substrate and the CF substrate alignment-processed as shown in FIGS. 6(a) and (b), a pixel area **40** divided to have domains as shown in FIG. 6(c) can be formed. Like the pixel area **10**, the pixel area **40** includes four liquid crystal domains **A** through **D**. The tilt directions of the liquid crystal domains **A** through **D** are the same as those of the liquid crystal domains **A** through **D** in the pixel area **10**.

[0062] It should be noted that in the pixel area **40**, the liquid crystal domains **A** through **D** are located in the order of bottom left, top left, top right and bottom right (i.e., clockwise from bottom left). A reason for this is that the pretilt directions of the top area and the bottom area on the CF substrate side are opposite between the pixel area **10** and the pixel area **40**.

[0063] In the pixel area **40**, no dark line appears in the liquid crystal domains **B** and **D**. A reason for this is that any of the edges of the pixel electrode close to the liquid crystal domains **B** and **D** does not have such an edge portion that the azimuthal angle direction perpendicular to the edge portion and directed to the inside of the pixel electrode has an angle exceeding 90° with respect to the corresponding tilt direction. By contrast, the dark lines **DL1** and **DL3** appear in the liquid crystal domains **A** and **C**. A reason for this is that each of the edges of the pixel electrode close to the liquid crystal domains **A** and **C** has such an edge portion that the azimuthal angle direction perpendicular to the edge portion and directed to the inside of the pixel electrode has an angle exceeding 90° with respect to the corresponding tilt direction. The dark lines **DL1** and **DL3** respectively include portions **DL1(H)** and **DL3(H)** parallel to the horizontal direction and portions **DL1(V)** and **DL3(V)** parallel to the vertical direction. A reason for this is that the tilt direction of each of the liquid crystal domains **A** and **C** has an angle exceeding 90° with respect to both of an azimuthal angle direction perpendicular to the horizontal edge and directed to the inside of the pixel electrode and an azimuthal angle direction perpendicular to the vertical edge and directed to the inside of the pixel electrode.

[0064] FIG. 7 is a cross-sectional view showing a part of a pixel area, and shows the alignment directions of the liquid crystal molecules and the relative transmittance (frontal direction) which were found by simulations. FIG. 7 shows, as elements of a liquid crystal display device, a TFT substrate **1** including a transparent plate (e.g., glass plate) **1a** and a pixel electrode **11** formed on the transparent plate **1a**, a CF substrate **2** including a transparent plate (e.g., glass plate) **2a** and a counter electrode **2a** formed on the transparent plate **2a**, a vertical alignment type liquid crystal layer **3** provided between the TFT substrate **1** and the CF substrate **2**, and liquid crystal molecules **3a** contained in the liquid crystal layer **3**.

[0065] FIG. 7 corresponds to, for example, a cross-sectional view of the left half of the liquid crystal domain **A** shown in FIG. 3(c) taken along a line having an azimuthal angle of 0°. On surfaces of the TFT substrate **1** and the CF substrate **2** on the liquid crystal layer **3** side, a pair of vertical alignment films (not shown) are provided. The pair of vertical alignment films are respectively alignment-processed as shown in FIGS. 3(a) and (b). Therefore, as in an area **R1** enclosed by the dashed line in FIG. 7, the liquid crystal molecules **3a** at the center and in vicinity thereof of the liquid crystal domain **A** (at the center and in vicinity thereof in the layer plane and in the thickness direction) obliquely fall such that a lower end thereof is right and away from the observer of the figure and an upper end thereof is left and directed toward the observer of the figure. The tilt direction thereof is an azimuthal angle of about 225°.

[0066] Regarding the edge portion **EG1** of the pixel electrode **11** shown in FIG. 7, it is seen that a liquid crystal molecules **3a**, which should be tilted at a direction of 135°, are twisted as being closer to the edge portion **EG1** of the pixel electrode **11** by the influence of the alignment regulation force (acting so as to cause the liquid crystal molecules **3a** to fall in the azimuthal angle direction of 0°) caused by the oblique electric field generated in the edge portion **EG1**. In this example, the twisting angle is 135°, which exceeds 90°. Therefore, due to a change of the retardation of the liquid crystal layer **3** in this twist area, the relative transmittance is changed in a complicated manner as shown in this figure,

and a portion having the minimum relative transmittance is formed in the pixel area **10** (inner to the edge of the pixel electrode **11**). This portion is in an area **R2** enclosed by the dashed line in FIG. 7, and corresponds to the dark line **DL1** in the liquid crystal domain **A** in FIG. 3(c).

[0067] FIG. 8 is a top view of the area shown in FIG. 7, schematically showing the alignment of the liquid crystal molecules **3a** at the center and in the vicinity thereof in the thickness direction of the liquid crystal layer **3**. As can be seen from FIG. 8, at the center and in the vicinity thereof of the liquid crystal domain **A**, the liquid crystal molecules **3a** fall in the desired tilt direction, namely, in a direction of about 135°. By contrast, on the edge portion **EG1** of the pixel electrode **11**, the liquid crystal molecule **3a** falls in a direction perpendicular to the edge portion **EG1** and directed to the center of the pixel area **10**, namely, in a direction of about 0°, by the alignment regulation force of the oblique electric field. Accordingly, the liquid crystal molecules **3a** located between these areas fall such that the change of the alignment direction of the liquid crystal molecules **3a** is continuous between the center and the vicinity thereof of the liquid crystal domain **A** and the edge portion **EG1** of the pixel electrode **11**. As a result, as shown in FIG. 8, there is a liquid crystal molecule **3a** falling in a direction of about 270° (toward the observer of FIG. 7) inner to the edge portion **EG1**. Such an alignment direction of the liquid crystal molecules **3a** is parallel to, or perpendicular to, the transmission axes of the pair of polarizing plates. Therefore, the area in which the liquid crystal molecules **3a** are aligned in this manner (area **R2** enclosed by the dashed line in FIG. 8) does not give any retardation to light passing the liquid crystal layer **3** almost at all, namely, appears as the dark line **DL1**.

[0068] In the above, a condition under which the dark line appears is described as that the azimuthal angle direction perpendicular to the edge portion of the pixel electrode and directed to the inside of the pixel electrode has an angle exceeding 90° with respect to the tilt direction (reference alignment direction) of the corresponding liquid crystal domain. More precisely, there are two conditions under which a dark line appears. Namely, there are two types of dark lines which appear under different conditions. The "first type" of dark line appears in the vicinity of such an edge portion that the azimuthal angle component of the alignment regulation force caused by the oblique electric field generated in the vicinity of the edge portion and the azimuthal angle component of the alignment regulation force caused by the alignment film on the CF substrate are opposite to each other. By contrast, the "second type" of dark line appears in the vicinity of such an edge portion that the azimuthal angle component of the alignment regulation force caused by the oblique electric field generated in the vicinity of the edge portion and the azimuthal angle component of the alignment regulation force caused by the alignment film on the TFT substrate are opposite to each other.

[0069] For example, in the pixel area **10** shown in FIG. 3(c), the dark lines **DL1** and **DL3** are the first type of dark lines, and the dark lines **DL2** and **DL4** are the second type of dark lines. In the pixel area **20** shown in FIG. 4(c), the dark lines **DL2** and **DL4** are the first type of dark lines, and the dark lines **DL1** and **DL3** are the second type of dark lines. In the pixel area **30** shown in FIG. 5(c), the portions **DL2(V)** and **DL4(V)**, parallel to the vertical direction, of the dark lines **DL2** and **DL4** are the first type of dark lines, and the portions **DL2(H)** and **DL4(H)**, parallel to the horizontal direction, of the dark lines **DL2** and **DL4** are the second type of dark lines. In the pixel area **40** shown in FIG. 6(c) the portions **DL1(V)** and **DL3(V)**, parallel to the vertical direction, of the dark lines **DL1** and **DL3** are the first type of dark lines, and the portions **DL1(H)** and **DL1(H)**, parallel to the horizontal direction, of the dark lines **DL1** and **DL1** are the second type of dark lines.

[0070] Now, with reference to FIG. 9 and FIG. 10, a specific structure of a liquid crystal display device **100** in this embodiment will be described. FIG. 9 is a plan view schematically showing one pixel area **10** of the liquid crystal display device **100**, and FIG. 10 is a cross-sectional view taken along line **10A-10A'** in FIG. 9.

[0071] As shown in FIG. 10, the liquid crystal display device **100** includes a vertical alignment type liquid crystal layer **3**, and a TFT substrate (also referred to as the "active matrix substrate" occasionally) **1** and a CF substrate (also referred to as the "counter substrate" occasionally) **2** facing each other with the liquid crystal layer **3** interposed therebetween, a pixel electrode **11** included in the TFT substrate **1** on the liquid crystal layer **3** side, and a counter electrode **21** included in the CF substrate **2** on the liquid crystal layer **3** side.

[0072] The liquid crystal layer **3** contains liquid crystal molecules having a negative dielectric anisotropy. The pixel electrode **11** is provided on a transparent plate (e.g., glass plate) **1a**, and the counter electrode **21** is provided on a transparent plate (e.g., glass plate) **2a**.

[0073] A first alignment film **12** is provided between the pixel electrode **11** and the liquid crystal layer **3**, and a second alignment film **22** is provided between the counter electrode **21** and the liquid crystal layer **3**. A pair of polarizing plates **13** and **23** are provided so as to face each other with the liquid crystal layer **3** interposed therebetween. The pair of polarizing plates **13** and **23** are located such that transmission axes (polarization axes) thereof are generally perpendicular to each other.

[0074] The liquid crystal display device **100** includes a plurality of pixel areas **10** located in a matrix. As shown in FIG. 9, each pixel area **10** is divided into domains like the pixel area **10** shown in FIG. 3(c). Namely, the pixel area **10** includes four liquid crystal domains **A** through **D** respectively having tilt directions of about 225°, about 315°, about 45° and about 135° when a voltage is applied between the pixel electrode **11** and the counter electrode **21**. The transmission axis of one of the pair of polarizing plates **13** and **23** is generally parallel to the horizontal direction of the display plane, and the

transmission axis of the other polarizing plate is generally parallel to the vertical direction of the display plane. Accordingly, the tilt directions of the liquid crystal domains **A** through **D** each have an angle of about 45° with respect to the transmission axes of the polarizing plates **13** and **23**.

[0075] In FIG. 9, in areas corresponding to the liquid crystal domains **A** through **D**, the pretilt directions of the first alignment film **12** are represented by the dashed line arrows, and the pretilt directions of the second alignment film **22** are represented by the solid line arrows. These arrows representing the pretilt directions show that the liquid crystal molecules are pretilted such that the end on the arrow tip side is farther from the substrate (substrate on which the respective alignment film is provided) than the end on the opposite side. In the area corresponding to each of the liquid crystal domains **A** through **D**, the pretilt direction of the first alignment film **12** and the pretilt direction of the second alignment film **22** are different by about 90° from each other. It is preferable that the pretilt angle defined by the first alignment film **12** and the pretilt angle defined by the second alignment film **22** are approximately equal to each other as described above.

[0076] In the liquid crystal display device **100** in this embodiment, as shown in FIG. 9 and FIG. 10, the CF substrate **2** includes ribs **24** (protrusions) provided in areas corresponding to the edge portions **EG1** and **EG3**. As shown in FIG. 10, each rib **24** includes two side faces **24a** and **24b** inclining with respect to the surface of the plate **2a** and an apex (ridgeline) **24c** defined between the side faces **24a** and **24b**, and extends generally parallel to the edge portions **EG1** and **EG3**. Hereinafter, the side face **24a** located at a relatively inner position will be also referred to as the "inner side face", and the side face **24b** located at a relatively outer position will be also referred to as the "outer side face".

[0077] The rib **24** exhibits an alignment regulation force of aligning the liquid crystal molecules generally vertically to the side surfaces **24a** and **24b**, namely, an alignment regulation force of causing the liquid crystal molecules to fall in a direction generally perpendicular to the direction in which the rib **24** extends. For example, the inner side face **24a** of the rib **24** shown in FIG. 10 (rib provided in an area corresponding to the edge portion **EG1**) acts to cause the liquid crystal molecules in the vicinity thereof to fall counterclockwise in FIG. 10, and the outer side face **24b** acts to cause the liquid crystal molecules in the vicinity thereof to fall clockwise in FIG. 10.

[0078] As described above with reference to FIG. 1, according to the multi-domain structure in the pixel area **10**, the tilt direction of the liquid crystal domain **A** has an angle exceeding 90° with respect to the azimuthal angle direction perpendicular to the edge portion **EG1** and directed to the inside of the pixel electrode **11** (direction **e1** in FIG. 1). The tilt direction of the liquid crystal domain **C** has an angle exceeding 90° with respect to the azimuthal angle direction perpendicular to the edge portion **EG3** and directed to the inside of the pixel electrode **11** (direction **e3** in FIG. 1). Therefore, in the vicinity of the edge portions **EG1** and **EG3**, the dark line would appear if no measure was taken.

[0079] The azimuthal angle component of the alignment regulation force caused by the oblique electric field generated in the vicinity of the edge portion **EG1** (direction **e1** in FIG. 1) and the azimuthal angle component of the alignment regulation force caused by the second alignment film **22** in the area corresponding to the liquid crystal domain **A** are opposite to each other. It should be noted that the azimuthal angle component of the alignment regulation force caused by the second alignment film **22** can be represented by an arrow opposite to the pretilt directions of the second alignment film **22** represented by the solid line arrows in FIG. 9 (by contrast, the azimuthal angle component of the alignment regulation force caused by the first alignment film **12** can be represented by an arrow in the same direction as the pretilt directions of the first alignment film **12** represented by the dashed line arrows in FIG. 9). Accordingly, as long as the azimuthal angle direction perpendicular to the edge portion and directed to the inside of the pixel electrode **11** and the pretilt direction of the second alignment film **22** are the same as each other, it can be considered that the azimuthal angle component of the alignment regulation force caused by the oblique electric field and the azimuthal angle component of the alignment regulation force caused by the second alignment film **22** are opposite to each other. Like in the vicinity of the edge portion **EG1**, the azimuthal angle component of the alignment regulation force caused by the oblique electric field generated in the vicinity of the edge portion **EG3** (direction **e3** in FIG. 1) and the azimuthal angle component of the alignment regulation force caused by the second alignment film **22** in the area corresponding to the liquid crystal domain **C** are opposite to each other. Therefore, in the vicinity of the edge portions **EG1** and **EG3**, the first type of dark line would appear if no measure was taken.

[0080] In the liquid crystal display device **100** in this embodiment, the CF substrate **2** includes the ribs **24** in areas in which the first type of dark line would appear if no measure was taken. The alignment regulation force of the inner side face **24a** of the rib **24** has an azimuthal angle component in the same direction as the azimuthal angle component of the alignment regulation force caused by the second alignment film **22**. Namely, the inner side face **24a** of the rib **24** exhibits an alignment regulation force matching the alignment regulation force caused by the second alignment film **22**. Therefore, in the liquid crystal display device **100** in this embodiment, in the areas in which the first type of dark line would appear if no measure was taken, the alignment regulation force exerted on the liquid crystal layer **3** from the CF substrate **2** side can be strengthened. Hence, the appearance of the dark line (first type of dark line) can be suppressed.

[0081] FIG. 11 shows the alignment directions of the liquid crystal molecules **3a** and the relative transmittance (frontal direction) which were found by simulations performed on the pixel area **10** in the liquid crystal display device **100**. FIG. 11 corresponds to a cross-sectional view of the left half of the liquid crystal domain **A** taken along a line having an

azimuthal angle of 0° .

[0082] As can be seen from FIG. 11, in the case where the CF substrate 2 includes a rib 24, as compared with the case where the CF substrate 2 includes no rib 24 (see FIG. 7), the area R2 in which the liquid crystal molecules 3a fall toward the observer of the figure in the vicinity of the edge portion EG1 (i.e., the liquid crystal molecules 3a are aligned in a direction parallel to, or perpendicular to, the transmission axis) is moved outward and is located approximately on the edge portion EG1. In addition, the width of such an area R2 is narrow. Accordingly, in a curve representing the relative transmittance (top of FIG. 11), a portion representing the minimum value is moved outward as compared with in FIG. 7, and the width of a portion in which the relative transmittance is dropped (lowered) is narrow. As described above, in the liquid crystal display device 100, the dark line is expelled outward and narrowed. Thus, the appearance of the dark line in the pixel area 10 is substantially prevented. Therefore, the transmittance is improved and so the display quality is improved.

[0083] As described above, the rib 24 provides an effect of suppressing the appearance of the dark line owing to the alignment regulation force of the inner side face 24a. Therefore, it is preferable that the rib 24 is located such that at least a part of the inner side face 24a overlaps the pixel electrode 11 in order to sufficiently exert the alignment regulation force of the inner side face 24a on the liquid crystal molecules in the vicinity of the edge portion. FIG. 12 shows the alignment directions of the liquid crystal molecules 3a and the relative transmittance (frontal direction) which were found by simulations performed on the case where the rib 24 is located such that the inner side face 24a does not overlap the pixel electrode 11 (such that the inner end of the rib 24 is located on the edge portion EG1). As can be seen from a comparison between FIG. 12 and FIG. 11, unless the inner side face 24a overlaps the pixel electrode 11, the area R2 in which the liquid crystal molecules 3a fall toward the observer of the figure (portion in which the relative transmittance has the minimum value) cannot be moved outward sufficiently. Therefore, the dark line cannot be expelled outward sufficiently, and so the effect of suppressing the appearance of the dark line is decreased. As can be seen from this, it is preferable that the rib 24 is located such that at least a part of the inner side face 24a overlaps the pixel electrode 11.

[0084] Nonetheless, it is not necessary that the inner side face 24a of the rib 24 excessively overlaps the pixel electrode 11. FIG. 13 shows the alignment directions of the liquid crystal molecules 3a and the relative transmittance (frontal direction) which were found by simulations performed on the case where the rib 24 is located such that the inner side face 24a entirely overlaps the pixel electrode 11 (such that the apex 24c of the rib 24 is located on the edge portion EG1). In this case, as shown in FIG. 13, the area R2 in which the liquid crystal molecules 3a fall toward the observer of the figure (portion in which the relative transmittance has the minimum value) can be moved outward sufficiently, and the width of the area R2 (width of the portion in which the relative transmittance is dropped) is narrow. Therefore, the dark line can be made sufficiently thin and expelled outward sufficiently. However, as can be seen from a comparison between FIG. 13 and FIG. 11, in the case of FIG. 13, there is an area in which the transmittance is slightly lowered inner to the area R2. A reason for this is that in the area having the rib 24, the liquid crystal layer 3 is made thinner by the height of the rib 24 and so the retardation given to light by the liquid crystal layer 3 is decreased. Another reason for this is that the pretilt angle of the liquid crystal molecules 3a in the vicinity of the rib 24 is different from the pretilt angle of the liquid crystal molecules 3a on the second alignment film 22 in an area in which the rib 24 is not provided.

[0085] As understood from the above description made with reference to FIG. 12 and FIG. 13, it is preferable that the rib 24 is located such that the inner side face 24a partially overlaps the pixel electrode 11. In other words, it is preferable that the rib 24 is located as shown in FIG. 11 such that the apex 24c is located outer to the edge portion of the pixel electrode 11 and that the edge portion of the pixel electrode 11 overlaps the inner side face 24a. According to the studies of the present inventors, the overlapping width of the inner side face 24a of the rib 24 and the pixel electrode 11 is preferably $0\ \mu\text{m}$ or greater from the viewpoint of sufficiently increasing the effect of suppressing the appearance of the dark line, and is preferably $10\ \mu\text{m}$ or less from the viewpoint of suppressing the reduction of the transmittance caused by the excessive overlap of the rib 24 and the pixel electrode 11. In consideration of these two viewpoints, it is most preferable that the overlapping width of the inner side face 24a of the rib 24 and the pixel electrode 11 is about $5\ \mu\text{m}$ (more specifically, $2.5\ \mu\text{m}$ or greater and $7.5\ \mu\text{m}$ or less).

[0086] In the above, structures in which the rib 24 is provided in an area where the first type of dark line would appear. The rib 24 may be provided also in an area where the second type of dark line is would appear. FIG. 14 shows a structure in which the rib 24 is provided in the areas where the first type of dark line would appear and the areas where the second type of dark line would appear.

[0087] In the structure shown in FIG. 14, the ribs 24 are provided in the areas corresponding to the edge portions EG1 and EG3 and also in the areas corresponding to the edge portions EG2 and EG4. The azimuthal angle component of the alignment regulation force caused by the oblique electric field generated in the vicinity of the edge portion EG2 (direction e2 in FIG. 1) and the azimuthal angle component of the alignment regulation force caused by the first alignment film 12 in the area corresponding to the liquid crystal domain B are opposite to each other. As described above, the azimuthal angle component of the alignment regulation force caused by the first alignment film 12 can be represented by an arrow in the same direction as the pretilt directions of the first alignment film 12 represented by the dashed line arrows in FIG. 9. Like in the vicinity of the edge portion EG2, the azimuthal angle direction of the alignment regulation

force caused by the oblique electric field generated in the vicinity of the edge portion **EG4** (direction **e4** in FIG. 1) and the azimuthal angle direction of the alignment regulation force caused by the first alignment film **12** in the area corresponding to the liquid crystal domain **D** are opposite to each other. Therefore, in the vicinity of the edge portions **EG2** and **EG4**, the second type of dark line would appear if no measure was taken.

[0088] FIG. 15 and FIG. 16 show the alignment directions of the liquid crystal molecules **3a** and the relative transmittance (frontal direction) which were found by simulations respectively performed on the case where the rib **24** is provided in the area corresponding to the edge portion **EG2**, and on the case where the rib **24** is not provided in such an area. FIG. 15 corresponds to a cross-sectional view of the bottom half of the liquid crystal domain **B** in FIG. 9 taken along a line having an azimuthal angle of 90°. FIG. 16 corresponds to a cross-sectional view of the bottom half of the liquid crystal domain **B** in FIG. 14 taken along a line having an azimuthal angle of 90°.

[0089] As can be seen from a comparison between FIG. 15 and FIG. 16, even where the rib **24** is provided in the area corresponding to the edge portion **EG2**, the area **R2** in which the liquid crystal molecules **3a** fall toward the observer of the figure is not moved outward almost at all. The width of the area **R2** is not narrowed almost at all. Accordingly, in a curve representing the relative transmittance, a portion representing the minimum value is not moved outward almost at all, and the width of a portion in which the relative transmittance is dropped (lowered) is not narrowed almost at all. A reason for this is that in the area in which the second type of dark line appears, the azimuthal angle component of the alignment regulation force of the inner side face **24a** of the rib **24** and the azimuthal angle component caused by the second alignment film **22** are not the same as each other (different by about 90° from each other), and therefore, even where the rib **24** is provided, the alignment regulation force exerted on the liquid crystal layer **3** from the CF substrate **2** is not strengthened.

[0090] FIG. 17 shows the transmittance of the pixel area **10** shown in FIG. 14 in the presence of a voltage, which was found by simulations. It is understood from FIG. 17 that no dark line appears in the liquid crystal domains **A** and **C** (top left and bottom right liquid crystal domains in the figure), whereas the dark lines **DL2** and **DL4** appear in the liquid crystal domains **B** and **D** (bottom left and top right liquid crystal domains in the figure).

[0091] As described above, even where the rib **24** is provided in the area where the second type of dark line appears, the effect of suppressing the dark line is small. Therefore, the rib **24** may or may not be provided in the area where the second type of dark line appears. By providing the rib **24** only in the area where the first type of dark line appears, the transmittance can be effectively improved. In the case where the rib **24** is provided also in the area where the second type of dark line appears, the transmittance may be rather lowered if the finish is slightly shifted from the design value.

[0092] Now, a preferable height and a preferable width of the rib **24** will be described. As shown in FIG. 18, in the area where the first type of dark line would appear, the rib **24** is provided such that the apex **24c** is 5 μm away from the edge portion of the pixel electrode **11**. While the height **h** and the width **w** of the rib **24** are changed, the ratio T/T_0 of the transmittance **T** of the pixel area **10** with respect to the transmittance **T0** when the rib **24** is not provided was calculated. The thickness (cell gap) **d** of the liquid crystal layer **3** was 3.4 μm, and the width of the pixel area **10** was 60 μm.

[0093] FIG. 19 and FIG. 20 show the relationship among the rib height **h**, the rib width **w**, and the transmittance ratio T/T_0 . FIG. 19 is a graph in which the horizontal axis represents the rib height **h** and the vertical axis represents the transmittance ratio T/T_0 . FIG. 20 is a graph in which the horizontal axis represents the rib width **w** and the vertical axis represents the transmittance ratio T/T_0 . In FIG. 19 and FIG. 20, a transmittance ratio T/T_0 exceeding 1 means that the transmittance is improved. As the value of T/T_0 is larger, the degree of improvement is higher.

[0094] It is understood from FIG. 19 and FIG. 20 that there is an overall tendency that when the rib **24** is provided, the transmittance is basically improved, but where the rib **24** is too high or too wide, the transmittance is rather reduced. It is also understood that when the rib height **h** is 3.2 μm and the rib width **w** is 15 μm, the transmittance is most improved.

[0095] It is also understood from FIG. 19 that where the rib width **w** is relatively small, the transmittance is more improved as the rib height **h** is larger. It is also understood that where the rib width **w** is too large, the transmittance is lowered. This occurs for the reasons described above with reference to FIG. 13. A reason is that in the area where the rib **24** is provided, the cell gap **d** is smaller by the height of the rib **24**, and so the retardation given to light by the liquid crystal layer **3** is smaller. Another reason is that the pretilt angle of the liquid crystal molecules **3a** in the vicinity of the rib **24** is different from the pretilt angle of the liquid crystal molecules **3a** on the second alignment film **22** in the area where the rib **24** is not provided.

[0096] It is understood from FIG. 20 that where the rib height **h** is relatively small, the transmittance is most improved when the rib width **w** is 20 μm, and that where the rib height **h** is relatively large, the transmittance is most improved when the rib width **w** is 15 μm. Namely, FIG. 20 shows that it is effective to narrow the rib **24** as the rib **24** is higher. It is also understood that when the rib width **w** is changed, the transmittance is rapidly changed. Especially where the rib height **h** is relatively large, the dependence of the transmittance on the rib width **w** is conspicuous. Therefore, in consideration of various margins for mass production, it is preferable that the rib height **h** is set to about 1.4 μm to 2.6 μm and the rib width **w** is set to about 15 μm to 20 μm, instead of the above-mentioned optimum conditions (the rib height **h** is 3.2 μm and the rib width **w** is 15 μm).

[0097] Now, results of a similar investigation performed on the case where the cell gap **d** is 3.2 μm will be described.

FIG. 21 and FIG. 22 show the relationship among the rib height **h**, the rib width **w**, and the transmittance ratio T/T_0 at this cell gap. FIG. 21 is a graph in which the horizontal axis represents the rib height **h** and the vertical axis represents the transmittance ratio T/T_0 . FIG. 22 is a graph in which the horizontal axis represents the rib width **w** and the vertical axis represents the transmittance ratio T/T_0 .

[0098] It is understood from FIG. 21 and FIG. 22 that in the case where the cell gap **d** is 3.2 μm , substantially the same tendency is seen as in the case where the cell gap **d** is 3.4 μm . It is also understood that the degree of improvement of the transmittance is higher in the case where the cell gap **d** is 3.4 μm . The conditions under which the transmittance is most improved in the case where the cell gap **d** is 3.2 μm are that the rib height **h** is 3 μm and the rib width **w** is 15 μm . However, in consideration of various margins for mass production, it is preferable that the rib height **h** is set to about 1.2 μm to 2.4 μm and the rib width **w** is set to about 15 μm to 20 μm , instead of such optimum conditions.

[0099] As a result of analyzing the calculation results shown in FIG. 19 through FIG. 22 in more detail, it was found that when the rib 24 fulfills a certain condition, an effect of improving the transmittance is provided. Specifically, the transmittance is improved (i.e., the transmittance ratio T/T_0 exceeds 1) when the height **h** (μm) and the width **w** (μm) of the rib 24 and the thickness **d** (μm) of the liquid crystal layer 3 fulfill the relationship of the following expression (1).

$$5d \cdot \exp(-0.18w) \leq h \leq 12d \cdot \exp(-0.13w) \quad \dots (1)$$

[0100] In consideration of restrictions for the actual production of the liquid crystal display device, it is preferable that the height **h** (μm) and the width **w** (μm) of the rib 24 and the thickness **d** (μm) of the liquid crystal layer 3 further fulfill the relationships of the following expressions (2), (3) and (4).

$$2 \leq d \leq 6 \quad \dots (2)$$

$$10 \leq w \leq 30 \quad \dots (3)$$

$$0.6 \leq h \leq d \quad \dots (4)$$

[0101] In expression (4), the rib height **h** is 0.6 μm or greater because when the rib height **h** is less than 0.6 μm , the alignment regulation force provided by the rib 24 is small and the effect of improving the transmittance is small. The rib height **h** is equal to or less than the cell gap **d** because the rib height **h** cannot be equal to or greater than the cell gap **d**.

[0102] The pattern of dividing the pixel area is not limited to the above-described patterns as examples. In the case where one pixel area is divided into four liquid crystal domains and the four liquid crystal domains are located in a matrix of 2 rows x 2 columns, there are 48 dividing patterns as shown in FIG. 23(a) through FIG. 26(l). In these figures, like in FIG. 9, in each of the areas corresponding to the liquid crystal domains, the pretilt directions of the first alignment film 12 are represented by the dashed line arrows, and the pretilt directions of the second alignment film 22 are represented by the solid line arrows. The dark lines appearing in the case where the ribs 24 are not provided (both of the first type of dark lines and the second type of dark lines) are shown by solid lines in the vicinity of the edge portions of the pixel electrode 11. As shown in FIG. 23(a) through FIG. 26(l), the number and positions of the areas where the dark lines appear are different for each dividing pattern.

[0103] FIG. 27(a) through FIG. 30(l) respectively show structures obtained by providing the ribs 24 in the areas where the first type of dark line appears in the dividing patterns shown in FIG. 23(a) through FIG. 26(l). In the dividing patterns in FIGS. 27(a), (b), (e) and (f), FIGS. 29(i) and (j), and FIGS. 30(a) and (f), the ribs 24 are provided in all of the four liquid crystal domains because the first type of dark line would otherwise appear in all of the four liquid crystal domains. In the dividing patterns in FIGS. 27(c), (d), (g) through (l), FIGS. 28(a) through (f), (i) and (j), FIGS. 29(a) through (f), (k) and (l), and FIGS. 30(b), (e) and (g) through (l), the ribs 24 are provided in two among the four liquid crystal domains because the first type of dark line would otherwise appear in such two liquid crystal domains. In the dividing patterns in FIGS. 28(g), (h), (k) and (l), FIGS. 29(g) and (h), and FIGS. 30(c) and (d), the ribs 24 are not provided because the first type of dark line would not appear.

[0104] In the case where optical alignment processing is performed as the alignment processing, it is preferable that a part of the 48 patterns shown in FIG. 23(a) through 26(l) are used. This will be described specifically, hereinafter.

[0105] In order to realize the multi-domain structure by optical alignment processing, it is necessary to perform exposure

in sections on an optical alignment film by use of an optical mask. The optical mask used in this operation includes striped light shielding portions.

[0106] In order to realize the dividing pattern shown in, for example, FIG. 31(a) (same as the dividing pattern shown in FIG. 24(l)), it is necessary to give the pretilt direction shown in FIG. 31(b) to the second alignment film 22 on the CF substrate 2 and to give the pretilt direction shown in FIG. 31(c) to the first alignment film 12 on the TFT substrate 1. Therefore, exposure in sections is performed on the CF substrate 2 side by use of a light shielding portion S of the optical mask provided as shown in FIG. 31(d), and exposure in section is performed on the TFT substrate 1 side by use of the light shielding portion S of the optical mask provided as shown in FIG. 31(e). As shown in FIGS. 31(f) and (g), light is directed in a direction oblique with respect to a direction perpendicular to the direction in which the light shielding portion S extends. Namely, the CF substrate 2 side is irradiated with light directed in a direction oblique to the length direction (column direction) in the state where the light shielding portion S is located so as to extend in the transverse direction (row direction). The TFT substrate 1 side is irradiated with light directed in a direction oblique to the transverse direction in the state where the light shielding portion S is located so as to extend in the length direction.

[0107] By contrast, in order to realize the dividing pattern shown in, for example, FIG. 32(a) (same as the dividing pattern shown in FIG. 24(f)), it is necessary to give the pretilt direction shown in FIG. 32(b) to the second alignment film 22 on the CF substrate 2 and to give the pretilt direction shown in FIG. 32(c) to the first alignment film 12 on the TFT substrate 1. Therefore, exposure in sections is performed on the CF substrate 2 side by use of the light shielding portion S of the optical mask provided as shown in FIG. 32(d), and exposure in sections is performed on the TFT substrate 1 side by use of the light shielding portion S of the optical mask provided as shown in FIG. 32(e). As shown in FIGS. 32(f) and (g), light is directed in a direction oblique with respect to a direction parallel to the direction in which the light shielding portion S extends. Namely, the CF substrate 2 side is irradiated with light directed in a direction oblique to the length direction in the state where the light shielding portion S is located so as to extend in the length direction. The TFT substrate 1 side is irradiated with light directed in a direction oblique to the transverse direction in the state where the light shielding portion S is located so as to extend in the transverse direction.

[0108] As described above, the relationship between the direction in which the light shielding portion S of the optical mask extends and the light irradiation direction is different for each dividing pattern. In one case, light irradiation is performed in a direction oblique with respect to a direction perpendicular to the direction in which the light shielding portion S extends (referred to as the "irradiation direction A" for the sake of convenience); and in the other case, light irradiation is performed in a direction oblique with respect to a direction parallel to the direction in which the light shielding portion S extends (referred to as the "irradiation direction B" for the sake of convenience).

[0109] When the irradiation method A is used, there may be problems that the exposure position is shifted or exposure is not performed sufficiently due to a slight space between the optical mask and the substrate or diffraction. Therefore, it is preferable that a dividing pattern realized only by the irradiation method B is used.

[0110] Specifically, the dividing patterns realized only by the irradiation method B are eight patterns shown in FIGS. 33(a) through (h). In any of the dividing patterns shown in FIGS. 33(a) through (h), the first type of dark line may appear in two among the four liquid crystal domains. Therefore, the ribs 24 are provided in correspondence with such two liquid crystal domains. The tilt directions of the two liquid crystal domains in which the ribs 24 are provided have an angle of about 180° with each other in any of the dividing patterns.

[0111] The above description is made with an example of generally square pixel areas. However, actual pixel areas are typically rectangular with the length direction being longer. Namely, the width of the pixel area along the vertical direction of the display plane (typically, the direction in which the source bus lines extend) is more often larger than the width of the pixel area along the horizontal direction of the display plane (typically, the direction in which the gate bus lines extend). Accordingly, the effect of improving the transmittance is greater where the ribs 24 are provided generally parallel to the vertical direction of the display plane than where the ribs 24 are provided generally parallel to the horizontal direction of the display plane.

[0112] Namely, among the eight dividing patterns shown in FIGS. 33(a) through (h), it is further preferable to use any of the four dividing patterns shown in FIGS. 34(a) through (d) in which the edge portions where the first type of dark line appears are generally parallel to the vertical direction of the display plane.

INDUSTRIAL APPLICABILITY

[0113] A liquid crystal display device according to the present invention is preferably usable for applications in which high quality display is demanded such as TV receivers and the like.

REFERENCE SIGNS LIST

[0114]

1	TFT substrate (active matrix substrate)
1a, 2a	Transparent plate
2	CF substrate (counter substrate)
3	Liquid crystal layer
5 3a	Liquid crystal molecules
10, 20, 30, 40	Pixel area
11	Pixel electrode
12	First alignment film
13, 23	Polarizing plate
10 21	Counter electrode
22	Second alignment film
24	Rib
24a	Side face of the rib (inner side face)
24b	Side face of the rib (outer side face)
15 24c	Apex of the rib (ridgeline)
100	Liquid crystal display device
SD1 through SD4	Edge of the pixel electrode
EG1 through EG4	Edge portion of the pixel electrode
A through D	Liquid crystal domain
20 t1 through t4	Tilt direction (reference alignment direction)
e1 through e4	Azimuthal angle direction perpendicular to the edge of the pixel electrode and directed to the inside of the pixel electrode
DL1 through DL4	Dark line

Claims

1. A liquid crystal display device, comprising:

a vertical alignment type liquid crystal layer;
a first substrate and a second substrate facing each other with the liquid crystal layer interposed therebetween;
a first electrode provided in the first substrate on the liquid crystal layer side and a second electrode provided in the second substrate on the liquid crystal layer side; and
a first alignment film provided between the first electrode and the liquid crystal layer and a second alignment film provided between the second electrode and the liquid crystal layer;
wherein:
the liquid crystal display device includes a plurality of pixel areas located in a matrix;
each of the plurality of pixel areas includes a first liquid crystal domain in which a tilt direction of liquid crystal molecules at the center and in the vicinity thereof in a layer plane and in a thickness direction of the liquid crystal layer when a voltage is applied between the first electrode and the second electrode is a predetermined first direction, a second liquid crystal domain in which such a tilt direction is a predetermined second direction, a third liquid crystal domain in which such a tilt direction is a predetermined third direction and a fourth liquid crystal domain in which such a tilt direction is a predetermined fourth direction; a difference between any two among the first direction, the second direction, the third direction and the fourth direction is approximately equal to an integral multiple of 90°;
the first liquid crystal domain is close to at least a part of edges of the first electrode, and the at least a part includes a first edge portion, wherein an azimuthal angle component of an alignment regulation force caused by an oblique electric field generated in the vicinity of the first edge portion and an azimuthal angle component of an alignment regulation force caused by the second alignment film are opposite to each other; and
the second substrate includes a first rib provided in an area corresponding to the first edge portion.

2. The liquid crystal display device of claim 1, wherein the first direction has an angle exceeding 90° with respect to an azimuthal angle direction perpendicular to the first edge portion and directed to the inside of the first electrode.

3. The liquid crystal display device of claim 1 or 2, wherein:

the first rib includes an inclining first side face, an inclining second side face located outer to the first side face, and an apex defined between the first side face and the second side face; and

the first rib is located such that the apex is located outer to the first edge portion and that the first edge portion overlaps the first side face.

4. The liquid crystal display device of any one of claims 1 through 3, wherein a height h (μm) of the first rib, a width w (μm) of the first rib and a thickness d (μm) of the liquid crystal layer fulfill the relationship of the following expression 1:

$$5d \cdot \exp(-0.18w) \leq h \leq 12d \cdot \exp(-0.13w) \quad \dots \quad (1)$$

5. The liquid crystal display device of claim 4, wherein the height h (μm) of the first rib, the width w (μm) of the first rib and the thickness d (μm) of the liquid crystal layer fulfill the relationships of the following expressions (2), (3) and (4):

$$2 \leq d \leq 6 \quad \dots \quad (2)$$

$$10 \leq w \leq 30 \quad \dots \quad (3)$$

$$0.6 \leq h \leq d \quad \dots \quad (4)$$

6. The liquid crystal display device of any one of claims 1 through 5, wherein the first edge portion is generally parallel to a vertical direction of a display plane.

7. The liquid crystal display device of any one of claims 1 through 6, wherein the second liquid crystal domain is close to at least a part of the edges of the first electrode, and the at least a part includes a second edge portion, wherein an azimuthal angle component of an alignment regulation force caused by an oblique electric field generated in the vicinity of the second edge portion and an azimuthal angle component of an alignment regulation force caused by the second alignment film are opposite to each other; and the second substrate includes a second rib provided in an area corresponding to the second edge portion.

8. The liquid crystal display device of claim 7, wherein the first direction and the second direction make an angle of about 180° with respect to each other.

9. The liquid crystal display device of claim 7 or 8, wherein the first edge portion and the second edge portion are generally parallel to the vertical direction of the display plane.

10. The liquid crystal display device of any one of claims 1 through 9, wherein the first liquid crystal domain, the second liquid crystal domain, the third liquid crystal domain and the fourth liquid crystal domain are each adjacent to the others of the liquid crystal domains and are located in a matrix of 2 rows x 2 columns.

11. The liquid crystal display device of claim 10, wherein the first liquid crystal domain, the second liquid crystal domain, the third liquid crystal domain and the fourth liquid crystal domain are located such that the tilt directions in adjacent liquid crystal domains among the first through fourth liquid crystal domains are different by 90° from each other.

12. The liquid crystal display device of claim 11, wherein where an azimuthal angle of a horizontal direction of the display plane is 0° , the first direction is about 45° , about 135° , about 225° or about 315° .

13. The liquid crystal display device of any one of claims 1 through 12, further comprising a pair of polarizing plates facing each other with the liquid crystal layer interposed therebetween and located such that transmission axes thereof are generally perpendicular to each other; wherein the first direction, the second direction, the third direction and the fourth direction each make an angle of about 45° with respect to the transmission axes of the pair of polarizing plates.

14. The liquid crystal display device of any one of claims 1 through 13, wherein:

the liquid crystal layer contains the liquid crystal molecules having a negative dielectric anisotropy; and
a pretilt direction defined by the first alignment film and a pretilt direction defined by the second alignment film
are different by about 90° from each other.

15. The liquid crystal display device of any one of claims 1 through 14, wherein a pretilt angle defined by the first alignment film and a pretilt angle defined by the second alignment film are approximately equal to each other.

16. The liquid crystal display device of any one of claims 1 through 15, wherein the first alignment film and the second alignment film are each an optical alignment film.

FIG.1

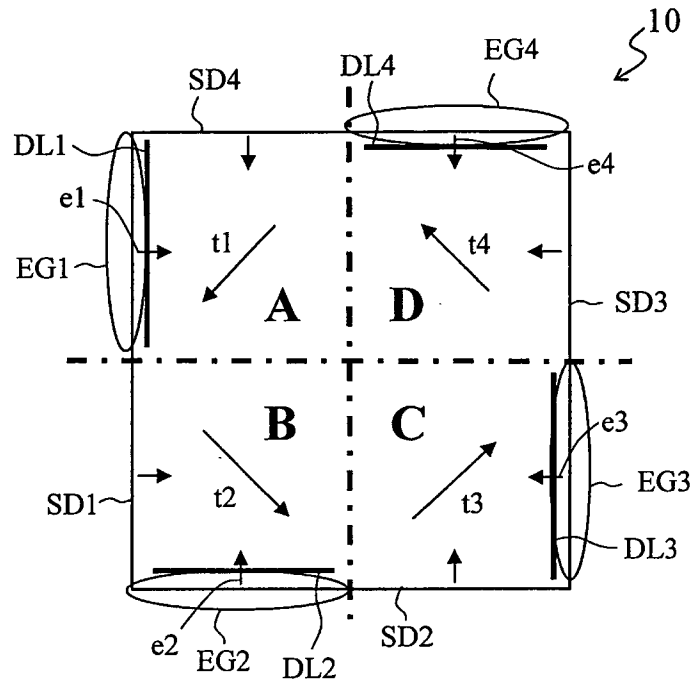


FIG.2

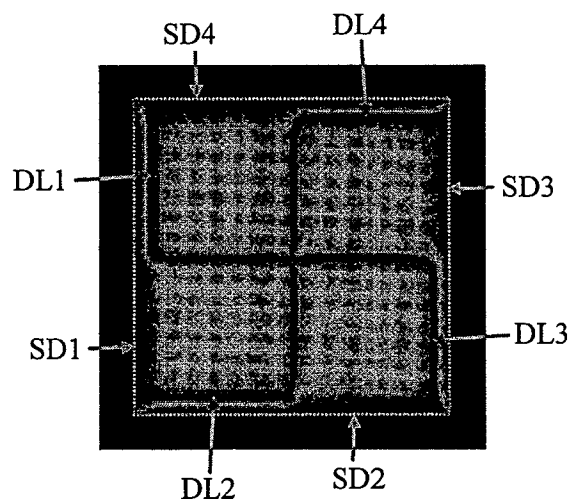


FIG. 3

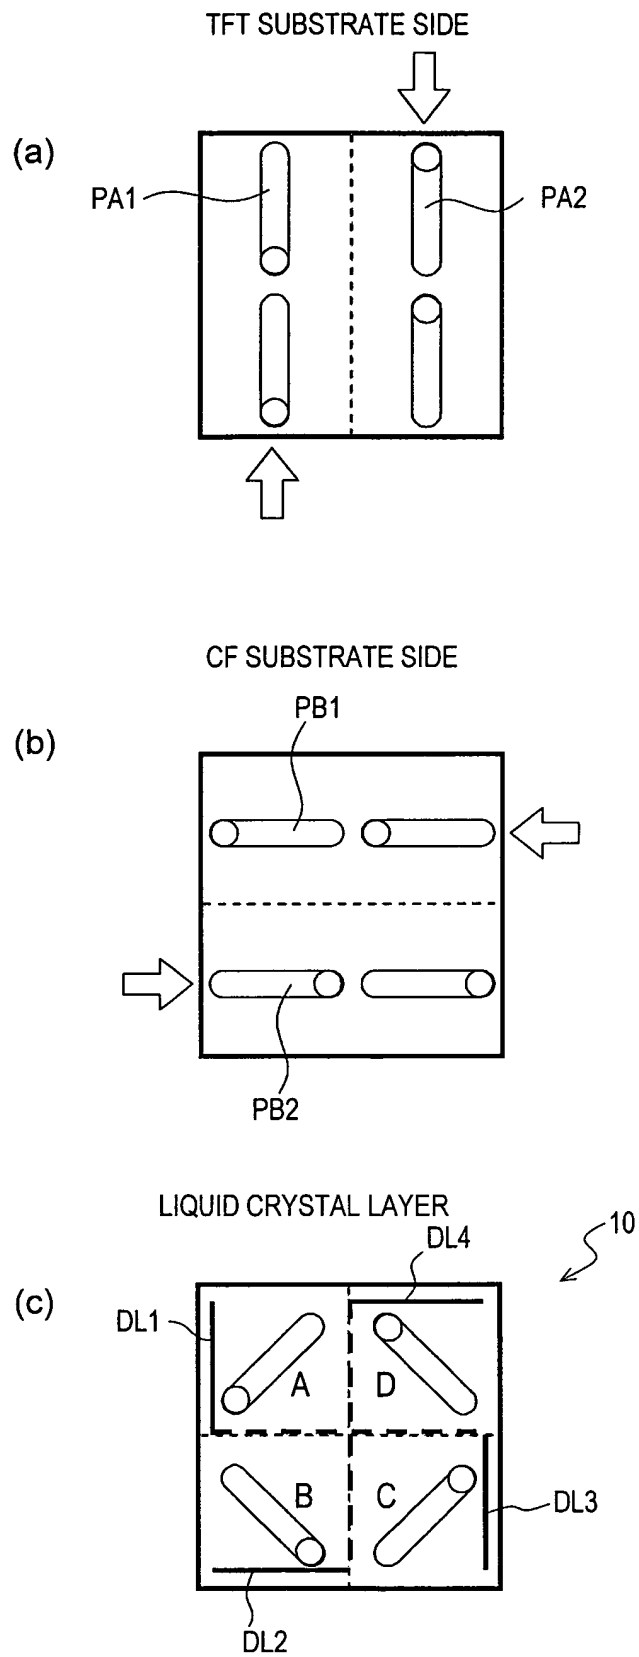


FIG. 4

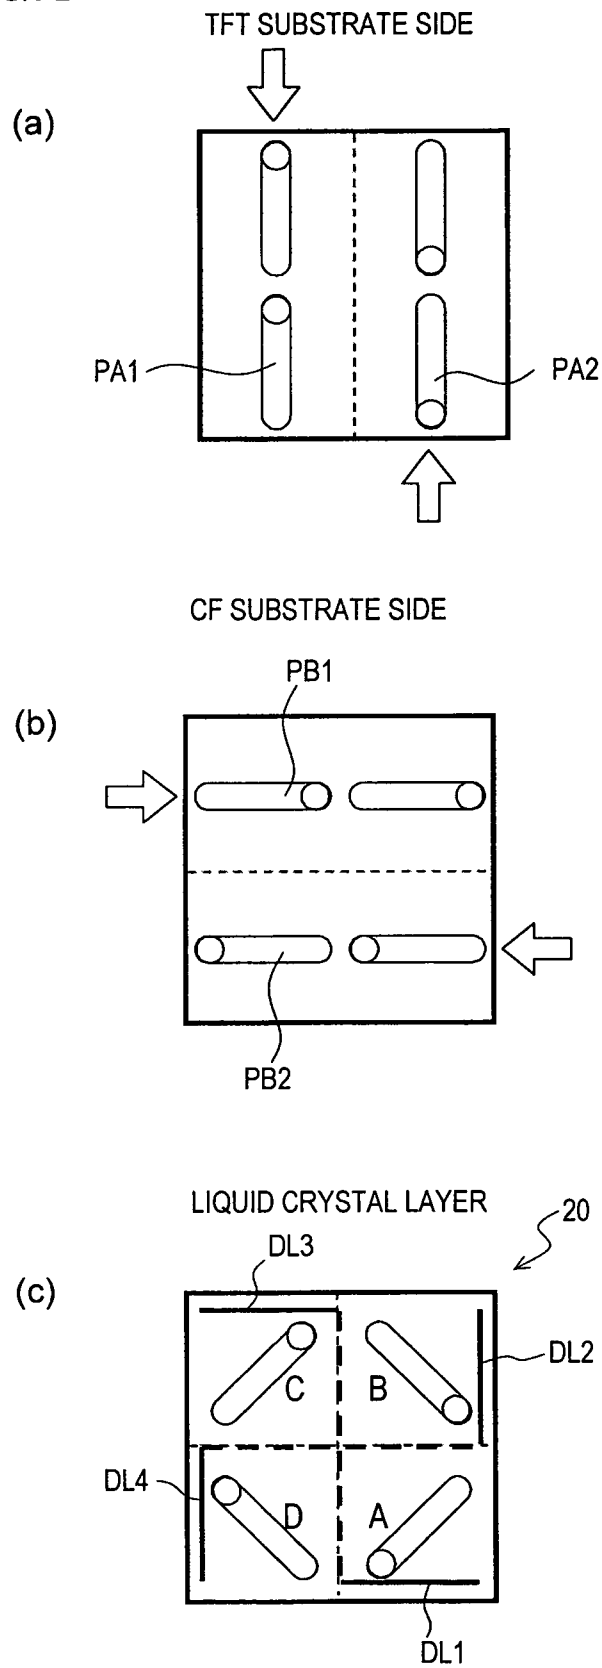


FIG. 5

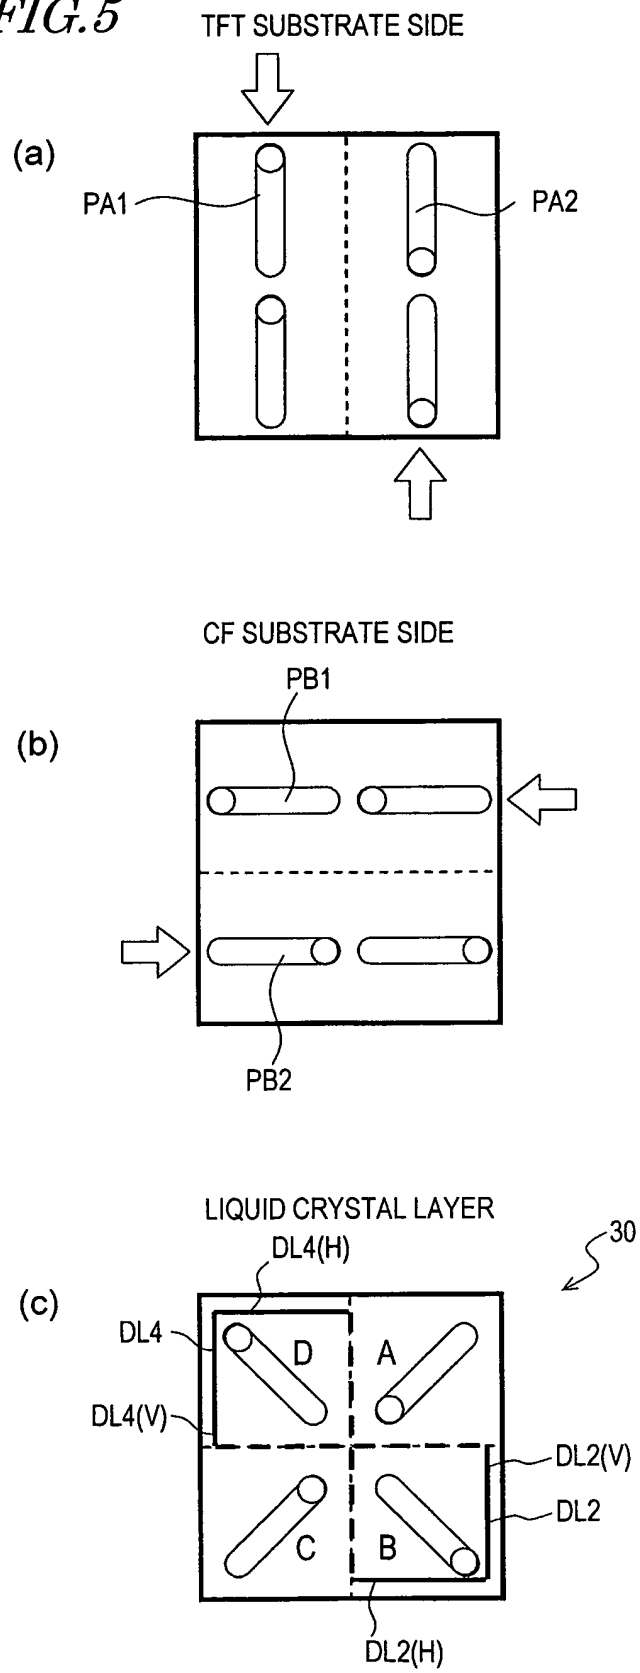


FIG. 6

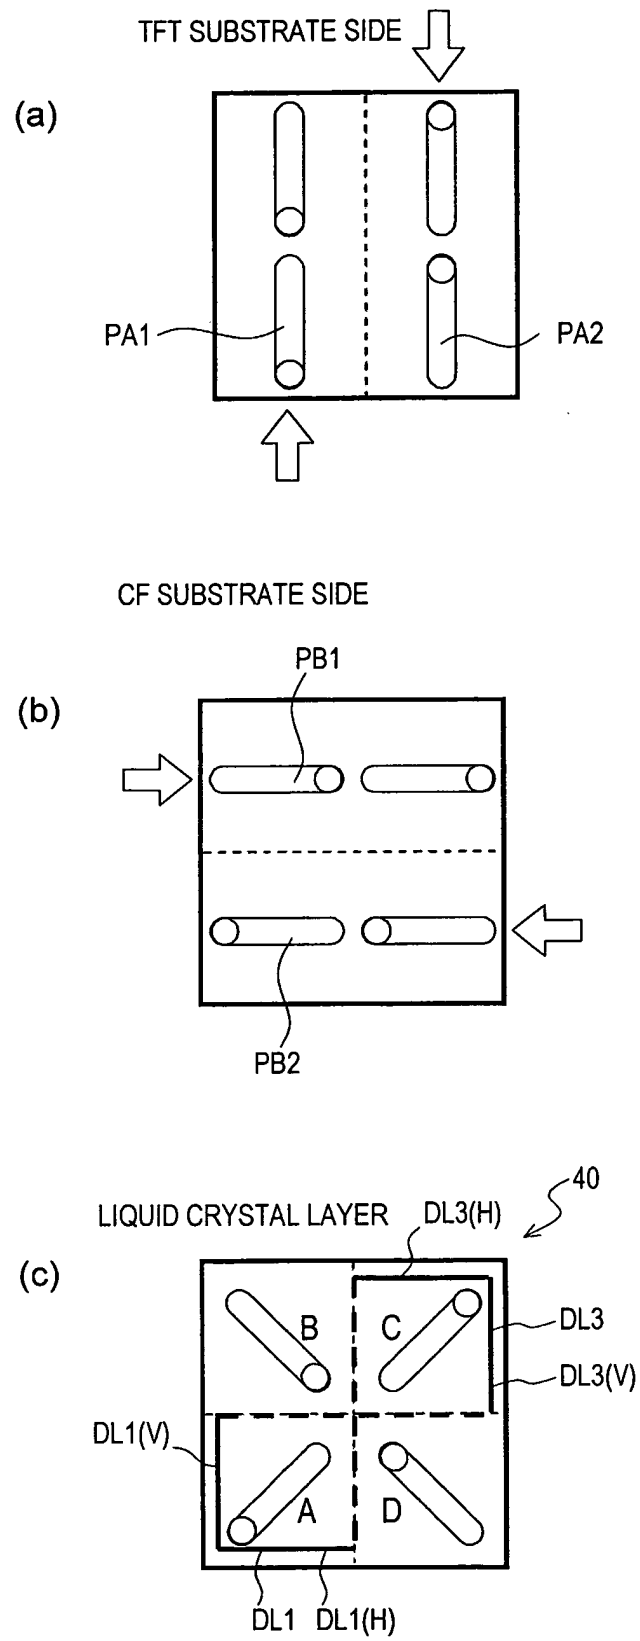


FIG. 7

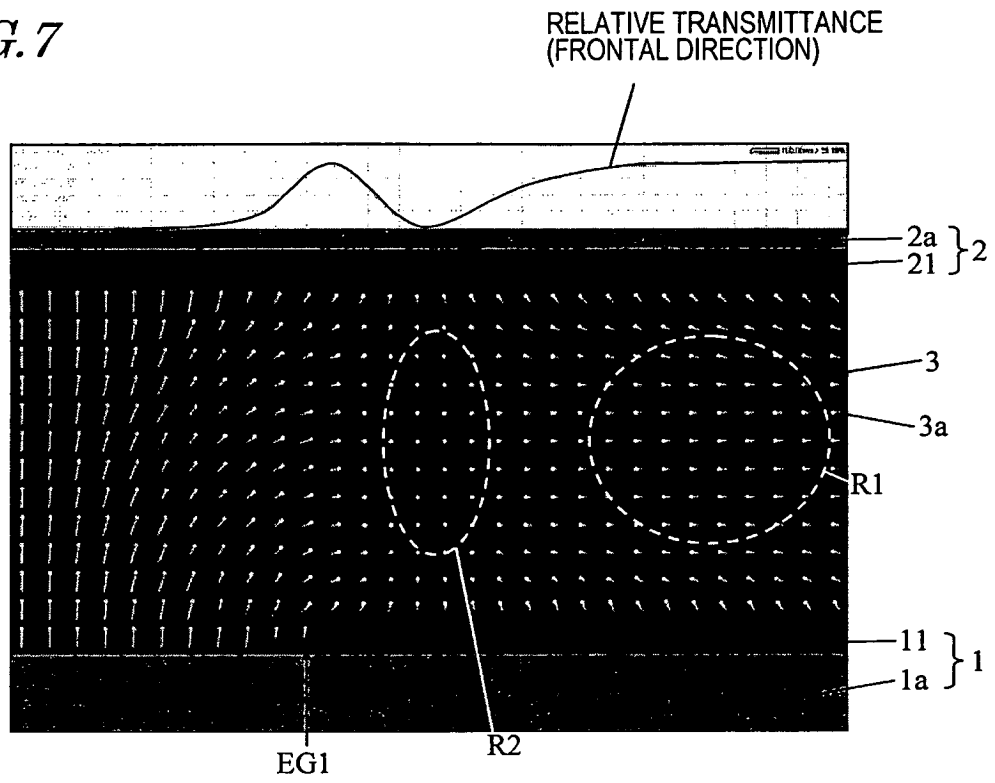


FIG. 8

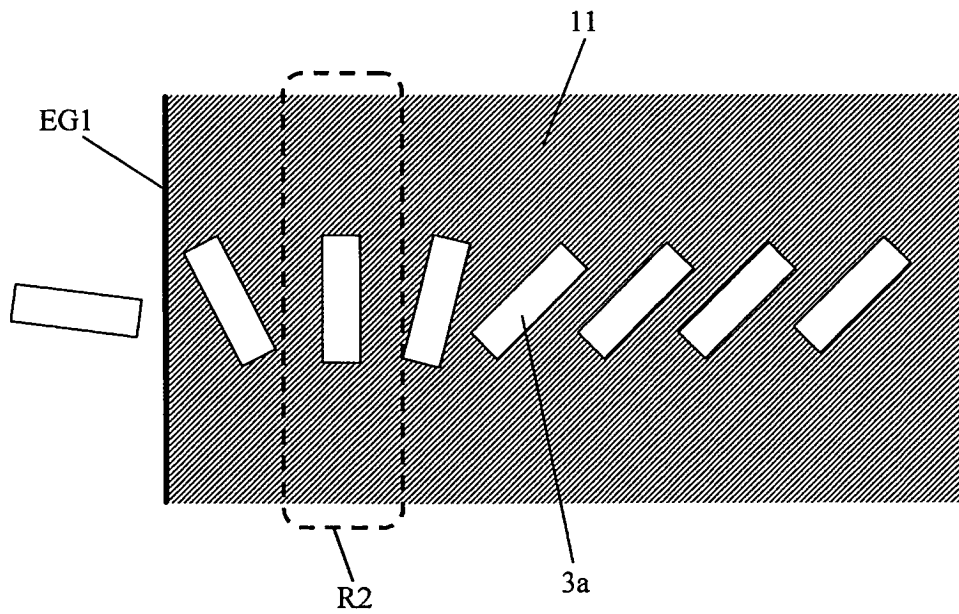


FIG. 9

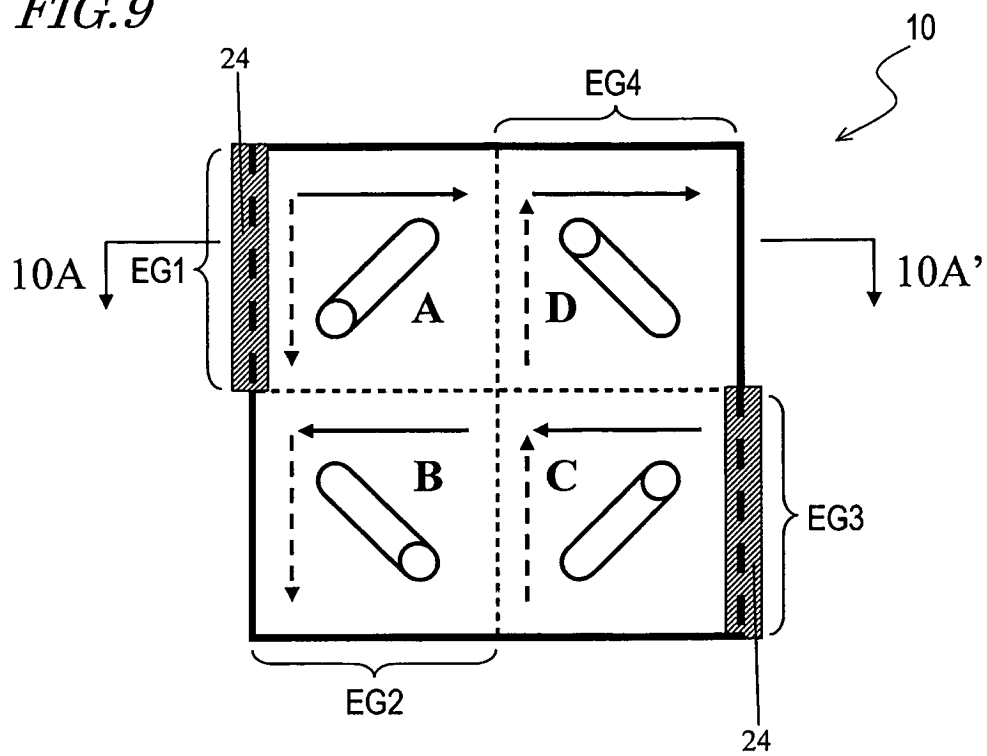


FIG. 10

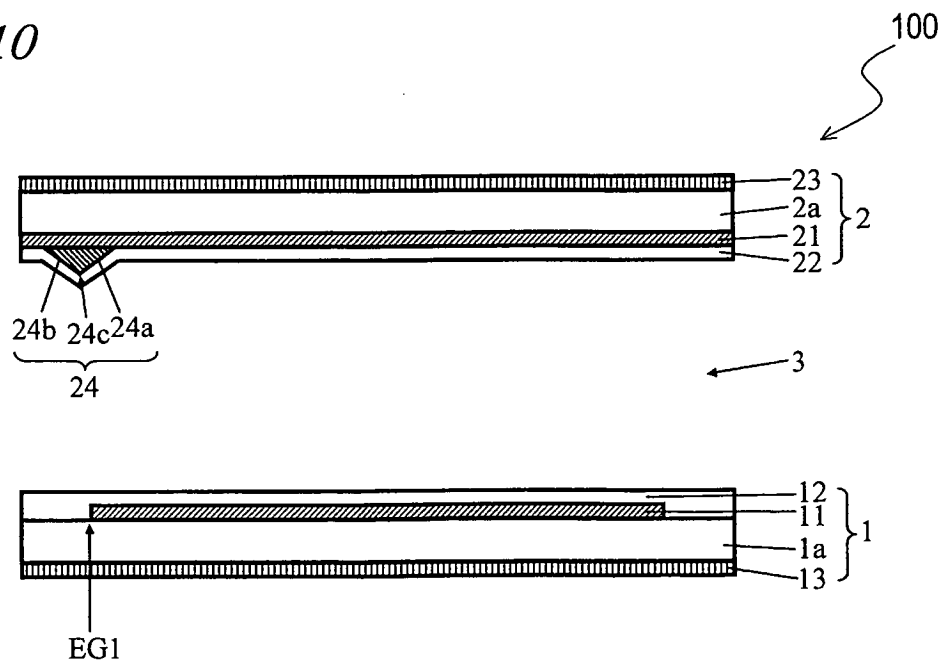


FIG. 11

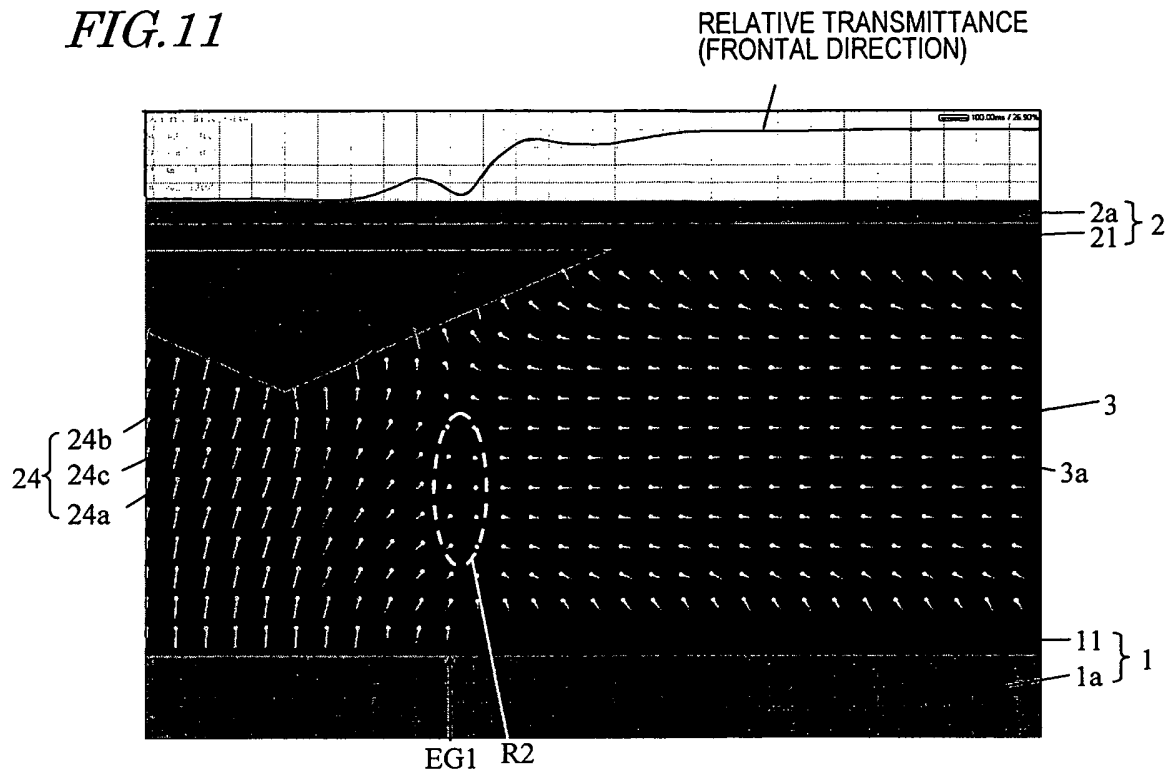


FIG. 12

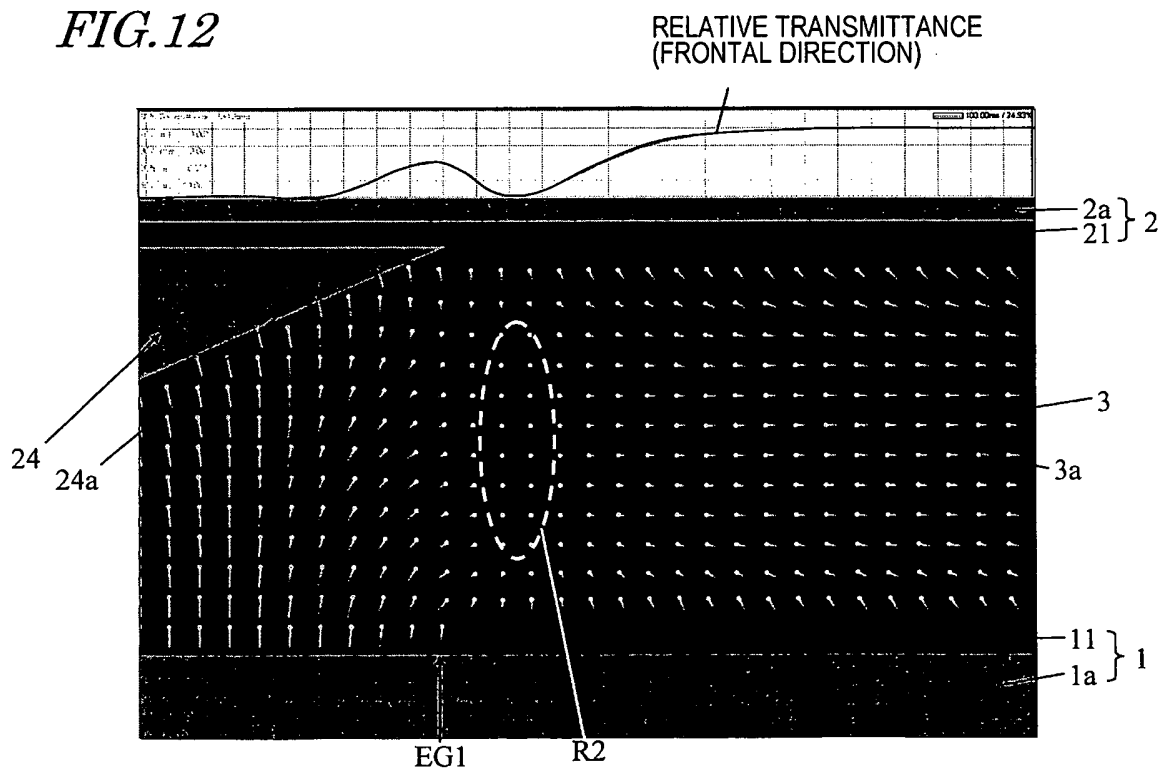


FIG. 13

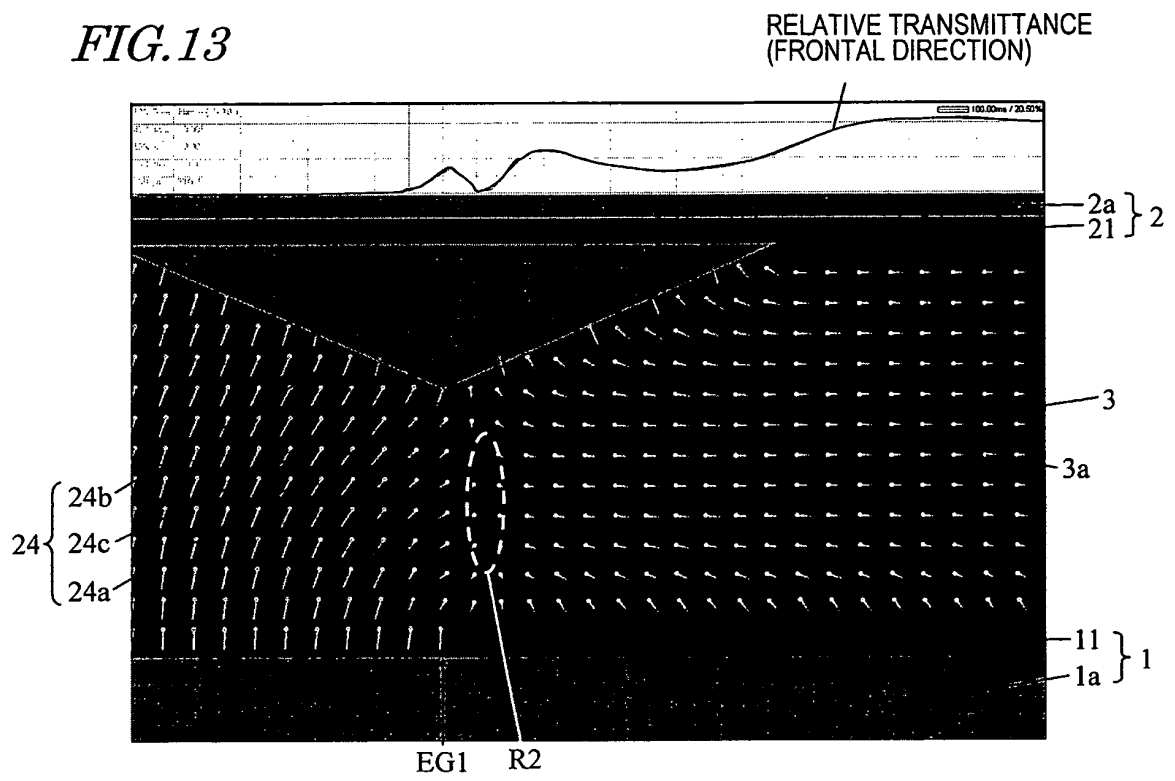


FIG. 14

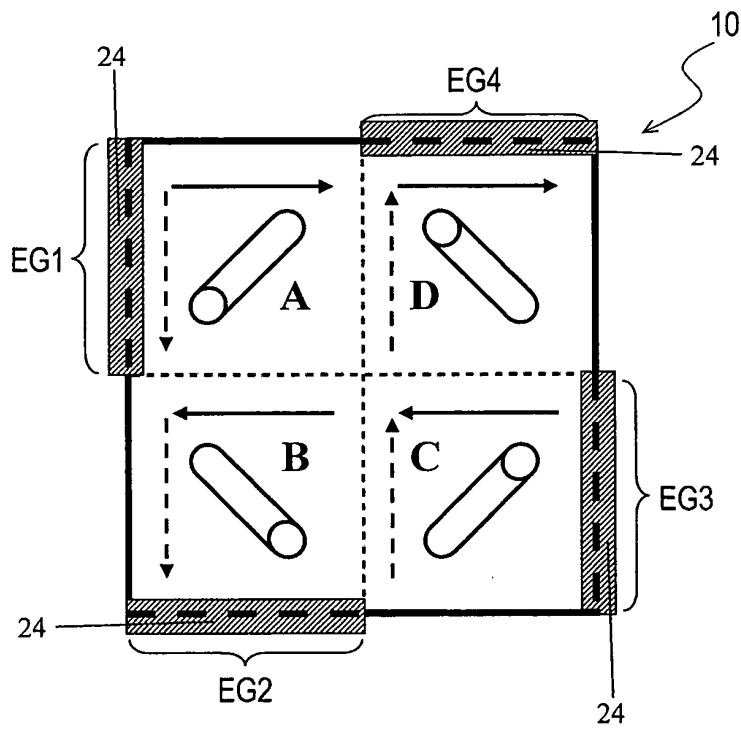


FIG. 15

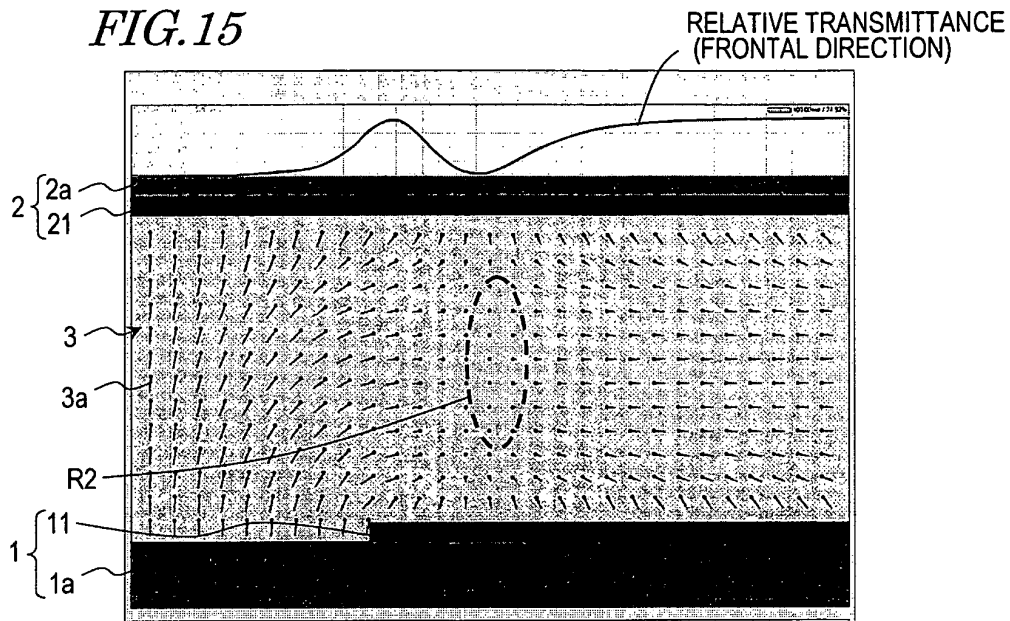


FIG. 16

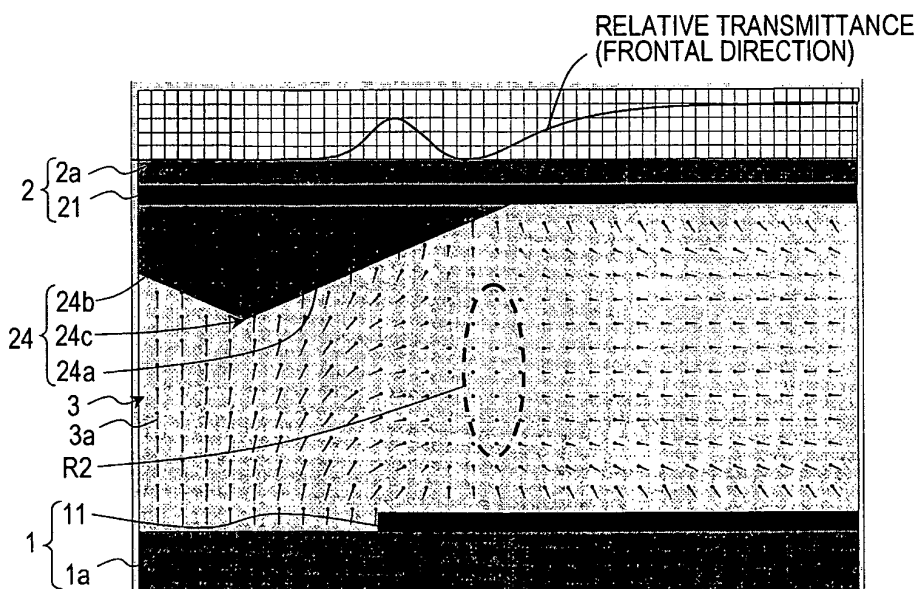


FIG. 17

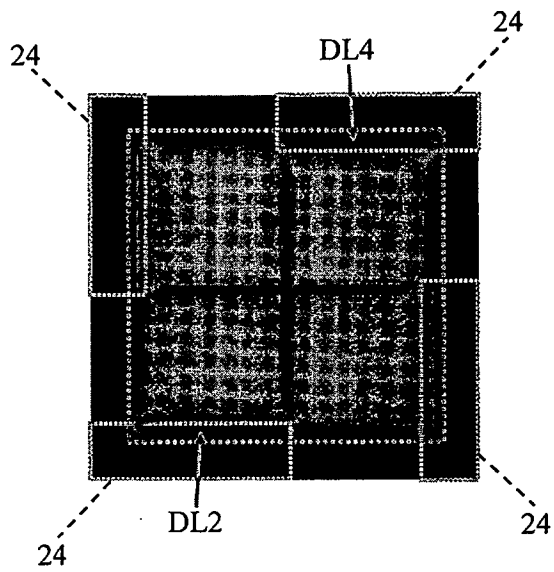


FIG. 18

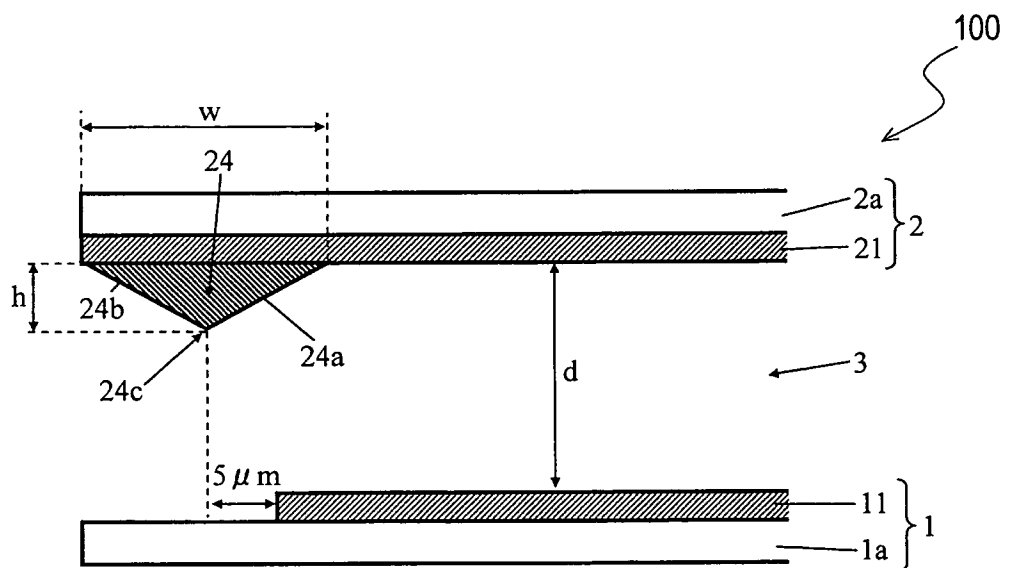


FIG. 19

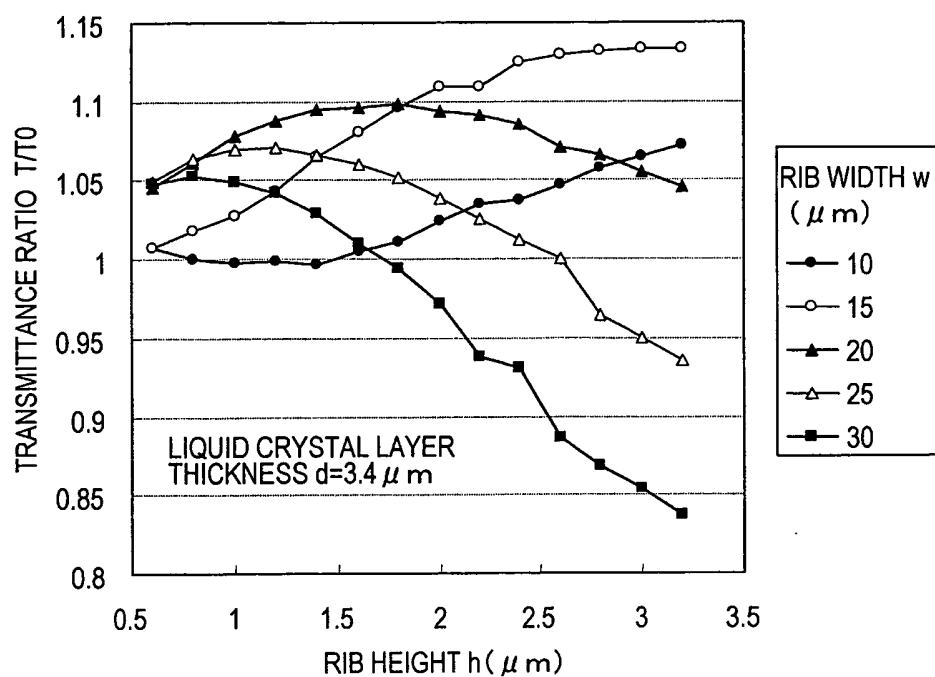


FIG. 20

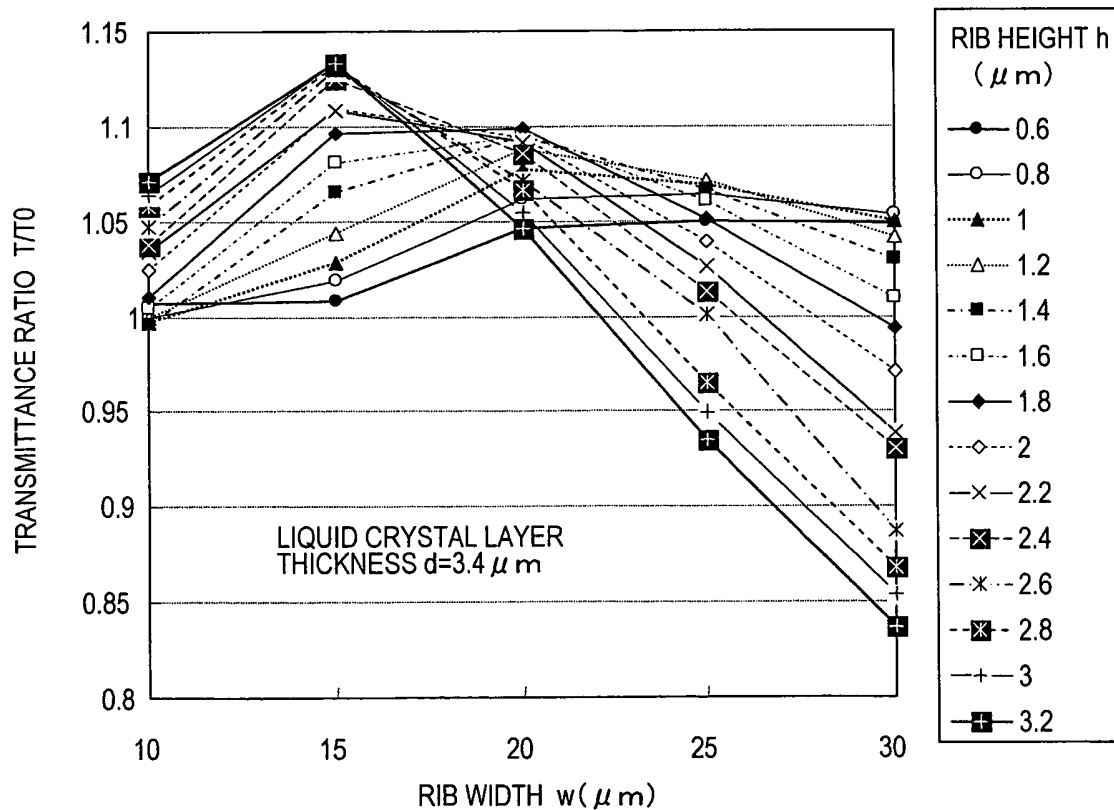


FIG. 21

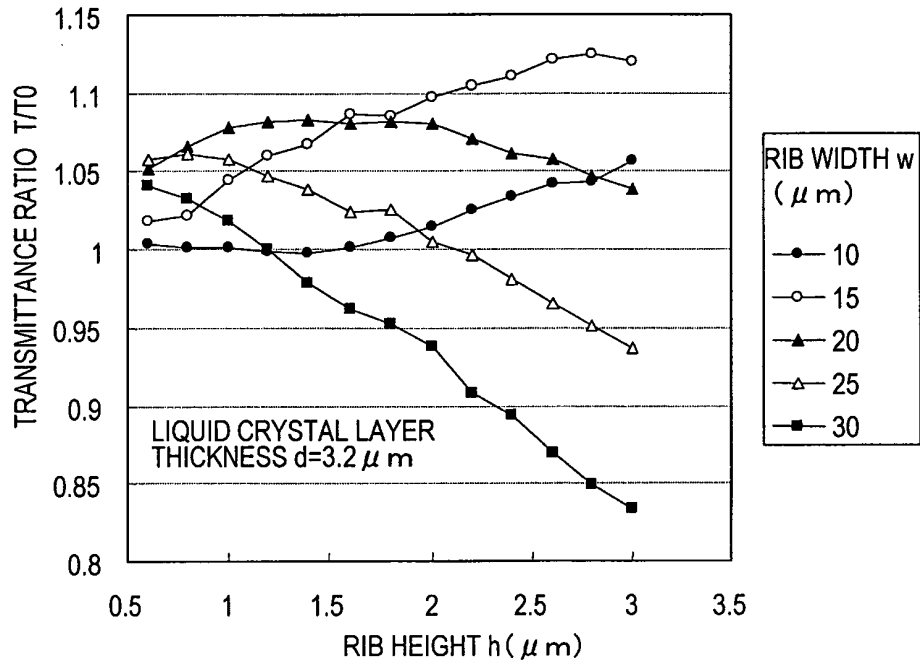


FIG. 22

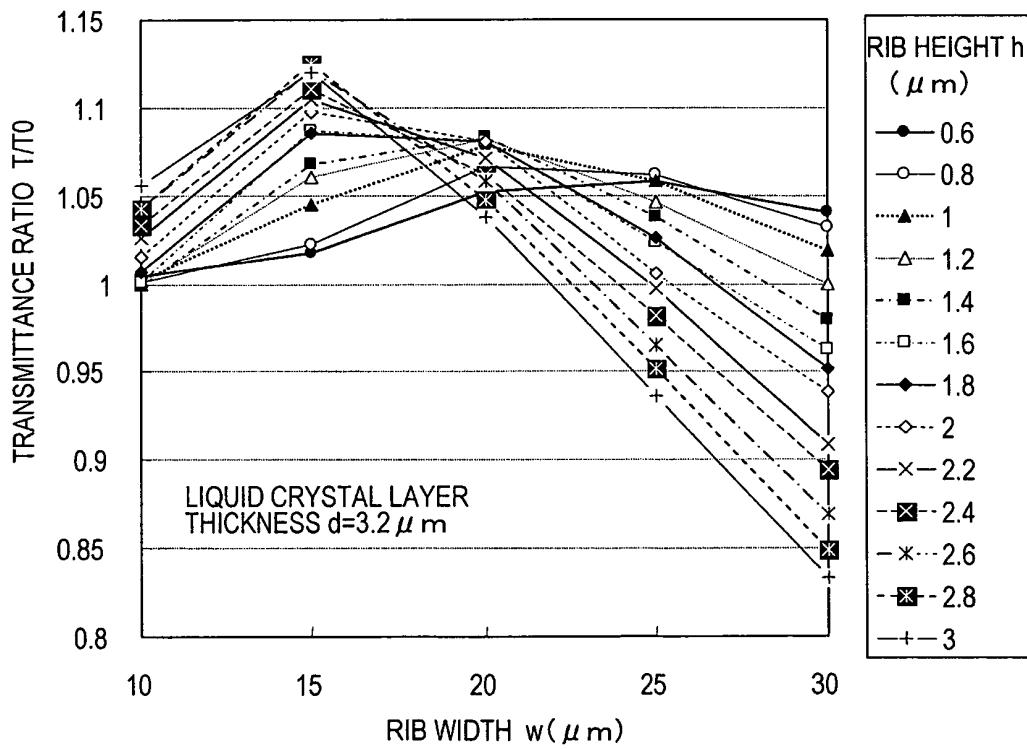




FIG.23*FIG.24*



FIG.25*FIG.26*

FIG.27




FIG.28

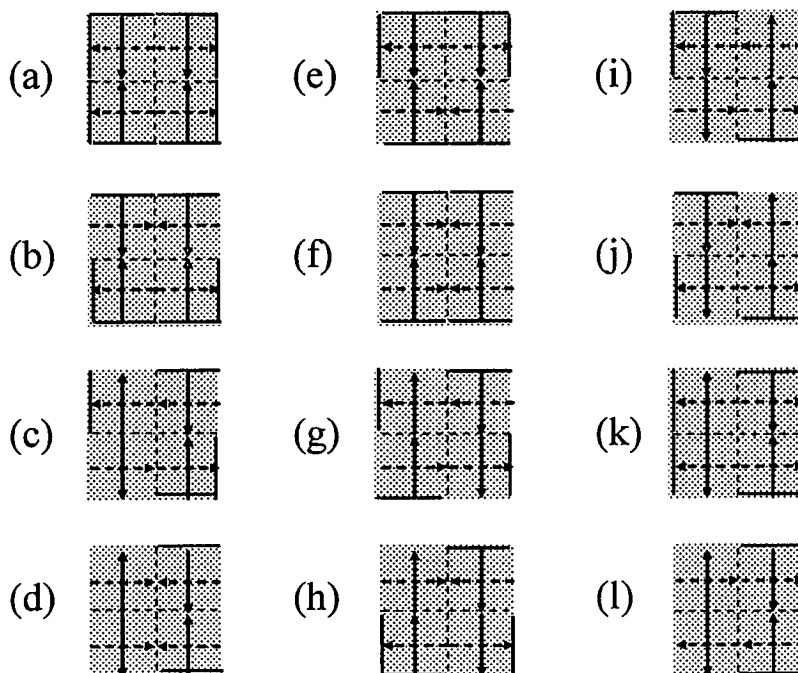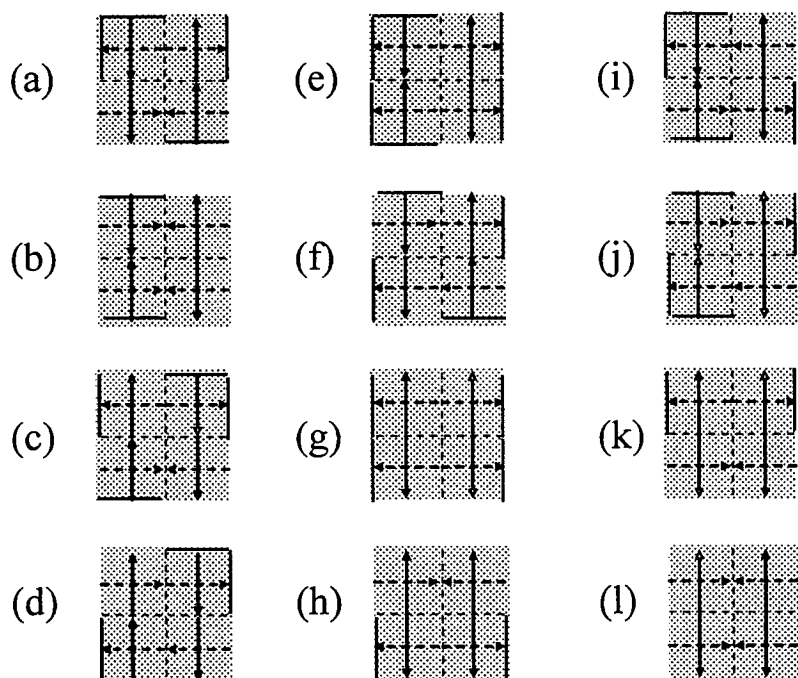


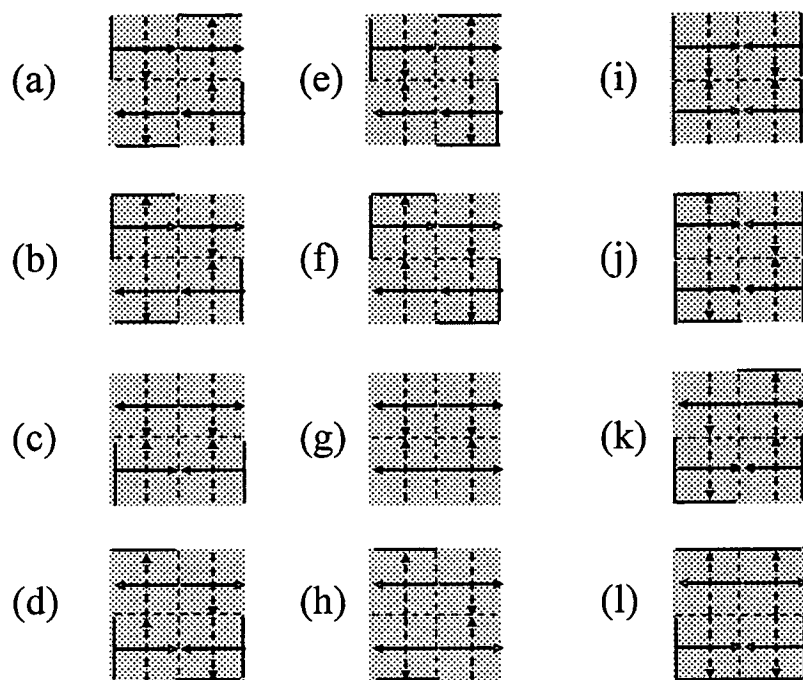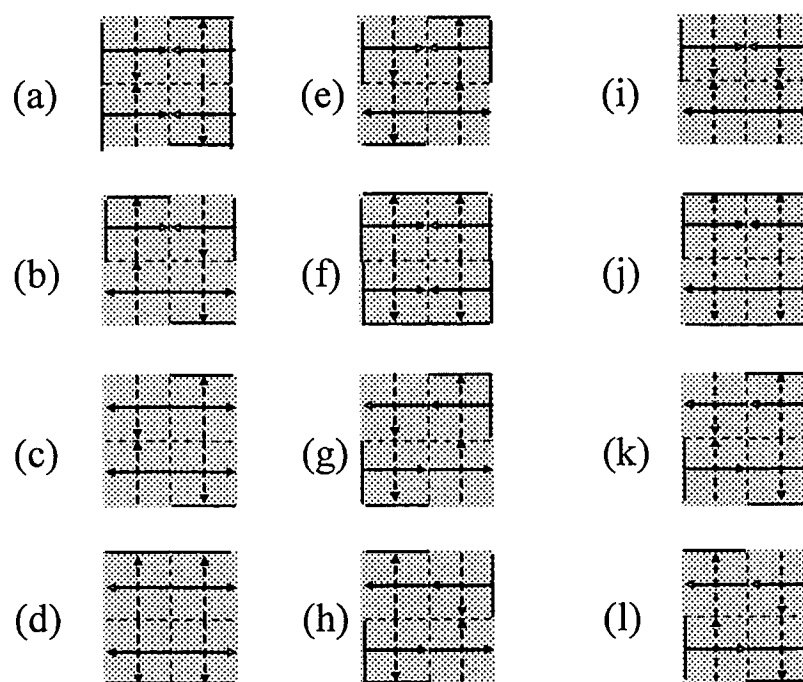FIG. 29

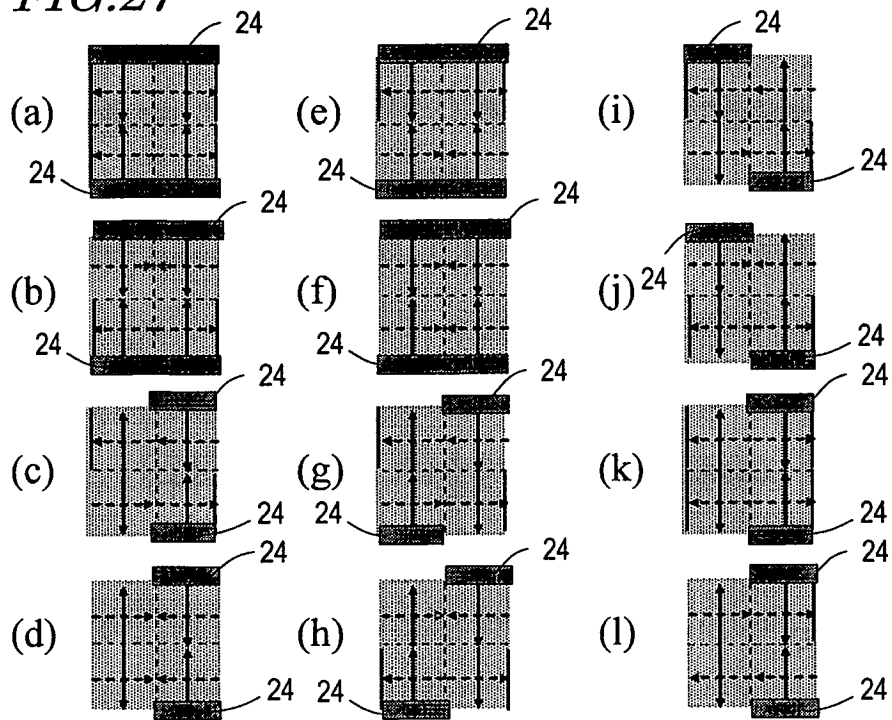


FIG. 30

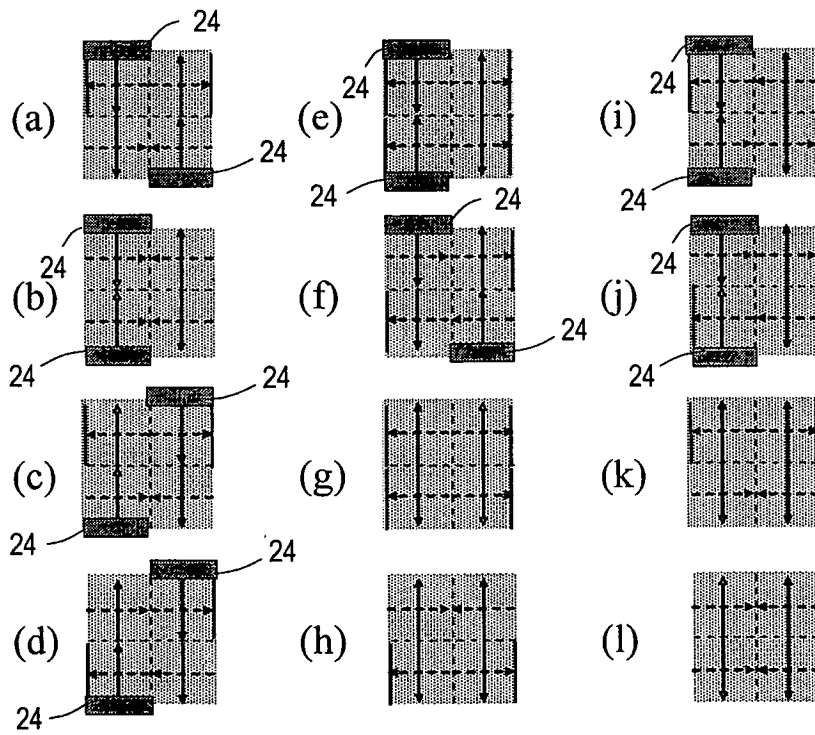


FIG. 31

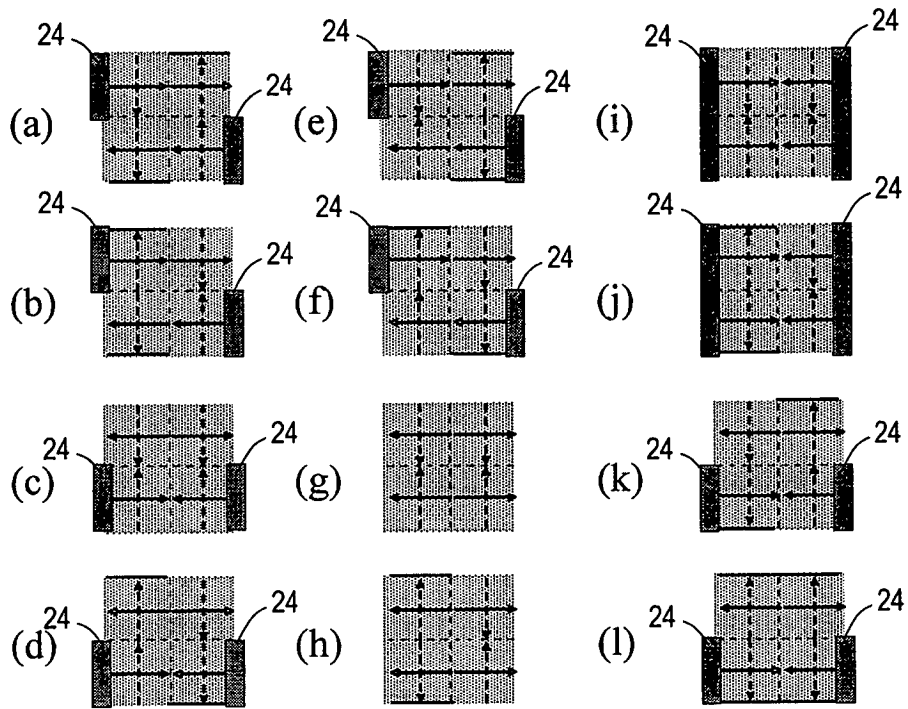


FIG. 32

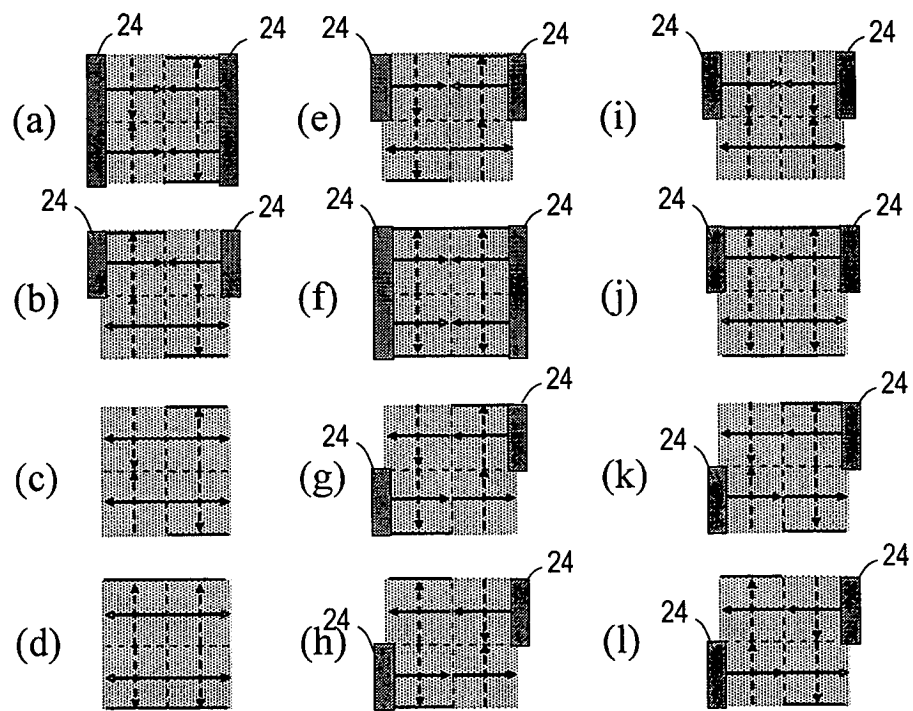


FIG. 33


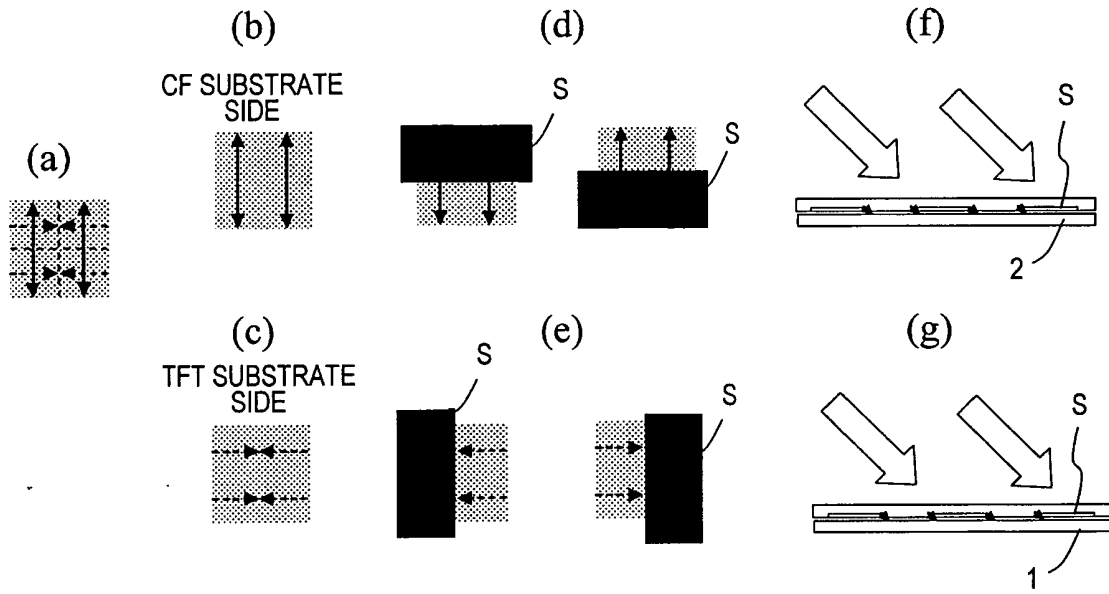


FIG. 34

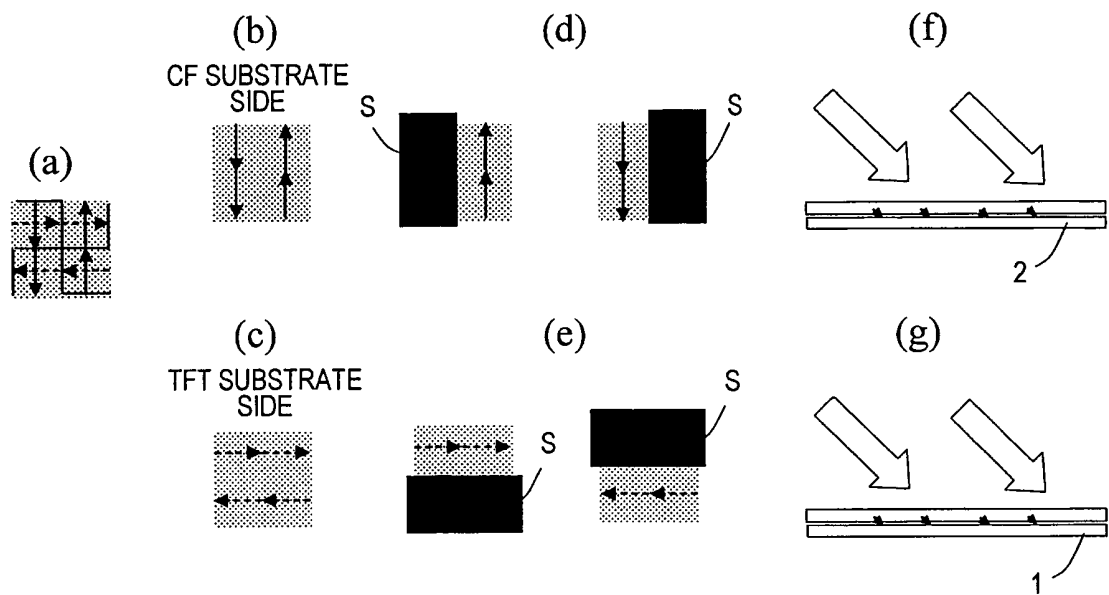

INTERNATIONAL SEARCH REPORT

International application No.

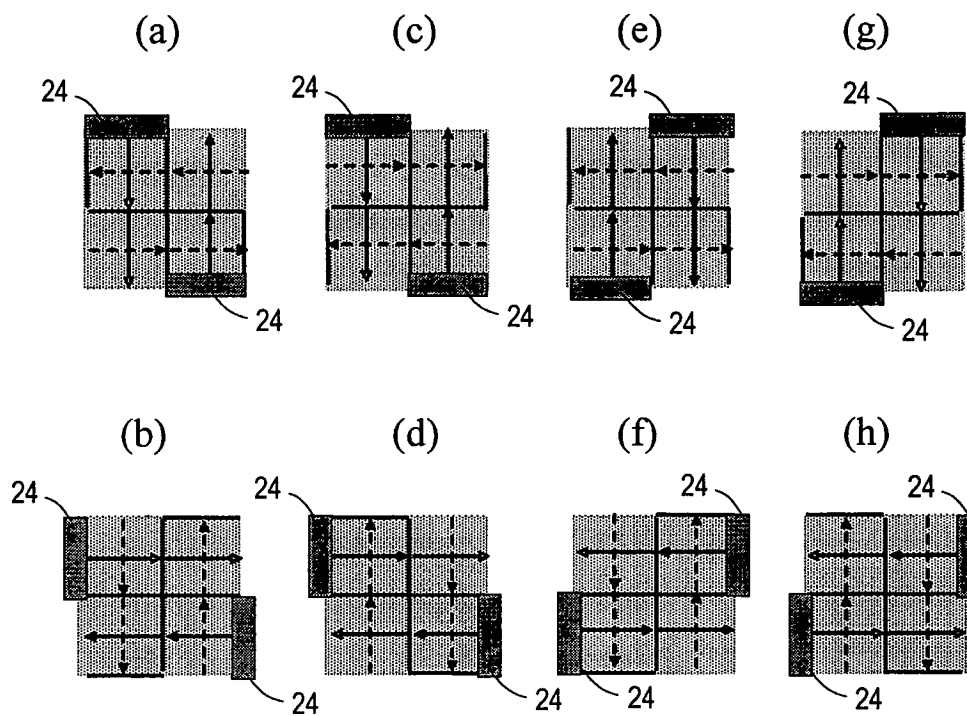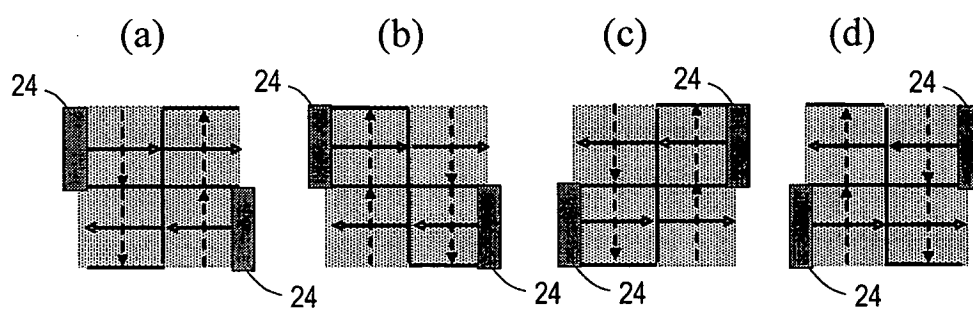PCT/JP2010/002646

A. CLASSIFICATION OF SUBJECT MATTER

G02F1/1337(2006.01) i, G02F1/1333(2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02F1/1337, G02F1/1333

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2010

Kokai Jitsuyo Shinan Koho 1971-2010 Toroku Jitsuyo Shinan Koho 1994-2010

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2008-145700 A (Sharp Corp.), 26 June 2008 (26.06.2008), paragraphs [0109] to [0199]; fig. 11 to 32 (Family: none)	1-16
A	JP 9-281497 A (Toshiba Corp.), 31 October 1997 (31.10.1997), paragraphs [0016] to [0029]; fig. 1 (Family: none)	1-16
A	JP 2004-163746 A (Sanyo Electric Co., Ltd.), 10 June 2004 (10.06.2004), paragraphs [0034] to [0041]; fig. 1 to 5 (Family: none)	1-16

☒ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 May, 2010 (13.05.10)

Date of mailing of the international search report

25 May, 2010 (25.05.10)

Name and mailing address of the ISA/

Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2010/002646

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 8-15678 A (Toshiba Corp.), 19 January 1996 (19.01.1996), paragraphs [0004] to [0020]; fig. 1 to 5 (Family: none)	1-16
A	JP 11-242225 A (Fujitsu Ltd.), 07 September 1999 (07.09.1999), paragraphs [0079] to [0090]; fig. 62, 63, 70, 71 & US 2004/0119924 A1 & EP 1413915 A2 & TW 589505 B & KR 10-0430279 B1 & CN 1550852 A	1-16
A	JP 2002-98967 A (Toshiba Corp.), 05 April 2002 (05.04.2002), paragraphs [0011] to [0020]; fig. 1, 2 (Family: none)	1-16
A	JP 2006-184335 A (Casio Computer Co., Ltd.), 13 July 2006 (13.07.2006), paragraphs [0023] to [0063]; fig. 1 to 5 & US 2006/0139542 A1	1-16
A	JP 2005-258194 A (Fujitsu Display Technologies Corp.), 22 September 2005 (22.09.2005), paragraphs [0030] to [0086]; fig. 2 to 15 & US 2005/0200789 A1	1-16

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 11242225 A [0006]

专利名称(译)	液晶显示装置		
公开(公告)号	EP2420884A4	公开(公告)日	2013-10-16
申请号	EP2010764247	申请日	2010-04-12
[标]申请(专利权)人(译)	夏普株式会社		
申请(专利权)人(译)	夏普株式会社		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	NAKANISHI YOHEI MIZUSAKI MASANOBU KATAYAMA TAKASHI KAWAHIRA YUICHI		
发明人	NAKANISHI, YOHEI MIZUSAKI, MASANOBU KATAYAMA, TAKASHI KAWAHIRA, YUICHI		
IPC分类号	G02F1/1337 G02F1/1333		
CPC分类号	G02F1/133707 G02F2001/13373 G02F2001/133742 G02F2001/133757 G02F2001/133776		
优先权	2009101273 2009-04-17 JP		
其他公开文献	EP2420884A1		
外部链接	Espacenet		

摘要(译)

提供一种具有高显示质量的VA模式液晶显示装置。根据本发明的液晶显示装置包括垂直取向型液晶层;第一基板和第二基板彼此相对,液晶层介于其间;第一电极设置在液晶层侧的第一基板上,第二电极设置在液晶层侧的第二基板上;第一取向膜和第二取向膜设置在第一电极和液晶层之间,第二取向膜设置在第二电极和液晶层之间。液晶显示装置包括位于矩阵中的多个像素区域。所述多个像素区域中的每一个包括第一液晶畴,其中当施加电压时,液晶分子在液晶层的层平面和厚度方向上的中心及其附近的倾斜方向。第一个电极第二电极是预定的第一方向,第二液晶畴,其中这种倾斜方向是预定的第二方向,第三液晶畴,其中这种倾斜方向是预定的第三方向,第四液晶畴是这种倾斜方向是预定的第四方向;第一方向,第二方向,第三方向和第四方向中的任何两个之间的差值近似等于90°的整数倍。第一液晶畴靠近第一电极的至少一部分边缘,并且至少一部分包括第一边缘部分,其中由在其中产生的倾斜电场引起的对准调节力的方位角分量。第一边缘部分的附近和由第二取向膜引起的取向调节力的方位角分量彼此相反。第二基板包括设置在与第一边缘对应的区域中的第一肋一部分。