



(11) **EP 2 523 184 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
12.07.2017 Bulletin 2017/28

(51) Int Cl.:
G09G 3/36 ^(2006.01) **G02F 1/133** ^(2006.01)
G09G 3/20 ^(2006.01) **G09G 5/02** ^(2006.01)

(21) Application number: **11731806.3**

(86) International application number:
PCT/JP2011/050071

(22) Date of filing: **06.01.2011**

(87) International publication number:
WO 2011/083808 (14.07.2011 Gazette 2011/28)

(54) **LIQUID-CRYSTAL DISPLAY AND SIGNAL CONVERTING CIRCUIT**

FLÜSSIGKRISTALLANZEIGE UND SIGNALUMWANDLUNGSSCHALTUNG

DISPOSITIF D'AFFICHAGE À CRISTAUX LIQUIDES ET CIRCUIT DE CONVERSION DE SIGNAL

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(56) References cited:
**WO-A1-98/20682 WO-A1-2007/039957
WO-A1-2008/038568 WO-A1-2009/044827
WO-A1-2009/144896 WO-A2-2007/018969
JP-A- 2005 303 989 US-B1- 6 862 012**

(30) Priority: **07.01.2010 JP 2010002378**

(43) Date of publication of application:
14.11.2012 Bulletin 2012/46

(73) Proprietor: **Sharp Kabushiki Kaisha
Osaka-shi, Osaka 545-8522 (JP)**

(72) Inventors:
• **YOSHIDA, Yuichi
Osaka-shi, Osaka 545 - 8522 (JP)**
• **TOMIZAWA, Kazunari
Osaka-shi, Osaka 545 - 8522 (JP)**
• **MORI, Tomohiko
Osaka-shi, Osaka 545 - 8522 (JP)**

(74) Representative: **Goddard, Heinz J.
Boehmert & Boehmert
Anwaltspartnerschaft mbB
Pettenkoferstrasse 22
80336 München (DE)**

- **WEN ET AL: "Design of relative primary luminances for four-primary displays", DISPLAYS DEVICES, DEMP Publications, TOKYO, JP, vol. 26, no. 4-5, 1 October 2005 (2005-10-01), pages 171-176, XP027766913, ISSN: 0141-9382 [retrieved on 2005-10-01]**
- **BAEK-WOON LEE ET AL: "40.5L: Late-News Paper: TFT-LCD with RGBW Color System", 2003 SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS. BALTIMORE, MD, MAY 20 - 22, 2003; [SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS], SAN JOSE, CA : SID, US, vol. XXXIV, 20 May 2003 (2003-05-20), pages 1212-1215, XP007008335,**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

5 **[0001]** The present invention relates to a liquid crystal display device, and more particularly to a multiprimary liquid crystal display device which performs multicolor display by using four primary colors.

BACKGROUND ART

10 **[0002]** Currently, liquid crystal display devices are used in a variety of applications. In commonly-used liquid crystal display devices, each pixel is composed of three subpixels for displaying three primaries of light, i.e., red, green and blue, whereby multicolor display is achieved.

[0003] However, conventional liquid crystal display devices have a problem in that they can only display colors in a narrow range (referred to as a "color gamut"). Therefore, in order to broaden the color gamut of a liquid crystal display device, there has been proposed a technique which increases the number of primary colors to be used for displaying.

15 **[0004]** For example, WO 2007/148519 A discloses a liquid crystal display device each of whose pixel is composed of four subpixels, i.e., a red subpixel for displaying red, a green subpixel for displaying green, and a blue subpixel for displaying blue, as well as a yellow subpixel for displaying yellow. This liquid crystal display device performs multicolor display by mixing the four primary colors of red, green, blue, and yellow, which are displayed by the four subpixels.

20 **[0005]** By performing display by using four or more primary colors, the color gamut can be made broader than in the case of conventional liquid crystal display devices use three primaries for displaying. In the present specification, liquid crystal display devices which perform display by using four or more primary colors will be referred to as "multiprimary liquid crystal display devices", and liquid crystal display devices which perform display by using three primaries will be referred to as "three-primary liquid crystal display devices".

25 **[0006]** Wen et al., "Design of relative primary luminances for four-primary displays" in Displays, Volume 26, Issues 4-5, Pages 143-214 (October 2005) presents methods designing the relative primary luminances of four-primary displays. A four-primary LED display is taken as an example for showing the methods. The maximum display luminance and color gamut are, respectively, taken as an additional requirement for determining the relative primary luminances of the display. The requirement of the maximum display luminance is taken for a set of available primary luminances. The gamut volume in CIELAB color space is defined for maximizing the display gamut. In practice, the design of the relative primary luminances may be a compromised result of the two additional requirements.

30 Baek-Woon Lee et al., "40.5L: Late-News Paper: TFT-LCD with RGBW Color System", in SID Symposium Digest of Technical Papers, Volume 34, Issue 1, pages 1212-1215, May 2003 discusses a TFT-LCD with four-color subpixels: red, green, blue and white. The addition of the white subpixel greatly enhanced the light efficiency up by 50%. The RGB-to-RGBW mapping algorithm suggested by Baek-Woon Lee et al. is designed so that the hue and saturation remains unchanged from the original color. The result is a very bright display with color characteristic almost identical to RGB LCDs.

SUMMARY OF INVENTION**TECHNICAL PROBLEM**

40 **[0007]** Multiprimary liquid crystal display devices pertain to a recently-proposed technique, and no technique of white point adjustment therefor has been established yet. White point adjustment means a gamma adjustment, which is applied independently to each primary color, for ensuring that a chromaticity point when displaying an achromatic color of an intermediate gray level (i.e., gray) matches the chromaticity point of an achromatic color of the highest grayscale level (i.e., white). Generally speaking, an achromatic color of the highest grayscale level is displayed by allowing all subpixels composing one pixel to be lit at the highest grayscale level (i.e., at the same grayscale level). However, when displaying an achromatic color of an intermediate gray level, even if all subpixels are lit at the same grayscale level that is the grayscale level of the achromatic color which is to be displayed, the chromaticity point of an achromatic color which is actually displayed by that pixel may often deviate from the chromaticity point of the achromatic color of the highest grayscale level. White point adjustment is applied in order to reduce such deviation.

45 **[0008]** As a technique of white point adjustment for a three-primary liquid crystal display device, JP 2005/328386 A discloses a method which, while fixing the grayscale level of green, which has the highest luminance among the three primaries (i.e., predominant in luminance), changes (increases or decreases) the grayscale levels of the other two colors of red and blue, thus to ensure that the chromaticity point of an achromatic color at each grayscale level matches the target, i.e., the chromaticity point of an achromatic color of the highest grayscale level.

55 **[0009]** However, in multiprimary liquid crystal display devices, there is an increased number of primary colors that are

used for displaying (i.e., an increased freedom in applying white point adjustment), and therefore the white point adjustment technique for three-primary liquid crystal display devices is not straightforwardly applicable.

[0010] The present invention has been made in view of the aforementioned problems, and an objective thereof is to provide a white point adjustment technique which is suitably used for a multiprimary liquid crystal display device that performs multicolor display by using four primary colors.

SOLUTION TO PROBLEM

[0011] A liquid crystal display device according to the present invention is a liquid crystal display device defined in the attached set of claims 1 to 7.

[0012] In a preferred embodiment, the at least some gray levels are intermediate gray levels of 60% or more among all gray levels.

[0013] In a preferred embodiment, the at least some gray levels do not include any intermediate gray levels corresponding to a normalized luminance of 0.2 or less.

[0014] In a preferred embodiment, the first subpixel group further includes the red subpixel; and the second subpixel group further includes the green subpixel.

[0015] In a preferred embodiment, when the achromatic colors of the at least some gray levels are to be displayed by the pixel, the display signal supplied from the driving circuit to the blue subpixel is a display signal of a lower grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the red subpixel, and the display signal supplied from the driving circuit to the green subpixel is a display signal of a higher grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the red subpixel.

[0016] In a preferred embodiment, the first subpixel group further includes the green subpixel; and the second subpixel group further includes the red subpixel.

[0017] In a preferred embodiment, when the achromatic colors of the at least some gray levels are to be displayed by the pixel, the display signal supplied from the driving circuit to the blue subpixel is a display signal of a lower grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the green subpixel, and the display signal supplied from the driving circuit to the red subpixel is a display signal of a higher grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the green subpixel.

[0018] In a preferred embodiment, with respect to an achromatic color of a given intermediate gray level among the at least some gray levels being displayed by the pixel, xy chromaticity coordinates of an achromatic color displayed by the pixel when assuming that display signals of the same grayscale level as the given intermediate gray level are supplied to all of the plurality of subpixels is defined as a reference chromaticity point; xy chromaticity coordinates of an achromatic color of a highest grayscale level displayed by the pixel is defined as a target chromaticity point; and a locus of the reference chromaticity point on an xy chromaticity diagram when the grayscale level of the display signal supplied to the blue subpixel is increased or decreased is defined as a B axis; when the target chromaticity point is located above the B axis on the xy chromaticity diagram, the first subpixel group further includes the red subpixel, the second subpixel group further includes the green subpixel, the display signal supplied from the driving circuit to the blue subpixel is a display signal of a lower grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the red subpixel, and the display signal supplied from the driving circuit to the green subpixel is a display signal of a higher grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the red subpixel; and when the target chromaticity point is located below the B axis on the xy chromaticity diagram, the first subpixel group further includes the green subpixel, the second subpixel group further includes the red subpixel, the display signal supplied from the driving circuit to the blue subpixel is a display signal of a lower grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the green subpixel, and the display signal supplied from the driving circuit to the red subpixel is a display signal of a higher grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the green subpixel.

[0019] In a preferred embodiment, the display signals supplied from the driving circuit to the first subpixel group are display signals of the same grayscale level as the grayscale level of an achromatic color displayed by the pixel.

[0020] In a preferred embodiment, the liquid crystal display panel includes a plurality of scanning lines and a plurality of signal lines; and the driving circuit includes a gate driver electrically connected to the plurality of scanning lines, a source driver electrically connected to the plurality of signal lines, and a timing controller that supplies predetermined signals to the gate driver and the source driver.

[0021] In a preferred embodiment, the timing controller includes a signal conversion circuit that converts an image signal corresponding to three primary colors into a multiprimary signal corresponding to four primary colors.

[0022] In a preferred embodiment, the timing controller further includes a test circuit to conduct a white point adjustment.

[0023] A signal conversion circuit according to the present invention is a signal conversion circuit for use in a liquid crystal display device for converting an image signal corresponding to three primary colors into a multiprimary signal corresponding to four primary colors, the liquid crystal display device having a pixel which is defined by a red subpixel,

a green subpixel, a blue subpixel, and a yellow subpixel, wherein, the signal conversion circuit converts the image signal so that, when achromatic colors of at least some gray levels among all gray levels are to be displayed by the pixel, a first subpixel group composed of two subpixels among the red subpixel, the green subpixel, the blue subpixel, and the yellow subpixel perform display at a same grayscale level, and that a second subpixel group composed of other two subpixels perform display at a different grayscale level from that of the first subpixel group; the first subpixel group includes the yellow subpixel; and the second subpixel group includes the blue subpixel.

ADVANTAGEOUS EFFECTS OF INVENTION

[0024] According to the present invention, a white point adjustment technique which is suitably used for a multiprimary liquid crystal display device that performs multicolor display by using four primary colors is provided.

BRIEF DESCRIPTION OF DRAWINGS

[0025]

[FIG. 1] A block diagram schematically showing a liquid crystal display device **100** according to a preferred embodiment of the present invention.

[FIG. 2] A diagram showing an exemplary pixel construction of the liquid crystal display device **100**.

[FIG. 3] A diagram showing an exemplary pixel construction of the liquid crystal display device **100**.

[FIG. 4] A block diagram schematically showing the liquid crystal display device **100** according to a preferred embodiment of the present invention.

[FIG. 5] An xy chromaticity diagram showing examples of chromaticity points of achromatic colors from grayscale level 120 to grayscale level 255 (highest grayscale level) of the liquid crystal display device **100**.

[FIG. 6] A graph schematically showing directions in which a chromaticity point may change when the grayscale levels of a red subpixel R, a green subpixel G, a blue subpixel B, and a yellow subpixel Ye are each increased or decreased, where the origin is defined at a chromaticity point of an achromatic color.

[FIG. 7] A diagram showing examples of white point adjustment in the case where a target chromaticity point is located on the G+ side of the B axis.

[FIG. 8] A diagram showing examples of white point adjustment in the case where a target chromaticity point is located on the G- side of the B axis.

[FIG. 9] An xy chromaticity diagram showing a chromaticity point prior to white point adjustment (a chromaticity point of an achromatic color of grayscale level 120) and a target chromaticity point (a chromaticity point of an achromatic color of grayscale level 255) in a three-primary liquid crystal display device.

[FIG. 10] An xy chromaticity diagram showing a chromaticity point prior to white point adjustment (a chromaticity point of an achromatic color of grayscale level 120) and a target chromaticity point (a chromaticity point of an achromatic color of grayscale level 255) in the liquid crystal display device **100**.

[FIG. 11] A graph showing a relationship, in the liquid crystal display device **100**, between an input grayscale level ($R=G=B$) and a normalized output luminance of an achromatic color which is displayed by a pixel, in a state prior to white point adjustment.

[FIG. 12] A graph showing a relationship, in the liquid crystal display device **100** in a state prior to white point adjustment, between an input grayscale level ($R=G=B$) and chromaticities x and y of an achromatic color which is displayed by a pixel.

[FIG. 13] A graph showing a relationship, in the liquid crystal display device **100** after a white point adjustment is applied by changing the grayscale levels for red and blue, between a grayscale level of an achromatic color serving as a reference and chromaticities x and y of an achromatic color which is displayed by a pixel.

[FIG. 14] A graph showing a relationship, in the liquid crystal display device **100**, between a grayscale level of an achromatic color serving as a reference and amounts of change in the grayscale levels for red and blue.

[FIG. 15] A graph showing a relationship, in the liquid crystal display device **100** before and after a white point adjustment is applied by changing the grayscale levels for red and blue, between a grayscale level of an achromatic color serving as a reference and a normalized output luminance of an achromatic color which is displayed by a pixel.

[FIG. 16] A graph showing a relationship, in the liquid crystal display device **100** after a white point adjustment is applied by changing the grayscale levels for green and blue, between a grayscale level of an achromatic color serving as a reference and chromaticities x and y of an achromatic color which is displayed by a pixel.

[FIG. 17] A graph showing a relationship, in the liquid crystal display device **100**, between a grayscale level of an achromatic color serving as a reference and amounts of change in the grayscale levels for green and blue.

[FIG. 18] A graph showing a relationship, in the liquid crystal display device **100** before and after a white point adjustment is applied by changing the grayscale levels for green and blue, between a grayscale level of an achromatic

color serving as a reference and a normalized output luminance of an achromatic color which is displayed by a pixel.

[FIG. 19] An xy chromaticity diagram showing a chromaticity point prior to white point adjustment (a chromaticity point of an achromatic color of grayscale level 120) and a target chromaticity point (a chromaticity point of an achromatic color of grayscale level 255) in the liquid crystal display device **100**.

[FIG. 20] A graph showing a relationship, in the liquid crystal display device **100** after a white point adjustment is applied by changing the grayscale levels for green and blue, between a grayscale level of an achromatic color serving as a reference and chromaticities x and y of an achromatic color which is displayed by a pixel.

[FIG. 21] A graph showing a relationship, in the liquid crystal display device **100**, between a grayscale level of an achromatic color serving as a reference and amounts of change in the grayscale levels for green and blue.

[FIG. 22] A graph showing a relationship, in the liquid crystal display device **100** before and after a white point adjustment is applied by changing the grayscale levels for green and blue, between a grayscale level of an achromatic color serving as a reference and a normalized output luminance of an achromatic color which is displayed by a pixel.

[FIG. 23] A graph showing a relationship, in the liquid crystal display device **100** after a white point adjustment is applied by changing the grayscale levels for red and blue, between a grayscale level of an achromatic color serving as a reference and chromaticities x and y of an achromatic color which is displayed by a pixel.

[FIG. 24] A graph showing a relationship, in the liquid crystal display device **100**, between a grayscale level of an achromatic color serving as a reference and amounts of change in the grayscale levels for red and blue.

[FIG. 25] A graph showing a relationship, in the liquid crystal display device **100** before and after a white point adjustment is applied by changing the grayscale levels for red and blue, between a grayscale level of an achromatic color serving as a reference and a normalized output luminance of an achromatic color which is displayed by a pixel.

[FIG. 26] A block diagram showing a specific exemplary construction of a timing controller **30** included in a driving circuit **20** of the liquid crystal display device **100**.

[FIG. 27] A block diagram showing a specific exemplary construction of a test circuit **32** included in the timing controller **30**.

DESCRIPTION OF EMBODIMENTS

[0026] Hereinafter, embodiments of the present invention will be described with reference to the drawings. Note that the present invention is not limited to the following embodiments.

[0027] FIG. 1 shows a liquid crystal display device **100** according to the present embodiment. As shown in FIG. 1, the liquid crystal display device **100** is a multiprimary liquid crystal display device which includes a liquid crystal display panel **10** and a driving circuit **20**, and which performs multicolor display by using four primary colors.

[0028] The liquid crystal display panel **10** includes a plurality of pixels arranged in a matrix array. Each pixel is defined by a plurality of subpixels. FIG. 2 shows an exemplary pixel construction of the liquid crystal display panel **10**. In the example shown in FIG. 2, the plurality of subpixels defining one pixel are a red subpixel R to display red, a green subpixel G to display green, a blue subpixel B to display blue, and a yellow subpixel Ye to display yellow.

[0029] Although FIG. 2 illustrates an example where the red subpixel R, green subpixel G, blue subpixel B, and yellow subpixel Ye are disposed in this order from the left side in the pixel, the arrangement of the plurality of subpixels is not limited thereto. The red subpixel R, green subpixel G, blue subpixel B, and yellow subpixel Ye may be arranged in any order.

[0030] Moreover, although FIG. 2 illustrates an example where the plurality of subpixels are in a 1 row $\times$ 4 column arrangement within the pixel, the arrangement of the plurality of subpixels is not limited thereto. For example, as shown in FIG. 3, the plurality of subpixels may be in a 2 row $\times$ 2 column arrangement within the pixel.

[0031] Based on an externally-input image signal, the driving circuit **20** supplies display signals to the plurality of subpixels of the liquid crystal display panel **10**. As shown in FIG. 1, the driving circuit **20** in the present embodiment includes a timing controller **30** for receiving the image signal which is input to the driving circuit **20** and generating a predetermined signal, and an LCD driver **40** for driving the liquid crystal display panel **10** based on the signal which is output from the timing controller **30**.

[0032] As shown in FIG. 4, the LCD driver **40** includes a gate driver **41** which is electrically connected to a plurality of scanning lines **GL** of the liquid crystal display panel **10** and a source driver **42** which is electrically connected to a plurality of signal lines **SL** of the liquid crystal display panel **10**. Predetermined signals are supplied from the timing controller **30** to the gate driver **41** and the source driver **42**.

[0033] The present embodiment illustrates an example, as shown in FIG. 1, where an image signal corresponding to three primary colors is externally input to the driving circuit **20**. Therefore, the timing controller **30** includes a signal conversion circuit (not shown in FIG. 1 and FIG. 4) that converts the image signal corresponding to three primary colors into a multiprimary signal corresponding to four primary colors. Moreover, the timing controller **30** also includes a test circuit to conduct a white point adjustment (also not shown in FIG. 1 and FIG. 4). The specific construction of the timing controller **30** will be described in detail later.

[0034] In the liquid crystal display device **100** of the present embodiment, when achromatic colors of at least some gray levels (i.e., gray) among all gray levels are to be displayed by a pixel, the display signals which are supplied from the driving circuit **20** to a subpixel group composed of two subpixels (referred to as a "first subpixel group") among the four subpixels (red subpixel R, green subpixel G, blue subpixel B, and yellow subpixel Ye) are display signals of the same grayscale level. Specifically, the display signals which are supplied to the first subpixel group from the driving circuit **20** are display signals of the same grayscale level as the grayscale level of an achromatic color which is displayed by the pixel. On the other hand, the display signals which are supplied from the driving circuit **20** to a subpixel group composed of the other two subpixels (referred to as a "second subpixel group") are display signals of a different grayscale level(s) from the grayscale level of the display signals which are supplied to the first subpixel group. The first subpixel group at least includes the yellow subpixel Ye. The second subpixel group at least includes the blue subpixel B.

[0035] Thus, in the liquid crystal display device **100** of the present embodiment, for achromatic colors of at least some gray levels, while the grayscale levels of the two subpixels including the yellow subpixel Ye (first subpixel group) are fixed (or more specifically, matched to the grayscale level of an achromatic color which is to be displayed by the pixel), the grayscale levels of the other two subpixels (second subpixel group) including the blue subpixel B are increased or decreased (i.e., made different from the grayscale level of an achromatic color which is to be displayed by the pixel), whereby a white point adjustment is applied.

[0036] In the case of applying a white point adjustment for a liquid crystal display device which performs multicolor display by using four primary colors, a technique of independently adjusting the grayscale levels of the four subpixels (i.e., increasing or decreasing the grayscale levels of all subpixels) might be possible, for example; however, such a technique would be very complicated. The present embodiment's technique of fixing the grayscale levels of two colors and adjusting (increasing or decreasing) the grayscale level of the other two colors have common ground with the conventional technique described with reference to Patent Document 2 (a white point adjustment technique for three-primary liquid crystal display devices) in that the grayscale levels of two colors are adjusted, which provides compatibility in terms of the jigs used and the operation procedure, whereby good work efficiency is obtained.

[0037] Moreover, in the technique of the present embodiment, the yellow subpixel Ye is included in the first subpixel group, whereas the blue subpixel B is included in the second subpixel group. Thus fixing the grayscale level of the yellow subpixel Ye and increasing or decreasing the grayscale level of the blue subpixel B is preferable for the reasons described below.

[0038] In a three-primary liquid crystal display device, as has already been described, green has the highest luminance among the primary colors that are used for displaying. On the other hand, in a liquid crystal display device which performs multicolor display by using four primary colors of red, green, blue, as well as yellow, it is yellow that has the highest luminance. Therefore, by fixing the grayscale level of the yellow subpixel Ye, the influences of white point adjustment on luminance (decrease in luminance) can be reduced.

[0039] Table 1 shows exemplary tristimulus values XYZ of the primary colors that are used for displaying by a three-primary liquid crystal display device, i.e., red, green, and blue when the red subpixel, the green subpixel, and the blue subpixel are respectively lit at the maximum grayscale level. Table 2 shows exemplary tristimulus values XYZ of the primary colors that are used for displaying by the liquid crystal display device **100** of the present embodiment, i.e., red, green, blue, and yellow when the red subpixel R, the green subpixel G, the blue subpixel B, and the yellow subpixel Ye are respectively lit at the maximum grayscale level.

[Table 1]

	X	Y	Z
R	0.394324	0.208084	0.004755
G	0.343459	0.662361	0.171251
B	0.254644	0.129554	1.385793

[Table 2]

	X	Y	Z
R	0.2381	0.1253	0.0104
G	0.1453	0.3421	0.0919
B	0.2721	0.1288	1.5043
Ye	0.2971	0.4038	0.0147

[0040] Among the tristimulus values, the Y value represents the luminance (lightness) of each primary color. It can be seen from Table 1 that, in a three-primary liquid crystal display device, the Y value of green is the highest, so that green is predominant in terms of luminance. On the other hand, it can be seen from Table 2 that, in the liquid crystal display device **100**, the Y value of yellow is the highest, so that yellow has the highest luminance (lightness).

[0041] Thus, from the standpoint of influences on luminance, in the liquid crystal display device **100** performing multicolor display by using four primary colors, it is preferable to fix the grayscale level of the yellow subpixel Ye.

[0042] Next, the tendency when the grayscale level of each subpixel is increased or decreased will be described. FIG. 5 shows example of chromaticity points (xy chromaticity coordinates) of achromatic colors from grayscale level 120 to grayscale level 255 (highest grayscale level), in the case where the liquid crystal display device **100** has 256 grayscale levels.

[0043] As can be seen from FIG. 5, a chromaticity point of an achromatic color of grayscale level 120 differs from the chromaticity point of an achromatic color of the highest grayscale level. In order to allow them to match, it is necessary to shift the chromaticity point of the achromatic color of grayscale level 120 in the upper right direction (shown by an arrow) in FIG. 5.

[0044] FIG. 6 schematically shows directions in which a chromaticity point may change when the grayscale levels of a red subpixel R, a green subpixel G, a blue subpixel B, and a yellow subpixel Ye are each increased or decreased, where the origin of the graph is defined at a chromaticity point of an achromatic color. In FIG. 6, "+" indicates increasing the grayscale level, whereas "-" indicates decreasing the grayscale level. For example, if the grayscale level of the red subpixel R is increased, the chromaticity point will change in the R+ direction; if the grayscale level of the red subpixel R is decreased, the chromaticity point will change in the R- direction.

[0045] As can be seen from FIG. 6, the direction of chromaticity change (B+ direction) when increasing the grayscale level of the blue subpixel B and the direction of chromaticity change (Ye- direction) when decreasing the grayscale level of the yellow subpixel Ye are substantially the same; and the direction of chromaticity change (B-direction) when decreasing the grayscale level of the blue subpixel B and the direction of chromaticity change (Ye+ direction) when increase the grayscale level of the yellow subpixel Ye are substantially the same. This is because the relationship between blue and yellow is that of complementary colors. Therefore, chromaticity changes along substantially the same axis when the grayscale level of blue is increased or decreased and when the grayscale level of yellow is increased or decreased. Therefore, when both blue and yellow are selected as the two colors whose grayscale levels are to be adjusted, it is difficult to match the chromaticity point of the chromaticity point of an achromatic color of an intermediate gray level with the chromaticity point of an achromatic color of the highest grayscale level. For this reason, it may be preferable to fix the grayscale level of one of the blue subpixel B and the yellow subpixel Ye (i.e., while adjust the grayscale level of the other), or the grayscale level of both are fixed (i.e., the grayscale level of neither is adjusted). However, as has already been described, it is preferable to fix the grayscale level of the yellow subpixel Ye from the standpoint of influences on luminance; therefore, the two prospective subpixels whose grayscale levels are to be adjusted may be a combination of the red subpixel R and the green subpixel G, a combination of the red subpixel R and the blue subpixel B, or a combination of the green subpixel G and the blue subpixel B.

[0046] Now, FIG. 5 will be referred to again. As shown in FIG. 5, in the xy chromaticity diagram, there is a tendency for the chromaticity point of an achromatic color of an intermediate gray level to deviate in an oblique direction from a target chromaticity point (the chromaticity point of an achromatic color of the highest grayscale level). Therefore, it will be more efficient to increase or decrease the grayscale level of the blue subpixel B or the yellow subpixel Ye, rather than the red subpixel R, whose direction of chromaticity change when its grayscale level increased or decreased is close to the horizontal direction, or the green subpixel G, that of which is close to the vertical direction.

[0047] Thus, by taking all of the above conditions into consideration, the two prospective subpixels whose grayscale levels are to be adjusted may be a combination of the red subpixel R and the blue subpixel B or a combination of the green subpixel G and the blue subpixel B. In other words, the second subpixel group is either composed of the blue subpixel B and the red subpixel R, or composed of the blue subpixel B and the green subpixel B.

[0048] As described above, by including the yellow subpixel Ye in the first subpixel group and including the blue subpixel B in the second subpixel group, it becomes possible to reduce influences on luminance, and efficiently apply a white point adjustment. Note that it is not necessary to apply white point adjustment at all gray levels. For example, at lower grayscale levels, the luminance that each subpixel can exhibit is in itself low (i.e., the grayscale level can only be increased or decreased in a narrow breadth); therefore, even if white point adjustment is applied, the chromaticity point may not be brought sufficiently close to the target chromaticity point. Moreover, at lower grayscale levels, there is little influence on image quality because of low luminance. Therefore, to begin with, there is no need to apply white point adjustment at intermediate gray levels corresponding to a normalized luminance of 0.2 or less. However, from the standpoint of realizing adequate color management, among all gray levels, white point adjustment is preferably applied at intermediate gray levels of 60% or more, more preferably at intermediate gray levels of 80% or more, and still more preferably at intermediate gray levels of 85% or more.

[0049] Now, the criteria as to which one of the red subpixel R and the green subpixel G is to be selected as the subpixel

other than the blue subpixel B composing the second subpixel group will be described.

[0050] In the case where an achromatic color of a given intermediate gray level is displayed by a pixel, the xy chromaticity coordinates of an achromatic color which is displayed by the pixel when assuming that display signals of the same grayscale level as the given intermediate gray level are supplied to all of the plurality of subpixels will be defined as a "reference chromaticity point (pre-adjustment chromaticity point)". At this time, the direction of chromaticity change when the grayscale level of the display signal supplied to the blue subpixel B is increased or decreased, i.e., the locus of the reference chromaticity point on the xy chromaticity diagram, will be referred to as a "B axis". The criteria as to which one of the red subpixel R and the green subpixel G is to be selected as the subpixel other than the blue subpixel B composing the second subpixel group may be whether the target chromaticity point (the xy chromaticity coordinates of an achromatic color of the highest grayscale level displayed by the pixel) is above the B axis (i.e., the G+ side) or below the B axis (i.e., the G-side) on the xy chromaticity diagram.

[0051] FIG. 7 shows examples of white point adjustment in the case where a target chromaticity point is located on the G+ side (upper side) of the B axis. In this case, if the blue subpixel B and the green subpixel G are selected as the second subpixel group, then the grayscale level of the blue subpixel B is to be decreased (the solid-line arrow B- in the figure), and also the grayscale level of the green subpixel G is to be increased (the solid-line arrow G+ in the figure). On the other hand, if the blue subpixel B and the red subpixel R are selected as the second subpixel group, then the grayscale level of the blue subpixel B is to be decreased (the dotted-line arrow B- in the figure), and also the grayscale level of the red subpixel R is to be decreased (the dotted-line arrow R- in the figure). Rather than decreasing the grayscale levels of both of the two subpixels of the second subpixel group (i.e., the latter adjustment), decreasing the grayscale level of one of the two subpixels of the second subpixel group while increasing the grayscale level of the other (i.e., the former adjustment) will incur a smaller decrease in luminance, which is preferable. Moreover, the former adjustment requires smaller amounts of adjustment than the latter adjustment, which is also preferable.

[0052] Thus, in the case where the target chromaticity point is located on the G+ side (upper side) of the B axis, from the standpoint of luminance change and amount of adjustment, it is preferable that the green subpixel G is included in the second subpixel group in addition to the blue subpixel B (i.e., the red subpixel R is included in the first subpixel group in addition to the yellow subpixel Ye). At this time, the display signal supplied from the driving circuit 20 to the blue subpixel B is a display signal of a lower grayscale level than the grayscale level of the display signals supplied to the yellow subpixel Ye and the red subpixel R. Moreover, the display signal supplied to the green subpixel G from the driving circuit 20 is a display signal of a higher grayscale level than the grayscale level of the display signals supplied to the yellow subpixel Ye and the red subpixel R.

[0053] FIG. 8 shows examples of white point adjustment in the case where a target chromaticity point is located on the G- side (lower side) of the B axis. In this case, if the blue subpixel B and the green subpixel G are selected as the second subpixel group, then the grayscale level of the blue subpixel B is to be decreased (the solid-line arrow B- in the figure), and also the grayscale level of the green subpixel G is to be decreased (the solid-line arrow G- in the figure). On the other hand, if the blue subpixel B and the red subpixel R are selected as the second subpixel group, then the grayscale level of the blue subpixel B is decreased (the dotted-line arrow B- in the figure), and also the grayscale level of the red subpixel R is to be increased (the dotted-line arrow R+ in the figure). Rather than decreasing the grayscale levels of both of the two subpixels of the second subpixel group (i.e., the former adjustment), decreasing the grayscale level of one of the two subpixels of the second subpixel group while increasing the grayscale level of the other (i.e., the latter adjustment) will incur a smaller decrease in luminance, which is preferable. Moreover, the latter adjustment requires smaller amounts of adjustment than the former adjustment, which is also preferable.

[0054] Thus, in the case where the target chromaticity point is located on the G- side (lower side) of the B axis, from the standpoint of luminance change and amount of adjustment, it is preferable that the red subpixel R is included in the second subpixel group in addition to the blue subpixel B (i.e., the green subpixel G is included in the first subpixel group in addition to the yellow subpixel Ye). At this time, the display signal supplied from the driving circuit 20 to the blue subpixel B is a display signal of a lower grayscale level than the grayscale level of the display signals supplied to the yellow subpixel Ye and the green subpixel G. Moreover, the display signal supplied from the driving circuit 20 to the red subpixel R is a display signal of a higher grayscale level than the grayscale level of the display signals supplied to the yellow subpixel Ye and the green subpixel G.

[0055] Note that the target chromaticity point may not always be located on the same side of the B axis for achromatic colors of all gray levels. In other words, depending on the specifications of the liquid crystal display device 100, the target chromaticity point may be located on the G+ side of the B axis for an achromatic color of an intermediate gray level, and the target chromaticity point may be located on the G- side of the B axis for an achromatic color of another intermediate gray level. In this case, for all of the intermediate gray levels to which white point adjustment is applied, the relative positioning between the target chromaticity point and the B axis may be determined, and the second subpixel group may be selected for each intermediate gray level. However, in order to facilitate white point adjustment, the same selection of the second subpixel group may be universally adopted for all of the intermediate gray levels to which white point adjustment is applied. For example, the relative positioning between the target chromaticity point and the B axis may

be determined at a specific grayscale level (e.g., at grayscale level 120 shown in FIG. 5), and a second subpixel group may be selected based on this result. Alternatively, an average of deviation between the target chromaticity point and the B axis may be taken for all of the intermediate gray levels to which white point adjustment is applied, and a second subpixel group may be selected; or, the relative positioning between the target chromaticity point and the B axis may be determined for all of the intermediate gray levels to which white point adjustment is applied, and a second subpixel group may be selected according to the majority.

[0056] Next, results of verifying the white point adjustment technique of the present embodiment through calculations will be discussed.

[0057] First, it will be considered how the chromaticity point moves when the grayscale level of each primary color is changed (increased or decreased). Specifically, influences on the chromaticity point will be discussed based on the XYZ values of each chromaticity point. Assuming that changes in the chromaticity point are minute changes Δx and Δy , then Δx and Δy are expressed by eqs. (1) and (2) below by using the XYZ values.

[math. 1]

$$\begin{aligned}
 \Delta x &= \frac{X + \Delta X}{X + Y + Z + \Delta X + \Delta Y + \Delta Z} - \frac{X}{X + Y + Z} \\
 &= \frac{X + \Delta X}{X + Y + Z \left(1 + \frac{\Delta X + \Delta Y + \Delta Z}{X + Y + Z} \right)} - \frac{X}{X + Y + Z} \\
 &\cong \frac{X + \Delta X}{X + Y + Z} \left(1 - \frac{\Delta X + \Delta Y + \Delta Z}{X + Y + Z} \right) - \frac{X}{X + Y + Z} \\
 &= \frac{1}{(X + Y + Z)^2} [(X + Y + Z)\Delta X - (\Delta X + \Delta Y + \Delta Z)X] \quad \dots (1)
 \end{aligned}$$

[math. 2]

$$\begin{aligned}
 \Delta y &= \frac{Y + \Delta Y}{X + Y + Z + \Delta X + \Delta Y + \Delta Z} - \frac{Y}{X + Y + Z} \\
 &= \frac{Y + \Delta Y}{X + Y + Z \left(1 + \frac{\Delta X + \Delta Y + \Delta Z}{X + Y + Z} \right)} - \frac{Y}{X + Y + Z} \\
 &\cong \frac{Y + \Delta Y}{X + Y + Z} \left(1 - \frac{\Delta X + \Delta Y + \Delta Z}{X + Y + Z} \right) - \frac{Y}{X + Y + Z} \\
 &= \frac{1}{(X + Y + Z)^2} [(X + Y + Z)\Delta Y - (\Delta X + \Delta Y + \Delta Z)Y] \quad \dots (2)
 \end{aligned}$$

[0058] Now, the chromaticity point of an achromatic color which is displayed when the grayscale levels of all primary colors are made equal (i.e., an achromatic color prior to white point adjustment) at an arbitrary intermediate gray level will be considered. Assuming XYZ values (X_R, Y_R, Z_R) for red, XYZ values (X_G, Y_G, Z_G) for green, XYZ values (X_B, Y_B, Z_B) for blue, and XYZ values (X_Y, Y_Y, Z_Y) for yellow at an arbitrary intermediate gray level, and a normalized luminance K of an achromatic color at the arbitrary intermediate gray level, then the XYZ values (X_0, Y_0, Z_0) of the chromaticity point of the achromatic color prior to white point adjustment is expressed by eqs. (3), (4), and (5) below.

$$X_0 = K (X_R + X_G + X_B + X_Y) \quad \dots (3)$$

$$Y_0 = K (Y_R + Y_G + Y_B + Y_Y) \quad \dots (4)$$

$$Z_0 = K (Z_R + Z_G + Z_B + Z_Y) \quad \dots (5)$$

[0059] By denoting $(X_R + X_G + X_B + X_Y)$ as X_{RGBY} , $(Y_R + Y_G + Y_B + Y_Y)$ as Y_{RGBY} , and $(Z_R + Z_G + Z_B + Z_Y)$ as Z_{RGBY} , eqs. (3)', (4)', and (5)' below are derived from eqs. (3), (4), and (5) above.

$$X_0 = K X_{\text{RGBY}} \quad \dots (3)'$$

$$Y_0 = K Y_{\text{RGBY}} \quad \dots (4)'$$

$$Z_0 = K Z_{\text{RGBY}} \quad \dots (5)'$$

[0060] Now, if the grayscale level of red is increased so that red has a normalized luminance of $K+k$, then the X value will be $X_1 = X_0 + kX_R$. Therefore, the change in the X value is expressed as $\Delta X = X_1 - X_0 = kX_R$. Similarly, the change ΔY in the Y value is expressed as $\Delta Y = kY_R$, and the change ΔZ in the Z value is expressed as $\Delta Z = kZ_R$. Therefore, a gradient $\Delta y / \Delta x$ of the minute changes is expressed by eq. (6) below.

[math. 3]

$$\begin{aligned} \frac{\Delta y}{\Delta x} &= \frac{k(X_0 + Y_0 + Z_0)Y_R - k(X_R + Y_R + Z_R)Y_0}{k(X_0 + Y_0 + Z_0)X_R - k(X_R + Y_R + Z_R)X_0} \\ &= \frac{K(X_{\text{RGBY}} + Y_{\text{RGBY}} + Z_{\text{RGBY}})Y_R - K(X_R + Y_R + Z_R)Y_{\text{RGBY}}}{K(X_{\text{RGBY}} + Y_{\text{RGBY}} + Z_{\text{RGBY}})X_R - K(X_R + Y_R + Z_R)X_{\text{RGBY}}} \\ &= \frac{(X_{\text{RGBY}} + Y_{\text{RGBY}} + Z_{\text{RGBY}})Y_R - (X_R + Y_R + Z_R)Y_{\text{RGBY}}}{(X_{\text{RGBY}} + Y_{\text{RGBY}} + Z_{\text{RGBY}})X_R - (X_R + Y_R + Z_R)X_{\text{RGBY}}} \quad \dots (6) \end{aligned}$$

[0061] It is assumed that: the chromaticity point of the achromatic color prior to white point adjustment has a deviation $(\Delta X_{\text{mix}}, \Delta Y_{\text{mix}})$ from the target chromaticity point; and, for the two colors whose grayscale levels are selected for adjustment, the minute increases or decreases $(\Delta x, \Delta y)$ in chromaticity caused by increasing or decreasing their grayscale levels are (k_x, k_y) , (l_x, l_y) , respectively. If the chromaticity point of the achromatic color is to be matched to the target chromaticity point by increasing or decreasing the first color by a rate of α , and the second color by a rate of β , then eq. (7) below holds.

[math. 4]

$$(\Delta x_{\text{mix}}, \Delta y_{\text{mix}}) = (\alpha, \beta) \begin{pmatrix} k_x & k_y \\ l_x & l_y \end{pmatrix} \quad \dots (7)$$

[0062] From eq. (7) above, α and β are expressed by eqs. (8) and (9) below. However, in eqs. (8) and (9), $k = k_y / k_x$, $l = l_y / l_x$.

[math. 5]

$$\alpha = \frac{1}{k_x} \left(\frac{l \Delta x - \Delta y}{l - k} \right) \quad \dots (8)$$

[math. 6]

$$\beta = \frac{1}{\ell_x} \left(\frac{-k\Delta x + \Delta y}{\ell - k} \right) \dots (9)$$

[0063] In the manner described above, the rates (α, β) by which the two colors for adjustment are to be changed, so that the chromaticity point of an achromatic color of an intermediate gray level is matched to the target chromaticity point, are calculated.

[0064] Hereinafter, results of verifying the white point adjustment technique by calculating the aforementioned rates (α, β) for a three-primary liquid crystal display device and the liquid crystal display device **100** of the present embodiment will be described.

[0065] Table 3 shows α and β , in a three-primary liquid crystal display device of specifications as shown in Table 1, for matching the chromaticity point of an achromatic color of grayscale level 120 $(x, y) = (0.2569, 0.2497)$ to the chromaticity point $(x, y) = (0.2803, 0.2827)$ of an achromatic color of the highest grayscale level. Table 3 illustrates rates α and β by which the two primary colors are to be changed, a gross change, and a target luminance error, with respect to the three cases where the two primary colors for adjustment are red and green, red and blue, or green and blue. A gross change is a measure of the amounts of change for two colors, as represented by $(\alpha^2 + \beta^2)^{1/2}$. A target luminance error is a luminance difference between the unadjusted achromatic color and the adjusted achromatic color.

[Table 3]

primary colors for adjustment	α	β	gross change	target luminance error
red · green	0.027648	0.024925	0.037224	0.022262
red · blue	0.002724	-0.02492	0.025073	0.013245
green · blue	-0.00272	-0.02765	0.027782	0.055752

[0066] It can be seen from Table 3 that, in terms of gross change and target luminance error, it is most preferable to adjust the grayscale levels of red and blue while fixing the grayscale level of green, as has been conventionally done.

[0067] FIG. 9 shows a chromaticity point prior to white point adjustment (the chromaticity point of an achromatic color of grayscale level 120) and a target chromaticity point (the chromaticity point of an achromatic color of grayscale level 255) in this three-primary liquid crystal display device. The graph of FIG. 9 shows, in addition to the B axis representing a direction of chromaticity change when the grayscale level of blue is increased or decreased, an R axis representing a direction of chromaticity change when the grayscale level of red is increased or decreased and a G axis representing a direction of chromaticity change when the grayscale level of green is increased or decreased.

[0068] As shown in FIG. 9, when the two primary colors for adjustment are green and blue, the adjustments for the two colors will both involve decreasing the grayscale level. On the other hand, when the two primary colors for adjustment are red and blue, the adjustments will involve decreasing the grayscale level for blue but increasing the grayscale level for red. Thus, it can also be seen from FIG. 9 that it is preferable to adjust the grayscale levels of red and blue.

[0069] Table 4 shows α and β , in the liquid crystal display device **100** of specifications as shown in Table 2, for matching the chromaticity point of an achromatic color of grayscale level 120 $(x, y) = (0.2345, 0.2147)$ to the chromaticity point $(x, y) = (0.2694, 0.2858)$ of an achromatic color of the highest grayscale level. Table 4 illustrates rates α and β by which the two primary colors are to be changed, a gross change, and a target luminance error, with respect to the six cases where the two primary colors for adjustment are red and green, red and blue, red and yellow, green and blue, green and yellow, or blue and yellow.

[Table 4]

primary colors for adjustment	α	β	gross change	target luminance error
red · green	0.077225	0.101614	0.127629	0.044444
red · blue	-0.01452	-0.04995	0.052021	-0.00825
red · yellow	-0.00497	0.098257	0.098383	0.039048
green · blue	0.016081	-0.04205	0.045018	8.63E-05
green · yellow	0.006149	0.092311	0.092516	0.039375

(continued)

primary colors for adjustment	α	β	gross change	target luminance error
blue · yellow	0.026034	0.149466	0.151716	0.0637

[0070] It can be seen from Table 4 that, in terms of gross change and target luminance error, it is most preferable to adjust the grayscale levels of green and blue while fixing the grayscale levels of yellow and red. It can also be seen from Table 4 that adjusting the grayscale level of yellow will not provide favorable results in terms of either gross change or target luminance error.

[0071] FIG. 10 shows a chromaticity point prior to white point adjustment (the chromaticity point of an achromatic color of grayscale level 120) and a target chromaticity point (the chromaticity point of an achromatic color of grayscale level 255) in the liquid crystal display device 100 of the above specifications. The graph of FIG. 10 shows, in addition to the B axis, the R axis, and the G axis, a Ye axis representing a direction of chromaticity change when the grayscale level of yellow is increased or decreased.

[0072] As shown in FIG. 10, when the two primary colors for adjustment are red and blue, the adjustments for the two colors will both involve decreasing the grayscale level. On the other hand, when the two primary colors for adjustment are green and blue, the adjustments will involve decreasing the grayscale level for blue but increasing the grayscale level for green. Thus, it can also be seen from FIG. 10 that it is preferable to adjust the grayscale levels of green and blue.

[0073] FIG. 11 shows a relationship, in the liquid crystal display device 100 of the above specifications in a state prior to white point adjustment, between an input grayscale level (R=G=B) and a normalized output luminance of an achromatic color which is displayed by a pixel. As shown in FIG. 11, the normalized output luminance after gamma correction matches the target gamma.

[0074] FIG. 12 shows a relationship, in the liquid crystal display device 100 of the above specifications in a state prior to white point adjustment, between an input grayscale level (R=G=B) and chromaticities x and y of an achromatic color which is displayed by a pixel. It can be seen from FIG. 12 that the chromaticities x and y of an achromatic color of an intermediate gray level are deviated from the chromaticities x and y of an achromatic color of the highest grayscale level.

[0075] FIG. 13 shows a relationship, in the liquid crystal display device 100 of the above specifications after a white point adjustment is applied by changing the grayscale levels for red and blue, between a grayscale level of an achromatic color serving as a reference and chromaticities x and y of an achromatic color which is displayed by a pixel. For comparison sake, FIG. 13 also shows the chromaticities x and y prior to white point adjustment.

[0076] It can be seen from FIG. 13 that the white point adjustment has allowed the chromaticities x and y of the achromatic color of an intermediate gray level to substantially match the chromaticities x and y of the achromatic color of the highest grayscale level. However, as has been described with reference to FIG. 10, when the grayscale levels of red and blue are changed under these specifications, the grayscale levels of red and blue are both to be decreased.

[0077] FIG. 14 shows a relationship between a grayscale level of an achromatic color serving as a reference and amounts of change in the grayscale levels for red and blue. As indicated in FIG. 14, the amount of change in the grayscale level is negative for both of red and blue, and thus the grayscale levels of red and blue are both decreased. Therefore, when white point adjustment is applied by changing the grayscale levels of red and blue, an achromatic color of an intermediate gray level will decrease in luminance.

[0078] FIG. 15 shows a relationship, before and after a white point adjustment is applied by changing the grayscale levels for red and blue, between a grayscale level of an achromatic color serving as a reference and a normalized output luminance of an achromatic color which is displayed by a pixel. As can be seen from FIG. 15, the luminance after white point adjustment is reduced from the luminance prior to white point adjustment.

[0079] FIG. 16 shows a relationship, in the liquid crystal display device 100 under these specifications after a white point adjustment is applied by changing the grayscale levels for green and blue, between a grayscale level of an achromatic color serving as a reference and chromaticities x and y of an achromatic color which is displayed by a pixel. For comparison sake, FIG. 16 also shows the chromaticities x and y prior to white point adjustment.

[0080] It can be seen from FIG. 16 that the white point adjustment has allowed the chromaticities x and y of the achromatic color of an intermediate gray level to substantially match the chromaticities x and y of the achromatic color of the highest grayscale level. Moreover, as has been described with reference to FIG. 10, when the grayscale levels of green and blue are changed under these specifications, the grayscale level of blue is to be decreased, but the grayscale level of green is to be increased.

[0081] FIG. 17 shows a relationship between a grayscale level of an achromatic color serving as a reference and amounts of change in the grayscale levels for green and blue. As is indicated in FIG. 17, the amount of change in the grayscale level is negative for blue, but the amount of change in the grayscale level is positive for green, and thus the grayscale level of blue is decreased, but the grayscale level of green is increased. Therefore, when white point adjustment is applied by changing the grayscale levels of green and blue, decrease in the luminance of an achromatic color of an

intermediate gray level can be suppressed.

[0082] FIG. 18 shows a relationship, before and after a white point adjustment is applied by changing the grayscale levels for green and blue, between a grayscale level of an achromatic color serving as a reference and a normalized output luminance of an achromatic color which is displayed by a pixel. As can be seen from FIG. 18, the luminance after white point adjustment is hardly changed from the luminance prior to white point adjustment.

[0083] Up to here, results of verification in the case where the liquid crystal display device 100 has specifications as shown in Table 2 have been described. Next, results of verification in the case where the liquid crystal display device 100 has specifications as shown in Table 5 will be described.

[Table 5]

	X	Y	Z
R	0.2335	0.1230	0.0063
G	0.1404	0.3372	0.0464
B	0.3436	0.1264	1.8283
Ye	0.2863	0.4134	0.0301

[0084] Table 6 shows α and β , in the liquid crystal display device 100 of specifications as shown in Table 5, for matching the chromaticity point of an achromatic color of grayscale level 120 (x,y)=(0.248,0.251) to the chromaticity point (x,y)=(0.2583,0.2582) of an achromatic color of the highest grayscale level. Table 6 illustrates rates α and β by which the two primary colors are to be changed, a gross change, and a target luminance error, with respect to the six cases where the two primary colors for adjustment are red and green, red and blue, red and yellow, green and blue, green and yellow, or blue and yellow.

[Table 6]

primary colors for adjustment	α	β	gross change	target luminance error
red · green	0.02102	0.008201	0.022563	0.00544
red · blue	0.014591	-0.00329	0.014958	0.001405
red · yellow	0.015684	0.00802	0.017616	0.005204
green · blue	-0.01861	-0.01076	0.0215	-0.00775
green · yellow	-0.02411	0.031592	0.039739	0.004508
blue · yellow	-0.04723	-0.10701	0.116972	-0.04929

[0085] It can be seen from Table 6 that, in terms of gross change and target luminance error, it is most preferable to adjust the grayscale levels of red and blue while fixing the grayscale levels of yellow and green. It can also be seen from Table 6 that adjusting the grayscale level of yellow will not provide favorable results in terms of either gross change or target luminance error.

[0086] FIG. 19 shows a chromaticity point prior to white point adjustment (the chromaticity point of an achromatic color of grayscale level 120) and a target chromaticity point (the chromaticity point of an achromatic color of grayscale level 255) in the liquid crystal display device 100 of the above specifications.

[0087] As is shown in FIG. 19, when the two primary colors for adjustment are green and blue, the adjustments for the two colors will both involve decreasing the grayscale level. On the other hand, when the two primary colors for adjustment are red and blue, the adjustments will involve decreasing the grayscale level for blue but increasing the grayscale level for red. Thus, it can also be seen from FIG. 19 that it is preferable to adjust the grayscale levels of red and blue.

[0088] FIG. 20 shows a relationship, in the liquid crystal display device 100 under these specifications after a white point adjustment is applied by changing the grayscale levels for green and blue, between a grayscale level of an achromatic color serving as a reference and chromaticities x and y of an achromatic color which is displayed by a pixel. For comparison sake, FIG. 20 also shows the chromaticities x and y prior to white point adjustment.

[0089] It can be seen from FIG. 20 that the white point adjustment has allowed the chromaticities x and y of the achromatic color of an intermediate gray level to substantially match the chromaticities x and y of the achromatic color of the highest grayscale level. However, as has been described with reference to FIG. 19, when the grayscale levels of

green and blue are changed under these specifications, the grayscale levels of green and blue are both to be decreased.

[0090] FIG. 21 shows a relationship between a grayscale level of an achromatic color serving as a reference and amounts of change in the grayscale levels for green and blue. As shown in FIG. 21, the amount of change in the grayscale level is generally negative for both green and blue, and thus the grayscale levels of green and blue are both decreased. Therefore, when white point adjustment is applied by changing the grayscale levels of green and blue, an achromatic color of an intermediate gray level will decrease in luminance.

[0091] FIG. 22 shows a relationship, before and after a white point adjustment is applied by changing the grayscale levels for green and blue, between a grayscale level of an achromatic color serving as a reference and a normalized output luminance of an achromatic color which is displayed by a pixel. As can be seen from FIG. 22, the luminance after white point adjustment is reduced from the luminance prior to white point adjustment.

[0092] FIG. 23 shows a relationship, in the liquid crystal display device 100 of the above specifications after a white point adjustment is applied by changing the grayscale levels for red and blue, between a grayscale level of an achromatic color serving as a reference and chromaticities x and y of an achromatic color which is displayed by a pixel. For comparison sake, FIG. 23 also shows the chromaticities x and y prior to white point adjustment.

[0093] It can be seen from FIG. 23 that the white point adjustment has allowed the chromaticities x and y of the achromatic color of an intermediate gray level to substantially match the chromaticities x and y of the achromatic color of the highest grayscale level. Moreover, as has been described with reference to FIG. 19, when the grayscale levels of red and blue are changed under these specifications, the grayscale level is decreased for blue, but the grayscale level is increased for red.

[0094] FIG. 24 shows a relationship between a grayscale level of an achromatic color serving as a reference and amounts of change in the grayscale levels for red and blue. As is indicated in FIG. 24, the amount of change in the grayscale level is negative for blue except at lower grayscale levels, but the amount of change in the grayscale level is positive for red, and thus the grayscale level of blue is generally decreased, but the grayscale level of red is increased. Therefore, when white point adjustment is applied by changing the grayscale levels of red and blue, decrease in the luminance of an achromatic color of an intermediate gray level can be suppressed.

[0095] FIG. 25 shows a relationship, before and after a white point adjustment is applied by changing the grayscale levels for red and blue, between a grayscale level of an achromatic color serving as a reference and a normalized output luminance of an achromatic color which is displayed by a pixel. As can be seen from FIG. 25, the luminance after white point adjustment is hardly changed from the luminance prior to white point adjustment.

[0096] Next, a specific construction of the timing controller 30 included in the driving circuit 20 of the liquid crystal display device 100 of the present embodiment will be described. FIG. 26 shows a suitable construction for the timing controller 30.

[0097] The timing controller 30 shown in FIG. 26 includes a signal conversion circuit 31 that converts an image signal corresponding to three primary colors into a multiprimary signal corresponding to four primary colors, a test circuit 32 to conduct a white point adjustment, and a selector 33 for switching between the signal from the signal conversion circuit 31 and the signal from the test circuit 32 for being output to the liquid crystal display panel 10.

[0098] The specific construction of the test circuit 32 is shown in FIG. 27. As for red, green, and blue, the test circuit 32 outputs signals of the same grayscale levels as the red component, green component, and blue component of an input image signal. Moreover, the test circuit 32 has a selector 32a in its interior, and as for the remaining yellow, outputs a signal of the same grayscale level as one of the red component, green component, and blue component of the input image signal. Therefore, if an image signal is input such that the grayscale levels of the red component, green component, and blue component are all A, for example, then the grayscale levels of red, green, blue, and yellow are all A, regardless of which component is selected by the selector 32a. As a result, an achromatic color at the grayscale level A, which serves as a reference prior to adjustment, is obtained.

[0099] Now, a deviation between the chromaticity point of the resultant achromatic color of the grayscale level A and the chromaticity point of an achromatic color of the maximum grayscale level (which is grayscale level 255 in the case of 8 bits) is adjusted for. For example, in the case where adjustment is made based on green and blue, the grayscale levels of red and yellow are fixed. As the selector 32a selects the red component, the grayscale level of red and the grayscale level of yellow will become A. As for green and blue, by first beginning at the grayscale level A, adjustments to the desired chromaticity point may be made by respectively increasing or decreasing them.

[0100] The result of white point adjustment using the test circuit 32 is fed back to the signal conversion circuit 31, whereby the signal conversion circuit 31 is enabled to conduct a signal conversion such that there is little difference between the chromaticity point of an achromatic color of an intermediate gray level and the chromaticity point of an achromatic color of the highest grayscale level. As the signal conversion circuit 31, any known circuit that has been proposed for use with multiprimary liquid crystal display devices can be used.

[0101] Although an example where an image signal corresponding to three primaries is externally input to the driving circuit 20 is illustrated herein, the present invention is not limited thereto. A multiprimary signal corresponding to four primary colors may be input to the driving circuit 20. In that case, the timing controller 30 does not need to include the

signal conversion circuit **31** and the test circuit **32**.

INDUSTRIAL APPLICABILITY

- 5 **[0102]** According to the present invention, a white point adjustment technique which is suitably used for a multiprimary liquid crystal display device that performs multicolor display by using four primary colors is provided.

REFERENCE SIGNS LIST

10 **[0103]**

10	liquid crystal display panel
20	driving circuit
30	timing controller
15 31	signal conversion circuit
32	test circuit
32a	selector
33	selector
40	LCD driver
20 41	gate driver
42	source driver
100	liquid crystal display device
R	red subpixel
G	green subpixel
25 B	blue subpixel
Ye	yellow subpixel

Claims

30

1. A liquid crystal display device (100) comprising:

35

a liquid crystal display panel (10) having a pixel defined by a plurality of subpixels, wherein the plurality of subpixels are a red subpixel to display red, a green subpixel to display green, a blue subpixel to display blue, and a yellow subpixel to display yellow; and

40

a driving circuit (20) adapted to supply display signals to the plurality of subpixels of the liquid crystal display panel, the driving circuit (20) is adapted to supply display signals of a same grayscale level to a first subpixel group composed of two subpixels when achromatic colors of at least some gray levels among all gray levels are to be displayed by the pixel, wherein said first subpixel group of two subpixels is composed of the yellow subpixel and either the red subpixel or the green subpixel, respectively, and

45

the driving circuit (20) is adapted to supply display signals of a grayscale level to a second subpixel group composed of two subpixels when achromatic colors of at least some gray levels among all gray levels are to be displayed by the pixel,

wherein said two subpixels of said second subpixel group are subpixels other than the two subpixels of the first subpixel group, and are composed of the blue subpixel and either the green subpixel or the red subpixel, respectively, and

wherein the grayscale level of the display signals supplied to the second subpixel group is different from said grayscale level of the display signals supplied to the first subpixel group;

50

characterized in that

55

with respect to an achromatic color of a given intermediate gray level among the at least some gray levels being displayed by the pixel, xy chromaticity coordinates of an achromatic color displayed by the pixel when assuming that display signals of the same grayscale level as the given intermediate gray level are supplied to all of the plurality of subpixels is defined as a reference chromaticity point; xy chromaticity coordinates of an achromatic color of a highest grayscale level displayed by the pixel is defined as a target chromaticity point; and a locus of the reference chromaticity point on an xy chromaticity diagram when the grayscale level of the display signal supplied to the blue subpixel is increased or decreased is defined as a B axis;

when the target chromaticity point is located above the B axis on the xy chromaticity diagram, the first subpixel

group further includes the red subpixel, the second subpixel group further includes the green subpixel, and the driving circuit (20) is adapted to supply a display signal of a lower grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the red subpixel to the blue subpixel, and the driving circuit (20) is further adapted to supply a display signal of a higher grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the red subpixel to the green subpixel; and

when the target chromaticity point is located below the B axis on the xy chromaticity diagram, the first subpixel group further includes the green subpixel, the second subpixel group further includes the red subpixel, and the driving circuit (20) is adapted to supply a display signal of a lower grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the green subpixel to the blue subpixel, and the driving circuit (20) is further adapted to supply a display signal of a higher grayscale level than the grayscale level of the display signals supplied to the yellow subpixel and the green subpixel to the red subpixel is a display.

2. The liquid crystal display device of claim 1, wherein the at least some gray levels among all gray levels to be displayed by the pixel are intermediate gray levels of 60% or more among all gray levels.

3. The liquid crystal display device of claim 1 or 2, wherein the at least some gray levels among all gray levels to be displayed by the pixel do not include any intermediate gray levels corresponding to a normalized luminance of 0.2 or less.

4. The liquid crystal display device of any of claims 1 to 3, wherein the driving circuit (20) is adapted to supply display signals of the same grayscale level when the grayscale level of an achromatic color is to be displayed by the pixel.

5. The liquid crystal display device of any of claims 1 to 4, wherein, the liquid crystal display panel (10) includes a plurality of scanning lines and a plurality of signal lines; and wherein the driving circuit (20) includes a gate driver (41) electrically connected to the plurality of scanning lines, a source driver (42) electrically connected to the plurality of signal lines, and a timing controller (30) adapted to supply predetermined signals to the gate driver (41) and the source driver (42).

6. The liquid crystal display device of claim 5, wherein the timing controller (30) includes a signal conversion circuit (31) adapted to convert an image signal corresponding to three primary colors into a multiprimary signal corresponding to four primary colors.

7. The liquid crystal display device of claim 6, wherein the timing controller further includes a test circuit (32) adapted to conduct white point adjustment.

Patentansprüche

1. Flüssigkristall-Anzeigevorrichtung (100), umfassend:

ein Flüssigkristall-Anzeigefeld (10), welches ein Pixel aufweist, das durch mehrere Unterpixel definiert ist, wobei die mehreren Unterpixel ein rotes Unterpixel zum Anzeigen von Rot, ein grünes Unterpixel zum Anzeigen von Grün, ein blaues Unterpixel zum Anzeigen von Blau und ein gelbes Unterpixel zum Anzeigen von Gelb sind, und eine Treiberschaltung (20), welche dafür geeignet ist, den mehreren Unterpixeln des Flüssigkristall-Anzeigefelds Anzeigesignale zuzuführen,

wobei die Treiberschaltung (20) dafür geeignet ist, einer ersten Unterpixelgruppe, die aus zwei Unterpixeln zusammengesetzt ist, Anzeigesignale einer gleichen Grauskalastufe zuzuführen, wenn durch das Pixel achromatische Farben von mindestens einigen Graustufen aus allen Graustufen anzuzeigen sind, wobei die erste Unterpixelgruppe aus zwei Unterpixeln entsprechend aus dem gelben Unterpixel und entweder dem roten Unterpixel oder dem grünen Unterpixel zusammengesetzt ist, und

die Treiberschaltung (20) dafür geeignet ist, einer zweiten Unterpixelgruppe, die aus zwei Unterpixeln zusammengesetzt ist, Anzeigesignale einer Grauskalastufe zuzuführen, wenn durch das Pixel achromatische Farben von mindestens einigen Graustufen aus allen Graustufen anzuzeigen sind, wobei die zwei Unterpixel der zweiten Unterpixelgruppe andere Unterpixel als die zwei Unterpixel der ersten Unterpixelgruppe sind und entsprechend aus dem blauen Unterpixel und entweder dem grünen Unterpixel oder dem roten Unterpixel zusammengesetzt sind, und wobei sich die Grauskalastufe der Anzeigesignale, die der zweiten Unterpixelgruppe zugeführt werden, von der Grauskalastufe der Anzeigesignale unterscheidet, die der ersten Unterpixelgruppe zugeführt wird;

dadurch gekennzeichnet, dass

in Bezug auf eine achromatische Farbe einer gegebenen Zwischen-Graustufe unter den mindestens einigen Graustufen, die durch das Pixel angezeigt wird, xy-Normfarbwertkoordinaten einer durch das Pixel angezeigten achromatischen Farbe als ein Referenz-Farbortpunkt definiert sind, wenn angenommen wird, dass allen der mehreren

Unterpixel Anzeigesignale derselben Grauskalastufe als die gegebene Zwischen-Graustufe zugeführt werden; xy-Normfarbwertkoordinaten einer durch das Pixel angezeigten achromatischen Farbe einer höchsten Grauskalastufe als ein Ziel-Farbortpunkt definiert sind; und eine Position des Referenz-Farbortpunkts auf einem xy-Farbdreieck als eine B-Achse definiert ist, wenn die Grauskalastufe des dem blauen Unterpixel zugeführten Anzeigesignals erhöht oder abgesenkt wird;

wenn sich der Ziel-Farbortpunkt in dem xy-Farbdreieck oberhalb der B-Achse befindet, die erste Unterpixelgruppe ferner das rote Unterpixel umfasst, die zweite Unterpixelgruppe ferner das grüne Unterpixel umfasst und die Treiberschaltung (20) dafür geeignet ist, dem blauen Unterpixel ein Anzeigesignal einer niedrigeren Grauskalastufe als der Grauskalastufe der Anzeigesignale zuzuführen, die dem gelben Unterpixel und dem roten Unterpixel zugeführt werden, und die Treiberschaltung (20) ferner dafür geeignet ist, dem grünen Unterpixel ein Anzeigesignal einer höheren Grauskalastufe als der Grauskalastufe der Anzeigesignale zuzuführen, die dem gelben Unterpixel und dem roten Unterpixel zugeführt werden; und wenn sich der Ziel-Farbortpunkt in dem xy-Farbdreieck unterhalb der B-Achse befindet, die erste Unterpixelgruppe ferner das grüne Unterpixel umfasst, die zweite Unterpixelgruppe ferner das rote Unterpixel umfasst und die Treiberschaltung (20) dafür geeignet ist, dem blauen Unterpixel ein Anzeigesignal einer niedrigeren Grauskalastufe als der Grauskalastufe der Anzeigesignale zuzuführen, die dem gelben Unterpixel und dem grünen Unterpixel zugeführt werden, und die Treiberschaltung (20) ferner dafür geeignet ist, dem roten Unterpixel ein Anzeigesignal einer höheren Grauskalastufe als der Grauskalastufe der Anzeigesignale zuzuführen, die dem gelben Unterpixel und dem grünen Unterpixel zugeführt werden.

2. Flüssigkristall-Anzeigevorrichtung nach Anspruch 1, wobei die mindestens einigen Graustufen aus allen Graustufen, die durch das Pixel anzuzeigen sind, Zwischen-Graustufen von 60 % oder mehr von allen Graustufen sind.
3. Flüssigkristall-Anzeigevorrichtung nach Anspruch 1 oder 2, wobei die mindestens einigen Graustufen aus allen Graustufen, die durch das Pixel anzuzeigen sind, keine Zwischen-Graustufen umfassen, welche einer normalisierten Luminanz von 0,2 oder weniger entsprechen.
4. Flüssigkristall-Anzeigevorrichtung nach einem der Ansprüche 1 bis 3, wobei die Treiberschaltung (20) dafür geeignet ist, Anzeigesignale derselben Grauskalastufe zuzuführen, wenn durch das Pixel die Grauskalastufe einer achromatischen Farbe anzuzeigen ist.
5. Flüssigkristall-Anzeigevorrichtung nach einem der Ansprüche 1 bis 4, wobei das Flüssigkristall-Anzeigefeld (10) mehrere Abtastleitungen und mehrere Signalleitungen umfasst; und wobei die Treiberschaltung (20) einen Gate-Treiber (41), der elektrisch mit den mehreren Abtastleitungen verbunden ist, einen Source-Treiber (42), der elektrisch mit den mehreren Signalleitungen verbunden ist, und eine Zeitsteuerung (30) umfasst, die dafür geeignet ist, dem Gate-Treiber (41) und dem Source-treiber (42) vorgegebene Signale zuzuführen.
6. Flüssigkristall-Anzeigevorrichtung nach Anspruch 5, wobei die Zeitsteuerung (30) eine Signalumwandlungsschaltung (31) umfasst, welche dafür geeignet ist, ein Bildsignal, welches drei Primärfarben entspricht, in ein Multiprimärsignal umzuwandeln, welches vier Primärfarben entspricht.
7. Flüssigkristall-Anzeigevorrichtung nach Anspruch 6, wobei die Zeitsteuerung ferner eine Testschaltung (32) umfasst, welche dafür geeignet ist, einen Weißpunktgleich durchzuführen.

Revendications

1. Dispositif d'affichage à cristaux liquides (100) comprenant :

un panneau à cristaux liquides (10) comprenant un pixel défini par une pluralité de sous-pixels, la pluralité de sous-pixels étant un sous-pixel rouge pour afficher du rouge, un sous-pixel vert pour afficher du vert, un sous-pixel bleu pour afficher du bleu et un sous-pixel jaune pour afficher du jaune ; et
un circuit de commande (20) conçu pour envoyer des signaux d'affichage à la pluralité de sous-pixels du panneau à cristaux liquides,

le circuit de commande (20) étant conçu pour envoyer des signaux d'un même niveau de gris à un premier groupe de sous-pixels constitué de deux sous-pixels lorsque des couleurs achromatiques d'au moins certains niveaux de gris parmi tous les niveaux de gris doivent être affichés par le pixel, ledit premier groupe de sous-pixels de deux sous-pixels étant constitué du sous-pixel jaune et soit du sous-pixel rouge soit du sous-pixel vert, respectivement, et

le circuit de commande (20) étant conçu pour envoyer des signaux d'un niveau de gris à un deuxième groupe de sous-pixels constitué de deux sous-pixels lorsque des couleurs achromatiques d'au moins certains niveaux de gris parmi tous les niveaux de gris doivent être affichés par le pixel, lesdits sous-pixels dudit deuxième groupe de sous-pixels étant des sous-pixels différents des deux sous-pixels du premier groupe de sous-pixels et étant constitué du sous-pixel bleu et soit du sous-pixel vert soit du sous-pixel rouge, respectivement et le niveau de gris des signaux d'affichage envoyés au deuxième groupe de sous-pixels étant différent des signaux d'affichage envoyés au premier groupe de sous-pixels ;

caractérisé en ce que

en ce qui concerne une couleur achromatique d'un niveau de gris intermédiaire donné parmi au moins certains niveaux de gris affichés par le pixel, les coordonnées de chromaticité xy d'une couleur achromatique affichée par le pixel en supposant que les signaux d'affichage du même niveau de gris que le niveau de gris intermédiaire donné sont envoyés à l'ensemble de la pluralité de sous-pixels sont définies comme un point de chromaticité de référence ; les coordonnées de chromaticité xy d'une couleur achromatique du niveau de gris le plus élevé affiché par le pixel sont définies comme un point de chromaticité cible ; et une position du point de chromaticité de référence sur un diagramme de chromaticité xy lorsque le niveau de gris du signal d'affichage envoyé au sous-pixel bleu est augmenté ou diminué est définie comme un axe B ;

lorsque le point de chromaticité cible est situé au-dessus de l'axe B sur le diagramme de chromaticité xy, le premier groupe de sous-pixels comprend en outre le sous-pixel rouge, le deuxième groupe de sous-pixels comprend en outre le sous-pixel vert et le circuit de commande (20) est conçu pour envoyer un signal d'affichage d'un niveau de gris inférieur au niveau de gris des signaux d'affichage envoyés au sous-pixel jaune, et le sous-pixel rouge au sous-pixel bleu, et le circuit de commande (20) est en outre conçu pour envoyer un signal d'affichage d'un niveau de gris supérieur au niveau de gris des signaux d'affichage envoyés au sous-pixel jaune et le sous-pixel rouge au sous-pixel vert ; et

lorsque le point de chromaticité cible est situé en dessous de l'axe B sur le diagramme de chromaticité xy, le premier groupe de sous-pixels comprend en outre le sous-pixel vert, le deuxième groupe de sous-pixels comprend en outre le sous-pixel rouge et le circuit de commande (20) est conçu pour envoyer un signal d'affichage d'un niveau de gris inférieur au niveau de gris des signaux d'affichage envoyés au sous-pixel jaune et le sous-pixel vert au sous-pixel bleu et le circuit de commande (20) est en outre conçu pour envoyer un signal d'affichage d'un niveau de gris supérieur au niveau de gris des signaux d'affichage envoyés au sous-pixel jaune et le sous-pixel vert au sous-pixel rouge est un affichage.

2. Dispositif d'affichage à cristaux liquides selon la revendication 1, dans lequel les au moins certains niveaux de gris parmi tous les niveaux de gris à afficher par le pixel sont des niveaux de gris intermédiaires de 60 % ou plus parmi tous les niveaux de gris.

3. Dispositif d'affichage à cristaux liquides selon la revendication 1 ou 2, dans lequel les au moins certains niveaux de gris parmi tous les niveaux de gris à afficher par le pixel ne comprennent aucun niveau de gris intermédiaire correspondant à une luminance normalisée de 0,2 ou moins.

4. Dispositif d'affichage à cristaux liquides selon l'une des revendications 1 à 3, dans lequel le circuit de commande (20) est conçu pour envoyer des signaux d'affichage du même niveau de gris lorsque le niveau de gris d'une couleur achromatique doit être affiché par le pixel.

5. Dispositif d'affichage à cristaux liquides selon l'une des revendications 1 à 4, dans lequel le panneau à cristaux liquides (10) comprend une pluralité de lignes de balayage et une pluralité de lignes de signaux ; et dans lequel le circuit de commande (20) comprend une commande de grille (41) connectée électriquement à la pluralité de lignes de balayage, une commande de source (42) connectée électriquement à la pluralité de lignes de signaux et un contrôleur de temporisation (30) conçu pour envoyer des signaux prédéterminés à la commande de grille (41) et à la commande de source (42).

6. Dispositif d'affichage à cristaux liquides selon la revendication 5, dans lequel le contrôleur de temporisation (30)

EP 2 523 184 B1

comprend un circuit de conversion de signaux (31) conçu pour convertir un signal d'image correspondant à trois couleurs primaires en un signal multi-primaire correspondant à quatre couleurs primaires.

7. Dispositif d'affichage à cristaux liquides selon la revendication 6, dans lequel le contrôleur de temporisation (30) comprend en outre un circuit de test (32) conçu pour effectuer un réglage de point blanc.

5

10

15

20

25

30

35

40

45

50

55

FIG.1

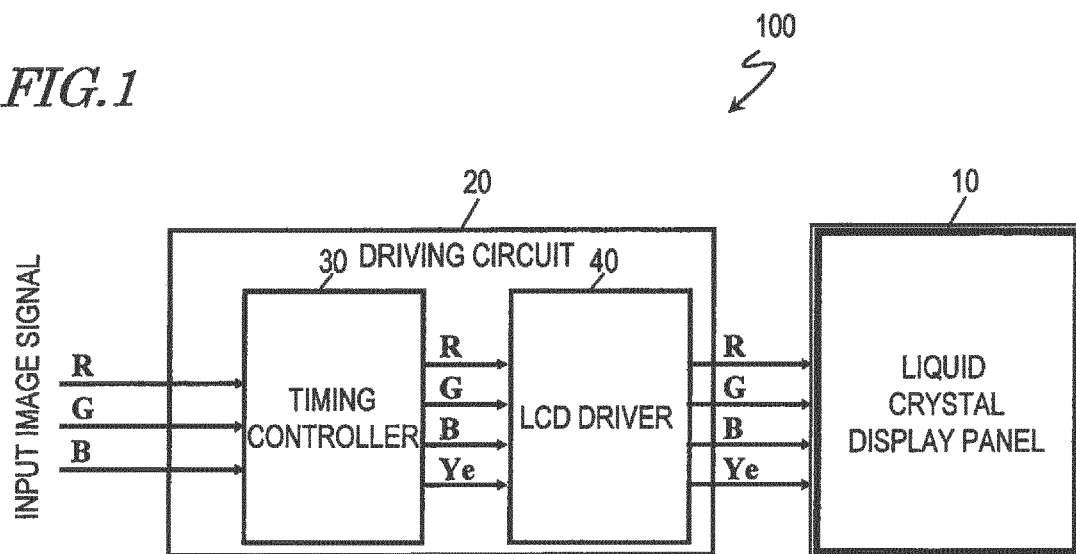


FIG.2

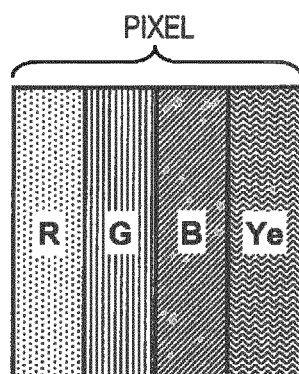


FIG.3

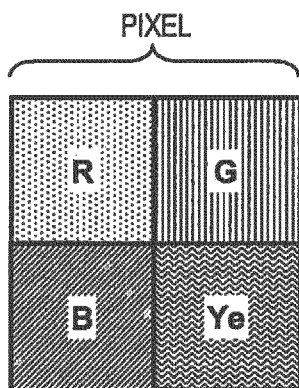


FIG. 4

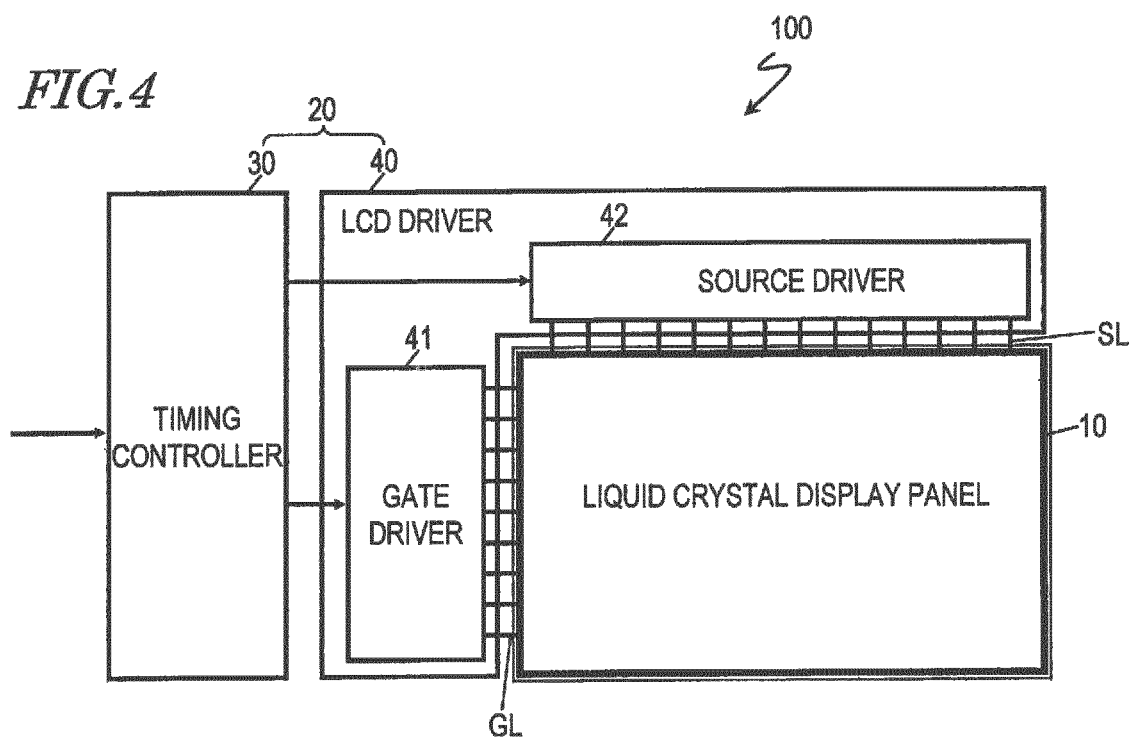


FIG. 5

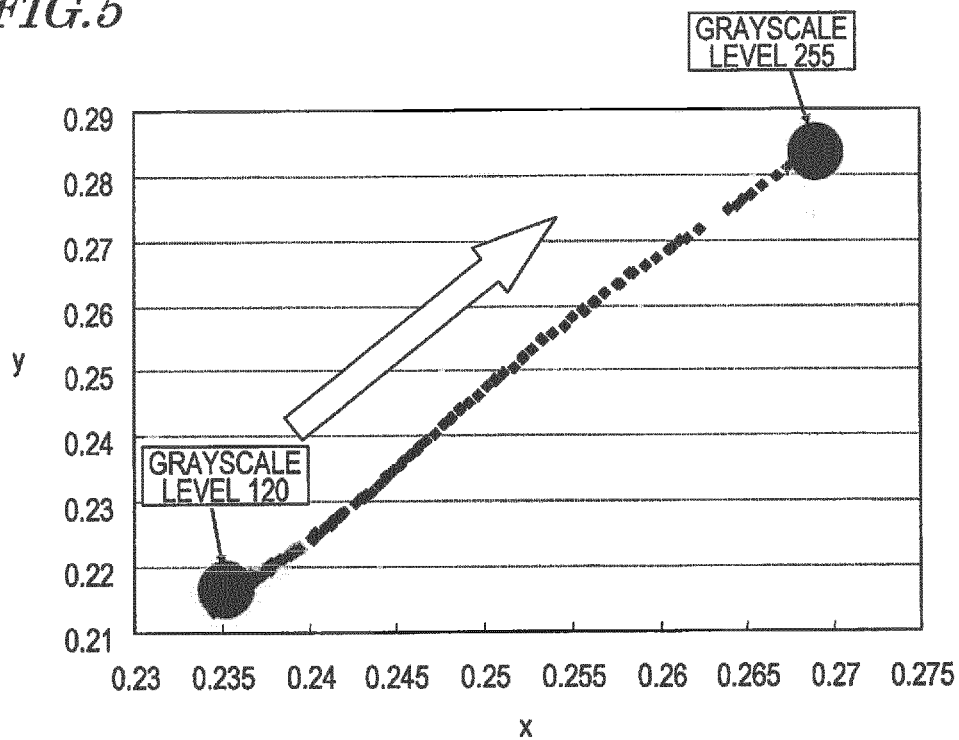


FIG. 6

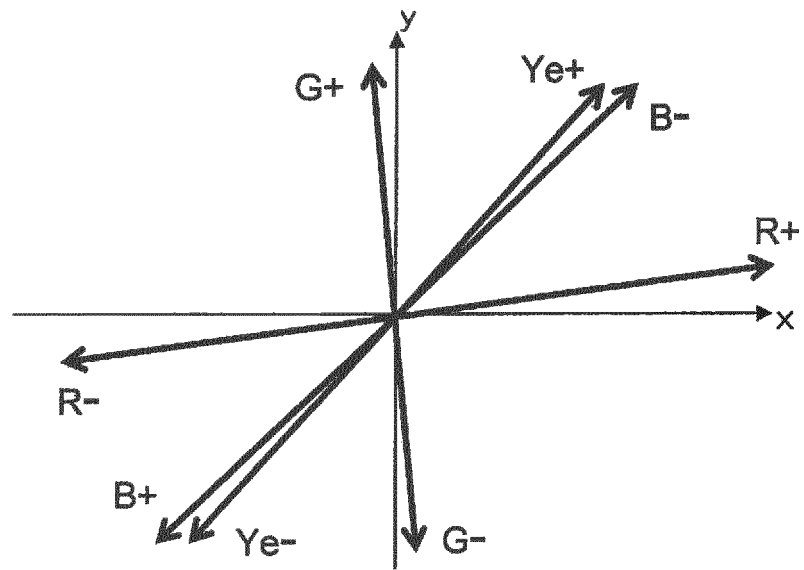


FIG. 7

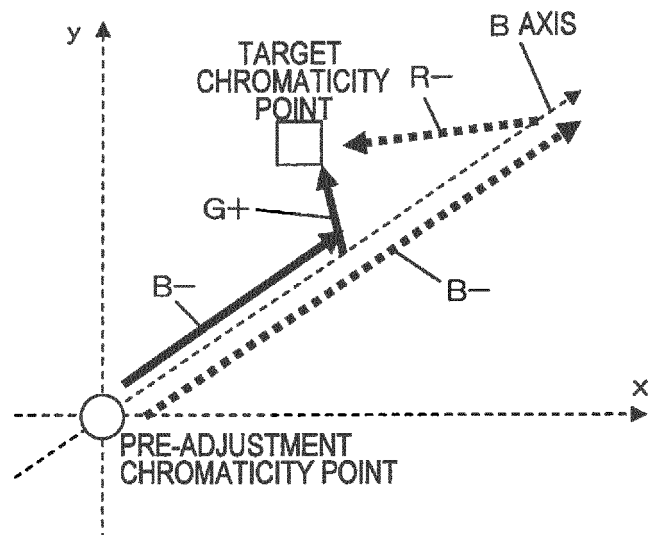


FIG. 8

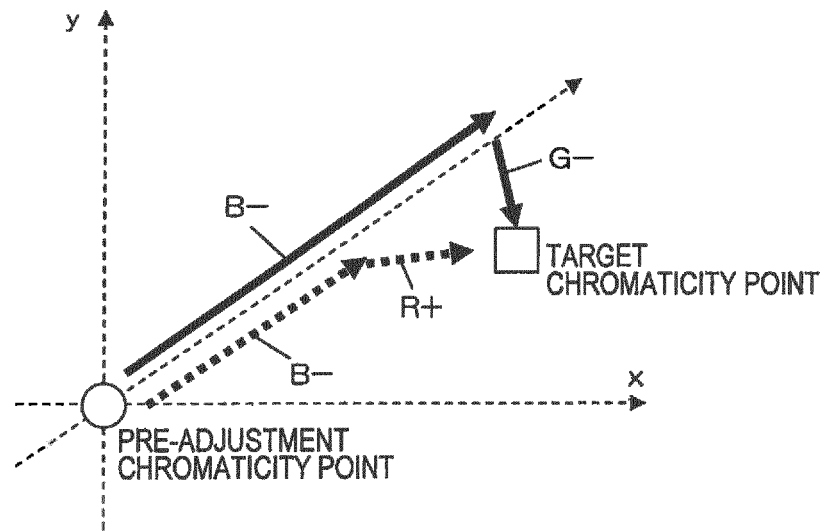


FIG. 9

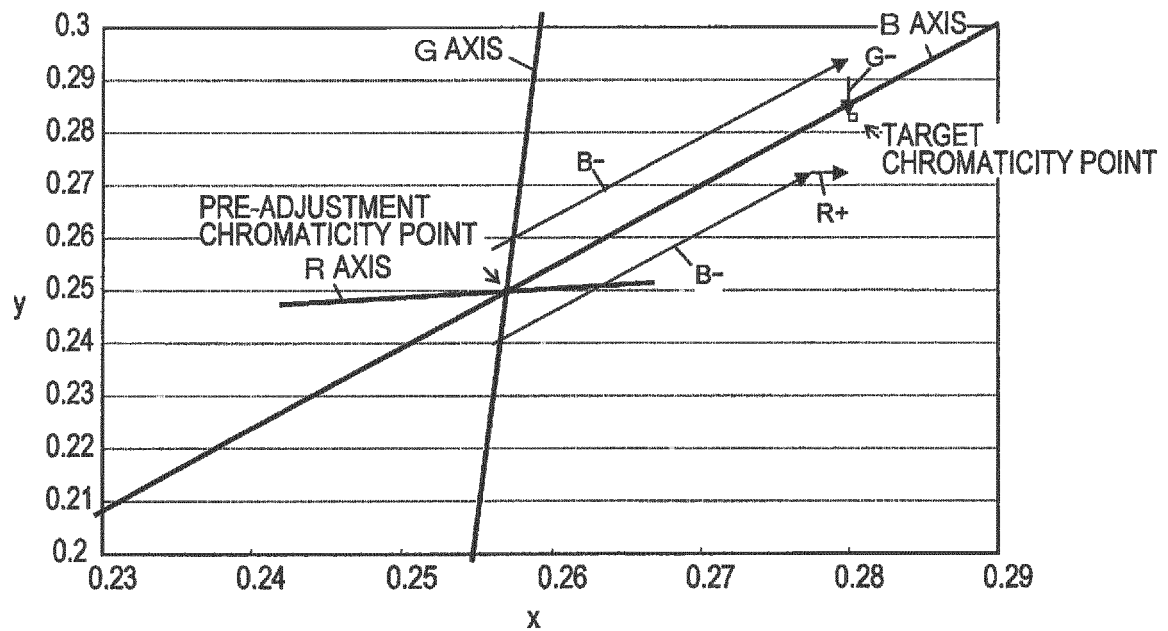


FIG. 10

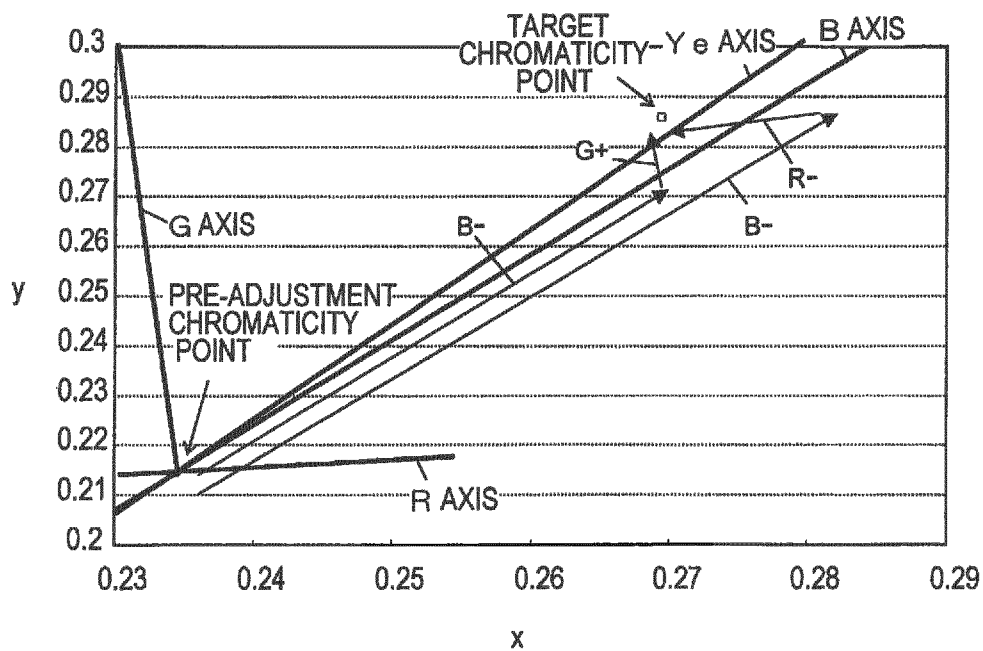


FIG. 11

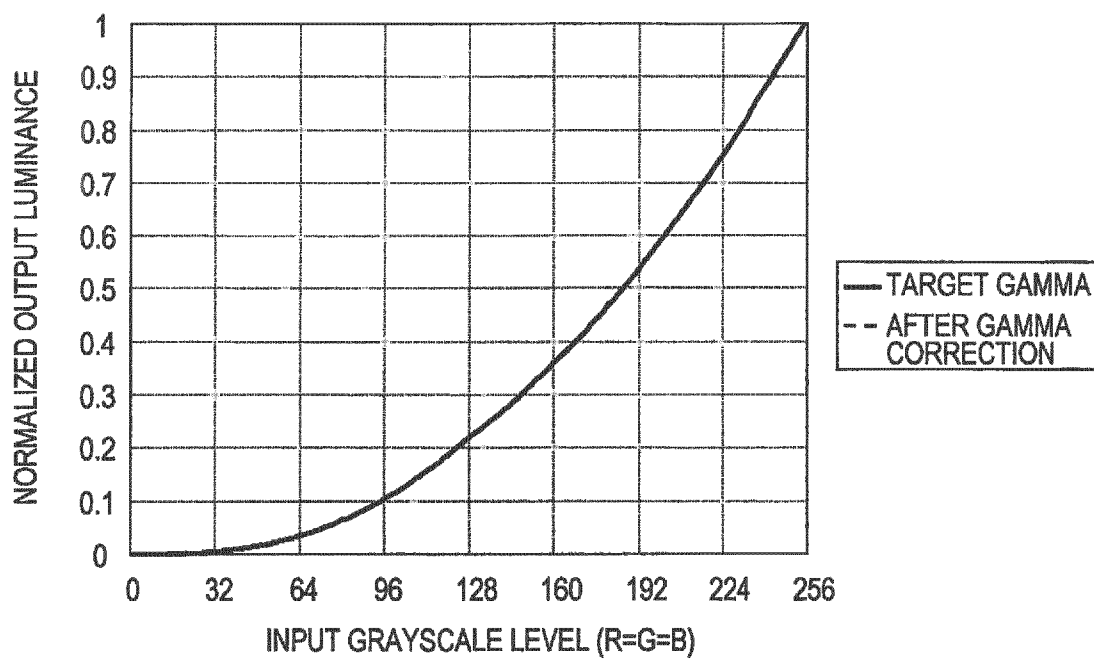


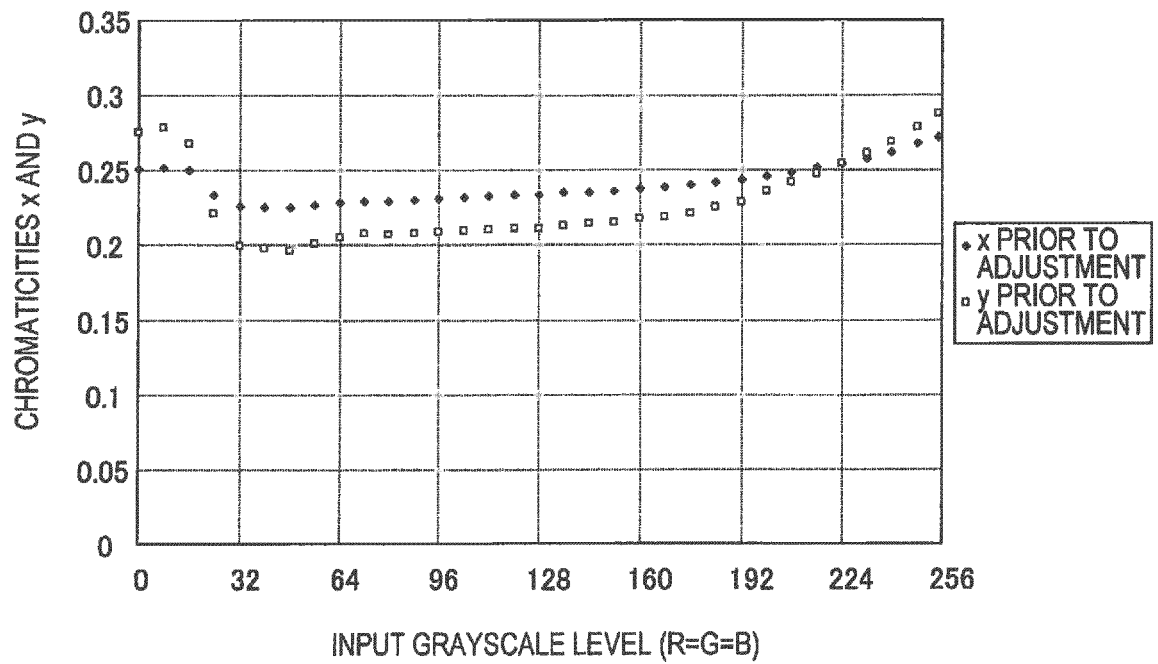
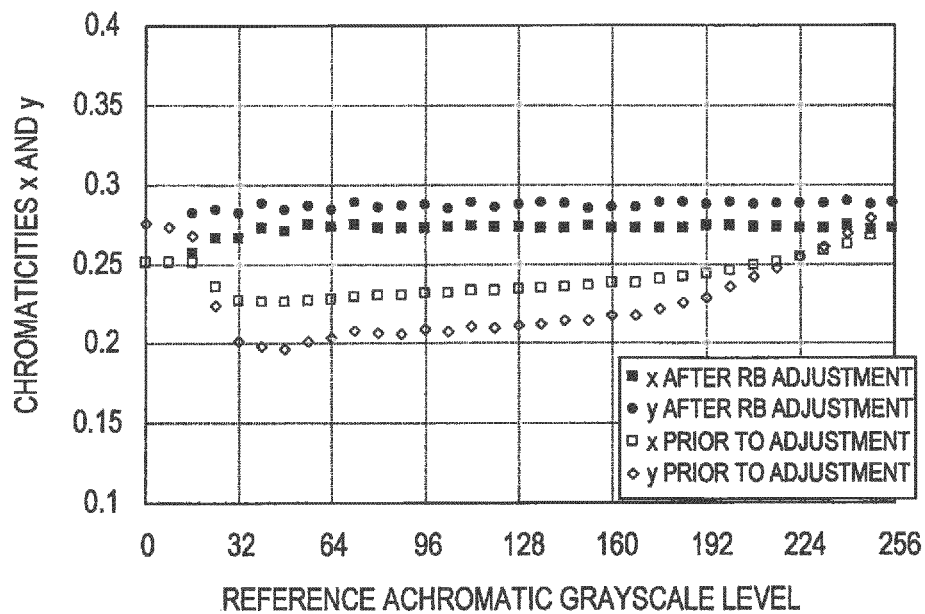
FIG. 12*FIG. 13*

FIG. 14

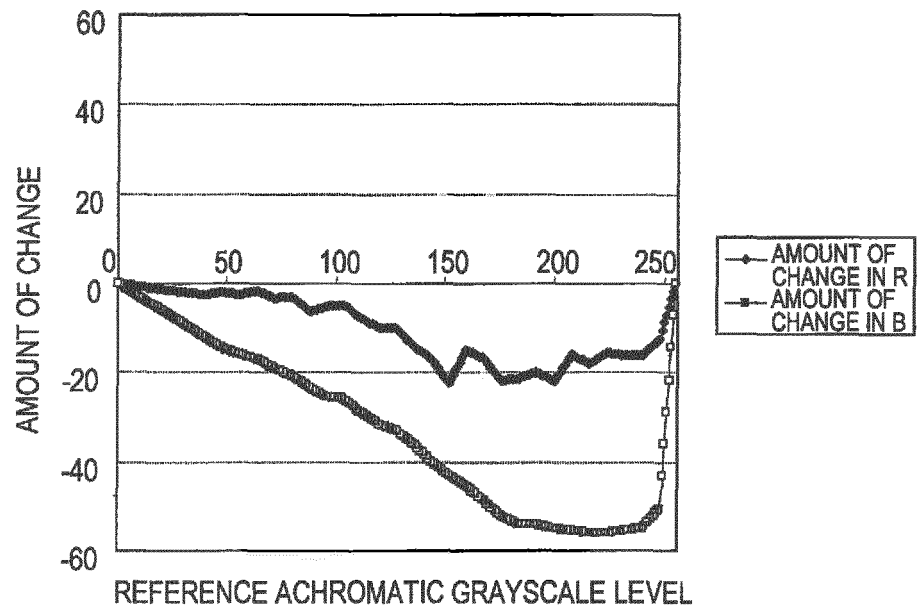


FIG. 15

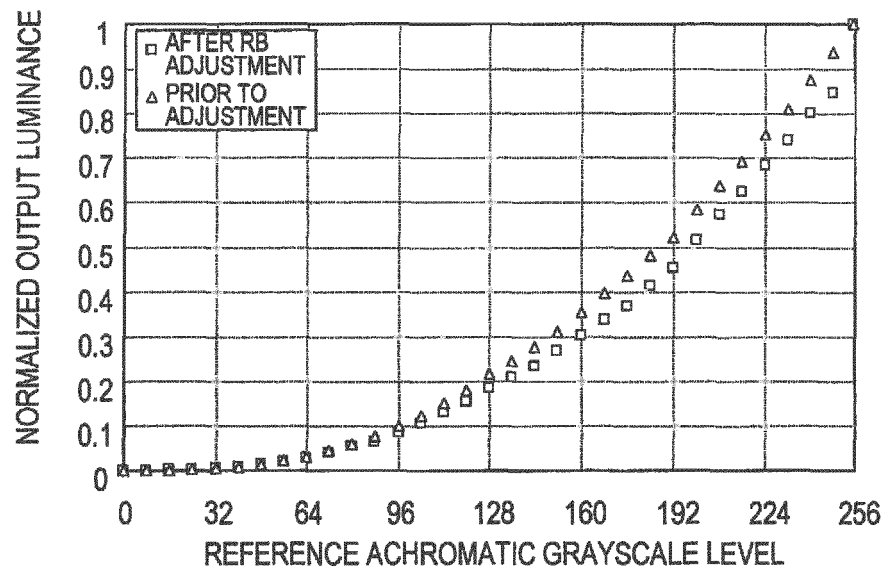


FIG.16

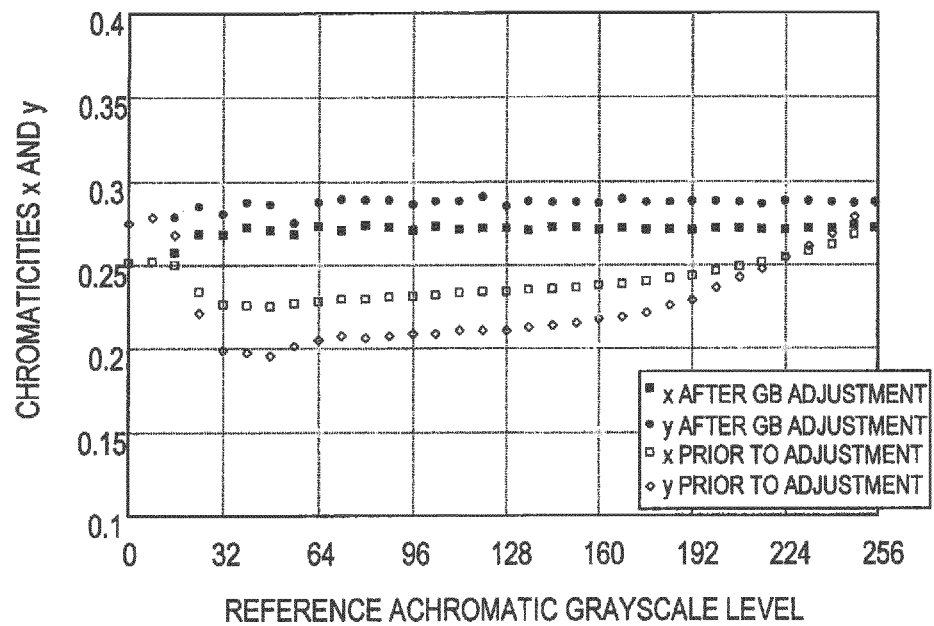


FIG.17

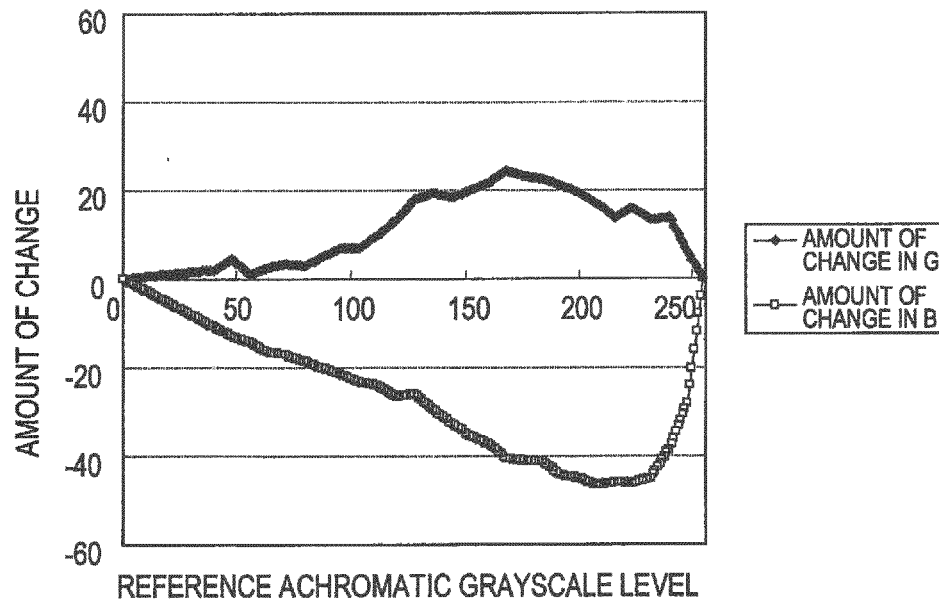


FIG. 18

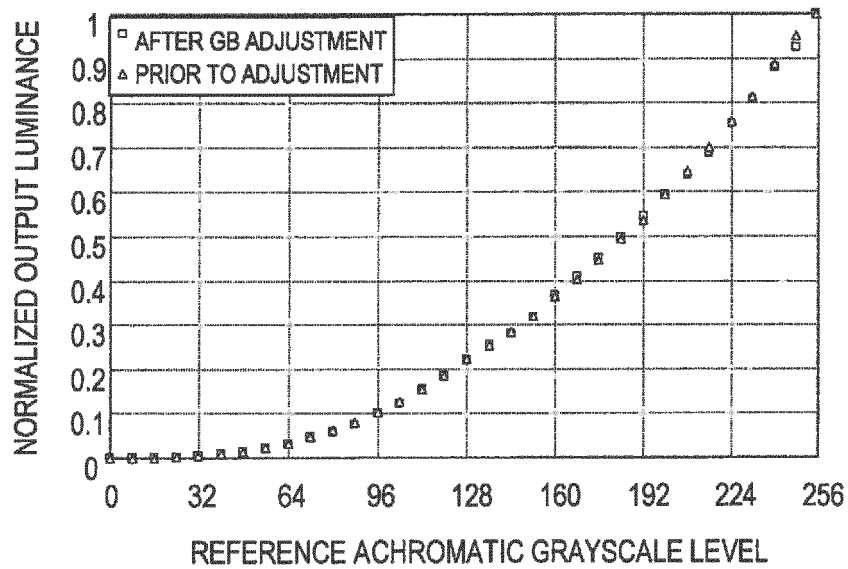


FIG. 19

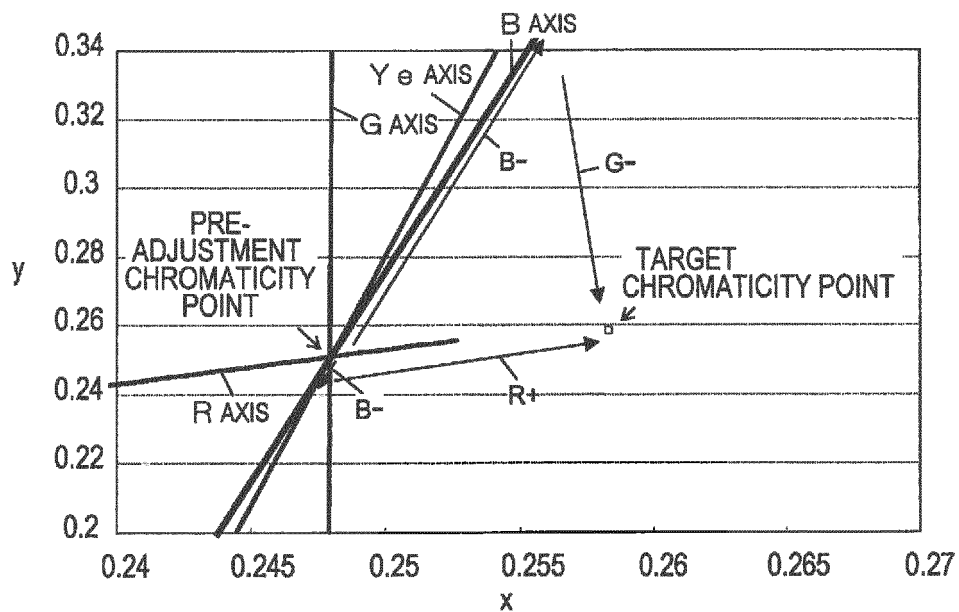


FIG. 20

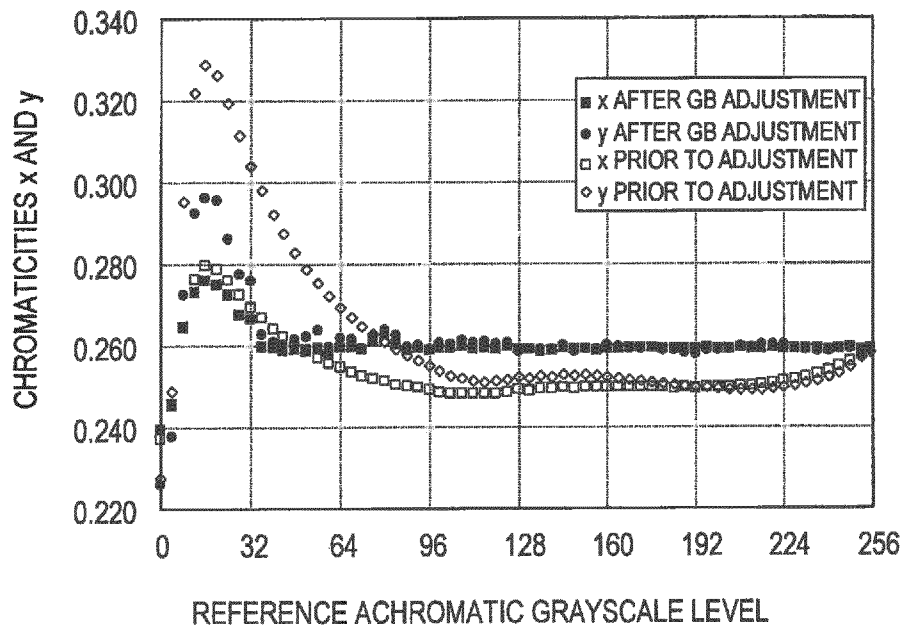


FIG. 21

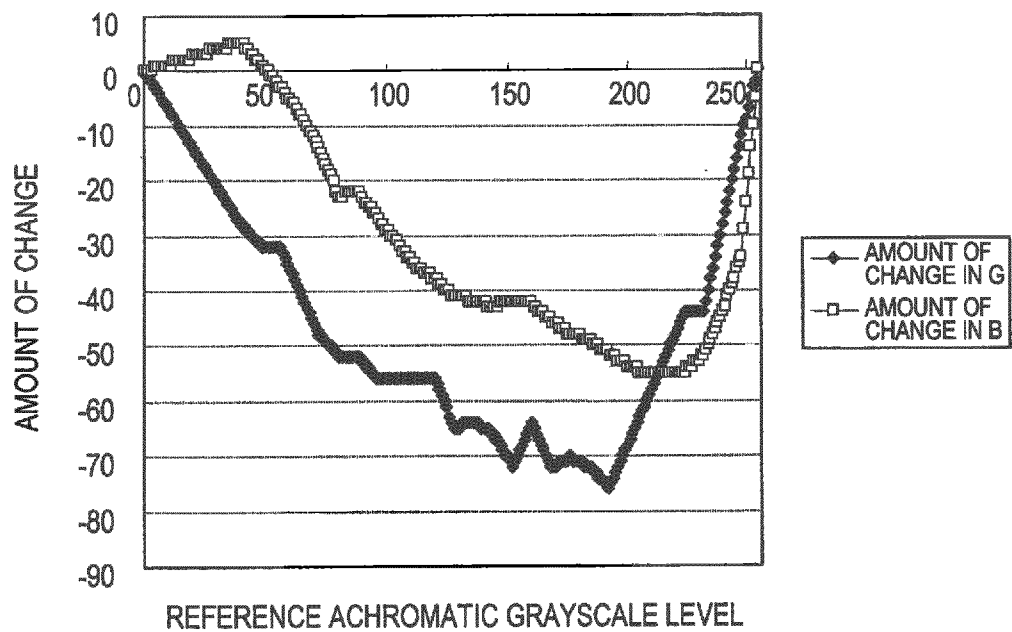


FIG.22

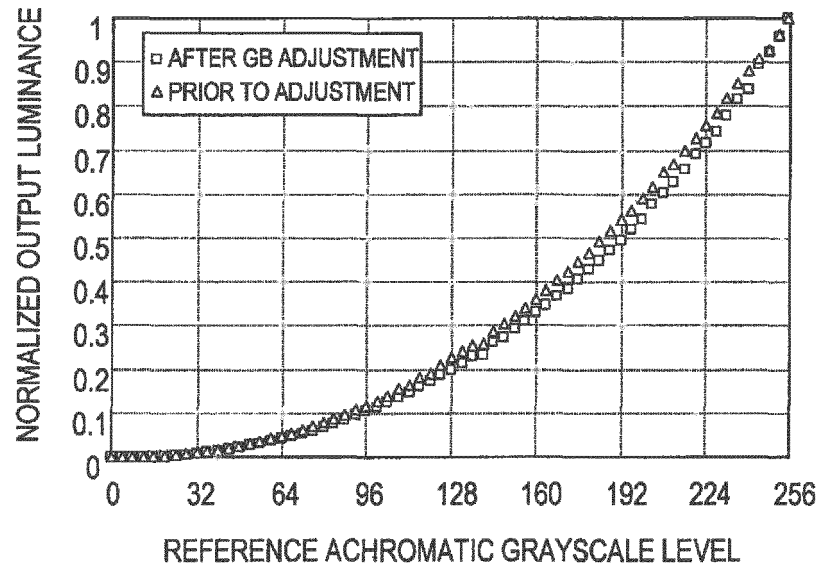


FIG.23

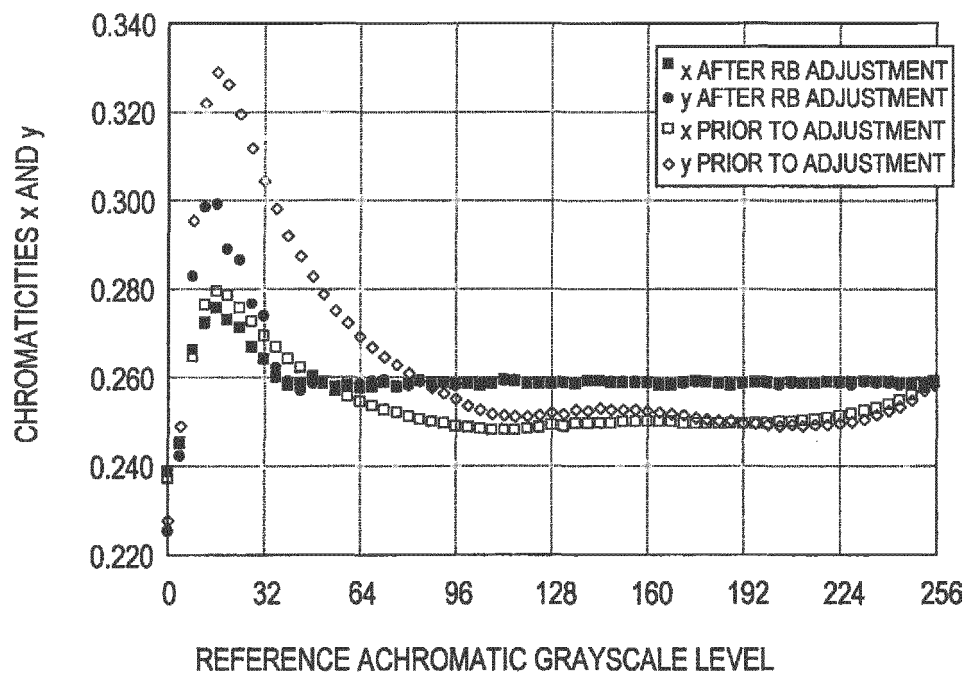


FIG. 24

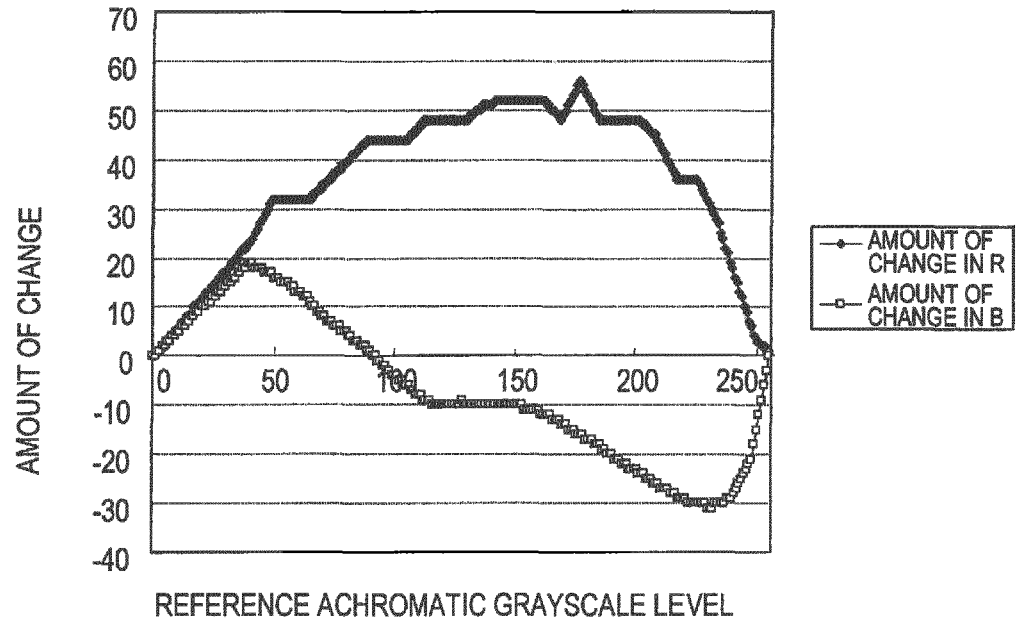


FIG. 25

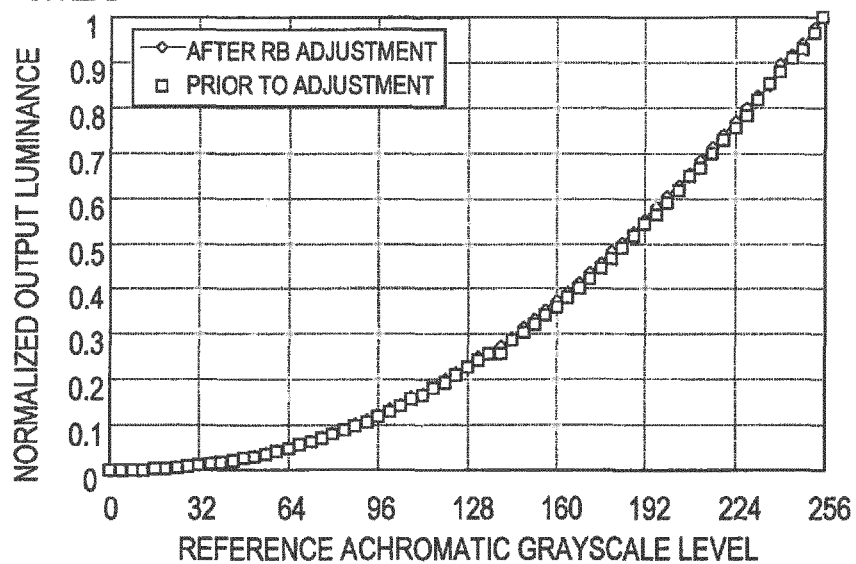


FIG.26

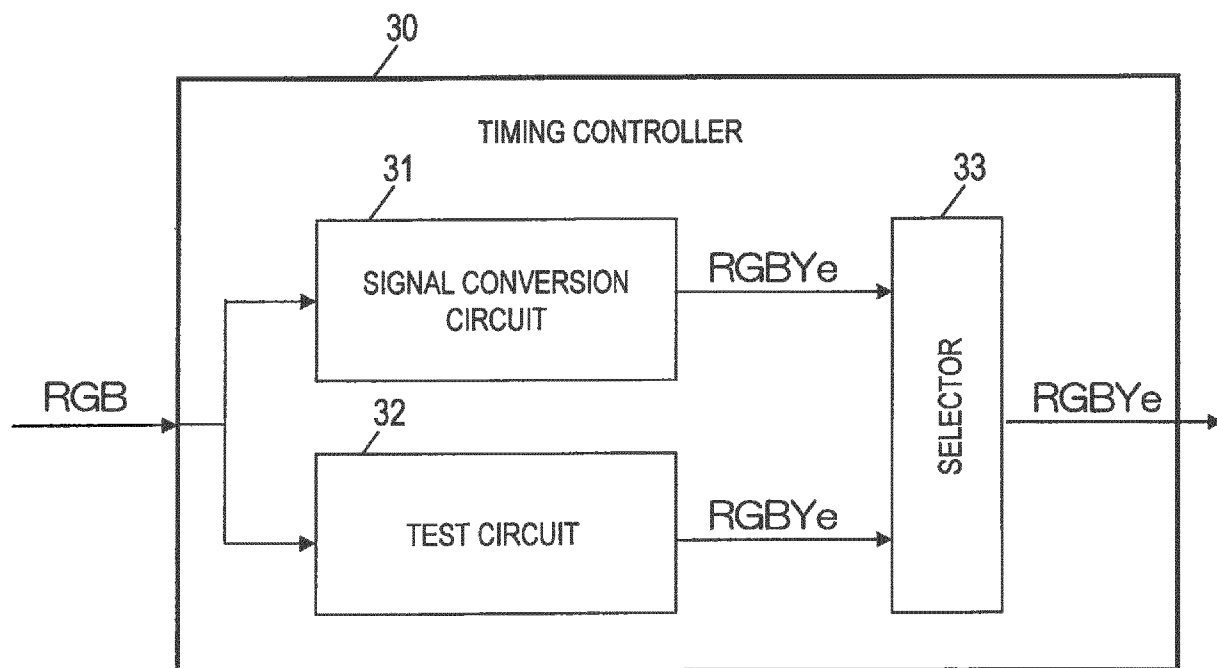
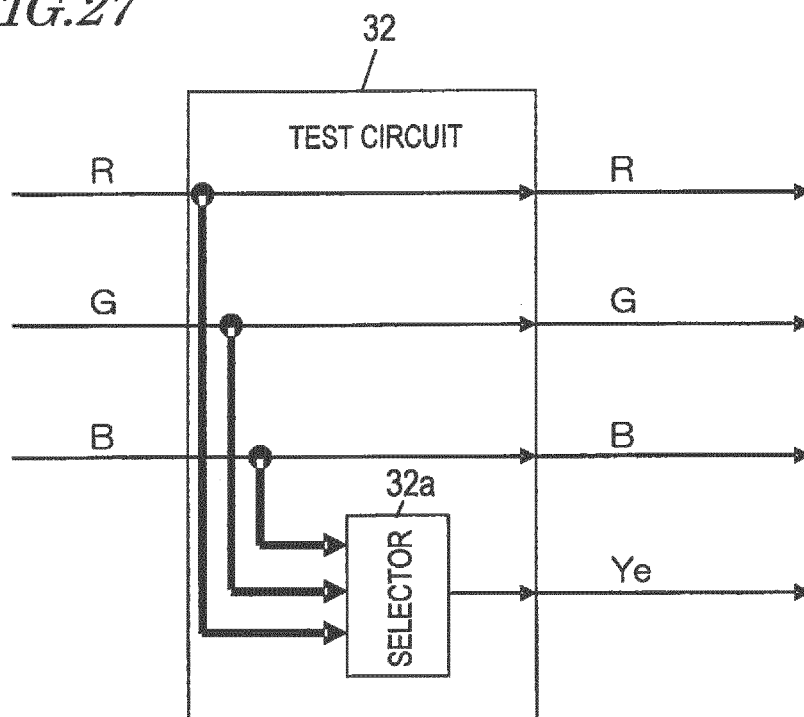


FIG.27



REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2007148519 A [0004]
- JP 2005328386 A [0008]

Non-patent literature cited in the description

- **WEN et al.** Design of relative primary luminances for four-primary displays. *Displays*, October 2005, vol. 26 (4-5), 143-214 [0006]
- **BAEK-WOON LEE et al.** 40.5L: Late-News Paper: TFT-LCD with RGBW Color System. *SID Symposium Digest of Technical Papers*, May 2003, vol. 34 (1), 1212-1215 [0006]

专利名称(译)	液晶显示器和信号转换电路		
公开(公告)号	EP2523184B1	公开(公告)日	2017-07-12
申请号	EP2011731806	申请日	2011-01-06
[标]申请(专利权)人(译)	夏普株式会社		
申请(专利权)人(译)	夏普株式会社		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	YOSHIDA YUICHI TOMIZAWA KAZUNARI MORI TOMOHIKO		
发明人	YOSHIDA, YUICHI TOMIZAWA, KAZUNARI MORI, TOMOHIKO		
IPC分类号	G09G3/36 G02F1/133 G09G3/20 G09G5/02		
CPC分类号	G09G3/3648 G02F2201/52 G09G3/2074 G09G5/026 G09G2300/0452 G09G2320/0242 G09G2320/0666 G09G2340/06		
优先权	2010002378 2010-01-07 JP		
其他公开文献	EP2523184A1 EP2523184A4		
外部链接	Espacenet		

摘要(译)

根据本发明的液晶显示装置(100)包括液晶显示板(10)和向液晶显示板(10)的多个子像素提供显示信号的驱动电路(20)。多个子像素是红色子像素(R)，绿色子像素(G)，蓝色子像素(B)和黄色子像素(Ye)。当要由像素显示所有灰度级中的至少一些灰度级的非彩色时，提供给由特定两个子像素组成的第一子像素组的显示信号是相同灰度级的显示信号，而显示信号是提供给由其他两个子像素组成的第二子像素组的显示信号是与提供给第一子像素组的显示信号的灰度级不同的灰度级的显示信号。第一子像素组包括黄色子像素(Ye)，第二子像素组包括蓝色子像素(B)。根据本发明，提供一种白点调整技术，其适用于通过使用四原色执行多色显示的多基色液晶显示装置。

$$\begin{aligned}
 \Delta x &= \frac{X+\Delta X}{X+Y+Z+\Delta X+\Delta Y+\Delta Z} - \frac{X}{X+Y+Z} \\
 &= \frac{X+\Delta X}{X+Y+Z \left(1 + \frac{\Delta X+\Delta Y+\Delta Z}{X+Y+Z} \right)} - \frac{X}{X+Y+Z} \\
 &\approx \frac{X+\Delta X}{X+Y+Z} \left(1 - \frac{\Delta X+\Delta Y+\Delta Z}{X+Y+Z} \right) - \frac{X}{X+Y+Z} \\
 &= \frac{1}{(X+Y+Z)^2} [(X+Y+Z)\Delta X - (\Delta X+\Delta Y+\Delta Z)X] \quad \dots (1)
 \end{aligned}$$