US 20140292740A1

(19) **United States**

(12) **Patent Application Publication**

TSENG et al.

(10) **Pub. No.: US 2014/0292740 A1**

(43) **Pub. Date: Oct. 2, 2014**

(54) **PIXEL CIRCUIT AND DRIVING METHOD AND DISPLAY DEVICE THEREOF**

(71) Applicant: **InnoLux Corporation**, Miao-Li County (TW)

(72) Inventors: **Ming-Chun TSENG**, Miao-Li County (TW); **Yi-Hua HSU**, Miao-Li County (TW)

(73) Assignee: **InnoLux Corporation**, Miao-Li County (TW)

(21) Appl. No.: **14/044,993**

(22) Filed: **Oct. 3, 2013**

(30) **Foreign Application Priority Data**

Mar. 28, 2013 (TW) 102111099

Publication Classification

(51) **Int. Cl.**
G09G 3/32 (2006.01)

(52) **U.S. Cl.**
CPC ***G09G 3/3258*** (2013.01)
USPC **345/212**; 345/77

(57) **ABSTRACT**

A pixel circuit includes an OLED, a driving transistor, first and second transistors, a storage capacitor and a coupling capacitor. The OLED includes an anode and a cathode connected to a first voltage source. The driving transistor includes a first node connected to a second voltage source, a second node, and a third node connected to the anode. The first transistor includes first, second and third terminals connected to a data driving line, a first control signal source, and the second node, respectively. The second transistor includes a first terminal, a second terminal connected to a second control signal source, and a third terminal connected to the anode and the third node. The storage capacitor includes first and second terminals connected to a third voltage source and the second transistor, respectively. The coupling capacitor includes first and second terminals connected to the second transistor and the second node, respectively.

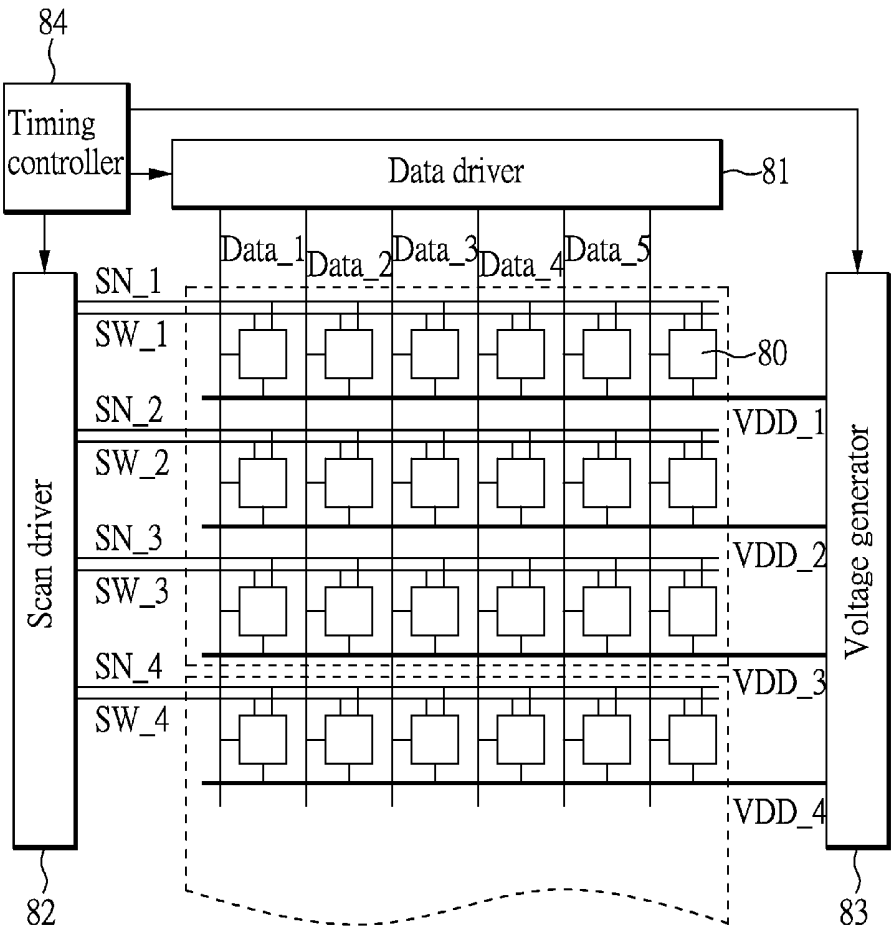

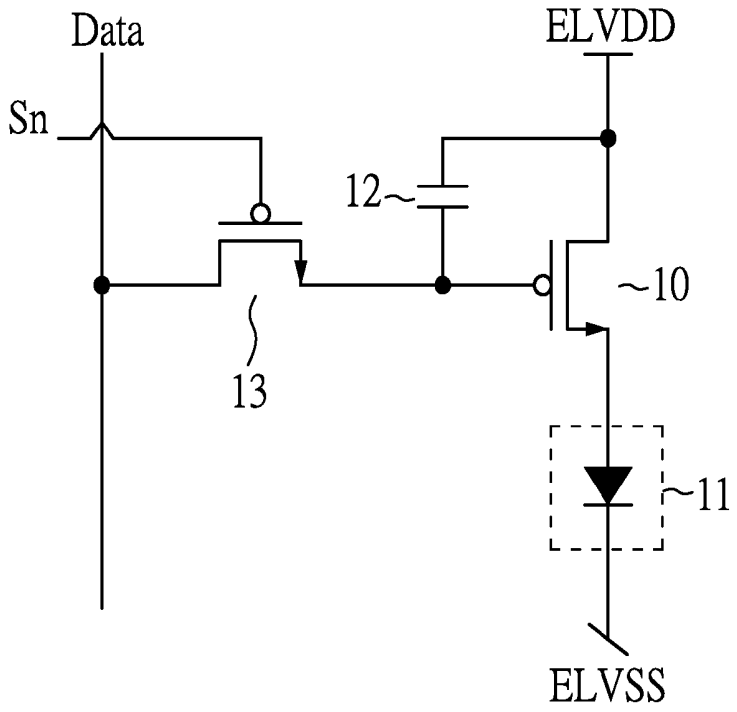

FIG. 1 (PRIOR ART)

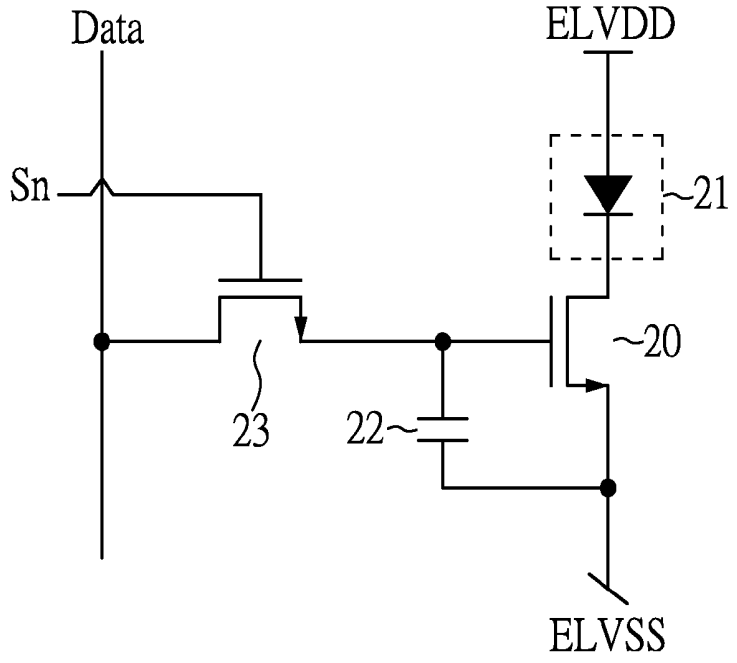

FIG. 2 (PRIOR ART)

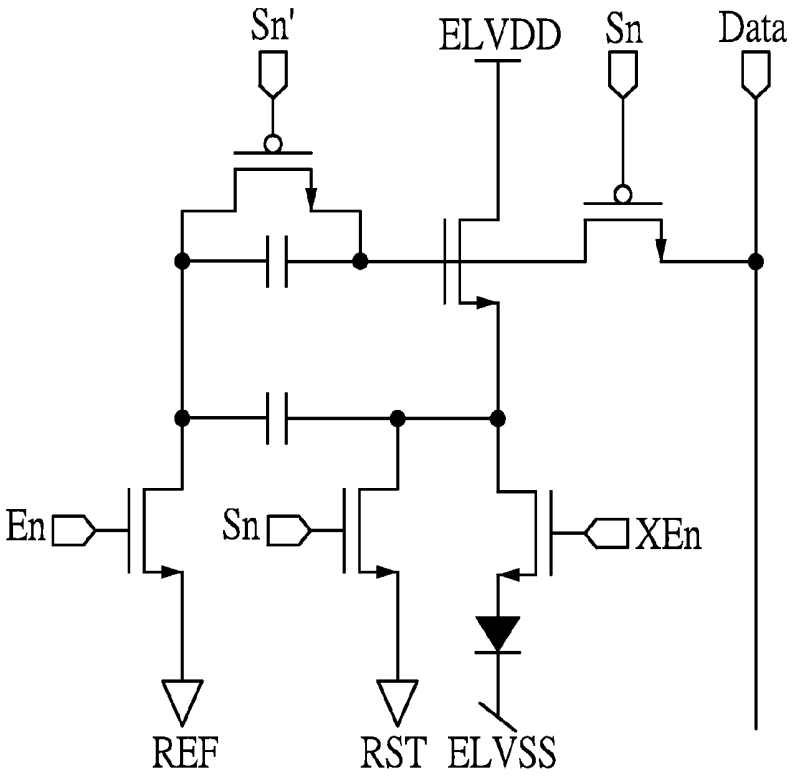

FIG. 3(PRIOR ART)

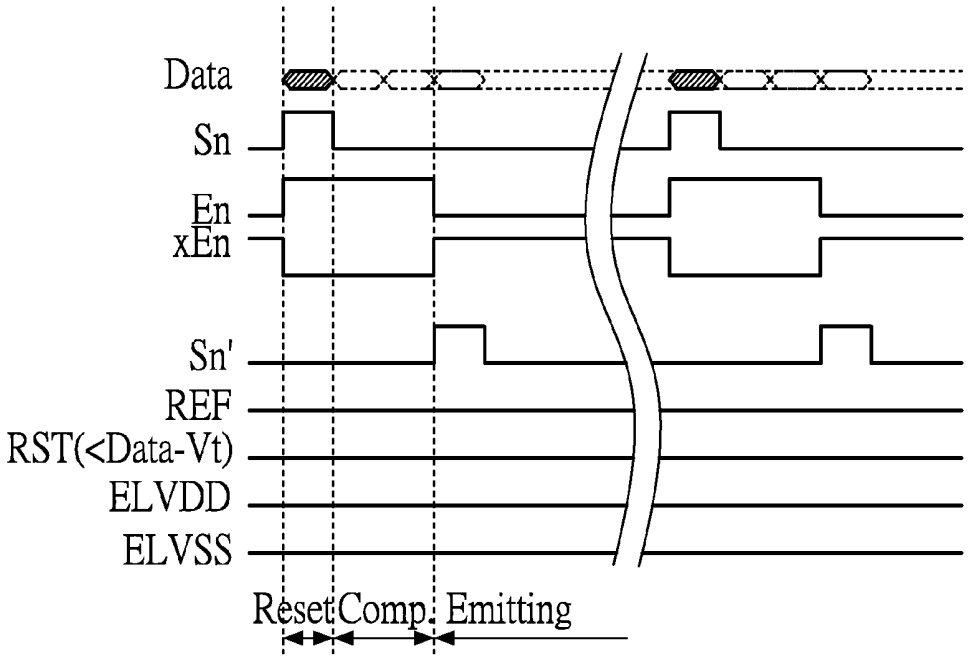

FIG. 4 (PRIOR ART)

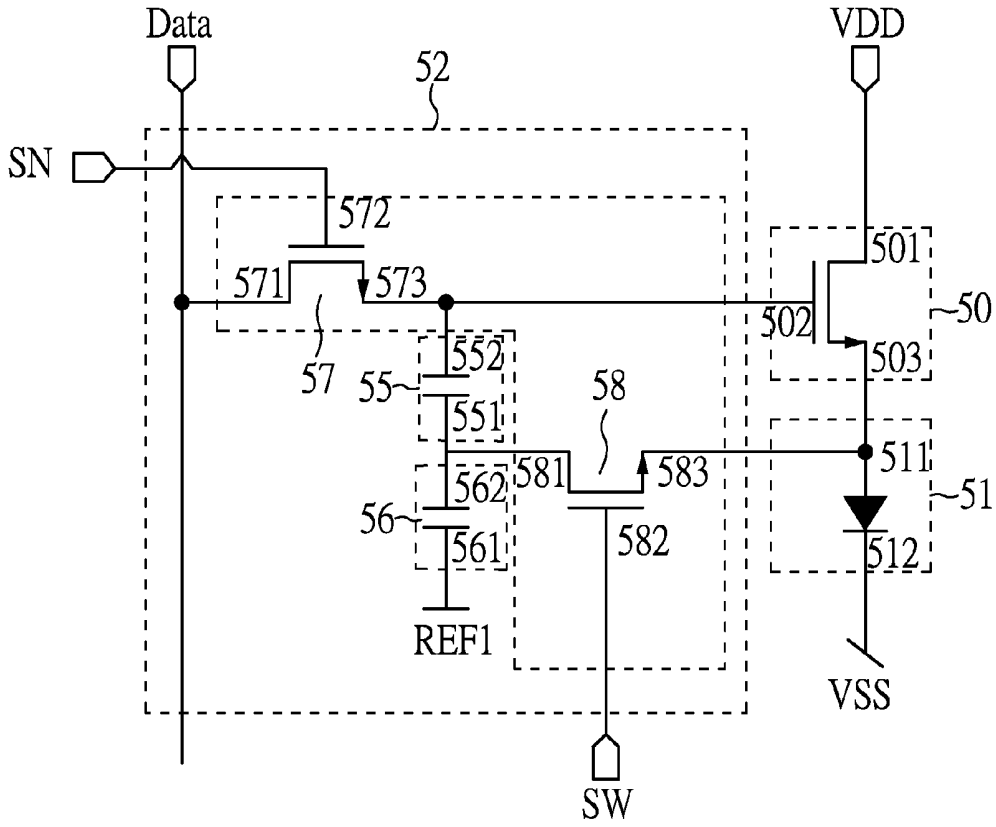
Data
VDD
52
SN
572
571
573
501
50
502
503
57
55
552
551
58
511
581
583
562
56
561
582
51
512
REF1
VSS
SW

FIG. 5

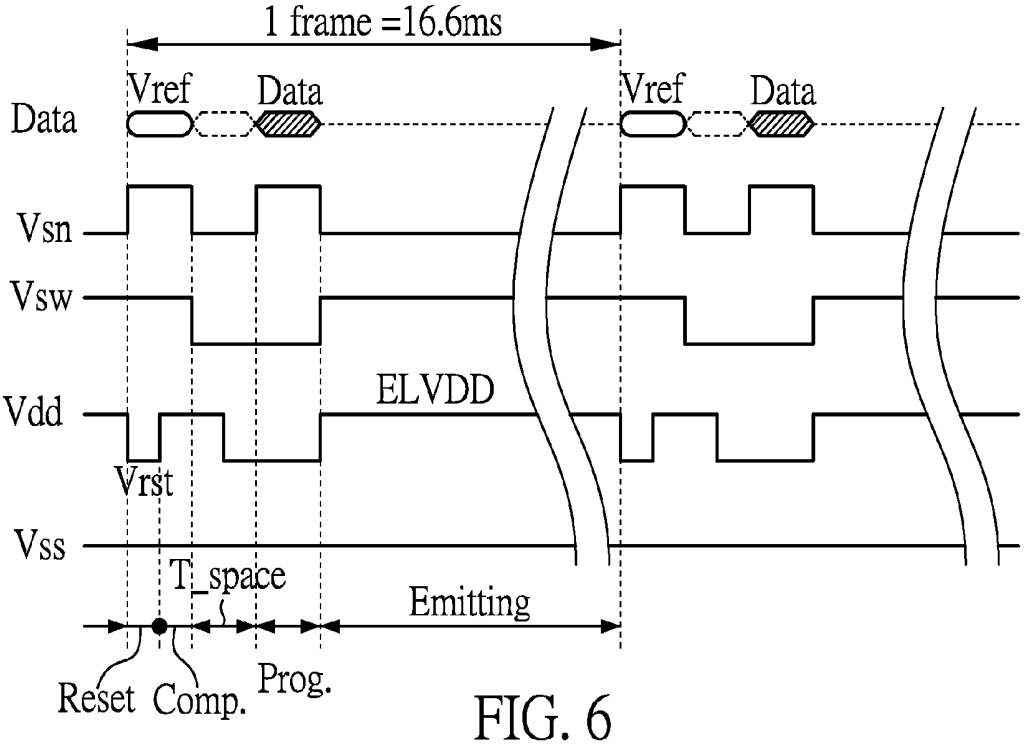
1 frame =16.6ms
Vref
Data
Vref
Data
Data
Vsn
Vsw
ELVDD
Vdd
Vrst
Vss
T_space
Emitting
Reset
Comp.
Prog.

FIG. 6

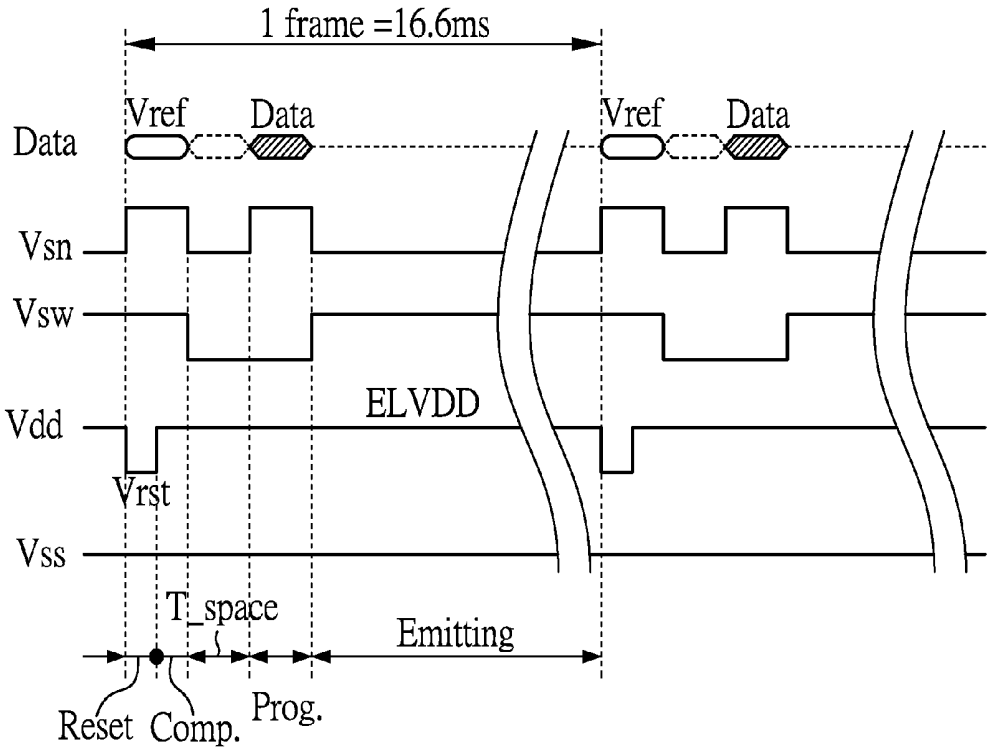
1 frame =16.6ms
Data
Vref
Data
Vref
Data
Vsn
Vsw
Vdd
ELVDD
Vrst
Vss
T_space
Emitting
Reset
Comp.
Prog.

FIG. 7

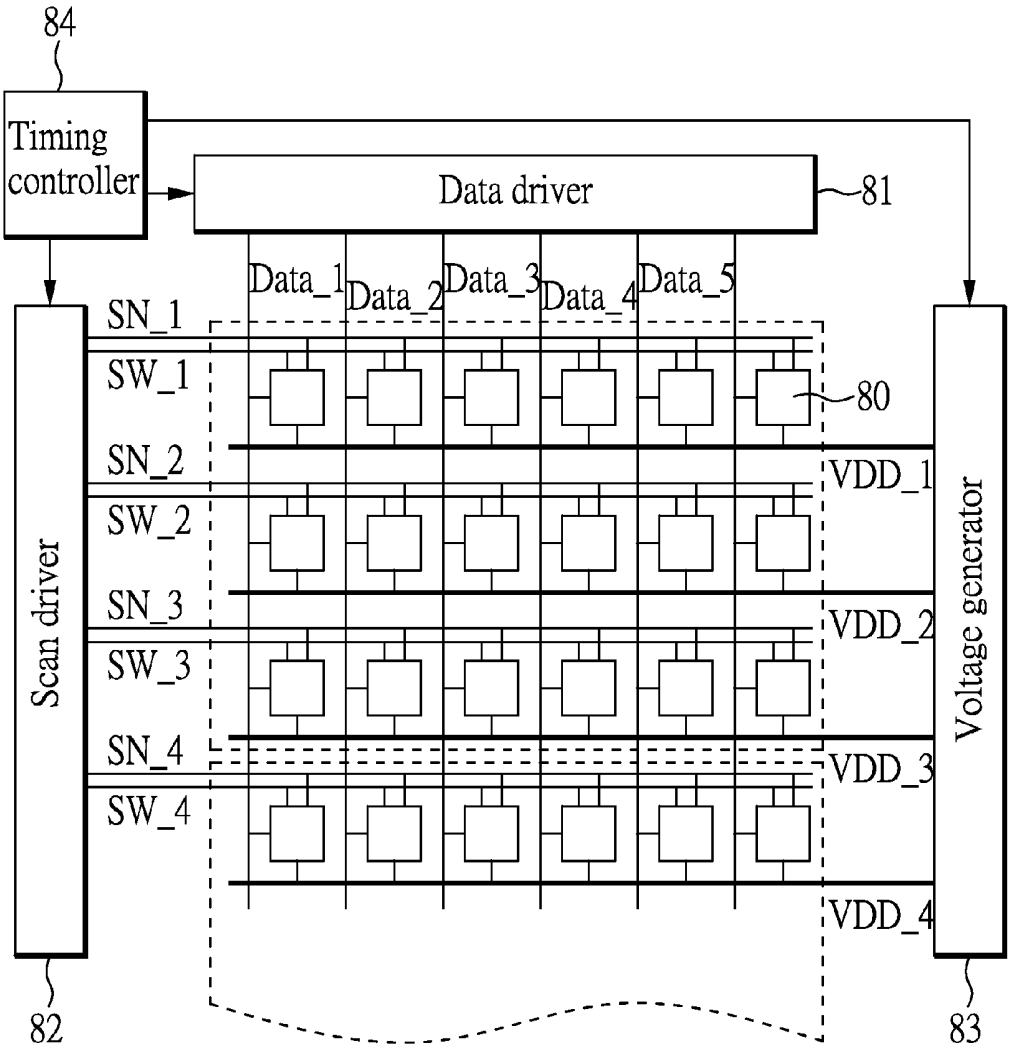
84
Timing controller
Data driver
81
Data_1
Data_2
Data_3
Data_4
Data_5
SN_1
SW_1
SN_2
SW_2
SN_3
SW_3
SN_4
SW_4
80
VDD_1
VDD_2
VDD_3
VDD_4
Scan driver
Voltage generator
82
83

FIG. 8

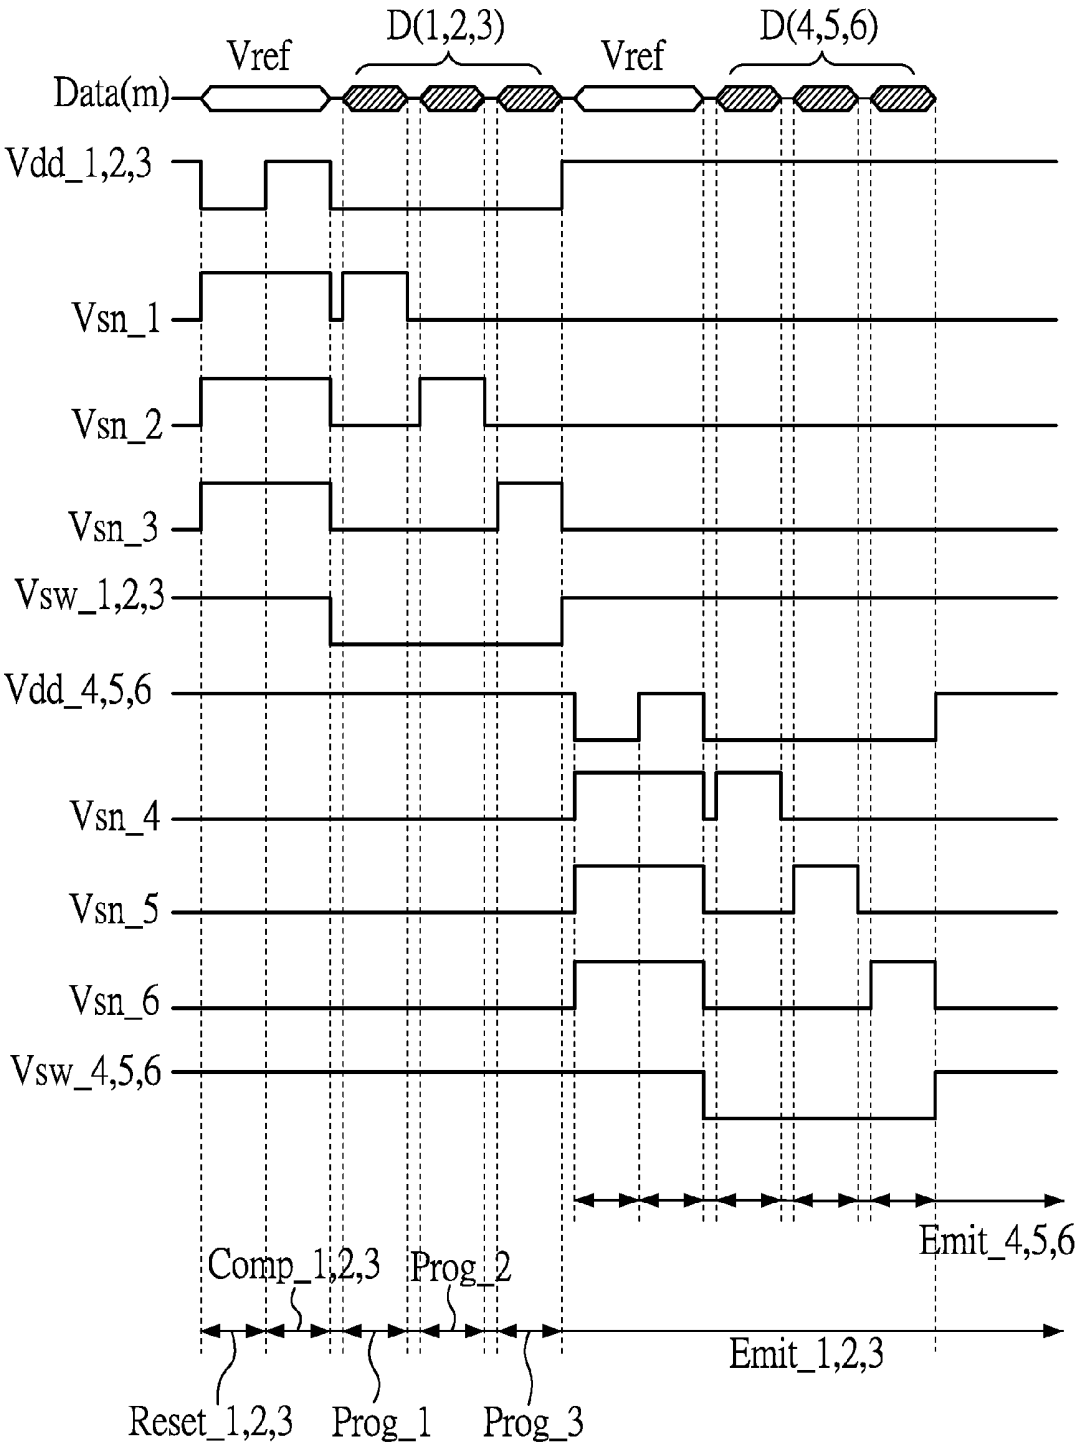
Vref
D(1,2,3)
Vref
D(4,5,6)
Data(m)
Vdd_1,2,3
Vsn_1
Vsn_2
Vsn_3
Vsw_1,2,3
Vdd_4,5,6
Vsn_4
Vsn_5
Vsn_6
Vsw_4,5,6
Emit_4,5,6
Comp_1,2,3
Prog_2
Emit_1,2,3
Reset_1,2,3
Prog_1
Prog_3

FIG. 9

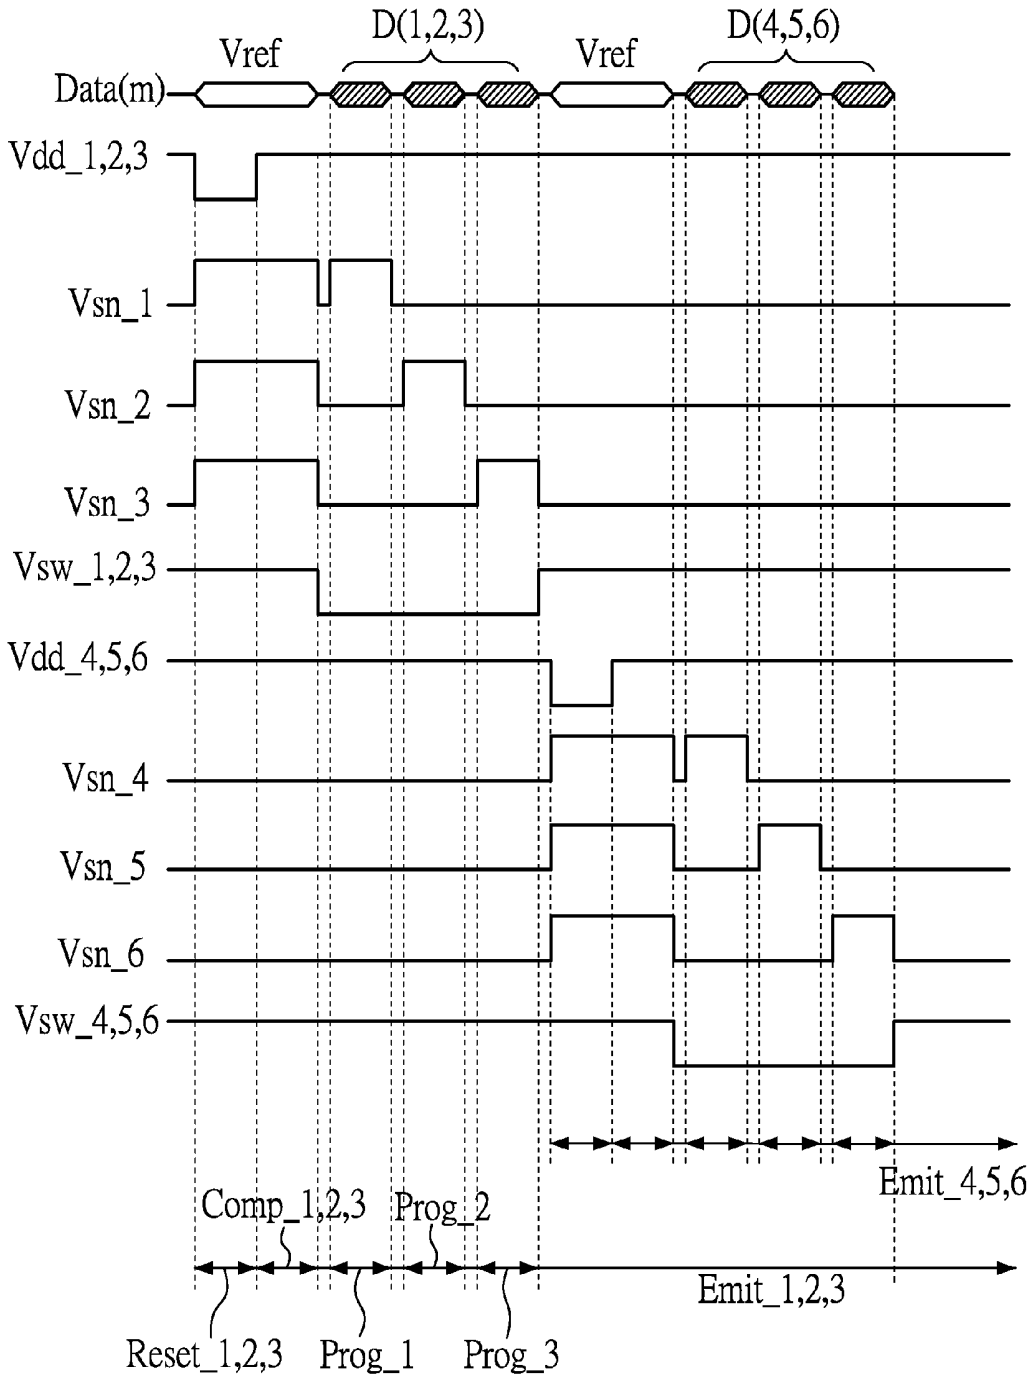
Vref
D(1,2,3)
Vref
D(4,5,6)
Data(m)
Vdd_1,2,3
Vsn_1
Vsn_2
Vsn_3
Vsw_1,2,3
Vdd_4,5,6
Vsn_4
Vsn_5
Vsn_6
Vsw_4,5,6
Emit_4,5,6
Comp_1,2,3
Prog_2
Emit_1,2,3
Reset_1,2,3
Prog_1
Prog_3

FIG. 10

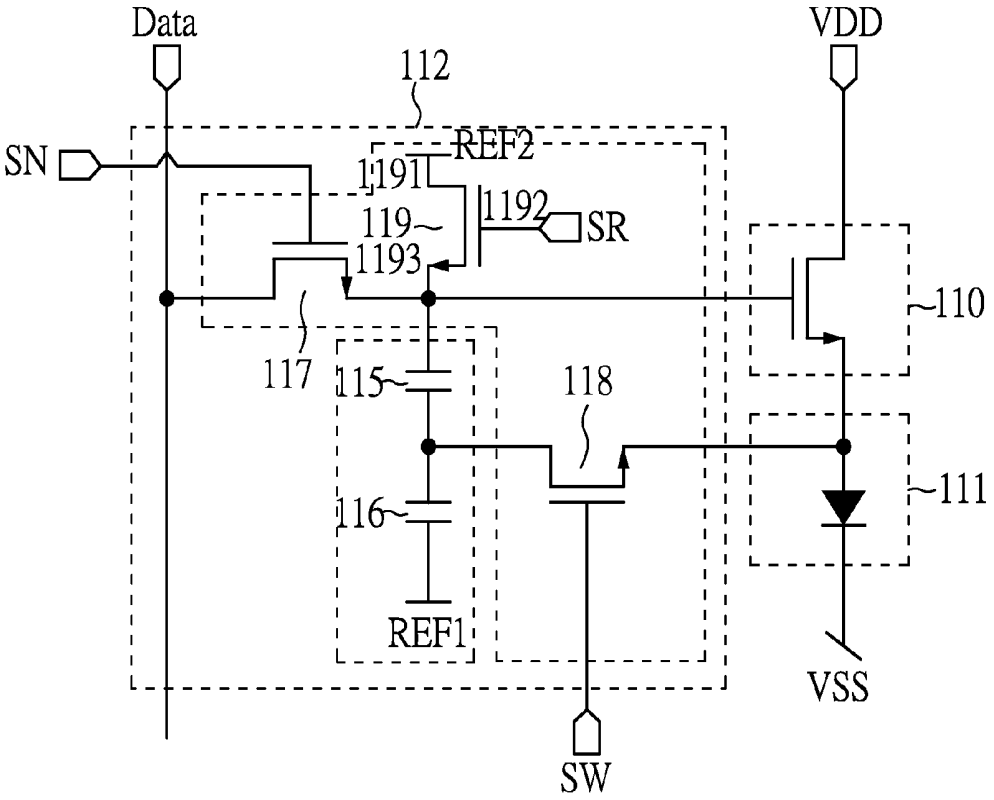
Data
VDD
112
SN
REF2
1191
1192
SR
119
1193
110
117
115
118
111
116
REF1
VSS
SW

FIG. 11

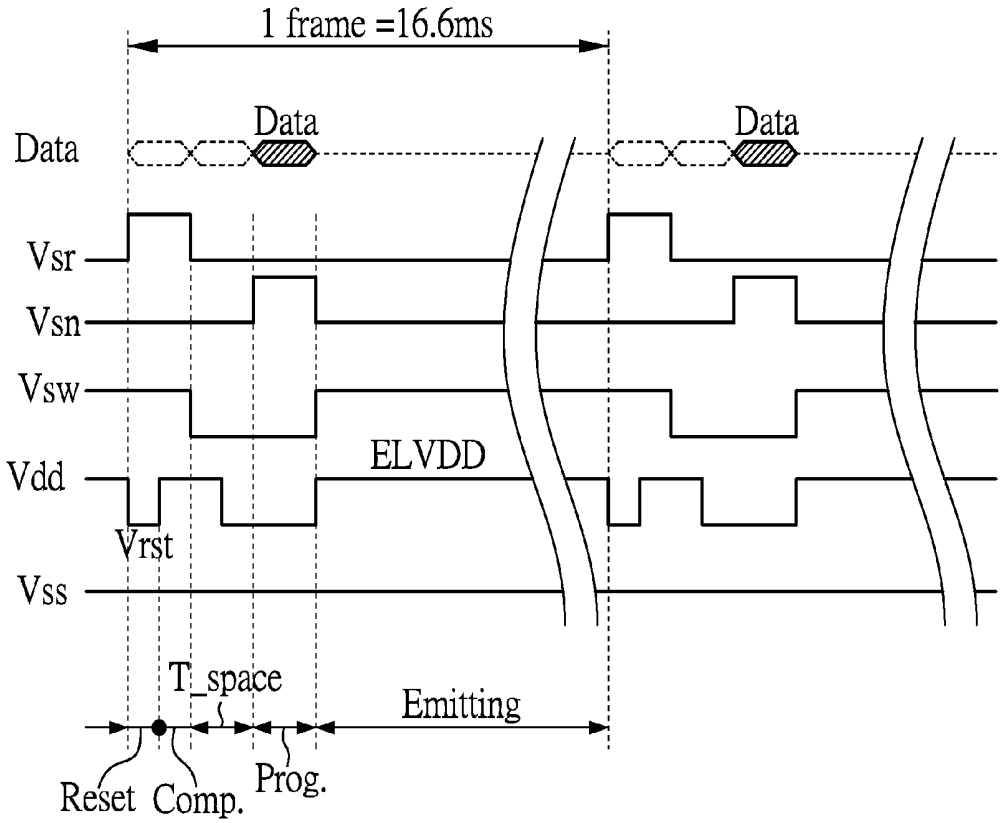
1 frame =16.6ms
Data
Data
Data
Vsr
Vsn
Vsw
Vdd
ELVDD
Vrst
Vss
T_space
Emitting
Reset
Comp.
Prog.

FIG. 12

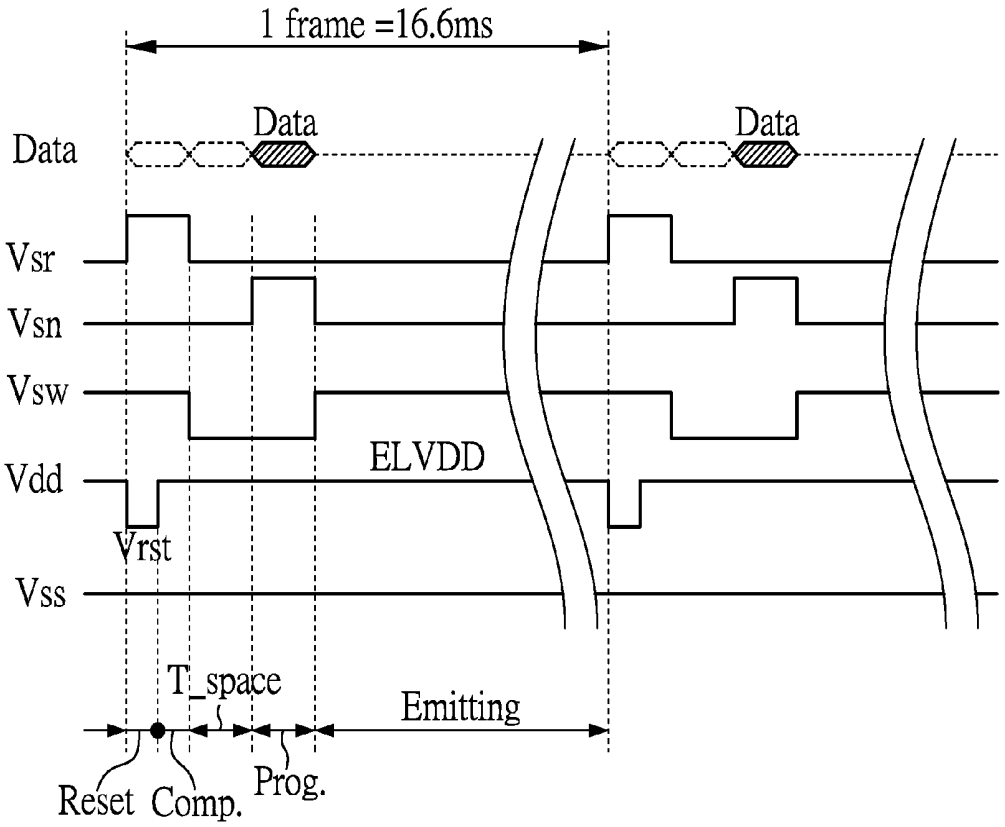
1 frame =16.6ms
Data
Data
Data
Vsr
Vsn
Vsw
ELVDD
Vdd
Vrst
Vss
T_space
Emitting
Reset
Comp.
Prog.

FIG.13

PIXEL CIRCUIT AND DRIVING METHOD AND DISPLAY DEVICE THEREOF

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a pixel circuit and its driving method and, more particularly, to an active matrix OLED pixel circuit and its driving method suitable for compensating transistor threshold voltage and OLED voltage.

[0003] 2. Description of Related Art

[0004] Driving transistors of active matrix OLED (AMOLED) can be classified to P-type transistors and N-type transistors according to its back plate manufacture technologies. Please refer to FIG. **1** and FIG. **2**, which are prior P-type and N-type driving circuits of AMOLED, respectively. As shown in FIG. **2**, for the N-type driving circuit, there is a problem in that the threshold voltage of the N-type transistor may be shifted. This threshold voltage shift is caused by the generation of degradation due to the manufacture variation and long-time operation, resulting in being unable to output a current same as the initial current and thus producing mura or brightness decay. Moreover, due to that the OLED is operated for a long time, the operating voltage is increased following the increase of the time. Thus, to solve the aforementioned problem, an N-type compensation circuit is proposed. With reference to both FIG. **3** and FIG. **4**, there are a schematic diagram of N-type AMOLED compensation driving circuit and a timing diagram of N-type compensation driving circuit. As shown in FIG. **3** and FIG. **4**, it can be seen that the number of components (6T2C) in the pixel circuit design is too many and the driving signals (Sn, Sn', En, Xen) become too complicated, resulting in being unable to satisfy the requirements of high precision and high aspect ratio.

[0005] Therefore, it is desirable to provide an improved pixel circuit and its driving method, in which N-type driving transistors are used to drive the OLED, and combined with a plurality of transistors and capacitors to compensate the threshold voltage of the N-type transistor and the voltage of the AMOLED, so as to satisfy the requirements of high precision and high aspect ratio.

SUMMARY OF THE INVENTION

[0006] The invention provides a pixel circuit, which comprises: an OLED including an anode, and a cathode connected to a first voltage source; a driving transistor for driving the OLED including a first node connected to a second voltage source, a second node, and a third node connected to the anode; a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source, and a third terminal connected to the second node; a second transistor including a first terminal, a second terminal connected to a second control signal source, and a third terminal connected to the anode and the third node; a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor; and a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node.

[0007] In addition, in a reset stage, the first control signal source provides a first control signal to turn the first transistor on, and the data driving line inputs a reference voltage to the driving transistor to reset the second node, the third node, and the first terminal of the coupling capacitor; in a compensating stage, the second node and the storage capacitor store a threshold voltage of the driving transistor, and the driving transistor is transited from on state to off state; in a programming stage, the second control signal source provides a second control signal to turn off the second transistor, the data driving line inputs a data voltage to the driving transistor, and a voltage of the coupling capacitor is coupled to the first terminal of the coupling capacitor; in a light emitting stage, the threshold voltage and a voltage of the OLED are coupled to the second node.

[0008] Moreover, the driving transistor, first transistor and second transistor are N-type transistors.

[0009] Besides, the pixel circuit comprises a third transistor including a first terminal connected to a forth voltage source, a second terminal connected to a third control signal source, and a third terminal connected to the second node, the forth voltage source provides a reference voltage, the third transistor is turned on according to a third control signal so as to input the reference voltage to the second node.

[0010] Furthermore, the invention provides a method for driving a pixel circuit, wherein the pixel circuit comprises an OLED including an anode and a cathode connected to a first voltage source; a driving transistor for driving the OLED, the driving transistor including a first node connected to a second voltage source, a second node and a third node connected to the anode; a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source and a third terminal connected to the second node; a second transistor including a first terminal, a second terminal connected to a second control signal source and a third terminal connected to the anode and the third node; a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor; and a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node. The method comprises the steps of: (A) in a reset stage, using the first control signal to turn on the first transistor, and inputting a reference voltage to the driving transistor for resetting the second node, the third node and the first terminal of the coupling capacitor; (B) in a compensating stage, storing a threshold voltage of the driving transistor to the third node and the storage capacitor, and the driving transistor being transited from on state to off state; (C) in a programming stage, using the second control signal to turn off the second transistor, inputting a data voltage to the driving transistor, and coupling a voltage of the coupling capacitor to the first terminal of the coupling capacitor; and (D) in a light emitting stage, coupling the threshold voltage and a voltage of the OLED to the second node.

[0011] In addition, the invention provides a display panel, which comprises: a plurality of pixel circuits arranged as a pixel circuit matrix according a plurality of columns and rows; a data driver having a plurality of data driving lines connected to the pixel circuits on the columns of the pixel circuit matrix for providing at least an input voltage; a scan driver having a plurality of scan driving lines vertically intersected with the data driving lines for being connected to the pixel circuits on the rows of the pixel circuit matrix for providing at least a switching voltage; a voltage generator having a plurality of voltage supply lines respectively arranged between the scan driving lines for being connected to the pixel circuits to supply at least a voltage source; a timing

controller connected to the data driver, the scan driver, and the voltage generator for controlling the data driver, the scan driver, and the voltage generator.

[0012] Other objects, advantages, and novel features of the invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIG. **1** is a schematic diagram of a prior P-type driving circuit of an AMOLED;

[0014] FIG. **2** is a schematic diagram of a prior N-type driving circuit of an AMOLED;

[0015] FIG. **3** is a schematic diagram of a prior N-type compensation driving circuit of an AMOLED;

[0016] FIG. **4** is a timing diagram of the compensation driving circuit shown in FIG. **3**;

[0017] FIG. **5** is a schematic diagram of the pixel circuit in accordance with a preferred embodiment of the invention;

[0018] FIG. **6** is a timing diagram of the pixel circuit shown in FIG. **5**;

[0019] FIG. **7** is another timing diagram of the pixel circuit shown in FIG. **5**;

[0020] FIG. **8** is a schematic diagram of the display panel in accordance with a preferred embodiment of the invention;

[0021] FIG. **9** is a timing diagram for the display panel using three rows of the pixel circuit matrix as a display unit in accordance with the invention;

[0022] FIG. **10** is another timing diagram for the display panel using three rows of the pixel circuit as a display unit in accordance with the invention;

[0023] FIG. **11** is a schematic diagram of the pixel circuit in accordance with another preferred embodiment of the invention;

[0024] FIG. **12** is a timing diagram of the pixel circuit shown in FIG. **11**; and

[0025] FIG. **13** is another timing diagram of the pixel circuit shown in FIG. **11**.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0026] With reference to FIG. **5**, there is shown a schematic diagram of a pixel circuit in accordance with a preferred embodiment of the invention. As shown, the pixel circuit includes: a driving transistor **50**, an OLED **51**, and a voltage control unit **52**. The OLED **51** includes an anode **511** and a cathode **512**, wherein the cathode **512** is connected to a first voltage source VSS that provides a first voltage Vss. The driving transistor **50** is preferred to be an N-type transistor including a first node **501**, a second node **502** and a third node **503**, wherein the first node **501** is a drain electrically connected to a second voltage source VDD that provides a second voltage Vdd, the second node **502** is a gate, and the third node **503** is a source electrically connected to the anode **511**,

[0027] The aforementioned voltage control unit **52** includes a first transistor **57**, a second transistor **58**, a storage capacitor **56** and a coupling capacitor **55**. The first transistor **57** has a first terminal **571** connected to a data driving line DATA, a second terminal **572** connected to a first control signal source SW that provides a first control signal, and a third terminal **573** connected to the second node **502**. The second transistor **58** has a first terminal **581**, a second terminal **582** connected to a second control signal source SW that provides a second control signal, and a third terminal **583** connected to the anode **511** and the third node **503**. The first and second transistors **57**, **58** are preferred to be N-type transistors. The storage capacitor **56** has a first terminal **561** connected to a third voltage source REF**1**, and a second terminal **562** connected to the first terminal **581** of the second transistor **58**. The coupling capacitor **55** has a first terminal **551** connected to the first terminal **581** of the second transistor **58**, and a second terminal **552** connected to the second node **502**. Accordingly, when the pixel circuit is in a reset stage, the first transistor **57** is turned on by the first control signal, and a reference voltage Vref is inputted to the driving transistor **50** to reset the second node **502**, the third node **503** and the first terminal **581** of the second transistor **58**. When the pixel circuit is in a compensation stage, a threshold voltage Vt of the driving transistor **50** is stored into the third node **503** and the storage capacitor **56**, and then the driving transistor **50** is transited from on state to off state. When the pixel circuit is in a programming stage, the second transistor **58** is turned off by the second control signal, a data voltage is inputted to the driving transistor **50**, and a voltage of the coupling capacitor **55** is coupled to the first terminal **581** of the second transistor **58**. When the pixel circuit is in a light emitting stage, the threshold voltage Vt and a voltage Voled of the OLED **51** are coupled to the second node **502**. The aforementioned reset stage, compensation stage, programming stage and light emitting stage are executed repeatedly in sequence.

[0028] With reference to FIG. **6**, which is a timing diagram of the pixel circuit shown in FIG. **5**, the circuit operation can be divided into the reset stage (Reset), compensation stage (Comp.), programing stage (Prog.) and light emitting stage (Emitting). The on/off states of the driving transistor **50**, the first transistor **51**, the second transistor **58** and the OLED **51** corresponding those stages are illustrated in Tablet, and a voltage (VG) of the second node **502** of the driving transistor **50**, a voltage (Vs) of the anode **511** of the OLED **51**, a voltage (VN) of the first terminal **551** of the coupling capacitor **55**, a voltage difference (VGS) between the second node **502** and the anode **511**, and a voltage difference (VGN) between the second node **502** and the first terminal **551** of the coupling capacitor **55** are illustrated in Table 2.

TABLE 1

Cycle	Driving transistor	First transistor	Second transistor	OLED
Reset stage	ON	ON	ON	OFF
Comp. stage	OFF	ON	ON	OFF
Prog. stage	ON	ON	OFF	OFF
Emitting stage	ON	OFF	ON	ON

TABLE 2

	Reset stage	Comp. stage	Prog. stage	Emitting stage
Second node of the driving transistor (V_G)	Vref	Vref	Vdata	(Vdata – Vref) * (1 – f1) + Vt + Voled
Anode of the OLED (V_S)	Vrst	Vref – Vt	Vrst	Voled

TABLE 2-continued

	Reset stage	Comp. stage	Prog. stage	Emitting stage
First terminal of the coupling capacitor (V_N)	Vrst	Vref − Vt	Vref * (1 − f1) + Vdata * f1 − Vt	Voled
Voltage difference between the second node and the anode (V_{GS})	Vref − Vrst	Vt	Vdata − Vrst	(Vdata − Vref) * (1 − f1) + Vt
Second node and the first terminal of the coupling capacitor (V_{GN})	Vref − Vrst	Vt	(Vdata − Vref) * (1 − f1) + Vt	(Vdata − Vref) * (1 − f1) + Vt

[0029] As a result, in the reset stage, the driving transistor **50**, first transistor **57**, and second transistor **58** are in on state, and the OLED **50** is in off state. The data driving line (Data) inputs a reference voltage Vref to the first terminal **571** of the first transistor **57**, and then to the third terminal **573** of the first transistor **57** so as to reset the second node **502** to be the reference voltage Vref, and the second voltage Vdd is a reset voltage Vrst at the same time, satisfying the relation of Vref>Vrst+Vt, such that the third node **503** is reset to be the reset voltage Vrst, and thus the first terminal **551** of the coupling capacitor **55** is reset to be the reset voltage Vrst.

[0030] In the compensation stage, the first transistor **57** and the second transistor **58** are in on state, and the OLED **51** is in off state. The second node **502** is still the reference voltage Vref, and the second voltage Vdd is transited to a high potential voltage ELVDD at the same time, such that the driving transistor **50** is turned gradually from on to off by discharging, and the anode **511** of the OLED **51** is discharged to Vref−Vt, so as to measure the threshold voltage Vt of the driving transistor **50** and then store it into the storage capacitor **56**.

[0031] As shown in FIG. **6**, after the compensation stage, there is a space time (T_space), which is a period of time between the compensation stage and the programing stage, and the space time is greater than or equal to 0.

[0032] In the programing stage, the driving transistor **50** and the first transistor **57** are in on state, and the second transistor **58** and the OLED **51** are in off state. The data driving line (Data) inputs a data voltage Vdata to the first terminal **571** of the first transistor **57**, and then to the third terminal **573** of the first transistor **57** so as to allow the second node **502** to be the data voltage Vdata, and the second voltage Vdd is the reset voltage Vrst at the same time, such that the voltage VN of the first terminal **511** of the coupling capacitor **55** is coupled, via the coupling capacitor **55**, to:

$$V_N = Vref - Vt + (Vdata - Vref) * f1 \quad (1)$$
$$= Vref * (1 - f1) + Vdata * f1 - Vt,$$

and the voltage difference between the second node **502** and the first terminal **511** of the coupling capacitor **55** is:

$$V_{GN} = Vdata - (Vref(1 - f1) + Vdata * f1 - Vt) \quad (2)$$
$$= (Vdata - Vref) * (1 - f1) + Vt,$$

wherein f1=Ccp/(Ccp+Cst), Ccp is capacitance value of the coupling capacitor **55**, and Cst is capacitance value of the storage capacitor **56**. The storage capacitor **56** has both the threshold voltage Vt and data voltage Vdata in the previous stage, such that the voltage difference V_{GN} between the second node **502** and the first terminal **551** of the coupling capacitor **55** is greater than or equal to the threshold voltage Vt. Meanwhile, the OLED **51** cannot be turned on, and thus the following conditions have to be satisfied:

$$Vrst \leq Vss + Voled(0), \quad (3)$$

wherein Voled(0) is a turn-on voltage of the OLED **51**.

[0033] In the light emitting stage, the driving transistor **50**, second transistor **58** and OLED **51** are in on state, and the first transistor **57** is in off state. The anode **511** and the first terminal **551** of the coupling capacitor **55** are both the voltage Voled of the OLED **51**, and the coupling capacitor **55** couples the voltage Voled of the OLED **51** to the second node **502**:

$$V_G = Vdata + (Voled - (Vref * (1 - f1) + Vdata * f1 - Vt)) \quad (4)$$
$$= (Vdata - Vref) * (1 - f1) + Vt + Voled,$$

while the voltage difference between the second node **502** and the anode **511** is:

$$V_{GS} = (Vdata - Vref) * (1 - f1) + Vt, \quad (5)$$

so that the output current I_{oled} of the driving transistor **50** can be expressed as:

$$I_{oled} = Kp * (V_{GS} - Vt)^2 \quad (6)$$
$$= Kp * [(Vdata - Vref) * (1 - f1)]^2,$$

where Kp=1/2(μ*COX)(W/L), μ is carrier mobility of the driving transistor **50**, COX is a per area capacitance of the driving transistor, and (W/L) is a width to length ratio of the driving transistor **50**. From equation (6), it can be known that the output current of the driving transistor **50** is not related with the threshold voltage Vt and the voltage of the OLED **51** (V_{oled}), thereby not only compensating the threshold voltage of the transistor and the voltage of the AMOLED, but also satisfying the requirements of high precision and high aspect ratio.

[0034] It is noted that, in the light emitting stage, there are charges distributed into the first terminal **551** of the coupling capacitor **55** and the third node **503** due to the second transistor **58** being turned on instantaneously. In the moment of turning on the second transistor **58**, the first terminal **551** of the coupling capacitor **55** can be expressed as:

$$V_N = \{V_{N_pro} * Cst + V_{S_pro} * Coled\} / (Cst + Coled), \quad (7)$$

where Coled is a capacitance value of the OLED **51**, V_{N_pro} is the voltage of the first terminal **551** of the coupling capacitor

55 in the program stage (i.e. Vref*(1−f1)+Vdata*f1−Vt), and V_{S_pro} is the voltage of the third node **503** in the program stage. If the capacitance value can be ignored (i.e. the Coled is much smaller than the capacitance value of the storage capacitor **56** (Cst)), the equation (7) can be simplified as:

$$V_N = Vref*(1-f1)+Vdata*f1-Vt. \quad (8)$$

It is thus known that the voltage of the first terminal **551** of the coupling capacitor **55** is maintained to be unchanged, i.e., it still stores the threshold voltage Vt and the voltage of the OLED **51** (Voled). However, if the capacitance value Coled cannot be ignored, the stored threshold voltage Vt of the first terminal **551** of the coupling capacitor **55** may be lost due to the charges distributed between it and the third node **503**.

[0035] With reference to both FIG. **5** and FIG. **7**, FIG. **7** is another timing diagram of the pixel circuit shown in FIG. **5**. The timing diagram of FIG. **7** is similar to that of FIG. **6** except that, in the programming stage, the second voltage is the high potential voltage ELVDD and the driving transistor **50** is not reset. The timing diagram shown in FIG. **7** is preferred to be used in the situation that the capacitor Coled of the OLED **51** cannot be ignored (i.e., Coled is not much smaller than the capacitance value Cst of the storage capacitor **56**). In the programming stage, the third node **503** is reset to Vdata−Vt. In the moment of turning on the second transistor **58**, the voltage V_N of the first terminal **551** of the coupling capacitor **55** is transited as:

$$\begin{aligned} V_N &= \{[Vref*(1-f1)+Vdata*f1-Vt]*Cst + \\ &\quad [Vdata-Vt]*Coled\}/(Cst+Coled) \\ &= \{[Vref*(1-f1)+Vdata*f1]*Cst+(Vdata*Coled)\}/ \\ &\quad (Cst+Coled)-Vt \\ &= Func(Vref, Vdata, Ccp, Cst, Coled)-Vt, \end{aligned} \quad (9)$$

where Func(Vref, Vdata, Ccp, Cst, Coled) is a function of Vref, Vdata, Ccp, Cst and Coled. From equation (9), it can be known that, in the moment of turning on the second transistor **58**, the threshold voltage stored by the first terminal **551** of the coupling capacitor **55** is not lost. Under the timing diagram shown in FIG. **7**, the second node **502** voltage (V_G), the anode **511** voltage (V_S) of the OLED **51**, the voltage (V_N) of the first terminal **551** of the coupling capacitor **55**, the voltage difference (V_{GS}) between the second node **502** and the anode **511**, and the voltage difference (V_{GN}) between the second node **502** of the driving transistor **50** and the first terminal **551** of the coupling capacitor **55** are illustrated in Table 3.

TABLE 3

	Reset stage	Comp. stage	Prog. stage	Emitting stage
Second node of the driving transistor (V_G)	Vref	Vref	Vdata	Func (Vref, Vdata, Ccp, Cst, Coled) + Vt + Voled
Anode of the OLED (V_S)	Vrst	Vref − Vt	Vdata − Vt	Voled
First terminal of the coupled capacitor (V_N)	Vrst	Vref − Vt	Vref * (1 − f1) + Vdata * f1 − Vt	Voled
Voltage difference between the second node and the anode (V_{GS})	Vref − Vrst	Vt	Vt	Func(Vref, Vdata, Ccp, Cst, Coled) + Vt
Voltage difference between the second node and the first terminal of the coupling capacitor (V_{GN})	Vref − Vrst	Vt	(Vdata − Vref) * (1 − f1) + Vt	Func (Vref, Vdata, Ccp, Cst, Coled) + Vt

[0036] The invention also provides a method for driving a pixel circuit. Also with reference to the pixel circuit shown in FIG. **5**, the method includes the steps of: (A) in the reset stage, using the first control signal SN to turn on the first transistor **57**, and inputting the reference voltage Vref to the driving transistor **50** for resetting the second node **502**, the third node **503** and the first terminal **581** of the second transistor **58**; (B) in the compensating stage, storing a threshold voltage Vt of the driving transistor **50** to the third node **503** and the storage capacitor **56**, and the driving transistor **50** being transited from on state to off state; (C) in a programming stage, using the second control signal SW to turn off the second transistor **58**, inputting the data voltage Vdata to the driving transistor **50**, and coupling a voltage of the coupling capacitor **55** to the first terminal **551** of the coupling capacitor **55**; and (D) in the light emitting stage, coupling the threshold voltage Vt and a voltage Voled of the OLED **51** to the second node **502**.

[0037] With reference to FIG. **8**, there is shown a schematic diagram of the display panel using the aforementioned pixel circuit in accordance with a preferred embodiment of the invention, which includes: a plurality of pixel circuits **80**, a data driver **81**, a scan driver **82**, a voltage generator **83**, and a timing controller **84**. The pixel circuits **80** are arranged as a pixel circuit matrix according a plurality of columns and rows. The data driver **81** has a plurality of data driving lines (Data_**1**, Data_**2**, Data_**3**, . . .) connected to the pixel circuits **80** on the columns of the pixel circuit matrix for providing at least an input voltage. The scan driver **82** has a plurality of scan driving lines (SN_**1**, SW_**1**, SN_**2**, SW_**2**, SN_**3**, SW_**3**, . . .) vertically intersected with the data driving lines for being connected to the pixel circuits on the rows of the pixel circuit matrix for providing at least a switching voltage. The voltage generator has a plurality of voltage supply lines respectively arranged between the scan driving lines for being connected to the pixel circuits so as to supply at least a voltage source. The timing controller **84** is connected to the data driver **81**, the scan driver **82**, and the voltage generator **83**, respectively, for controlling the data driver **81**, the scan driver **82**, and the voltage generator **83**. In one embodiment, the display panel configures three rows of the pixel circuit matrix as a display unit. The reset stage, compensation stage, programing stage

and light emitting stage of each display unit are executed sequentially, and the display units are performed sequentially.

[0038] With reference to FIG. **9**, there is shown a timing diagram for the display panel using three rows of the pixel circuit matrix, shown in FIG. **8**, as a display unit in accordance with the invention. The embodiment shown in FIG. **9** is similar to that in FIG. **6** except that, in the programming stage, the scan driver **82** sequentially turns on the first transistors **57** of the pixel circuits **80** of each row for the display unit via the scan driving lines (SN_**1**, SN_**2**, SN **3**) and, at the same time, the data driving line Data(m) inputs a set of data voltage Vdata(1,2,3). The set of data voltage Vdata(1,2,3) sequentially inputs a data voltage to the first transistors **57** of the pixel circuits **80** of each column. The set of data voltage Vdata(1,2,3) sequentially inputs a data voltage to the first transistors **57** of the pixel circuits **80** of each column, corresponding to the scan driving lines (SN_**1**, SN_**2**, SN_**3**) sequentially turning on the first transistors **57** of the pixel circuits **80** of each row. The remaining is operated in the same manner. When the display unit completes the reset stage, the compensation stage, the programming stage and the light emitting stage, the next display unit is then performed sequentially.

[0039] With reference to both FIG. **8** and FIG. **10**, FIG. **10** is another timing diagram for the display panel using three rows of the pixel circuit matrix, shown in FIG. **8**, as a display unit in accordance with the invention. As shown in FIG. **10**, this embodiment is similar to that in FIG. **7** except that, in programming stage, the scan driver **82** sequentially turns on the first transistors **57** of the pixel circuits **80** of each of three rows for the pixel circuit matrix via the scan driving lines (SN_**1**, SN_**2**, SN_**3**) and, at the same time, the data driving line Data(m) inputs a set of data voltage Vdata(1,2,3). The set of data voltage Vdata(1,2,3) sequentially inputs a data voltage to the first transistors **57** of the pixel circuits **80** of each row. The set of data voltage Vdata(1,2,3) sequentially inputs a data voltage to the first transistors **57** of the pixel circuits **80** of each row corresponding to the scan driving lines (SN_**1**, SN_**2**, SN_**3**) sequentially turning on the first transistors **57** of the pixel circuits **80** of each row. The remaining is operated in the same manner This embodiment is different from FIG. **9** only in that, in the programming stage, the second voltage Vdd_**1**,**2**,**3** provided by the voltage supply lines of the voltage generator **83** is maintained at a high voltage ELVDD and the driving transistor **50** is not reset, while the remaining is the same.

[0040] With reference to FIG. **11**, there is shown a schematic diagram of the pixel circuit in accordance with another preferred embodiment of the invention. This embodiment is different from FIG. **5** only in that a third transistor **119** is added. The third transistor **119** has a first terminal **1191** connected to a fourth voltage source REF**2**, a second terminal **1192** connected to a third control signal source SR that provides a third control signal Vsr, and a third terminal **1193** connected to the second node **502**, wherein the fourth voltage source REF**2** is used to provide the reference voltage Vref. Please also refer to FIG. **12**, which is a timing diagram of the pixel circuit shown in FIG. **11**. It is proposed to reduce the turn-on frequency of the first control signal Vsn in FIG. **6**, and to turn on the third transistor **119** by the third control signal Vsr so as to input the reference voltage Vref, while the remaining is the same.

[0041] With reference to both FIG. **11** and FIG. **13**, FIG. **13** is another timing diagram of the pixel circuit shown in FIG. **11**. As shown in FIG. **13**, this embodiment is different from FIG. **7** only in that the turn-on frequency of the first control signal Vsn in FIG. **7** is decreased, and the third transistor **119** is turned on by the third control signal Vsr so as to input the reference voltage Vref, while the remaining is the same. Further, this embodiment is different from FIG. **12** only in that, in the programming stage, the second voltage Vdd provided by the voltage supply lines of the voltage generator **83** is maintained at a high voltage ELVDD and the driving transistor **50** is not reset, while the remaining is the same.

[0042] Although the present invention has been explained in relation to its preferred embodiment, it is to be understood that many other possible modifications and variations can be made without departing from the spirit and scope of the invention as hereinafter claimed.

What is claimed is:

1. A pixel circuit, comprising:

an OLED including an anode and a cathode connected to a first voltage source;

a driving transistor for driving the OLED, the driving transistor including a first node connected to a second voltage source, a second node, and a third node connected to the anode;

a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source, and a third terminal connected to the second node;

a second transistor including a first terminal, a second terminal connected to a second control signal source, and a third terminal connected to the anode and the third node;

a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor; and

a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node.

2. The pixel circuit as claimed in claim **1**, wherein, in a reset stage, the first control signal source provides a first control signal to turn on the first transistor, and the data driving line inputs a reference voltage to the driving transistor for resetting the second node, the third node and the first terminal of the coupling capacitor; in a compensating stage, the third node and the storage capacitor store a threshold voltage of the driving transistor, and the driving transistor transits from on state to off state; in a data write stage, the second control signal source provides a second control signal to turn off the second transistor, the data driving line inputs a data voltage to the driving transistor, and a voltage of the coupling capacitor is coupled to the first terminal of the coupling capacitor; in a light emitting stage, the threshold voltage and a voltage of the OLED are coupled to the second node.

3. The pixel circuit as claimed in claim **1**, wherein the driving transistor, the first transistor and the second transistor are N-type transistors.

4. The pixel circuit as claimed in claim **1** further comprising a third transistor including a first terminal connected to a forth voltage source, a second terminal connected to a third control signal source, and a third terminal connected to the second node, the forth voltage source providing a reference voltage, the third transistor being turned on according to a third control signal so as to input the reference voltage to the second node.

5. A method for driving a pixel circuit, the pixel circuit comprising an OLED including an anode and a cathode connected to a first voltage source; a driving transistor for driving the OLED, the driving transistor including a first node connected to a second voltage source, a second node and a third node connected to the anode; a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source and a third terminal connected to the second node; a second transistor including a first terminal, a second terminal connected to a second control signal source and a third terminal connected to the anode and the third node; a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor; and a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node, the method comprising the steps of:

(A) in a reset stage, using the first control signal to turn on the first transistor, and inputting a reference voltage to the driving transistor for resetting the second node, the third node and the first terminal of the coupling capacitor;

(B) in a compensating stage, storing a threshold voltage of the driving transistor to the third node and the storage capacitor, and the driving transistor being transited from on state to off state;

(C) in a data write stage, using the second control signal to turn off the second transistor, inputting a data voltage to the driving transistor, and coupling a voltage of the coupling capacitor to the first terminal of the coupling capacitor; and

(D) in a light emitting stage, coupling the threshold voltage and a voltage of the OLED to the second node.

6. The method as claimed in claim **5**, wherein, in step (A), the second voltage is a first reset voltage, and the reference voltage is greater than a sum of the first reset voltage and the threshold voltage.

7. The method as claimed in claim **5**, wherein, in step (C), the second voltage is a second reset voltage, and the second reset voltage is lower than or equal to a sum of the first voltage and an initial voltage of the OLED.

8. The method as claimed in claim **5**, wherein the driving capacitor, the first transistor and the second transistor are N-type transistors.

9. The method as claimed in claim **5**, wherein the pixel circuit further comprising a third transistor including a first terminal connected to a forth voltage source, a second terminal connected to a third control signal source, and a third terminal connected to the second node, the third control signal source providing a third control signal, the forth voltage source providing the reference voltage, so that, in step (A), the third transistor is turned on according to a third control signal so as to input the reference voltage to the second node.

10. A display panel, comprising:

a plurality of pixel circuits arranged as a pixel circuit matrix according a plurality of columns and rows;

a data driver having a plurality of data driving lines connected to the pixel circuits on the columns of the pixel circuit matrix for providing at least an input voltage;

a scan driver having a plurality of scan driving lines vertically intersected with the data driving lines for being connected to the pixel circuits on the rows of the pixel circuit matrix for providing at least a switching voltage;

a voltage generator having a plurality of voltage supply lines respectively arranged between the scan driving lines for being connected to the pixel circuits to supply at least a voltage source;

a timing controller connected to the data driver, the scan driver, and the voltage generator for controlling the data driver, the scan driver, and the voltage generator,

wherein each of the pixel circuits comprises:

an OLED including an anode and a cathode connected to a first voltage source;

a driving transistor for driving the OLED, the driving transistor including a first node connected to a second voltage source, a second node, and a third node connected to the anode;

a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source and a third terminal connected to the second node;

a second transistor including a first terminal, a second terminal connected to a second control signal source and a third terminal connected to the anode and the third node;

a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor; and

a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node.

* * * * *

专利名称(译)	像素电路及其驱动方法和显示装置		
公开(公告)号	US20140292740A1	公开(公告)日	2014-10-02
申请号	US14/044993	申请日	2013-10-03
[标]申请(专利权)人(译)	群创光电股份有限公司		
申请(专利权)人(译)	群创光电		
当前申请(专利权)人(译)	群创光电		
[标]发明人	TSENG MING CHUN HSU YI HUA		
发明人	TSENG, MING-CHUN HSU, YI-HUA		
IPC分类号	G09G3/32		
CPC分类号	G09G3/3258 G09G3/3233 G09G2300/0819 G09G2300/0852 G09G2300/0861 G09G2300/0866		
优先权	102111099 2013-03-28 TW		
其他公开文献	US9230481		
外部链接	Espacenet USPTO		

摘要(译)
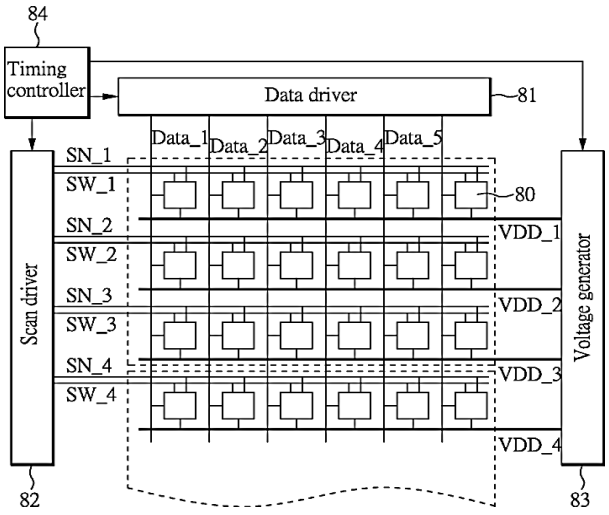
像素电路包括OLED，驱动晶体管，第一和第二晶体管，存储电容器和耦合电容器。 OLED包括连接到第一电压源的阳极和阴极。驱动晶体管包括连接到第二电压源的第一节点，第二节点和连接到阳极的第三节点。第一晶体管包括分别连接到数据驱动线，第一控制信号源和第二节点的第一，第二和第三端子。第二晶体管包括第一端子，连接到第二控制信号源的第二端子，以及连接到阳极和第三节点的第三端子。存储电容器包括分别连接到第三电压源和第二晶体管的第一和第二端子。耦合电容器包括分别连接到第二晶体管和第二节点的第一和第二端子。