



(11) **EP 2 713 199 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.04.2014 Bulletin 2014/14

(51) Int Cl.:
G02F 1/1335 (2006.01)

(21) Application number: **13180101.1**

(22) Date of filing: **12.08.2013**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

- **Wang, Can**
100176 Beijing (CN)
- **Hui, Guanbao**
100176 Beijing (CN)
- **Xue, Jianshe**
100176 Beijing (CN)

(30) Priority: **27.09.2012 CN 201210365824**

(71) Applicant: **Boe Technology Group Co. Ltd.**
Beijing 100015 (CN)

(72) Inventors:
• **Qi, Yonglian**
100176 Beijing (CN)

(74) Representative: **Brötz, Helmut**
Rieder & Partner
Patentanwälte - Rechtsanwalt
Corneliusstrasse 45
42329 Wuppertal (DE)

(54) **Color filter substrate and fabrication method thereof, transfective liquid crystal display device**

(57) A color filter substrate and a fabrication method thereof, and a transfective liquid crystal display device are provided. The color filter substrate comprises: a transparent base substrate; a plurality of separators formed on a surface of the transparent base substrate and separating the surface of the transparent base substrate into a plurality of color filter regions; a plurality of color filter patterns that arrange alternatively with the sep-

arators, wherein each color filter pattern covers one color filter region; an aperture formed in the color filter pattern on at least one of the color filter regions; a flat protective layer at least disposed on the color filter pattern and the aperture, wherein an upper surface of a portion of the flat protective layer above the color filter pattern is even with an upper surface of a portion of the flat protective layer above the aperture.

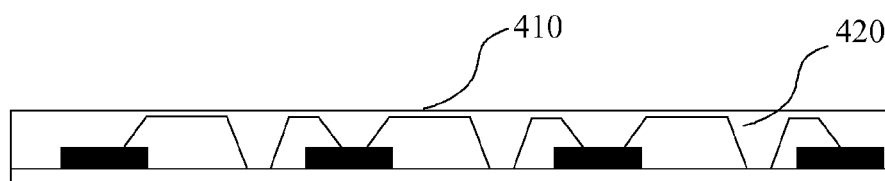


FIG. 4

Description

TECHNICAL FIELD

[0001] Embodiments of the present invention relate to a color filter substrate and a fabrication method thereof, and a transfective liquid crystal display device comprising the color filter substrate.

BACKGROUND

[0002] As liquid crystal display is a non-self-luminous display, the liquid crystal display panel must be provided with a light source such as backlight, front light or external light source in order to display images. In accordance with different ways of using the light source, the liquid crystal display is divided into three kinds of transmissive liquid crystal display, reflective liquid crystal display and transfective liquid crystal display. Currently, the transfective liquid crystal display gets more concern as it can simultaneously use light from the external light source and the backlight, which is helpful for application in portable products.

[0003] The normal transfective liquid crystal display includes a color filter substrate, and a color filter layer is provided on the color filter substrate. The transfective liquid crystal display includes a transmissive region and a reflective region, wherein the reflective region has a reflecting electrode or a reflecting layer for reflecting light from the external light source. The light from outside is incident on the reflecting electrode or reflecting layer through the color filter layer, and the light reflected by the reflecting electrode or reflecting layer returns to outside through the color filter layer, that is, the light runs through the color filter layer twice. In contrast, the light in the transmissive region is emitted from the backlight and runs through the color filter layer only once. Therefore, colors displayed in the reflective region and the transmissive region of the transfective liquid crystal display device may be incongruous.

[0004] To solve the problem described above, an aperture may be provided in the color filter pattern corresponding to the reflective region in the color filter layer. The light from outside is incident into the reflective region via the aperture, and the reflecting electrode or reflecting layer disposed in the reflective region has a diffuse reflection effect. The light underwent the diffuse reflection by the reflecting electrode or reflecting layer is incident on the color filter pattern around the aperture, so in the reflective region, the incident light runs through the color filter layer only once and then is emitted to outside. Thereby, the problem that colors displayed in the reflective region and the transmissive region are incongruous can be alleviated. In addition, the process of providing the aperture in the color filter pattern corresponding to the reflective region in the color filter layer is easy and simple. However, after coating a flat protective layer on the color filter layer, the aperture becomes a pit 440, as shown in

FIG. 1. In order to reduce the depth of the pit, the conventional method is to increase the thickness of the flat protective layer. Within a certain range, the depth of the pit decreases as the thickness of the flat protective layer increases. However, after the thickness of the flat protective layer increases to a certain degree, the depth of the pit will not decrease along with the increase of the thickness of the flat protective layer. The presence of the pit causes the flat protective layer not able to be completely flat, so that the cell gap is uneven after the cell assembly process of the transfective liquid crystal display is performed, resulting in the issues of grayscale deflection, reduction of reflectivity of the reflective region and the like.

SUMMARY

[0005] According to one embodiment of the present invention, a color filter substrate is provided. The color filter substrate comprises: a transparent base substrate; a plurality of separators formed on a surface of the transparent base substrate and separating the surface of the transparent base substrate into a plurality of color filter regions; a plurality of color filter patterns that arrange alternatively with the separators, wherein each color filter pattern covers one color filter region; an aperture formed in the color filter pattern on at least one of the color filter regions; a flat protective layer at least disposed on the color filter pattern and the aperture, wherein an upper surface of a portion of the flat protective layer above the color filter pattern is even with an upper surface of a portion of the flat protective layer above the aperture.

[0006] For example, the color filter substrate further comprises a columnar spacer disposed above the separator, and an upper surface of the columnar spacer is higher than an upper surface of the flat protective layer.

[0007] For example, the columnar spacer and the flat protective layer are integrally formed.

[0008] For example, the separator is a photoresist separator or a black matrix.

[0009] According to another embodiment of the present invention, a fabrication method of a color filter substrate is provided. The method includes steps of:

forming a plurality of separators on a surface of a transparent base substrate, wherein the separators separate the surface of the transparent base substrate into a plurality of color filter regions;
forming a plurality of color filter patterns that arrange alternatively with the separators, wherein each color filter pattern covers one color filter region;
forming an aperture in the color filter pattern on at least one of the color filter regions;
forming a photoresist layer covering the separators, the color filter patterns and the aperture; and
performing exposing and developing processes on the photoresist layer through a dual-tone mask to form a flat protective layer at least disposed on the

color filter pattern and the aperture, wherein an upper surface of a portion of the flat protective layer above the color filter pattern is even with an upper surface of a portion of the flat protective layer above the aperture.

[0010] For example, at the same time of performing exposing and developing processes on the photoresist layer through a dual-tone mask, a columnar spacer disposed above the separator is also formed. An upper surface of the columnar spacer is higher than an upper surface of the flat protective layer..

[0011] For example, the photoresist over the separator is completely exposed with a complete exposure amount of A, an exposure amount for exposing the photoresist over the color filter pattern is $H4/H3 \times A$, and an exposure amount for exposing the photoresist over the aperture is $(H2+H4)/H3 \times A$, where H2 is a thickness of the color filter pattern, H3 is a thickness of the photoresist over the separator, H4 is a thickness of the portion of the flat protective layer above the color filter pattern, and H2+H4 is a thickness of the portion of the flat protective layer above the aperture.

[0012] For example, the separator is a photoresist separator or a black matrix.

[0013] According to still another embodiment of the present invention, a transfective liquid crystal display device is provided. The transfective liquid crystal display device comprises the color filter substrate as described above.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] In order to clearly illustrate the technical solution of the embodiments of the invention, the drawings of the embodiments will be briefly described in the following; it is obvious that the described drawings are only related to some embodiments of the invention and thus are not limitative of the invention.

[0015] FIG. 1 is a schematic diagram of pits present on a flat protective layer in a conventional color filter substrate;

[0016] FIG. 2 is a schematic diagram after forming a separator, a color filter pattern and an aperture in a fabrication method of a color filter substrate according to a first embodiment of the present invention;

[0017] FIG. 3 is a schematic diagram after forming a photoresist layer covering the separator, the color filter pattern and the aperture in the fabrication method of the color filter substrate according to the first embodiment of the present invention;

[0018] FIG. 4 is a schematic diagram of a color filter substrate comprising a flat protective layer after performing exposing and developing processes on the photoresist layer through a dual-tone mask in the fabrication method of the color filter substrate according to the embodiment of the present invention;

[0019] FIG. 5 is a partially enlarged view of the color

filter substrate shown in FIG. 4.

[0020] FIG. 6 is a schematic diagram of a color filter substrate comprising a columnar spacer and a flat protective layer after performing exposing and developing processes on the photoresist layer through a dual-tone mask in the fabrication method of the color filter substrate according to the embodiment of the present invention.

DETAILED DESCRIPTION

[0021] In order to make objects, technical details and advantages of the embodiments of the invention apparent, the technical solutions of the embodiment will be described in a clearly and completely understandable way in connection with the drawings related to the embodiments of the invention. It is obvious that the described embodiments are just a part but not all of the embodiments of the invention. Based on the described embodiments herein, those skilled in the art can obtain other embodiment(s), without any inventive work, which should be within the scope of the invention.

[0022] A first embodiment of the present invention provides a fabrication method of a color filter substrate. The method comprises steps of:

[0023] Forming a plurality of separators on a surface of a transparent base substrate, wherein the separators are used for separating the surface of the transparent base substrate into a plurality of color filter regions;

[0024] Forming a plurality of color filter patterns that arrange alternatively with the separators, wherein each color filter pattern covers one color filter region;

[0025] Forming an aperture in the color filter pattern on at least one of the color filter regions; at this time, as shown in FIG. 2, the separators 200, the color filter patterns 300 and the apertures 310 are formed on the transparent base substrate 100;

[0026] Forming a photoresist layer covering the separators, the color filter patterns and the aperture; at this time, as shown in FIG. 3, a pit 440 is formed on a portion of the photoresist layer 400 corresponding to the aperture;

[0027] Performing exposing and developing processes on the photoresist layer 400 through a dual-tone mask such as a gray-tone mask to form a flat protective layer; at this time, as shown in FIG. 4, the photoresist layer after the exposing and developing processes forms a flat protective layer. The flat protective layer includes a portion 410 located above the color filter pattern and a portion 420 located above the aperture. An upper surface of the portion 410 of the flat protective layer above the color filter pattern is even with an upper surface of the portion 420 of the flat protective layer above the aperture.

[0028] In the fabrication method of the color filter substrate according to the present embodiment, the flat protective layer is formed by performing exposing and developing processes on the photoresist layer, and the upper surface of the portion of the flat protective layer above the color filter pattern is even with the upper surface of

the portion of the flat protective layer above the aperture, so that the problem that the flat protective layer of the conventional color filter substrate has pits is solved.

[0029] Further, at the same time of performing exposing and developing processes on the photoresist layer through a dual-tone mask such as a gray-tone mask, a columnar spacer 430 above the separator may also be formed, and an upper surface of the columnar spacer 430 is higher than an upper surface of the flat protective layer. In this way, the columnar spacer and flat protective layer can be obtained by one patterning process, and thus the conventional manufacturing process for the columnar spacer can be omitted.

[0030] For example, the photoresist is a positive photoresist. The photoresist over the separator is completely exposed, an exposure amount for exposing the photoresist over the color filter pattern is equal to $H_4/H_3 \times A$, and an exposure amount for exposing the photoresist over the aperture is equal to $(H_2+H_4)/H_3 \times A$, where A is an exposure amount of complete exposure. As shown in FIG. 5, H1 is a thickness of the separator, H2 is a thickness of the color filter pattern, H3 is a thickness of the photoresist over the separator, H4 is a thickness of the portion 410 of the flat protective layer above the color filter pattern, and H2+H4 is a thickness of the portion 420 of the flat protective layer above the aperture.

[0031] After the exposing and developing processes, the height of the removed photoresist over the color filter pattern $H = H_1 + H_3 - (H_2 + H_4)$, and $H > h$, where h is the depth of the pit. That is to say, the height of the removed photoresist over the color filter pattern is greater than the depth of the pit.

[0032] In the fabrication method of the color filter substrate according to the present embodiment, with a precise control of the exposure amount for exposing the photoresist over the color filter pattern and the exposure amount for exposing the photoresist over the aperture, the columnar spacer, the portion of the flat protective layer above the color filter pattern with the thickness of H4, and the portion of the flat protective layer above the aperture with the thickness of H2+H4 are obtained through one single patterning process. Thus, the pits in the flat protective layer of the conventional color filter substrate are eliminated. Meanwhile, the columnar spacer and the flat protective layer are obtained through one single patterning process, and thus the fabrication process for the color filter substrate can be simplified.

[0033] The separator may be a photoresist separator or a black matrix. However, the form of the separator is not limited to the types listed above, and the separator can adopt any other forms as long as it can separate the surface of the transparent base substrate into the plurality of color filter regions.

[0034] A specific example will be described below with reference to Fig. 5.

[0035] For example, the thickness of the separator is $H_1 = 1 \mu\text{m}$, the thickness of the color filter pattern is $H_2 = 1.5 \mu\text{m}$, the thickness of the photoresist over the sep-

arator is $H_3 = 4.5 \mu\text{m}$, and the depth of the pit is $h = 0.5 \mu\text{m}$.

[0036] For example, it is required the thickness of the portion 410 of the flat protective layer above the color filter pattern to be $H_4 = 1.5 \mu\text{m}$, and the thickness of the portion 420 of the flat protective layer above the aperture to be $H_2 + H_4 = 1.5 \mu\text{m} + 1.5 \mu\text{m} = 3 \mu\text{m}$.

[0037] The photoresist over the separator is completely exposed with an exposure amount of A, and all the photoresist over the separator with the thickness of $4.5 \mu\text{m}$ is used to form the columnar spacer.

[0038] The thickness of the portion 410 of the flat protective layer above the color filter pattern is $H_4 = 1.5 \mu\text{m}$, that is, the portion 410 of the flat protective layer above the color filter pattern with the thickness of $1.5 \mu\text{m}$ is formed after the photoresist above the color filter pattern is exposed and developed. The exposure amount for exposing the photoresist above the color filter pattern is $H_4/H_3 \times A = 1.5/4.5 \times A = 1/3 \times A$.

[0039] The thickness of the portion 420 of the flat protective layer above the aperture is $H_2 + H_4 = 3 \mu\text{m}$, that is, the portion 420 of the flat protective layer above the aperture with the thickness of $3 \mu\text{m}$ is formed after the photoresist above the aperture is exposed and developed. The exposure amount for exposing the photoresist above the aperture is $(H_2 + H_4)/H_3 \times A = 3/4.5 \times A = 2/3 \times A$.

[0040] A second embodiment of the present invention provides a color filter substrate. The color filter substrate is obtained by the fabrication method according to the first embodiment.

[0041] As shown in FIG. 6, the color filter substrate comprises: a transparent base substrate 100; a plurality of separators 200 formed on a surface of the transparent base substrate and separating the surface of the transparent base substrate into a plurality of color filter regions; a plurality of color filter patterns 300 that arrange alternately with the separators 200, wherein each color filter pattern covers one color filter region; an aperture formed in the color filter pattern on at least one of the color filter regions; a flat protective layer at least disposed on the color filter pattern and the aperture, wherein an upper surface of a portion 410 of the flat protective layer above the color filter pattern is even with an upper surface of a portion 420 of the flat protective layer above the aperture.

[0042] In the color filter substrate according to the present embodiment, the upper surface of the portion 410 of the flat protective layer above the color filter pattern is even with the upper surface of the portion 420 of the flat protective layer above the aperture, thereby the problem that the pits cause the flat protective layer unable to be completely flat in the conventional technology can be solved.

[0043] For example, as shown in FIG. 6, the color filter substrate according to the present embodiment further comprises a columnar spacer 430 disposed above the separator 200, and an upper surface of the columnar spacer 430 is higher than an upper surface of the flat protective layer.

[0044] For example, the columnar spacer and the flat

protective layer are integrally formed. When the columnar spacer and the flat protective layer are integrally formed, the columnar spacer can be firmly fixed, thus uneven display effect caused by dislocation of the columnar spacer can be prevented.

[0045] For example, the separator is a photoresist separator or a black matrix.

[0046] A third embodiment of the present invention provides a transfective liquid crystal display device. The transfective liquid crystal display device comprises an array substrate and a color filter substrate, wherein the color filter substrate is the color filter substrate according to the second embodiment of the present invention.

[0047] The transfective liquid crystal display device employs the color filter substrate according to the second embodiment, so that the cell gap of the transfective liquid crystal display device is uniform after the cell assembly process of the transfective liquid crystal display is performed. Therefore, the possibilities of grayscale deflection, reduction of reflectivity of the reflective region and other issues can be reduced.

[0048] The foregoing embodiments merely are exemplary embodiments of the invention, and not intended to define the scope of the invention, and the scope of the invention is determined by the appended claims.

Claims

1. A color filter substrate, comprising:

a transparent base substrate;
a plurality of separators formed on a surface of the transparent base substrate and separating the surface of the transparent base substrate into a plurality of color filter regions;
a plurality of color filter patterns that arrange alternatively with the separators, wherein each color filter pattern covers one color filter region;
an aperture formed in the color filter pattern on at least one of the color filter regions;
a flat protective layer at least disposed on the color filter pattern and the aperture,
wherein an upper surface of a portion of the flat protective layer above the color filter pattern is even with an upper surface of a portion of the flat protective layer above the aperture.

2. The color filter substrate according to claim 1, wherein the color filter substrate further comprises a columnar spacer disposed above the separator, and an upper surface of the columnar spacer is higher than an upper surface of the flat protective layer.

3. The color filter substrate according to claim 2, wherein the columnar spacer and the flat protective layer are integrally formed.

4. The color filter substrate according to claim 1, wherein the separator is a photoresist separator or a black matrix.

5. A fabrication method of a color filter substrate, comprising steps of:

forming a plurality of separators on a surface of a transparent base substrate, wherein the separators separate the surface of the transparent base substrate into a plurality of color filter regions;
forming a plurality of color filter patterns that arrange alternatively with the separators, wherein each color filter pattern covers one color filter region;
forming an aperture in the color filter pattern on at least one of the color filter regions;
forming a photoresist layer covering the separators, the color filter patterns and the aperture; and
performing exposing and developing processes on the photoresist layer through a dual-tone mask to form a flat protective layer at least disposed on the color filter pattern and the aperture, wherein an upper surface of a portion of the flat protective layer above the color filter pattern is even with an upper surface of a portion of the flat protective layer above the aperture.

6. The fabrication method of a color filter substrate according to claim 5, wherein at the same time of performing exposing and developing processes on the photoresist layer through a dual-tone mask, a columnar spacer disposed above the separator is also formed, and
an upper surface of the columnar spacer is higher than an upper surface of the flat protective layer.

7. The fabrication method of a color filter substrate according to claim 6, wherein the photoresist over the separator is completely exposed with a complete exposure amount of A, an exposure amount for exposing the photoresist over the color filter pattern is $H4/H3 \times A$, and an exposure amount for exposing the photoresist over the aperture is $(H2+H4)/H3 \times A$, where H2 is a thickness of the color filter pattern, H3 is a thickness of the photoresist over the separator, H4 is a thickness of the portion of the flat protective layer above the color filter pattern, and H2+H4 is a thickness of the portion of the flat protective layer above the aperture.

8. The fabrication method of a color filter substrate according to claim 5, wherein the separator is a photoresist separator or a black matrix.

9. A transfective liquid crystal display device, comprising

ing the color filter substrate according to claim 1.

5

10

15

20

25

30

35

40

45

50

55

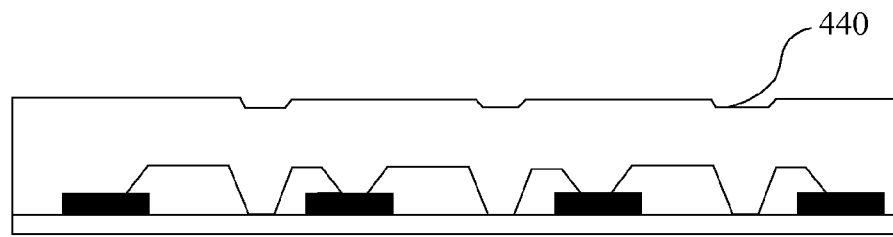


FIG. 1

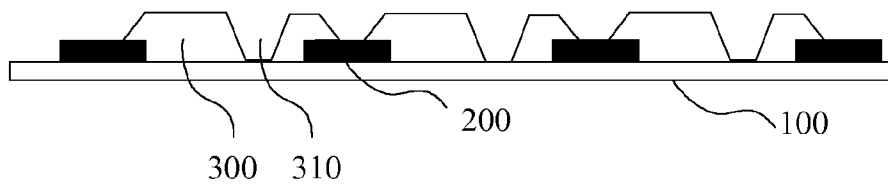


FIG. 2

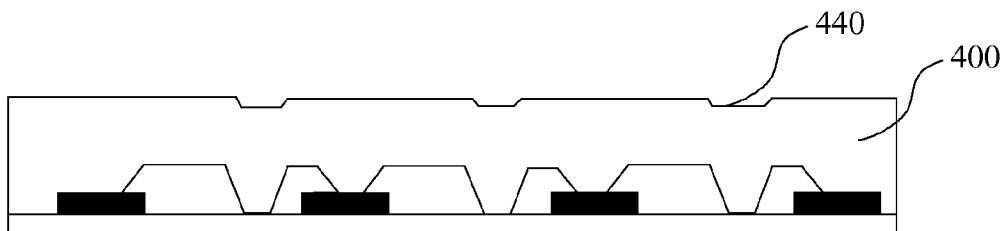


FIG. 3

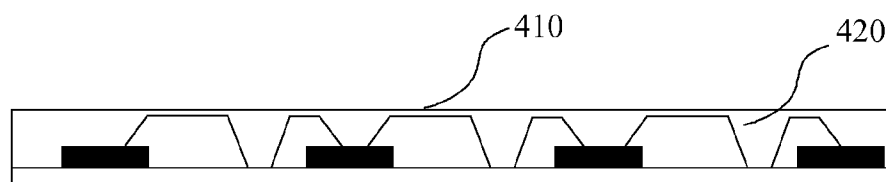


FIG. 4

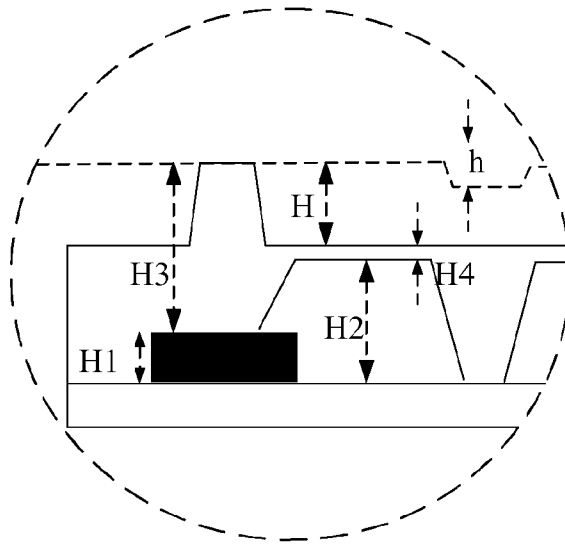


FIG. 5

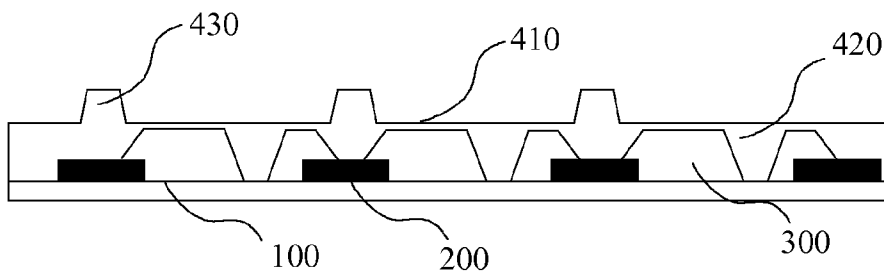


FIG. 6



EUROPEAN SEARCH REPORT

Application Number
EP 13 18 0101

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2007/008466 A1 (HORIGUCHI MASAHIRO [JP]) 11 January 2007 (2007-01-11) * abstract * * figures 16-21 * * paragraph [0018] - paragraph [0021] * * paragraph [0224] - paragraph [0249] * -----	1-9	INV. G02F1/1335
A	JP 2001 221910 A (DAINIPPON PRINTING CO LTD) 17 August 2001 (2001-08-17) * abstract * * figure 2 * -----	2,3,6,7	
			TECHNICAL FIELDS SEARCHED (IPC)
			G02F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 15 October 2013	Examiner Sittler, Gilles
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

4
EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 13 18 0101

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-10-2013

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2007008466 A1		11-01-2007	JP 4151702 B2	17-09-2008
			JP 2007041521 A	15-02-2007
			KR 20070005514 A	10-01-2007
			US 2007008466 A1	11-01-2007
			US 2009141219 A1	04-06-2009

JP 2001221910 A		17-08-2001	JP 4473394 B2	02-06-2010
			JP 2001221910 A	17-08-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

专利名称(译)	滤色器基板及其制造方法，透反液晶显示装置		
公开(公告)号	EP2713199A1	公开(公告)日	2014-04-02
申请号	EP2013180101	申请日	2013-08-12
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团有限公司.		
当前申请(专利权)人(译)	京东方科技集团有限公司.		
[标]发明人	QI YONGLIAN WANG CAN HUI GUANBAO XUE JIANSHE		
发明人	QI, YONGLIAN WANG, CAN HUI, GUANBAO XUE, JIANSHE		
IPC分类号	G02F1/1335		
CPC分类号	G02F1/133516 G02F1/133555 G02F2001/133519 G02B5/22 G02F1/133514 G03F7/0007		
优先权	201210365824.X 2012-09-27 CN		
其他公开文献	EP2713199B1		
外部链接	Espacenet		

摘要(译)

本发明提供一种彩色滤光片基板及其制造方法，以及透射反射型液晶显示装置。滤色器基板包括：透明基底；多个隔板形成在透明基板的表面上，并将透明基板的表面分成多个滤色区域；多个滤色器图案，与分隔件交替排列，其中每个滤色器图案覆盖一个滤色区域；在至少一个滤色器区域上的滤色器图案中形成的孔径；至少设置在滤色器图案和孔上的平坦保护层，其中在滤色器图案上方的平坦保护层的一部分的上表面与孔上方的平坦保护层的一部分的上表面均匀。

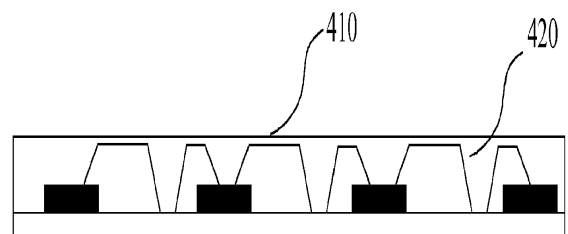


FIG. 4