



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.09.2017 Bulletin 2017/36

(51) Int Cl.:
G02F 1/1333 (2006.01) G02F 1/13357 (2006.01)

(21) Application number: **17167616.6**

(22) Date of filing: **10.11.2006**

(84) Designated Contracting States:
DE GB NL

• **Kang, Joon**
Seoul 602-27 (KR)

(30) Priority: **13.03.2006 KR 20060023068**

(74) Representative: **Land, Addick Adrianus Gosling et al**
Arnold & Siedsma
Bezuidenhoutseweg 57
2594 AC The Hague (NL)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
14171255.4 / 2 778 774
06077004.7 / 1 835 330

(71) Applicant: **Samsung Electronics Co., Ltd.**
Gyeonggi-do 16677 (KR)

Remarks:


This application was filed on 21-04-2017 as a divisional application to the application mentioned under INID code 62.

(72) Inventors:
 • **Cho, Jin Hyun**
Seoul (KR)

(54) **LIQUID CRYSTAL DISPLAY APPARATUS**

(57) A liquid crystal display apparatus comprises a liquid crystal panel assembly including: a liquid crystal panel (10), a backlight module (20) having a light source (21) including a plurality of light emitting diodes (21b) mounted on a circuit board (21a), a light guide plate (22), a diffusing plate (23), and a reflecting plate (24), and a housing which surrounds the liquid crystal panel (10) and the backlight module, the housing comprising a front housing part (31) which exposes a screen of the liquid crystal panel to the outside and a rear housing part (32) formed of a thermally conductive material; and a frame to which the liquid crystal panel assembly is mounted, the frame comprising a front frame part (41) which exposes a screen of the liquid crystal panel to the outside and a rear frame part (42) formed of a thermally conductive material, wherein the rear housing part (32) and the rear frame part (42) are each arranged to be in thermal contact with the light source (21).

FIG. 4

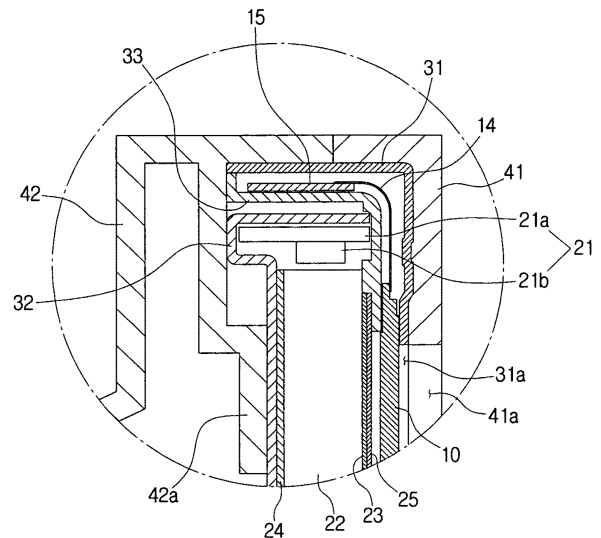

Description

[0001] Apparatuses consistent with the present invention relate to a liquid crystal display (LCD) apparatus using a light emitting diode (LED) as a light source.

[0002] A liquid crystal display (LCD) apparatus is a kind of flat panel display (FPD) apparatus, which converts various electric information generating from all sorts of devices into visual information by using a change of transmissivity in a liquid crystal according to a voltage applied thereto and displays it. Contrary to a cathode ray tube (CRT) display apparatus, the FDP apparatus needs a backlight because it does not have a self-luminosity. However, the FDP apparatus consumes little electric power and can be used in a portable type device because it is driven with a low driving voltage. Thus, the FDP apparatus is widely used in a watch, a TV, a monitor for computer, etc.

[0003] Such a LCD apparatus usually includes a liquid crystal panel, and a backlight module arranged adjacent to the liquid crystal panel.

[0004] The liquid crystal panel is provided with a pair of substrates arranged in a minutely spaced-apart relation to each other, a liquid crystal interposed in a space between the substrates, and a driving circuit to drive the liquid crystal.

[0005] According to a method of driving the liquid crystal, the liquid crystal panel is classified into an active matrix type to drive a pixel capacity by using switch elements, a passive matrix type to drive a pixel capacity without using switch elements, etc.

[0006] Particularly, the active matrix type liquid crystal panel can be further classified into a type using three terminal type switch elements such as thin film transistors (TFT), a type using two terminal type switch elements such as thin film diodes (TFD), etc.

[0007] The backlight module is provided with a light guide plate arranged adjacent to the liquid crystal panel, and a light source to irradiate light to the light guide plate. Light conveyed to the light guide plate from the light source is guided to the liquid crystal panel through a diffusing plate and/or a prism.

[0008] A fluorescent lamp, such a cold cathode fluorescent lamp (CCFL), an external electrode fluorescent lamp (EEFL), etc., is usually used as the light source of the backlight module. However, the fluorescent lamp is disadvantageous in that a lifespan is shortened due to a change of gas pressure in plasma, an inverter is required to realize a high driving voltage of several hundred volts necessary for plasma discharge, and a consumption efficiency of electric power is low.

[0009] Accordingly, recently a light emitting diode (LED) is in the spotlight as the light source for use in the backlight module. The LED is a light emitting element, which produces light by a light emitting phenomenon generating when a voltage is applied to a semiconductor. The LED is advantageous in that as compared with the conventional light source such as a fluorescent lamp, a

size is relatively small, a lifespan is guaranteed for a relatively long time, an energy efficiency is relatively high since an electric energy is directly converted into a light energy, and a relatively low driving voltage is required.

[0010] However, when the LED is used as the light source for the backlight module in the LCD apparatus, it is disadvantageous in that due to heat of high temperature generating while the LED is operated, the liquid crystal panel is subject to a negative influence and a light emitting performance of the LED itself is deteriorated. Accordingly, recently, there have been developed and disclosed various types of heat emitting structures, which can effectively emit the heat from the LED.

[0011] FIG. 1 is a side section view exemplifying a related art LCD apparatus.

[0012] As shown in the drawing, the related art LCD apparatus includes a liquid crystal panel 1, a backlight module 2 to irradiate light to the liquid crystal panel 1, a controller 3 to drive the liquid crystal panel 1 and the backlight module 2, and a frame 4 to which the liquid crystal panel 1 and the backlight module 2 are mounted.

[0013] A driving circuit board (not shown) for liquid crystal is connected to the liquid crystal panel 1.

[0014] The backlight module 2 includes a LED light source 5. The LED light source 5 is provided with a plurality of LEDs 5a, and a circuit board 5b on which the plurality of LEDs 5a are mounted.

[0015] At a rear side of the LED light source 5 is arranged a heat radiating member 7 having a plurality of heat radiating pins 7a. The heat radiating member 7 emits heat generating from the LED light source 5 to the outside.

[0016] The controller 3 includes a power supply, an inverter, a main control board, all sorts of electric elements and sensors, etc., which are not shown in the drawing, and controls a whole operation of the LCD apparatus. The frame 4 is provided with a front frame part 4a to which the liquid crystal panel 1 is mounted, and a rear frame 4b arranged behind the front frame part 4a.

[0017] Between the frame 4 and the backlight module 2 are arranged a first shield 8 to surround the backlight module 2 and the liquid crystal panel 1, and a second shield 9 to surround the controller 3.

[0018] The first and the second shields 8 and 9 are made of an electric-conductive material so as to shield all sorts of electromagnetic waves generating from the backlight module 2 and the controller 3.

[0019] However, such a related art LCD apparatus is disadvantageous in that the heat radiating member 7 used for emitting the heat of high temperature generating from the LED light source 5 occupies a large installation space, thereby increasing a size of the LCD apparatus.

[0020] Further, the related art LCD apparatus is disadvantageous in that there is no heat radiating structure to emit all sorts of heat of high temperature generating from the controller 3, thereby deteriorating a display quality of the LCD apparatus.

[0021] Also, the related art LCD apparatus is disad-

vantageous in that there is installed a shield structure such as the first and the second shields 8 and 9 to intercept the electromagnetic waves generating from the backlight module 2 and the liquid crystal panel 1, thereby increasing the number of assembling parts and processes and enlarging a volume of the LCD apparatus.

[0022] Exemplary embodiments of the present invention address at least the above problems and/or disadvantages. Accordingly, an aspect of the present invention is to provide a liquid crystal panel assembly and a liquid crystal display (LCD) apparatus having the same, which can realize a more-compact size.

[0023] Another aspect of the present invention is to provide a liquid crystal panel assembly and a LCD apparatus having the same, which have a greatly enhanced display quality.

[0024] Still another aspect of the present invention is to provide a liquid crystal panel assembly and a LCD apparatus having the same, which can realize a high-energy efficiency.

[0025] Also another aspect of the present invention is to provide a liquid crystal panel assembly and a LCD apparatus having the same, which can more effectively emit heat of high temperature generating from a light emitting diode (LED) light source of a backlight module.

[0026] According to one aspect of an exemplary embodiment of the present invention, there is provided a liquid crystal panel assembly comprising a liquid crystal panel, a backlight module having at least one LED light source which irradiates light to the liquid crystal panel, and a housing which surrounds the liquid crystal panel and the backlight module, wherein at least a portion of the housing adjacent to the at least one LED light source is formed of a thermal-conductive material.

[0027] The housing may comprise a front housing part which exposes a screen of the liquid crystal panel to the outside, and a rear housing part arranged at a rear side of the backlight module, and the rear housing part may be formed of a thermal-conductive material.

[0028] The rear housing part may be arranged to surround the at least one LED light source.

[0029] The backlight module may further comprise a light guide plate which guides light from the at least one LED light source, a diffusing plate which diffuses light from the light guide plate to the liquid crystal panel, and a reflecting plate which reflects light from the light guide plate to the diffusing plate.

[0030] The at least one LED light source of the backlight module may comprise a pair of LED light sources arranged symmetrically to each other at both sides of the light guide plate.

[0031] According to another aspect of an exemplary embodiment of the present invention, there is provided a LCD apparatus comprising a liquid crystal panel assembly comprising a liquid crystal panel, and a backlight module having at least one LED light source which irradiates light to the liquid crystal panel, and a frame to which the liquid crystal panel assembly is mounted,

wherein at least a portion of the frame adjacent to the at least one LED light source is formed of a thermal-conductive material.

[0032] The frame may comprise a front frame part which exposes a screen of the liquid crystal panel to the outside, and a rear frame part arranged behind the front frame part, and the rear frame part may be formed of a thermal-conductive material.

[0033] The rear frame part may be formed of a thermal and electric-conductive material.

[0034] The liquid crystal panel assembly may further comprise a housing which surrounds the liquid crystal panel and the backlight module, and at least a portion of the housing adjacent to the at least one LED light source may be formed of a thermal-conductive material.

[0035] The housing may comprise a front housing part which exposes a screen of the liquid crystal panel to the outside, and a rear housing part arranged at a rear side of the backlight module, and the rear housing part may be formed of a thermal-conductive material.

[0036] The rear housing part may be arranged to surround the at least one LED light source.

[0037] The rear housing part may be in contact with the frame.

[0038] According to also another aspect of an exemplary embodiment of the present invention, there is provided a LCD apparatus comprising a liquid crystal panel assembly comprising a liquid crystal panel, and a backlight module having at least one LED light source which irradiates light to the liquid crystal panel, and a frame to which the liquid crystal panel assembly is mounted, the frame being formed of a thermal-conductive material.

[0039] Other aspects and features of the invention will become apparent to those skilled in the art from the following detailed description, which, taken in conjunction with the annexed drawings, discloses exemplary embodiments of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040] These and/or other aspects of certain exemplary embodiments of the present invention will become apparent and more readily appreciated from the following description of the exemplary embodiments, taken in conjunction with the accompanying drawings of which:

FIG. 1 is a side section view exemplifying a related art LCD apparatus;

FIG. 2 is an exploded perspective view exemplifying a liquid crystal panel assembly in accordance with an exemplary embodiment of the present invention; FIG. 3 is a cross section view exemplifying a LCD apparatus in accordance with another exemplary embodiment of the present invention; and

FIG. 4 is a magnified cross section view of a portion IV of FIG. 3.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS OF THE PRESENT INVENTION

[0041] Reference will now be made in detail to the exemplary embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The exemplary embodiments are described below in order to explain the present invention by referring to the figures.

[0042] FIG. 2 exemplifies a liquid crystal panel assembly in accordance with an exemplary embodiment of the present invention, and FIGS. 3 and 4 exemplify a liquid crystal display (LCD) apparatus in accordance with another exemplary embodiment of the present invention to which the liquid crystal panel assembly is applied.

[0043] As illustrated in the drawings, the liquid crystal panel assembly 100 in accordance with an exemplary embodiment of the present invention includes a liquid crystal panel 10, a backlight module 20 to irradiate light to the liquid crystal panel 10, and a housing 30.

[0044] The liquid crystal panel 10 may be one of various types of liquid crystal panels, which has a pair of substrates arranged in a minutely spaced-apart relation to each other, a liquid crystal interposed in a space between the pair of substrates, etc.

[0045] The backlight module 20 is provided with at least one light emitting diode (LED) light source 21, a light guide plate 22 to guide light from the LED light source 21, a diffusing plate 23 to diffuse light from the light guide plate 22 to the liquid crystal panel 10, and a reflecting plate 24 arranged at a rear side of the light guide plate 22.

[0046] The LED light source 21 includes a circuit board 21a, and a plurality of LEDs 21b mounted on the circuit board 21a. The respective LEDs 21b irradiate light in a lateral direction of the light guide plate 22, the light guide plate 22 leads light from the respective LEDs 21b to the diffusing plate 23, and the diffusing plate 23 diffuses light conveyed from the light guide plate 22 to the liquid crystal panel 10. The reflecting plate 24, which is arranged at an opposite surface to a light emitting surface of the light guide plate 22, reflects and guides light led onto the opposite surface of the light guide plate 22 toward the diffusing plate 23.

[0047] According to an exemplary embodiment of the present invention, the LED light source 21 is configured, such that as illustrated in FIGS. 2 and 3, a pair of LED light sources are arranged at both ends, e.g., upper and lower ends, of the light guide plate 22, respectively, thereby uniformly conveying light all over the light guide plate 22.

[0048] However, the present invention does not limit the number and the arrangement of the LED light source 21. For instance, instead of arranging the pair of LED light sources 21 at both ends of the light guide plate 22 as illustrated in FIGS. 2 and 3, a single LED light source (not shown) can be arranged at the middle of the backlight module 20.

[0049] Also, a condensing sheet 25 is interposed between the diffusing plate 23 and the liquid crystal panel 10. The condensing sheet 25 functions to condense light diffused by the diffusing plate 23 into an image area of the liquid crystal panel 10, like, e.g., a prism sheet, a high brightness film, etc.

[0050] If a prism sheet is used as the condensing sheet 25, it does not transmit an S wave, thereby reducing a light efficiency even though a P wave is transmitted. Thus, a high brightness film such as a dual brightness-enhanced film (DBEF) may be used as the condensing sheet 25.

[0051] Such a high brightness film, as an improved reflective polarizer to reduce a loss of light as generated in the prism sheet, converts a direction of an S wave component into the same direction as that of a P wave component to reduce a loss of the S wave, thereby increasing a brightness.

[0052] The housing 30 is arranged to surround the liquid crystal panel 10 and the backlight module 20, either contacting with or being adjacent to but without contacting with the LED light source 21 of the backlight module 20 at a portion thereof. The housing 30 includes a front housing part 31 formed to expose an effective display area of a screen of the liquid crystal panel 10 to the outside, and a rear housing part 32 arranged behind the front housing part 31.

[0053] The front housing part 31 has an opening 31a to expose the effective display area of the screen of the liquid crystal panel 10 to the outside.

[0054] The rear housing part 32 is mounted at a rear side of the backlight module 20, so that it is arranged to be either in contact or adjacent to, but not being in contact with the LED light source 21 of the backlight module 20 (see FIG. 4).

[0055] The rear housing part 32 is formed of a thermal-conductive material such as Al, Zr-electroplated steel, Cu, graphite, thermal-conductive plastic, etc. so as to facilitate an emission of heat of high temperature generating from the LED light source 21 therethrough.

[0056] The rear housing part 32 may be configured in a shape to surround the LED light source 21 to more facilitate the emission of the heat of high temperature generating from the LED light source 21.

[0057] Referring to FIG. 4, the front and the rear housing parts 31 and 32 are interconnected by a frame-shaped connecting bracket 33. A driving circuit board 15 for liquid crystal is disposed between the connecting bracket 33 and the front housing part 31, and connected to the liquid crystal panel 10 through a flexible board 14 to drive and control a pixel capacity of the liquid crystal panel 10.

[0058] Similarly to the rear housing part 32, the connecting bracket 33 is formed of a thermal-conductive material.

[0059] The LCD apparatus 200 in accordance with another exemplary embodiment of the present invention includes a liquid crystal panel assembly 100 as described

above, and a frame 40 to which the liquid crystal panel assembly 100 is mounted.

[0060] The frame 40 is provided with a front frame part 41 to which the liquid crystal panel 10 is mounted to expose an effective display area of the screen thereof to the outside, and a rear frame part 42 mounted at a rear side of the liquid crystal panel assembly 100.

[0061] The front frame part 41 has an opening 41a corresponding to the opening 31a of the front housing part 31 so as to expose the effective display area of the screen of the liquid crystal panel 10 to the outside.

[0062] The rear frame part 42 is configured, such that it is either in contact or adjacent to, but not contacting with the LED light source 21 of the liquid crystal panel assembly 100.

[0063] The rear frame part 42 is formed of a thermal and electric-conductive material such as Al, Zr-electroplated steel, Cu, etc.

[0064] The rear frame part 42 at an inner side thereof may have a contact part 42a to be in contact with and support the rear housing part 32 of the liquid crystal panel assembly 100. With the rear frame part 42 and the rear housing part 32 being in contact with each other, the heat of high temperature generating from the LED light source 21 can be more effectively emitted to the outside through the rear frame part 42 and the rear housing part 32.

[0065] Between the rear frame part 42 and the rear housing part 32 is interposed a controller 50. The controller 50 includes a power supply to control a supply of electric power, an inverter, a main control board to control all sorts of controlling and driving signals for the LCD apparatus 200, all sorts of electric elements and sensors, etc., which are not shown in the drawings, and controls a whole operation of the LCD apparatus 200.

[0066] As previously noted, being formed of the thermal and electric-conductive material such as Al, Zr-electroplated steel, Cu, etc, and arranged behind the controller 50, the rear frame part 42 also has an electromagnetic wave shield function which effectively intercepts electromagnetic waves generating from the controller 50 during the operation.

[0067] According to the exemplary embodiments of the present invention as described above, the rear housing part 32 and/or the rear frame part 42 are formed of the thermal-conductive material. Accordingly, the heat of high temperature generating from the LED light source 21 can be more effectively emitted to the outside, thereby reducing a heating temperature of the LED light source 21. Thus, the display quality of the liquid crystal panel assembly and the LCD apparatus as well as the brightness of the LED light source 21 can be enhanced.

[0068] Further, according to the exemplary embodiments of the present invention, as the heat generating from the LED light source 21 is effectively emitted to the outside as described above, the liquid crystal panel assembly and the LCD apparatus can minimize the consumption of electric power, thereby maximizing the energy efficiency.

[0069] Also, according to the exemplary embodiments of the present invention, the liquid crystal panel assembly and the LCD apparatus is configured, such that a structure of emitting the heat from the LED light source 21 is simplified as described above. Accordingly, the liquid crystal panel assembly and the LCD apparatus can be embodied to have a more-compact size.

[0070] Also, according to the exemplary embodiments of the present invention, the rear frame part 42 is formed of the thermal and electric-conductive material so as to intercept the electromagnetic waves generating from the controller 50. Accordingly, the LCD apparatus does not need a separate electromagnetic wave shield structure.

[0071] Although a few exemplary embodiments of the present invention have been generally shown and described, it will be appreciated by those skilled in the art that changes may be made in these exemplary embodiments without departing from the principles and spirit of the invention, the scope of which is defined in the appended claims and their equivalents.

CLAUSES

[0072]

1. A liquid crystal panel assembly comprising:

a liquid crystal panel;
a backlight module having at least one light emitting diode (LED) light source which irradiates light to the liquid crystal panel; and
a housing which surrounds the liquid crystal panel and the backlight module,
wherein at least a portion of the housing adjacent to the at least one LED light source is formed of a thermal-conductive material.

2. The liquid crystal panel assembly as claimed in claim 1,
wherein the housing comprises a front housing part which exposes a screen of the liquid crystal panel to the outside, and a rear housing part arranged at a rear side of the backlight module,
wherein the rear housing part is formed of a thermal-conductive material.

3. The liquid crystal panel assembly as claimed in claim 2, wherein the rear housing part is arranged to surround the at least one LED light source.

4. The liquid crystal panel assembly as claimed in claim 1, wherein the backlight module further comprises:

a light guide plate which guides light from the at least one LED light source;
a diffusing plate which diffuses light from the light guide plate to the liquid crystal panel; and

a reflecting plate to which reflects light from the light guide plate to the diffusing plate.

5. The liquid crystal panel assembly as claimed in claim 4, wherein the at least one LED light source of the backlight module comprises a pair of LED light sources arranged symmetrically to each other at both sides of the light guide plate. 5
6. A liquid crystal display apparatus comprising: 10
- a liquid crystal panel assembly comprising a liquid crystal panel, and a backlight module having at least one light emitting diode (LED) light source which irradiates light to the liquid crystal panel; and 15
- a frame to which the liquid crystal panel assembly is mounted, wherein at least a portion of the frame adjacent to the at least one LED light source is formed of a thermal-conductive material. 20
7. The liquid crystal display apparatus as claimed in claim 6, wherein the frame comprises a front frame part which exposes a screen of the liquid crystal panel to the outside, and a rear frame part arranged behind the front frame part, wherein the rear frame part is formed of a thermal-conductive material. 25
8. The liquid crystal display apparatus as claimed in claim 7, wherein the rear frame part is formed of a thermal and electric-conductive material. 30
9. The liquid crystal display apparatus as claimed in claim 6, wherein the liquid crystal panel assembly further comprises a housing which surrounds the liquid crystal panel and the backlight module, wherein at least a portion of the housing adjacent to the at least one LED light source is formed of a thermal-conductive material. 35
10. The liquid crystal display apparatus as claimed in claim 9, wherein the housing comprises a front housing part which exposes a screen of the liquid crystal panel to the outside, and a rear housing part arranged at a rear side of the backlight module, wherein the rear housing part is formed of a thermal-conductive material. 40
11. The liquid crystal display apparatus as claimed in claim 10, wherein the rear housing part is arranged to surround the at least one LED light source. 45
12. The liquid crystal display apparatus as claimed in claim 10, 50

wherein the frame comprises a front frame part which exposes the screen of the liquid crystal panel to the outside, and a rear frame part arranged behind the front frame part,

wherein the rear frame part is formed of a thermal-conductive material, the rear frame part being in contact with the rear housing part.

13. A liquid crystal display apparatus comprising:

a liquid crystal panel assembly comprising a liquid crystal panel, and a backlight module having at least one light emitting diode (LED) light source which irradiates light to the liquid crystal panel; and

a frame to which the liquid crystal panel assembly is mounted, the frame being formed of a thermal-conductive material.

14. The liquid crystal panel assembly as claimed in claim 2, wherein the rear housing part is arranged to be in contact with at least a portion of the at least one LED light source.

15. The liquid crystal panel assembly as claimed in claim 3, wherein the rear housing part is adjacent to, but not in contact with the at least one LED light source.

16. The liquid crystal display apparatus as claimed in claim 7, wherein the rear frame part is arranged to be in contact with at least a portion of the at least one LED light source.

17. The liquid crystal display apparatus as claimed in claim 7, wherein the rear frame part is arranged to be adjacent to, but not in contact with the at least one LED light source.

Claims

1. A liquid crystal display apparatus (200) comprising:
- a liquid crystal panel assembly (100) including:
- a liquid crystal panel (10),
- a backlight module (20) having a light source (21) including a plurality of light emitting diodes, LEDs (21b), and arranged to irradiate light to the liquid crystal panel (10), and
- a housing (30) which surrounds the liquid crystal panel (10) and the backlight module, the housing comprising a front housing part (31) which exposes a screen of the liquid crystal panel to the outside and a rear housing part (32) arranged at a rear side of the

- backlight module and formed of a thermally conductive material; and
- a frame (40) to which the liquid crystal panel assembly is mounted, the frame comprising a front frame part (41) which exposes a screen of the liquid crystal panel to the outside and a rear frame part (42) arranged behind the front frame part, wherein the rear frame part is formed of a thermally conductive material, wherein the backlight module further comprises a light guide plate (22) to guide light from the at least one LED light source, a diffusing plate (23) to diffuse light from the light guide plate to the liquid crystal panel, and a reflecting plate (24) arranged to reflect light from the light guide plate to the diffusion plate, wherein the LED light source includes a circuit board (21 a) onto which the plurality of LEDs are mounted, wherein the respective LEDs irradiate light in a lateral direction of the light guide plate, wherein the rear housing part and the rear frame part are each arranged to be either in contact with or adjacent to the at least one LED light source.
2. The liquid crystal display apparatus according to claim 1, wherein the LED light source comprises a pair of LED light sources arranged symmetrically to each other at both sides of the light guide plate.
 3. The liquid crystal display apparatus according to any preceding claim, wherein the rear frame part is provided at the inner side thereof with a contact part in contact with and supporting the rear housing part.
 4. The liquid crystal display apparatus according to any preceding claim, wherein the rear housing part is arranged to surround the at least one LED light source.
 5. The liquid crystal display apparatus according to any preceding claim, wherein the front housing part and the rear housing part are interconnected by a frame-shaped connecting bracket (33), wherein the connecting bracket is formed of a thermally conductive material.
 6. The liquid crystal display apparatus according to any preceding claim, wherein the rear part of the frame is formed of a thermally and electrically conductive material.
 7. The liquid crystal display apparatus according to any preceding claim, further comprising a controller (50) interposed between the rear part of the frame and the rear part of the housing, the controller being arranged to control the operation of the liquid crystal display apparatus.
 8. The liquid crystal display apparatus according to claim 7, wherein the rear part of the frame has an electromagnetic shield function of effectively intercepting electromagnetic waves generated by the controller during operation.

FIG. 1

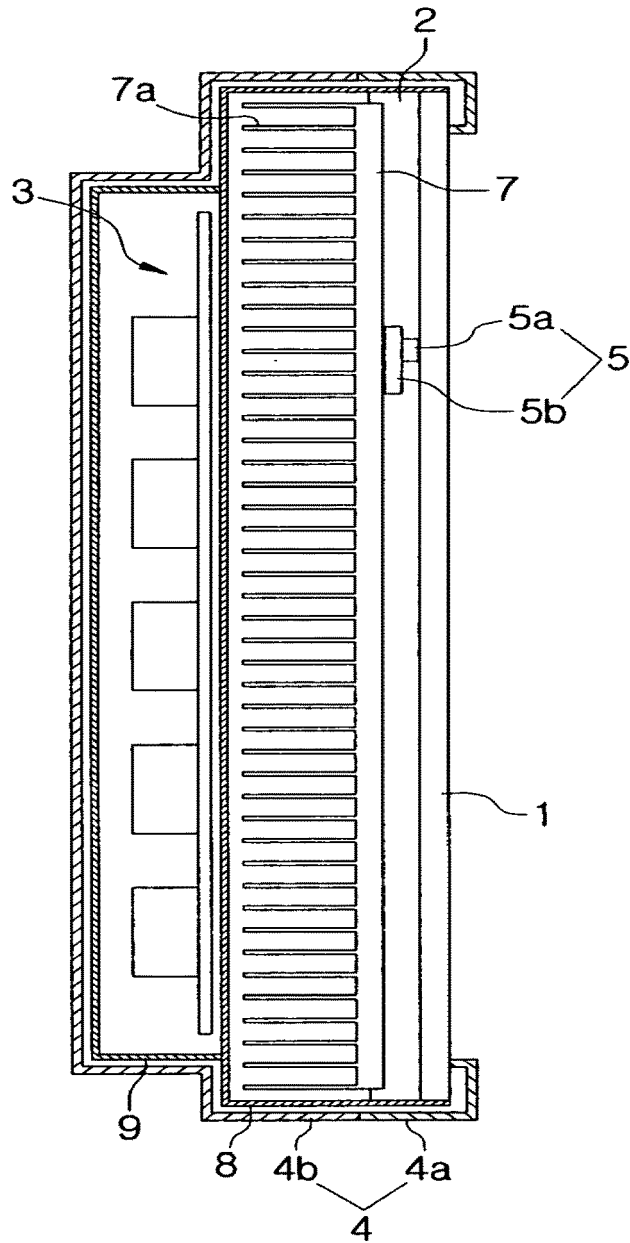


FIG. 2

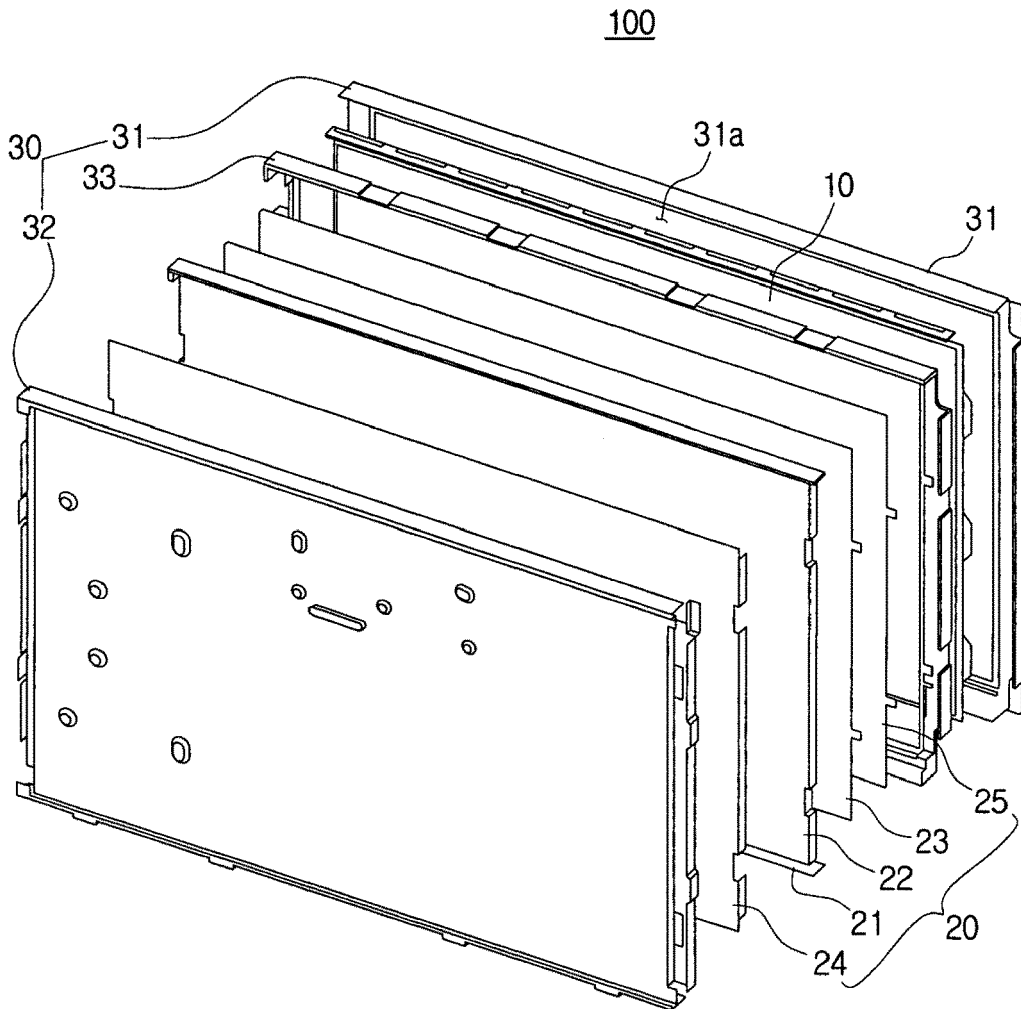


FIG. 3


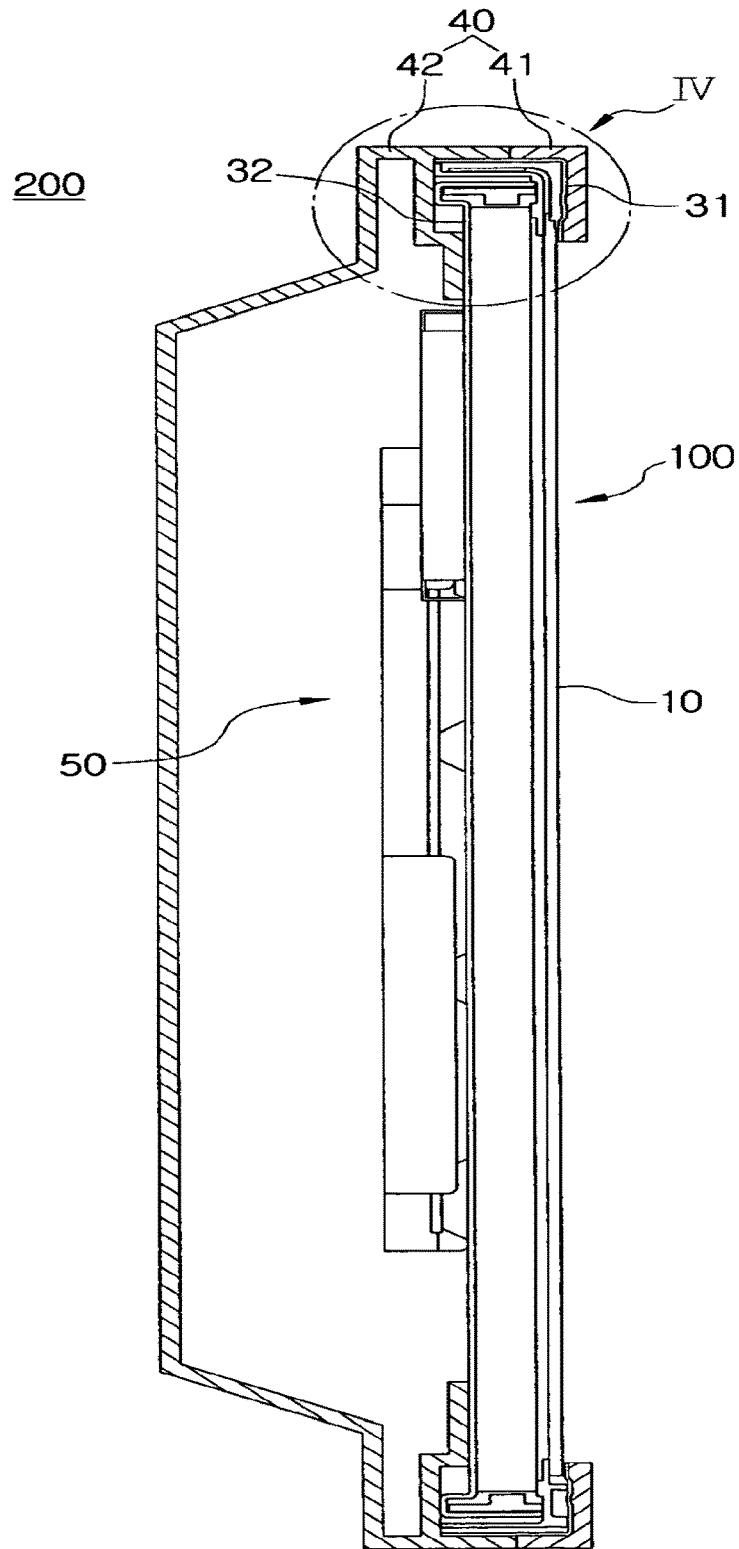


FIG. 4



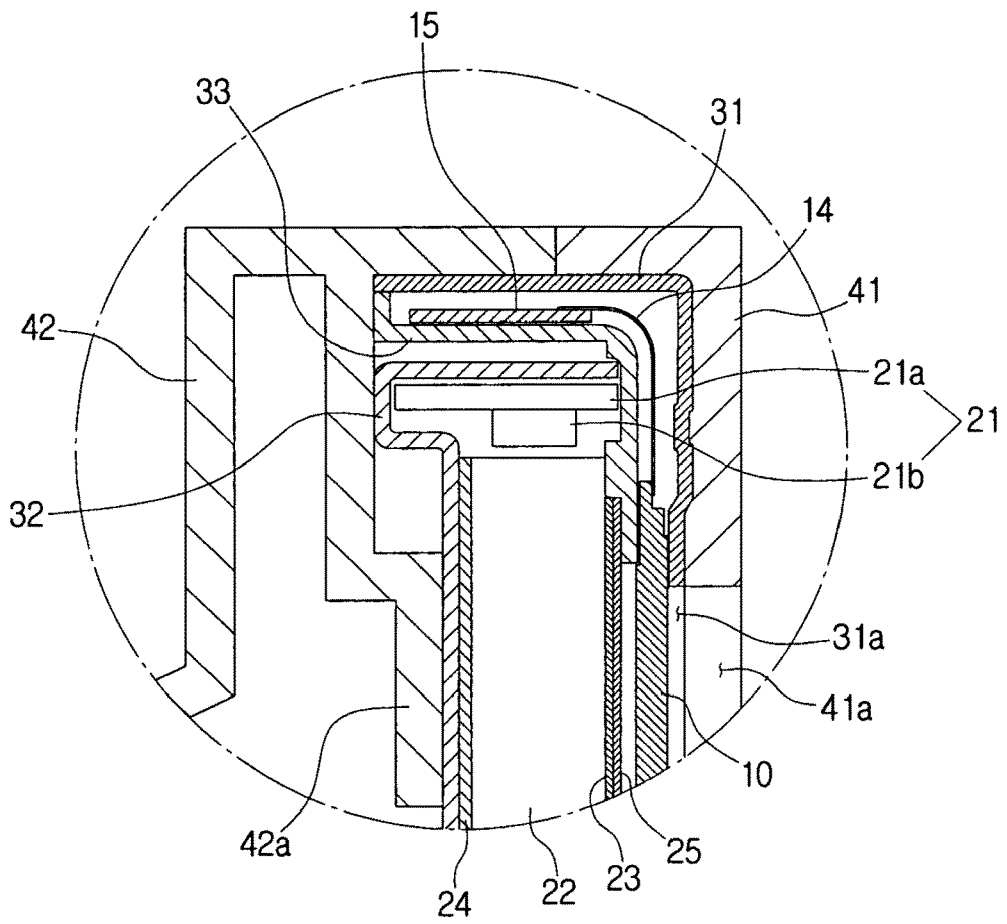

EUROPEAN SEARCH REPORT

Application Number
EP 17 16 7616

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y A	JP 2005 338178 A (SONY CORP) 8 December 2005 (2005-12-08) * abstract * * paragraph [0012] - paragraph [0025]; figure 1 *	1-6 7,8	INV. G02F1/1333 G02F1/13357
Y	----- JP 2006 011242 A (KYOCERA CORP) 12 January 2006 (2006-01-12) * abstract; figures 1,2 * * paragraph [0017] - paragraph [0050] * -----	1-6	
			TECHNICAL FIELDS SEARCHED (IPC)
			G02F G02B F21V
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 12 July 2017	Examiner Frank, Wolfgang
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 16 7616

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-07-2017

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2005338178 A	08-12-2005	NONE	

JP 2006011242 A	12-01-2006	CN 1716041 A	04-01-2006
		CN 101430067 A	13-05-2009
		CN 101430068 A	13-05-2009
		JP 2006011242 A	12-01-2006

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

专利名称(译)	液晶显示装置		
公开(公告)号	EP3214487A1	公开(公告)日	2017-09-06
申请号	EP2017167616	申请日	2006-11-10
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	CHO JIN HYUN KANG JOON		
发明人	CHO, JIN HYUN KANG, JOON		
IPC分类号	G02F1/1333 G02F1/13357		
CPC分类号	G02B6/0073 G02B6/0085 G02F1/133308 G02F1/133615 G02F2001/133314 G02F2001/133317 G02F2001/133334 G02F2001/133628		
审查员(译)	FRANK , WOLFGANG		
优先权	1020060023068 2006-03-13 KR		
外部链接	Espacenet		

摘要(译)

一种液晶显示装置，包括：液晶面板组件，包括：液晶面板（10），具有光源（21）的背光模块（20），所述光源包括安装在电路板上的多个发光二极管（21b）（21a），导光板（22），漫射板（23）和反射板（24），以及包围液晶面板（10）和背光模块的壳体，壳体包括前壳体部分（31）将液晶面板的屏幕暴露在外，并且后壳体部分（32）由导热材料形成；安装有液晶面板组件的框架，该框架包括：前框架部分（41），其将液晶面板的屏幕暴露到外部；以及后框架部分（42），由导热材料形成，其中后壳体部分（32）和后框架部分（42）各自设置成与光源（21）热接触。

FIG. 4

